

Index

INDEX2

ACRONYMS3

COMPETENCES AND GUARANTEES3

GENERAL CONDITIONS4

UNCERTAINTY4

DATA PROVIDED BY THE CLIENT5

USAGE OF SAMPLES6

TEST SAMPLE DESCRIPTION7

IDENTIFICATION OF THE CLIENT9

TESTING PERIOD AND PLACE9

DOCUMENT HISTORY9

ENVIRONMENTAL CONDITIONS9

REMARKS AND COMMENTS10

TESTING VERDICTS11

SUMMARY12

APPENDIX A: TEST COMMON REQUIREMENTS FOR ALL BANDS14

APPENDIX B: TESTS RESULTS FOR THE U-NII-1 BAND 5.15–5.25 GHZ156

APPENDIX C: TESTS RESULTS FOR THE U-NII-3 BAND 5.725–5.85 GHZ354

Acronyms

Acronym ID	Acronym Description
Avg Power	Maximum Average Conducted Output Power
DC	Duty Cycle
Detector	Detector used
Ebw	Emission Bandwidth
EUT	Equipment Under Test
Freq	Frequency
Freq Rng	Frequency Range
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Max EIRP	Maximum Burst EIRP
Mod	Modulation
Mode	MIMO Mode
Operation Band	Operation Band
PSD	Power Spectral Density
Pol	Polarization
Port	Active Port
TPC	TPC
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5,35$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4,32$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 40 GHz is:
Measurement uncertainty $\leq \pm 5,55$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Average Output Power: Measurement uncertainty $\leq \pm 2,01$ dB

Duty Cycle: Measurement uncertainty $\leq \pm 0,84$ ms

Power Spectral Density: Measurement uncertainty $\leq \pm 2,01$ dB

Occupied/26 dBc Bandwidth: Measurement uncertainty

$\leq \pm 57,76$ kHz for BW 20MHz;

$\leq \pm 115,53$ kHz for BW 40MHz; and

$\leq \pm 231,06$ kHz for BW 80MHz.

6 dB Bandwidth: Measurement uncertainty

$\leq \pm 34,67$ kHz for BW 20MHz;

$\leq \pm 46,22$ kHz for BW 40MHz; and

$\leq \pm 80,90$ kHz for BW 80MHz.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a two SW architectures(Star3.0 now and Star 3.5 about half a year later)

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	81218C_3.1	Multimedia Device With Bluetooth and WLAN	RSUI31	0007756	2025-04-15	Element Under Test
S/01	81218C_14.1	Harness			2025-04-15	Auxiliary Element
S/01	81218C_15.1	Fakra to USB Cable			2025-04-15	Auxiliary Element
S/01	81218C_54.1	Fakra to 4 Fakra Cable			2025-04-15	Auxiliary Element
S/01	81218C_83.1	Module Antenna		012168	2025-06-02	Auxiliary Element
S/01	81218C_84.1	Module Antenna		013508	2025-06-02	Auxiliary Element
S/01	81218C_85.1	Module Antenna		013489	2025-06-02	Auxiliary Element
S/01	81218C_86.1	Module Antenna		019682	2025-06-02	Auxiliary Element
S/02	81218C_1.1	Multimedia Device With Bluetooth and WLAN	RSUI31	0007764	2025-04-15	Element Under Test
S/02	76719D_56.1	Fakra 1x4 cable			2024-04-17	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Sample used for Radiated test
S/02	Sample used for Conducted test

Test sample description

Ports..... :	Port name and description	Cable											
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾								
	Main connector	3	[x]	[]	[]								
	HD-BaseT	3	[x]	[]	[]								
	BT/WLAN antenna	3	[x]	[x]	[]								
	Video	3	[x]	[]	[]								
	USB3.0	3	[]	[]	[]								
	USB2.0	3	[]	[]	[]								
Supplementary information to the ports..... :	USB 3.0 and USB2.0: Only used in BOSCH production, not used by customer or end user												
Rated power supply	Voltage and Frequency		Reference poles										
			L1	L2	L3	N	PE						
	[]	AC:	[]	[]	[]	[]	[]						
	[]	AC:	[]	[]	[]	[]	[]						
	[X]	DC: Nominal supply voltage: 9.0 - 16.0 VDC											
	[]	DC:											
Rated Power	Max. Current consumption: < 8A												
Clock frequencies.....													
Other parameters													
Software version	E219.0												
Hardware version	D3.2												
Dimensions in cm (W x H x D)	Length: 224,57mm (+/- 0,6), width: 139,45mm (+/-1,5), height: 51,9mm (+/-1,2)												
Mounting position	[]	Table top equipment											
	[]	Wall/Ceiling mounted equipment											
	[]	Floor standing equipment											
	[]	Hand-held equipment											

	☒ Other: in vehicle		
Modules/parts.....:	Module/parts of test item	Type	Manufacturer
			
Accessories (not part of the test item)	Description	Type	Manufacturer
	Laptop	Latitude 5500	Dell
	Display		
	USB-Ethernet Adapter		
	Harness and Cable		
	Infotainment systems and extension of USB	VA6000	Valens
	other necessary equipment and cables		
Documents as provided by the applicant	Description	File name	Issue date
			
			
			
			

⁽³⁾ Only for Medical Equipment

Identification of the client

Robert Bosch GmbH
Robert-Bosch-Strasse 200, 31139, Hildesheim, Germany

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2025-07-17
Date (finish)	2025-08-14

Document history

Report number	Date	Description
81218RRF.002	2025-08-28	First release.
81218RRF.002A1	2025-08-29	Second release. This report was modified due to some minor typos. This report replaces 81218RRF002.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Antonio Maireles, Carmen Vázquez Perez, Pablo Redondo Reyes and Valentin Andarias Diaz.

Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
06791	SEMIANECHOIC ABSORBER LINED CHAMBER IV	FACT 3 200 STP	ETS LINDGREN	N/A
06792	SHIELDED ROOM	S101	ETS LINDGREN	N/A
06609	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2026-04-21
06615	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2026-04-24
06143	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2027-01-22
06142	PRE-AMPLIFIER G>38dB 30MHz-6GHz	BLNA 0360-01N	BONN ELEKTRONIK	2025-07-25
06496	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK	2026-12-01
03783	PRE-AMPLIFIER G>30dB 1GHz-18GHz	BLMA 0118-3A	BONN ELEKTRONIK	2026-03-17
04657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2026-06-12
10537	PRE-AMPLIFIER G>46dB 18-40 GHz	BLMA 1840-5G	BONN ELEKTRONIK	2026-03-07
07817	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2026-07-01
07445	DC POWER SUPPLY 30V/5A	U8002A	KEYSIGHT TECHNOLOGIES	N/A
07760	DIGITAL MULTIMETER	175	FLUKE	2025-11-07
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A
06793	SHIELDED ROOM	S101	ETS LINDGREN	N/A
06611	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2026-04-21
06668	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2027-04-01
07796	EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz	OSP-B157Wx	ROHDE AND SCHWARZ	2027-01-09
08848	OPEN SWITCH UNIT UP TO 7.5 GHz	OSP-B157W8 PLUS	ROHDE AND SCHWARZ	2027-01-02
00922	POWER SUPPLY DC 40 V / 40 A	NGPE 40/40	ROHDE AND SCHWARZ	N/A
05850	DIGITAL MULTIMETER	179	FLUKE	2025-11-04
07798	SOFTWARE FOR EMC/RF TESTING	WMS32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

A. Common requirements for all Bands:

FCC PART 15		
Requirement – Test case	Verdict	Remark
Transmitter. Duty Cycle	P	
Transmitter. 99% Occupied Bandwidth	P	
Transmitter. 26 dB Emission Bandwidth (EBW)	P	
<u>Supplementary information and remarks:</u> None.		

U-NII-1 Band: 5.15 - 5.25 GHz

FCC PART 15 PARAGRAPH		
Requirement – Test case	Verdict	Remark
FCC 15.407 (a)(1)(iv) Transmitter Maximum conducted Output Power	P	
FCC 15.407 (a)(1)(iv) Transmitter Maximum Power Spectral Density	P	
FCC 15.407 (b)(1) Transmitter Out of Band Radiated Emissions	P	
FCC 15.407 (b)(1) Transmitter Band Edge Radiated Emissions	P	
<u>Supplementary information and remarks:</u> None.		

RSS-247		
Requirement – Test case	Verdict	Remark
RSS-247 6.2.1.1 Transmitter Maximum Conducted Output Power	P	
RSS-247 6.2.1.1 Transmitter Maximum Power Spectral Density	P	
RSS-247 6.2.1.2 Transmitter Out of Band Radiated Emissions	P	
RSS-247 6.2.1.2 Transmitter Band Edge Radiated Emissions	P	
<u>Supplementary information and remarks:</u> None.		

U-NII-3: 5.725 GHz – 5.85 GHz Band:

FCC PART 15 PARAGRAPH			
Requirement – Test case		Verdict	Remark
FCC 15.407 (e)	6 dB Bandwidth	P	
FCC 15.407 (a)(3)(i)	Transmitter Maximum Conducted Output Power	P	
FCC 15.407 (a)(3)(i)	Transmitter Maximum Power Spectral Density	P	
FCC 15.407 (b)(4)	Transmitter Out of Band Radiated Emissions	P	
FCC 15.407 (b)(4)	Transmitter Band Edge Radiated Emissions	P	
<u>Supplementary information and remarks:</u>			
None.			

RSS-247			
Requirement – Test case		Verdict	Remark
RSS-247 6.2.4.2	6 dB Bandwidth	P	
RSS-247 6.2.4.2	Transmitter Maximum Conducted Output Power	P	
RSS-247 6.2.4.2	Transmitter Maximum Power Spectral Density	P	
RSS-247 6.2.4.3	Transmitter Band Edge Radiated Emissions	P	
RSS-247 6.2.4.3	Transmitter Out of Band Radiated Emissions	P	
<u>Supplementary information and remarks:</u>			
None.			

Appendix A: Test Common requirements for all Bands

INDEX

TEST CONDITIONS16

TRANSMITTER DUTY CYCLE.....21

TRANSMITTER. 99% OCCUPIED BANDWIDTH24

TRANSMITTER. 26 dB EMISSION BANDWIDTH (EBW)91

TEST CONDITIONS

(*) Declared by the Client.

POWER SUPPLY (*):

Vnominal: 12 Vdc
Type of Power Supply: Vehicle battery

ANTENNA (*):

Type of Antenna: External
Antenna Gain: 5.1 dBi (both ports)

Directional Antenna Gain Calculations for CDD MIMO In-Band Measurements (for PSD test):

For 2Tx CDD MIMO modes, in accordance with KDB 662911 D01 v02r01 Section F)2)f)(ii) y F)2)e)ii), directional gain, directional gain was calculated as follows:

$$\begin{aligned}
 N_{SS} &= 1, N_{ANT} = 2, G_{ANT0} = 5.1, G_{ANT1} = 5.1 \\
 \text{Directional Gain} &= 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 10 \log \left[\frac{\sum_{j=1}^1 \left(\sum_{k=1}^2 g_{j,k} \right)^2}{2} \right] \\
 &= 10 \log \left[\frac{(g_{1,1} + g_{1,2})^2}{2} \right] = 10 \log \left[\frac{(10^{\frac{5.1}{20}} + 10^{\frac{5.1}{20}})^2}{2} \right] = 10 \log \left[\frac{(10^{\frac{5.1}{20}} + 10^{\frac{5.1}{20}})^2}{2} \right] = 8.11 \text{ dBi}
 \end{aligned}$$

TEST FREQUENCIES (*):

UNII-1:

Technology Tested:	WLAN (IEEE 802.11 a,n,ac,ax) 2x2 / U-NII-1	
	802.11a OFDM 6 Mbit/s (MIMO 2x2)	
	802.11 n HT20: MCS0 to MCS23 (MIMO 2x2)	
	802.11 n HT40: MCS0 to MCS23 (MIMO 2x2)	
	802.11 ac VHT20: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ac VHT40: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ac VHT80: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ax HE20: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
	802.11 ax HE40: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
	802.11 ax HE80: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
Setting of cores / ports:	2+3	
Beamforming:	No.	
Frequency Range:	5150 MHz to 5250 MHz	
Channel Spacing:	20 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Low: 36	5180
	Middle: 40	5200
	High: 48	5240
Channel Spacing:	40 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Low: 38	5190
	High: 46	5230
Channel Spacing:	80 MHz	
Transmit Channels	Middle: 42	5210

* The EUT does not support the Middle Channel of 802.11ax HE20 (OFDMA MCS0) SU modulation.

UNII-3:

Technology Tested:	WLAN (IEEE 802.11 a,n,ac,ax) 2x2 / U-NII-3	
	802.11a OFDM 6 Mbit/s (MIMO 2x2)	
	802.11 n HT20: MCS0 to MCS23 (MIMO 2x2)	
	802.11 n HT40: MCS0 to MCS23 (MIMO 2x2)	
	802.11 ac VHT20: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ac VHT40: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ac VHT80: MCS0 to MCS9 (MIMO 2x2)	
	802.11 ax HE20: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
	802.11 ax HE40: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
	802.11 ax HE80: MCS0 to MCS11 (MIMO 2x2) – SU/RU	
Setting of cores / ports:	2+3	
Beamforming:	No.	
	5725 MHz to 5850 MHz	
Power Settings:	13 dBm	
Operating Channel Bandwidth:	20 MHz	
Transmission Channels:	Channel	Channel Frequency (MHz)
	Low (149)	5745
	Middle (157)	5785
	High (165)	5825
Operating Channel Bandwidth:	40 MHz	
Transmission Channels:	Channel	Channel Frequency (MHz)
	Low (151)	5755
	High (159)	5795
Operating Channel Bandwidth:	80 MHz	
Transmission Channels:	Single (155)	5775

* The EUT does not support the Middle Channel of 802.11ax HE20 (OFDMA MCS0) SU modulation.

The test set-up was made in accordance to the general provisions of FCC Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017.

The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulations types.

The field strength at the band edges was evaluated for each mode on the lowest and highest channels at the rated power for the channel under test.

For all modes, the EUT was configured in test mode using a software application. The application was used to enable a continuous transmission and to select the test channels as required. The client supplied instructions to configure the EUT. The customer supplied a document containing the setup instructions.

The worst cases for testing were identified for output power and spurious levels at the band edges which were selected based on preliminary testing that correspond to next data rates:

- 802.11a OFDM 6 Mbit/s
- 802.11 n HT20: MCS0
- 802.11 n HT40: MCS0
- 802.11 ac VHT20: MCS0
- 802.11 ac VHT40: MCS0
- 802.11 ac VHT80: MCS0
- 802.11 ax HE20: MCS0
- 802.11 ax HE40: MCS0
- 802.11 ax HE80: MCS0

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and connected to the spectrum analyzer using a low-loss RF cable. The reading in the spectrum analyzer is corrected taking into account the internal and external RF cable loss.

For all modes:



Transmitter Duty Cycle

Limits

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Results

Modulation: 802.11a OFDM 6 Mbit/s

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5180.00000	99.29
		5220.00000	99.29
		5240.00000	99.28
[5725, 5850]		5745.00000	99.28
		5785.00000	99.29
		5825.00000	99.9

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5180.00000	99.72
		5220.00000	99.72
		5240.00000	99.72
[5725, 5850]		5745.00000	99.72
		5785.00000	99.72
		5825.00000	99.72

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5190.00000	99.74
		5230.00000	99.74
[5725, 5850]		5755.00000	99.73
		5795.00000	99.73

Modulation: 802.11ac VHT20 (OFDM MCS0)

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5180.00000	99.72
		5220.00000	99.72
		5240.00000	99.73

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5725, 5850]		5745.00000	99.72
		5785.00000	99.72
		5825.00000	99.72

Modulation: 802.11ac VHT40 (OFDM MCS0)

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5190.00000	99.73
		5230.00000	99.73
[5725, 5850]		5755.00000	99.74
		5795.00000	99.73

Modulation: 802.11ac VHT80 (OFDM MCS0)

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5210.00000	99.75
[5725, 5850]		5775.00000	99.75

Modulation: 802.11ax HE20 (OFDMA MCS0) SU

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5180.00000	99.66
		5240.00000	99.73
[5725, 5850]		5745.00000	99.69
		5825.00000	99.73

Modulation: 802.11ax HE20 (OFDMA MCS0) RU26

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5180.00000	99.69
		5220.00000	99.73
		5240.00000	99.68
[5725, 5850]		5745.00000	99.73
		5785.00000	99.69
		5825.00000	99.69

Modulation: 802.11ax HE40 (OFDMA MCS0) SU

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5190.00000	99.74
		5230.00000	99.64
[5725, 5850]		5755.00000	99.73
		5795.00000	99.74

Modulation: 802.11ax HE40 (OFDMA MCS0) RU26

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5190.00000	99.64
		5230.00000	99.59
[5725, 5850]		5755.00000	99.63
		5795.00000	99.59

Modulation: 802.11ax HE80 (OFDMA MCS0) SU

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5210.00000	99.74
[5725, 5850]		5775.00000	99.74

Modulation: 802.11ax HE80 (OFDMA MCS0) RU26

Operation Band (MHz)	Port	Freq (MHz)	DC (%)
[5150, 5250]	2+3	5210.00000	99.56
[5725, 5850]		5775.00000	99.56

Transmitter. 99% Occupied Bandwidth

Limits

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained.

The following conditions shall be observed for measuring the occupied bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Modulation: 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Results

Operation Band (MHz)	Port	Freq (MHz)	Antenna configuration	Occ Ch BW (MHz)
[5150, 5250]	2+3	5180.00000	MIMO CDD Mode 2x2	17.600
		5220.00000		17.600
		5240.00000		17.500

Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250]

Active Port = 2+3



Frequency MHz = 5180.00000

Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

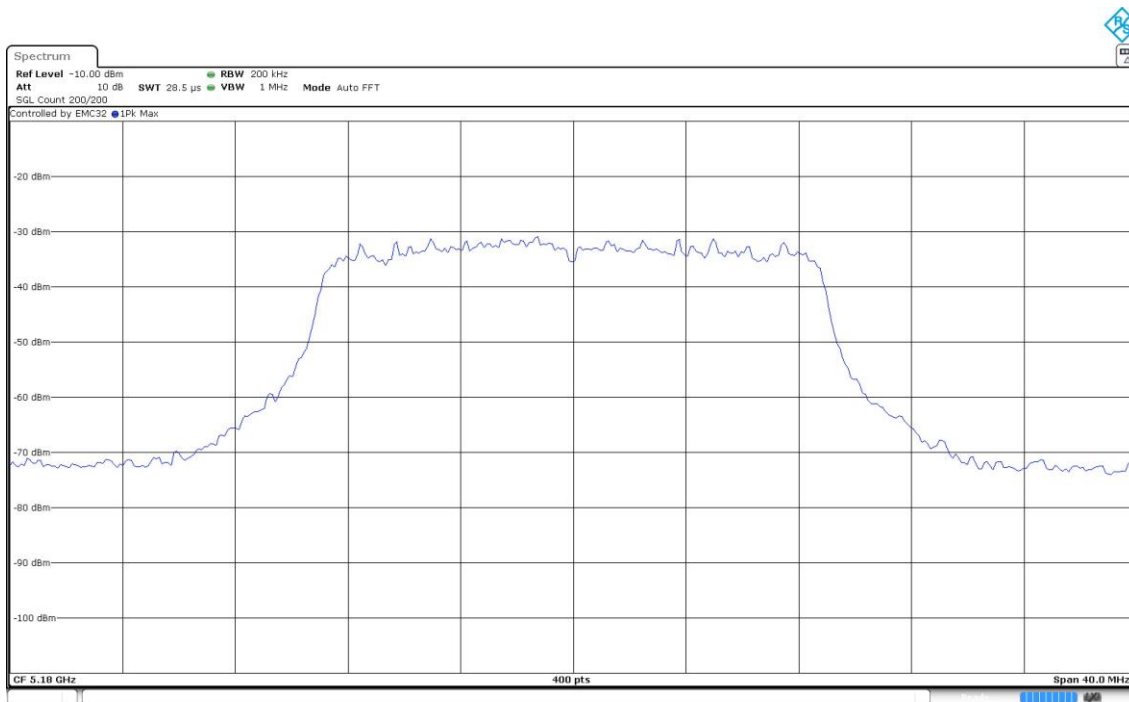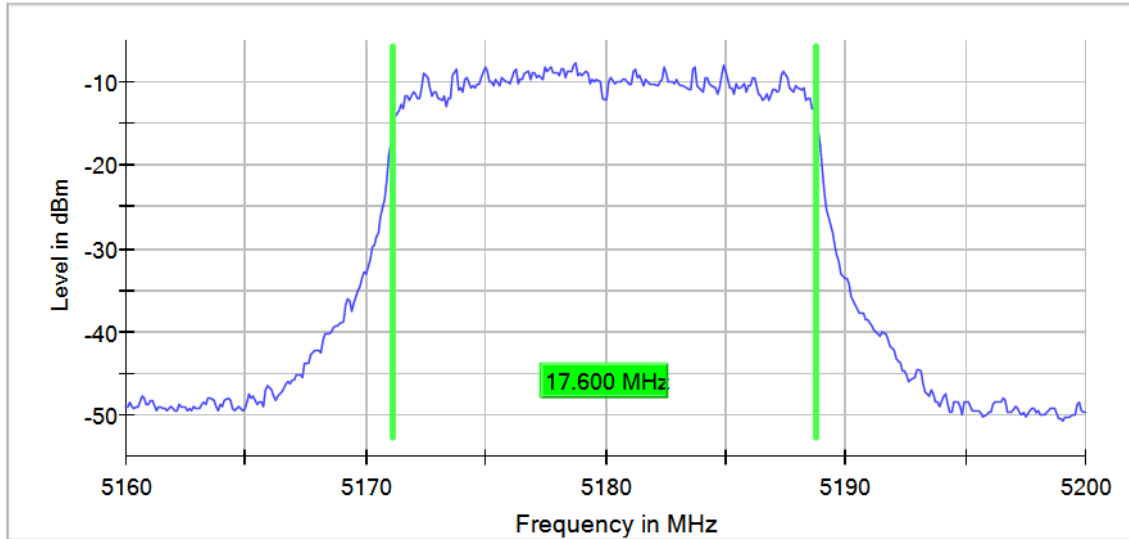

Operation Band MHz = [5150, 5250]

Active Port = 2+3



Frequency MHz = 5220.00000

Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

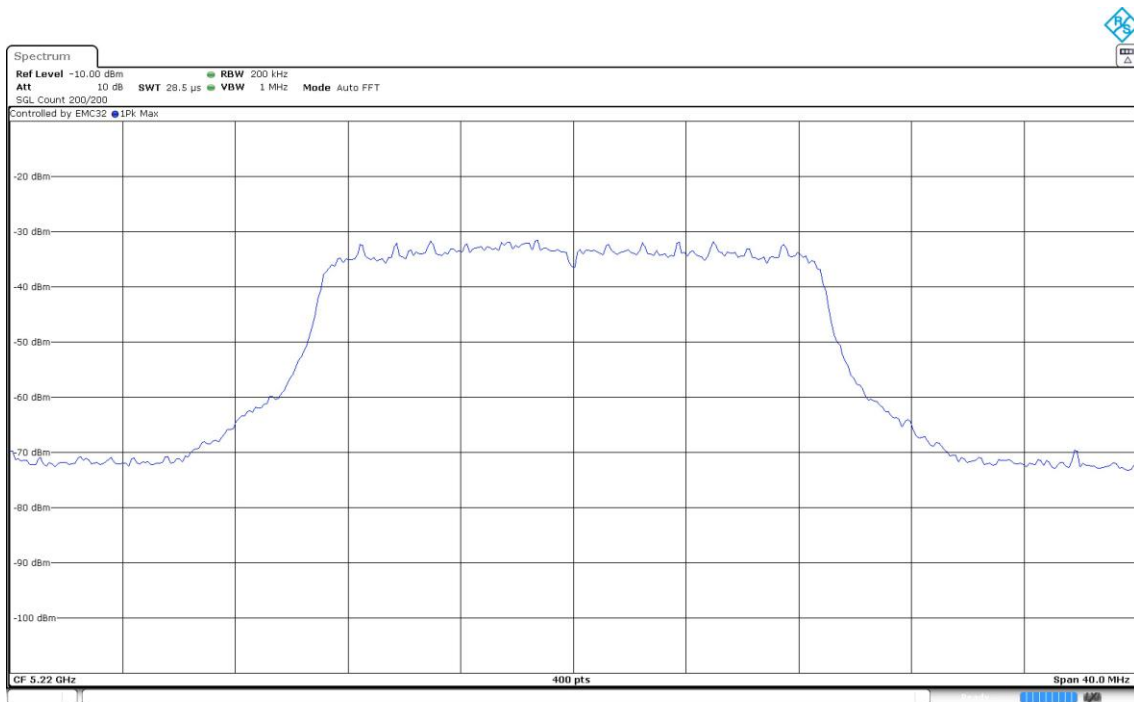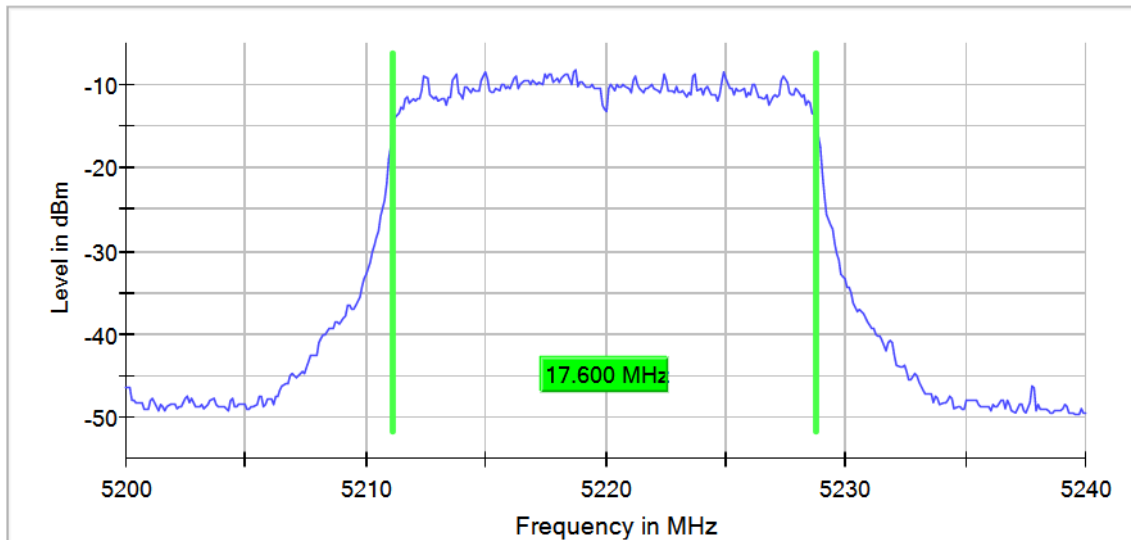

Operation Band MHz = [5150, 5250]

Active Port = 2+3



Frequency MHz = 5240.00000

Modulation = 802.11n HT20 (OFDM MCS0 6.5 Mbit/s)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

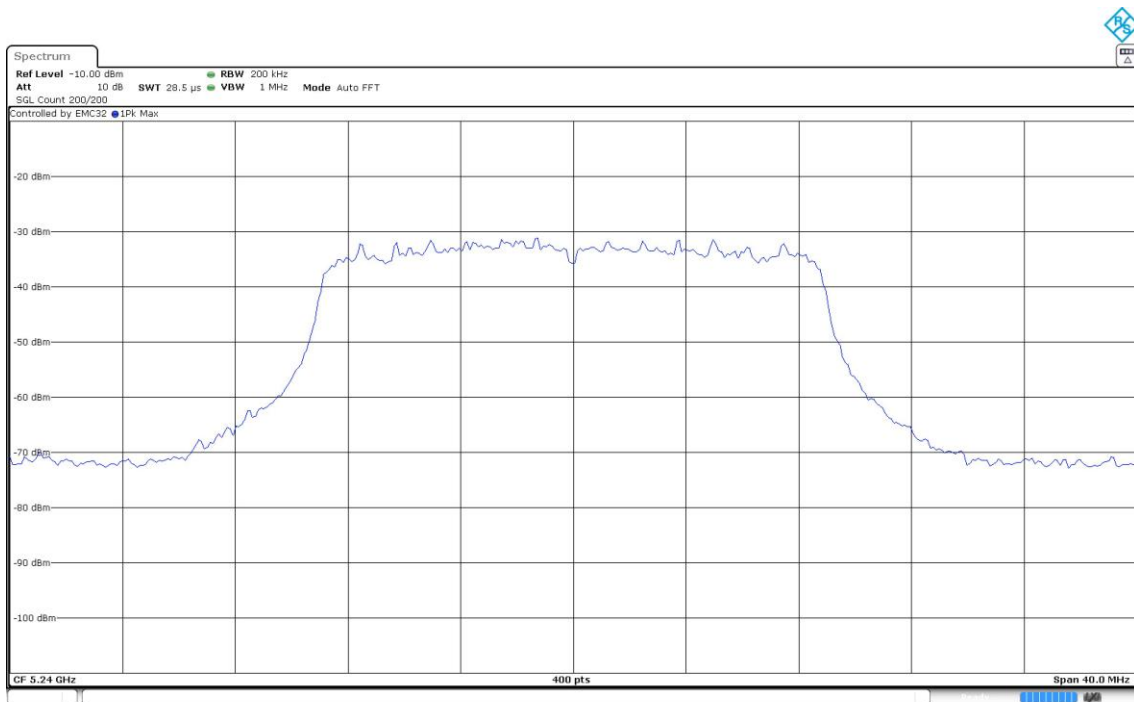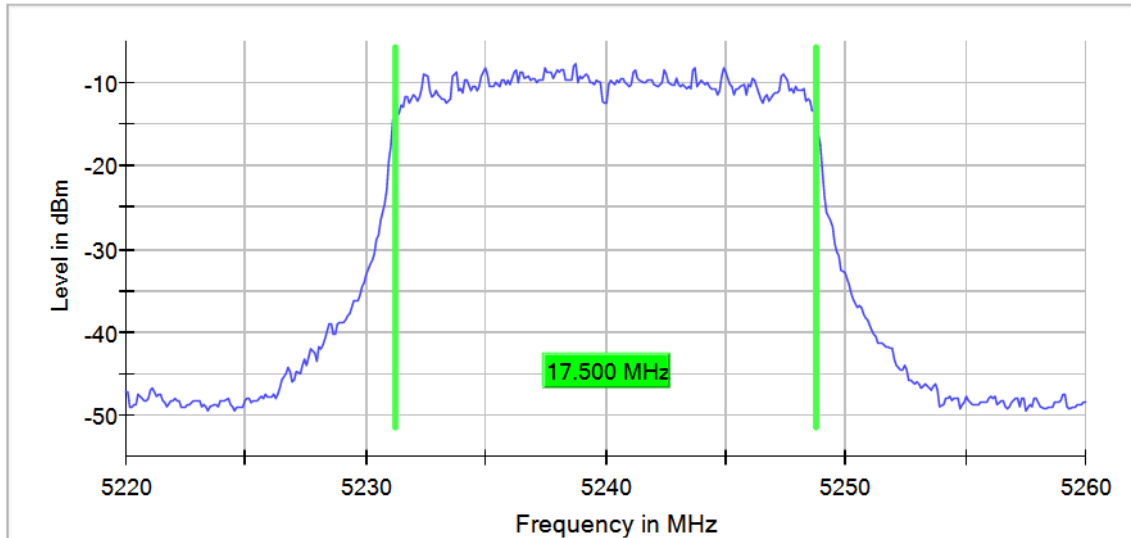

Modulation: 802.11n HT40 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5150, 5250]	2+3	5190.00000	36.250
		5230.00000	36.000



Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5190.00000 Modulation = 802.11n HT40 (OFDM MCS0)



Images:

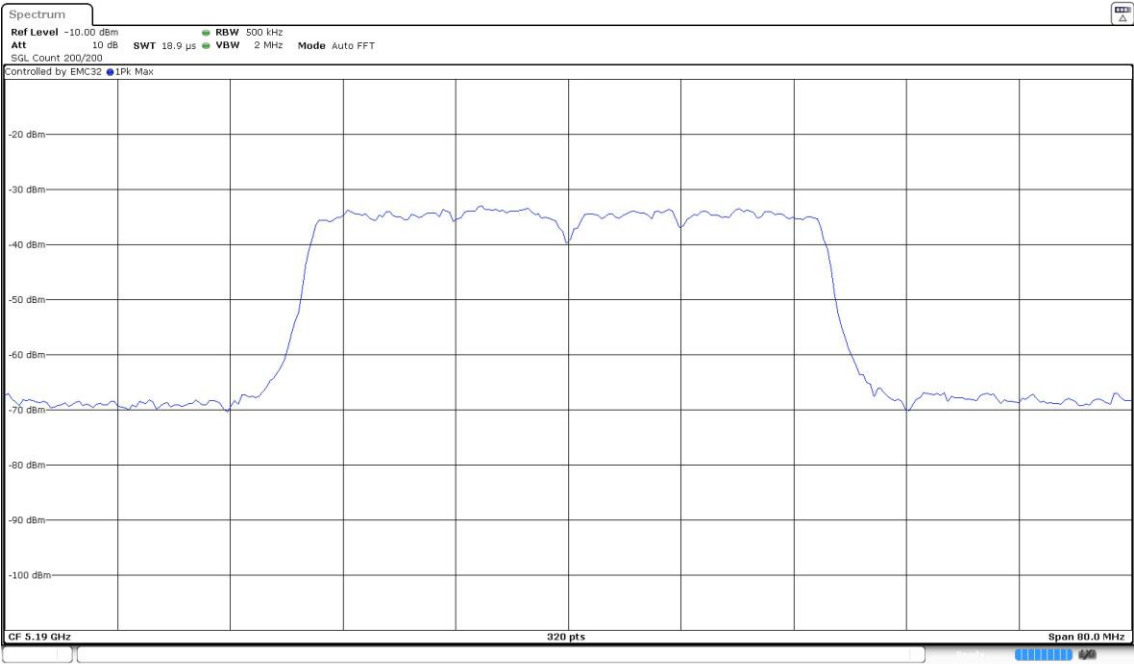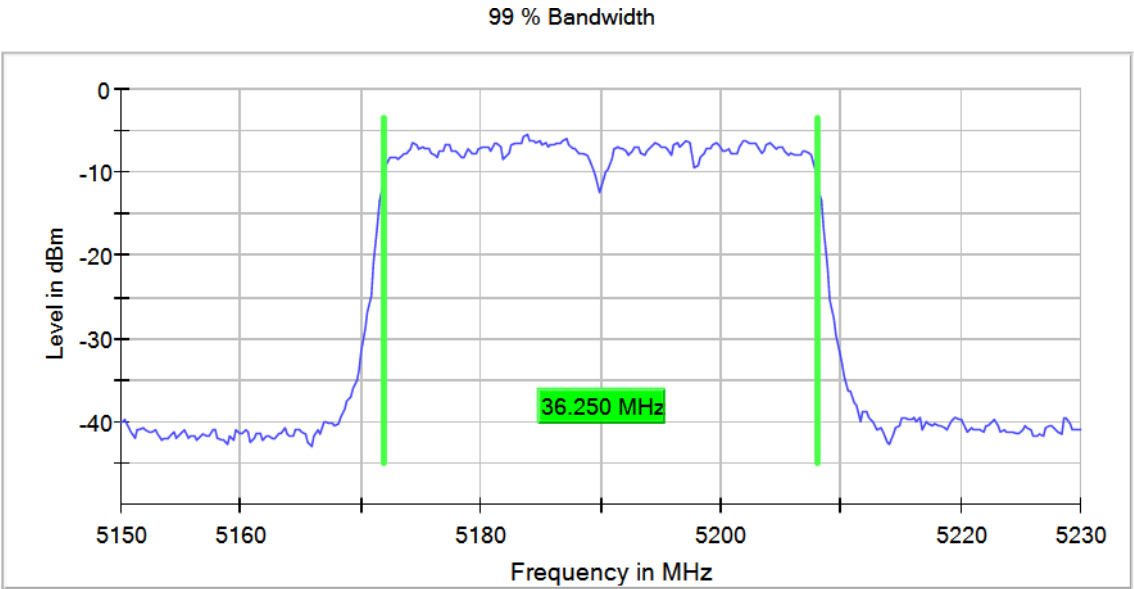

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5230.00000 Modulation = 802.11n HT40 (OFDM MCS0)

Images:

99 % Bandwidth

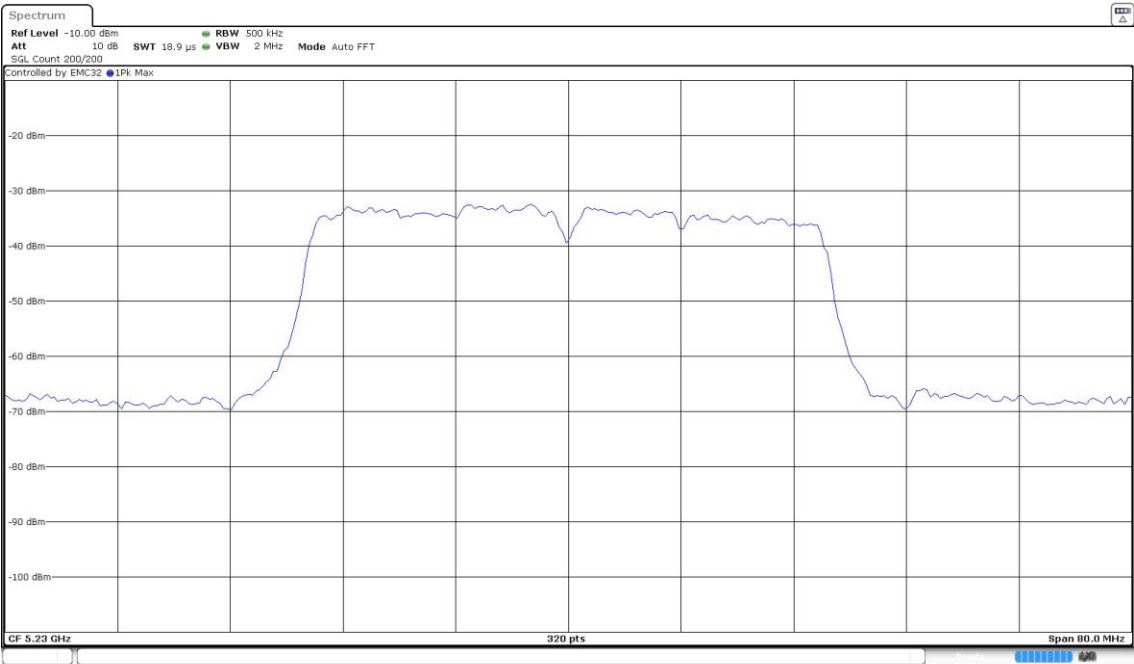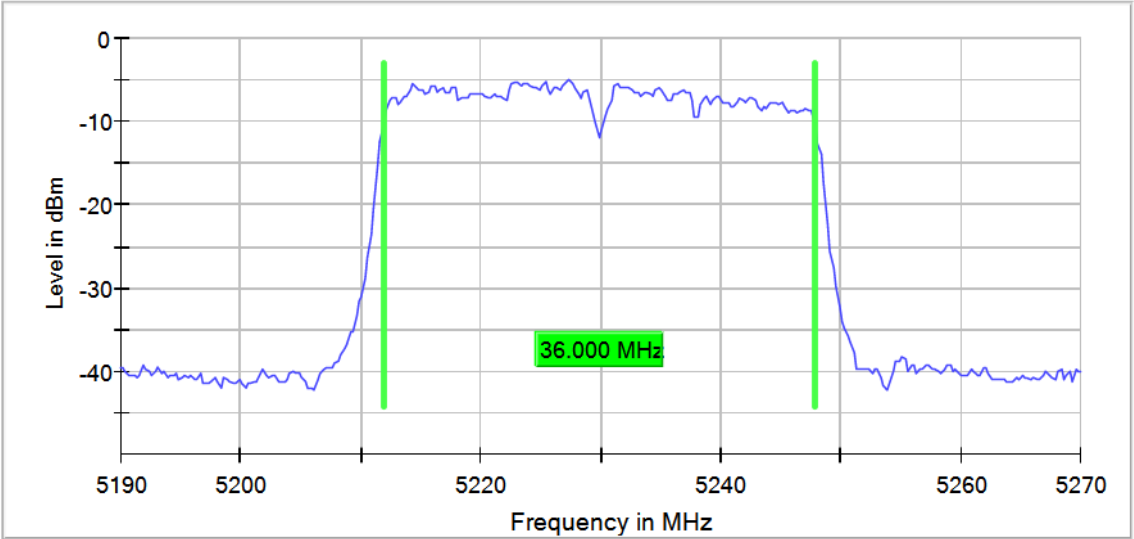

Modulation: 802.11a (OFDM 6 Mbit/s)

Results

Operation Band (MHz)	Port	Freq (MHz)	Antenna configuration	Occ Ch BW (MHz)
[5150, 5250]	2+3	5180.00000	MIMO CDD Mode 2x2	16.400
		5220.00000		16.400
		5240.00000		16.400



Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5180.00000 Modulation = 802.11a (OFDM 6 Mbit/s)
Antenna configuration = MIMO CDD Mode 2x2

Images:

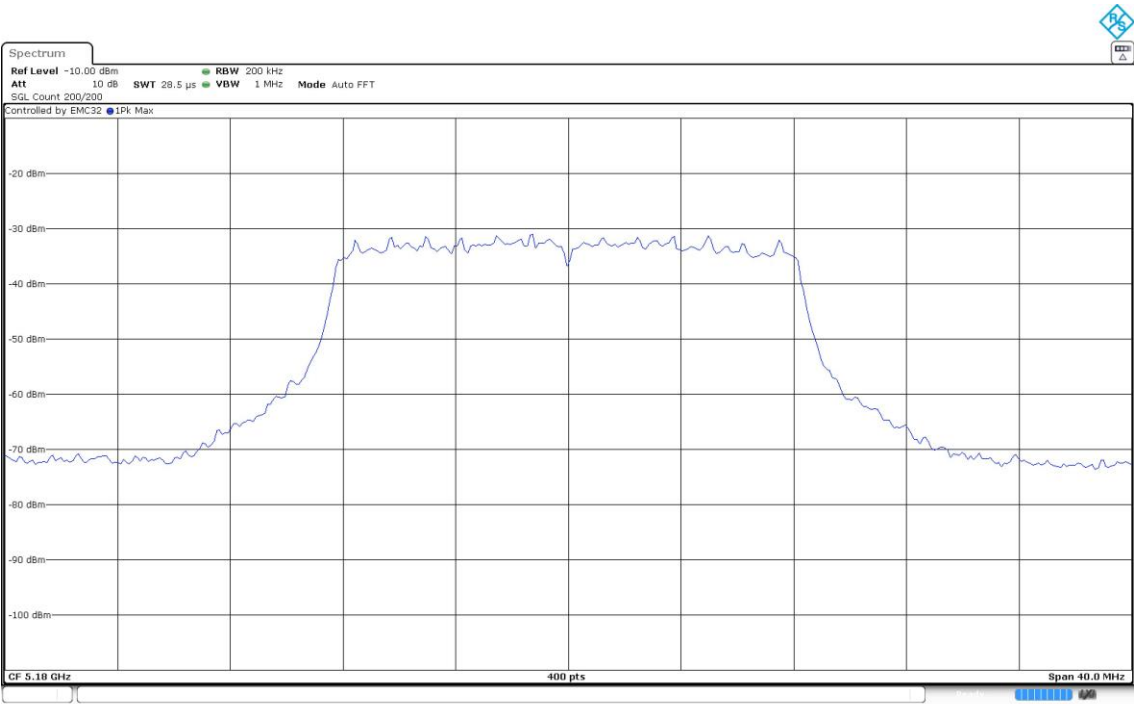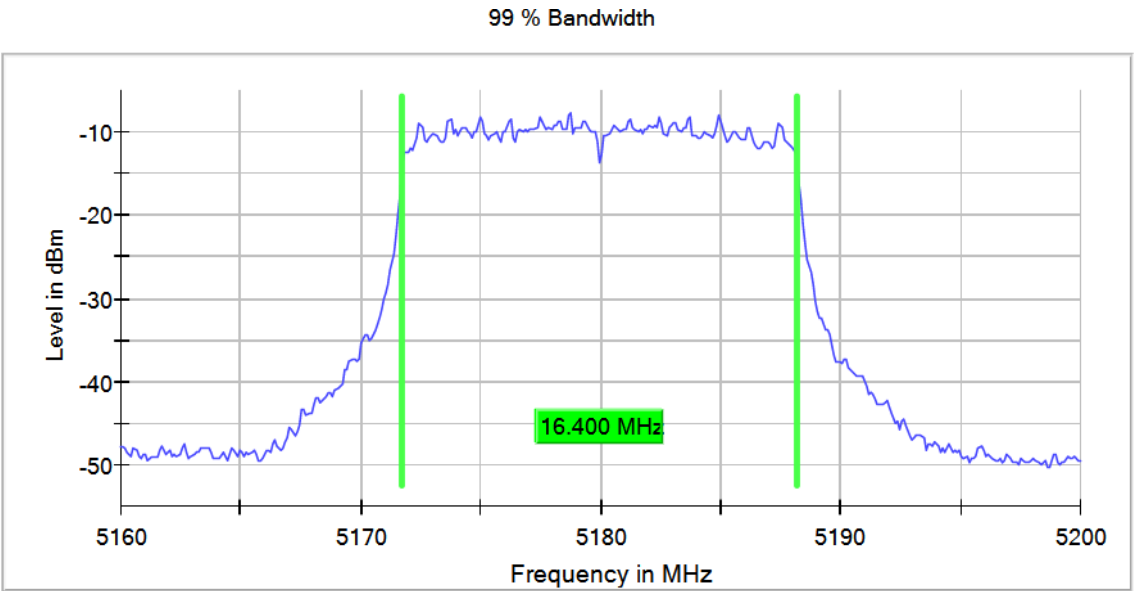

Operation Band MHz = [5150, 5250]

Active Port = 2+3



Frequency MHz = 5220.00000

Modulation = 802.11a (OFDM 6 Mbit/s)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

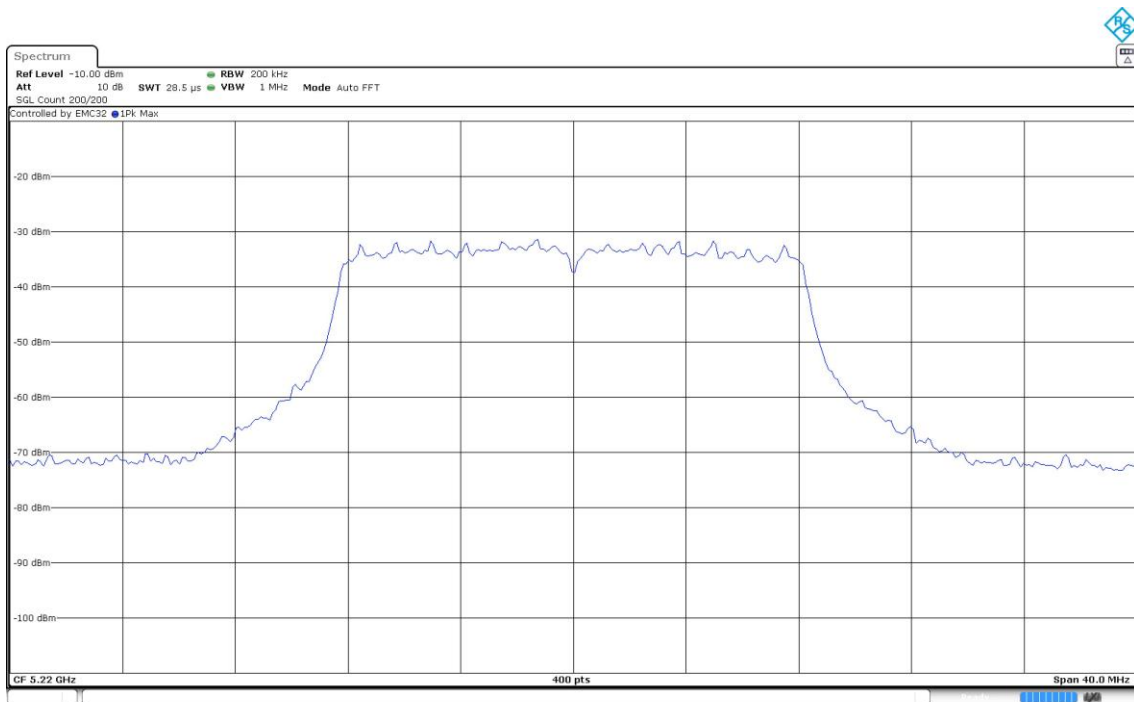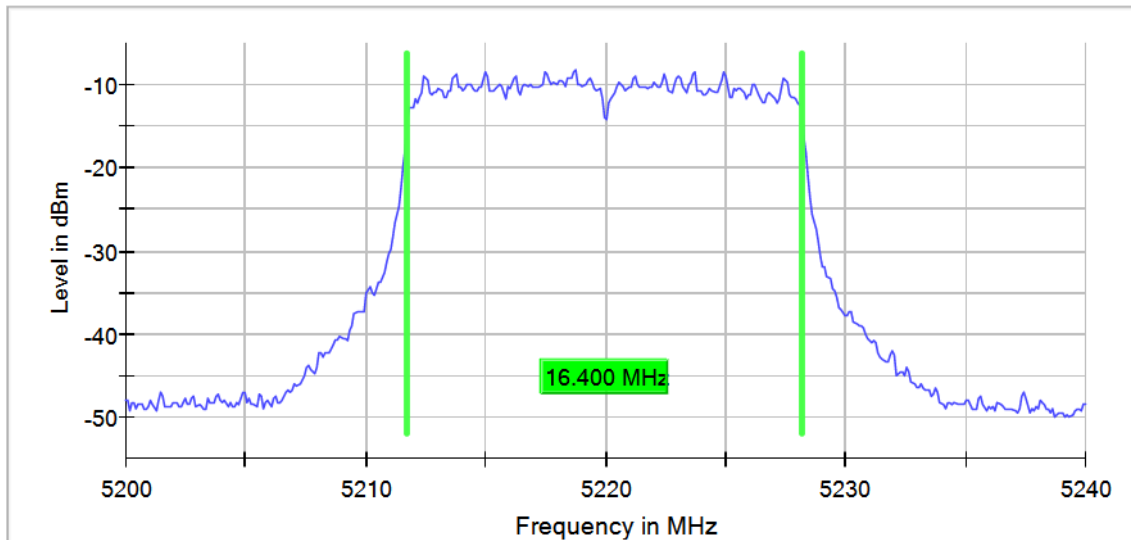

Operation Band MHz = [5150, 5250]

Active Port = 2+3



Frequency MHz = 5240.00000

Modulation = 802.11a (OFDM 6 Mbit/s)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

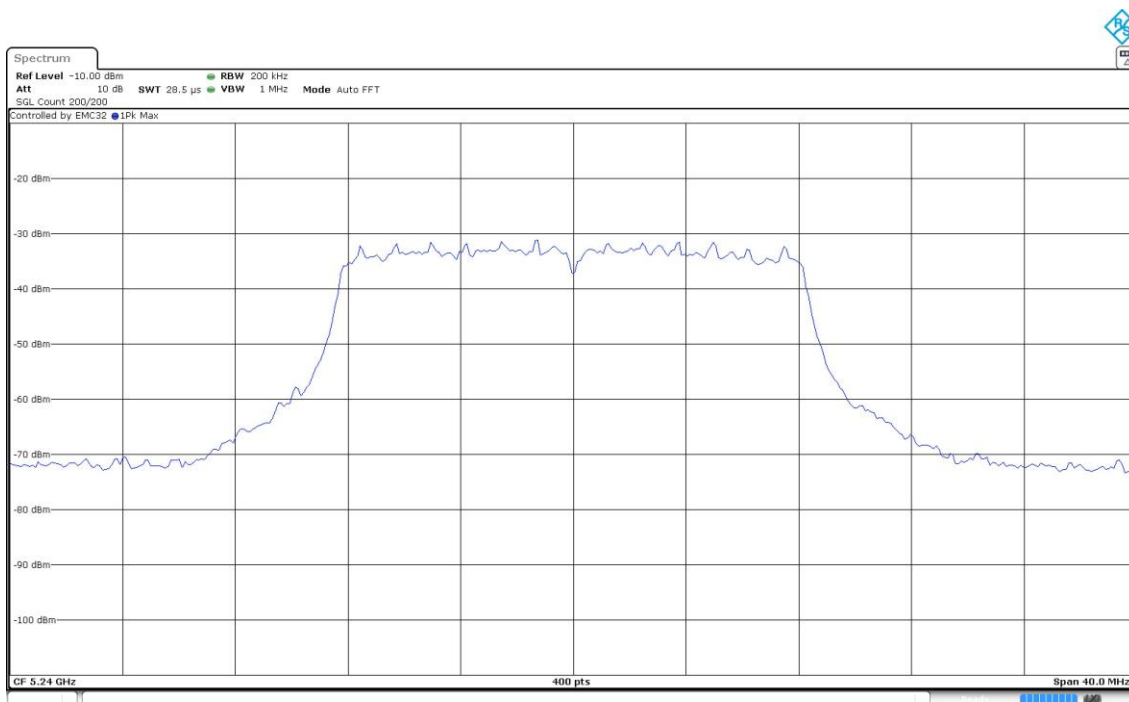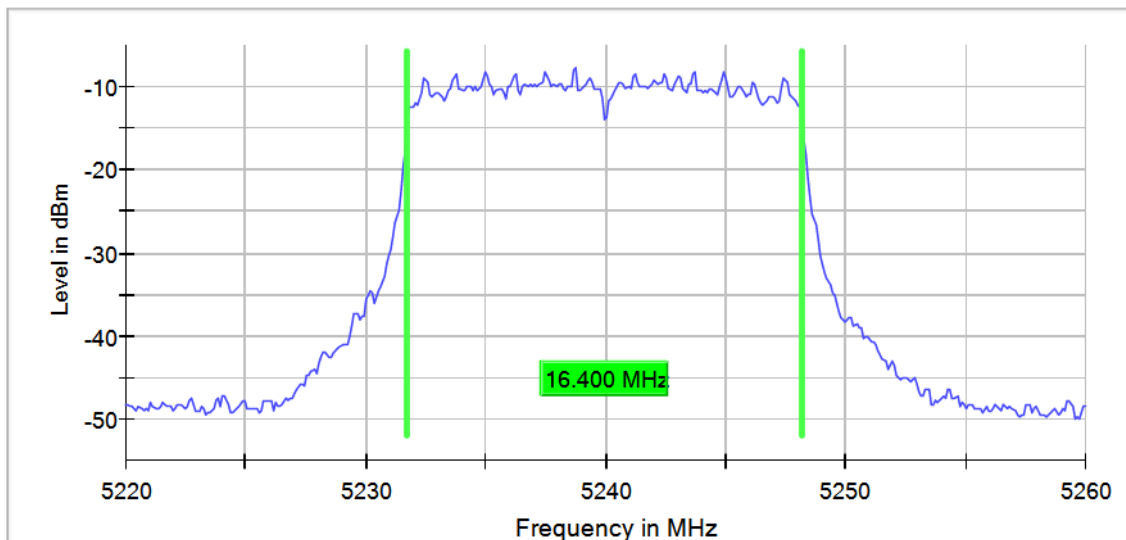

Modulation: 802.11ac VHT20 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5150, 5250]	2+3	5180.00000	17.600
		5220.00000	17.600
		5240.00000	17.600



Verdict

Pass

Attachments



Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5180.00000 Modulation = 802.11ac VHT20 (OFDM MCS0)

Images:

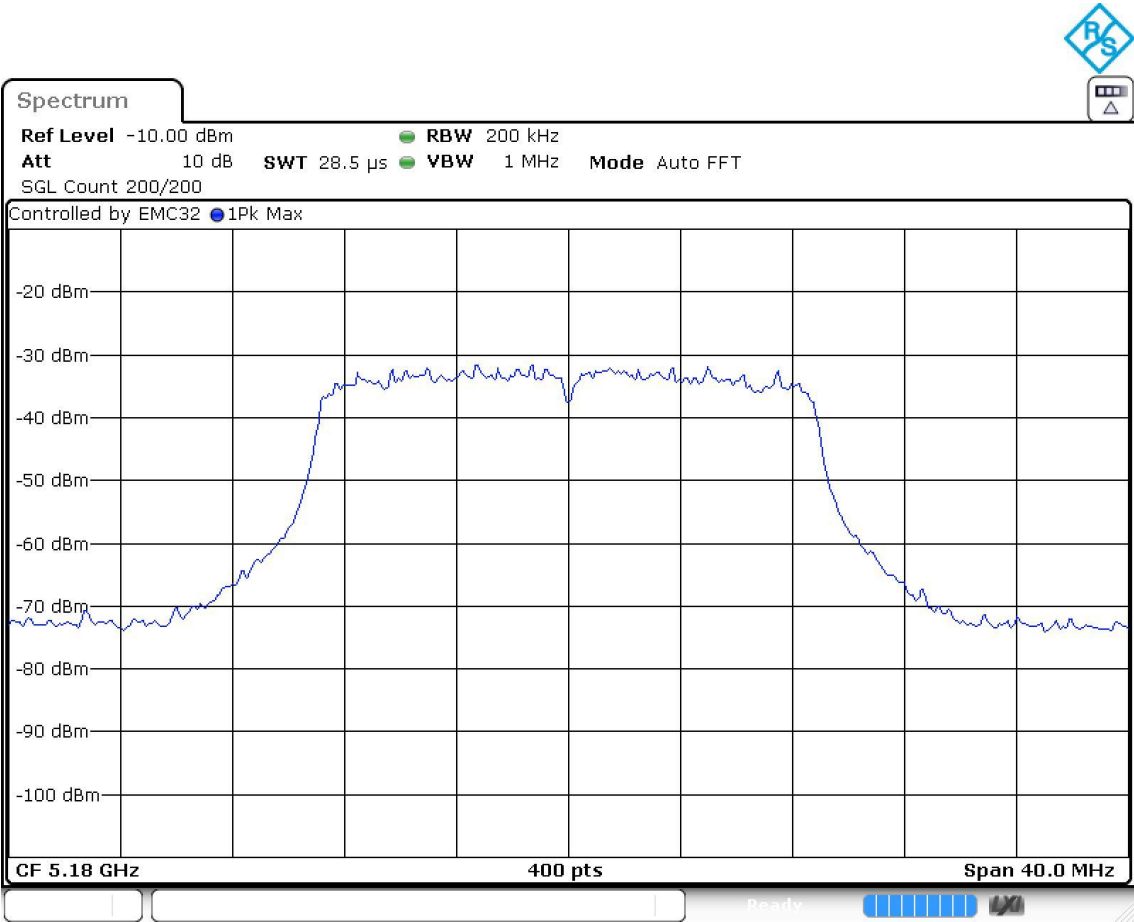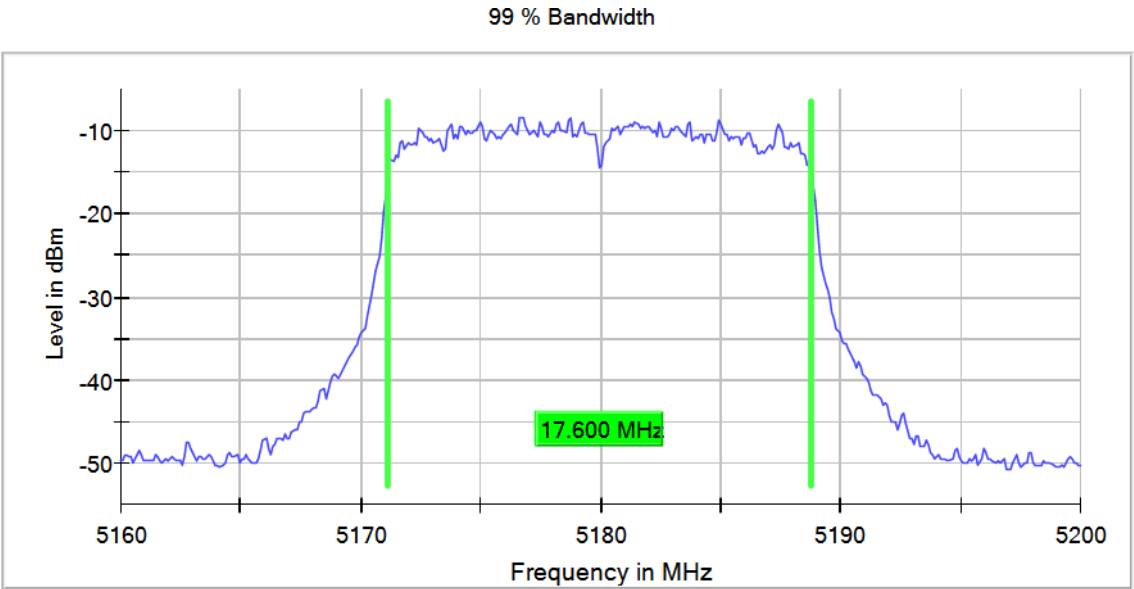



Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5220.00000 Modulation = 802.11ac VHT20 (OFDM MCS0)

Images:

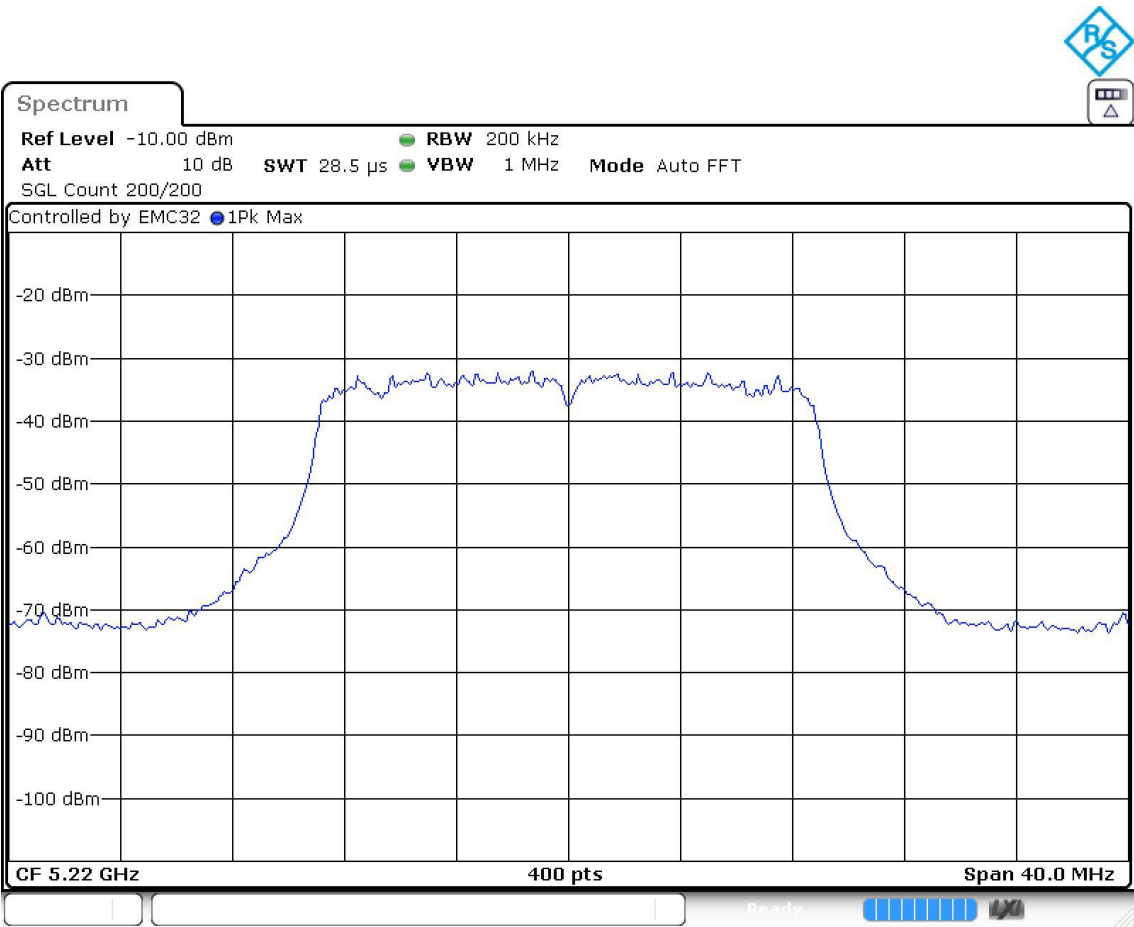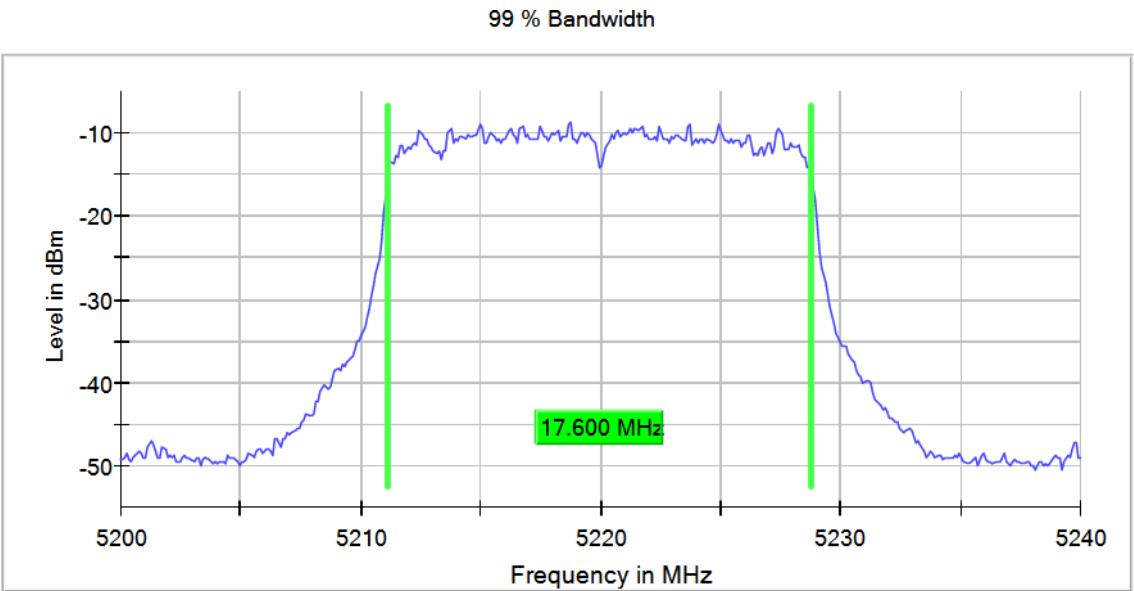

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5240.00000 Modulation = 802.11ac VHT20 (OFDM MCS0)

Images:

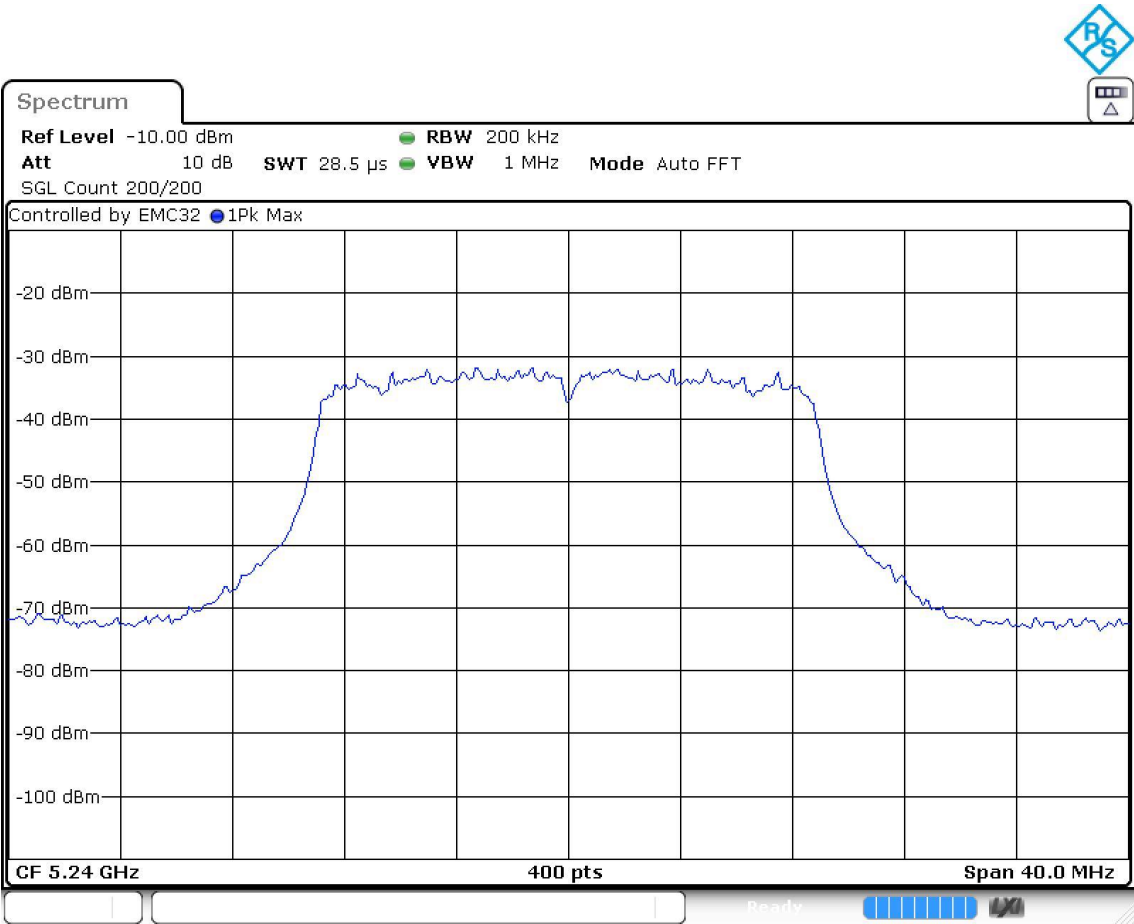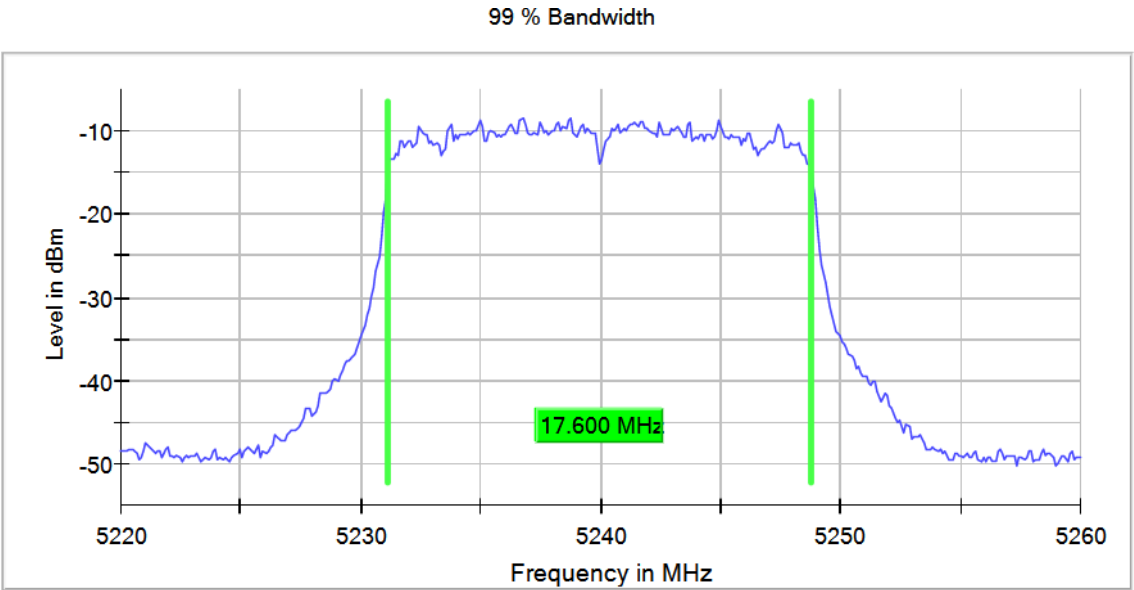

Modulation: 802.11ac VHT40 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5150, 5250]	2+3	5190.00000	36.250
		5230.00000	36.000



Verdict

Pass

Attachments



Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5190.00000 Modulation = 802.11ac VHT40 (OFDM MCS0)

Images:

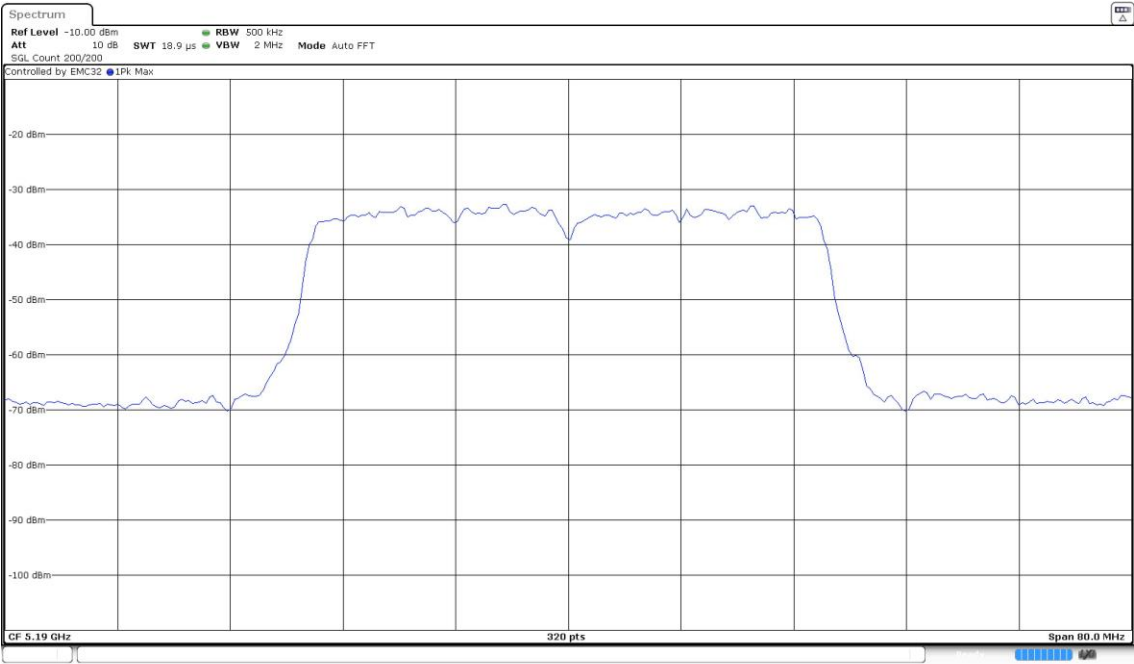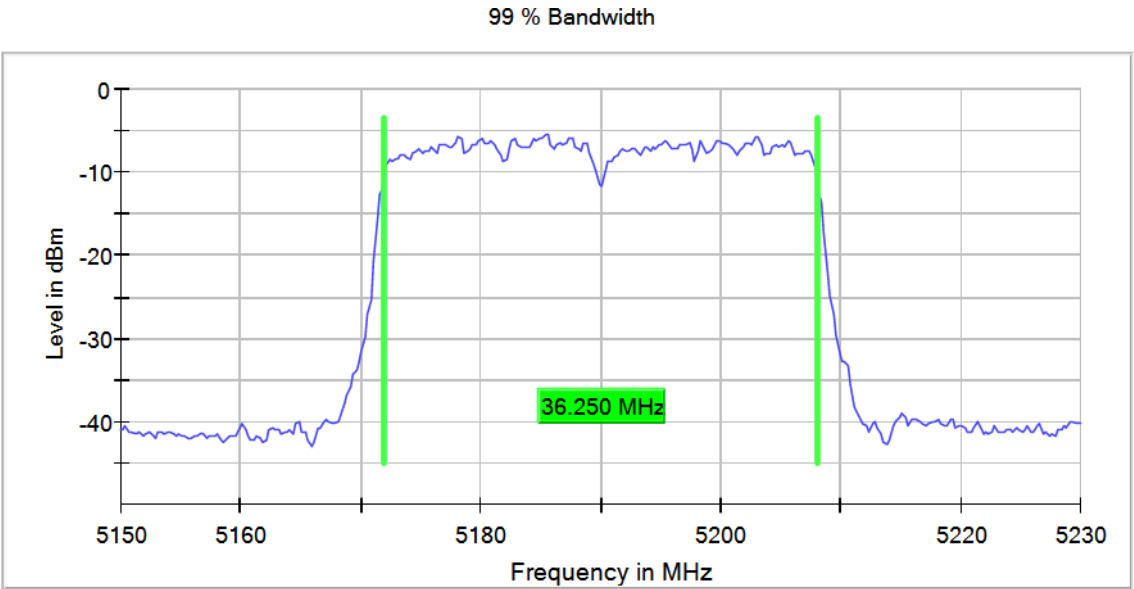

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5230.00000 Modulation = 802.11ac VHT40 (OFDM MCS0)

Images:

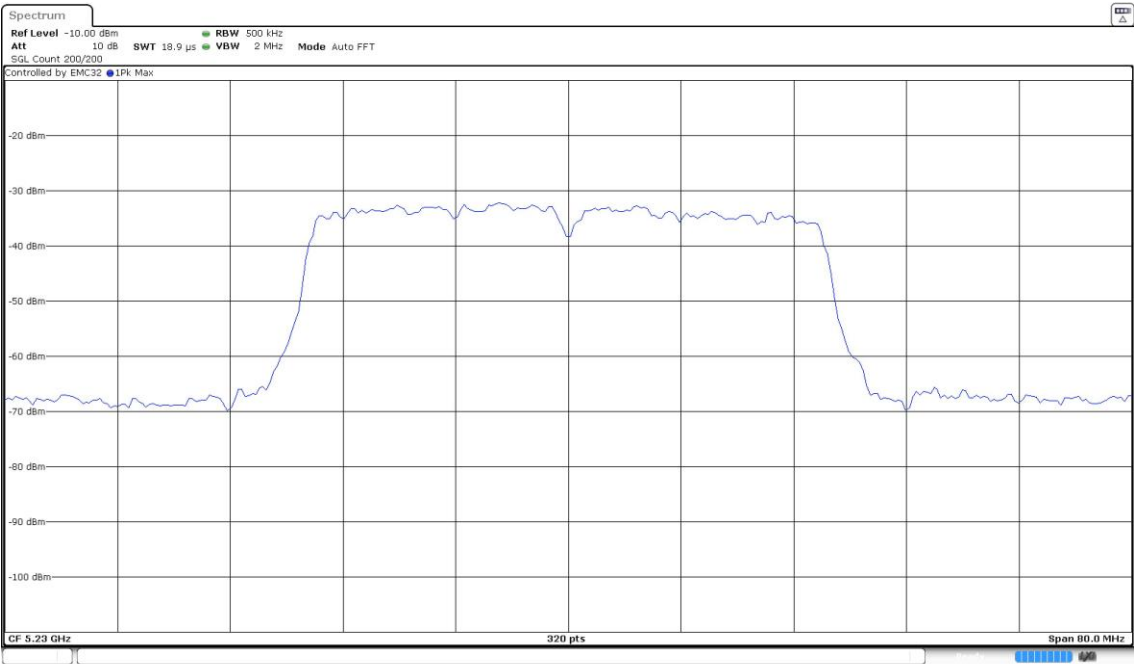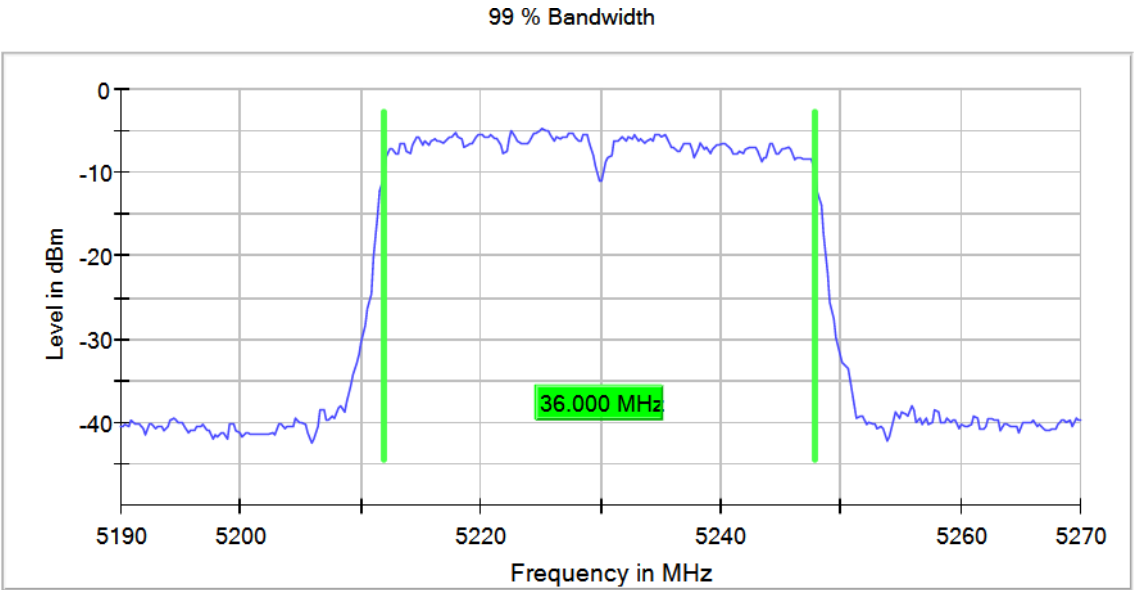

Modulation: 802.11ac VHT80 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5150, 5250]	2+3	5210.00000	75.500



Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5210.00000 Modulation = 802.11ac VHT80 (OFDM MCS0)

Images:

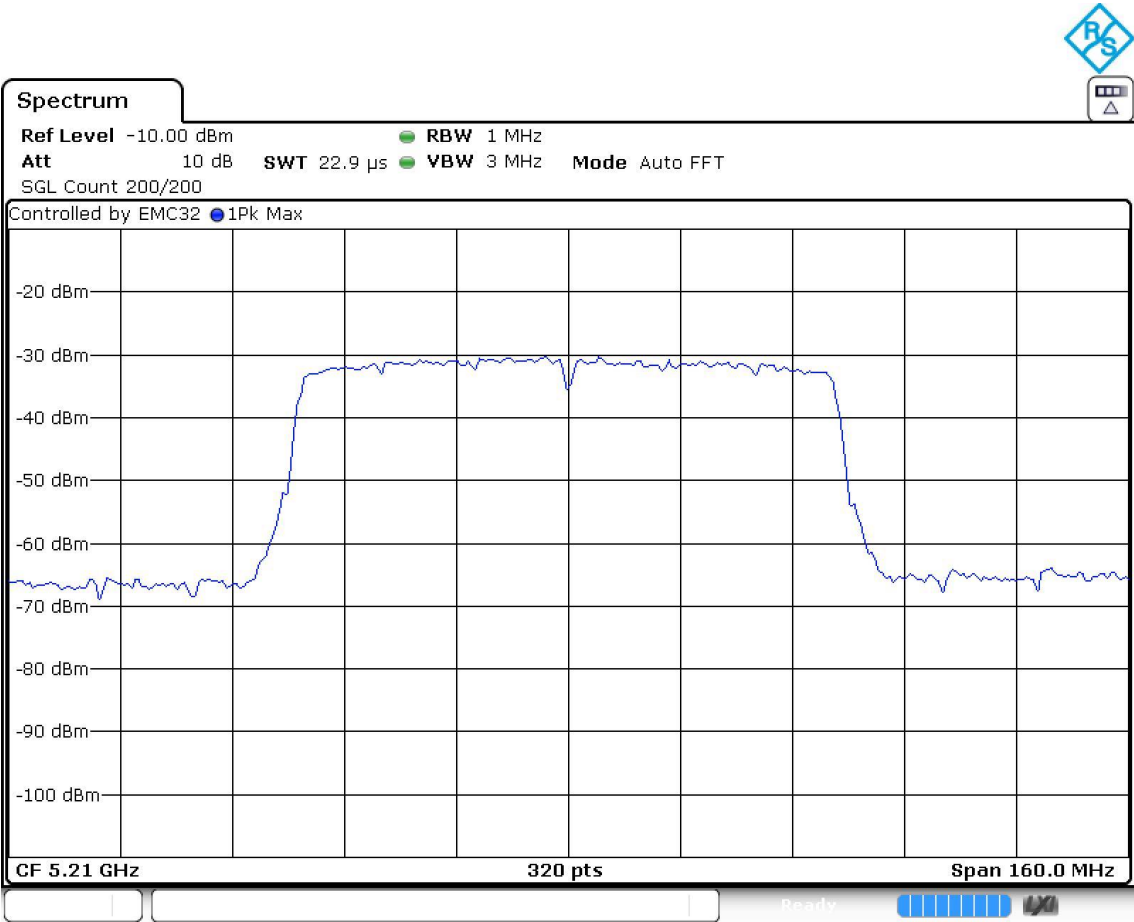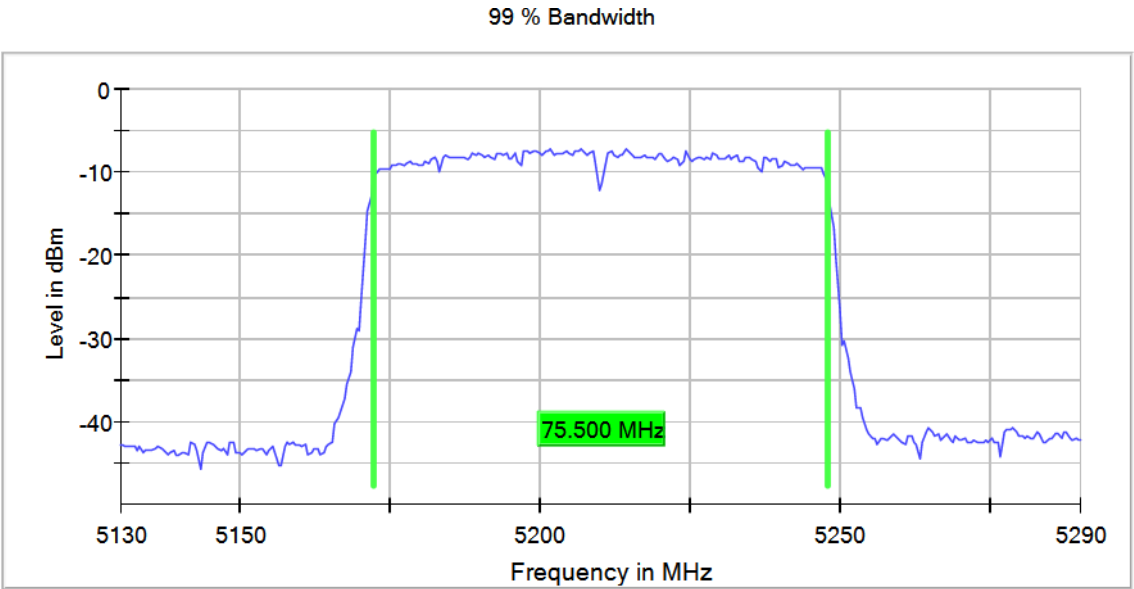

Modulation: 802.11ax HE20 (OFDMA MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Subcarrier Mode	Occ Ch BW (MHz)
[5150, 5250]	2+3	5180.00000	SU	19.000
[5150, 5250]	2+3	5180.00000	RU	18.600
[5150, 5250]	2+3	5200.00000	SU	18.600
[5150, 5250]	2+3	5200.00000	RU	17.200
[5150, 5250]	2+3	5240.00000	SU	18.900
[5150, 5250]	2+3	5240.00000	RU	18.600



Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5180.00000 Modulation = 802.11ax HE20 (OFDMA MCS0)
Subcarrier Mode = SU

Images:

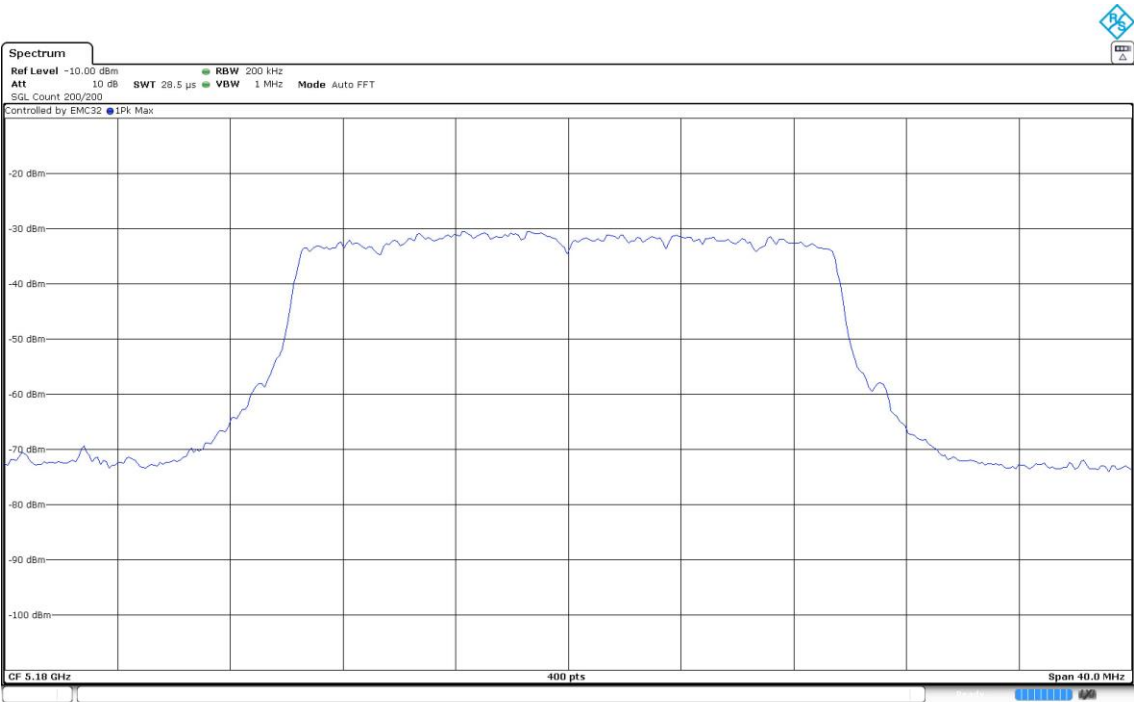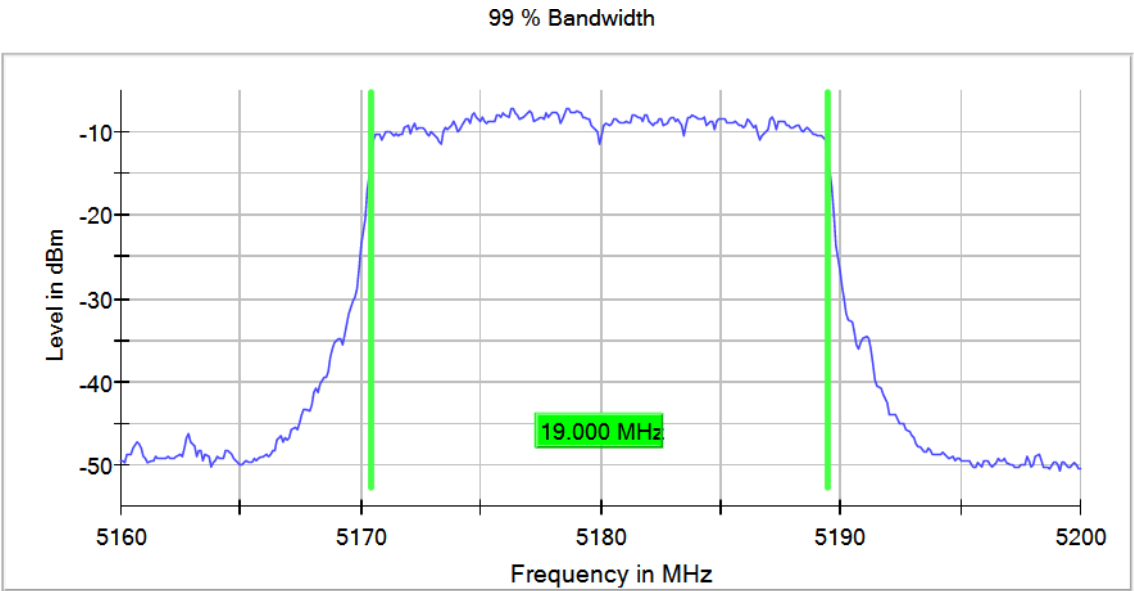

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5180.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Subcarrier Mode = RU

Images:

99 % Bandwidth

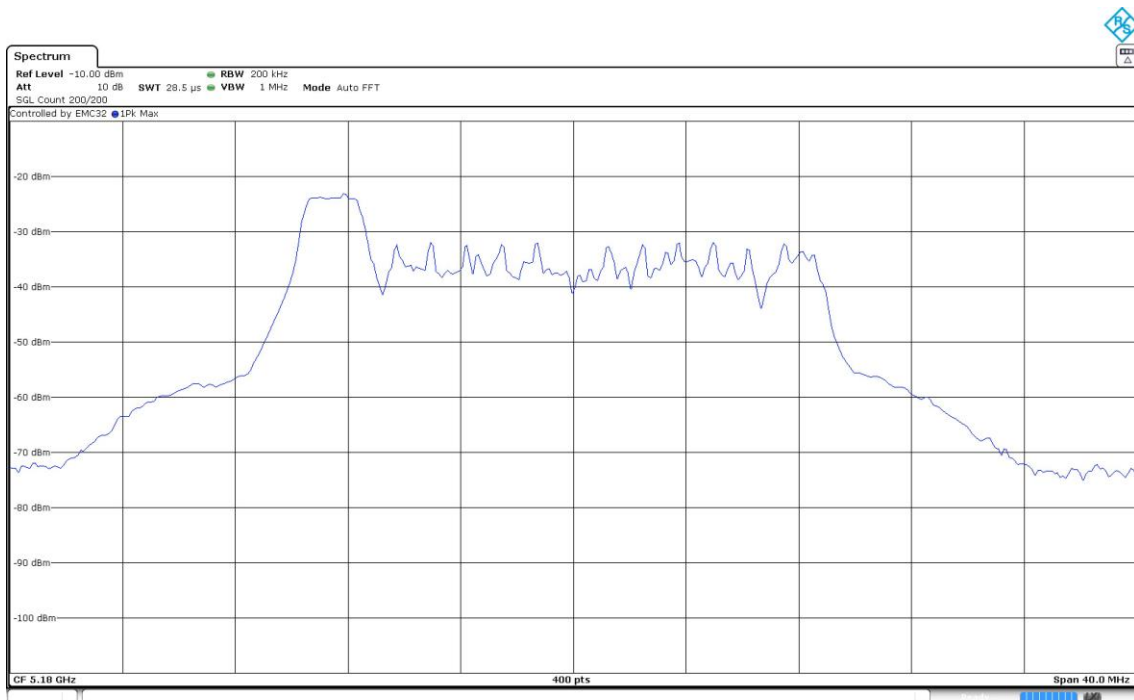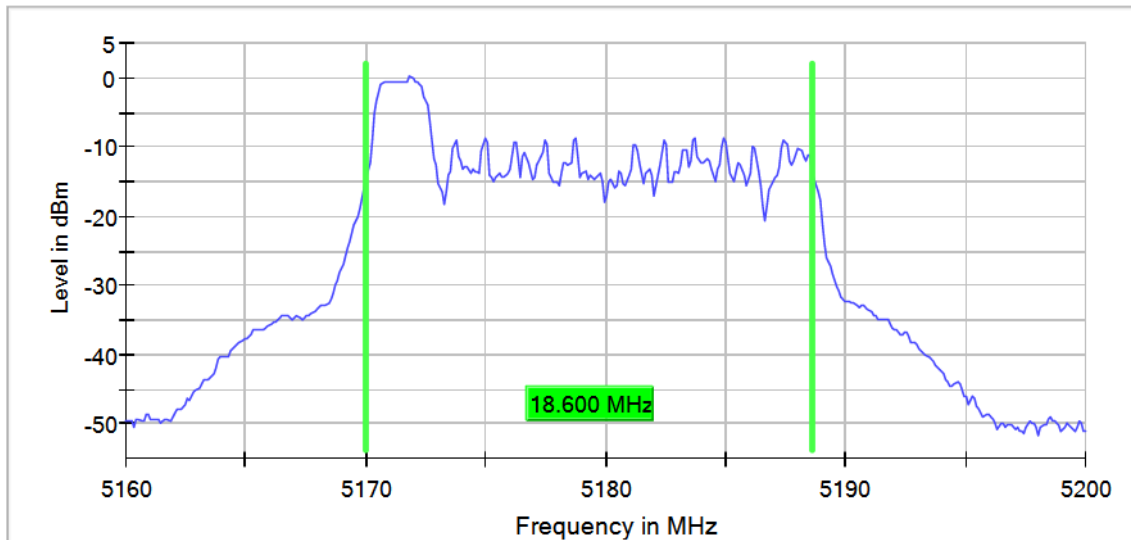

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5200.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Subcarrier Mode = RU



Images:

99 % Bandwidth

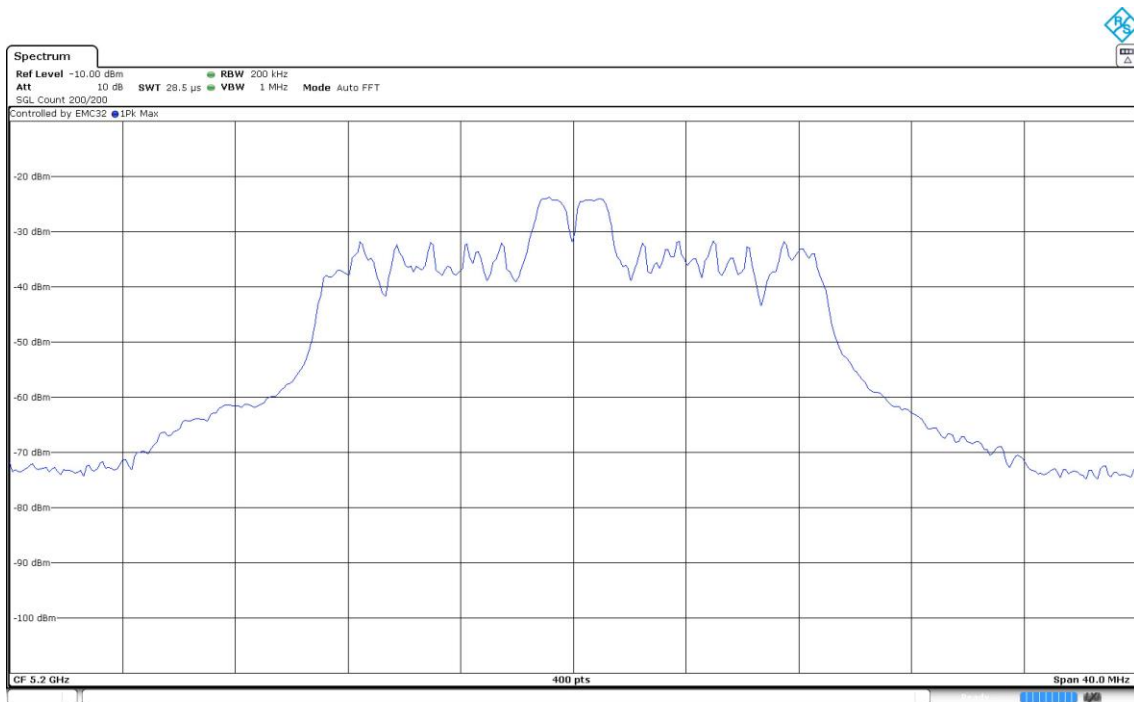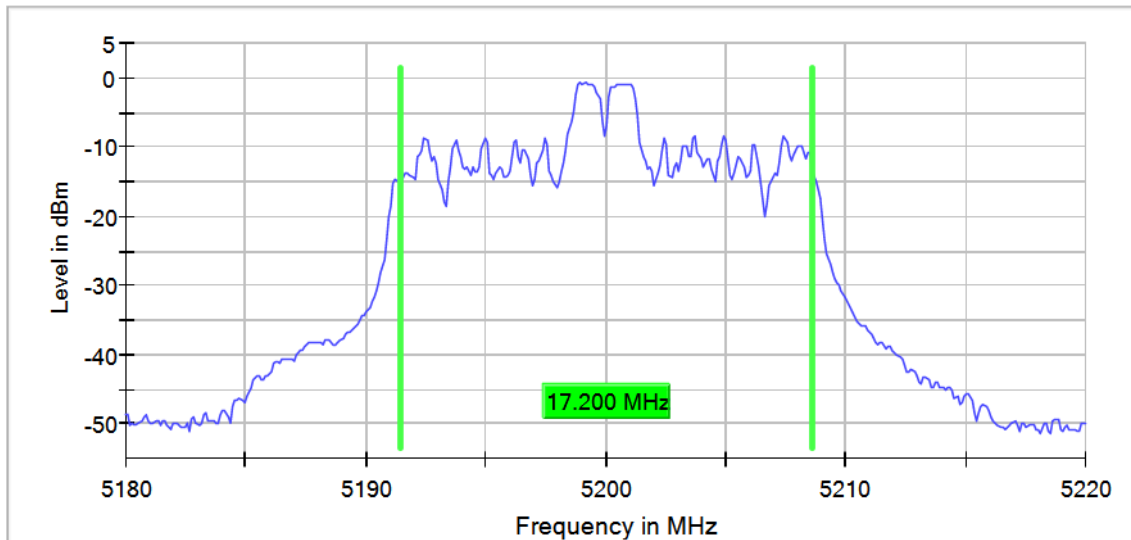

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5240.00000 Modulation = 802.11ax HE20 (OFDMA MCS0)
Subcarrier Mode = SU

Images:

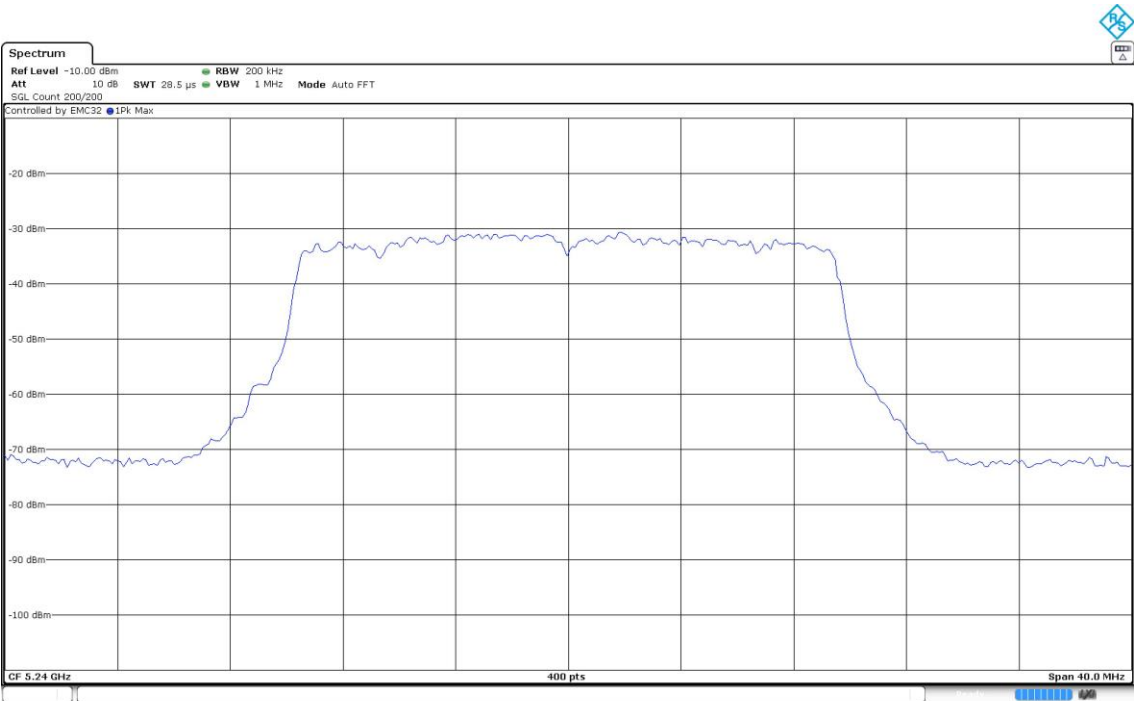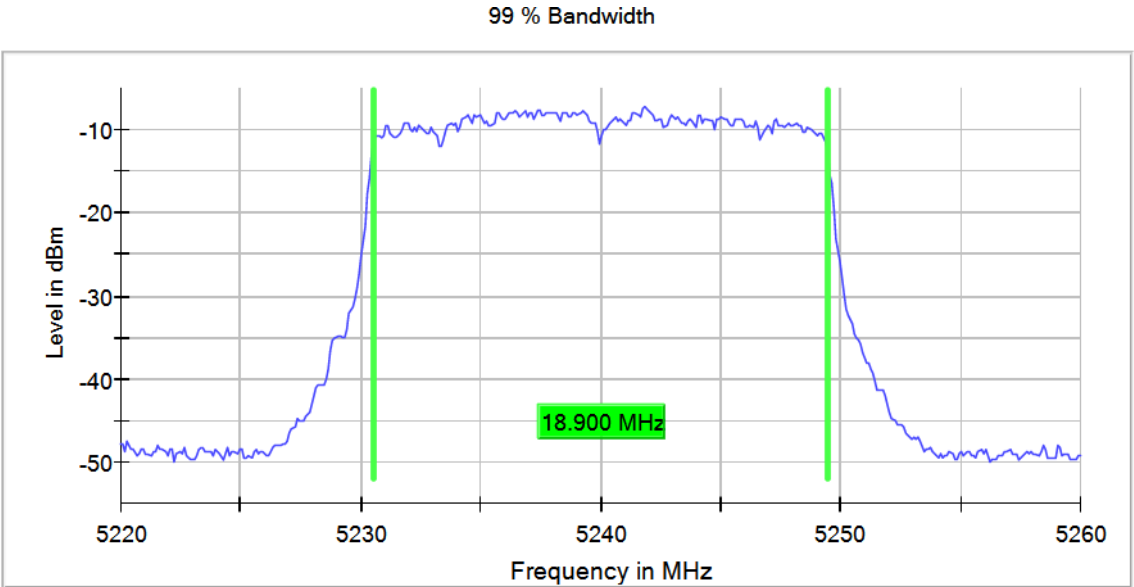

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5240.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Subcarrier Mode = RU

Images:

99 % Bandwidth

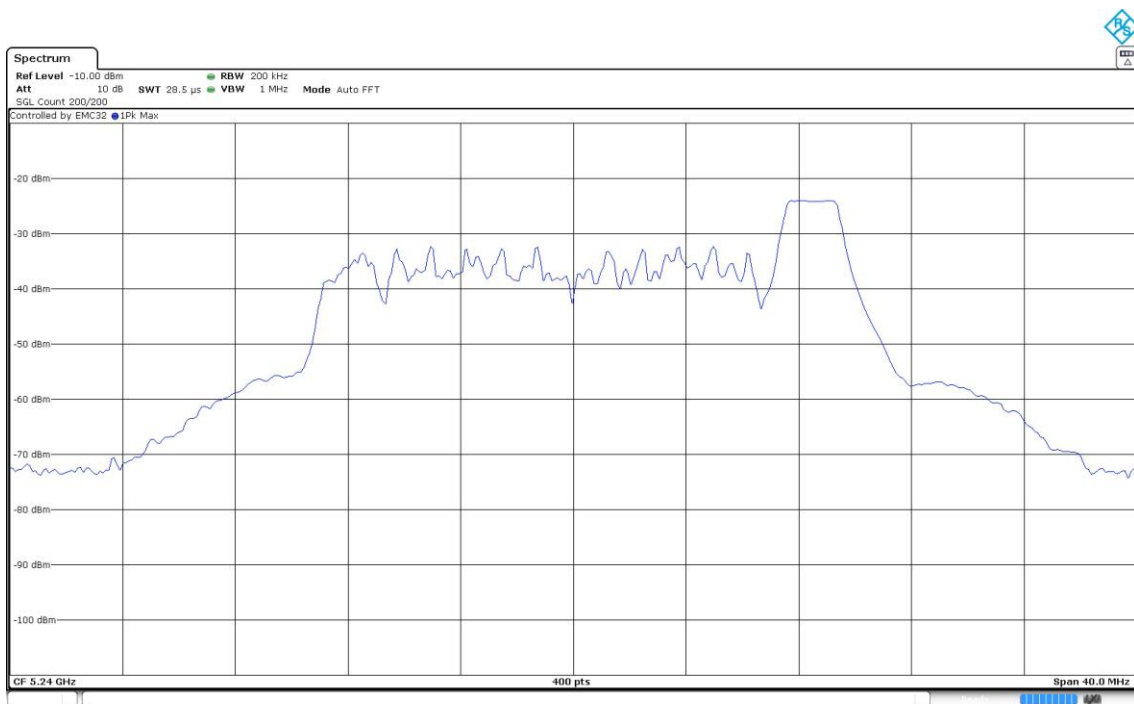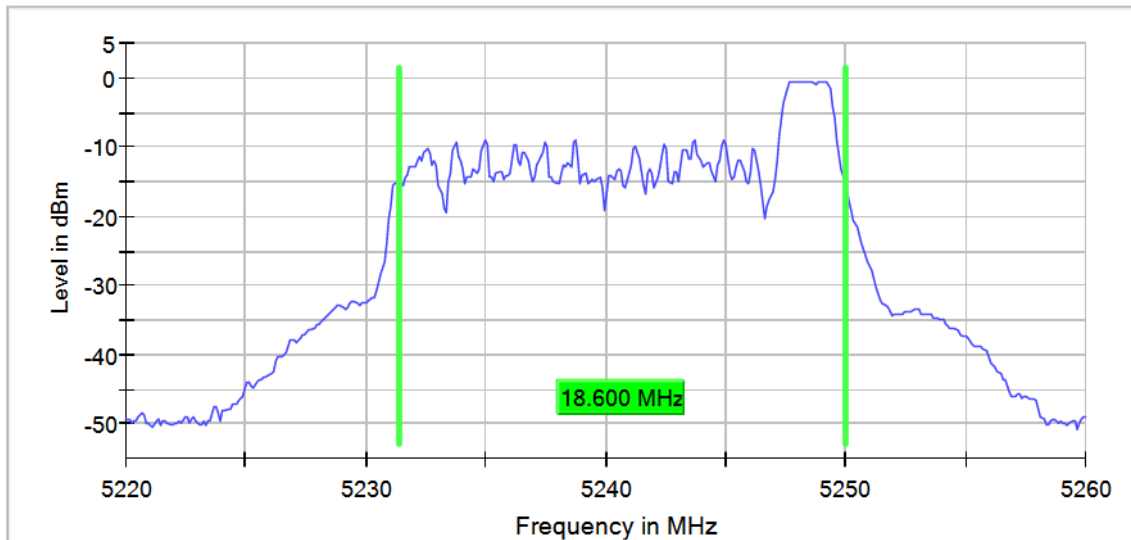

Modulation: 802.11ax HE40 (OFDMA MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Subcarrier Mode	Occ Ch BW (MHz)
[5150, 5250]	2+3	5190.00000	SU	37.750
			RU	36.500
		5230.00000	SU	38.000
			RU	36.500



Verdict

Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5190.00000 Modulation = 802.11ax HE40 (OFDMA MCS0)
Subcarrier Mode = SU

Images:

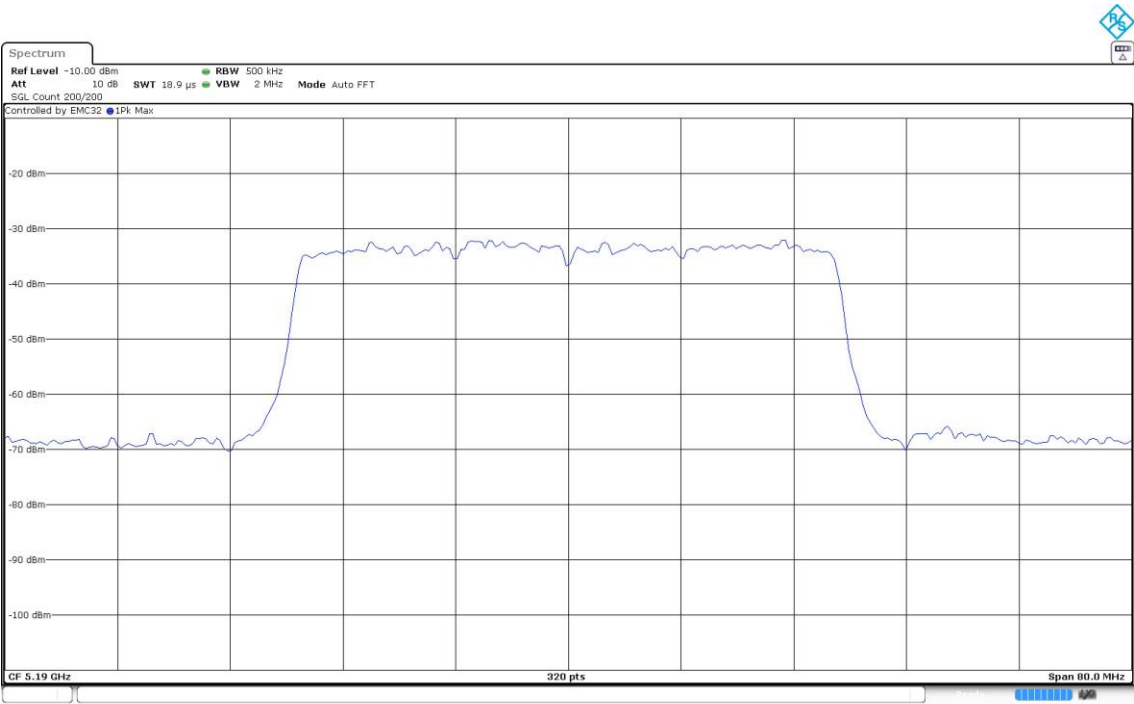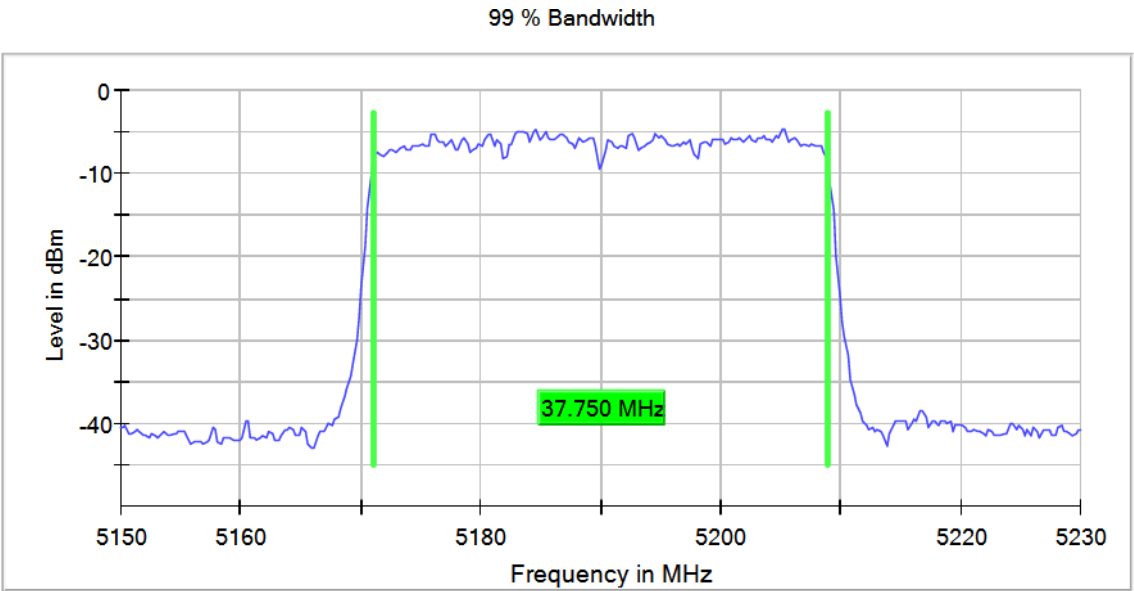

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5190.00000

Modulation = 802.11ax HE40 (OFDMA MCS0)

Subcarrier Mode = RU

Images:

99 % Bandwidth

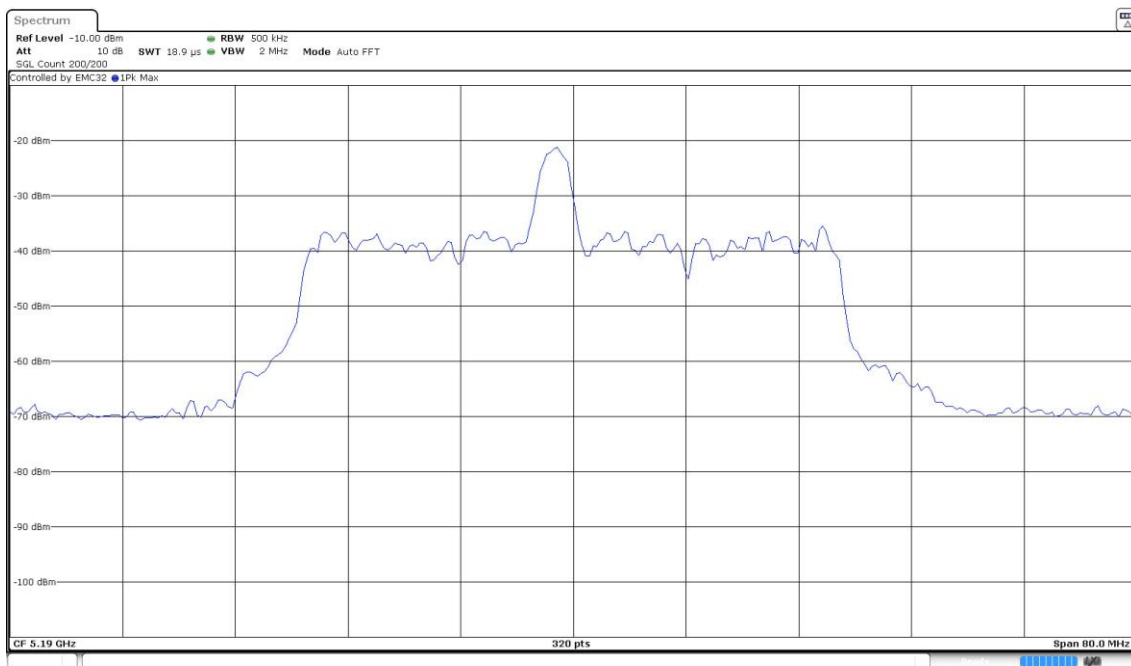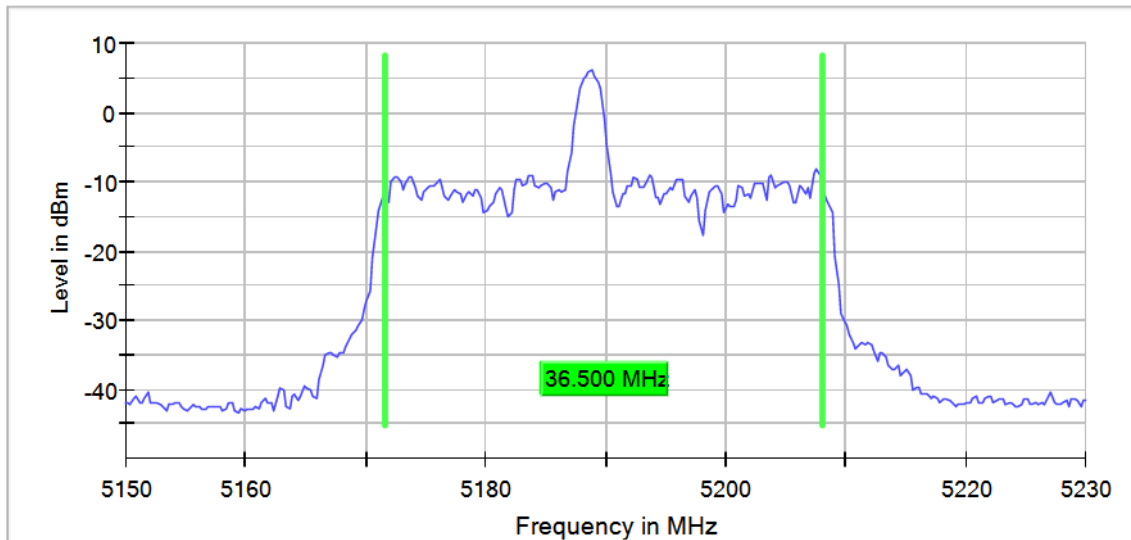

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5230.00000

Modulation = 802.11ax HE40 (OFDMA MCS0)

Subcarrier Mode = SU

Images:

99 % Bandwidth

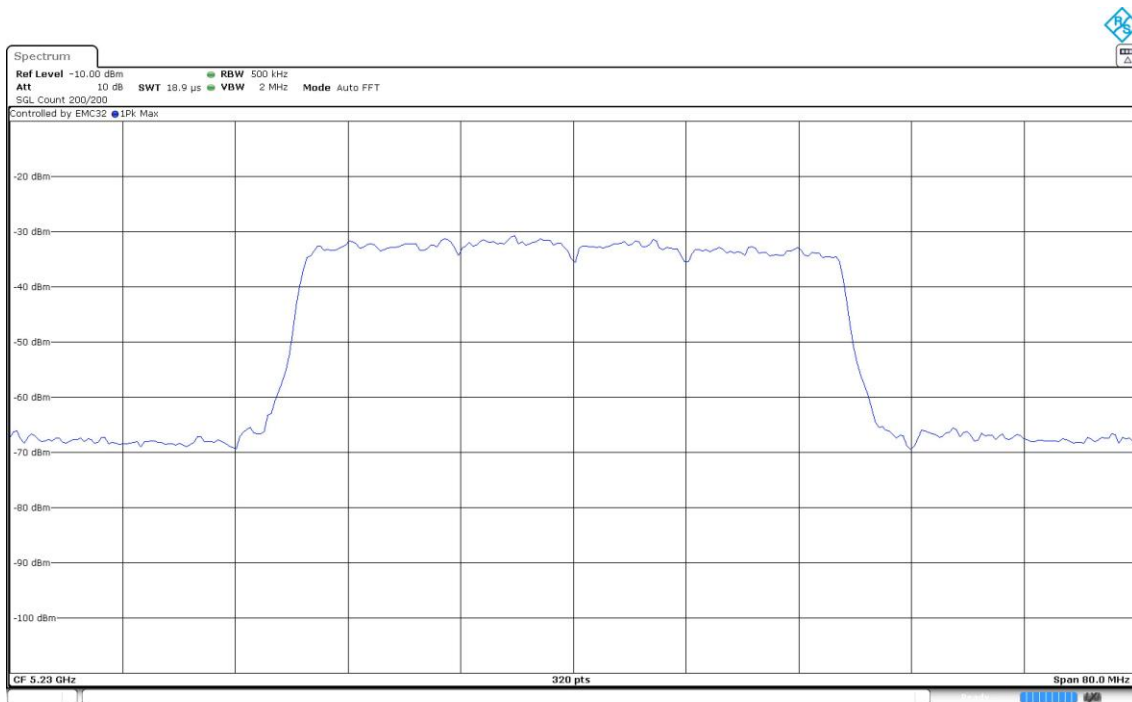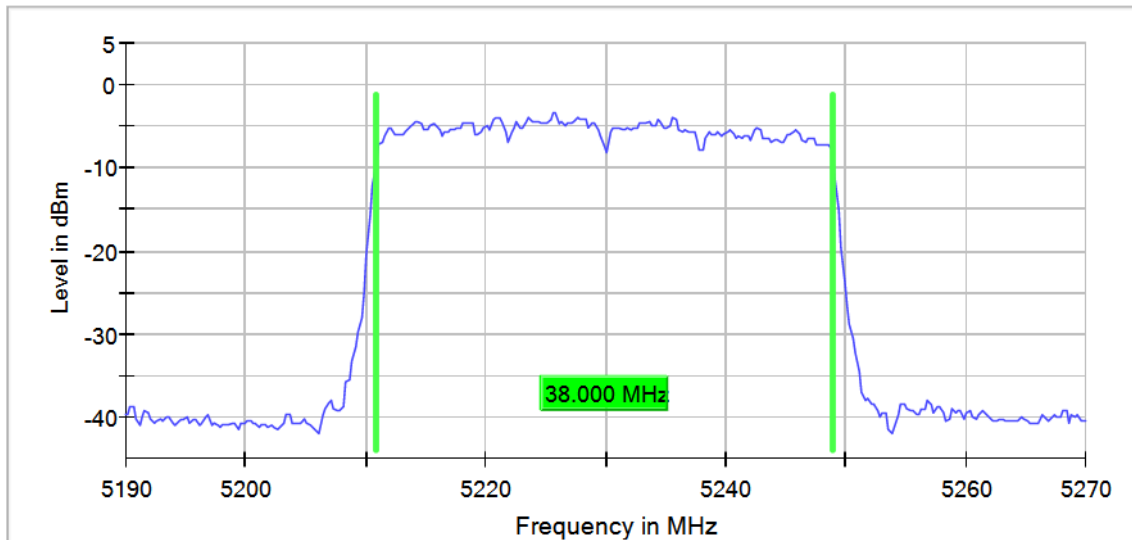

Operation Band MHz = [5150, 5250] Active Port = 2+3



Frequency MHz = 5230.00000

Modulation = 802.11ax HE40 (OFDMA MCS0)

Subcarrier Mode = RU

Images:

99 % Bandwidth

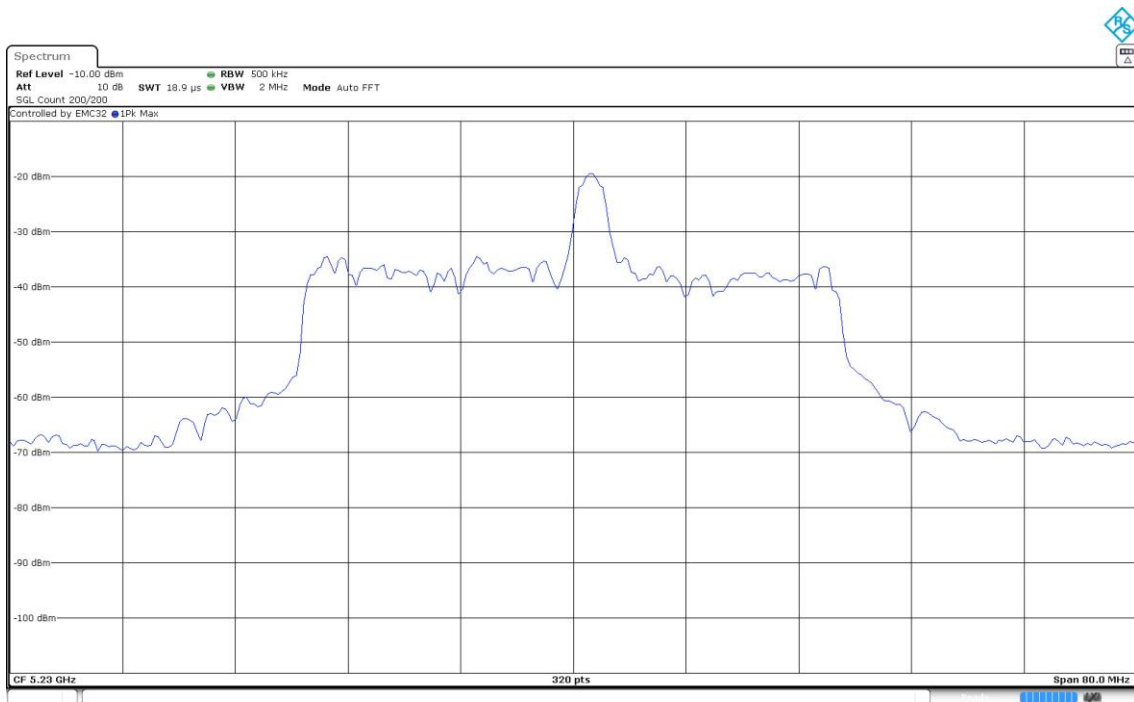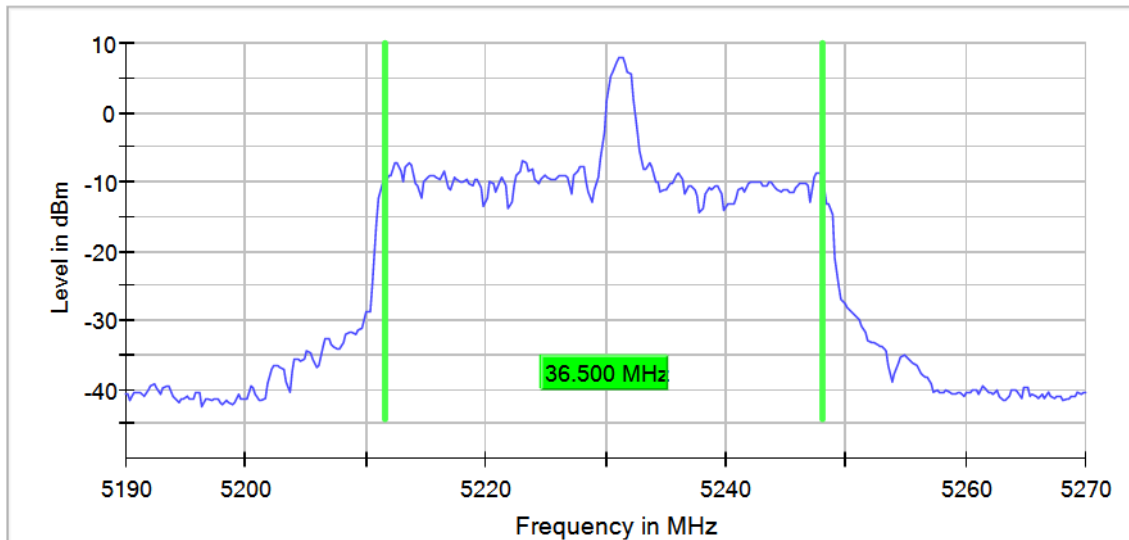

Modulation: 802.11ax HE80 (OFDMA MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Antenna configuration	Subcarrier Mode	Occ Ch BW (MHz)
[5150, 5250]	2+3	5210.00000	MIMO CDD Mode 2x2	RU	78.000
[5150, 5250]	2+3	5210.00000	MIMO CDD Mode 2x2	SU	77.500

Verdict



Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5210.00000 Modulation = 802.11ax HE80 (OFDM MCS0)
Antenna configuration = MIMO CDD Mode 2x2 Subcarrier Mode = SU

Images:

99 % Bandwidth

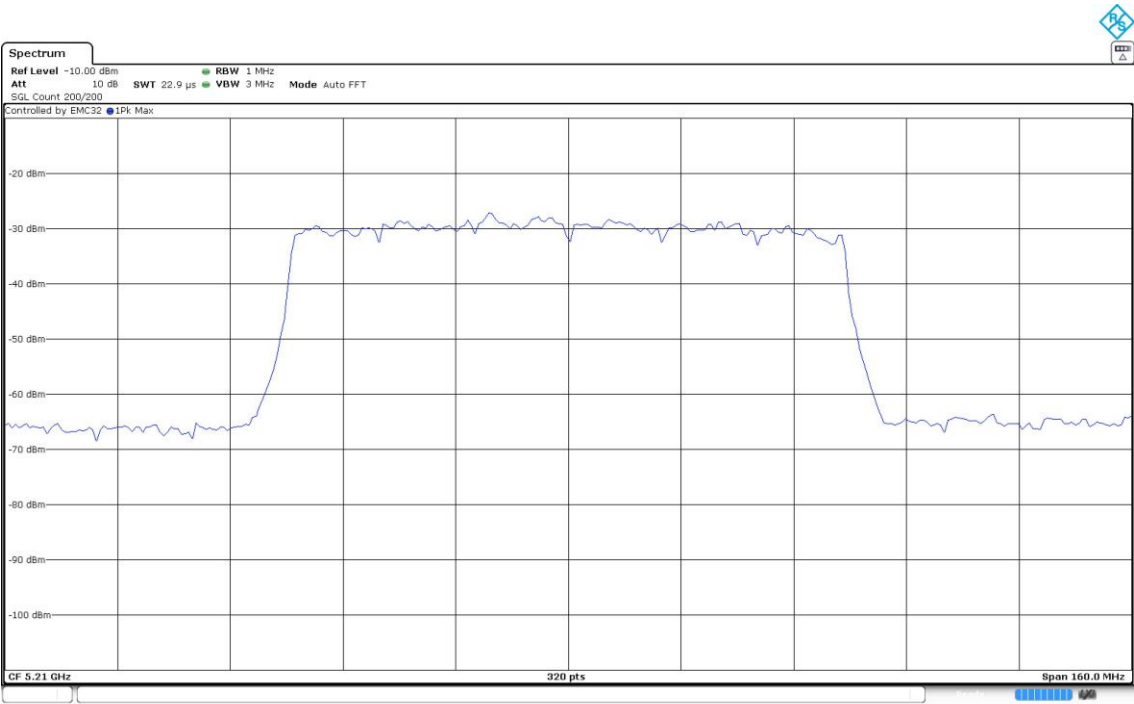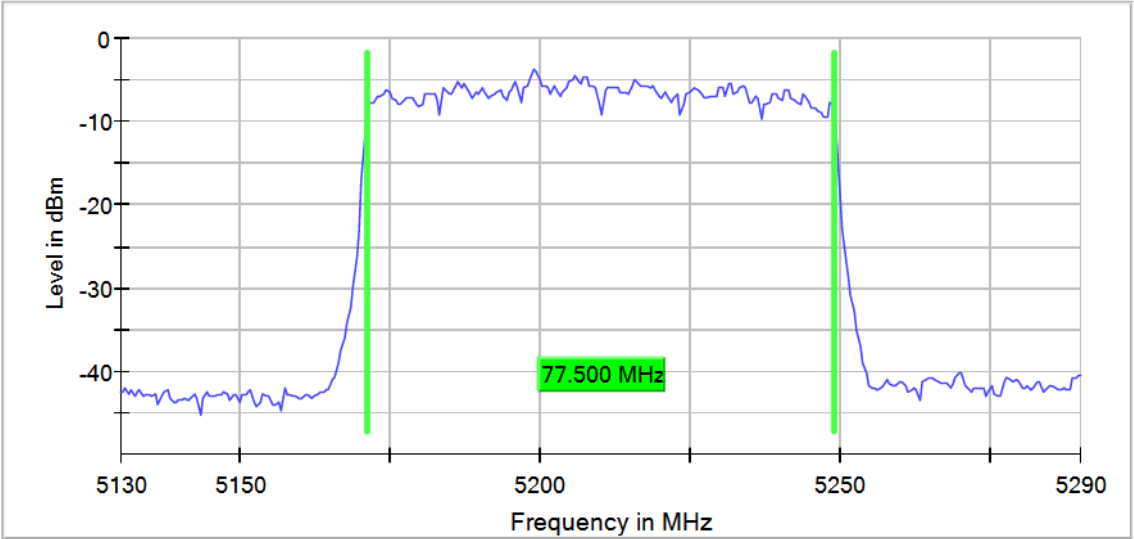

Verdict



Pass

Attachments

Operation Band MHz = [5150, 5250] Active Port = 2+3
Frequency MHz = 5210.00000 Modulation = 802.11ax HE80 (OFDMA MCS0)
Antenna configuration = MIMO CDD Mode 2x2 Subcarrier Mode = RU

Images:

99 % Bandwidth

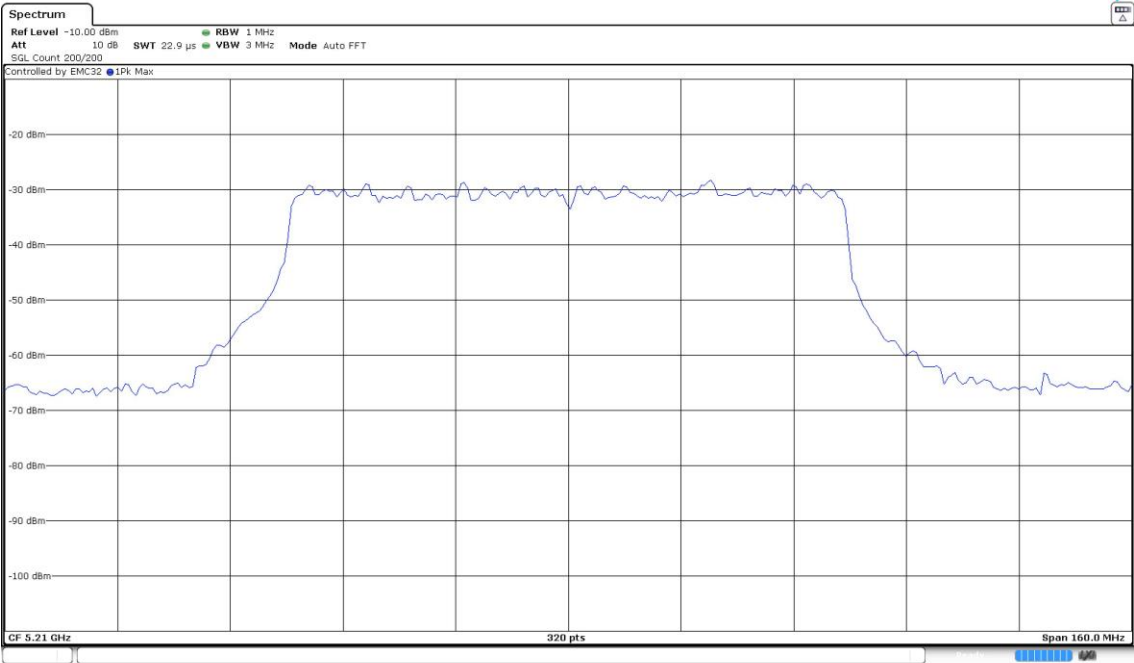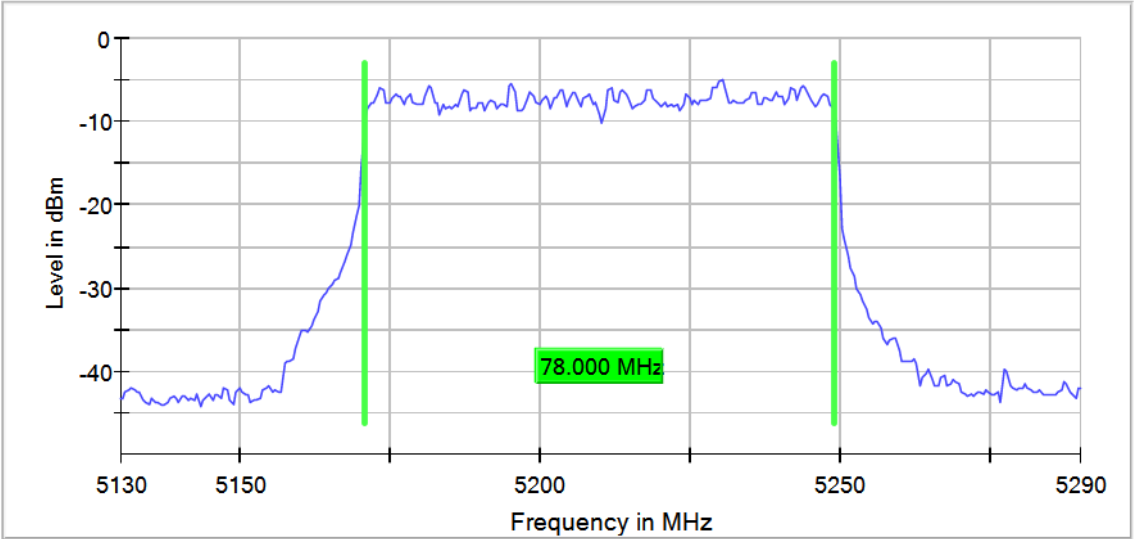

Modulation: 802.11n HT20 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5725, 5850]	2+3	5745.00000	17.600
		5785.00000	17.600
		5825.00000	17.600

Verdict

Pass



Attachments

Operation Band MHz = [5725, 5850] Active Port = 2+3

Frequency MHz = 5745.00000 Modulation = 802.11n HT20 (OFDM MCS0)

Images:



99 % Bandwidth

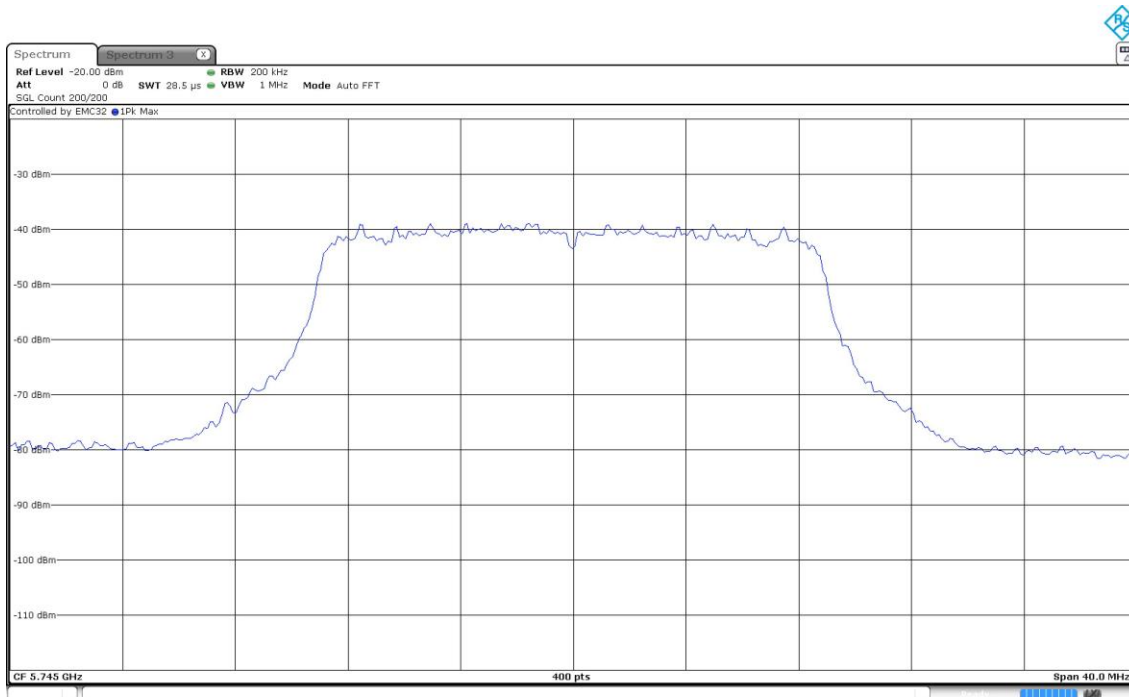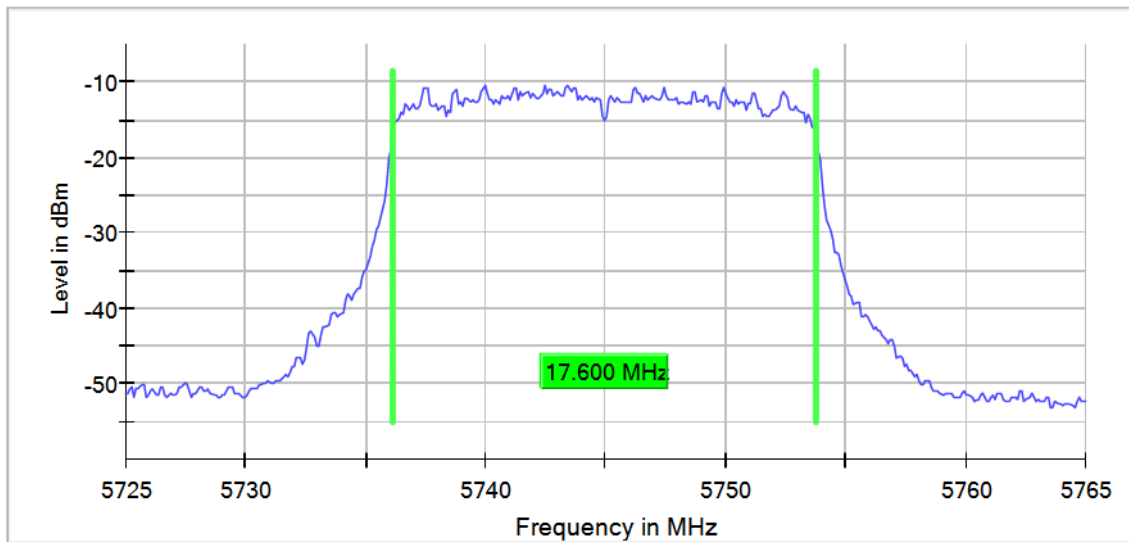

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5785.00000 Modulation = 802.11n HT20 (OFDM MCS0)

Images:

99 % Bandwidth

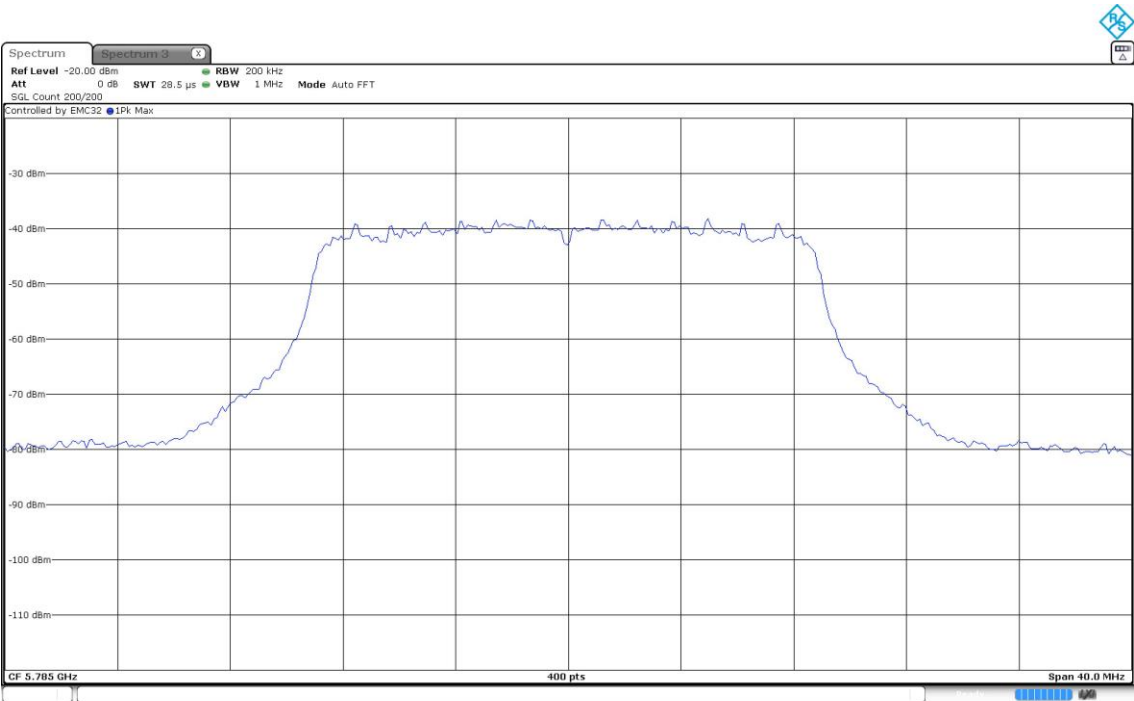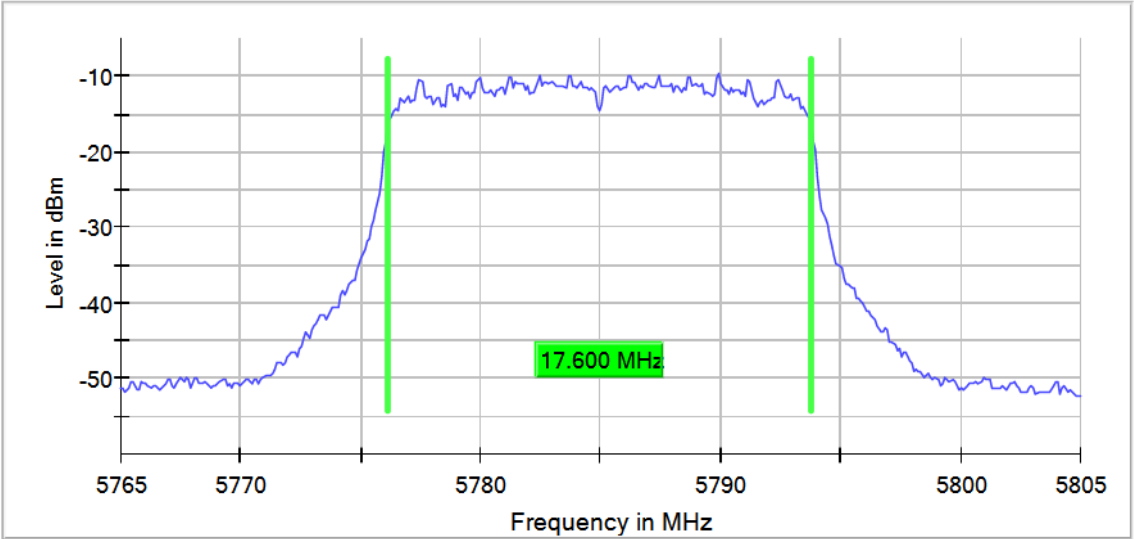



Operation Band MHz = [5725, 5850] Active Port = 2+3

Frequency MHz = 5825.00000

Modulation = 802.11n HT20 (OFDM MCS0)

Images:

99 % Bandwidth

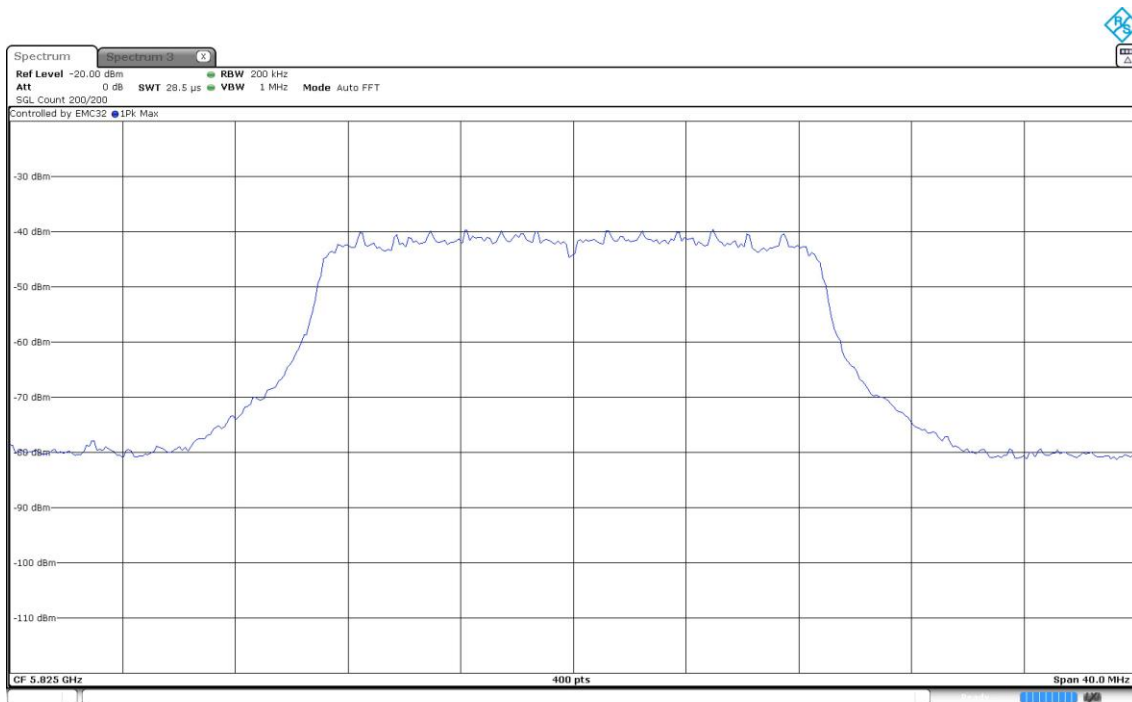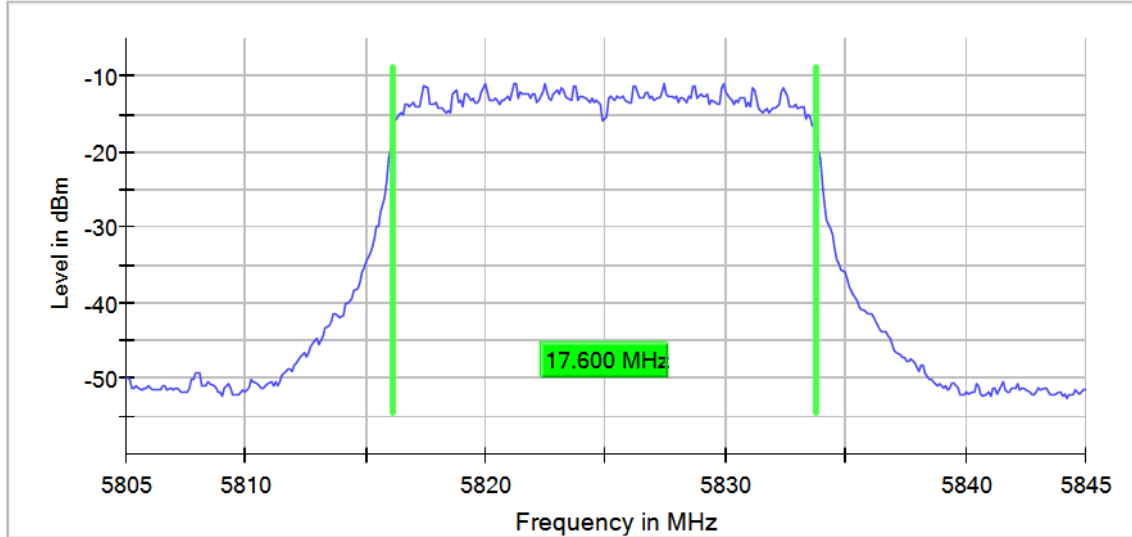

Modulation: 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5725, 5850]	2+3	5755.00000	36.250
		5795.00000	36.000



Verdict

Pass

Attachments

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5755.00000 Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)



Images:

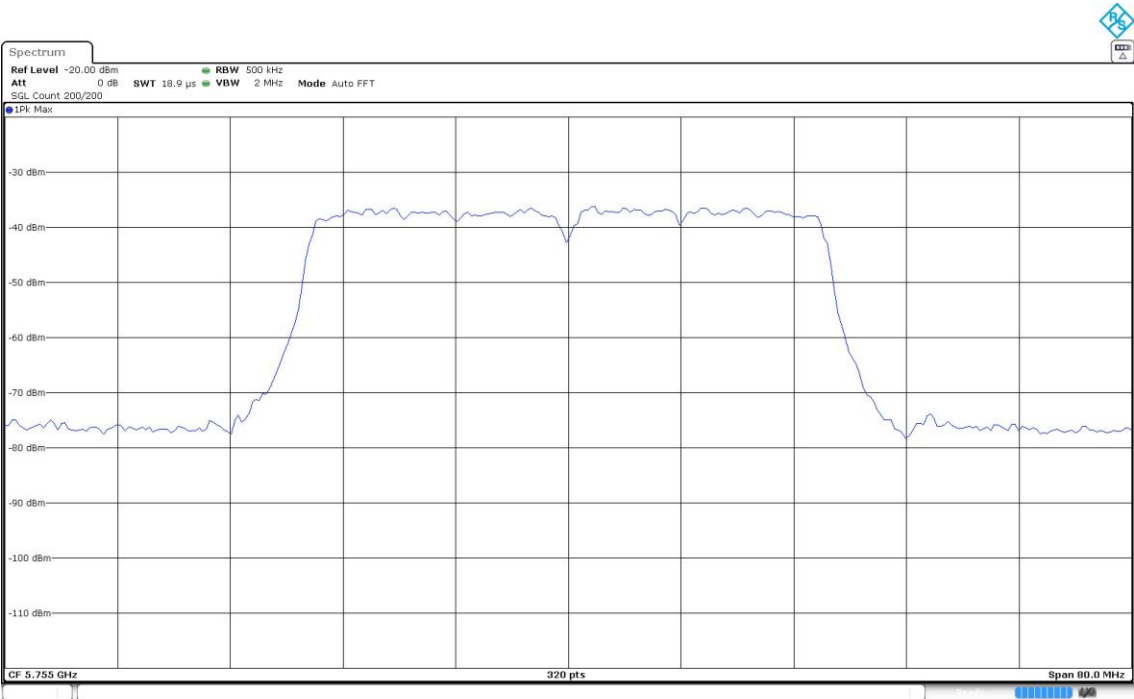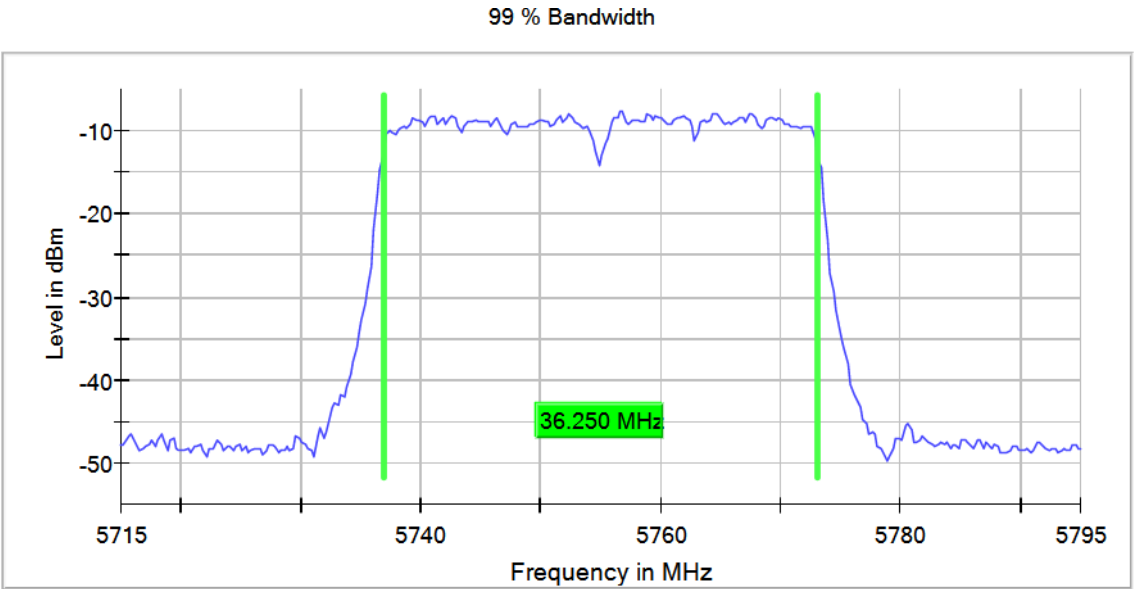

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5795.00000 Modulation = 802.11n HT40 (OFDM MCS0 13.5 Mbit/s)

Images:

99 % Bandwidth

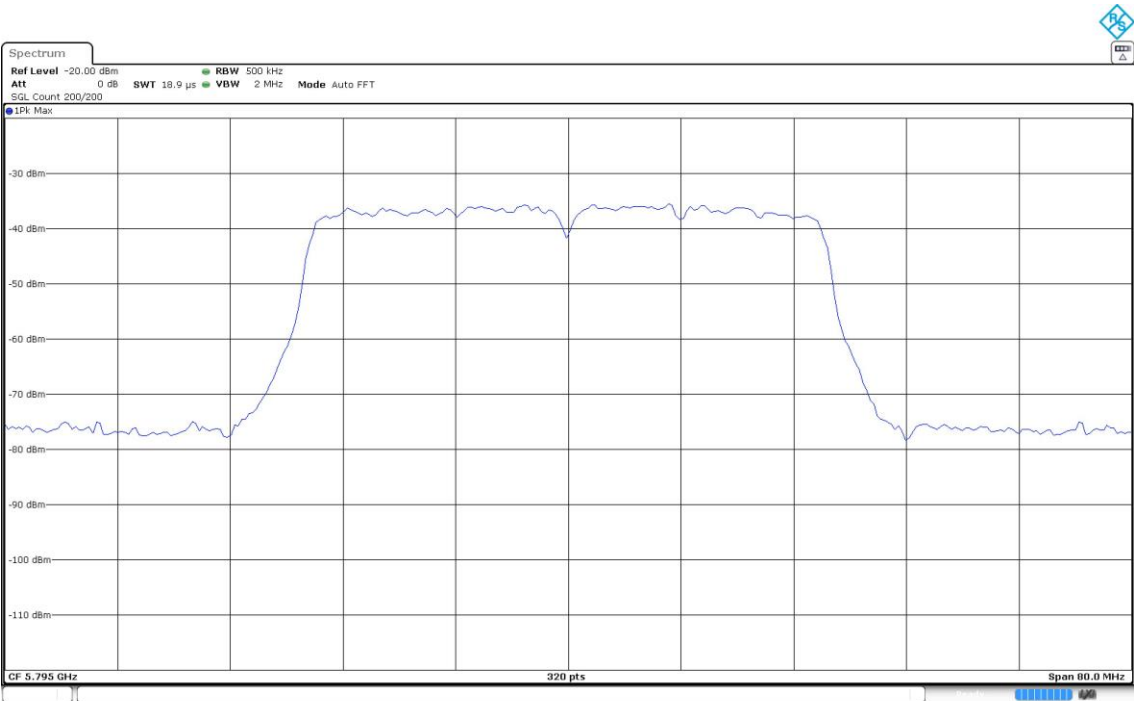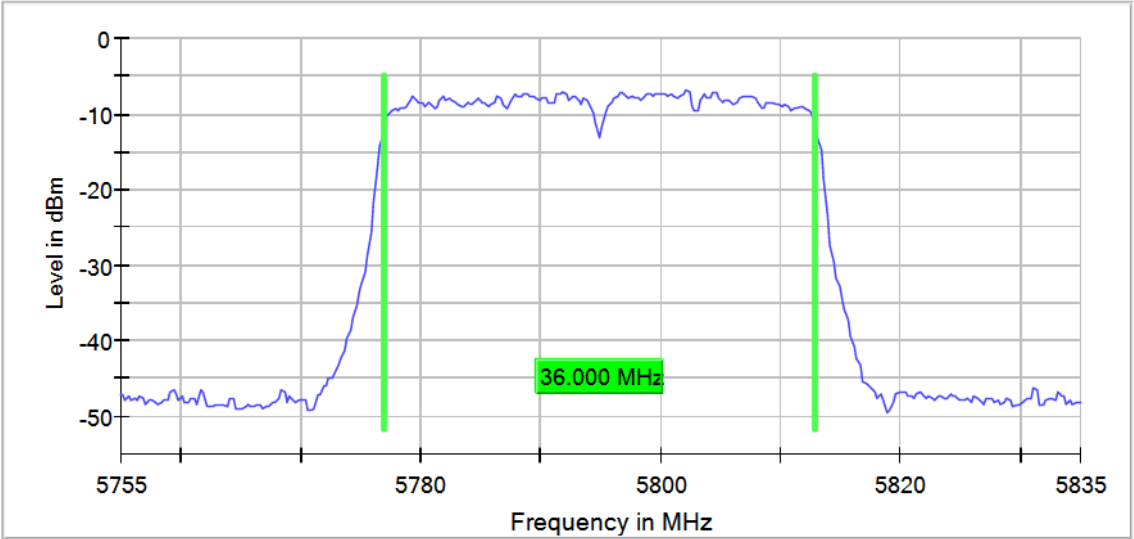

Modulation: 802.11a (OFDM 6 Mbit/s)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5725, 5850]	2+3	5745.00000	17.600
			16.400
		5785.00000	17.600
			16.400
		5825.00000	17.600
			16.400



Verdict

Pass

Attachments

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5745.00000 Modulation = 802.11a (OFDM 6 Mbit/s)



Images:

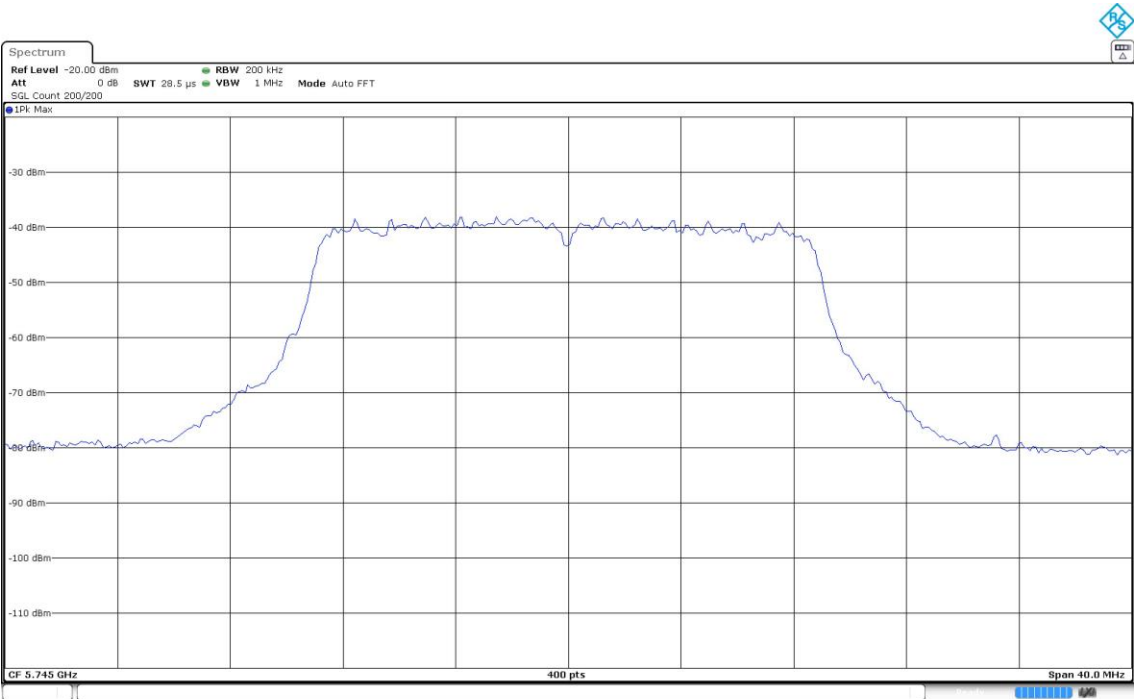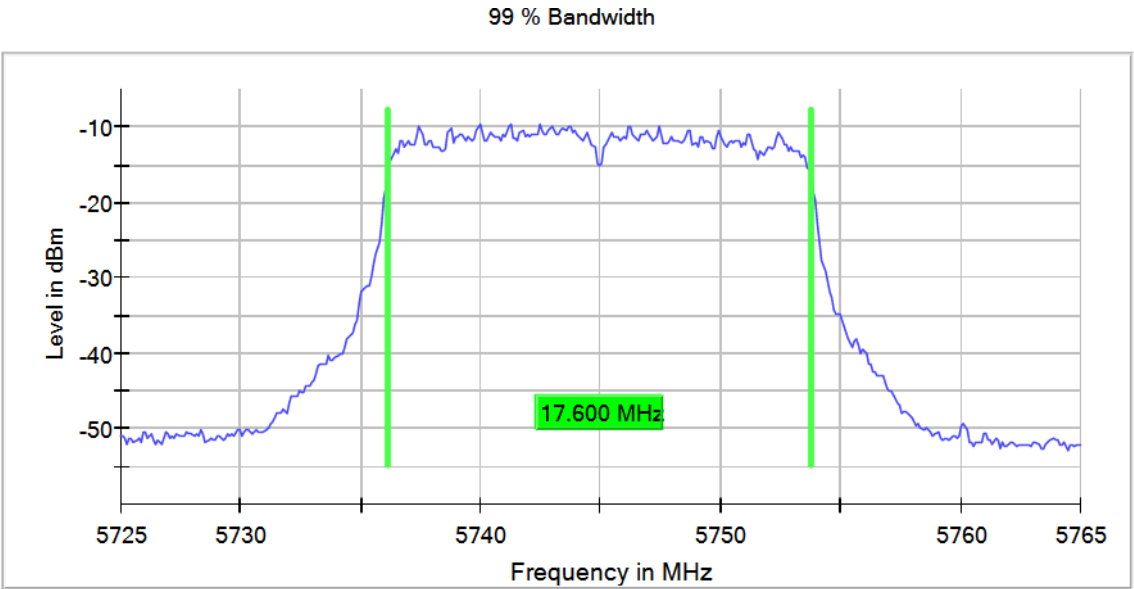

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5745.00000 Modulation = 802.11a (OFDM 6 Mbit/s)

Images:



99 % Bandwidth

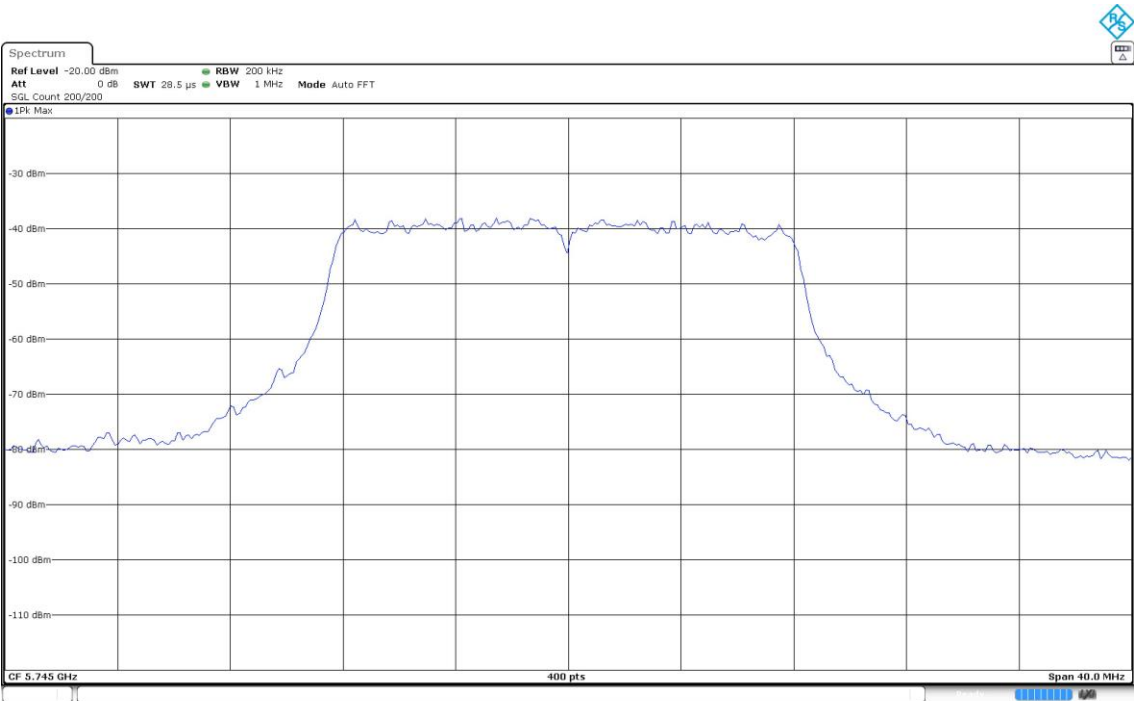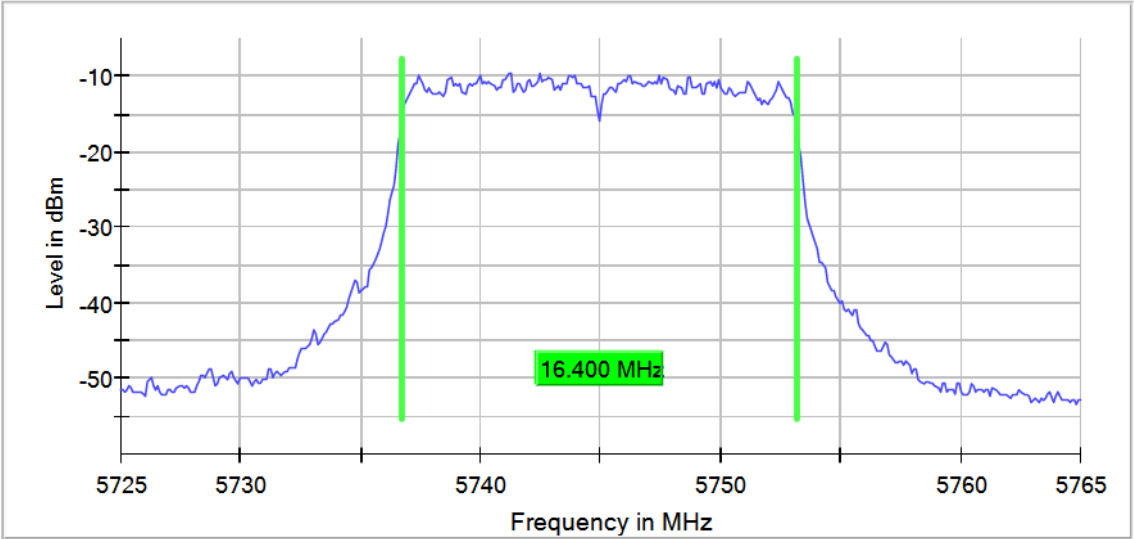

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5785.00000 Modulation = 802.11a (OFDM 6 Mbit/s)

Images:



99 % Bandwidth

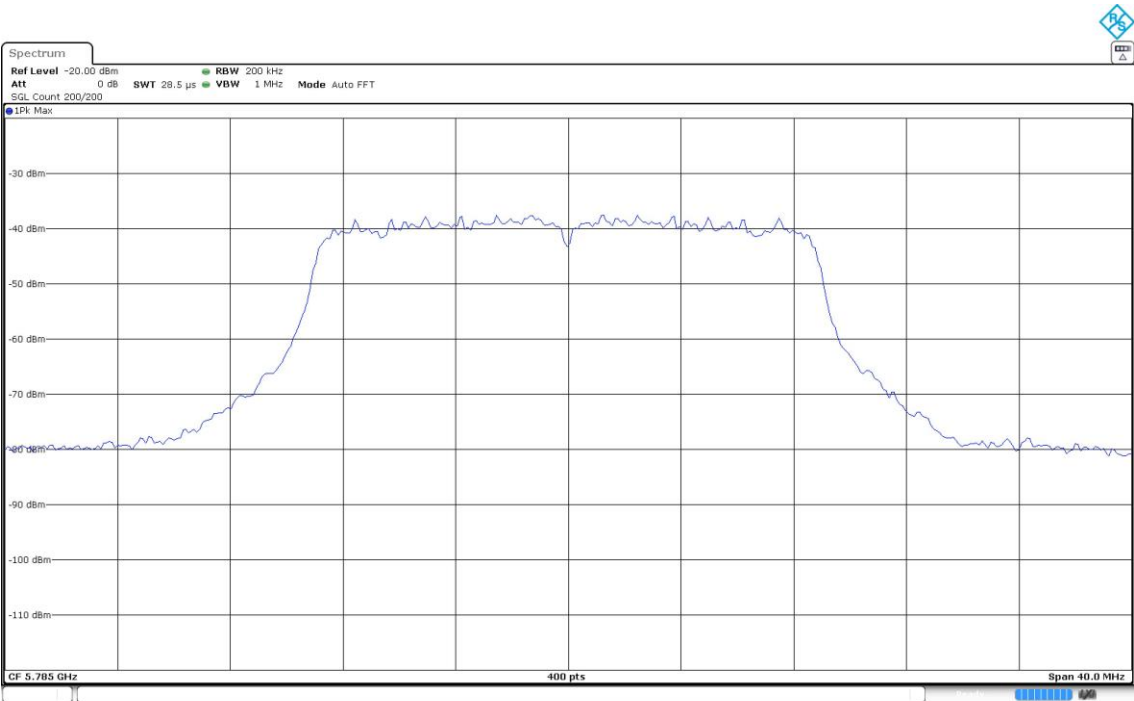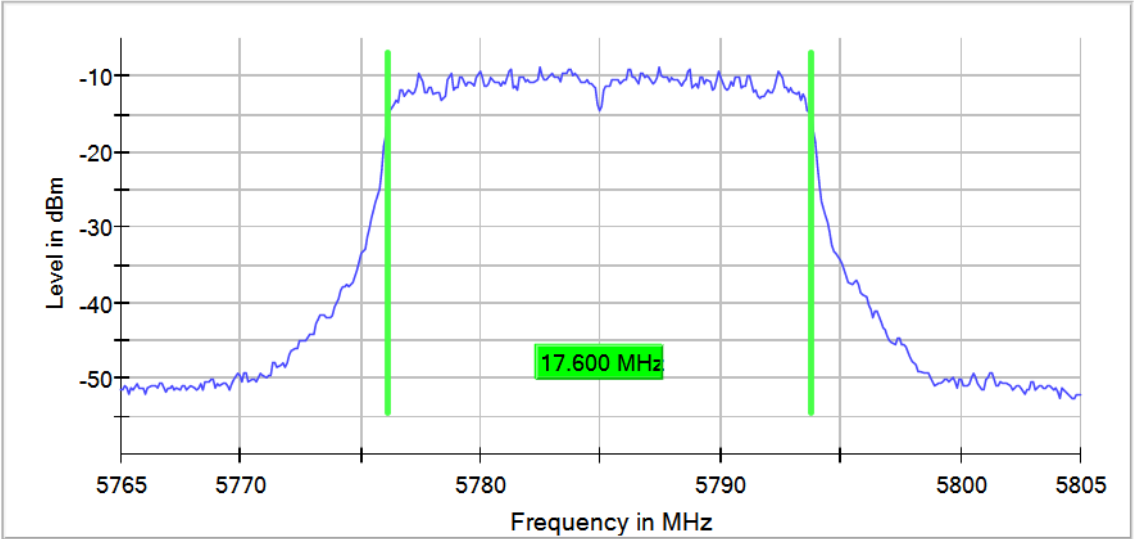

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5785.00000 Modulation = 802.11a (OFDM 6 Mbit/s)

Images:



99 % Bandwidth

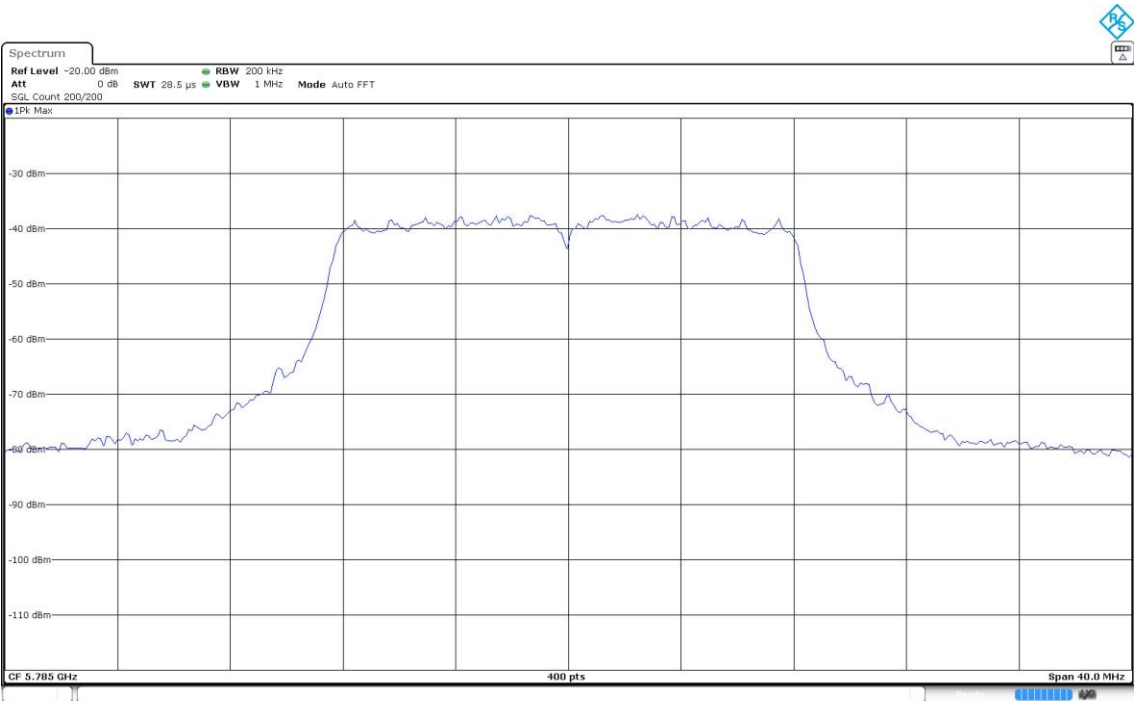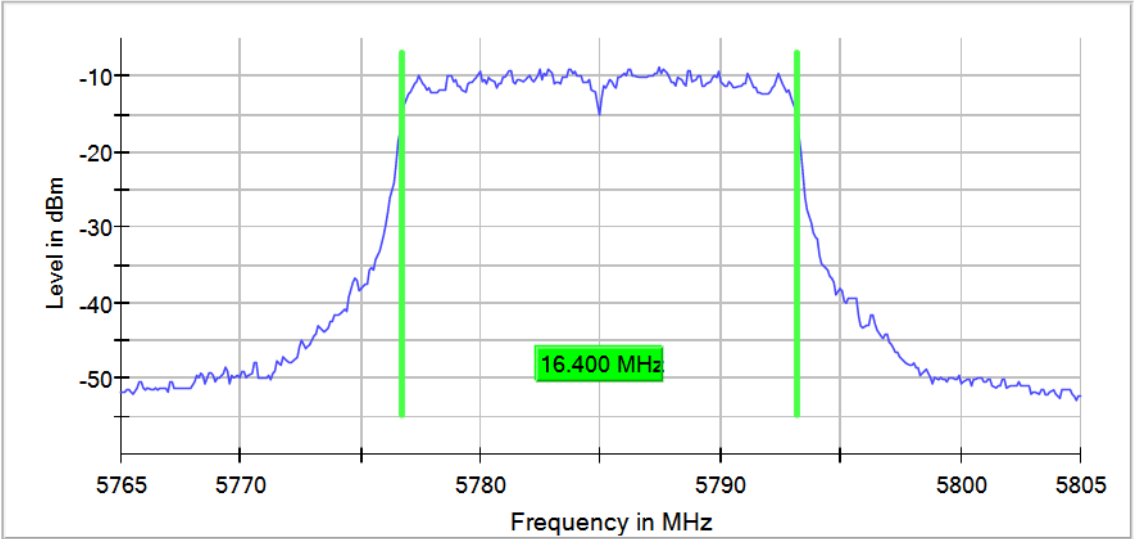

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5825.00000 Modulation = 802.11a (OFDM 6 Mbit/s)

Images:



99 % Bandwidth

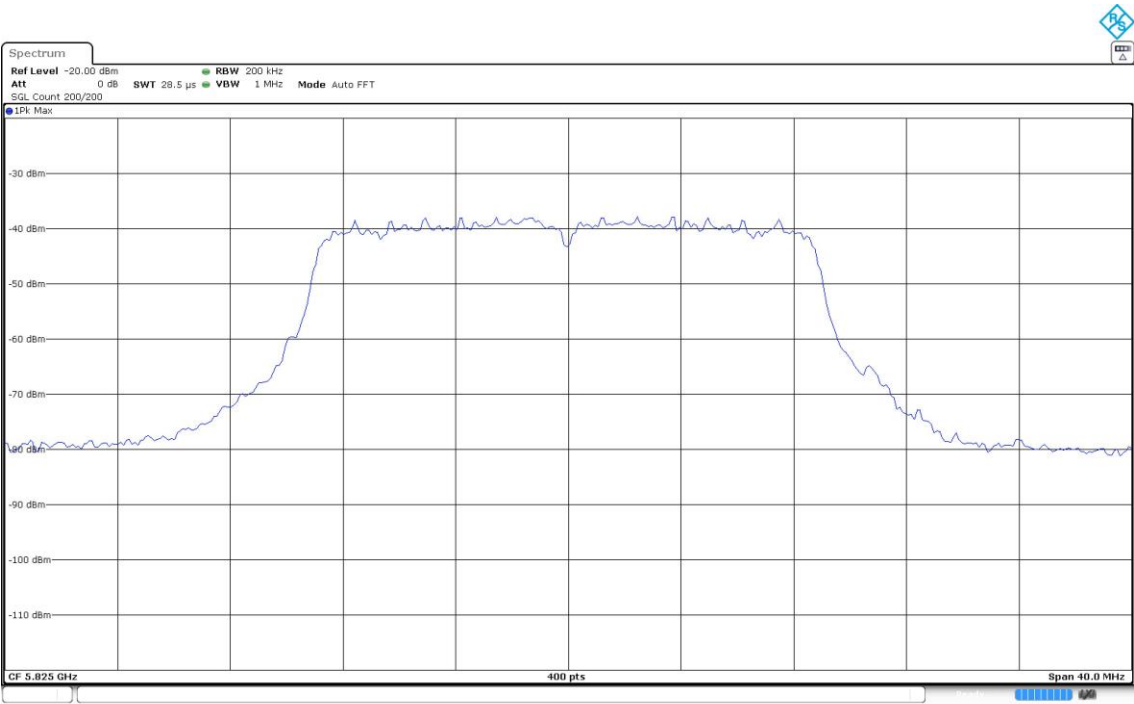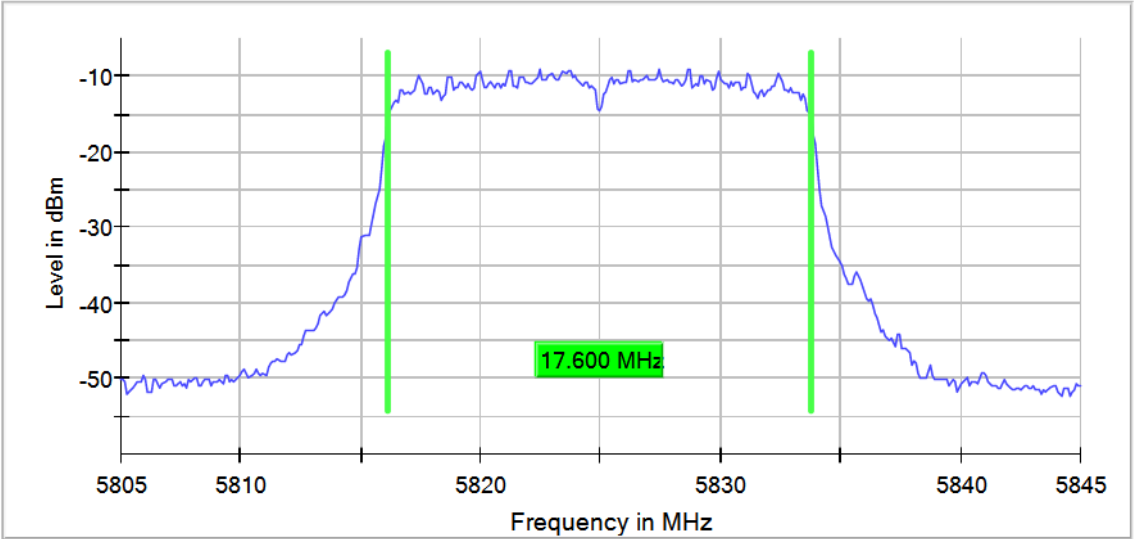

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5825.00000 Modulation = 802.11a (OFDM 6 Mbit/s)

Images:

99 % Bandwidth

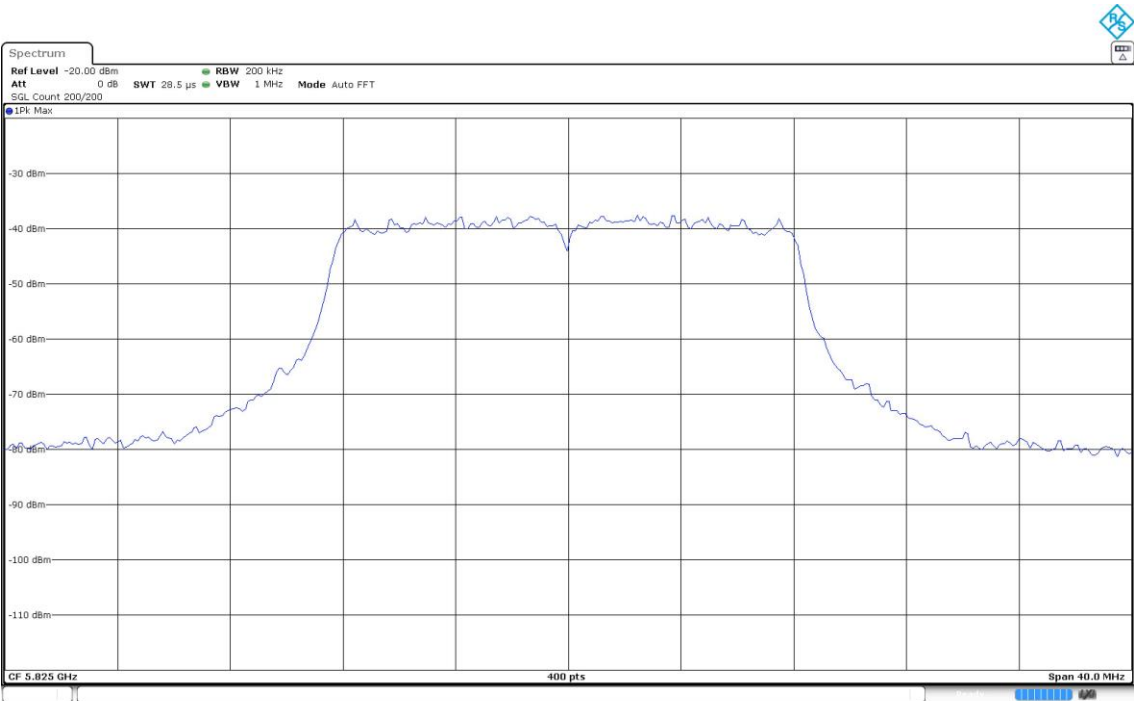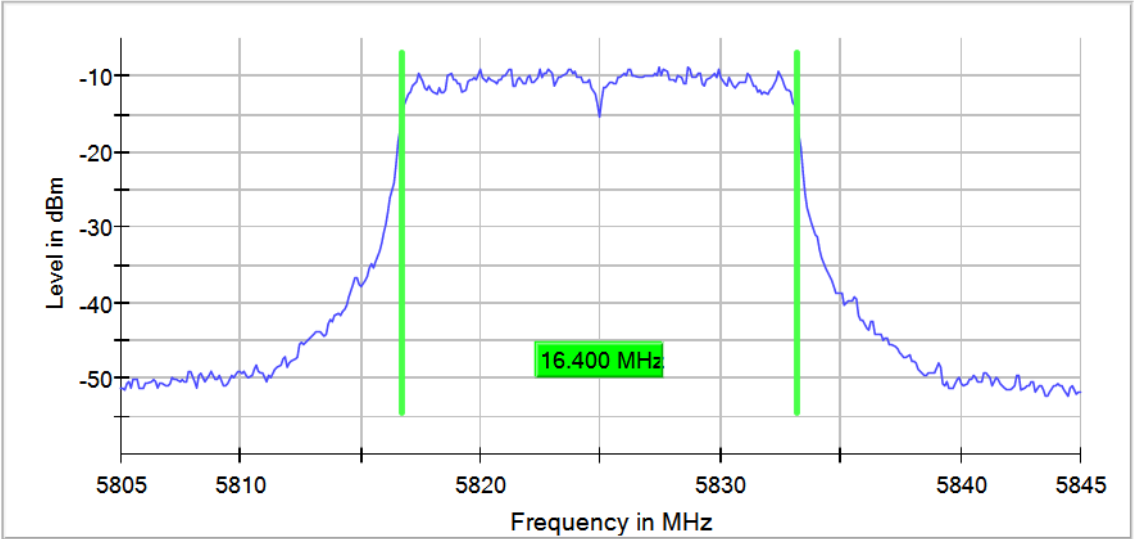

Modulation: 802.11ac VHT40 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5725, 5850]	2+3	5755.00000	36.250
		5795.00000	36.000



Verdict

Pass

Attachments

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5755.00000 Modulation = 802.11ac VHT40 (OFDM MCS0)



Images:

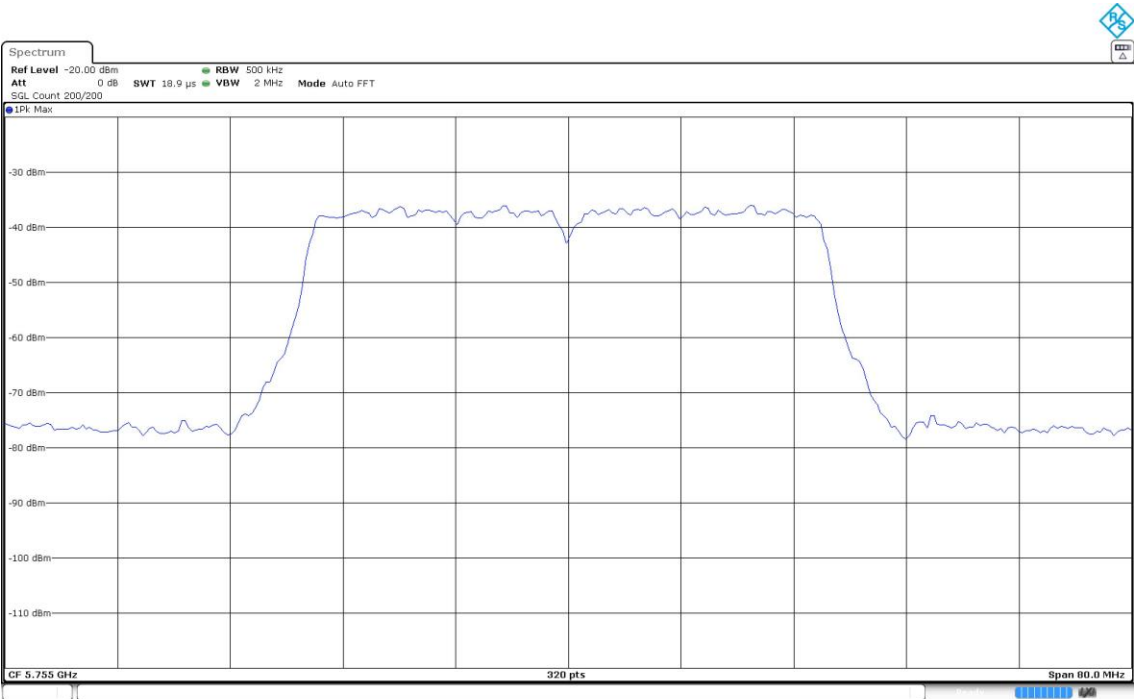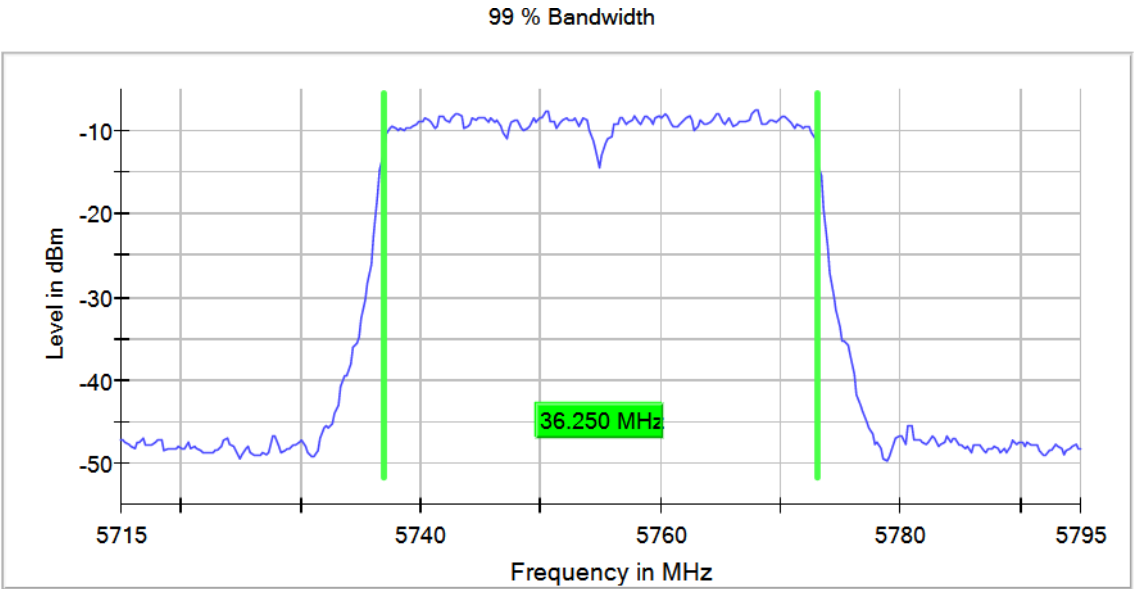

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5795.00000 Modulation = 802.11ac VHT40 (OFDM MCS0)

Images:

99 % Bandwidth

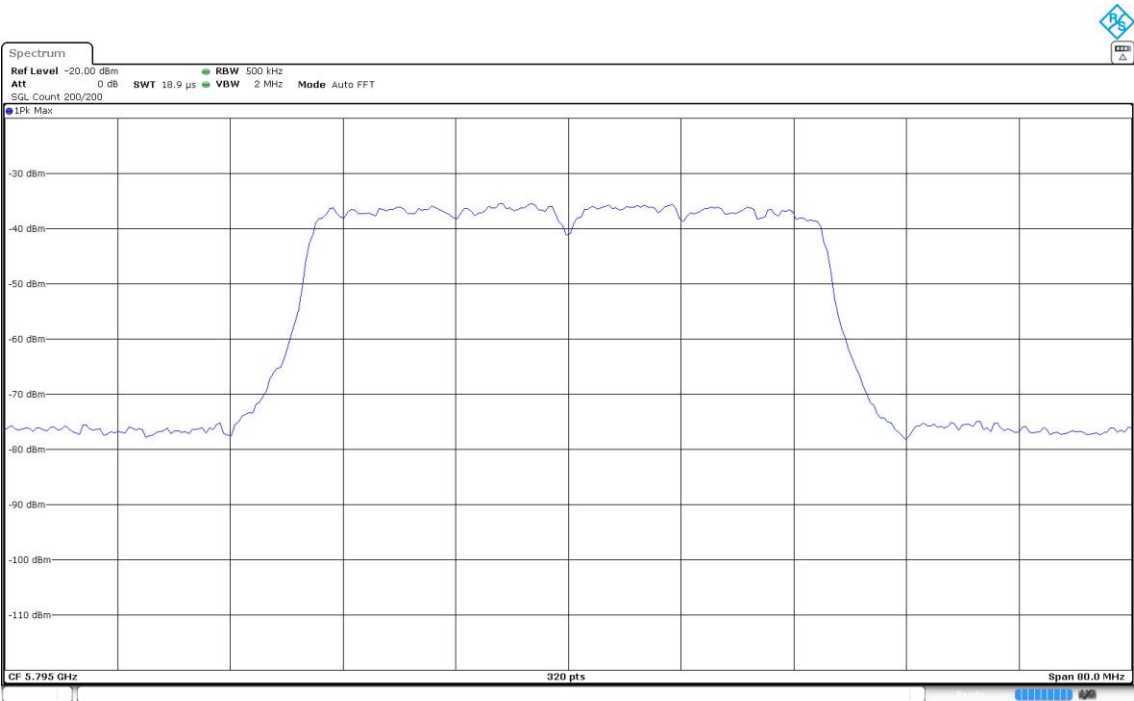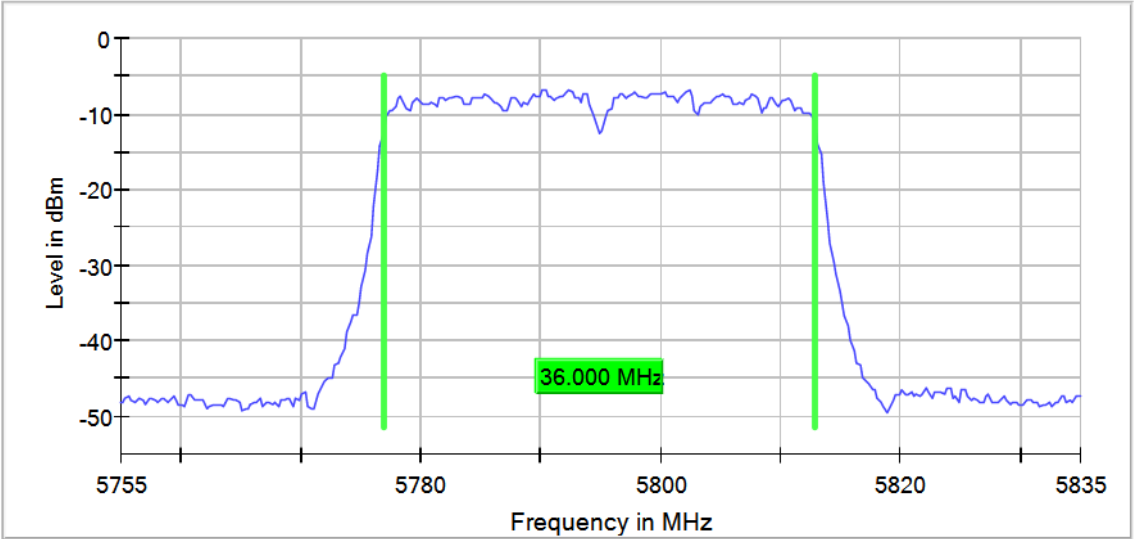

Modulation: 802.11ac VHT80 (OFDM MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Occ Ch BW (MHz)
[5725, 5850]	2+3	5775.00000	75.500



Verdict

Pass

Attachments

Operation Band MHz = [5725, 5850] Active Port = 2+3
Frequency MHz = 5775.00000 Modulation = 802.11ac VHT80 (OFDM MCS0)

Images:

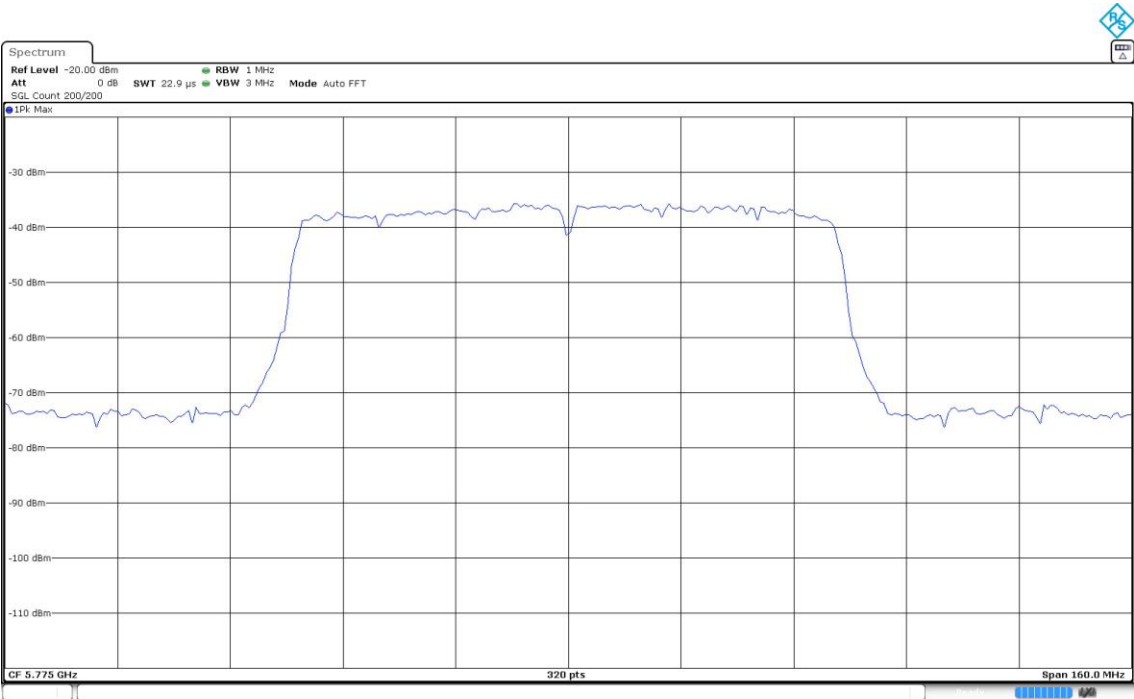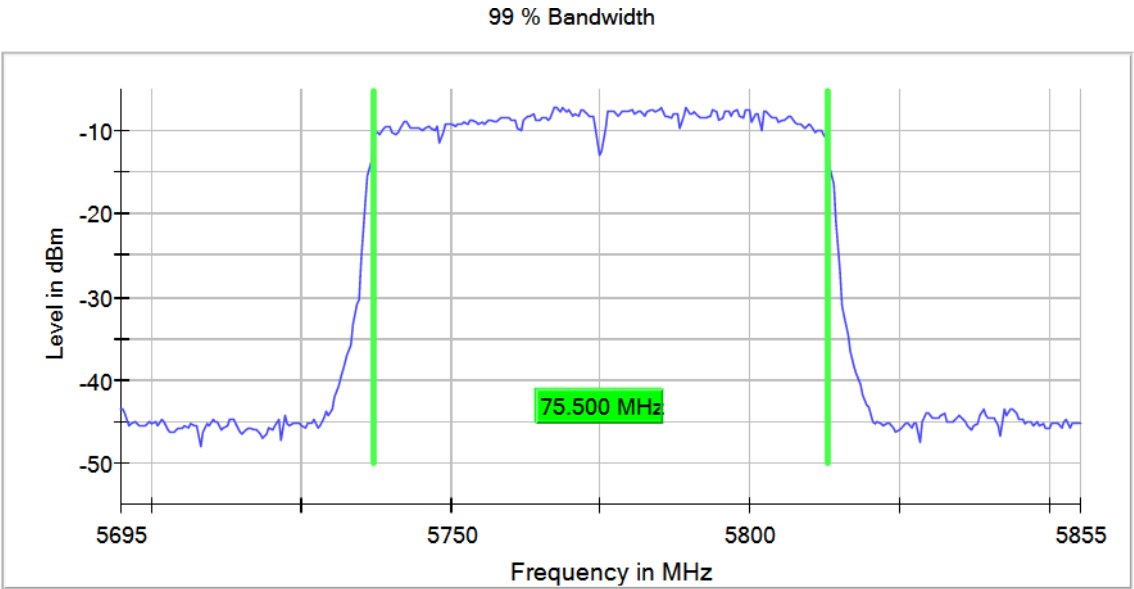

Modulation: 802.11ax HE20 (OFDMA MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Antenna configuration	Subcarrier Mode	Occ Ch BW (MHz)
[5725, 5850]	2+3	5745.00000	MIMO CDD Mode 2x2	RU	18.500
		5745.00000		SU	19.000
		5785.00000		RU	18.500
		5785.00000		SU	18.300
		5825.00000		RU	18.500
		5825.00000		SU	19.000

Verdict

Pass

Attachments

Operation Band MHz = [5725, 5850]

Active Port = 2+3



Frequency MHz = 5745.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

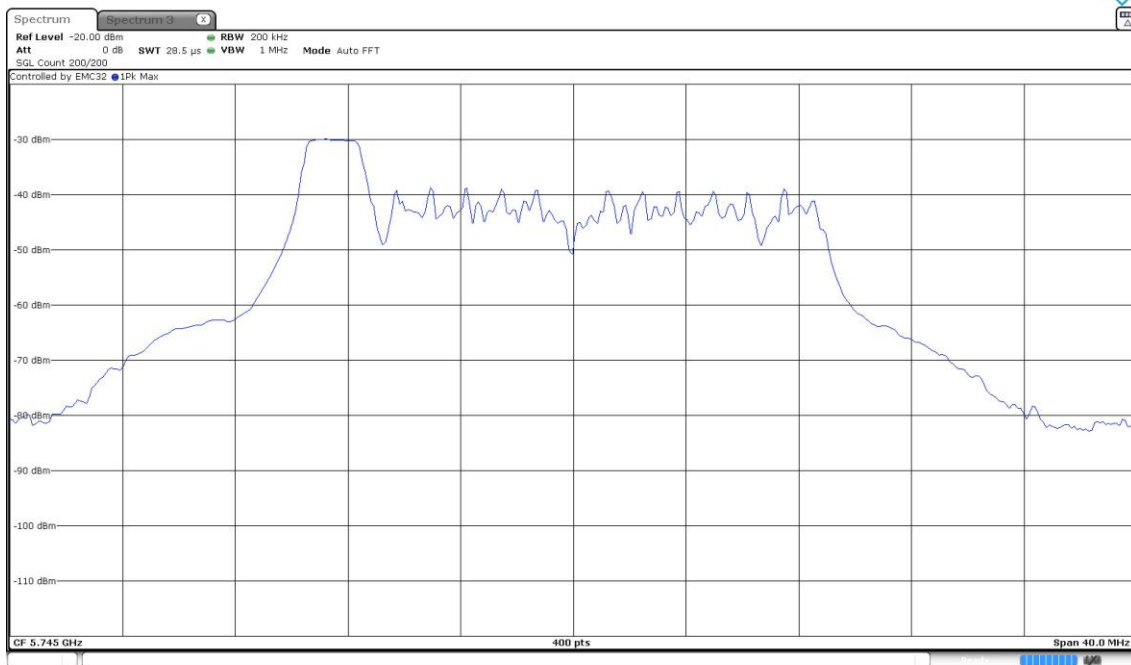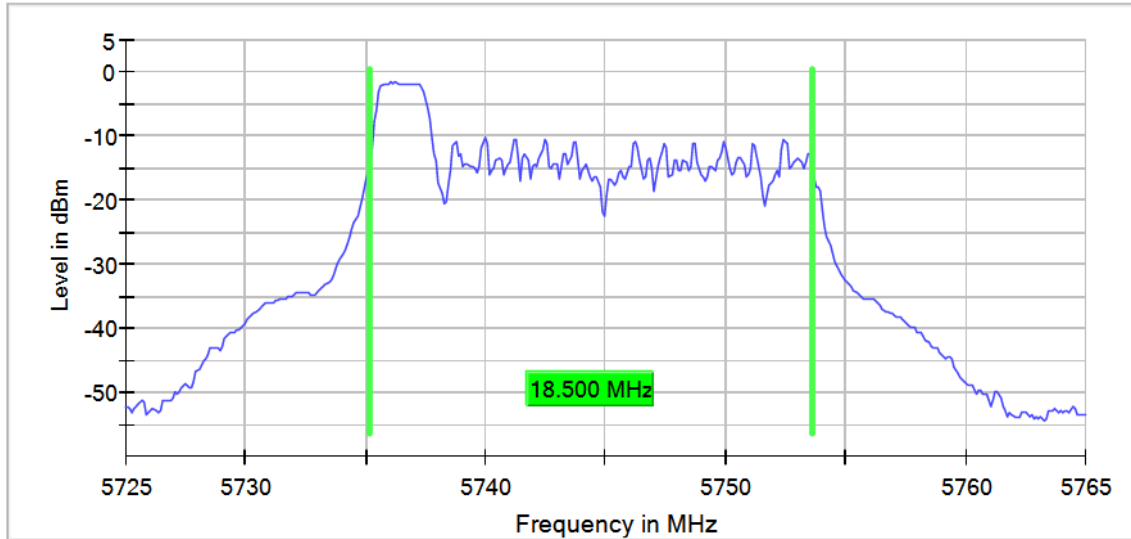

Operation Band MHz = [5725, 5850]

Active Port = 2+3



Frequency MHz = 5745.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

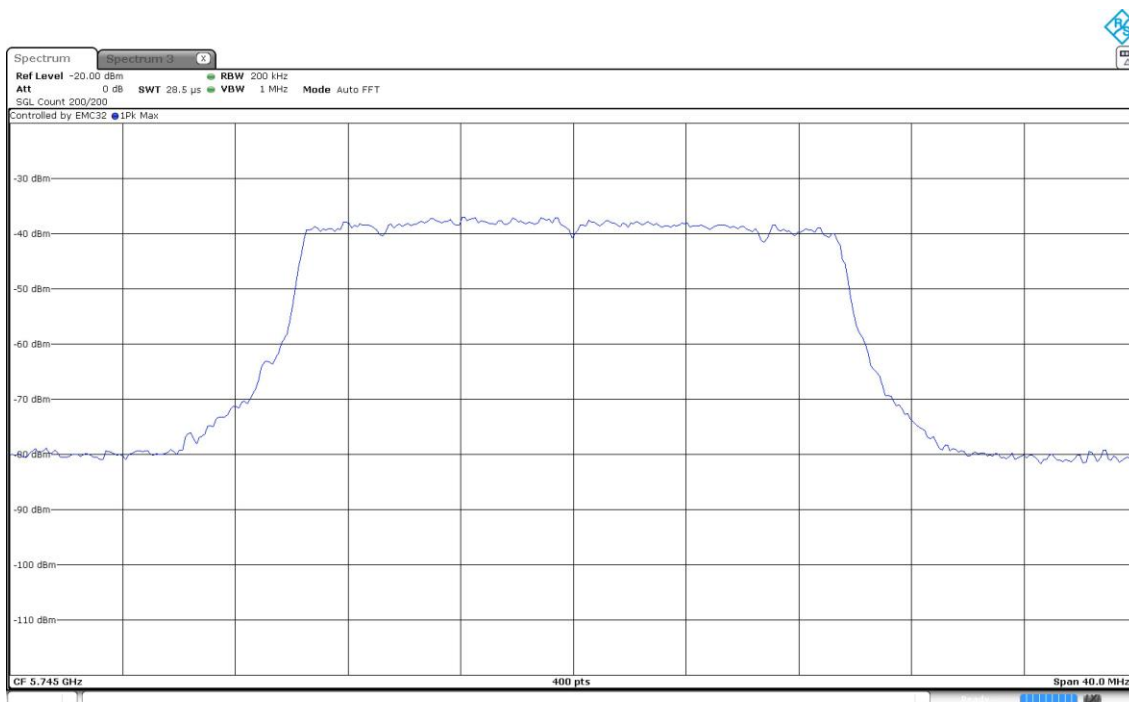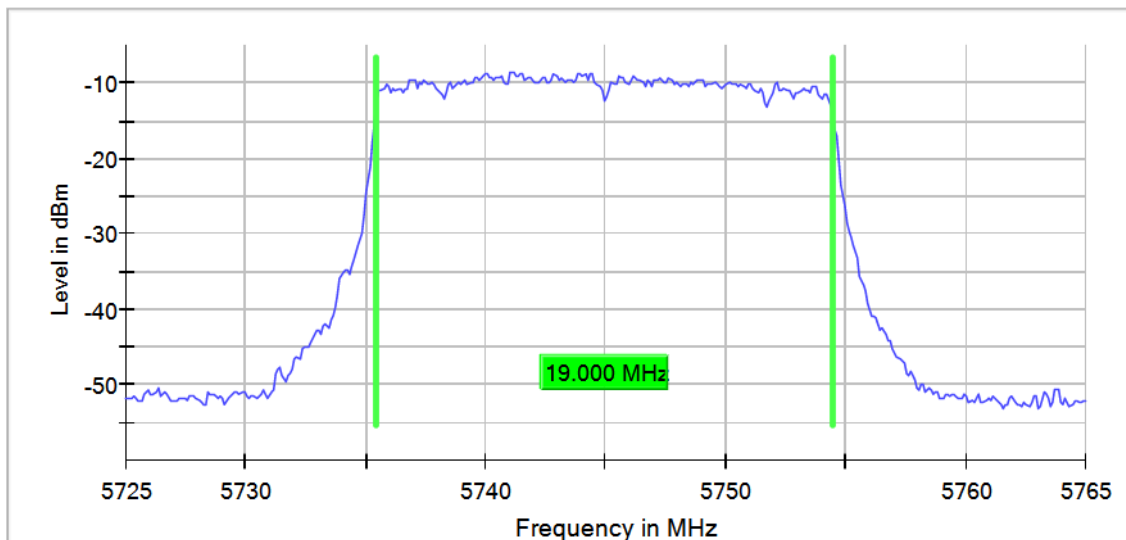

Operation Band MHz = [5725, 5850]

Active Port = 2+3



Frequency MHz = 5785.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

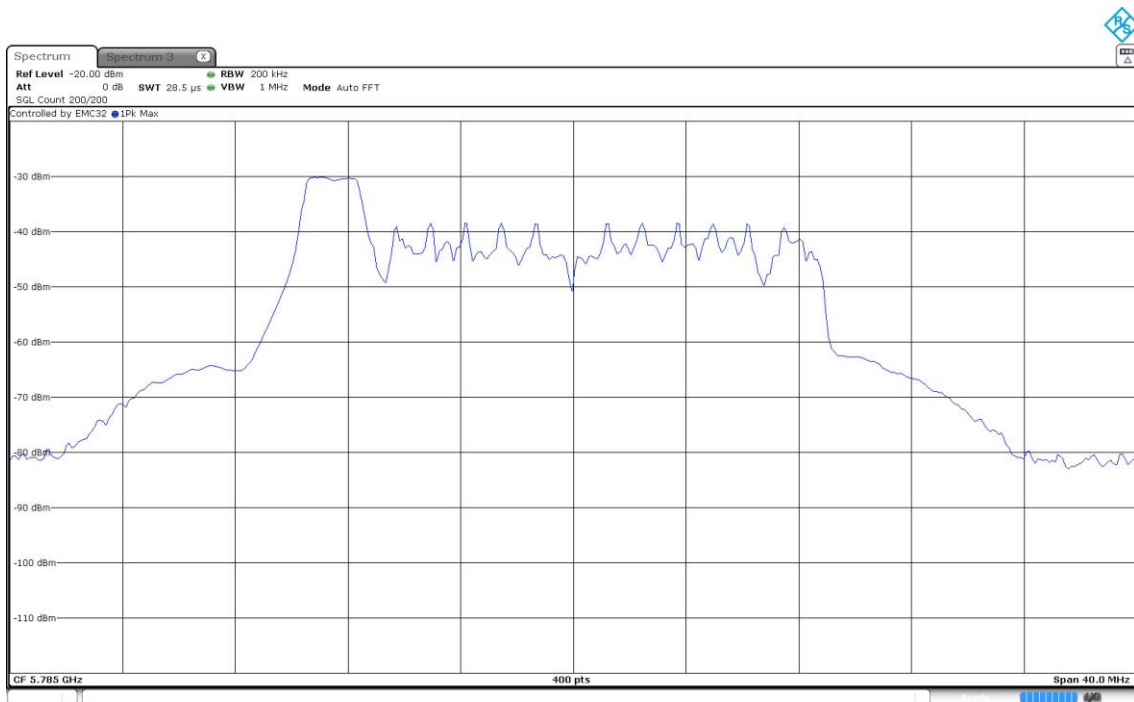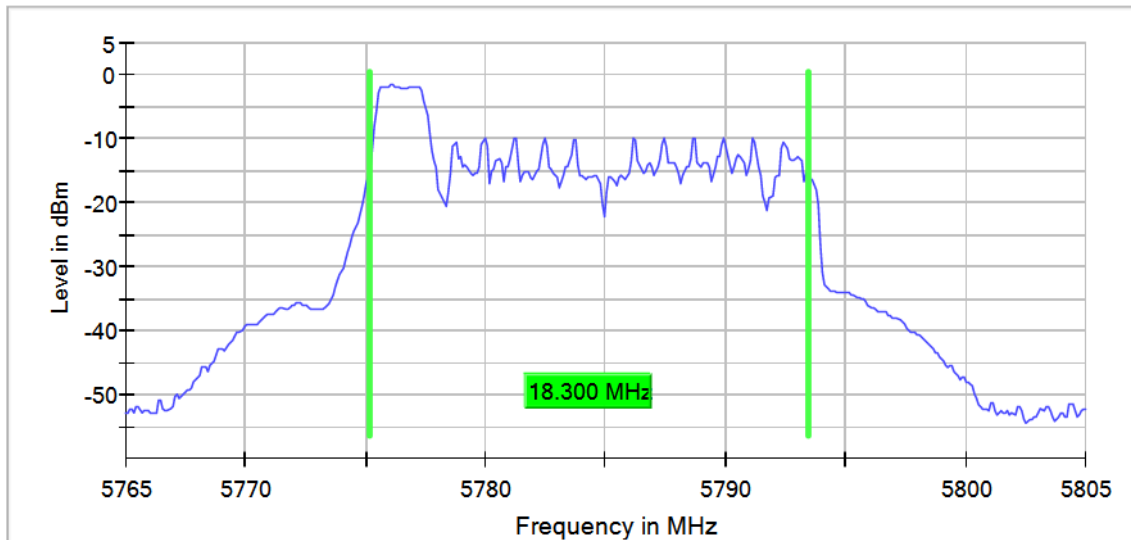

Operation Band MHz = [5725, 5850]

Active Port = 2+3



Frequency MHz = 5825.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

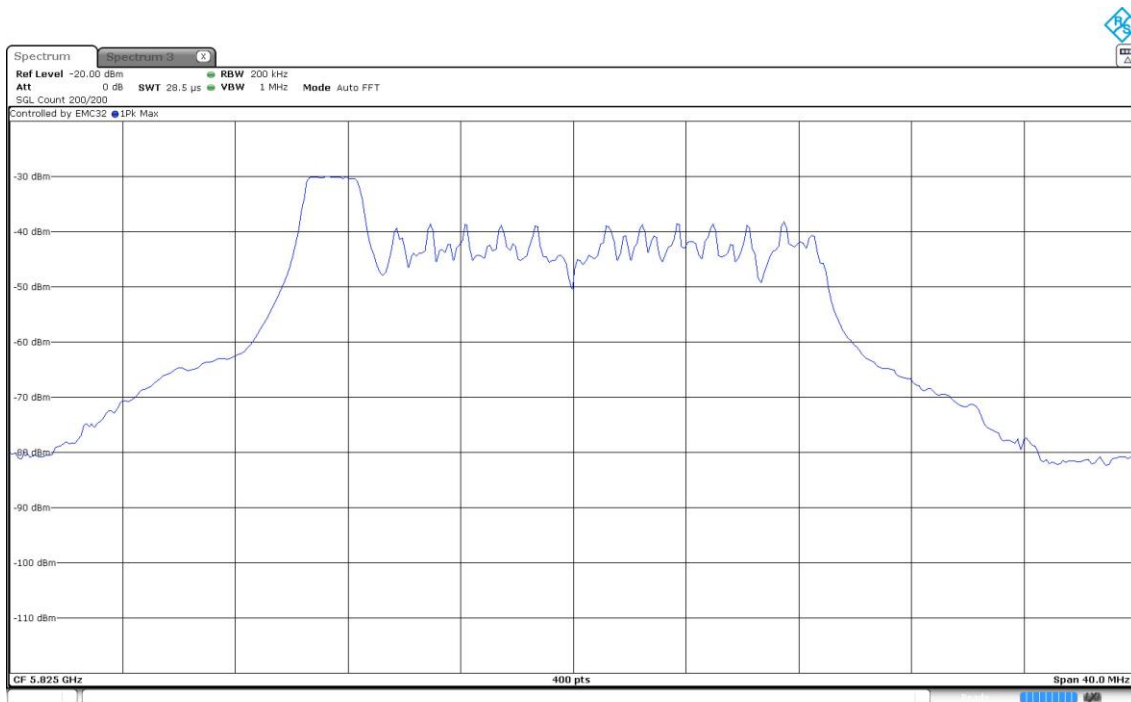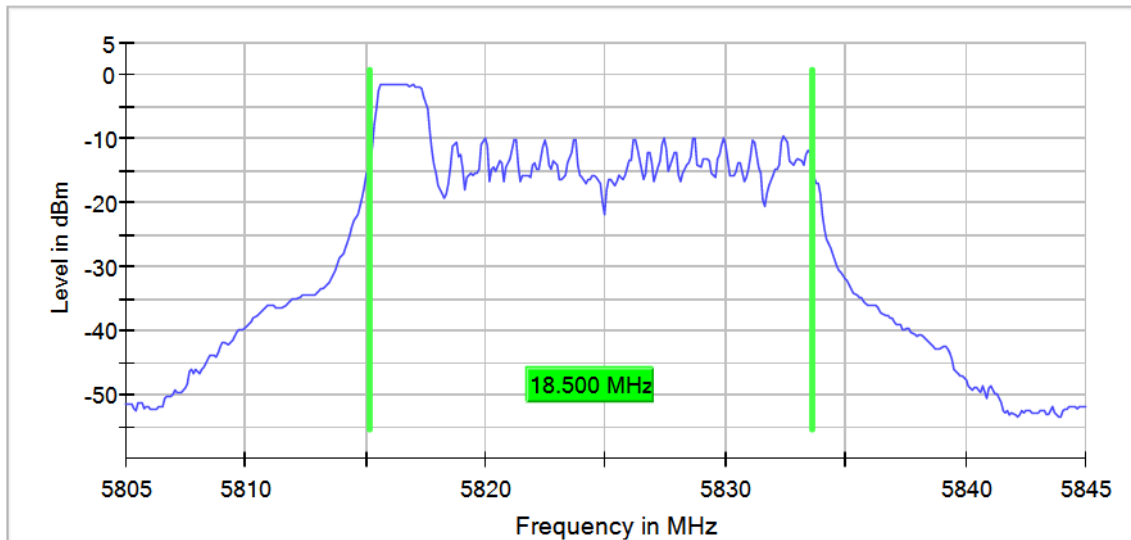

Operation Band MHz = [5725, 5850]

Active Port = 2+3



Frequency MHz = 5825.00000

Modulation = 802.11ax HE20 (OFDMA MCS0)

Antenna configuration = MIMO CDD Mode 2x2

Images:

99 % Bandwidth

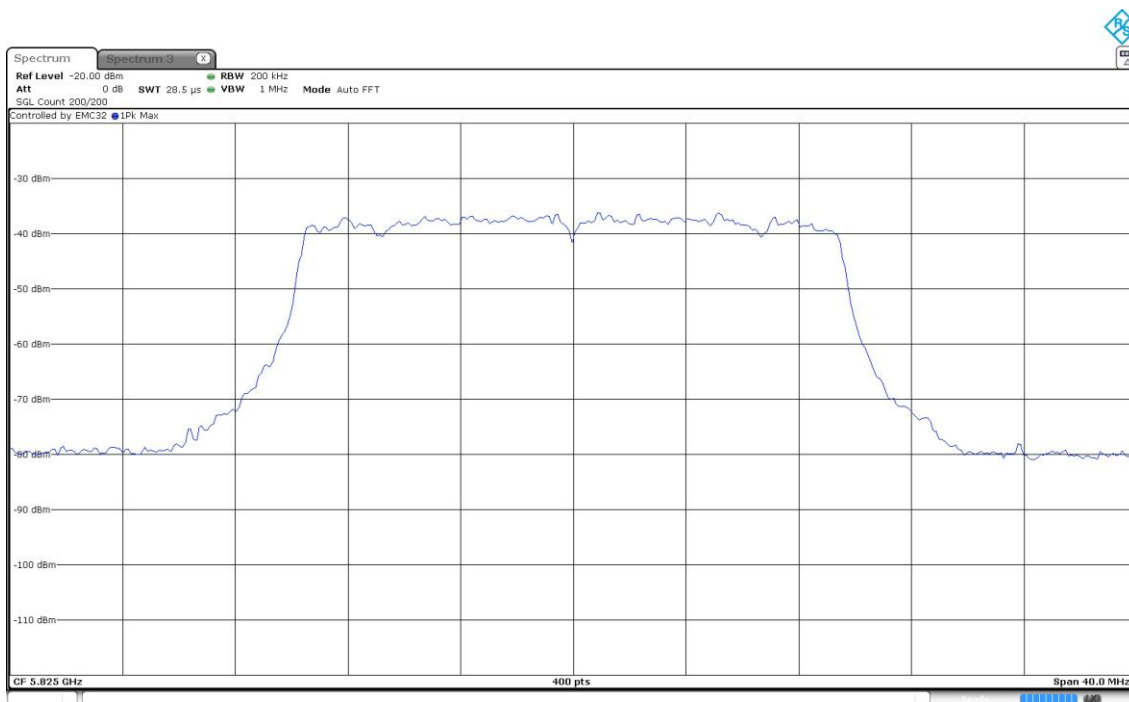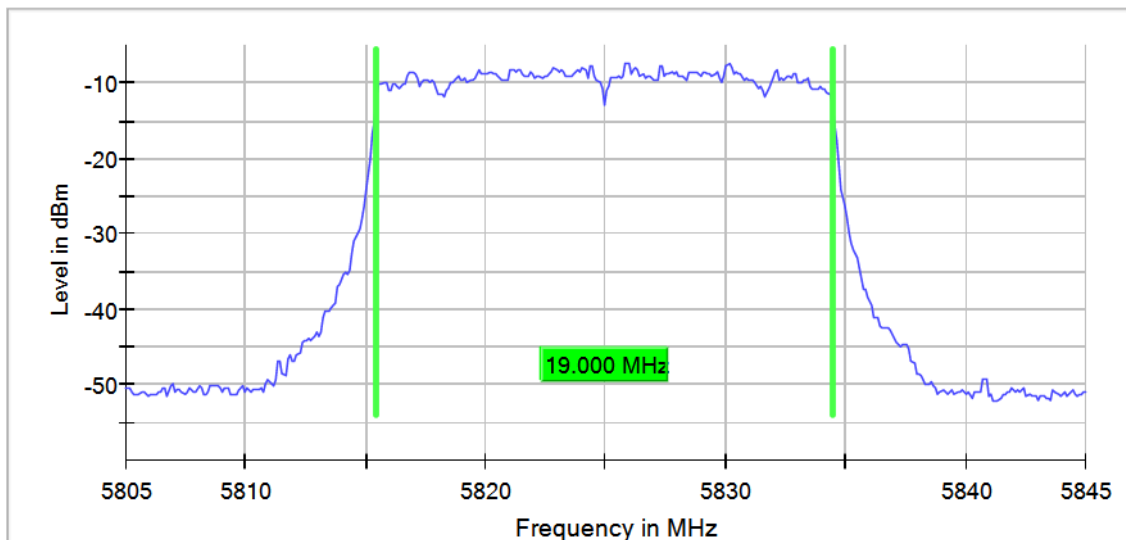

Modulation: 802.11ax HE40 (OFDMA MCS0)

Results

Operation Band (MHz)	Port	Freq (MHz)	Antenna configuration	Subcarrier Mode	Occ Ch BW (MHz)
[5725, 5850]	2+3	5755.00000	MIMO CDD Mode 2x2	RU	38.000
[5725, 5850]	2+3	5755.00000	MIMO CDD Mode 2x2	SU	37.750
[5725, 5850]	2+3	5795.00000	MIMO CDD Mode 2x2	RU	38.250
[5725, 5850]	2+3	5795.00000	MIMO CDD Mode 2x2	SU	37.750

Verdict

Pass