




Left earphone
Hopping On
GFSK
CH Low (2.31GHz ~2.5GHz)

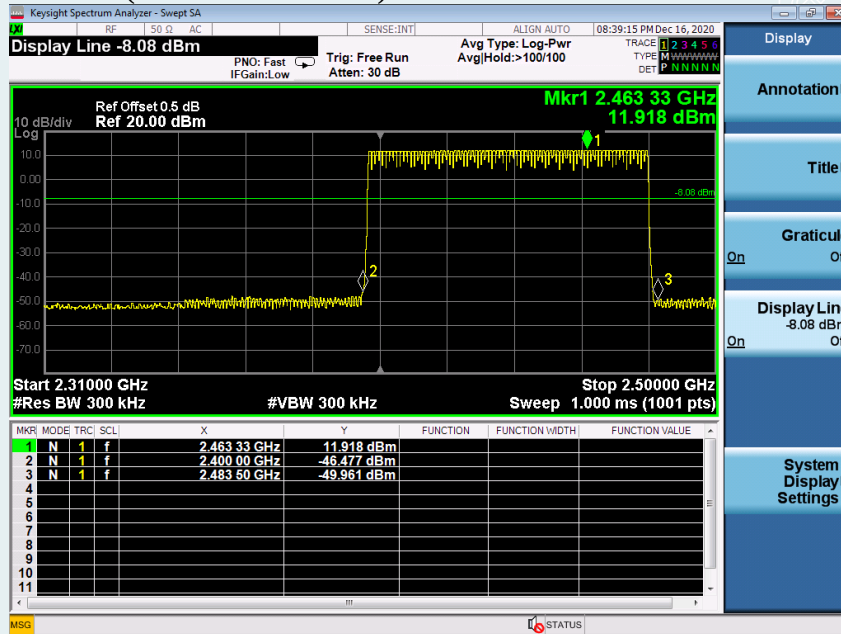


$\pi/4$ -DQPSK
CH Low (2.31GHz ~2.5GHz)

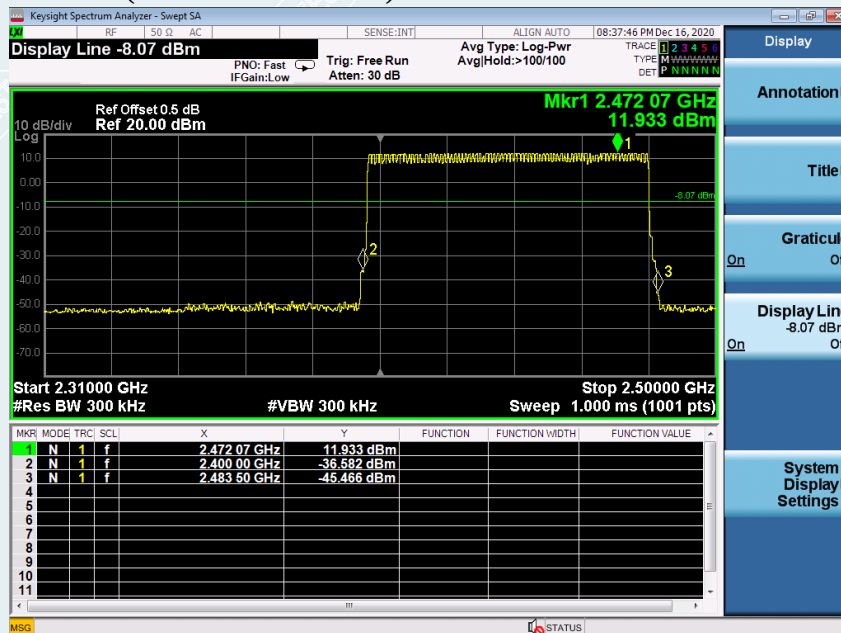


8DPSK CH Low (2.31GHz ~2.5GHz)

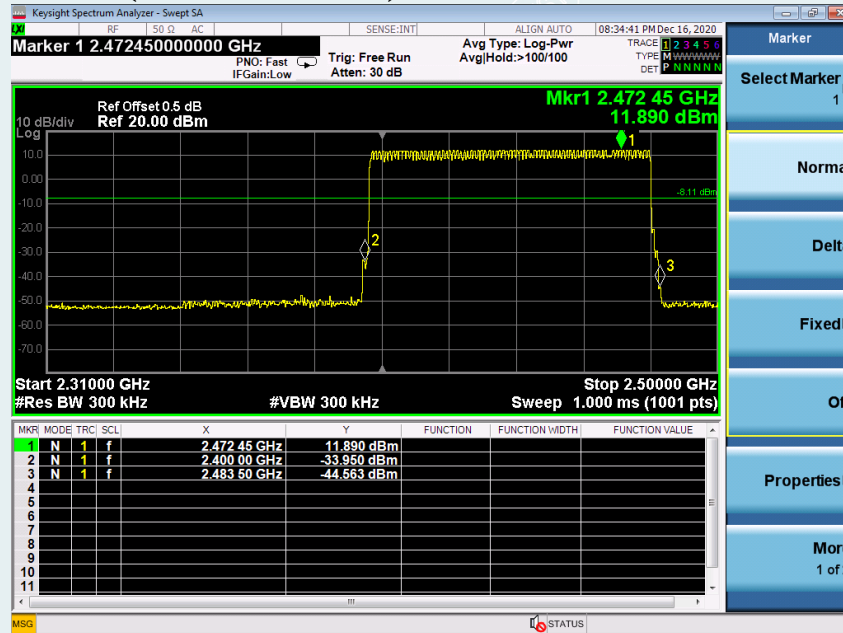


Right earphone
Hopping On
GFSK
CH Low (2.31GHz ~2.5GHz)

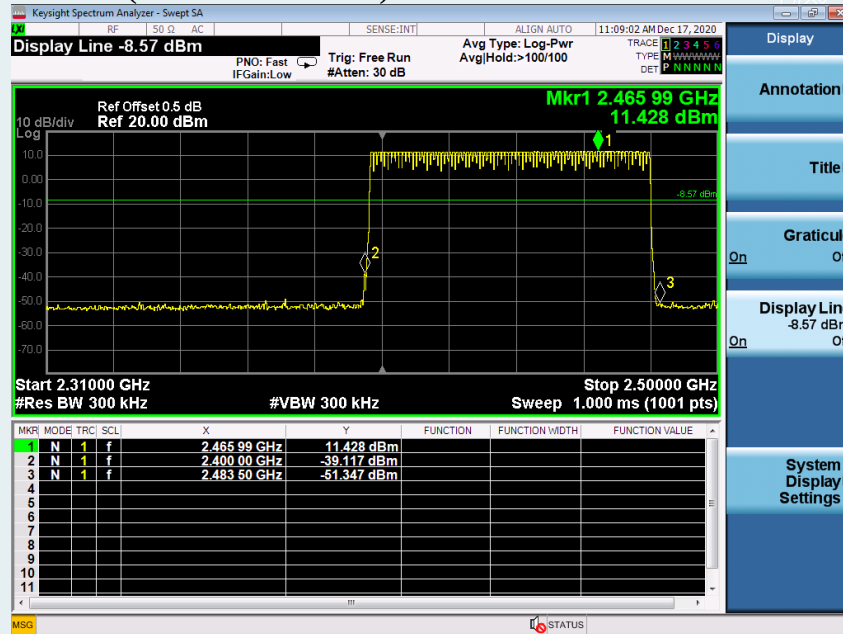

$\pi/4$ -DQPSK
CH Low (2.31GHz ~2.5GHz)

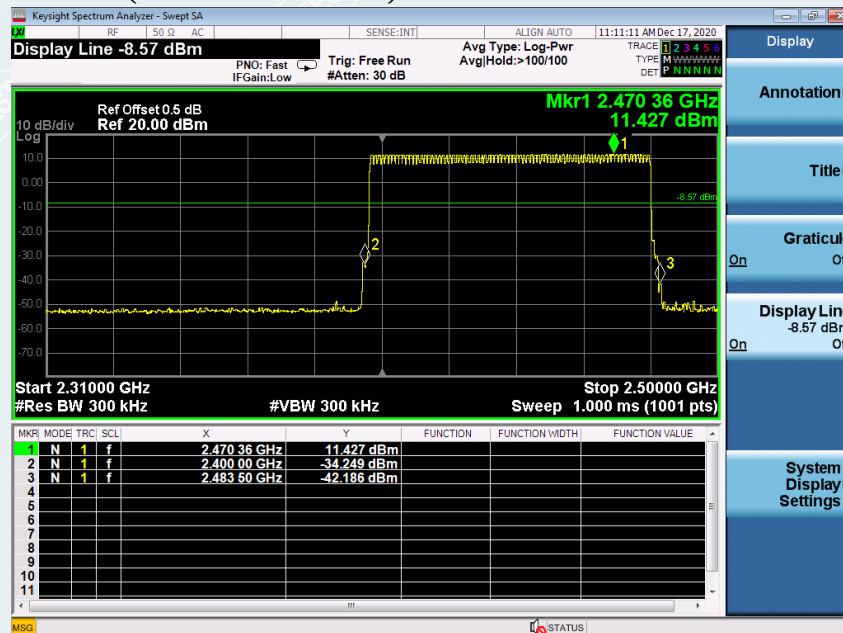

8DPSK CH Low (2.31GHz ~2.5GHz)

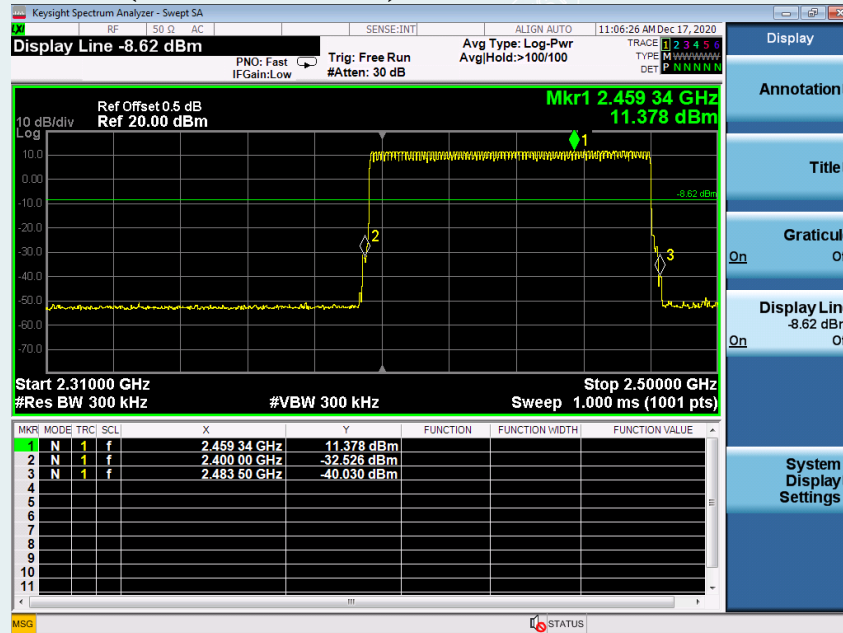

5.8. RADIATED SPURIOUS EMISSIONS

5.8.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak($\text{dB}\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	53.8~88.5
0.490-1.705	24000/F(kHz)	30	43~53.8
1.705-30.0	30	30	49.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

NOTE: (2) Above 18G Limit= $74+20\log(3/1)=83.54$ ($\text{dB}\mu\text{V/m}$).

5.8.2. TEST PROCEDURES

- 1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.
Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.8.3. TEST SETUP

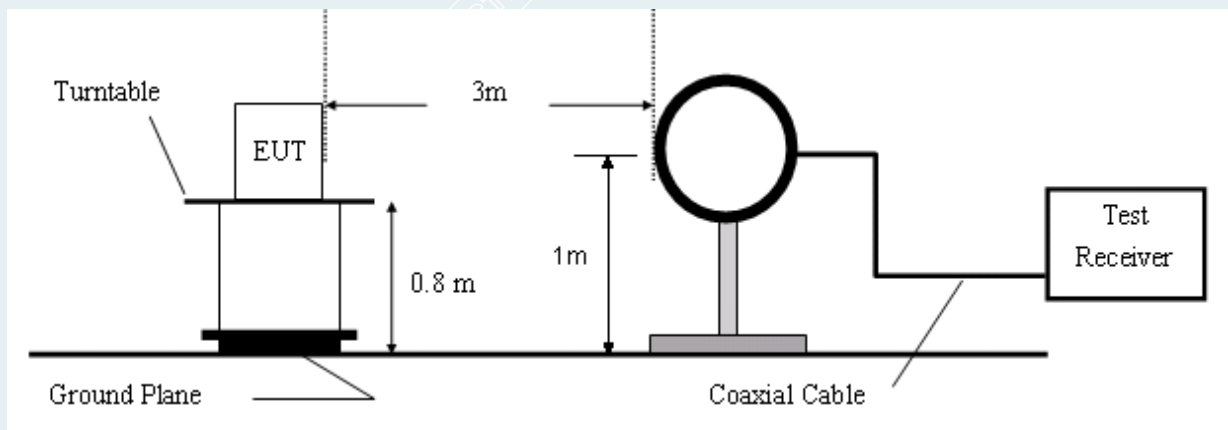


Figure 1. 9 KHz to 30MHz radiated emissions test configuration

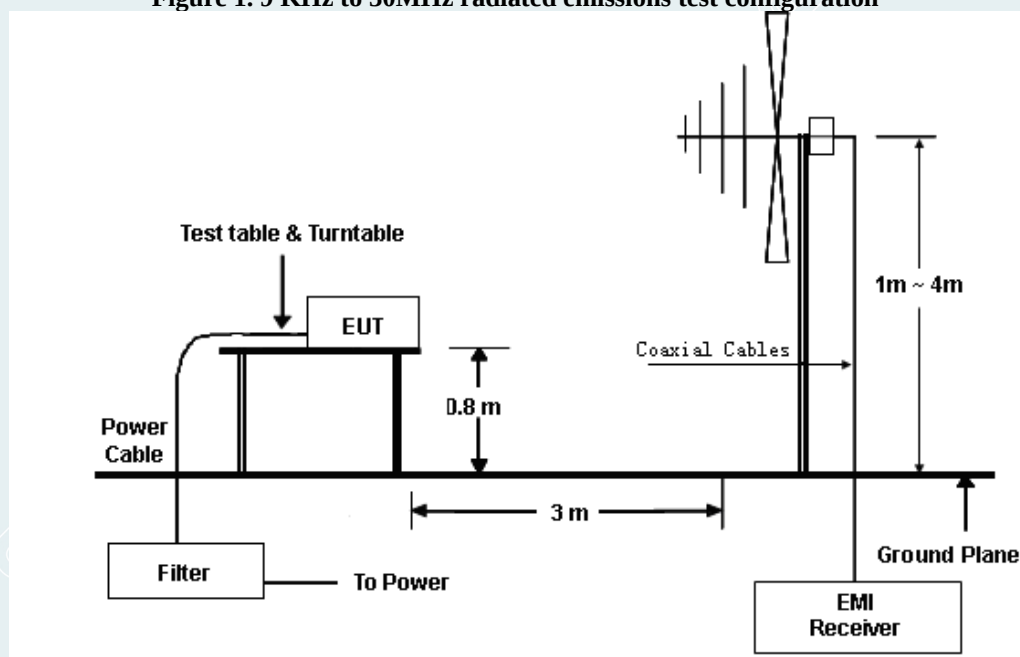


Figure 2. 30MHz to 1GHz radiated emissions test configuration

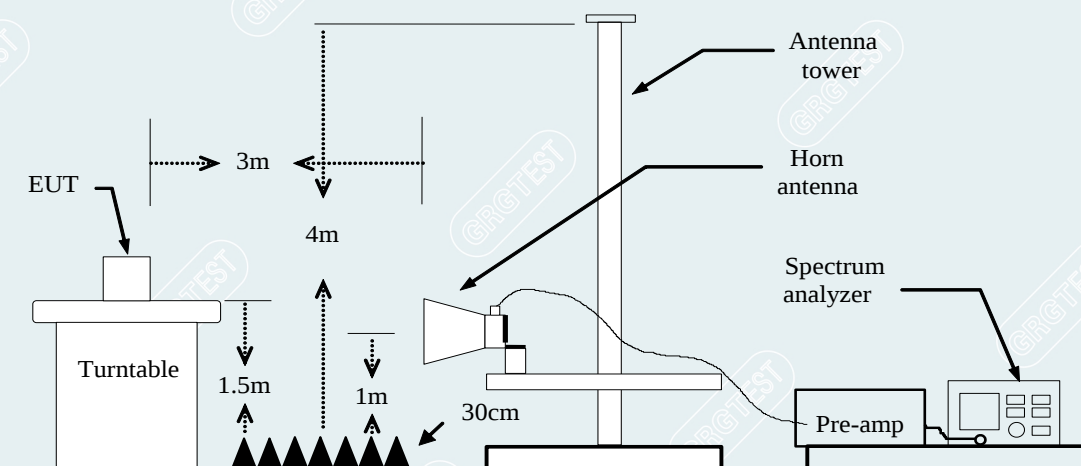


Figure 3. Above 1GHz radiated emissions test configuration

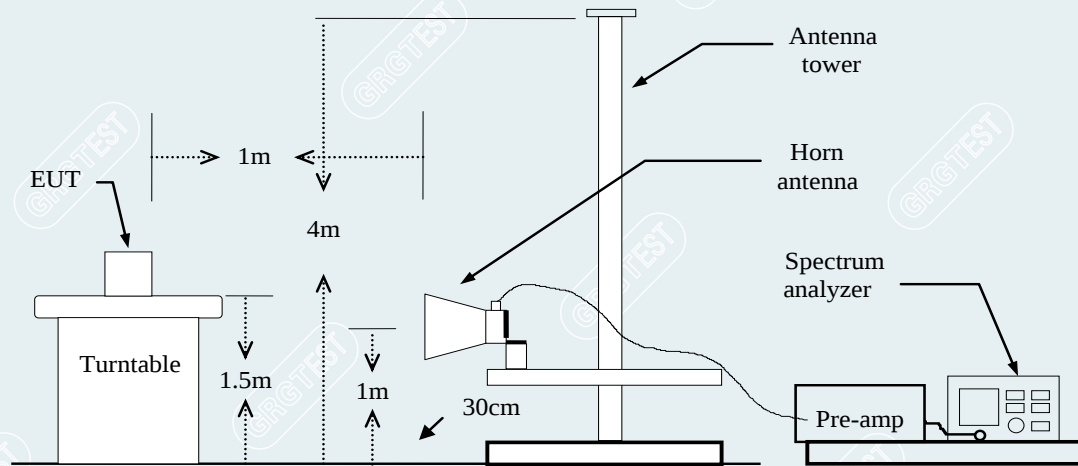


Figure 4. Above 18GHz radiated emissions test configuration

5.8.4. DATA SAMPLE

30MHz to 1GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

Above 1 GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Frequency (MHz)

= Emission frequency in MHz

Ant.Pol. (H/V)

= Antenna polarization

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Remark Result (dBuV/m) – Limit (dBuV/m)

Peak

= Peak Reading

QP

= Quasi-peak Reading

AVG

= Average Reading

5.8.5. TEST RESULTS

30MHz to 1GHz


Left earphone

Mode: TX

Date: 2020/12/30

Polarity

Vertical

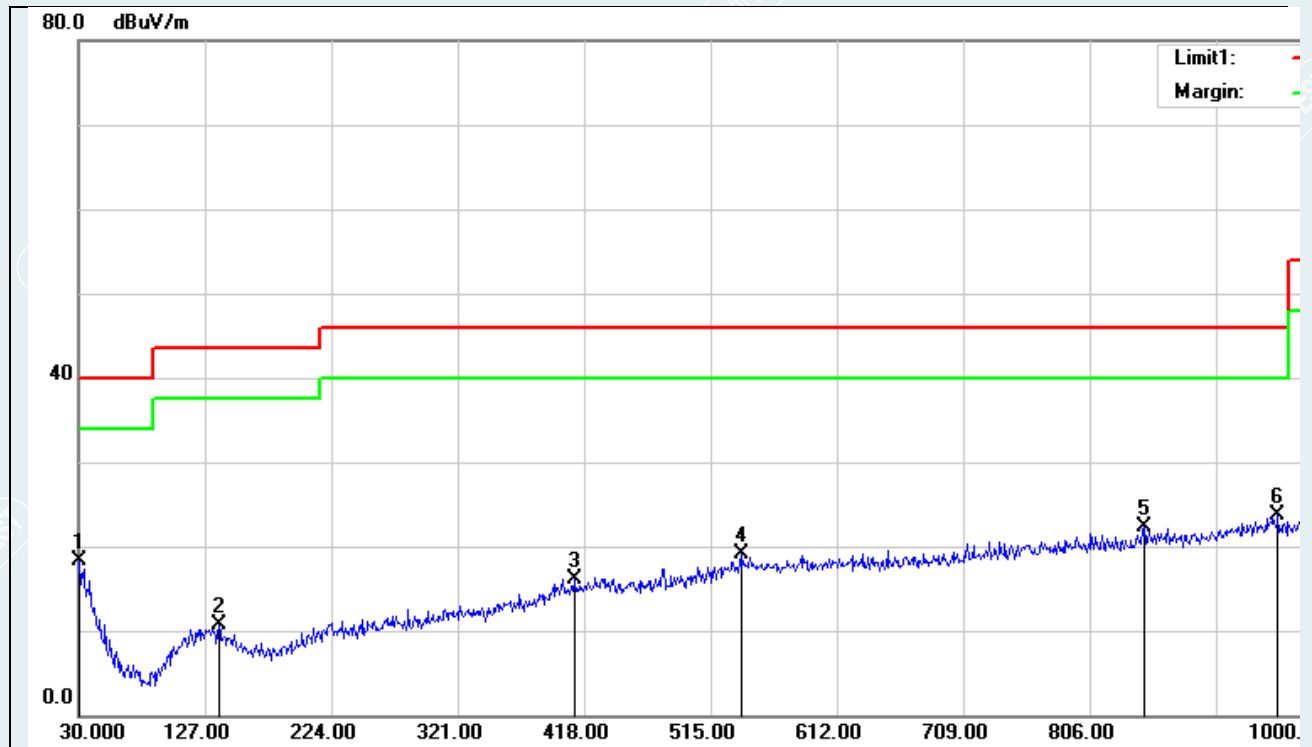


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.9700	35.70	-17.43	18.27	40.00	-21.73	299	358	QP
2	137.6700	36.85	-26.23	10.62	43.50	-32.88	299	0	QP
3	410.2400	36.79	-20.76	16.03	46.00	-29.97	299	75	QP
4	538.2800	37.16	-18.08	19.08	46.00	-26.92	299	357	QP
5	847.7100	37.25	-14.97	22.28	46.00	-23.72	397	0	QP
6	950.5300	37.97	-14.29	23.68	46.00	-22.32	226	0	QP

Mode: TX

Date: 2020/12/30

Polarity

Horizontal

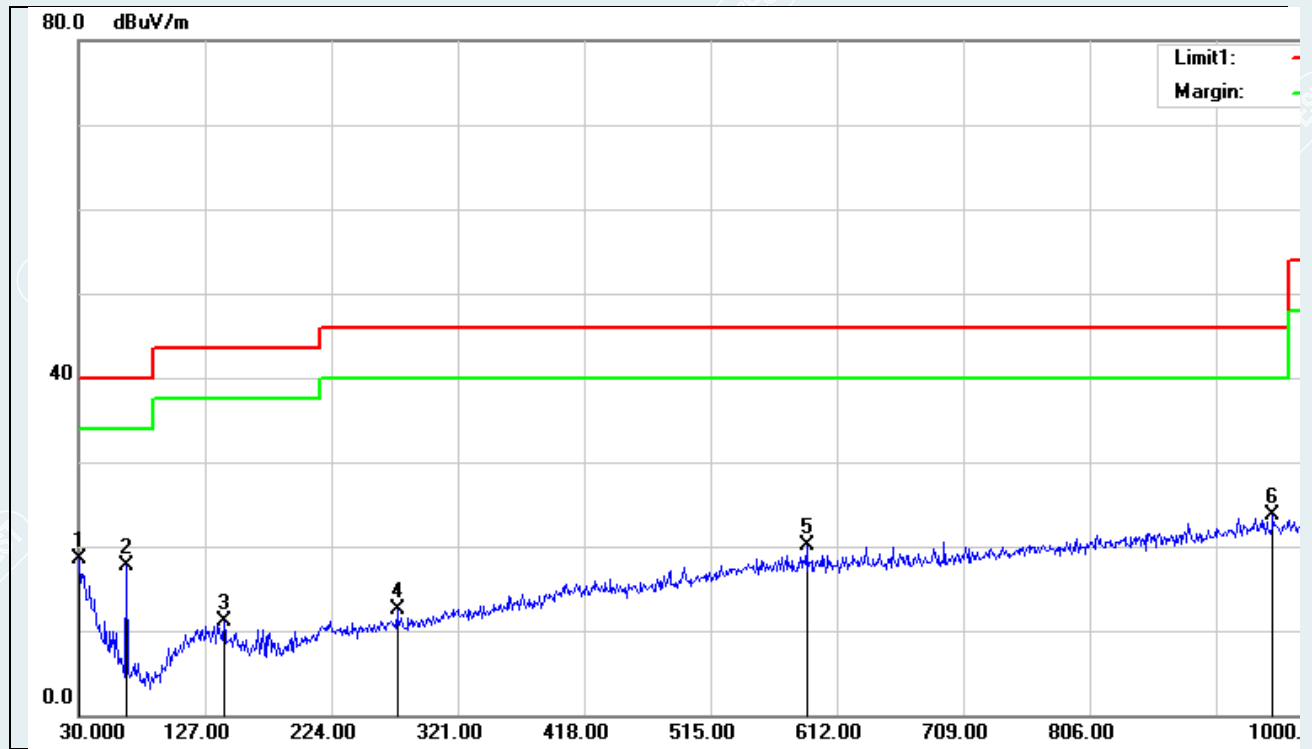

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.54	-16.96	18.58	40.00	-21.42	158	360	QP
2	66.8600	47.90	-30.28	17.62	40.00	-22.38	100	330	QP
3	141.5500	37.55	-26.42	11.13	43.50	-32.37	301	360	QP
4	274.4400	37.37	-24.87	12.50	46.00	-33.50	199	189	QP
5	588.7200	37.78	-17.61	20.17	46.00	-25.83	199	101	QP
6	946.6500	37.98	-14.34	23.64	46.00	-22.36	397	79	QP


Right earphone

Mode: TX

Polarity

Date: 2020/12/30

Vertical

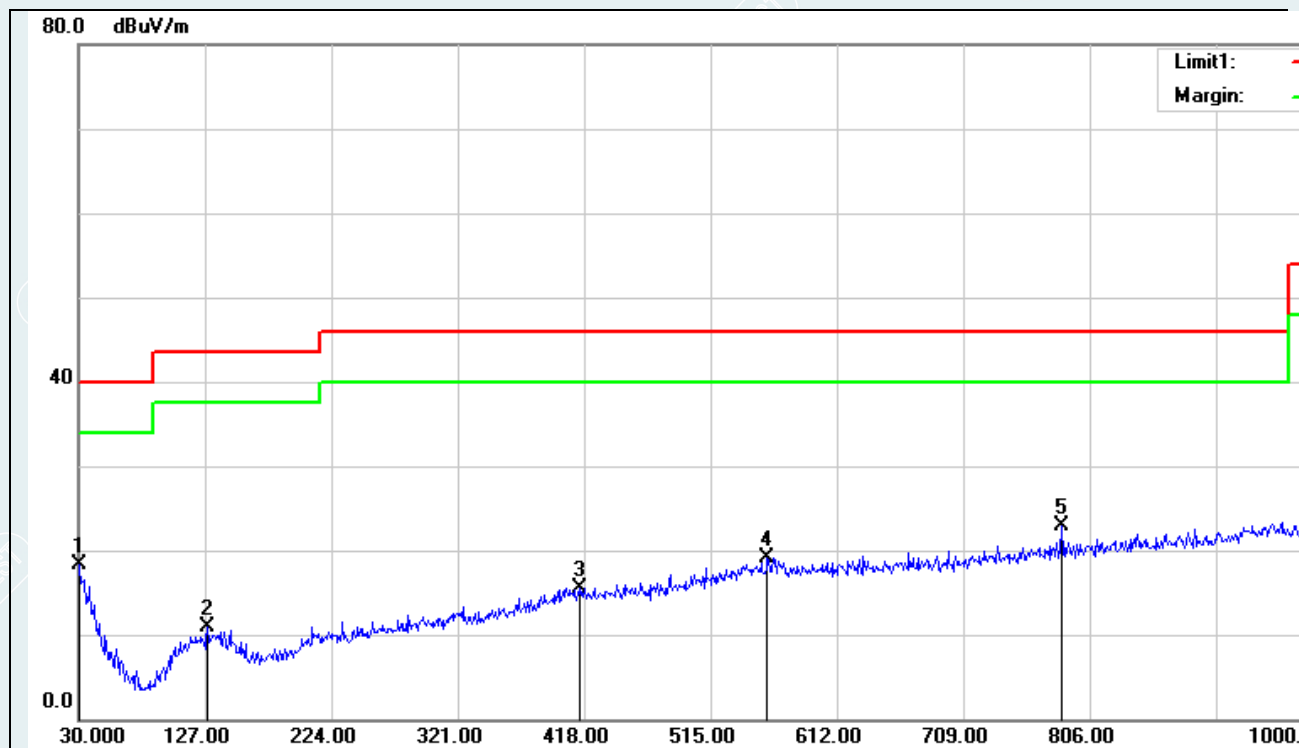


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1*	30.0000	35.23	-16.96	18.27	40.00	-21.73	101	360	QP
2	128.9400	36.89	-25.98	10.91	43.50	-32.59	199	30	QP
3	415.0900	36.26	-20.73	15.53	46.00	-30.47	199	124	QP
4	558.6500	36.75	-17.67	19.08	46.00	-26.92	299	354	QP
5	784.6600	38.55	-15.72	22.83	46.00	-23.17	199	16	QP
6	977.6900	37.85	-14.22	23.63	54.00	-30.37	299	68	QP

Mode: TX

Polarity

Date: 2020/12/30

Horizontal

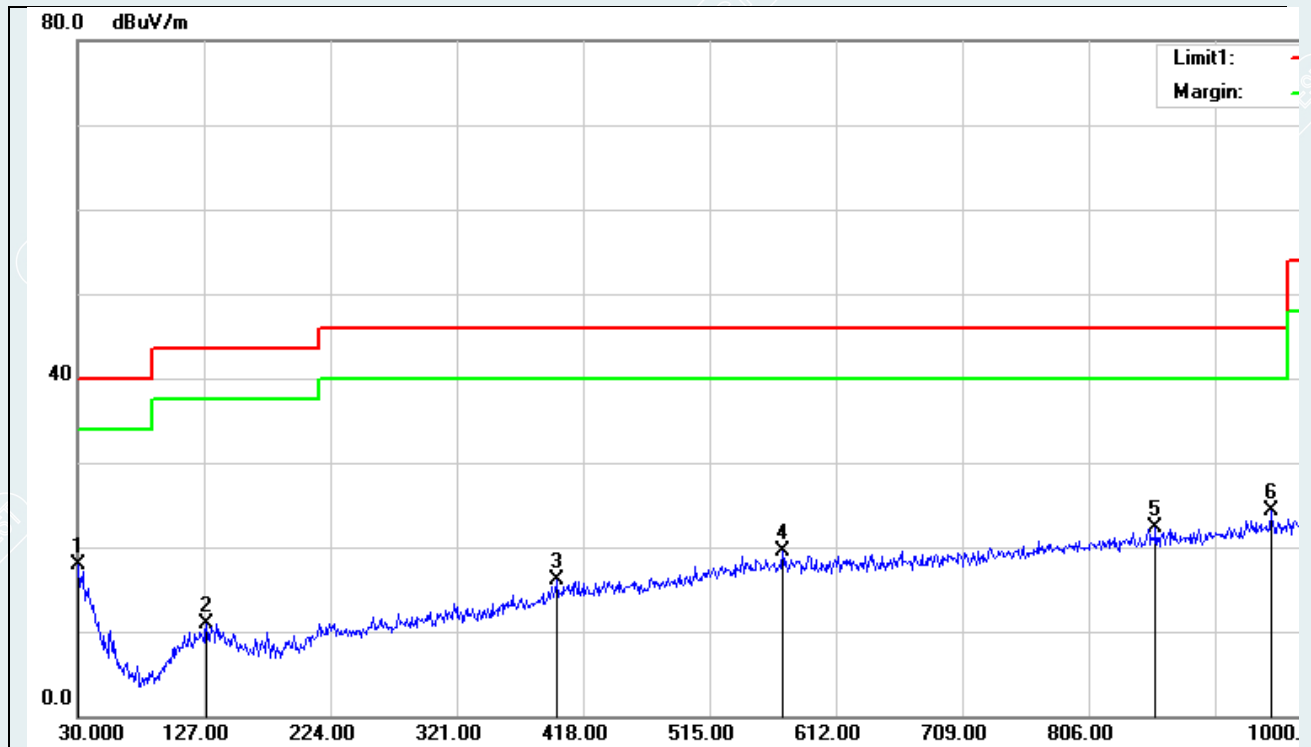

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg)	Remark
1	30.0000	34.90	-16.96	17.94	40.00	-22.06	397	263	QP
2	128.9400	36.88	-25.98	10.90	43.50	-32.60	299	4	QP
3	397.6300	36.99	-20.98	16.01	46.00	-29.99	100	89	QP
4	571.2600	37.21	-17.64	19.57	46.00	-26.43	200	358	QP
5	857.4100	37.27	-14.95	22.32	46.00	-23.68	301	360	QP
6*	945.6800	38.65	-14.35	24.30	46.00	-21.70	100	328	QP

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Pre-scan all mode and recorded the worst case results in this report (TX-High Channel(1Mbps))
- 3 Measuring frequencies from 9kHz to the 1GHz.
- 4 Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
- 5 Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 6 The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.

Above 1GHz-18GHz:**Left earphone**

Mode: TX/ DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1399.5400	64.11	40.46	-23.65	74.00	33.54	150	27	Horizontal
2	2026.9027	64.20	42.65	-21.55	74.00	31.35	150	130	Horizontal
3	3193.2193	58.92	41.22	-17.70	74.00	32.78	150	255	Horizontal
4	4803.2803	60.55	49.91	-10.64	74.00	24.09	150	255	Horizontal
5	11083.708	45.37	48.33	2.96	74.00	25.67	150	0	Horizontal
6	17831.683	41.91	51.21	9.30	74.00	22.79	150	197	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4803.2803	-10.64	150	255	Horizontal
2	17831.6832	9.30	150	197	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.2803	-10.64	56.77	46.13	54.00	7.87	150	255	Horizontal
2	17831.6832	9.30	36.87	46.17	54.00	7.83	150	197	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1295.8296	63.24	39.15	-24.09	74.00	34.85	150	224	Vertical
2	2530.1530	62.97	43.08	-19.89	74.00	30.92	150	142	Vertical
3	2683.1683	60.65	41.37	-19.28	74.00	32.63	150	156	Vertical
4	4803.2803	60.83	50.19	-10.64	74.00	23.81	150	268	Vertical
5	11095.6096	45.87	48.61	2.74	74.00	25.39	150	105	Vertical
6	17712.6713	41.68	51.24	9.56	74.00	22.76	150	105	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4803.2803	-10.64	150	268	Vertical
2	17712.6713	9.56	150	105	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4803.2803	-10.64	54.20	43.56	54.00	10.44	150	268	Vertical
2	17712.6713	9.56	37.01	46.57	54.00	7.43	150	105	Vertical

Mode: TX/ DH5

Middle channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1115.6116	65.84	41.00	-24.84	74.00	33.00	150	149	Horizontal
2	1746.3746	64.77	42.23	-22.54	74.00	31.77	150	127	Horizontal
3	4881.4881	54.49	44.27	-10.22	74.00	29.73	150	255	Horizontal
4	6758.4758	51.14	44.32	-6.82	74.00	29.68	150	22	Horizontal
5	11093.9094	45.61	48.38	2.77	74.00	25.62	150	255	Horizontal
6	14659.1659	44.08	51.41	7.33	74.00	22.59	150	255	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	14659.1659	7.33	150	255	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	14659.1659	7.33	35.68	43.01	54.00	10.99	150	255	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1197.2197	64.60	39.99	-24.61	74.00	34.01	150	105	Vertical
2	2321.0321	62.25	41.48	-20.77	74.00	32.52	150	121	Vertical
3	3908.9909	55.93	41.89	-14.04	74.00	32.11	150	105	Vertical
4	4990.2990	56.30	45.79	-10.51	74.00	28.21	150	144	Vertical
5	11090.5091	44.79	47.62	2.83	74.00	26.38	150	144	Vertical
6	17678.6679	41.56	51.54	9.98	74.00	22.46	150	113	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17678.6679	9.98	150	113	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17678.6679	9.98	37.31	47.29	54.00	6.71	150	113	Vertical

Mode: TX/ DH5
Highest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1074.8075	66.23	41.22	-25.01	74.00	32.78	150	73	Horizontal
2	2480.8481	62.80	42.43	-20.37	74.00	31.57	150	255	Horizontal
3	2669.5670	59.92	40.60	-19.32	74.00	33.40	150	255	Horizontal
4	4959.6960	58.89	47.91	-10.98	74.00	26.09	150	255	Horizontal
5	9086.0086	49.58	47.84	-1.74	74.00	26.16	150	255	Horizontal
6	17712.6713	42.39	51.95	9.56	74.00	22.05	150	111	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17712.6713	9.56	150	111	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17712.6713	9.56	36.87	46.43	54.00	7.57	150	111	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1195.5196	65.86	41.25	-24.61	74.00	32.75	150	210	Vertical
2	2329.5330	64.05	43.20	-20.85	74.00	30.80	150	128	Vertical
3	3823.9824	54.30	39.96	-14.34	74.00	34.04	150	105	Vertical
4	4959.6960	61.00	50.02	-10.98	74.00	23.98	150	263	Vertical
5	10486.9487	45.85	47.90	2.05	74.00	26.10	150	105	Vertical
6	17707.5708	42.06	51.63	9.57	74.00	22.37	150	105	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	150	263	Vertical
2	17707.5708	9.57	150	105	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	57.63	46.65	54.00	7.35	150	263	Vertical
2	17707.5708	9.57	36.46	46.03	54.00	7.97	150	105	Vertical

Mode: TX/ 3DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1397.8398	64.85	41.19	-23.66	74.00	32.81	150	130	Horizontal
2	1997.9998	65.20	43.63	-21.57	74.00	30.37	150	107	Horizontal
3	2625.3625	64.11	44.37	-19.74	74.00	29.63	150	144	Horizontal
4	4803.2803	58.38	47.74	-10.64	74.00	26.26	150	255	Horizontal
5	10986.7987	45.57	47.81	2.24	74.00	26.19	150	188	Horizontal
6	17673.5674	41.47	51.55	10.08	74.00	22.45	150	56	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17673.5674	10.08	150	56	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17673.567	10.08	36.47	46.55	54.00	7.45	150	56	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1079.9080	64.89	39.90	-24.99	74.00	34.10	150	105	Vertical
2	2176.5177	64.90	43.55	-21.35	74.00	30.45	150	105	Vertical
3	3847.7848	53.83	39.71	-14.12	74.00	34.29	150	240	Vertical
4	4803.2803	58.17	47.53	-10.64	74.00	26.47	150	248	Vertical
5	11000.4000	46.01	48.08	2.07	74.00	25.92	150	315	Vertical
6	17675.2675	41.04	51.09	10.05	74.00	22.91	150	105	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17675.2675	10.05	150	105	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17675.2675	10.05	36.08	46.13	54.00	7.87	150	105	Vertical

Mode: TX/ 3DH5
Middle channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1394.4394	64.72	41.04	-23.68	74.00	32.96	150	61	Horizontal
2	2304.0304	62.48	41.88	-20.60	74.00	32.12	150	137	Horizontal
3	2739.2739	59.39	40.03	-19.36	74.00	33.97	150	255	Horizontal
4	4883.1883	58.83	48.61	-10.22	74.00	25.39	150	255	Horizontal
5	10500.5501	46.45	48.69	2.24	74.00	25.31	150	210	Horizontal
6	17969.3969	42.10	51.31	9.21	74.00	22.69	150	203	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4883.1883	-10.22	150	255	Horizontal
2	17969.3969	9.21	150	203	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4883.1883	-10.22	45.31	35.09	54.00	18.91	150	255	Horizontal
2	17969.3969	9.21	37.33	46.54	54.00	7.46	150	203	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1394.4394	65.06	41.38	-23.68	74.00	32.62	150	178	Vertical
2	2292.1292	63.05	42.44	-20.61	74.00	31.56	150	224	Vertical
3	3931.0931	54.28	40.38	-13.90	74.00	33.62	150	246	Vertical
4	4883.1883	61.22	51.00	-10.22	74.00	23.00	150	268	Vertical
5	10492.0492	45.68	47.80	2.12	74.00	26.20	150	261	Vertical
6	17977.8978	42.54	51.66	9.12	74.00	22.34	150	112	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4883.1883	-10.22	150	268	Vertical
2	17977.8978	9.12	150	112	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4883.1883	-10.22	48.32	38.10	54.00	15.90	150	268	Vertical
2	17977.8978	9.12	36.87	45.99	54.00	8.01	150	112	Vertical

Mode: TX/ 3DH5

Highest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1231.2231	65.55	41.16	-24.39	74.00	32.84	150	152	Horizontal
2	2480.8481	62.70	42.33	-20.37	74.00	31.67	150	0	Horizontal
3	2630.4630	62.77	43.10	-19.67	74.00	30.90	150	255	Horizontal
4	4959.6960	61.19	50.21	-10.98	74.00	23.79	150	255	Horizontal
5	10668.8669	45.79	47.57	1.78	74.00	26.43	150	40	Horizontal
6	17331.8332	43.47	52.22	8.75	74.00	21.78	150	85	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	150	255	Horizontal
2	17331.8332	8.75	150	85	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	44.12	33.14	54.00	20.86	150	255	Horizontal
2	17331.8332	8.75	36.59	45.34	54.00	8.66	150	85	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1195.5196	65.23	40.62	-24.61	74.00	33.38	150	201	Vertical
2	2366.9367	63.67	42.79	-20.88	74.00	31.21	150	201	Vertical
3	2793.6794	60.65	41.32	-19.33	74.00	32.68	150	142	Vertical
4	4959.6960	60.42	49.44	-10.98	74.00	24.56	150	261	Vertical
5	10889.8890	45.38	48.01	2.63	74.00	25.99	150	105	Vertical
6	17682.0682	41.24	51.16	9.92	74.00	22.84	150	165	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	150	261	Vertical
2	17682.0682	9.92	150	165	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4959.6960	-10.98	42.13	31.15	54.00	22.85	150	261	Vertical
2	17682.0682	9.92	37.13	47.05	54.00	6.95	150	165	Vertical

Right earphone

Mode: TX/ DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1139.4139	64.47	39.76	-24.71	74.00	34.24	150	152	Horizontal
2	2300.6301	60.96	40.39	-20.57	74.00	33.61	150	137	Horizontal
3	2798.7799	60.20	40.88	-19.32	74.00	33.12	150	255	Horizontal
4	6486.4486	51.11	43.51	-7.60	74.00	30.49	150	255	Horizontal
5	10905.1905	45.48	48.12	2.64	74.00	25.88	150	255	Horizontal
6	17682.0682	41.92	51.84	9.92	74.00	22.16	150	115	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1351.9352	63.82	39.95	-23.87	74.00	34.05	150	180	Vertical
2	2368.6369	62.40	41.54	-20.86	74.00	32.46	150	127	Vertical
3	3840.9841	53.97	39.79	-14.18	74.00	34.21	150	202	Vertical
4	4990.2990	56.90	46.39	-10.51	74.00	27.61	150	142	Vertical
5	10850.7851	46.11	48.73	2.62	74.00	25.27	150	283	Vertical
6	17680.3680	41.53	51.48	9.95	74.00	22.52	150	105	Vertical

Mode: TX/ DH5
Middle channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1399.5400	63.64	39.99	-23.65	74.00	34.01	150	60	Horizontal
2	1861.9862	63.75	41.82	-21.93	74.00	32.18	150	135	Horizontal
3	2718.8719	61.68	42.39	-19.29	74.00	31.61	150	255	Horizontal
4	4881.4881	55.80	45.58	-10.22	74.00	28.42	150	166	Horizontal
5	10677.3677	46.16	48.11	1.95	74.00	25.89	150	143	Horizontal
6	17729.6730	42.41	51.92	9.51	74.00	22.08	150	173	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17729.6730	9.51	150	173	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17729.6730	9.51	36.84	46.35	54.00	7.65	150	173	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1345.1345	63.82	39.92	-23.90	74.00	34.08	150	212	Vertical
2	2387.3387	62.52	41.84	-20.68	74.00	32.16	150	197	Vertical
3	3188.1188	60.06	42.25	-17.81	74.00	31.75	150	212	Vertical
4	4985.1985	56.53	45.94	-10.59	74.00	28.06	150	143	Vertical
5	10886.4886	45.97	48.60	2.63	74.00	25.40	150	136	Vertical
6	14152.5153	44.06	51.39	7.33	74.00	22.61	150	257	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	14152.5153	7.33	150	257	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	14152.5153	7.33	37.34	44.67	54.00	9.33	150	257	Vertical

Mode: TX/ DH5
Highest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1117.3117	67.52	42.69	-24.83	74.00	31.31	150	165	Horizontal
2	2596.4596	63.46	43.37	-20.09	74.00	30.63	150	150	Horizontal
3	2678.0678	59.95	40.66	-19.29	74.00	33.34	150	219	Horizontal
4	6551.0551	50.85	44.26	-6.59	74.00	29.74	150	255	Horizontal
5	11093.9094	45.70	48.47	2.77	74.00	25.53	150	3	Horizontal
6	17950.6951	41.70	51.12	9.42	74.00	22.88	150	75	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17950.6951	9.42	150	75	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17950.6951	9.42	36.98	46.40	54.00	7.60	150	75	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1401.2401	64.17	40.53	-23.64	74.00	33.47	150	179	Vertical
2	2008.2008	64.44	42.89	-21.55	74.00	31.11	150	164	Vertical
3	2725.6726	60.19	40.87	-19.32	74.00	33.13	150	172	Vertical
4	4998.7999	57.08	46.70	-10.38	74.00	27.30	150	142	Vertical
5	10486.9487	45.72	47.77	2.05	74.00	26.23	150	308	Vertical
6	14019.9020	43.89	51.71	7.82	74.00	22.29	150	149	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	14019.9020	7.82	150	149	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	14019.9020	7.82	37.98	45.80	54.00	8.20	150	149	Vertical

Mode: TX/ 3DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1357.0357	63.94	40.09	-23.85	74.00	33.91	150	115	Horizontal
2	2530.1530	62.12	42.23	-19.89	74.00	31.77	150	182	Horizontal
3	4208.2208	54.27	40.96	-13.31	74.00	33.04	150	0	Horizontal
4	6547.6548	50.51	43.88	-6.63	74.00	30.12	150	255	Horizontal
5	10347.5348	46.41	47.94	1.53	74.00	26.06	150	255	Horizontal
6	17670.1670	41.23	51.37	10.14	74.00	22.63	150	255	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17670.1670	10.14	150	255	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17670.1670	10.14	37.72	47.86	54.00	6.14	150	255	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1593.3593	69.95	46.88	-23.07	74.00	27.12	150	203	Vertical
2	1992.8993	65.00	43.39	-21.61	74.00	30.61	150	173	Vertical
3	2790.2790	62.89	43.55	-19.34	74.00	30.45	150	196	Vertical
4	4985.1985	56.09	45.50	-10.59	74.00	28.50	150	142	Vertical
5	11088.8089	45.32	48.18	2.86	74.00	25.82	150	203	Vertical
6	17974.4975	42.63	51.79	9.16	74.00	22.21	150	242	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17974.4975	9.16	150	242	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17974.4975	9.16	37.41	46.57	54.00	7.43	150	242	Vertical

Mode: TX/ 3DH5
Middle channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2538.6539	62.46	42.71	-19.75	74.00	31.29	150	247	Horizontal
2	2795.3795	60.15	40.82	-19.33	74.00	33.18	150	3	Horizontal
3	4881.4881	53.38	43.16	-10.22	74.00	30.84	150	255	Horizontal
4	6551.0551	51.11	44.52	-6.59	74.00	29.48	150	255	Horizontal
5	10869.4869	45.22	47.84	2.62	74.00	26.16	150	14	Horizontal
6	17979.5980	42.41	51.51	9.10	74.00	22.49	150	149	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17979.5980	9.10	150	149	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17979.5980	9.10	36.67	45.77	54.00	8.23	150	149	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1402.9403	65.14	41.51	-23.63	74.00	32.49	150	171	Vertical
2	2343.1343	64.29	43.31	-20.98	74.00	30.69	150	119	Vertical
3	3839.2839	54.51	40.31	-14.20	74.00	33.69	150	360	Vertical
4	4988.5989	56.81	46.27	-10.54	74.00	27.73	150	141	Vertical
5	11092.2092	45.44	48.24	2.80	74.00	25.76	150	149	Vertical
6	17937.0937	41.90	51.29	9.39	74.00	22.71	150	156	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17937.0937	9.39	150	156	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17937.0937	9.39	37.03	46.42	54.00	7.58	150	156	Vertical

Mode: TX/ 3DH5

Highest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1195.5196	64.82	40.21	-24.61	74.00	33.79	150	119	Horizontal
2	1975.8976	64.15	42.40	-21.75	74.00	31.60	150	134	Horizontal
3	2684.8685	59.22	39.95	-19.27	74.00	34.05	150	255	Horizontal
4	6634.3634	51.00	43.76	-7.24	74.00	30.24	150	60	Horizontal
5	10471.6472	46.70	48.53	1.83	74.00	25.47	150	255	Horizontal
6	17688.8689	41.75	51.54	9.79	74.00	22.46	150	134	Horizontal

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17688.8689	9.79	150	134	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17688.8689	9.79	36.82	46.61	54.00	7.39	150	134	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1334.9335	63.88	39.94	-23.94	74.00	34.06	150	201	Vertical
2	2338.0338	63.87	42.94	-20.93	74.00	31.06	150	119	Vertical
3	3191.5192	60.43	42.69	-17.74	74.00	31.31	150	201	Vertical
4	4995.3995	55.96	45.53	-10.43	74.00	28.47	150	142	Vertical
5	10796.3796	46.19	48.49	2.30	74.00	25.51	150	223	Vertical
6	17738.1738	42.51	52.00	9.49	74.00	22.00	150	335	Vertical

PK Final Data List					
NO.	Freq. [MHz]	Factor [dB]	Height [cm]	Angle [°]	Polarity
1	17738.1738	9.49	150	335	Vertical

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	17738.1738	9.49	36.46	45.95	54.00	8.05	150	335	Vertical

Above 18GHz-26.5GHz**Left earphone**

Mode: TX/ DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18467.0750	58.12	46.63	-11.49	83.50	36.87	100	148	Horizontal
2	19876.3750	57.49	46.63	-10.86	83.50	36.87	100	48	Horizontal
3	20483.2750	56.97	46.47	-10.50	83.50	37.03	100	177	Horizontal
4	23214.7500	55.59	46.76	-8.83	83.50	36.74	100	346	Horizontal
5	23717.1000	56.06	47.51	-8.55	83.50	35.99	100	207	Horizontal
6	26410.7500	55.13	47.65	-7.48	83.50	35.85	100	138	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18792.2000	58.10	46.81	-11.29	83.50	36.69	100	70	Vertical
2	19258.8500	57.56	46.51	-11.05	83.50	36.99	100	0	Vertical
3	20580.6000	57.26	46.82	-10.44	83.50	36.68	100	50	Vertical
4	23120.4000	55.29	46.41	-8.88	83.50	37.09	100	293	Vertical
5	23957.2250	55.78	47.48	-8.30	83.50	36.02	100	11	Vertical
6	26145.9750	56.28	48.24	-8.04	83.50	35.26	100	80	Vertical

Mode: TX/ DH5

Lowest channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18419.0500	58.31	46.79	-11.52	83.50	36.71	100	201	Horizontal
2	20456.5000	57.14	46.62	-10.52	83.50	36.88	100	260	Horizontal
3	20546.6000	56.57	46.11	-10.46	83.50	37.39	100	82	Horizontal
4	23060.9000	55.24	46.33	-8.91	83.50	37.17	100	332	Horizontal
5	24344.8250	56.11	47.94	-8.17	83.50	35.56	100	42	Horizontal
6	26437.9500	55.27	47.78	-7.49	83.50	35.72	100	12	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18991.9500	57.72	46.62	-11.10	83.50	36.88	100	68	Vertical
2	20409.7500	56.68	46.14	-10.54	83.50	37.36	100	237	Vertical
3	21085.5000	55.83	45.54	-10.29	83.50	37.96	100	147	Vertical
4	23015.0000	56.13	47.20	-8.93	83.50	36.30	100	118	Vertical
5	23655.0500	56.27	47.66	-8.61	83.50	35.84	100	359	Vertical
6	25654.2500	55.05	47.09	-7.96	83.50	36.41	100	237	Vertical

Mode: TX/ DH5

Lowest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18879.7500	57.32	46.11	-11.21	83.50	37.39	100	187	Horizontal
2	20437.8000	56.91	46.38	-10.53	83.50	37.12	100	197	Horizontal
3	20495.1750	56.89	46.40	-10.49	83.50	37.10	100	106	Horizontal
4	22944.0250	55.41	46.44	-8.97	83.50	37.06	100	216	Horizontal
5	23987.8250	55.31	47.04	-8.27	83.50	36.46	100	246	Horizontal
6	26421.3750	55.13	47.65	-7.48	83.50	35.85	100	1	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18483.2250	58.28	46.80	-11.48	83.50	36.70	100	60	Vertical
2	19705.5250	57.36	46.49	-10.87	83.50	37.01	100	332	Vertical
3	20552.1250	56.56	46.10	-10.46	83.50	37.40	100	199	Vertical
4	23159.9250	55.89	47.03	-8.86	83.50	36.47	100	0	Vertical
5	23771.5000	55.20	46.71	-8.49	83.50	36.79	100	30	Vertical
6	26386.1000	55.28	47.78	-7.50	83.50	35.72	100	311	Vertical

Mode: TX/ 3DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18800.7000	57.51	46.22	-11.29	83.50	37.28	100	106	Horizontal
2	20399.5500	56.86	46.31	-10.55	83.50	37.19	100	352	Horizontal
3	20495.1750	56.45	45.96	-10.49	83.50	37.54	100	55	Horizontal
4	23155.6750	55.13	46.27	-8.86	83.50	37.23	100	85	Horizontal
5	23961.9000	55.23	46.93	-8.30	83.50	36.57	100	127	Horizontal
6	26226.7250	55.23	47.37	-7.86	83.50	36.13	100	117	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18381.2250	57.48	45.94	-11.54	83.50	37.56	100	27	Vertical
2	19258.0000	57.42	46.37	-11.05	83.50	37.13	100	225	Vertical
3	20559.3500	56.40	45.95	-10.45	83.50	37.55	100	295	Vertical
4	22731.1000	55.75	46.61	-9.14	83.50	36.89	100	56	Vertical
5	23778.3000	55.69	47.20	-8.49	83.50	36.30	100	205	Vertical
6	26187.6250	55.22	47.27	-7.95	83.50	36.23	100	355	Vertical

Mode: TX/ 3DH5

Lowest channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18962.6250	57.87	46.74	-11.13	83.50	36.76	100	225	Horizontal
2	19862.7750	57.45	46.59	-10.86	83.50	36.91	100	155	Horizontal
3	21708.1250	56.01	46.08	-9.93	83.50	37.42	100	304	Horizontal
4	22664.8000	55.17	45.96	-9.21	83.50	37.54	100	116	Horizontal
5	23775.3250	55.40	46.91	-8.49	83.50	36.59	100	7	Horizontal
6	26186.3500	55.07	47.12	-7.95	83.50	36.38	100	56	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18295.3750	58.19	46.63	-11.56	83.50	36.87	100	333	Vertical
2	19845.3500	57.12	46.26	-10.86	83.50	37.24	100	234	Vertical
3	20522.8000	56.40	45.92	-10.48	83.50	37.58	100	263	Vertical
4	23185.0000	56.10	47.25	-8.85	83.50	36.25	100	234	Vertical
5	24602.3750	55.16	47.04	-8.12	83.50	36.46	100	95	Vertical
6	26393.3250	54.89	47.40	-7.49	83.50	36.10	100	204	Vertical

Mode: TX/ 3DH5

Lowest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18422.0250	57.95	46.43	-11.52	83.50	37.07	100	93	Horizontal
2	19893.3750	56.92	46.06	-10.86	83.50	37.44	100	333	Horizontal
3	21432.3000	56.06	45.99	-10.07	83.50	37.51	100	282	Horizontal
4	23211.7750	55.50	46.67	-8.83	83.50	36.83	100	353	Horizontal
5	23934.2750	56.20	47.87	-8.33	83.50	35.63	100	63	Horizontal
6	26462.6000	55.18	47.67	-7.51	83.50	35.83	100	293	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18993.6500	57.93	46.83	-11.10	83.50	36.67	100	146	Vertical
2	19325.1500	56.96	45.95	-11.01	83.50	37.55	100	285	Vertical
3	21587.4250	55.54	45.61	-9.93	83.50	37.89	100	7	Vertical
4	23276.3750	55.50	46.69	-8.81	83.50	36.81	100	136	Vertical
5	23916.8500	55.34	46.99	-8.35	83.50	36.51	100	255	Vertical
6	25870.5750	55.48	47.27	-8.21	83.50	36.23	100	155	Vertical

Right earphone

Mode: TX/ DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18301.7500	58.22	46.66	-11.56	83.50	36.84	100	325	Horizontal
2	19253.7500	57.36	46.31	-11.05	83.50	37.19	100	354	Horizontal
3	20535.5500	56.27	45.80	-10.47	83.50	37.70	100	1	Horizontal
4	22879.8500	55.57	46.55	-9.02	83.50	36.95	100	286	Horizontal
5	23357.5500	55.86	47.09	-8.77	83.50	36.41	100	116	Horizontal
6	25804.2750	55.48	47.34	-8.14	83.50	36.16	100	146	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18375.7000	57.88	46.34	-11.54	83.50	37.16	100	155	Vertical
2	20380.0000	57.08	46.51	-10.57	83.50	36.99	100	234	Vertical
3	20802.0250	56.53	46.22	-10.31	83.50	37.28	100	115	Vertical
4	23011.6000	55.21	46.28	-8.93	83.50	37.22	100	224	Vertical
5	23831.8500	55.74	47.31	-8.43	83.50	36.19	100	14	Vertical
6	25128.1000	55.15	47.42	-7.73	83.50	36.08	100	333	Vertical

Mode: TX/ DH5

Lowest channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18966.0250	57.96	46.83	-11.13	83.50	36.67	100	244	Horizontal
2	19928.6500	57.05	46.19	-10.86	83.50	37.31	100	254	Horizontal
3	21200.6750	56.12	45.84	-10.28	83.50	37.66	100	25	Horizontal
4	22655.8750	55.45	46.23	-9.22	83.50	37.27	100	224	Horizontal
5	24381.8000	55.20	47.04	-8.16	83.50	36.46	100	25	Horizontal
6	26439.6500	54.93	47.44	-7.49	83.50	36.06	100	274	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18299.2000	57.87	46.31	-11.56	83.50	37.19	100	286	Vertical
2	19318.3500	56.98	45.96	-11.02	83.50	37.54	100	355	Vertical
3	21139.4750	56.20	45.91	-10.29	83.50	37.59	100	127	Vertical
4	22098.2750	56.43	46.58	-9.85	83.50	36.92	100	178	Vertical
5	23700.9500	55.53	46.96	-8.57	83.50	36.54	100	257	Vertical
6	26387.8000	55.00	47.50	-7.50	83.50	36.00	100	346	Vertical

Mode: TX/ DH5

Lowest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18764.5750	58.17	46.86	-11.31	83.50	36.64	100	146	Horizontal
2	19286.9000	57.46	46.43	-11.03	83.50	37.07	100	286	Horizontal
3	20545.3250	56.72	46.26	-10.46	83.50	37.24	100	136	Horizontal
4	23247.4750	55.02	46.20	-8.82	83.50	37.30	100	7	Horizontal
5	24178.6500	55.70	47.48	-8.22	83.50	36.02	100	156	Horizontal
6	25645.3250	55.71	47.77	-7.94	83.50	35.73	100	176	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18721.6500	58.04	46.70	-11.34	83.50	36.80	100	184	Vertical
2	19535.1000	57.21	46.31	-10.90	83.50	37.19	100	175	Vertical
3	20480.7250	56.14	45.64	-10.50	83.50	37.86	100	75	Vertical
4	22711.1250	56.00	46.84	-9.16	83.50	36.66	100	55	Vertical
5	24409.0000	55.07	46.91	-8.16	83.50	36.59	100	14	Vertical
6	26476.2000	54.84	47.33	-7.51	83.50	36.17	100	0	Vertical

Mode: TX/ 3DH5

Lowest channel (2402MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18285.6000	58.13	46.56	-11.57	83.50	36.94	100	64	Horizontal
2	19515.9750	56.70	45.79	-10.91	83.50	37.71	100	5	Horizontal
3	21518.1500	56.00	46.01	-9.99	83.50	37.49	100	214	Horizontal
4	23259.8000	55.94	47.13	-8.81	83.50	36.37	100	5	Horizontal
5	23704.7750	55.91	47.35	-8.56	83.50	36.15	100	104	Horizontal
6	26063.5250	55.34	47.11	-8.23	83.50	36.39	100	5	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18748.8500	58.05	46.73	-11.32	83.50	36.77	100	106	Vertical
2	19279.6750	57.15	46.11	-11.04	83.50	37.39	100	175	Vertical
3	20505.3750	56.17	45.68	-10.49	83.50	37.82	100	195	Vertical
4	22170.9500	56.32	46.56	-9.76	83.50	36.94	100	76	Vertical
5	24418.7750	55.61	47.45	-8.16	83.50	36.05	100	315	Vertical
6	26485.5500	55.07	47.55	-7.52	83.50	35.95	100	325	Vertical

Mode: TX/ 3DH5

Lowest channel (2441MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18375.7000	57.90	46.36	-11.54	83.50	37.14	100	117	Horizontal
2	19324.7250	56.83	45.82	-11.01	83.50	37.68	100	246	Horizontal
3	20890.4250	56.52	46.21	-10.31	83.50	37.29	100	187	Horizontal
4	23071.1000	56.55	47.65	-8.90	83.50	35.85	100	256	Horizontal
5	24318.9000	54.99	46.81	-8.18	83.50	36.69	100	355	Horizontal
6	26439.6500	55.10	47.61	-7.49	83.50	35.89	100	187	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18455.6000	57.90	46.40	-11.50	83.50	37.10	100	23	Vertical
2	20460.3250	56.91	46.40	-10.51	83.50	37.10	100	323	Vertical
3	21081.2500	56.27	45.98	-10.29	83.50	37.52	100	313	Vertical
4	22693.2750	55.08	45.90	-9.18	83.50	37.60	100	133	Vertical
5	24596.4250	55.25	47.13	-8.12	83.50	36.37	100	53	Vertical
6	25196.1000	54.98	47.34	-7.64	83.50	36.16	100	83	Vertical

Mode: TX/ 3DH5

Lowest channel (2480MHz)

Date: 2020/12/30

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18994.5000	57.35	46.25	-11.10	83.50	37.25	100	343	Horizontal
2	19919.7250	57.17	46.31	-10.86	83.50	37.19	100	284	Horizontal
3	20515.1500	56.90	46.42	-10.48	83.50	37.08	100	303	Horizontal
4	23288.2750	54.93	46.13	-8.80	83.50	37.37	100	359	Horizontal
5	23791.0500	55.56	47.09	-8.47	83.50	36.41	100	175	Horizontal
6	25848.0500	55.45	47.26	-8.19	83.50	36.24	100	274	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18677.0250	57.70	46.34	-11.36	83.50	37.16	100	87	Vertical
2	19905.2750	57.19	46.33	-10.86	83.50	37.17	100	27	Vertical
3	20491.3500	56.48	45.98	-10.50	83.50	37.52	100	265	Vertical
4	23187.9750	56.03	47.18	-8.85	83.50	36.32	100	77	Vertical
5	24292.9750	55.15	46.96	-8.19	83.50	36.54	100	36	Vertical
6	25475.7500	55.28	47.47	-7.81	83.50	36.03	100	246	Vertical

Test result: The unit does meet the requirements.

5.9. RESTRICTED BANDS OF OPERATION

5.9.1. LIMITS


Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	73 - 74.6	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 -	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.52025	162.0125 - 167.17	3600 - 4400	
12.57675 -	167.72 - 173.2		
12.57725	240 - 285		
13.36 - 13.41	322 - 335.4		

5.9.2. TEST PROCEDURES

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

5.9.3. TEST SETUP

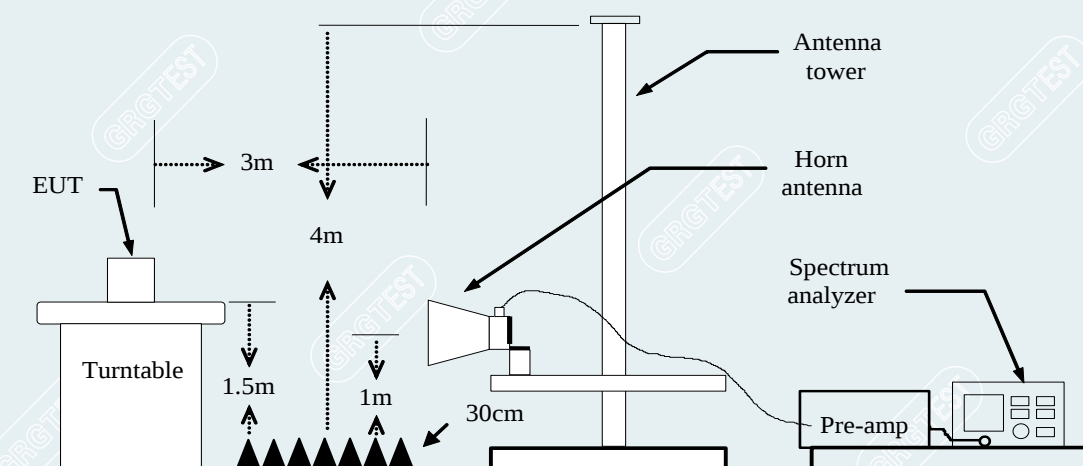

5.9.4. TEST RESULTS

Left earphone


DH5

Lowest Channel

Channel 2402MHz


Detector mode: Peak

Polarity: Horizontal

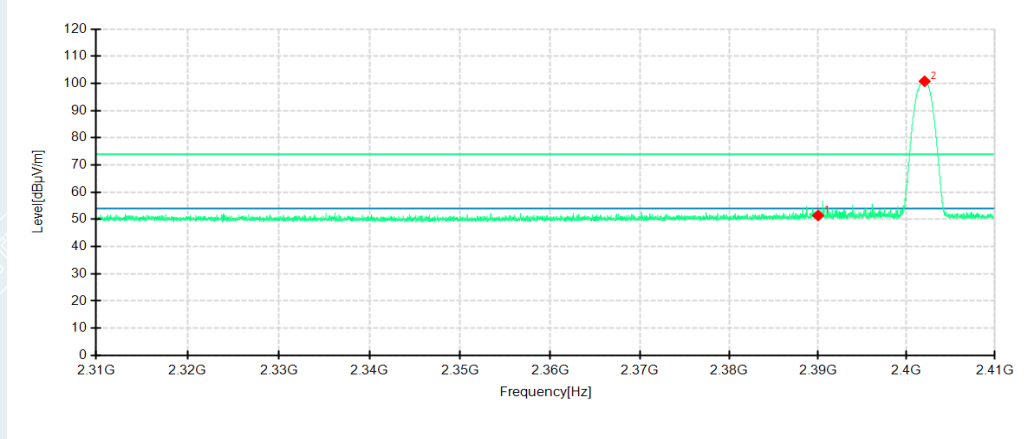

Detector mode: Peak

Polarity: Vertical

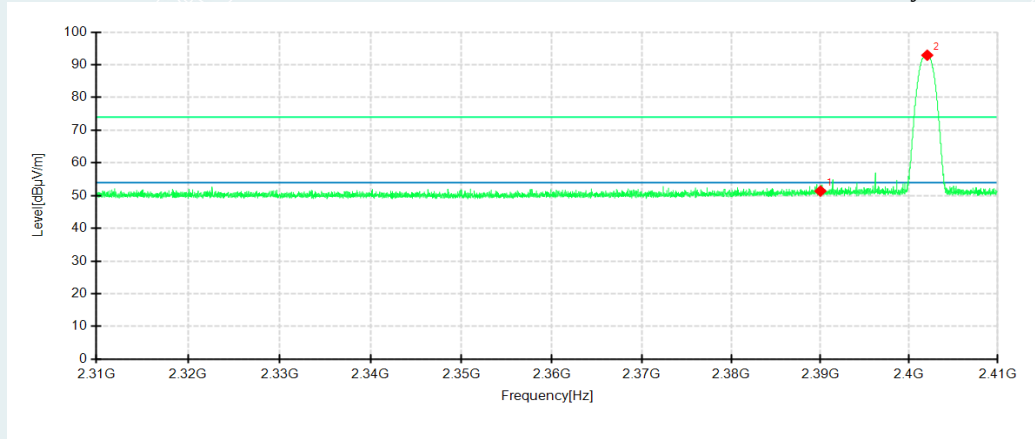


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	48.24	51.43	3.19	74.00	22.57	150	36	Horizontal
2	2402.0487	97.42	100.77	3.35	74.00	-26.77	150	169	Horizontal
1	2390.0133	48.20	51.39	3.19	74.00	22.61	150	209	Vertical
2	2402.0487	89.57	92.92	3.35	74.00	-18.92	150	253	Vertical

Lowest Channel

Channel 2402MHz


Detector mode: Average

Polarity: Horizontal

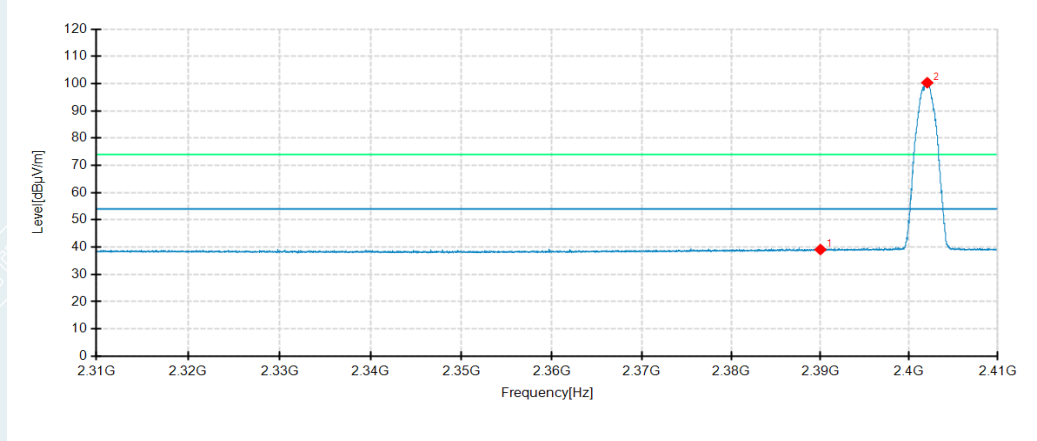

Detector mode: Average

Polarity: Vertical

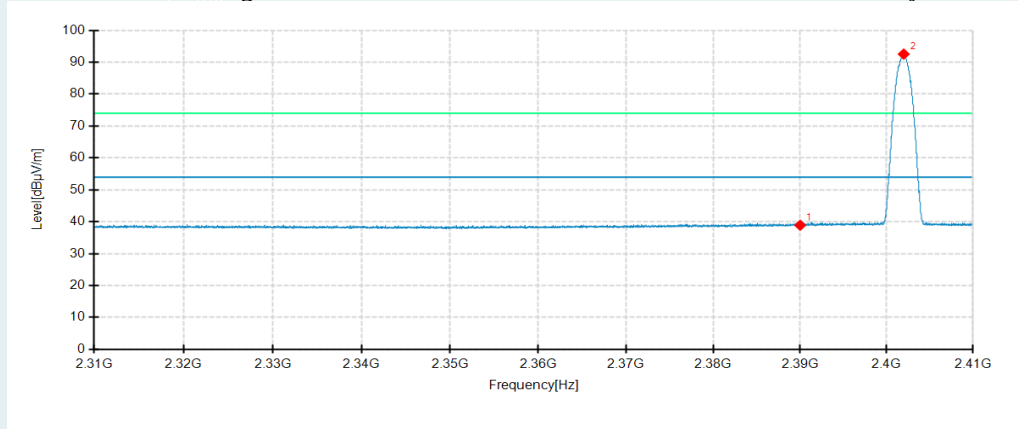


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	35.92	39.11	3.19	54.00	14.89	150	357	Horizontal
2	2402.0487	96.97	100.32	3.35	54.00	-46.32	150	173	Horizontal
1	2390.0133	35.71	38.90	3.19	54.00	15.10	150	176	Vertical
2	2401.9820	89.19	92.54	3.35	54.00	-38.54	150	248	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Peak

Polarity: Horizontal

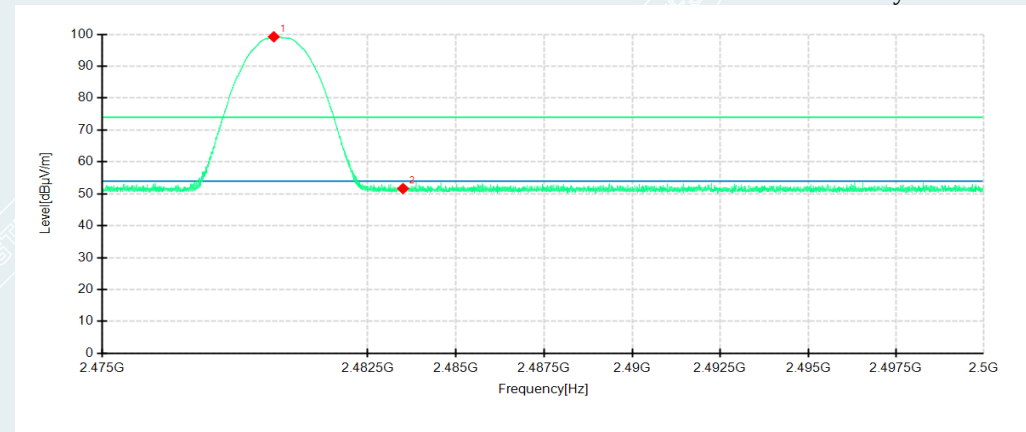

Detector mode: Peak

Polarity: Vertical

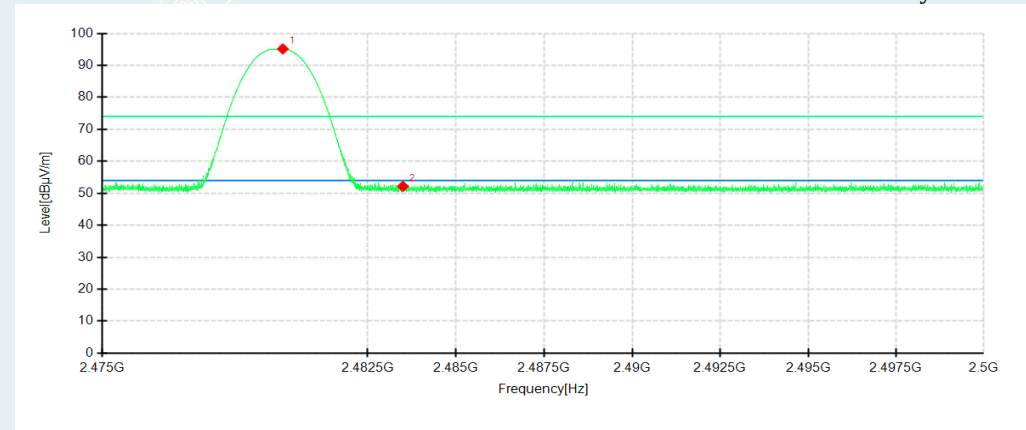


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2479.8466	95.67	99.22	3.55	74.00	-25.22	150	173	Horizontal
2	2483.5014	48.09	51.65	3.56	74.00	22.35	150	85	Horizontal
1	2480.1009	91.58	95.13	3.55	74.00	-21.13	150	247	Vertical
2	2483.5014	48.60	52.16	3.56	74.00	21.84	150	241	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Average

Polarity: Horizontal

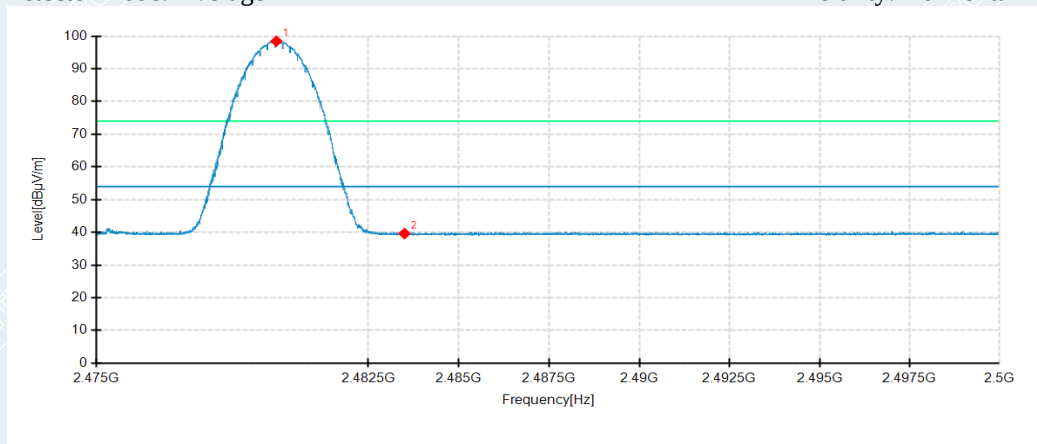

Detector mode: Average

Polarity: Vertical

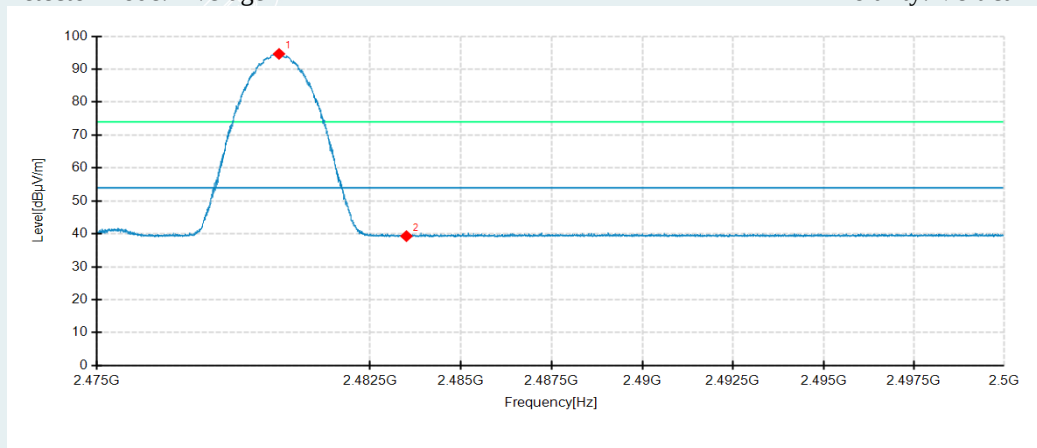


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2479.9633	94.89	98.44	3.55	54.00	-44.44	150	183	Horizontal
2	2483.5014	36.06	39.62	3.56	54.00	14.38	150	1	Horizontal
1	2480.0008	91.09	94.64	3.55	54.00	-40.64	150	248	Vertical
2	2483.5014	35.75	39.31	3.56	54.00	14.69	150	50	Vertical

3DH5**Lowest Channel**

Channel 2402MHz


Detector mode: Peak

Polarity: Horizontal

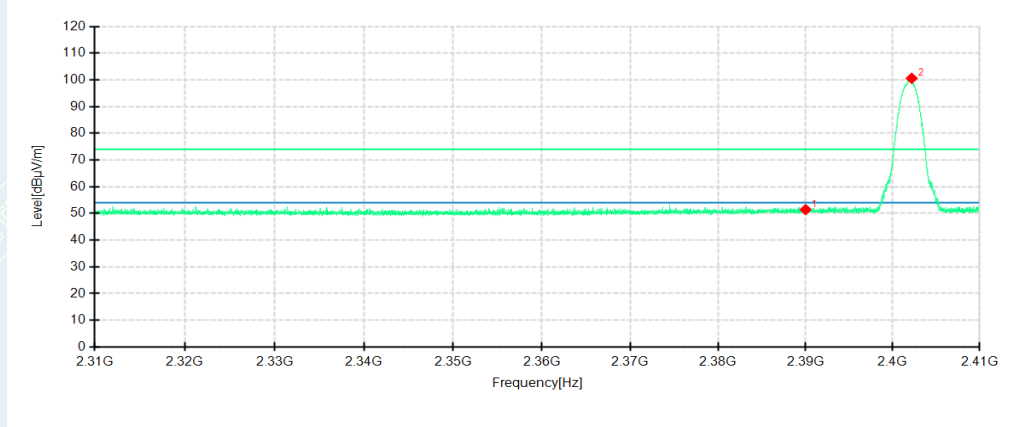

Detector mode: Peak

Polarity: Vertical

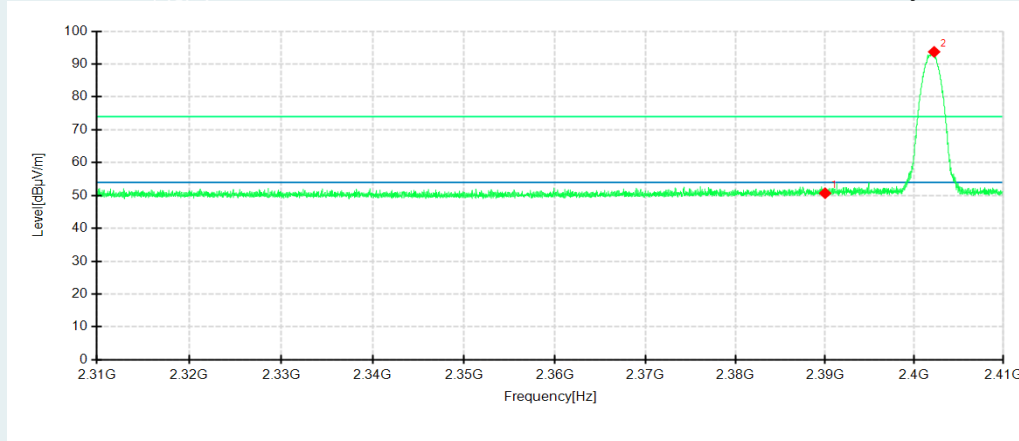


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	48.24	51.43	3.19	74.00	22.57	150	354	Horizontal
2	2402.1820	97.22	100.57	3.35	74.00	-26.57	150	184	Horizontal
1	2390.0133	47.51	50.70	3.19	74.00	23.30	150	88	Vertical
2	2402.2320	90.37	93.72	3.35	74.00	-19.72	150	247	Vertical

Lowest Channel

Channel 2402MHz


Detector mode: Average

Polarity: Horizontal

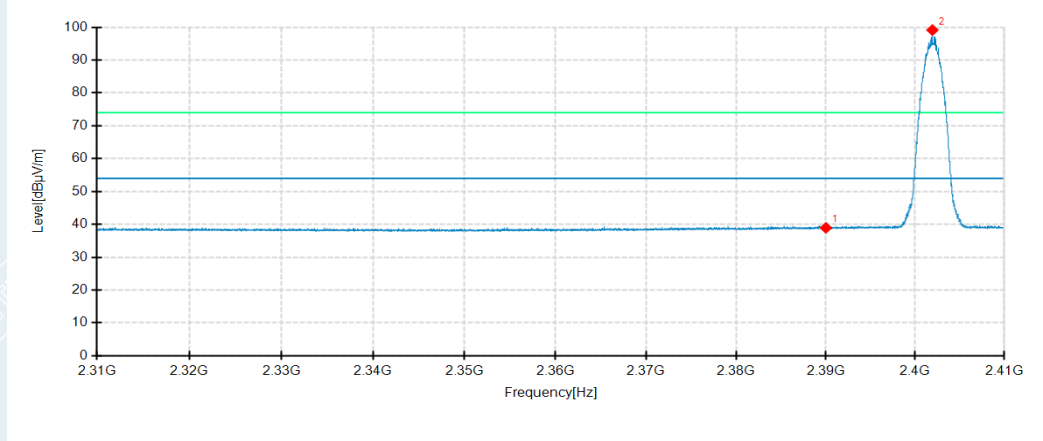

Detector mode: Average

Polarity: Vertical

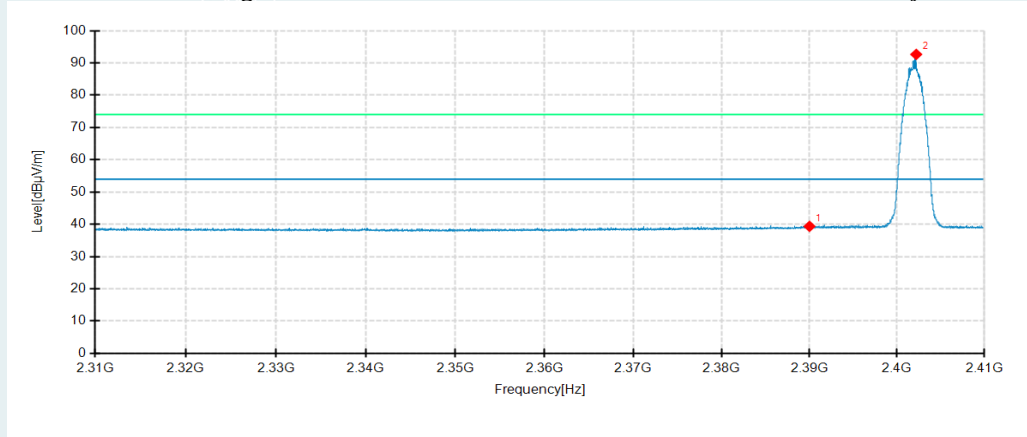


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	35.74	38.93	3.19	54.00	15.07	150	255	Horizontal
2	2401.9320	95.78	99.13	3.35	54.00	-45.13	150	184	Horizontal
1	2390.0133	36.18	39.37	3.19	54.00	14.63	150	214	Vertical
2	2402.1987	89.30	92.65	3.35	54.00	-38.65	150	208	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Peak

Polarity: Horizontal

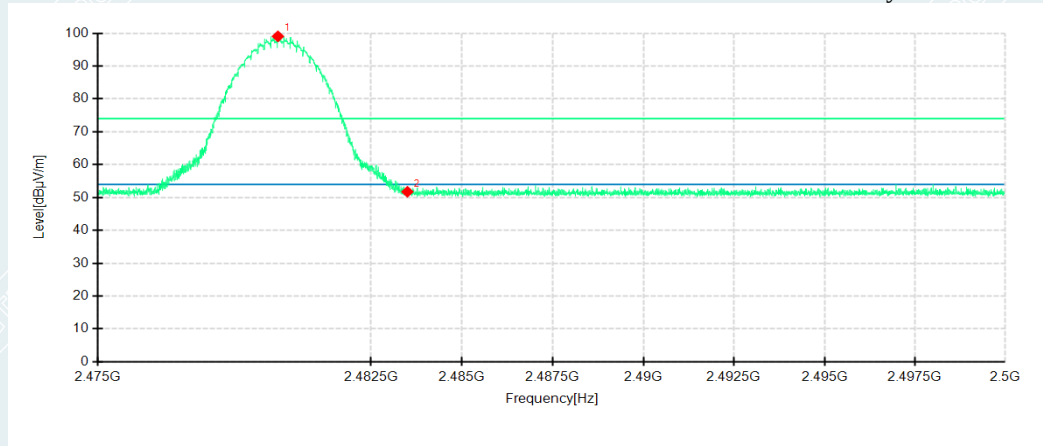

Detector mode: Peak

Polarity: Vertical

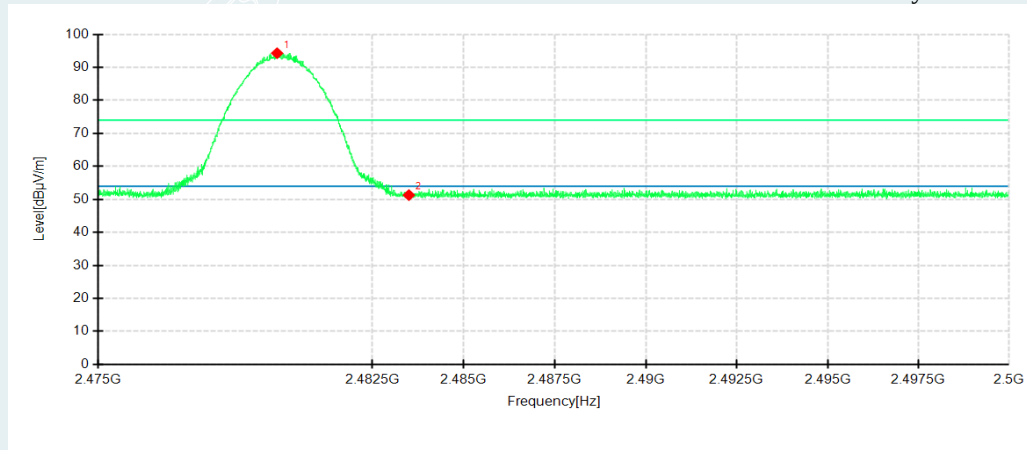


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2479.9425	95.48	99.03	3.55	74.00	-25.03	150	169	Horizontal
2	2483.5014	48.19	51.75	3.56	74.00	22.25	150	251	Horizontal
1	2479.8925	90.73	94.28	3.55	74.00	-20.28	150	66	Vertical
2	2483.5014	47.73	51.29	3.56	74.00	22.71	150	192	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Average

Polarity: Horizontal

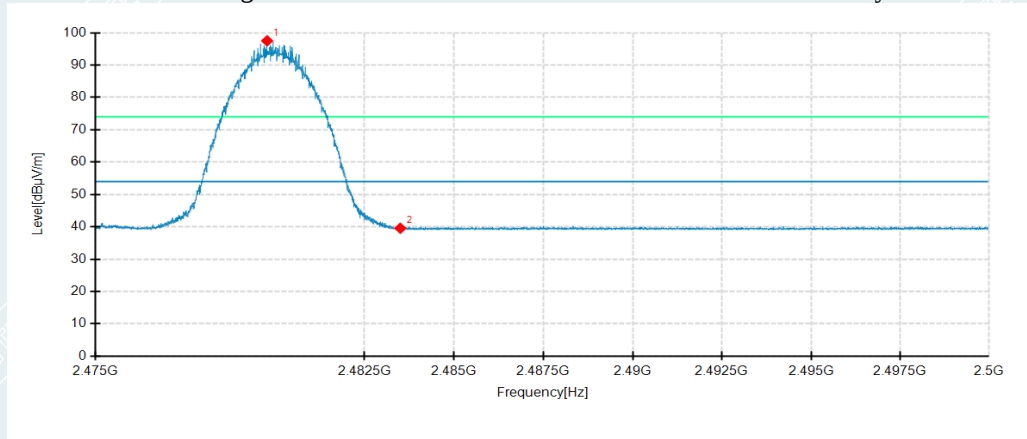

Detector mode: Average

Polarity: Vertical

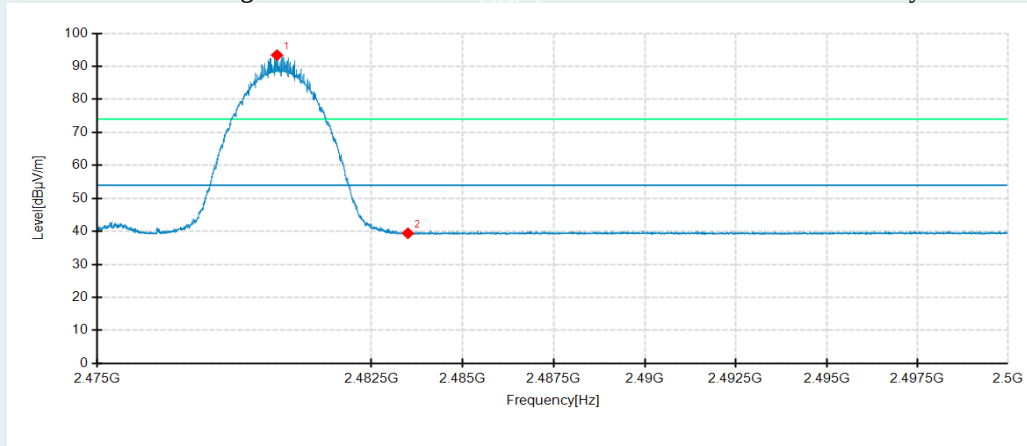


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2479.7841	93.94	97.49	3.55	54.00	-43.49	150	167	Horizontal
2	2483.5014	35.99	39.55	3.56	54.00	14.45	150	332	Horizontal
1	2479.9175	89.85	93.40	3.55	54.00	-39.40	150	66	Vertical
2	2483.5014	35.86	39.42	3.56	54.00	14.58	150	359	Vertical

Right earphone**DH5****Lowest Channel**

Channel 2402MHz


Detector mode: Peak

Polarity: Horizontal

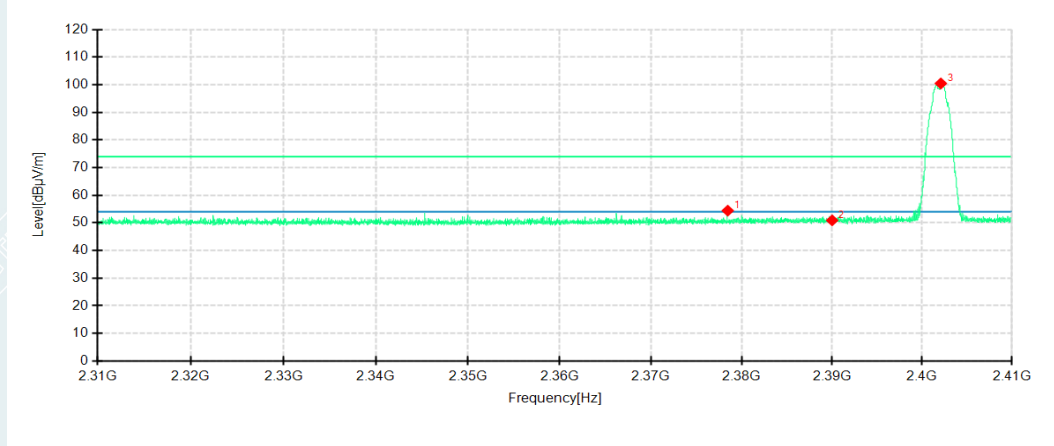

Detector mode: Peak

Polarity: Vertical

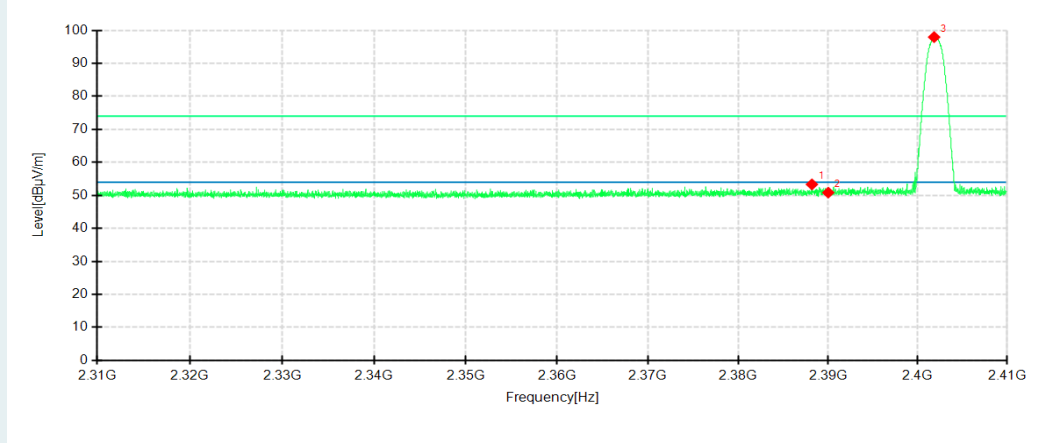


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2378.4781	51.42	54.43	3.01	74.00	19.57	150	49	Horizontal
2	2390.0133	47.72	50.91	3.19	74.00	23.09	150	76	Horizontal
3	2402.0820	97.11	100.46	3.35	74.00	-26.46	150	179	Horizontal
1	2388.1964	50.17	53.33	3.16	74.00	20.67	150	29	Vertical
2	2390.0133	47.65	50.84	3.19	74.00	23.16	150	133	Vertical
3	2401.8320	94.59	97.94	3.35	74.00	-23.94	150	133	Vertical

Lowest Channel

Channel 2402MHz


Detector mode: Average

Polarity: Horizontal

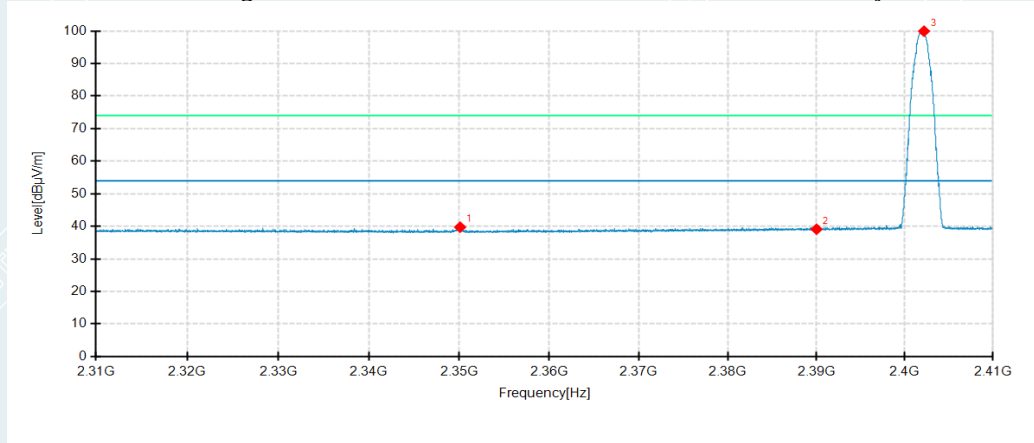

Detector mode: Average

Polarity: Vertical

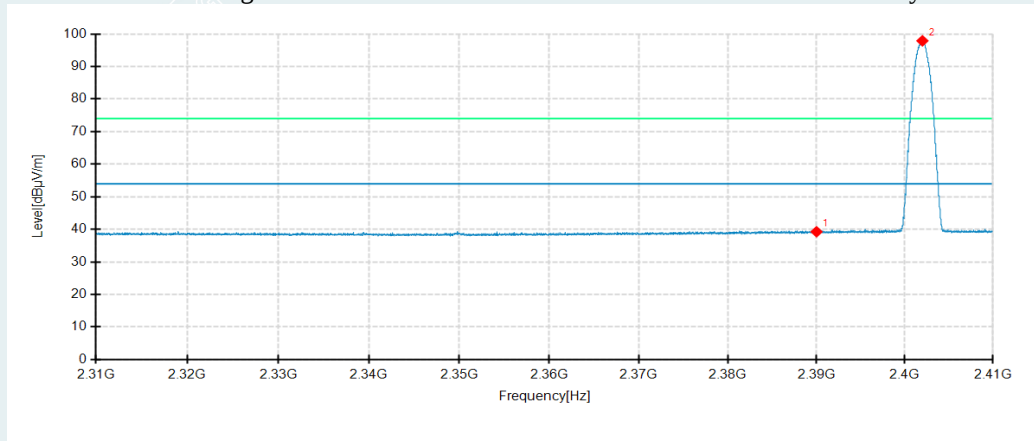


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2350.1067	37.17	39.74	2.57	54.00	14.26	150	169	Horizontal
2	2390.0133	35.92	39.11	3.19	54.00	14.89	150	141	Horizontal
3	2402.1820	96.58	99.93	3.35	54.00	-45.93	150	185	Horizontal
1	2390.0133	36.07	39.26	3.19	54.00	14.74	150	193	Vertical
2	2401.9987	94.53	97.88	3.35	54.00	-43.88	150	137	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Peak

Polarity: Horizontal

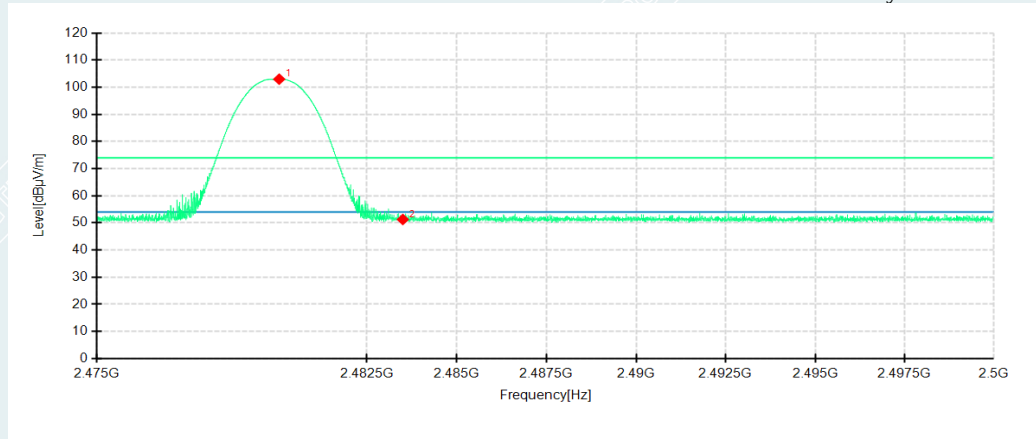

Detector mode: Peak

Polarity: Vertical

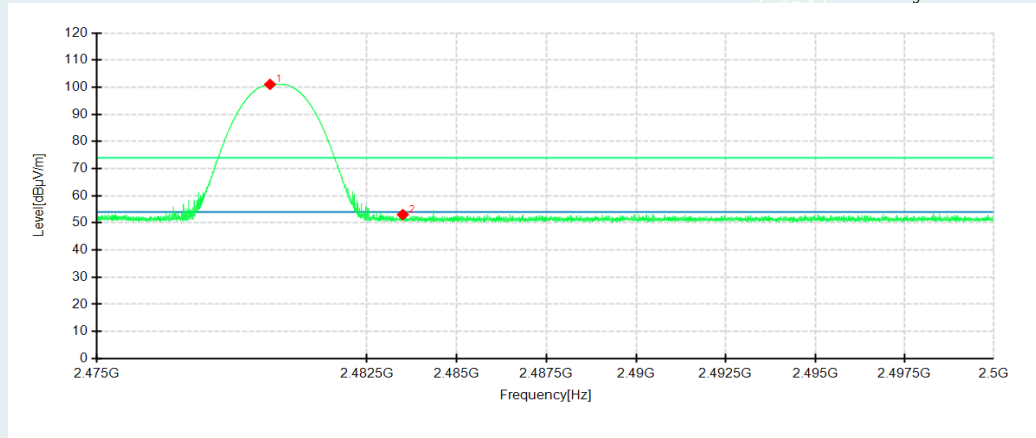


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2480.0633	99.41	102.96	3.55	74.00	-28.96	150	140	Horizontal
2	2483.5014	47.70	51.26	3.56	74.00	22.74	150	180	Horizontal
1	2479.8091	97.48	101.03	3.55	74.00	-27.03	150	153	Vertical
2	2483.5014	49.48	53.04	3.56	74.00	20.96	150	181	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Average

Polarity: Horizontal

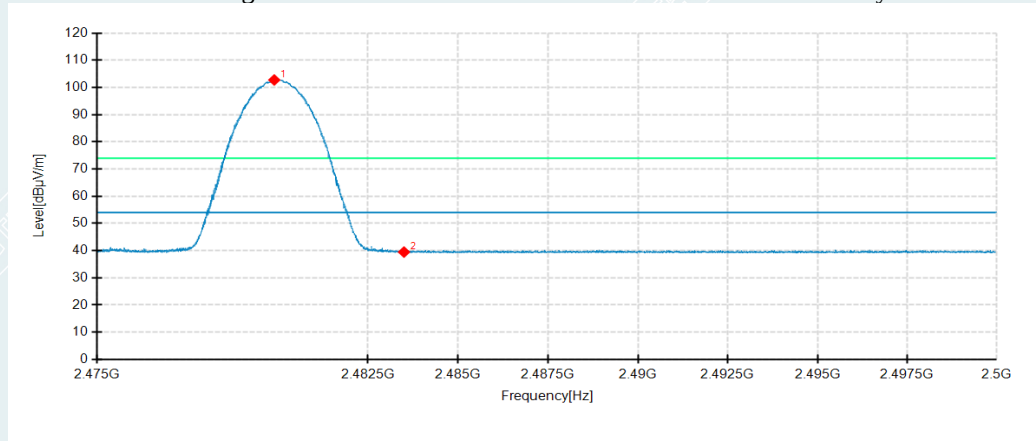

Detector mode: Average

Polarity: Vertical

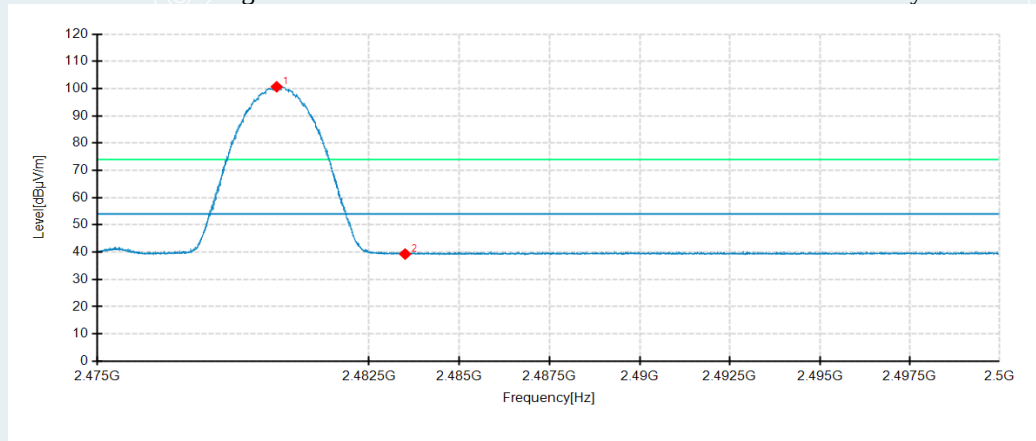


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2479.9050	99.18	102.73	3.55	54.00	-48.73	150	141	Horizontal
2	2483.5014	35.90	39.46	3.56	54.00	14.54	150	141	Horizontal
1	2479.9508	97.11	100.66	3.55	54.00	-46.66	150	155	Vertical
2	2483.5014	35.75	39.31	3.56	54.00	14.69	150	193	Vertical

3DH5**Lowest Channel**

Channel 2402MHz


Detector mode: Peak

Polarity: Horizontal

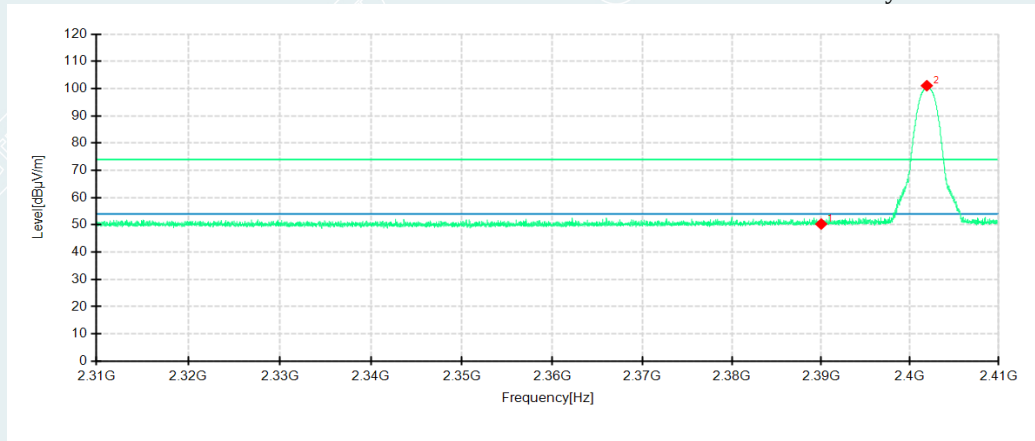

Detector mode: Peak

Polarity: Vertical

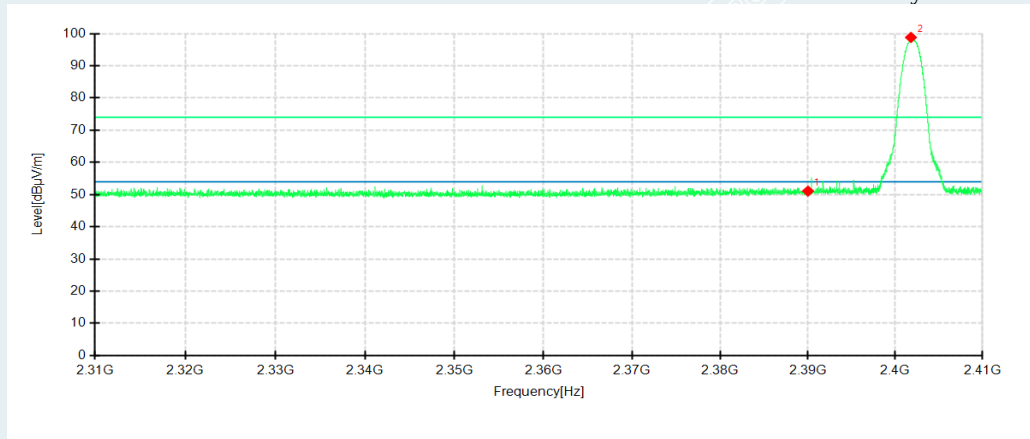


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	47.13	50.32	3.19	74.00	23.68	150	24	Horizontal
2	2401.8987	97.71	101.06	3.35	74.00	-27.06	150	134	Horizontal
1	2390.0133	47.89	51.08	3.19	74.00	22.92	150	98	Vertical
2	2401.7986	95.45	98.80	3.35	74.00	-24.80	150	153	Vertical

Lowest Channel

Channel 2402MHz


Detector mode: Average

Polarity: Horizontal

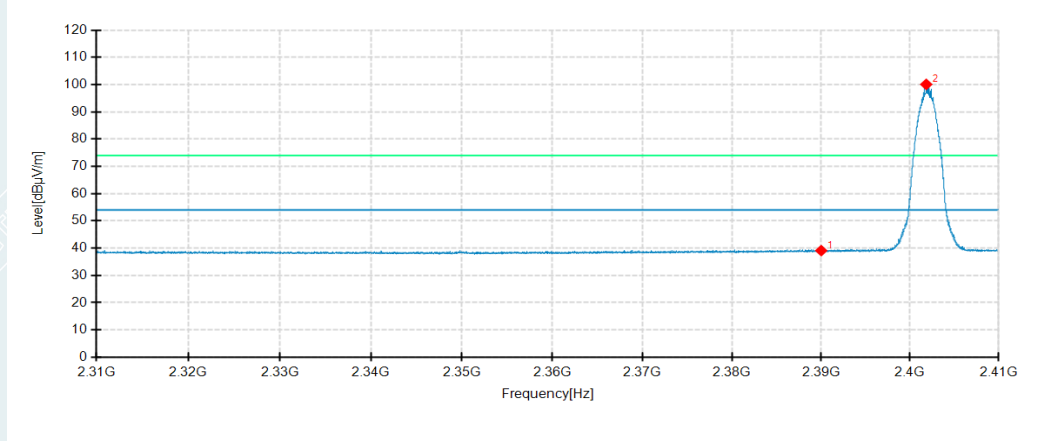

Detector mode: Average

Polarity: Vertical

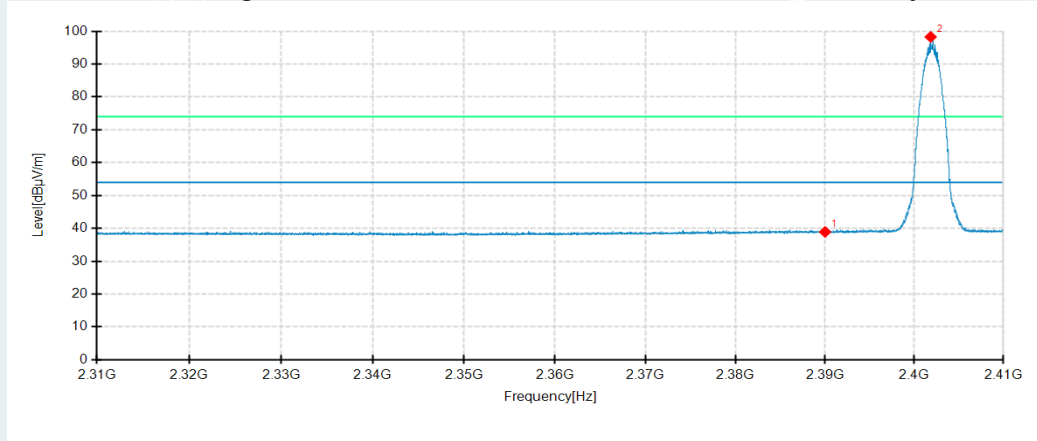


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2390.0133	35.91	39.10	3.19	54.00	14.90	150	74	Horizontal
2	2401.8320	96.72	100.07	3.35	54.00	-46.07	150	140	Horizontal
1	2390.0133	35.72	38.91	3.19	54.00	15.09	150	346	Vertical
2	2401.8320	94.91	98.26	3.35	54.00	-44.26	150	155	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Peak

Polarity: Horizontal

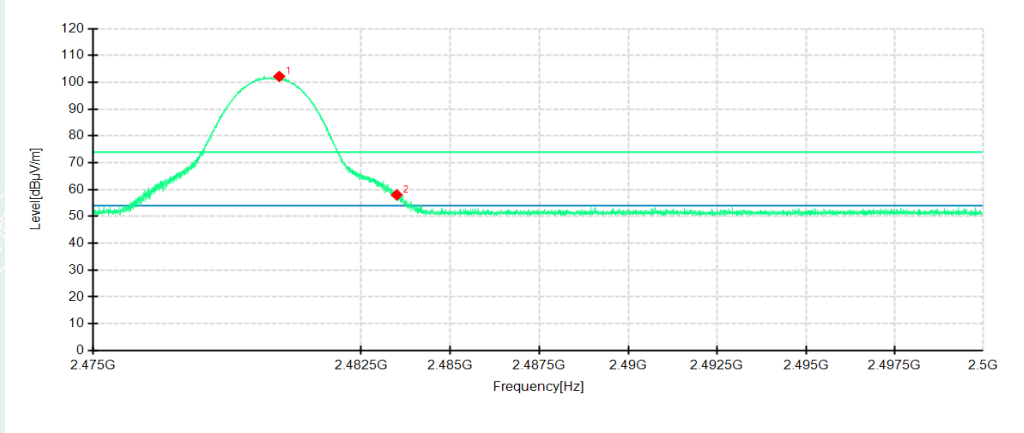

Detector mode: Peak

Polarity: Vertical

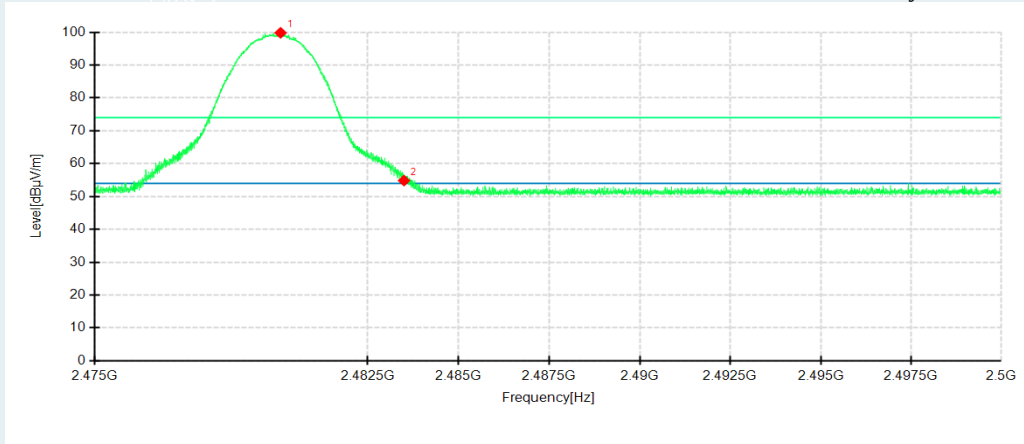


No.	Frequency MHz	Reading dBμV/m	Level dBμV/ m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole
1	2480.2092	98.62	102.17	3.55	74.00	-28.17	150	139	Horizontal
2	2483.5014	54.47	58.03	3.56	74.00	15.97	150	129	Horizontal
1	2480.1050	96.26	99.81	3.55	74.00	-25.81	150	154	Vertical
2	2483.5014	51.29	54.85	3.56	74.00	19.15	150	149	Vertical

Highest Channel

Channel 2480MHz


Detector mode: Average

Polarity: Horizontal

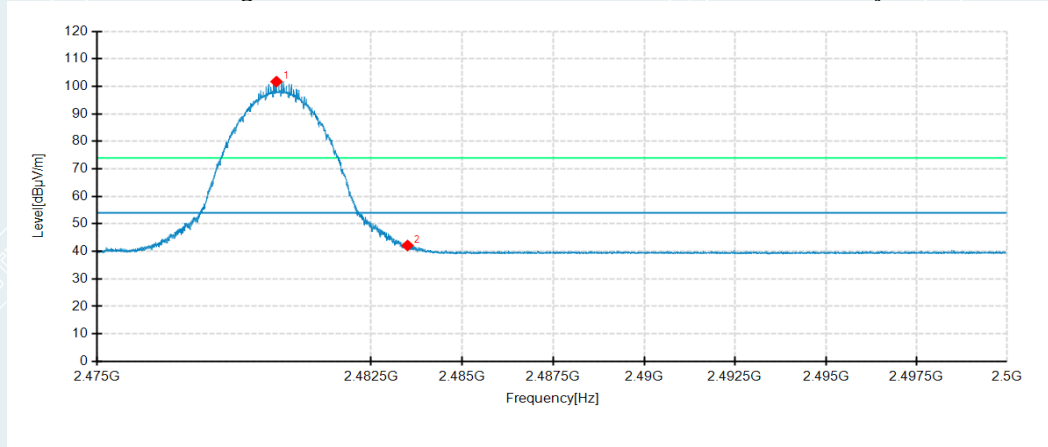

Detector mode: Average

Polarity: Vertical

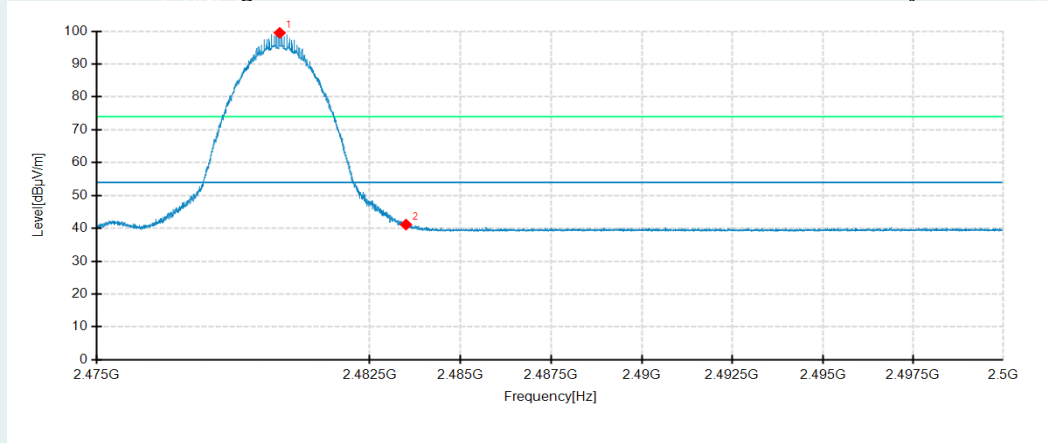

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole
1	2479.9092	98.17	101.72	3.55	54.00	-47.72	150	140	Horizontal
2	2483.5014	38.58	42.14	3.56	54.00	11.86	150	140	Horizontal
1	2480.0258	95.94	99.49	3.55	54.00	-45.49	150	153	Vertical
2	2483.5014	37.58	41.14	3.56	54.00	12.86	150	148	Vertical

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

-----This is the last page of the report. -----