

SPECIFICATION



深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

联创 ARLY 右耳蓝牙天线

Lchse ARLY Right ear Bluetooth Antenna

产 品 规 格 书

Product Specification

客 户 connection	联创 Lchse	频 段 frequency range	2400 ~ 2500MHz		
项目名称 entry name	ARLY	版 本 edition	V07		
物料编号 Material No	2A-rlylc-107	颜 色 Color	黑色 Black		
客户料号 Customer Item Number	深圳市大显科技有限公司 RuiBin.Zhou 张磊 Lei.Zhang 承认书专用章				
R F 设计 R F Design				胡 鹏 Peng.Hu	结构设计 Structural Design
品质经理 Quality Manager				潘永杰 YongJie.Pan	技术总监 Technical Director
日 期 Date	2025-07-21				

客户确认:

Customer confirmation:

装配是否符合贵司要求: ☐OK ☐NGWhether the assembly meets your company's requirements: ☐OK ☐NG

深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd

深圳市龙岗区布吉镇吉华路 513 号上水径村 (国防培训基地
对面) 达成工业园综合楼 7 楼

TEL:0755-28576002

FAX:0755-84276383

上海分部: 上海市张江高科技园区集成电路产业区龙东大道
3000 号 8 号楼 201 室

TEL:021-61630552

FAX:755-84276383

Buji Town, Longgang District, Shenzhen, China Jihua Road 513,
Shangshuijing Village (opposite the national defense
training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry
Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

[illegible]

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

索引

Indexes

一、项目说明 Project Description.....	4
二、B T 天线 antenna.....	4
1、规格 specifications.....	4
1.1 电气规格标准 Electrical specifications and standards.....	5
1.1.1 电性能指标 Electrical performance index.....	5
1.2 结构规格标准 Structural specifications and standards.....	5
1.2.1 主板匹配图 Motherboard Matching Diagram.....	5
1.2.2 天线组成 Antenna composition.....	5
2、测试设备 The Equipment of Active Test.....	6
3、测试 Test.....	7
3.1 驻波(VSWR)的测试 Test of standing wave (VSWR).....	7
3.1.1 测试连接 Test connection.....	7
3.2 效率、功率 (TRP)、灵敏度 (TIS) 的测试 Testing of efficiency, power (TRP), sensitivity (TIS).....	7
3.2.1 测试的场地 Test site.....	7
3.2.2 测试的仪表 Tested Instruments.....	7
3.2.3 测试数据 test data.....	7-8
4、VSWR 参数图 Parameter diagram.....	8
5、有源场型图 Passive Field Pattern Diagram.....	9
6、无源场型图 Passive field pattern diagram.....	10

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一 项目说明 Project Description


客户名: Customer Name:	联创 Lchse
整机类型: Type of complete machine:	蓝牙天线 Bluetooth antenna
天线频段: Antenna band:	2400 ~ 2500MHz
天线形式: Antenna form:	FPC 天线 FPC antenna
天线极性: Antenna polarity:	线性极化 Linear polarization
硬件版本: Hardware version:	主板: 右耳 Motherboard: Right ear
天线制造商: Antennamanufacturer:	深圳市大显科技有限公司 Shenzhen daxian technology co., ltd
测试实验室: Testing laboratory:	SATIMO 微波实验室 SATIMO microwave laboratory

二 B T 天线组件 Antenna assembly

1 规格 specifications

本报告主要提供 ARLY 项目天线的各项电气和结构性能参数的测试状况。下图为大显设计的天线图片。

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the ARLY project. The following image shows an antenna with a large display design.

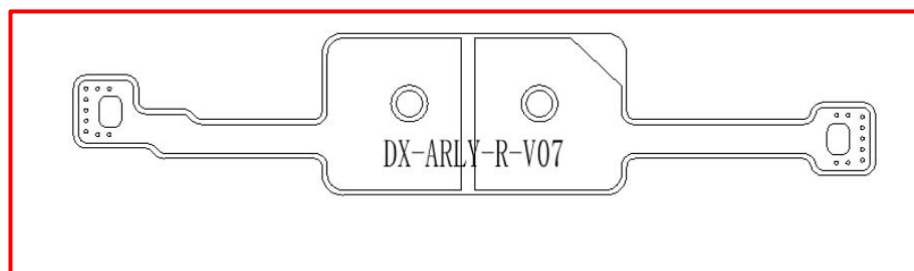

天线外观图

antenna appearing diagram

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.1 电气规格标准 Electrical specifications and standards

1.1.1 电性能指标 Electrical performance index


天线工作频段在 2400 ~ 2500 MHz。 下表是大显设计和量产天线的电性能指标。

The operating frequency band of the antenna is between 2400 and 2500 MHz. The following table shows the electrical performance indicators of large display design and mass production antennas.


Frequency Range	Frequency (MHz)	VSWR
BT	2400 ~ 2500	≤ 2

2 结构规格标准 Structural specifications and standards

1.2.1 主板匹配图 Motherboard Matching Diagram

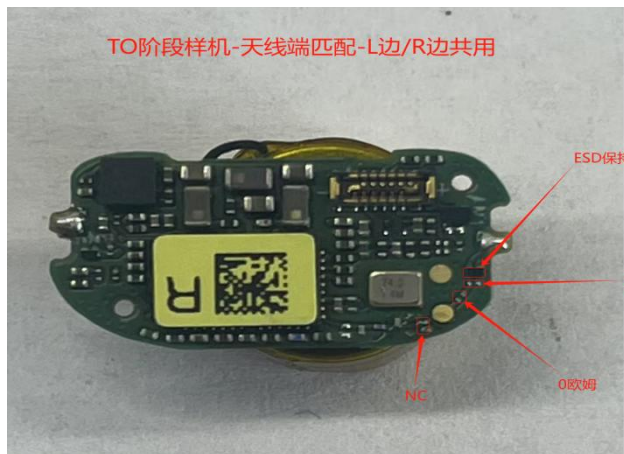

L边/R边主板天线端匹配:

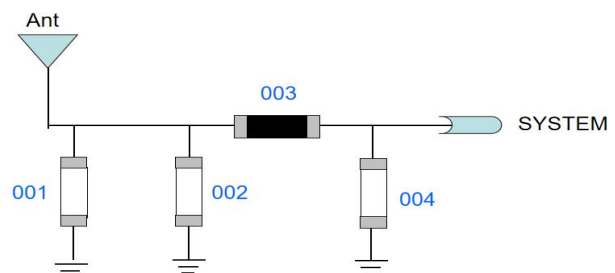

主板天线端匹配更改如下:

- 001: ESD
- 002: NC
- 003: 0欧姆
- 004: NC

1.2.2 天线组成 Antenna composition

天线主要是由 FPC 组成。

The antenna is mainly composed of FPC sponge.

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

2、测试设备 The Equipment of Active Test

Satimo 3D Chamber $4 \times 4 \times 4$ (m)

CMW500 E5071C

Network analyzer-R&S ZVL

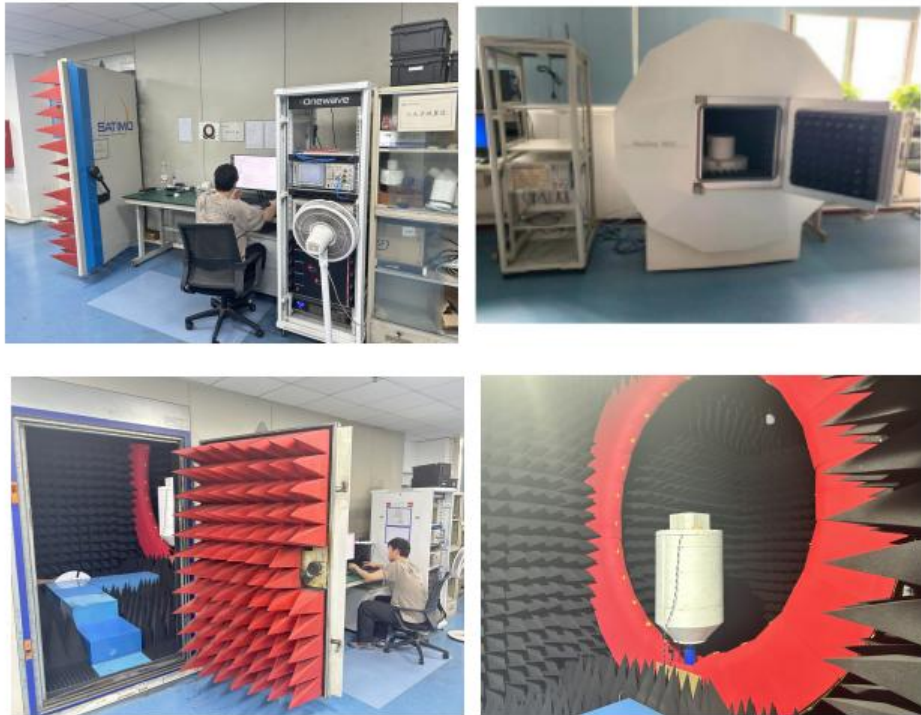


图 2

Figure 2

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 测试 test

3.1 驻波(VSWR)的测试 Test of standing wave (VSWR)

3.1.1 测试连接: VSWR 测试装置依次的连接为: R&S ZVL 网络分析仪 → 测试线 → 测试治

Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → test fixture

实测(附图)Actual measurement (attached drawing)

3.2 增益及效率、功率 (TRP)、灵敏度 (TIS) 的测试

Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 测试的场地 Test site:

大显微波暗室。测试频率范围为 400MHz—6GHz, 静区范围为 50cm 圆周, 反射率小于-50 dB。

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than -50dB.

3.2.2 测试的仪表 Tested Instruments:

R&S ZVL 网络分析仪、CMW500 E5071C、标准喇叭天线、法国 SATIMO-SG24SYSTEM 系统、打印机等。

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 测试数据: 在微波暗室中, 测试的功率和灵敏度相关的数值如下表

Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table below

OTA 有源测试 OTAActive Test:

R边-自由空间 R-side - free space			
BAND	CH	TRP	TIS
BT	0	5.73	-89.26
	39	6.2	-89.62
	78	6.51	-89.53

R边-头模 R-side-head mold			
BAND	CH	TRP	TIS
BT	0	1.5	-85.03
	39	1.67	-85.37
	78	1.43	-85.4

www.Topant.com.cn


Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

无源效率&增益 Passive efficiency&gain:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	26.01	-5.85	-2.97
2410	27.09	-5.67	-3.1
2420	27.55	-5.6	-3.18
2430	28.11	-5.51	-2.99
2440	28.8	-5.41	-2.63
2450	29.19	-5.35	-2.27
2460	29.78	-5.26	-2.08
2470	29.6	-5.29	-2.07
2480	29.17	-5.35	-2.18
2490	29.03	-5.37	-2.26
2500	28.5	-5.45	-2.33

4、VSWR 参数图 VSWR parameter diagram

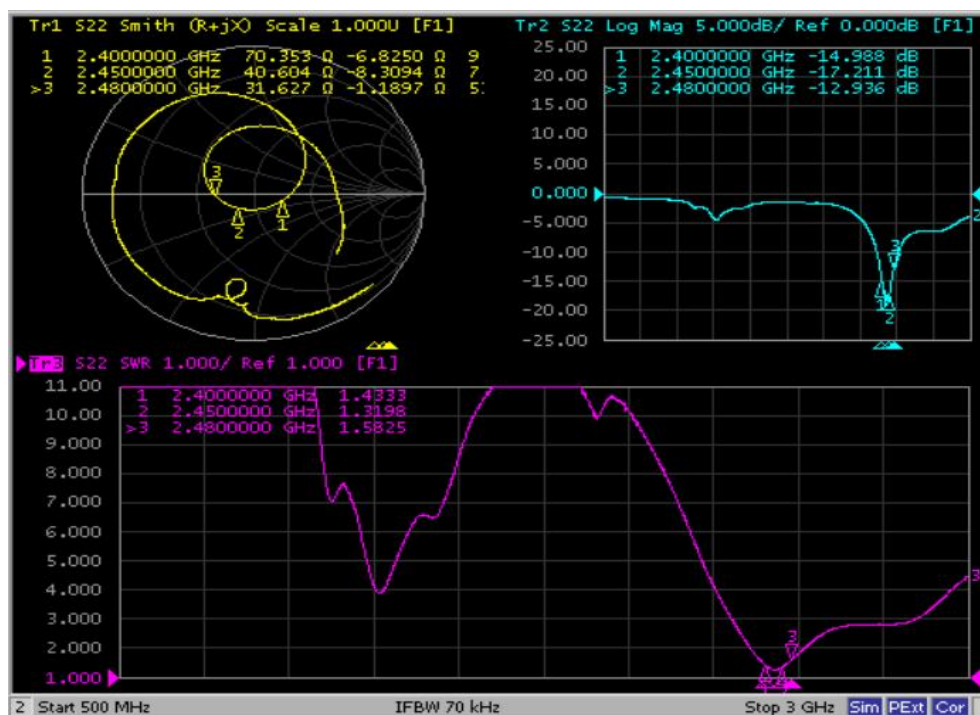


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

5、有源场型图 Passive Field Pattern Diagram

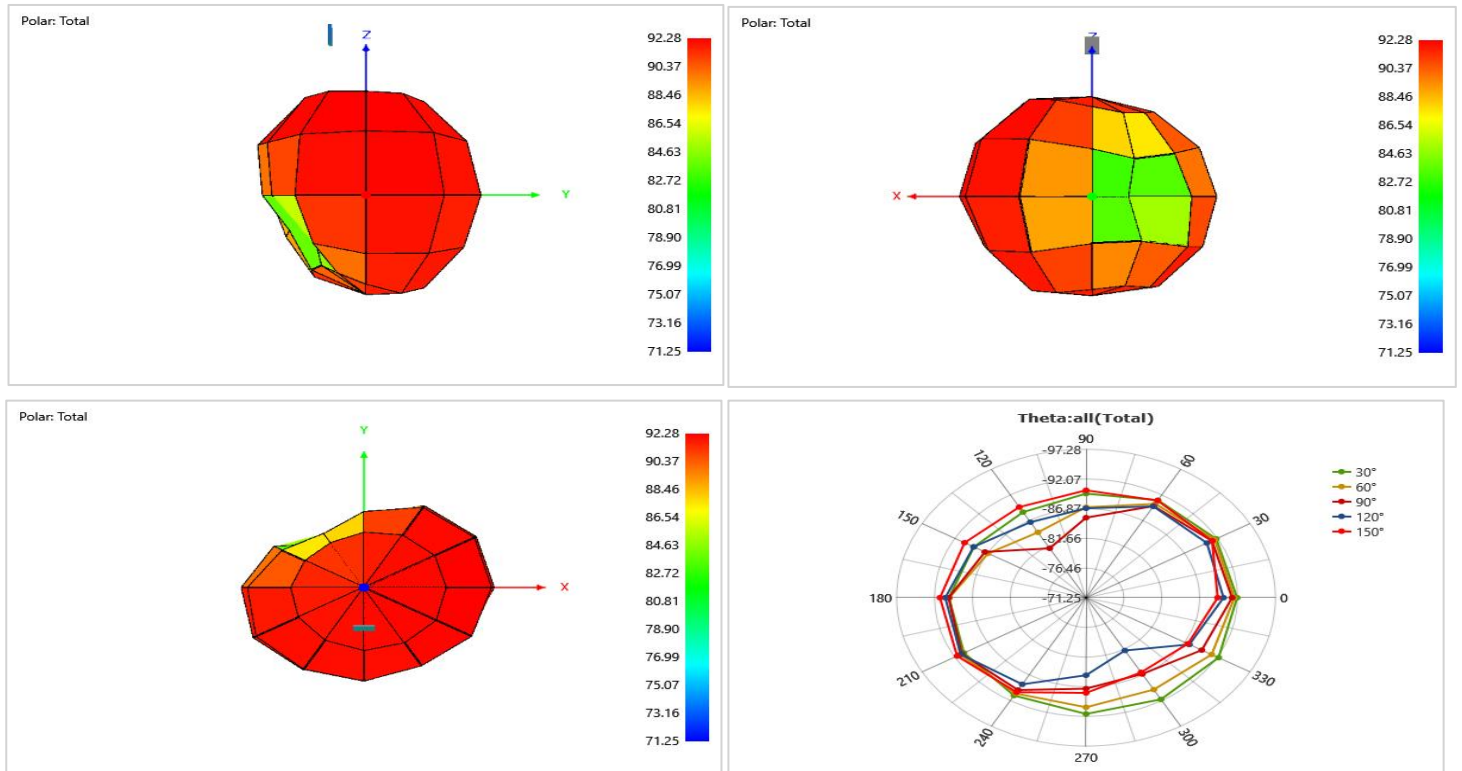


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

6、无源场型图 Passive field pattern diagram

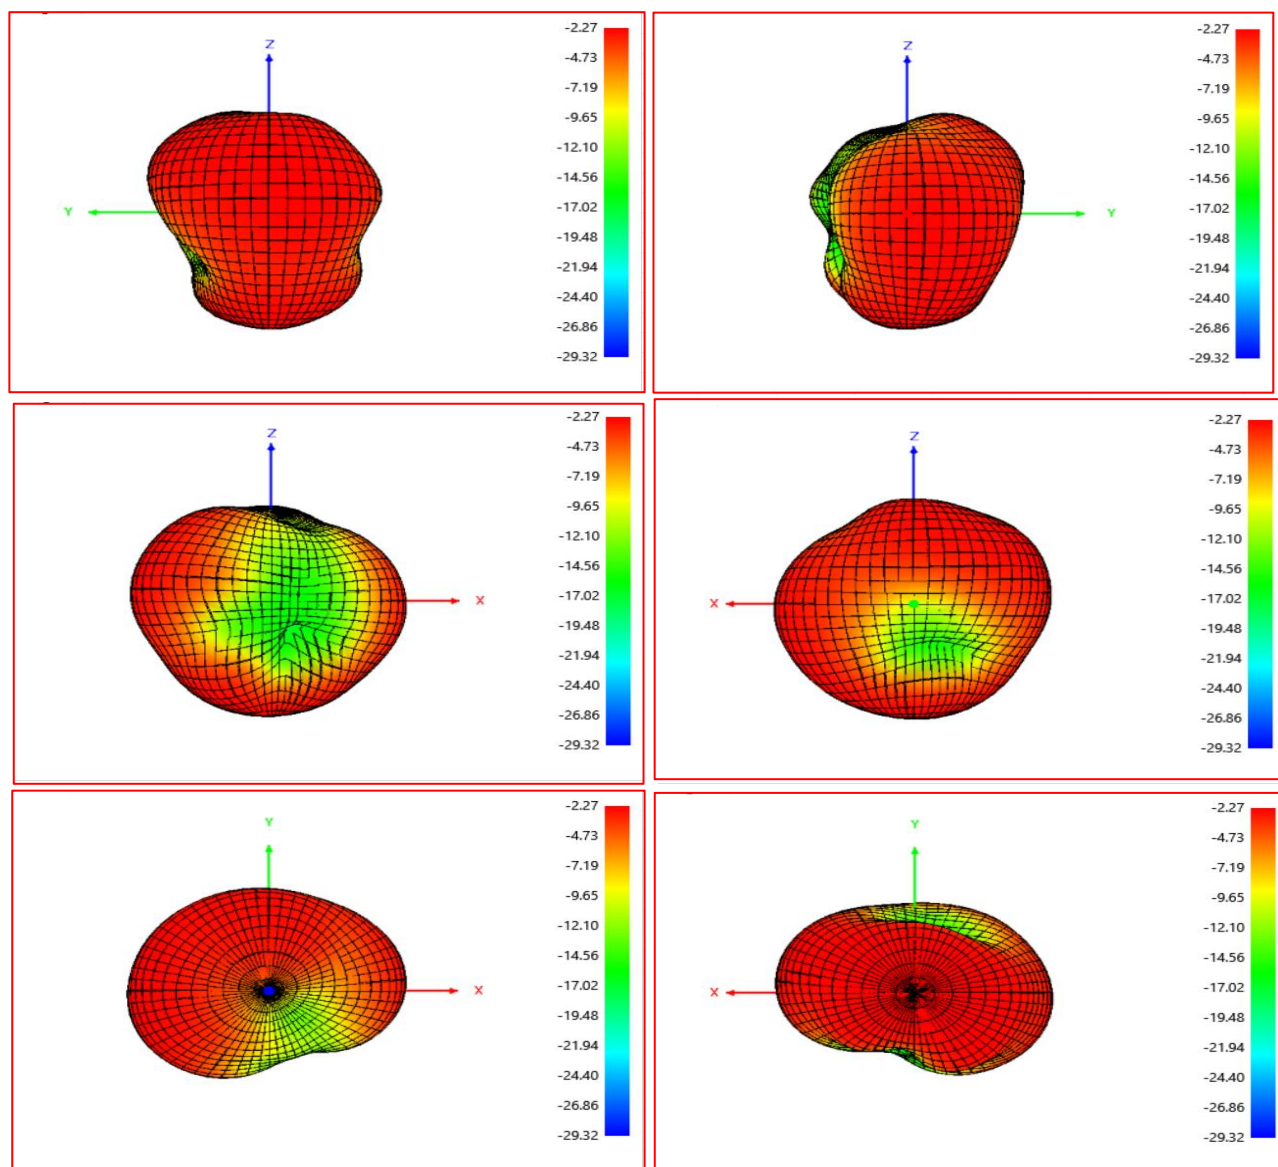


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一、包装方式 Packing method:

1 . 整版 FPC Full FPC:

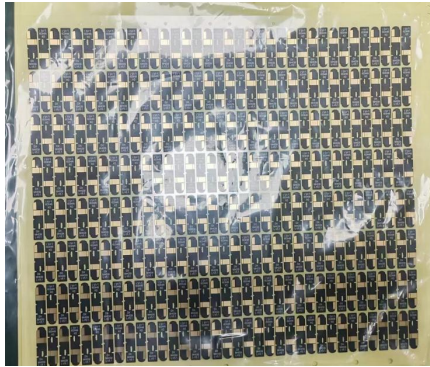

2. 入盒包装, 每盒50版 Packed in boxes with 50 editions per box;



二、运输要求 Transport requirements:

产品包装件运输时, 应防潮、防破损、防污染。

When the product package is transported, it should be moisture-proof, damage-proof and pollution-proof.

三、存储要求 Storage requirements:

产品包装件应在仓库内堆放, 库房应干燥、通风、清洁。

Product packages should be stacked in the warehouse, which should be dry, ventilated and clean.

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd