

FCC

SAR

TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Mobile Phone**

ISSUED TO  
Realme Chongqing Mobile Telecommunications Corp., Ltd.

No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District,  
Chongqing, China



Tested by: Zong Liyao  
Zong Liyao

(Engineer)

Date: Dec. 13, 2019

Approved by: Wei Yanquan

Wei Yanquan  
(Chief Engineer)

Date: Dec. 13, 2019

Report No.: BL-SZ19A0431-701

EUT Name: Mobile Phone

Model Name: RMX1921

Brand Name: realme

FCC ID: 2AUYFRMX1921

Test Standard: FCC 47 CFR Part 2.1093

ANSI C95.1: 1999, IEEE 1528: 2013

Maximum SAR: Head (1 g): 1.192 W/kg

Body-worn (1 g): 0.403 W/kg

Hotspot (1 g): 1.074 W/kg

Test Conclusion: Pass

Test Date: Nov. 18, 2019 ~ Dec. 10, 2019

Date of Issue: Dec. 13, 2019

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

**Revision History**

| <u>Version</u> | <u>Issue Date</u>    | <u>Revisions Content</u> |
|----------------|----------------------|--------------------------|
| <u>Rev. 01</u> | <u>Dec. 13, 2019</u> | <u>Initial Issue</u>     |

**TABLE OF CONTENTS**

|     |                                                         |    |
|-----|---------------------------------------------------------|----|
| 1   | GENERAL INFORMATION.....                                | 5  |
| 1.1 | Identification of the Testing Laboratory.....           | 5  |
| 1.2 | Identification of the Responsible Testing Location..... | 5  |
| 1.3 | Test Environment Condition.....                         | 5  |
| 1.4 | Announce.....                                           | 6  |
| 2   | PRODUCT INFORMATION.....                                | 7  |
| 2.1 | Applicant Information.....                              | 7  |
| 2.2 | Manufacturer Information.....                           | 7  |
| 2.3 | Factory Information.....                                | 7  |
| 2.4 | General Description for Equipment under Test (EUT)..... | 7  |
| 2.5 | Ancillary Equipment.....                                | 7  |
| 2.6 | Technical Information.....                              | 8  |
| 2.7 | Power Reduction Description.....                        | 10 |
| 3   | SUMMARY OF TEST RESULT.....                             | 11 |
| 3.1 | Test Standards.....                                     | 11 |
| 3.2 | Device Category and SAR Limit.....                      | 12 |
| 3.3 | Test Result Summary.....                                | 13 |
| 3.4 | Test Uncertainty.....                                   | 15 |
| 4   | MEASUREMENT SYSTEM.....                                 | 16 |
| 4.1 | Specific Absorption Rate (SAR) Definition.....          | 16 |
| 4.2 | DASY SAR System.....                                    | 17 |
| 5   | SYSTEM VERIFICATION.....                                | 24 |
| 5.1 | Purpose of System Check.....                            | 24 |
| 5.2 | System Check Setup.....                                 | 24 |
| 6   | TEST POSITION CONFIGURATIONS.....                       | 25 |
| 6.1 | Head Exposure Conditions.....                           | 25 |
| 6.2 | Body-worn Position Conditions.....                      | 27 |

|       |                                                  |    |
|-------|--------------------------------------------------|----|
| 6.3   | Hotspot Mode Exposure Position Conditions.....   | 28 |
| 6.4   | Product Specific 10g Exposure Consideration..... | 28 |
| 7     | MEASUREMENT PROCEDURE.....                       | 29 |
| 7.1   | Measurement Process Diagram.....                 | 29 |
| 7.2   | SAR Scan General Requirement.....                | 30 |
| 7.3   | Measurement Procedure.....                       | 31 |
| 7.4   | Area & Zoom Scan Procedure.....                  | 31 |
| 8     | CONDUCTED RF OUPUT POWER.....                    | 32 |
| 8.1   | GSM.....                                         | 32 |
| 8.2   | WCDMA.....                                       | 33 |
| 8.3   | LTE.....                                         | 34 |
| 8.4   | WIFI.....                                        | 41 |
| 8.5   | Bluetooth.....                                   | 43 |
| 8.6   | Power Reduction List.....                        | 44 |
| 9     | TEST EXCLUSION CONSIDERATION.....                | 74 |
| 9.1   | SAR Test Exclusion Consideration Table.....      | 75 |
| 10    | TEST RESULT.....                                 | 79 |
| 10.1  | GSM 850 GSM 850 Head SAR.....                    | 79 |
| 10.2  | GSM 1900.....                                    | 80 |
| 10.3  | WCDMA Band 2.....                                | 81 |
| 10.4  | WCDMA Band 4.....                                | 82 |
| 10.5  | WCDMA Band 5.....                                | 83 |
| 10.6  | LTE Band 2 (20MHz Bandwidth).....                | 84 |
| 10.7  | LTE Band 4 (20MHz Bandwidth).....                | 86 |
| 10.8  | LTE Band 5 (10MHz Bandwidth).....                | 88 |
| 10.9  | LTE Band 7 (20MHz Bandwidth).....                | 89 |
| 10.10 | LTE Band 41 (20MHz Bandwidth).....               | 91 |
| 10.11 | WIFI 2.4GHz.....                                 | 93 |
| 10.12 | 5G WIFI.....                                     | 95 |
| 10.13 | Bluetooth.....                                   | 96 |
| 11    | SAR Measurement Variability.....                 | 97 |
| 12    | SIMULTANEOUS TRANSMISSION.....                   | 98 |

|                                                    |     |
|----------------------------------------------------|-----|
| 12.1 Simultaneous Transmission Mode Consider.....  | 98  |
| 12.2 Sum SAR of Simultaneous Transmission.....     | 99  |
| 13 TEST EQUIPMENTS LIST.....                       | 118 |
| ANNEX A SIMULATING LIQUID VERIFICATION RESULT..... | 119 |
| ANNEX B SYSTEM CHECK RESULT.....                   | 120 |
| ANNEX C TEST DATA.....                             | 146 |
| ANNEX D EUT EXTERNAL PHOTOS.....                   | 195 |
| ANNEX E SAR TEST SETUP PHOTOS.....                 | 195 |
| ANNEX F CALIBRATION REPORT.....                    | 195 |



# 1 GENERAL INFORMATION

## 1.1 Identification of the Testing Laboratory

|              |                                                                                                                                 |
|--------------|---------------------------------------------------------------------------------------------------------------------------------|
| Company Name | Shenzhen BALUN Technology Co., Ltd.                                                                                             |
| Address      | Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China |
| Phone Number | +86 755 6685 0100                                                                                                               |
| Fax Number   | +86 755 6182 4271                                                                                                               |

## 1.2 Identification of the Responsible Testing Location

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Location             | Shenzhen BALUN Technology Co., Ltd.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Address                   | Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Accreditation Certificate | <p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p> |
| Description               | All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## 1.3 Test Environment Condition

|                           |                    |
|---------------------------|--------------------|
| Ambient Temperature       | 21°C to 23°C       |
| Ambient Relative Humidity | 36% to 48%         |
| Ambient Pressure          | 100 KPa to 102 KPa |

## 1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

|           |                                                                                         |
|-----------|-----------------------------------------------------------------------------------------|
| Applicant | Realme Chongqing Mobile Telecommunications Corp., Ltd.                                  |
| Address   | No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District, Chongqing, China |

### 2.2 Manufacturer Information

|              |                                                                                         |
|--------------|-----------------------------------------------------------------------------------------|
| Manufacturer | Realme Chongqing Mobile Telecommunications Corp., Ltd.                                  |
| Address      | No.2 Building, No.24 Nichang Boulevard, Huixing Block, Yubei District, Chongqing, China |

### 2.3 Factory Information

|         |     |
|---------|-----|
| Factory | N/A |
| Address | N/A |

### 2.4 General Description for Equipment under Test (EUT)

|                                           |                             |
|-------------------------------------------|-----------------------------|
| EUT Name                                  | Mobile Phone                |
| Model Name Under Test                     | RMX1921                     |
| Series Model Name                         | N/A                         |
| Description of Model name differentiation | N/A                         |
| Hardware Version                          | 2RA133                      |
| Software Version                          | ColorOS V6.0.1              |
| Dimensions (Approx.)                      | 158.7 mm × 75.2 mm × 8.6 mm |
| Weight (Approx.)                          | 183 g(with battery)         |

### 2.5 Ancillary Equipment

|                       |                    |                                                    |
|-----------------------|--------------------|----------------------------------------------------|
| Ancillary Equipment 1 | Li-Polymer Battery |                                                    |
|                       | Brand Name         | realme                                             |
|                       | Model No.          | BLP741                                             |
|                       | Serial No.         | N/A                                                |
|                       | Capacitance        | Rated: 3920mAh/15.17Wh<br>Typical: 4000mAh/15.48Wh |
|                       | Rated Voltage      | 3.87 V                                             |
|                       | Limited Voltage    | 4.45 V                                             |
|                       | Manufacturer       | Ningde Ampere Technology Limited                   |

## 2.6 Technical Information

|                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network and Wireless connectivity                                                                                                                                                                                                         | 2G Network GSM/GPRS/EDGE 850/900/1800/1900 MHz<br>3G Network WCDMA/HSDPA/HSUPA/HSPA+ Band 1/2/4/5/8<br>4G Network FDD LTE Band 1/2/3/4/5/7/8/20/28<br>TDD LTE Band 38/39/40/41<br>Bluetooth 5.0 (BR+EDR+BLE)<br>2.4G WIFI 802.11b, 802.11g, 802.11n(HT20)<br>5G WIFI 802.11a, 802.11n(HT20/40) and 802.11ac(VHT20/ 40/ 80)<br>GPS, GLONASS, BDS, NFC |
| Note:<br>The EUT is a mobile phone, supporting dual SIM card slots under the same transceiver. Both SIM card slots support GSM, WCDMA and LTE. And both SIM card slots share the same transceiver, so only SIM1 is tested in this report. |                                                                                                                                                                                                                                                                                                                                                      |

The requirement for the following technical information of the EUT was tested in this report:

|                   |                                                                     |                                              |                     |
|-------------------|---------------------------------------------------------------------|----------------------------------------------|---------------------|
| Operating Mode    | GSM, WCDMA, LTE, 2.4G WLAN, 5G WLAN, Bluetooth                      |                                              |                     |
| Frequency Range   | GSM 850                                                             | TX: 824 ~ 849 MHz                            | RX: 869 ~ 894 MHz   |
|                   | GSM 1900                                                            | TX: 1850 ~ 1910 MHz                          | RX: 1930 ~ 1990 MHz |
|                   | WCDMA Band 2                                                        | TX: 1850 ~ 1910 MHz                          | RX: 1930 ~ 1990 MHz |
|                   | WCDMA Band 4                                                        | TX: 1710 ~ 1755 MHz                          | RX: 2110 ~ 2155 MHz |
|                   | WCDMA Band 5                                                        | TX: 824 ~ 849 MHz                            | RX: 869 ~ 894 MHz   |
|                   | LTE Band 2                                                          | TX: 1850 ~ 1910 MHz                          | RX: 1930 ~ 1990 MHz |
|                   | LTE Band 4                                                          | TX: 1710 ~ 1755 MHz                          | RX: 2110 ~ 2155 MHz |
|                   | LTE Band 5                                                          | TX: 824 ~ 849 MHz                            | RX: 869 ~ 894 MHz   |
|                   | LTE Band 7                                                          | TX: 2500 ~ 2570 MHz                          | RX: 2620 ~ 2690 MHz |
|                   | LTE Band 38                                                         | TX: 2570 ~ 2620 MHz                          | RX: 2570 ~ 2620 MHz |
|                   | LTE Band 41                                                         | TX: 2496 ~ 2690 MHz                          | RX: 2496 ~ 2690 MHz |
|                   | 802.11b/g<br>/n(HT20)                                               | 2400 ~ 2483.5 MHz                            |                     |
|                   | 802.11a/<br>/n(HT20/HT40)<br>/ac(VHT20/VHT40/<br>VHT80)             | 5150 ~ 5250 MHz                              |                     |
|                   |                                                                     | 5250 ~ 5350 MHz                              |                     |
|                   |                                                                     | 5470 ~ 5725 MHz                              |                     |
|                   |                                                                     | 5725 ~ 5850 MHz                              |                     |
|                   | Bluetooth                                                           | 2400 ~ 2483.5 MHz                            |                     |
| Antenna Type      | WWAN: PIFA Antenna<br>WLAN: PIFA Antenna<br>Bluetooth: PIFA Antenna |                                              |                     |
| DTM               | Not Support                                                         |                                              |                     |
| Hotspot Function  | Support                                                             |                                              |                     |
| Power Reduction   | Support                                                             |                                              |                     |
| Exposure Category | General Population/Uncontrolled exposure                            |                                              |                     |
| EUT Stage         | Portable Device                                                     |                                              |                     |
| Product           | Type                                                                |                                              |                     |
|                   | <input checked="" type="checkbox"/> Production unit                 | <input type="checkbox"/> Identical prototype |                     |
| Note:             |                                                                     |                                              |                     |



1. This device supports both LTE Band 38 and Band 41. Since the supported frequency span for LTE Band 38 falls completely within the supports frequency span for LTE Band 41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE Band 41.
2. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz WLAN/5.5GHz WLAN supports WiFi Direct (GC only).
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device has two WWAN transmit antennas. WWAN down antenna is located at the bottom edge of the device, and WWAN up antenna is located at the top edge of the device. Up and Down antenna support the same WWAN frequency bands, and they can't transmit simultaneously.

## 2.7 Power Reduction Description

This mobile phone device supports the receiver detection mechanism. This device uses the receiver to indicate whether the user is making a call in head or body or hand.

When there is a voice call (including VOIP) and the audio is actively routed through the earpiece receiver, which indicating the head exposure condition it will trigger the head exposure reduced the power.

When there is a voice call (including VOIP), and the audio is actively routed through the headset or speaker, which indicating the body or extremity exposure conditions and the proximity sensor will trigger the body or extremity exposure reduced the power.

When this device used data mode only, and the receiver will not work too, the reduced the power are same as body or extremity exposure.

### **For WWAN Up Antenna (4 sets of power reduction levels)**

Head, Body and Extremity exposure condition conduction different reduction category, the detail as below:

#### **a) Head exposure conditions(3 sets of power reduction levels):**

**Reduced power level 1**-PCS1900; WCDMA Band 2/4; LTE Band2/4/7/38/41(WWAN Use Only)

When the device is transmitting at the WWAN Up Antenna, power reduction will be enabled for those bands.

**Reduced power level 2** -PCS1900; WCDMA Band 2/4; LTE Band2/4/7/38/41(WWAN+WLAN2.4G)

When the device WLAN 2.4GHz is transmitting simultaneously with the WWAN Up Antenna, power reduction will be enabled for those bands.

**Reduced power level 3** -PCS1900; WCDMA Band 2/4; LTE Band2/4/7/38/41(WWAN+WLAN5G)

When the device WLAN 5GHz is transmitting simultaneously with the WWAN Up Antenna, power reduction will be enabled for those bands.

#### **b) Body (Body-worn and Hotspot) and Product Specific exposure conditions:**

**Reduced power level 4**-WCDMA Band 2; LTE Band2/7

Once the device is transmitting at the WWAN Up Antenna, the receiver to indicate user in body or hand. Power reduction will be enabled for those bands.

The power reduction support in WWAN Use Only, WWAN transmitting simultaneously with the WLAN 2.4G or WWAN transmitting simultaneously with the WLAN 5G mode.

Note: When the device transmitting at the WWAN LAT at Head exposure, Body or Extremity conditions this product not support power reduction function.

### **For WLAN Antenna (2 sets of power reduction levels)**

#### **Head exposure conditions(2 sets of power reduction levels):**

**Reduced power level 1**-WLAN2.4G, WLAN 5G (WLAN Use Only)

When the device is transmitting at the WLAN Antenna, power reduction will be enabled for those bands.

**Reduced power level 2**-WLAN2.4G, WLAN 5G(WLAN +WWAN)

When the device WLAN Antenna is transmitting simultaneously with the WWAN Antenna, power reduction will be enabled for those bands.

Note: When the device transmitting at the WLAN at head and body exposure conditions this product not support power reduction function.

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

| No. | Identity                  | Document Title                                                                                                                                                              |
|-----|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR Part 2             | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations                                                                                               |
| 2   | ANSI/IEEE Std. C95.1-1999 | IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz                                                  |
| 3   | IEEE Std. 1528-2013       | Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| 4   | FCC KDB 447498 D01 v06    | Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies                                                                                      |
| 5   | FCC KDB 941225 D01 v03r01 | 3G SAR MEAUREMENT PROCEDURES                                                                                                                                                |
| 6   | FCC KDB 941225 D05 v02r05 | SAR Evaluation Considerations for LTE Devices                                                                                                                               |
| 7   | FCC KDB 941225 D06 v02r01 | SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities                                                                                            |
| 8   | FCC KDB 865664 D01 v01r04 | SAR Measurement 100 MHz to 6 GHz                                                                                                                                            |
| 9   | FCC KDB 865664 D02 v01r02 | RF Exposure Reporting                                                                                                                                                       |
| 10  | FCC KDB 648474 D04 v01r03 | SAR Evaluation Considerations for Wireless Handsets                                                                                                                         |
| 11  | KDB 248227 D01 v02r02     | SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters                                                                                                                           |

### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

| Body Position                                                                       | SAR Value (W/Kg)                             |                                      |
|-------------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------|
|                                                                                     | General Population/<br>Uncontrolled Exposure | Occupational/<br>Controlled Exposure |
| Whole-Body SAR<br>(averaged over the entire body)                                   | 0.08                                         | 0.4                                  |
| Partial-Body SAR<br>(averaged over any 1 gram of tissue)                            | 1.60                                         | 8.0                                  |
| SAR for hands, wrists, feet and<br>ankles<br>(averaged over any 10 grams of tissue) | 4.0                                          | 20.0                                 |

NOTE:

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

#### 3.3.1 Highest Head and Body SAR (1 g Value)

| Band                                                                                                                                                                                                                                                                                                                               | Maximum Scaled SAR<br>(W/kg) |                     |                   | Maximum Report SAR<br>(W/kg) |       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------|-------------------|------------------------------|-------|
|                                                                                                                                                                                                                                                                                                                                    | Head                         | Body                |                   | Head                         | Body  |
|                                                                                                                                                                                                                                                                                                                                    |                              | Body-worn<br>(15mm) | Hotspot<br>(10mm) |                              |       |
| GSM 850                                                                                                                                                                                                                                                                                                                            | 0.573                        | 0.191               | 0.370             | 1.192                        | 1.074 |
| GSM 1900                                                                                                                                                                                                                                                                                                                           | 1.081                        | 0.354               | <b>1.074</b>      |                              |       |
| WCDMA Band 2                                                                                                                                                                                                                                                                                                                       | <b>1.192</b>                 | 0.373               | 0.846             |                              |       |
| WCDMA Band 4                                                                                                                                                                                                                                                                                                                       | 1.042                        | <b>0.403</b>        | 0.870             |                              |       |
| WCDMA Band 5                                                                                                                                                                                                                                                                                                                       | 0.424                        | 0.225               | 0.283             |                              |       |
| LTE Band 2                                                                                                                                                                                                                                                                                                                         | 1.181                        | 0.385               | 0.646             |                              |       |
| LTE Band 4                                                                                                                                                                                                                                                                                                                         | 1.138                        | 0.399               | 0.772             |                              |       |
| LTE Band 5                                                                                                                                                                                                                                                                                                                         | 0.481                        | 0.220               | 0.341             |                              |       |
| LTE Band 7                                                                                                                                                                                                                                                                                                                         | 1.133                        | 0.271               | 0.605             |                              |       |
| LTE Band 41                                                                                                                                                                                                                                                                                                                        | 0.994                        | 0.334               | 0.477             |                              |       |
| 2.4G WLAN                                                                                                                                                                                                                                                                                                                          | 1.177                        | 0.256               | 0.460             |                              |       |
| 5.2G WLAN                                                                                                                                                                                                                                                                                                                          | 1.161                        | 0.212               | 0.410             |                              |       |
| 5.6G WLAN                                                                                                                                                                                                                                                                                                                          | 0.572                        | 0.229               | /                 |                              |       |
| 5.8G WLAN                                                                                                                                                                                                                                                                                                                          | 1.127                        | 0.135               | 0.237             |                              |       |
| Bluetooth                                                                                                                                                                                                                                                                                                                          | 0.272                        | 0.063               | 0.127             |                              |       |
| Limit (W/kg)                                                                                                                                                                                                                                                                                                                       | 1.60                         |                     |                   |                              |       |
| Verdict                                                                                                                                                                                                                                                                                                                            | Pass                         |                     |                   |                              |       |
| Note: This device supports both LTE Band 38 and Band 41. Since the supported frequency span for LTE Band 38 falls completely within the supports frequency span for LTE Band 41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE Band 41. |                              |                     |                   |                              |       |

#### 3.3.2 Highest Product Specific SAR (10 g Value)

| Band         | Maximum Scaled SAR<br>(W/kg) | Maximum Report SAR<br>(W/kg) |
|--------------|------------------------------|------------------------------|
|              | Specific (0mm)               | Specific (0mm)               |
| WCDMA Band 2 | 1.694                        | 1.694                        |
| LTE Band 2   | 1.661                        |                              |
| LTE Band 7   | 1.343                        |                              |
| 5.3G WLAN    | 0.274                        |                              |
| 5.6G WLAN    | 0.416                        |                              |
| Limit (W/kg) | 4.0                          |                              |
| Verdict      | Pass                         |                              |

### 3.3.3 Highest Simultaneous SAR

| Position               | Simultaneous Configuration  | Simultaneous SAR (W/kg) | Limit (W/kg) | Verdict |
|------------------------|-----------------------------|-------------------------|--------------|---------|
| Head (1g)              | WCDMA + 2.4G WLAN           | 1.498                   | 1.6          | Pass    |
| Body-worn (1g)         | WCDMA + 5G WLAN + Bluetooth | 0.671                   | 1.6          | Pass    |
| Hotspot Mode (1g)      | GSM+ 5G WLAN + Bluetooth    | 1.500                   | 1.6          | Pass    |
| Product Specific (10g) | LTE + 5G WLAN               | 2.036                   | 4.0          | Pass    |



### 3.4 Test Uncertainty

According to KDB 865664 D01, When the highest measured 1 g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.192 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

## 4 MEASUREMENT SYSTEM

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,

$\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 4.2 DASY SAR System

### 4.2.1 DASY SAR System Diagram

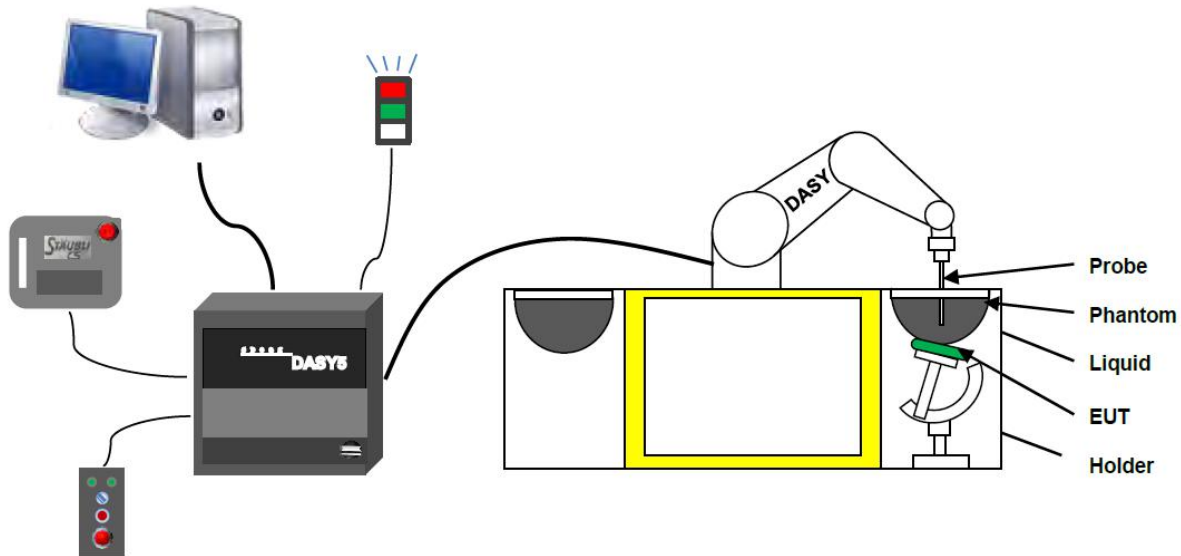

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision  
(repeatability  $\pm 0.02$  mm)
- High reliability  
(industrial design)
- Low maintenance costs  
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements  
(brush less synchron motors; no stepper motors)
- Low ELF interference  
(motor control \_elds shielded via the closed metallic construction shields)

### 4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7510 with following specifications is used.

|               |                                                                                                                                                                                                                  |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether) |
| Calibration   | ISO/IEC 17025 calibration service available                                                                                                                                                                      |
| Frequency     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                                                       |
| Directivity   | $\pm 0.2$ dB in HSL (rotation around probe axis) ; $\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                           |
| Dynamic range | 5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                               |
| Dimensions    | Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm                                                                                          |
| Application   | General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)                                                                                           |



#### E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

#### 4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M $\Omega$ m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

#### 4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

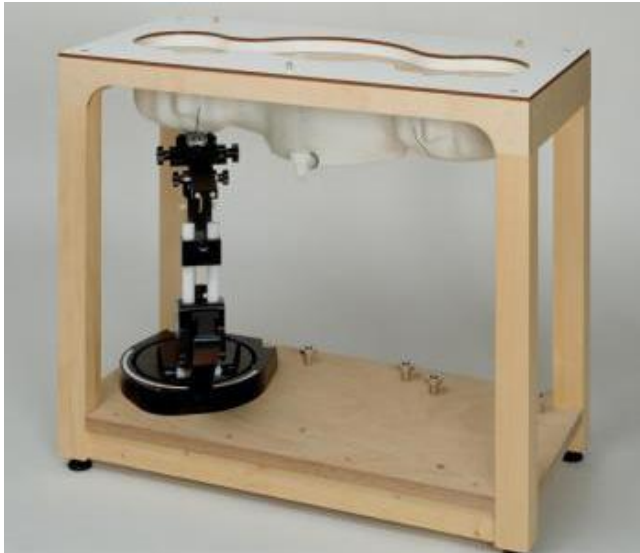

- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Photo of Phantom SN1859



| Serial Number | Material                           | Length | Height |
|---------------|------------------------------------|--------|--------|
| SN 1857 SAM1  | Vinylester, glass fiber reinforced | 1000   | 500    |
| SN 1859 SAM2  | Vinylester, glass fiber reinforced | 1000   | 500    |



#### 4.2.6 Device Holder


The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than  $1^\circ$ .

#### 4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

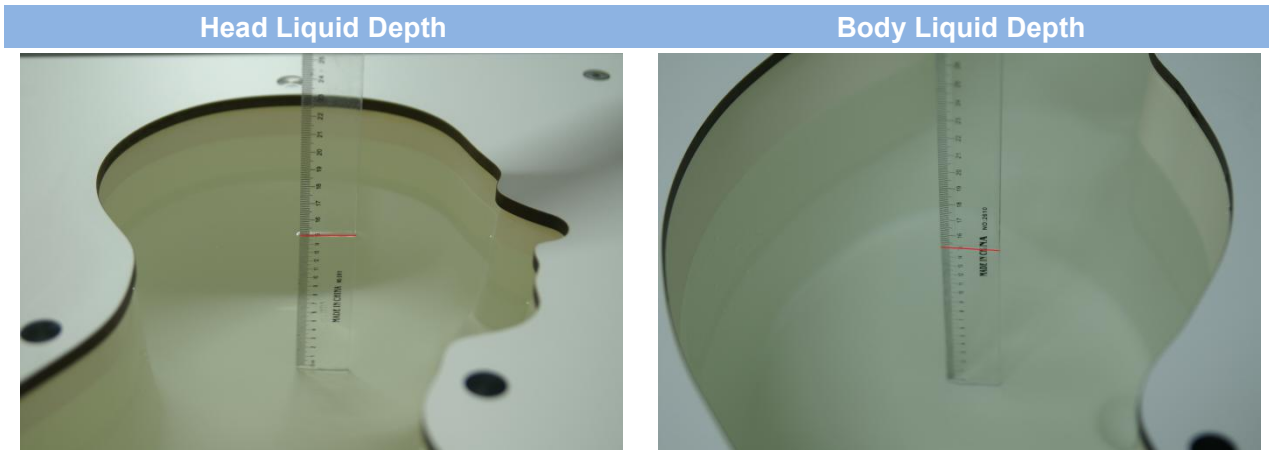

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

| Head (Reference IEEE1528)           |              |                       |                  |             |                     |             |                                |                            |
|-------------------------------------|--------------|-----------------------|------------------|-------------|---------------------|-------------|--------------------------------|----------------------------|
| Frequency<br>(MHz)                  | Water<br>(%) | Sugar<br>(%)          | Cellulose<br>(%) | Salt<br>(%) | Preventol<br>(%)    | DGBE<br>(%) | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 750                                 | 41.1         | 57.0                  | 0.2              | 1.4         | 0.2                 | 0           | 0.89                           | 41.9                       |
| 835                                 | 40.3         | 57.9                  | 0.2              | 1.4         | 0.2                 | 0           | 0.90                           | 41.5                       |
| 900                                 | 40.3         | 57.9                  | 0.2              | 1.4         | 0.2                 | 0           | 0.97                           | 41.5                       |
| 1800, 1900, 2000                    | 55.2         | 0                     | 0                | 0.3         | 0                   | 44.5        | 1.4                            | 40.0                       |
| 2450                                | 55.0         | 0                     | 0                | 0.1         | 0                   | 44.9        | 1.80                           | 39.2                       |
| 2600                                | 54.9         | 0                     | 0                | 0.1         | 0                   | 45.0        | 1.96                           | 39.0                       |
| Frequency<br>(MHz)                  | Water<br>(%) | Hexyl Carbitol<br>(%) |                  |             | Triton X-100<br>(%) |             | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 5200                                | 62.52        | 17.24                 |                  |             | 17.24               |             | 4.66                           | 36.0                       |
| 5800                                | 62.52        | 17.24                 |                  |             | 17.24               |             | 5.27                           | 35.3                       |
| Body (From instrument manufacturer) |              |                       |                  |             |                     |             |                                |                            |
| Frequency<br>(MHz)                  | Water<br>(%) | Sugar<br>(%)          | Cellulose<br>(%) | Salt<br>(%) | Preventol<br>(%)    | DGBE<br>(%) | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 750                                 | 51.7         | 47.2                  | 0                | 0.9         | 0.1                 | 0           | 0.96                           | 55.5                       |
| 835                                 | 50.8         | 48.2                  | 0                | 0.9         | 0.1                 | 0           | 0.97                           | 55.2                       |
| 900                                 | 50.8         | 48.2                  | 0                | 0.9         | 0.1                 | 0           | 1.05                           | 55.0                       |
| 1800, 1900, 2000                    | 70.2         | 0                     | 0                | 0.4         | 0                   | 29.4        | 1.52                           | 53.3                       |
| 2450                                | 68.6         | 0                     | 0                | 0.1         | 0                   | 31.3        | 1.95                           | 52.7                       |
| 2600                                | 68.2         | 0                     | 0                | 0.1         | 0                   | 31.7        | 2.16                           | 52.5                       |
| Frequency(MHz)                      | Water        | DGBE<br>(%)           |                  |             | Salt<br>(%)         |             | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 5200                                | 78.60        | 21.40                 |                  |             | /                   |             | 5.54                           | 47.86                      |
| 5800                                | 78.50        | 21.40                 |                  |             | 0.1                 |             | 6.0                            | 48.20                      |


## 5 SYSTEM VERIFICATION

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

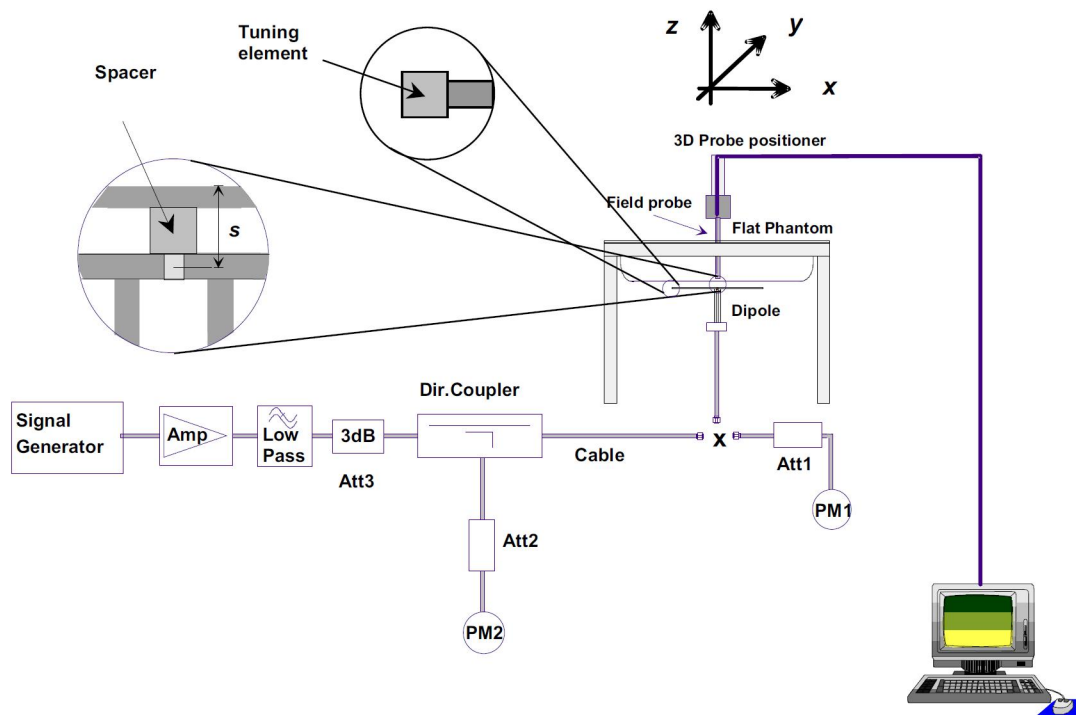

## 6 TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

### 6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.


#### 6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

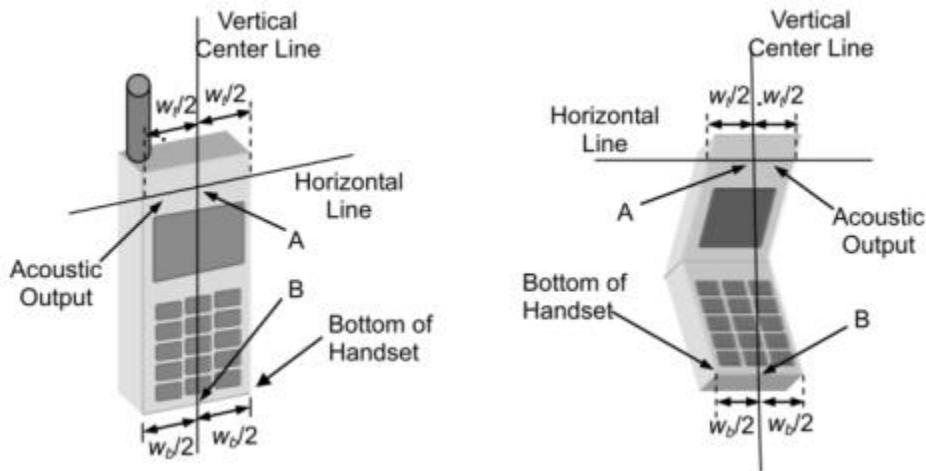

#### 6.1.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

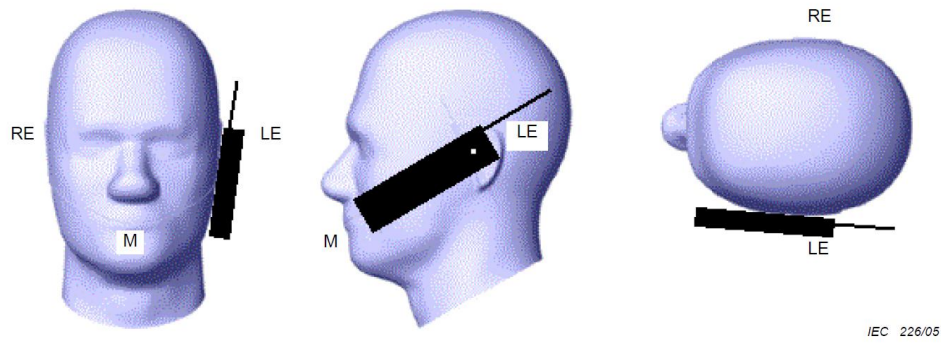

### 6.1.3 Tilted Position

- To position the device in the "cheek" position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




## 6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5$  mm to support compliance.

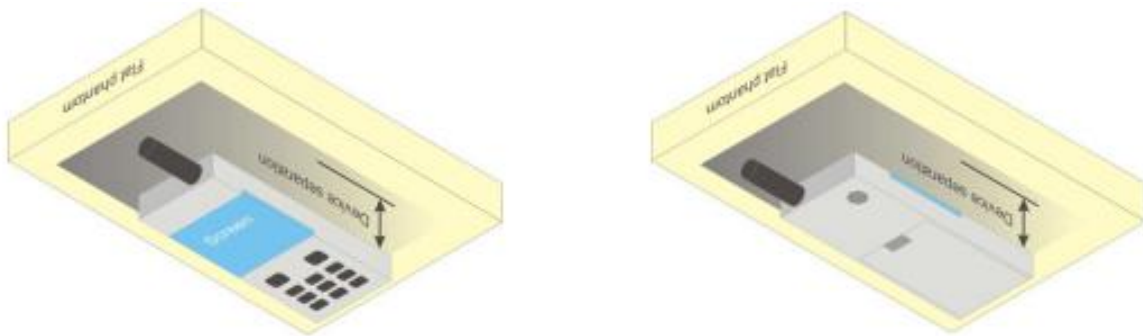

### 6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

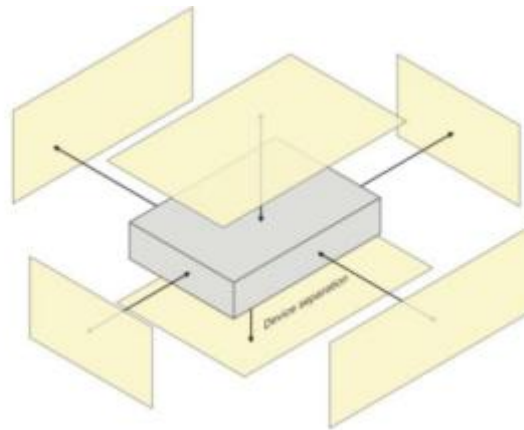


### 6.4 Product Specific 10g Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

## 7 MEASUREMENT PROCEDURE

### 7.1 Measurement Process Diagram

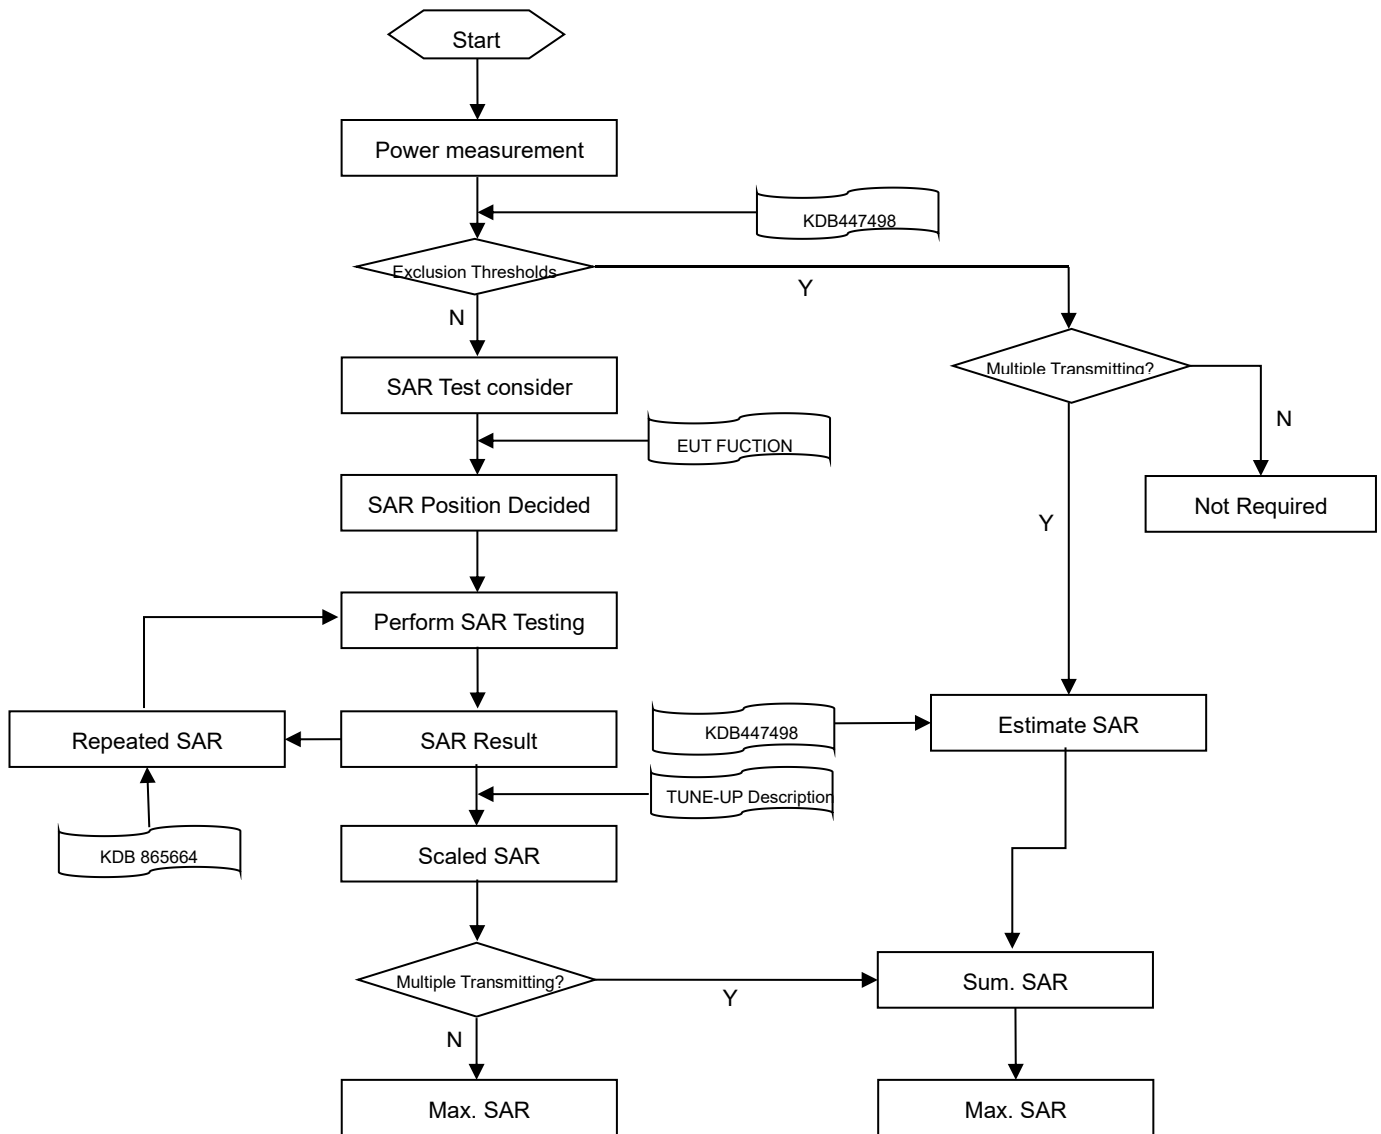



## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

|                                                                                                        |                                                  |                                                                        | ≤3GHz                                                                                                                                                                                                                                                                  | >3GHz                                              |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface |                                                  |                                                                        | 5±1 mm                                                                                                                                                                                                                                                                 | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              |                                                  |                                                                        | 30°±1°                                                                                                                                                                                                                                                                 | 20°±1°                                             |
| Maximum area scan spatial resolution: $\Delta x$ Area , $\Delta y$ Area                                |                                                  |                                                                        | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3–4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm   |
|                                                                                                        |                                                  |                                                                        | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                    |
| Maximum zoom scan spatial resolution: $\Delta x$ Zoom , $\Delta y$ Zoom                                |                                                  |                                                                        | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                                                                                                                                                                                                   | 3–4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*   |
| Maximum zoom scan spatial resolution, normal to phantom surface                                        | uniform grid: $\Delta z$ Zoom (n)                |                                                                        | $\leq 5$ mm                                                                                                                                                                                                                                                            | 3–4 GHz: $\leq 4$ mm                               |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 4–5 GHz: $\leq 3$ mm                               |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 5–6 GHz: $\leq 2$ mm                               |
|                                                                                                        | graded grid                                      | $\Delta z$ Zoom (1): between 1st two points closest to phantom surface | $\leq 4$ mm                                                                                                                                                                                                                                                            | 3–4 GHz: $\leq 3$ mm                               |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 4–5 GHz: $\leq 2.5$ mm                             |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 5–6 GHz: $\leq 2$ mm                               |
|                                                                                                        | $\Delta z$ Zoom (n>1): between subsequent points |                                                                        | $\leq 1.5 \cdot \Delta z$ Zoom (n-1)                                                                                                                                                                                                                                   |                                                    |
| Minimum zoom scan volume                                                                               | x, y, z                                          |                                                                        | $\geq 30$ mm                                                                                                                                                                                                                                                           | 3–4 GHz: $\geq 28$ mm                              |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 4–5 GHz: $\geq 25$ mm                              |
|                                                                                                        |                                                  |                                                                        |                                                                                                                                                                                                                                                                        | 5–6 GHz: $\geq 22$ mm                              |

### Note:

- $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
- \* When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is  $\leq 1.4$  W/kg,  $\leq 8$  mm,  $\leq 7$  mm and  $\leq 5$  mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8 CONDUCTED RF OUTPUT POWER

### 8.1 GSM

| GSM 850               |                          |       |       |             |                            |       |              |             |
|-----------------------|--------------------------|-------|-------|-------------|----------------------------|-------|--------------|-------------|
| GSM850 Band           | Burst Average Power(dBm) |       |       | Tune-up     | Frame-Averaged power (dBm) |       |              | Tune-up     |
| Channel               | 128                      | 190   | 251   | Limit (dBm) | 128                        | 190   | 251          | Limit (dBm) |
| GSM (GMSK, 1-Slot)    | 33.40                    | 33.26 | 33.13 | 33.50       | 24.21                      | 24.07 | 23.94        | 24.31       |
| GPRS (GMSK, 1-Slot)   | 33.23                    | 33.02 | 33.02 | 33.50       | 24.04                      | 23.83 | 23.83        | 24.31       |
| GPRS (GMSK, 2-Slots)  | 30.87                    | 30.71 | 31.04 | 31.50       | 24.74                      | 24.58 | <b>24.91</b> | 25.37       |
| GPRS (GMSK, 3-Slots)  | 28.92                    | 28.83 | 28.80 | 29.00       | 24.50                      | 24.41 | 24.38        | 24.58       |
| GPRS (GMSK, 4-Slots)  | 27.35                    | 27.27 | 27.70 | 28.00       | 24.17                      | 24.09 | 24.52        | 24.82       |
| EGPRS (8PSK, 1-Slot)  | 29.54                    | 29.66 | 29.74 | 30.00       | 20.35                      | 20.47 | 20.55        | 20.81       |
| EGPRS (8PSK, 2-Slots) | 27.57                    | 27.19 | 27.48 | 28.00       | 21.44                      | 21.06 | 21.35        | 21.87       |
| EGPRS (8PSK, 3-Slots) | 26.42                    | 26.02 | 26.32 | 26.50       | 22.00                      | 21.60 | 21.90        | 22.08       |
| EGPRS (8PSK, 4-Slots) | 25.81                    | 25.34 | 25.61 | 26.00       | 22.63                      | 22.16 | 22.43        | 22.82       |
| GSM 1900              |                          |       |       |             |                            |       |              |             |
| GSM1900 Band          | Burst Average Power(dBm) |       |       | Tune-up     | Frame-Averaged power(dBm)  |       |              | Tune-up     |
| Channel               | 512                      | 661   | 810   | Limit (dBm) | 512                        | 661   | 810          | Limit (dBm) |
| GSM (GMSK, 1-Slot)    | 30.01                    | 29.82 | 29.95 | 30.50       | 20.82                      | 20.63 | 20.76        | 21.31       |
| GPRS (GMSK, 1-Slot)   | 29.91                    | 29.77 | 29.88 | 30.50       | 20.72                      | 20.58 | 20.69        | 21.31       |
| GPRS (GMSK, 2-Slots)  | 27.58                    | 27.48 | 27.62 | 28.00       | 21.45                      | 21.35 | 21.49        | 21.87       |
| GPRS (GMSK, 3-Slots)  | 26.01                    | 26.28 | 26.41 | 27.00       | 21.59                      | 21.86 | <b>21.99</b> | 22.58       |
| GPRS (GMSK, 4-Slots)  | 24.78                    | 24.62 | 24.62 | 25.00       | 21.60                      | 21.44 | 21.44        | 21.82       |
| EGPRS (8PSK, 1-Slot)  | 28.91                    | 28.84 | 28.95 | 29.50       | 19.72                      | 19.65 | 19.76        | 20.31       |
| EGPRS (8PSK, 2-Slots) | 27.18                    | 27.13 | 27.22 | 27.50       | 21.05                      | 21.00 | 21.09        | 21.37       |
| EGPRS (8PSK, 3-Slots) | 26.00                    | 25.77 | 25.88 | 26.50       | 21.58                      | 21.35 | 21.46        | 22.08       |
| EGPRS (8PSK, 4-Slots) | 24.84                    | 24.63 | 24.61 | 25.00       | 21.66                      | 21.45 | 21.43        | 21.82       |

Note<sup>1</sup>: SAR testing was performed on the maximum frame-averaged power mode.

Note<sup>2</sup>: The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.19 dB

Frame-averaged power = Burst averaged power (2 Tx Slots) – 6.13 dB

Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.42dB

Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.18 dB

## 8.2 WCDMA

| WCDMA           | Band 2       |       |       |                     | Band 4 |       |              |                     |
|-----------------|--------------|-------|-------|---------------------|--------|-------|--------------|---------------------|
| Channel         | 9262         | 9400  | 9538  | Tune-up Limit (dBm) | 1312   | 1412  | 1513         | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>22.72</b> | 22.56 | 22.69 | 24.00               | 22.66  | 22.79 | <b>22.89</b> | 24.00               |
| HSDPA Subtest-1 | 21.74        | 21.57 | 21.67 | 22.00               | 21.60  | 21.77 | 21.85        | 22.00               |
| HSDPA Subtest-2 | 21.75        | 21.60 | 21.67 | 22.00               | 21.67  | 21.76 | 21.90        | 22.00               |
| HSDPA Subtest-3 | 21.27        | 21.12 | 21.19 | 21.50               | 21.16  | 21.29 | 21.38        | 21.50               |
| HSDPA Subtest-4 | 21.25        | 21.10 | 21.22 | 21.50               | 21.15  | 21.29 | 21.36        | 21.50               |
| HSUPA Subtest-1 | 21.51        | 21.29 | 21.61 | 22.00               | 21.62  | 21.80 | 21.60        | 22.00               |
| HSUPA Subtest-2 | 19.66        | 19.54 | 19.71 | 20.00               | 19.56  | 19.74 | 19.90        | 20.00               |
| HSUPA Subtest-3 | 20.74        | 20.53 | 20.67 | 21.00               | 20.57  | 20.72 | 20.85        | 21.00               |
| HSUPA Subtest-4 | 19.70        | 19.56 | 19.64 | 20.00               | 19.62  | 19.75 | 19.85        | 20.00               |
| HSUPA Subtest-5 | 21.68        | 21.54 | 21.66 | 22.00               | 21.60  | 21.68 | 21.83        | 22.00               |
| WCDMA           | Band 5       |       |       |                     | -      |       |              |                     |
| Channel         | 4132         | 4182  | 4233  | Tune-up Limit (dBm) | -      | -     | -            | -                   |
| RMC 12.2Kbps    | <b>22.99</b> | 22.96 | 22.96 | 24.30               | -      | -     | -            | -                   |
| HSDPA Subtest-1 | 22.09        | 21.94 | 21.95 | 22.30               | -      | -     | -            | -                   |
| HSDPA Subtest-2 | 22.15        | 21.99 | 21.97 | 22.30               | -      | -     | -            | -                   |
| HSDPA Subtest-3 | 21.55        | 21.52 | 21.48 | 21.80               | -      | -     | -            | -                   |
| HSDPA Subtest-4 | 21.56        | 21.53 | 21.47 | 21.80               | -      | -     | -            | -                   |
| HSUPA Subtest-1 | 22.12        | 21.94 | 21.99 | 22.30               | -      | -     | -            | -                   |
| HSUPA Subtest-2 | 20.05        | 19.99 | 20.00 | 20.30               | -      | -     | -            | -                   |
| HSUPA Subtest-3 | 21.11        | 21.01 | 20.99 | 21.30               | -      | -     | -            | -                   |
| HSUPA Subtest-4 | 20.09        | 19.96 | 20.02 | 20.30               | -      | -     | -            | -                   |
| HSUPA Subtest-5 | 22.18        | 21.98 | 21.99 | 22.30               | -      | -     | -            | -                   |

### 8.3 LTE

**FDD LTE Band 2**

| Bandwidth<br>(MHz) | RB Set<br><br>Channel | Power (dBm) |              |       |                           |       |       |       |                           |
|--------------------|-----------------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
|                    |                       | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    |                       | 18700       | 18900        | 19100 |                           | 18700 | 18900 | 19100 |                           |
| 20 MHz             | 1 (RB_Pos:0)          | 23.32       | <b>23.34</b> | 23.14 | 24.00                     | 22.86 | 22.76 | 22.58 | 23.00                     |
|                    | 1 (RB_Pos:50)         | 23.07       | 22.98        | 22.96 | 24.00                     | 22.61 | 22.35 | 22.31 | 23.00                     |
|                    | 1 (RB_Pos:99)         | 23.21       | 23.16        | 23.10 | 24.00                     | 22.77 | 22.53 | 22.46 | 23.00                     |
|                    | 50 (RB_Pos:0)         | 22.16       | 22.18        | 22.11 | 23.00                     | 21.25 | 21.29 | 21.18 | 22.00                     |
|                    | 50 (RB_Pos:25)        | 22.17       | 22.02        | 22.04 | 23.00                     | 21.25 | 21.13 | 21.12 | 22.00                     |
|                    | 50 (RB_Pos:50)        | 22.10       | 22.07        | 22.02 | 23.00                     | 21.24 | 21.19 | 21.08 | 22.00                     |
|                    | 100 (RB_Pos:0)        | 22.13       | 22.12        | 22.06 | 23.00                     | 21.25 | 21.18 | 21.15 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set<br><br>Channel | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                       | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    |                       | 18675       | 18900        | 19125 |                           | 18675 | 18900 | 19125 |                           |
| 15 MHz             | 1 (RB_Pos:0)          | 23.20       | 23.06        | 23.16 | 24.00                     | 22.08 | 22.50 | 22.54 | 23.00                     |
|                    | 1 (RB_Pos:38)         | 23.08       | 22.96        | 23.02 | 24.00                     | 22.01 | 22.30 | 22.34 | 23.00                     |
|                    | 1 (RB_Pos:74)         | 23.05       | 22.98        | 23.19 | 24.00                     | 22.04 | 22.42 | 22.44 | 23.00                     |
|                    | 36 (RB_Pos:0)         | 22.15       | 22.03        | 22.08 | 23.00                     | 21.22 | 21.15 | 21.15 | 22.00                     |
|                    | 36 (RB_Pos:20)        | 22.10       | 22.01        | 22.03 | 23.00                     | 21.21 | 21.17 | 21.11 | 22.00                     |
|                    | 36 (RB_Pos:39)        | 22.07       | 22.04        | 22.06 | 23.00                     | 21.18 | 21.16 | 21.15 | 22.00                     |
|                    | 75 (RB_Pos:0)         | 22.10       | 22.09        | 22.05 | 23.00                     | 21.22 | 21.22 | 21.17 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set<br><br>Channel | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                       | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    |                       | 18650       | 18900        | 19150 |                           | 18650 | 18900 | 19150 |                           |
| 10 MHz             | 1 (RB_Pos:0)          | 23.35       | 23.24        | 23.11 | 24.00                     | 22.23 | 22.63 | 22.12 | 23.00                     |
|                    | 1 (RB_Pos:25)         | 23.07       | 22.94        | 23.14 | 24.00                     | 21.98 | 22.35 | 22.12 | 23.00                     |
|                    | 1 (RB_Pos:49)         | 23.24       | 23.10        | 23.20 | 24.00                     | 22.17 | 22.52 | 22.10 | 23.00                     |
|                    | 25 (RB_Pos:0)         | 22.09       | 21.99        | 22.04 | 23.00                     | 21.20 | 21.11 | 21.20 | 22.00                     |
|                    | 25 (RB_Pos:12)        | 22.09       | 22.00        | 22.07 | 23.00                     | 21.20 | 21.10 | 21.24 | 22.00                     |
|                    | 25 (RB_Pos:25)        | 22.11       | 21.92        | 22.12 | 23.00                     | 21.18 | 21.02 | 21.29 | 22.00                     |
|                    | 50 (RB_Pos:0)         | 22.12       | 21.94        | 22.07 | 23.00                     | 21.19 | 21.08 | 21.18 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set<br><br>Channel | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                       | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    |                       | 18625       | 18900        | 19175 |                           | 18625 | 18900 | 19175 |                           |
| 5 MHz              | 1 (RB_Pos:0)          | 23.07       | 23.03        | 23.17 | 24.00                     | 22.28 | 22.54 | 22.22 | 23.00                     |
|                    | 1 (RB_Pos:13)         | 23.14       | 23.00        | 23.23 | 24.00                     | 22.28 | 22.55 | 22.27 | 23.00                     |
|                    | 1 (RB_Pos:24)         | 23.07       | 22.94        | 23.21 | 24.00                     | 22.22 | 22.51 | 22.25 | 23.00                     |
|                    | 12 (RB_Pos:0)         | 22.08       | 21.97        | 22.21 | 23.00                     | 21.25 | 21.19 | 21.26 | 22.00                     |
|                    | 12 (RB_Pos:6)         | 22.07       | 21.94        | 22.17 | 23.00                     | 21.21 | 21.15 | 21.28 | 22.00                     |
|                    | 12 (RB_Pos:13)        | 22.07       | 21.95        | 22.15 | 23.00                     | 21.22 | 21.16 | 21.28 | 22.00                     |

|                    | 25 (RB_Pos:0) | 22.08       | 21.91 | 22.14 | 23.00                     | 21.18 | 21.08 | 21.20 | 22.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18615       | 18900 | 19185 |                           | 18615 | 18900 | 19185 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 23.08       | 22.92 | 23.18 | 24.00                     | 21.94 | 22.34 | 22.18 | 23.00                     |
|                    | 1 (RB_Pos:8)  | 23.06       | 22.94 | 23.23 | 24.00                     | 21.91 | 22.30 | 22.12 | 23.00                     |
|                    | 1 (RB_Pos:14) | 23.01       | 22.94 | 23.22 | 24.00                     | 21.95 | 22.30 | 22.14 | 23.00                     |
|                    | 8 (RB_Pos:0)  | 22.05       | 21.97 | 22.16 | 23.00                     | 21.21 | 21.10 | 21.26 | 22.00                     |
|                    | 8 (RB_Pos:3)  | 22.11       | 21.97 | 22.19 | 23.00                     | 21.23 | 21.10 | 21.30 | 22.00                     |
|                    | 8 (RB_Pos:7)  | 22.08       | 21.95 | 22.14 | 23.00                     | 21.19 | 21.05 | 21.23 | 22.00                     |
|                    | 15 (RB_Pos:0) | 22.04       | 21.92 | 22.19 | 23.00                     | 21.13 | 21.05 | 21.14 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18607       | 18900 | 19193 |                           | 18607 | 18900 | 19193 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 23.09       | 22.88 | 23.11 | 24.00                     | 22.06 | 22.27 | 22.08 | 23.00                     |
|                    | 1 (RB_Pos:3)  | 23.16       | 22.92 | 23.17 | 24.00                     | 22.14 | 22.31 | 22.11 | 23.00                     |
|                    | 1 (RB_Pos:5)  | 23.10       | 22.86 | 23.16 | 24.00                     | 22.05 | 22.24 | 22.10 | 23.00                     |
|                    | 3 (RB_Pos:0)  | 22.91       | 22.84 | 23.07 | 24.00                     | 22.07 | 22.14 | 22.29 | 23.00                     |
|                    | 3 (RB_Pos:1)  | 22.97       | 22.91 | 23.16 | 24.00                     | 22.11 | 22.18 | 22.35 | 23.00                     |
|                    | 3 (RB_Pos:3)  | 22.87       | 22.84 | 23.11 | 24.00                     | 22.08 | 22.07 | 22.28 | 23.00                     |
|                    | 6 (RB_Pos:0)  | 21.93       | 21.85 | 22.08 | 23.00                     | 21.17 | 20.86 | 21.30 | 22.00                     |

| FDD LTE Band 4     |                |             |       |              |                           |       |       |       |                           |
|--------------------|----------------|-------------|-------|--------------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20050       | 20175 | 20300        |                           | 20050 | 20175 | 20300 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 23.25       | 23.32 | <b>23.37</b> | 24.00                     | 22.84 | 22.82 | 22.86 | 23.00                     |
|                    | 1 (RB_Pos:50)  | 23.02       | 23.26 | 23.24        | 24.00                     | 22.64 | 22.71 | 22.74 | 23.00                     |
|                    | 1 (RB_Pos:99)  | 23.12       | 23.34 | 23.13        | 24.00                     | 22.73 | 22.78 | 22.55 | 23.00                     |
|                    | 50 (RB_Pos:0)  | 22.28       | 22.42 | 22.36        | 23.00                     | 21.45 | 21.55 | 21.43 | 22.00                     |
|                    | 50 (RB_Pos:25) | 22.24       | 22.37 | 22.41        | 23.00                     | 21.40 | 21.51 | 21.51 | 22.00                     |
|                    | 50 (RB_Pos:50) | 22.19       | 22.34 | 22.24        | 23.00                     | 21.31 | 21.40 | 21.35 | 22.00                     |
|                    | 100 (RB_Pos:0) | 22.20       | 22.33 | 22.29        | 23.00                     | 21.35 | 21.47 | 21.36 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19275       | 19575 | 19875        |                           | 19275 | 19575 | 19875 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 23.28       | 23.28 | 23.50        | 24.00                     | 22.22 | 22.77 | 22.95 | 23.00                     |
|                    | 1 (RB_Pos:38)  | 23.03       | 23.22 | 23.23        | 24.00                     | 22.10 | 22.72 | 22.68 | 23.00                     |
|                    | 1 (RB_Pos:74)  | 23.15       | 23.33 | 23.19        | 24.00                     | 22.18 | 22.79 | 22.63 | 23.00                     |
|                    | 36 (RB_Pos:0)  | 22.24       | 22.34 | 22.40        | 23.00                     | 21.37 | 21.53 | 21.50 | 22.00                     |
|                    | 36 (RB_Pos:20) | 22.14       | 22.33 | 22.31        | 23.00                     | 21.24 | 21.45 | 21.39 | 22.00                     |

|                    |                |             |       |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
|                    | 36 (RB_Pos:39) | 22.23       | 22.29 | 22.19 | 23.00                     | 21.35 | 21.40 | 21.32 | 22.00                     |
|                    | 75 (RB_Pos:0)  | 22.18       | 22.34 | 22.32 | 23.00                     | 21.34 | 21.44 | 21.39 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19250       | 19575 | 19900 |                           | 19250 | 19575 | 19900 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 23.23       | 23.19 | 23.35 | 24.00                     | 22.19 | 22.68 | 22.44 | 23.00                     |
|                    | 1 (RB_Pos:25)  | 23.08       | 23.24 | 23.20 | 24.00                     | 22.09 | 22.70 | 22.29 | 23.00                     |
|                    | 1 (RB_Pos:49)  | 23.04       | 23.18 | 23.14 | 24.00                     | 22.08 | 22.65 | 22.22 | 23.00                     |
|                    | 25 (RB_Pos:0)  | 22.25       | 22.34 | 22.32 | 23.00                     | 21.40 | 21.47 | 21.51 | 22.00                     |
|                    | 25 (RB_Pos:12) | 22.30       | 22.35 | 22.30 | 23.00                     | 21.38 | 21.42 | 21.52 | 22.00                     |
|                    | 25 (RB_Pos:25) | 22.14       | 22.32 | 22.19 | 23.00                     | 21.31 | 21.41 | 21.40 | 22.00                     |
|                    | 50 (RB_Pos:0)  | 22.24       | 22.30 | 22.29 | 23.00                     | 21.38 | 21.45 | 21.45 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19225       | 19575 | 19925 |                           | 19225 | 19575 | 19925 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 23.23       | 23.31 | 23.27 | 24.00                     | 22.43 | 22.85 | 22.46 | 23.00                     |
|                    | 1 (RB_Pos:13)  | 23.28       | 23.31 | 23.24 | 24.00                     | 22.51 | 22.88 | 22.42 | 23.00                     |
|                    | 1 (RB_Pos:24)  | 23.06       | 23.29 | 23.18 | 24.00                     | 22.37 | 22.86 | 22.36 | 23.00                     |
|                    | 12 (RB_Pos:0)  | 22.25       | 22.30 | 22.25 | 23.00                     | 21.43 | 21.54 | 21.43 | 22.00                     |
|                    | 12 (RB_Pos:6)  | 22.26       | 22.30 | 22.24 | 23.00                     | 21.45 | 21.53 | 21.41 | 22.00                     |
|                    | 12 (RB_Pos:13) | 22.24       | 22.27 | 22.21 | 23.00                     | 21.44 | 21.50 | 21.38 | 22.00                     |
|                    | 25 (RB_Pos:0)  | 22.22       | 22.28 | 22.24 | 23.00                     | 21.37 | 21.40 | 21.29 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19215       | 19575 | 19935 |                           | 19215 | 19575 | 19935 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)   | 23.23       | 23.25 | 23.18 | 24.00                     | 22.15 | 22.68 | 22.33 | 23.00                     |
|                    | 1 (RB_Pos:8)   | 23.17       | 23.22 | 23.19 | 24.00                     | 22.14 | 22.66 | 22.22 | 23.00                     |
|                    | 1 (RB_Pos:14)  | 23.16       | 23.22 | 23.14 | 24.00                     | 22.15 | 22.68 | 22.22 | 23.00                     |
|                    | 8 (RB_Pos:0)   | 22.20       | 22.26 | 22.16 | 23.00                     | 21.39 | 21.44 | 21.30 | 22.00                     |
|                    | 8 (RB_Pos:3)   | 22.25       | 22.32 | 22.21 | 23.00                     | 21.41 | 21.44 | 21.31 | 22.00                     |
|                    | 8 (RB_Pos:7)   | 22.18       | 22.26 | 22.13 | 23.00                     | 21.40 | 21.38 | 21.28 | 22.00                     |
|                    | 15 (RB_Pos:0)  | 22.21       | 22.24 | 22.19 | 23.00                     | 21.32 | 21.42 | 21.23 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19207       | 19575 | 19943 |                           | 19207 | 19575 | 19943 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)   | 23.08       | 23.18 | 23.12 | 24.00                     | 22.28 | 22.60 | 22.17 | 23.00                     |
|                    | 1 (RB_Pos:3)   | 23.17       | 23.21 | 23.15 | 24.00                     | 22.33 | 22.66 | 22.22 | 23.00                     |
|                    | 1 (RB_Pos:5)   | 23.13       | 23.16 | 23.09 | 24.00                     | 22.31 | 22.61 | 22.19 | 23.00                     |
|                    | 3 (RB_Pos:0)   | 23.15       | 23.20 | 23.15 | 24.00                     | 22.29 | 22.54 | 22.39 | 23.00                     |
|                    | 3 (RB_Pos:1)   | 23.20       | 23.30 | 23.26 | 24.00                     | 22.36 | 22.59 | 22.45 | 23.00                     |
|                    | 3 (RB_Pos:3)   | 23.14       | 23.21 | 23.14 | 24.00                     | 22.32 | 22.48 | 22.38 | 23.00                     |
|                    | 6 (RB_Pos:0)   | 22.11       | 22.22 | 22.03 | 23.00                     | 21.36 | 21.18 | 21.37 | 22.00                     |

**FDD LTE Band 5**

| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|--------------------|----------------|-------------|-------|--------------|---------------------------|-------|-------|-------|---------------------------|
|                    |                | QPSK        |       |              | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20450       | 20525 | 20600        |                           | 20450 | 20525 | 20600 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 23.20       | 23.24 | <b>23.31</b> | 24.30                     | 22.04 | 22.64 | 22.25 | 23.30                     |
|                    | 1 (RB_Pos:25)  | 23.24       | 23.22 | 23.25        | 24.30                     | 22.10 | 22.55 | 22.20 | 23.30                     |
|                    | 1 (RB_Pos:49)  | 23.10       | 23.29 | 23.16        | 24.30                     | 22.05 | 22.58 | 22.15 | 23.30                     |
|                    | 25 (RB_Pos:0)  | 22.12       | 22.25 | 22.30        | 23.30                     | 21.19 | 21.37 | 21.38 | 22.30                     |
|                    | 25 (RB_Pos:12) | 22.18       | 22.29 | 22.28        | 23.30                     | 21.27 | 21.34 | 21.37 | 22.30                     |
|                    | 25 (RB_Pos:25) | 22.20       | 22.21 | 22.22        | 23.30                     | 21.29 | 21.29 | 21.32 | 22.30                     |
|                    | 50 (RB_Pos:0)  | 22.19       | 22.21 | 22.22        | 23.30                     | 21.27 | 21.32 | 21.30 | 22.30                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20425       | 20525 | 20625        |                           | 20425 | 20525 | 20625 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 23.13       | 23.24 | 23.24        | 24.30                     | 22.32 | 22.76 | 22.31 | 23.30                     |
|                    | 1 (RB_Pos:13)  | 23.18       | 23.30 | 23.27        | 24.30                     | 22.34 | 22.79 | 22.36 | 23.30                     |
|                    | 1 (RB_Pos:24)  | 23.06       | 23.26 | 23.18        | 24.30                     | 22.30 | 22.68 | 22.28 | 23.30                     |
|                    | 12 (RB_Pos:0)  | 22.16       | 22.25 | 22.30        | 23.30                     | 21.30 | 21.46 | 21.34 | 22.30                     |
|                    | 12 (RB_Pos:6)  | 22.15       | 22.26 | 22.24        | 23.30                     | 21.27 | 21.42 | 21.35 | 22.30                     |
|                    | 12 (RB_Pos:13) | 22.12       | 22.20 | 22.20        | 23.30                     | 21.25 | 21.42 | 21.31 | 22.30                     |
|                    | 25 (RB_Pos:0)  | 22.12       | 22.20 | 22.24        | 23.30                     | 21.24 | 21.39 | 21.23 | 22.30                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20415       | 20525 | 20635        |                           | 20415 | 20525 | 20635 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)   | 23.10       | 23.26 | 23.21        | 24.30                     | 22.08 | 22.57 | 22.24 | 23.30                     |
|                    | 1 (RB_Pos:8)   | 23.12       | 23.22 | 23.17        | 24.30                     | 22.01 | 22.52 | 22.20 | 23.30                     |
|                    | 1 (RB_Pos:14)  | 23.11       | 23.22 | 23.21        | 24.30                     | 21.99 | 22.56 | 22.20 | 23.30                     |
|                    | 8 (RB_Pos:0)   | 22.12       | 22.27 | 22.22        | 23.30                     | 21.31 | 21.33 | 21.30 | 22.30                     |
|                    | 8 (RB_Pos:3)   | 22.18       | 22.28 | 22.22        | 23.30                     | 21.29 | 21.34 | 21.34 | 22.30                     |
|                    | 8 (RB_Pos:7)   | 22.11       | 22.25 | 22.17        | 23.30                     | 21.28 | 21.29 | 21.26 | 22.30                     |
|                    | 15 (RB_Pos:0)  | 22.09       | 22.23 | 22.23        | 23.30                     | 21.22 | 21.33 | 21.21 | 22.30                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20407       | 20525 | 20643        |                           | 20407 | 20525 | 20643 |                           |
| 1.4MHz             | 1 (RB_Pos:0)   | 23.02       | 23.15 | 23.12        | 24.30                     | 22.20 | 22.49 | 22.12 | 23.30                     |
|                    | 1 (RB_Pos:3)   | 23.07       | 23.19 | 23.15        | 24.30                     | 22.23 | 22.54 | 22.16 | 23.30                     |
|                    | 1 (RB_Pos:5)   | 23.04       | 23.16 | 23.11        | 24.30                     | 22.18 | 22.46 | 22.13 | 23.30                     |
|                    | 3 (RB_Pos:0)   | 23.03       | 23.10 | 23.13        | 24.30                     | 22.16 | 22.30 | 22.29 | 23.30                     |
|                    | 3 (RB_Pos:1)   | 23.11       | 23.13 | 23.16        | 24.30                     | 22.21 | 22.40 | 22.36 | 23.30                     |
|                    | 3 (RB_Pos:3)   | 23.02       | 23.10 | 23.10        | 24.30                     | 22.14 | 22.30 | 22.29 | 23.30                     |
|                    | 6 (RB_Pos:0)   | 22.04       | 22.19 | 22.11        | 23.30                     | 21.27 | 21.14 | 21.35 | 22.30                     |



**FDD LTE Band 7**

| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20850       | 21100        | 21350 |                           | 20850 | 21100 | 21350 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 22.69       | <b>22.80</b> | 22.79 | 23.50                     | 22.27 | 22.32 | 22.20 | 22.50                     |
|                    | 1 (RB_Pos:50)  | 22.57       | 22.65        | 22.64 | 23.50                     | 22.20 | 22.07 | 22.10 | 22.50                     |
|                    | 1 (RB_Pos:99)  | 22.58       | 22.59        | 22.58 | 23.50                     | 22.20 | 22.05 | 22.05 | 22.50                     |
|                    | 50 (RB_Pos:0)  | 21.70       | 21.76        | 21.81 | 22.50                     | 20.81 | 20.88 | 20.86 | 21.50                     |
|                    | 50 (RB_Pos:25) | 21.68       | 21.83        | 21.78 | 22.50                     | 20.81 | 20.92 | 20.81 | 21.50                     |
|                    | 50 (RB_Pos:50) | 21.67       | 21.69        | 21.75 | 22.50                     | 20.73 | 20.77 | 20.80 | 21.50                     |
|                    | 100 (RB_Pos:0) | 21.68       | 21.75        | 21.77 | 22.50                     | 20.79 | 20.83 | 20.82 | 21.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20825       | 21100        | 21375 |                           | 20825 | 21100 | 21375 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 22.63       | 22.69        | 22.75 | 23.50                     | 21.69 | 22.22 | 22.10 | 22.50                     |
|                    | 1 (RB_Pos:38)  | 22.54       | 22.55        | 22.61 | 23.50                     | 21.61 | 22.00 | 22.04 | 22.50                     |
|                    | 1 (RB_Pos:74)  | 22.56       | 22.55        | 22.53 | 23.50                     | 21.59 | 21.94 | 22.03 | 22.50                     |
|                    | 36 (RB_Pos:0)  | 21.68       | 21.67        | 21.70 | 22.50                     | 20.78 | 20.82 | 20.75 | 21.50                     |
|                    | 36 (RB_Pos:20) | 21.68       | 21.75        | 21.70 | 22.50                     | 20.73 | 20.90 | 20.76 | 21.50                     |
|                    | 36 (RB_Pos:39) | 21.57       | 21.62        | 21.63 | 22.50                     | 20.72 | 20.75 | 20.70 | 21.50                     |
|                    | 75 (RB_Pos:0)  | 21.63       | 21.68        | 21.63 | 22.50                     | 20.73 | 20.81 | 20.74 | 21.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20800       | 21100        | 21400 |                           | 20800 | 21100 | 21400 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 22.67       | 22.68        | 22.72 | 23.50                     | 21.67 | 22.12 | 21.75 | 22.50                     |
|                    | 1 (RB_Pos:25)  | 22.58       | 22.59        | 22.64 | 23.50                     | 21.63 | 21.97 | 21.74 | 22.50                     |
|                    | 1 (RB_Pos:49)  | 22.57       | 22.62        | 22.55 | 23.50                     | 21.59 | 22.00 | 21.67 | 22.50                     |
|                    | 25 (RB_Pos:0)  | 21.71       | 21.70        | 21.72 | 22.50                     | 20.82 | 20.79 | 20.85 | 21.50                     |
|                    | 25 (RB_Pos:12) | 21.68       | 21.68        | 21.70 | 22.50                     | 20.81 | 20.77 | 20.85 | 21.50                     |
|                    | 25 (RB_Pos:25) | 21.70       | 21.71        | 21.63 | 22.50                     | 20.74 | 20.81 | 20.79 | 21.50                     |
|                    | 50 (RB_Pos:0)  | 21.66       | 21.70        | 21.69 | 22.50                     | 20.78 | 20.78 | 20.82 | 21.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20775       | 21100        | 21425 |                           | 20775 | 21100 | 21425 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 22.60       | 22.61        | 22.63 | 23.50                     | 21.80 | 22.16 | 21.80 | 22.50                     |
|                    | 1 (RB_Pos:13)  | 22.66       | 22.66        | 22.64 | 23.50                     | 21.93 | 22.25 | 21.86 | 22.50                     |
|                    | 1 (RB_Pos:24)  | 22.53       | 22.54        | 22.55 | 23.50                     | 21.84 | 22.11 | 21.77 | 22.50                     |
|                    | 12 (RB_Pos:0)  | 21.67       | 21.63        | 21.65 | 22.50                     | 20.83 | 20.84 | 20.81 | 21.50                     |
|                    | 12 (RB_Pos:6)  | 21.67       | 21.60        | 21.69 | 22.50                     | 20.83 | 20.85 | 20.83 | 21.50                     |
|                    | 12 (RB_Pos:13) | 21.63       | 21.56        | 21.61 | 22.50                     | 20.81 | 20.78 | 20.73 | 21.50                     |
|                    | 25 (RB_Pos:0)  | 21.61       | 21.62        | 21.66 | 22.50                     | 20.77 | 20.76 | 20.68 | 21.50                     |

**TDD LTE Band 38**

| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|--------------------|----------------|-------------|-------|--------------|---------------------------|-------|-------|-------|---------------------------|
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37850       | 38000 | 38150        |                           | 37850 | 38000 | 38150 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 23.34       | 23.42 | <b>23.45</b> | 24.00                     | 22.73 | 22.68 | 22.88 | 23.00                     |
|                    | 1 (RB_Pos:50)  | 23.24       | 23.29 | 23.24        | 24.00                     | 22.64 | 22.58 | 22.67 | 23.00                     |
|                    | 1 (RB_Pos:99)  | 23.31       | 23.16 | 23.10        | 24.00                     | 22.67 | 22.47 | 22.56 | 23.00                     |
|                    | 50 (RB_Pos:0)  | 22.42       | 22.35 | 22.39        | 23.00                     | 21.48 | 21.55 | 21.50 | 22.00                     |
|                    | 50 (RB_Pos:25) | 22.35       | 22.36 | 22.30        | 23.00                     | 21.38 | 21.46 | 21.46 | 22.00                     |
|                    | 50 (RB_Pos:50) | 22.30       | 22.30 | 22.13        | 23.00                     | 21.44 | 21.39 | 21.26 | 22.00                     |
|                    | 100 (RB_Pos:0) | 22.42       | 22.31 | 22.30        | 23.00                     | 21.51 | 21.42 | 21.41 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37825       | 38000 | 38175        |                           | 37825 | 38000 | 38175 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 23.30       | 23.39 | 23.42        | 24.00                     | 22.69 | 22.95 | 22.81 | 23.00                     |
|                    | 1 (RB_Pos:38)  | 23.24       | 23.26 | 23.16        | 24.00                     | 22.64 | 22.80 | 22.54 | 23.00                     |
|                    | 1 (RB_Pos:74)  | 23.13       | 23.19 | 23.04        | 24.00                     | 22.52 | 22.76 | 22.46 | 23.00                     |
|                    | 36 (RB_Pos:0)  | 22.32       | 22.29 | 22.27        | 23.00                     | 21.42 | 21.41 | 21.43 | 22.00                     |
|                    | 36 (RB_Pos:20) | 22.24       | 22.26 | 22.15        | 23.00                     | 21.38 | 21.36 | 21.30 | 22.00                     |
|                    | 36 (RB_Pos:39) | 22.21       | 22.21 | 22.09        | 23.00                     | 21.29 | 21.32 | 21.20 | 22.00                     |
|                    | 75 (RB_Pos:0)  | 22.27       | 22.24 | 22.26        | 23.00                     | 21.42 | 21.35 | 21.33 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37800       | 38000 | 38200        |                           | 37800 | 38000 | 38200 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 23.22       | 23.38 | 23.25        | 24.00                     | 22.58 | 22.83 | 22.66 | 23.00                     |
|                    | 1 (RB_Pos:25)  | 23.27       | 23.31 | 23.22        | 24.00                     | 22.67 | 22.86 | 22.64 | 23.00                     |
|                    | 1 (RB_Pos:49)  | 23.16       | 23.22 | 23.05        | 24.00                     | 22.58 | 22.77 | 22.59 | 23.00                     |
|                    | 25 (RB_Pos:0)  | 22.33       | 22.32 | 22.18        | 23.00                     | 21.51 | 21.46 | 21.31 | 22.00                     |
|                    | 25 (RB_Pos:12) | 22.33       | 22.33 | 22.18        | 23.00                     | 21.49 | 21.43 | 21.30 | 22.00                     |
|                    | 25 (RB_Pos:25) | 22.30       | 22.28 | 22.08        | 23.00                     | 21.36 | 21.37 | 21.28 | 22.00                     |
|                    | 50 (RB_Pos:0)  | 22.34       | 22.30 | 22.13        | 23.00                     | 21.42 | 21.43 | 21.32 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |                           |       |       |       |                           |
|                    |                | QPSK        |       |              | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37775       | 38000 | 38225        |                           | 37775 | 38000 | 38225 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 23.23       | 23.36 | 23.20        | 24.00                     | 22.60 | 22.67 | 22.68 | 23.00                     |
|                    | 1 (RB_Pos:13)  | 23.24       | 23.35 | 23.22        | 24.00                     | 22.62 | 22.75 | 22.70 | 23.00                     |
|                    | 1 (RB_Pos:24)  | 23.28       | 23.26 | 23.13        | 24.00                     | 22.61 | 22.60 | 22.59 | 23.00                     |
|                    | 12 (RB_Pos:0)  | 22.27       | 22.31 | 22.16        | 23.00                     | 21.43 | 21.42 | 21.37 | 22.00                     |
|                    | 12 (RB_Pos:6)  | 22.25       | 22.30 | 22.15        | 23.00                     | 21.42 | 21.41 | 21.42 | 22.00                     |
|                    | 12 (RB_Pos:13) | 22.30       | 22.26 | 22.15        | 23.00                     | 21.53 | 21.39 | 21.38 | 22.00                     |
|                    | 25 (RB_Pos:0)  | 22.29       | 22.26 | 22.13        | 23.00                     | 21.48 | 21.48 | 21.28 | 22.00                     |

## TDD LTE Band 41

| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|--------------------|----------------|-------------|-------|-------|-------|-------|---------------------------|-------|-------|-------|-------|-------|---------------------------|
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39750       | 40185 | 40620 | 41055 | 41490 |                           | 39750 | 40185 | 40620 | 41055 | 41490 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 23.09       | 23.21 | 23.33 | 23.25 | 23.08 | 24.00                     | 22.45 | 22.48 | 22.76 | 22.59 | 22.31 | 23.00                     |
|                    | 1 (RB_Pos:50)  | 22.98       | 23.04 | 23.17 | 23.06 | 23.01 | 24.00                     | 22.32 | 22.27 | 22.59 | 22.42 | 22.23 | 23.00                     |
|                    | 1 (RB_Pos:99)  | 23.08       | 23.01 | 23.19 | 23.02 | 23.04 | 24.00                     | 22.41 | 22.29 | 22.62 | 22.37 | 22.28 | 23.00                     |
|                    | 50 (RB_Pos:0)  | 22.08       | 22.13 | 22.21 | 22.18 | 22.07 | 23.00                     | 21.15 | 21.25 | 21.32 | 21.24 | 21.12 | 22.00                     |
|                    | 50 (RB_Pos:25) | 22.05       | 22.12 | 22.16 | 22.15 | 22.11 | 23.00                     | 21.09 | 21.18 | 21.32 | 21.19 | 21.12 | 22.00                     |
|                    | 50 (RB_Pos:50) | 22.08       | 22.08 | 22.07 | 22.04 | 21.96 | 23.00                     | 21.16 | 21.13 | 21.21 | 21.13 | 21.10 | 22.00                     |
|                    | 100 (RB_Pos:0) | 22.12       | 22.08 | 22.15 | 22.13 | 22.05 | 23.00                     | 21.20 | 21.15 | 21.25 | 21.18 | 21.16 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39725       | 40160 | 40620 | 41080 | 41515 |                           | 39725 | 40160 | 40620 | 41080 | 41515 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 23.05       | 23.16 | 23.24 | 23.15 | 23.07 | 24.00                     | 22.39 | 22.67 | 22.66 | 22.47 | 22.61 | 23.00                     |
|                    | 1 (RB_Pos:38)  | 22.95       | 22.99 | 23.11 | 23.04 | 22.97 | 24.00                     | 22.29 | 22.54 | 22.53 | 22.38 | 22.48 | 23.00                     |
|                    | 1 (RB_Pos:74)  | 22.89       | 23.00 | 23.20 | 22.95 | 23.06 | 24.00                     | 22.27 | 22.50 | 22.54 | 22.30 | 22.47 | 23.00                     |
|                    | 36 (RB_Pos:0)  | 22.00       | 22.07 | 22.12 | 22.08 | 22.04 | 23.00                     | 21.10 | 21.16 | 21.27 | 21.16 | 21.09 | 22.00                     |
|                    | 36 (RB_Pos:20) | 21.99       | 22.04 | 22.09 | 22.02 | 22.04 | 23.00                     | 21.08 | 21.13 | 21.26 | 21.15 | 21.04 | 22.00                     |
|                    | 36 (RB_Pos:39) | 21.93       | 22.00 | 22.04 | 21.99 | 21.93 | 23.00                     | 21.03 | 21.09 | 21.15 | 21.04 | 21.03 | 22.00                     |
|                    | 75 (RB_Pos:0)  | 22.01       | 22.02 | 22.11 | 22.04 | 21.96 | 23.00                     | 21.06 | 21.13 | 21.19 | 21.11 | 21.09 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39700       | 40135 | 40620 | 41105 | 41540 |                           | 39700 | 40135 | 40620 | 41105 | 41540 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 22.94       | 23.12 | 23.20 | 23.04 | 23.04 | 24.00                     | 22.27 | 22.58 | 22.64 | 22.35 | 22.52 | 23.00                     |
|                    | 1 (RB_Pos:25)  | 22.94       | 23.02 | 23.15 | 22.95 | 23.02 | 24.00                     | 22.30 | 22.48 | 22.55 | 22.30 | 22.53 | 23.00                     |
|                    | 1 (RB_Pos:49)  | 22.94       | 22.97 | 23.16 | 22.90 | 23.00 | 24.00                     | 22.28 | 22.45 | 22.60 | 22.25 | 22.51 | 23.00                     |
|                    | 25 (RB_Pos:0)  | 22.06       | 22.09 | 22.16 | 22.06 | 22.04 | 23.00                     | 21.10 | 21.12 | 21.27 | 21.15 | 21.07 | 22.00                     |
|                    | 25 (RB_Pos:12) | 22.07       | 22.05 | 22.12 | 22.09 | 22.02 | 23.00                     | 21.13 | 21.15 | 21.26 | 21.14 | 21.06 | 22.00                     |
|                    | 25 (RB_Pos:25) | 22.02       | 21.99 | 22.10 | 22.04 | 22.06 | 23.00                     | 21.09 | 21.07 | 21.22 | 21.08 | 21.13 | 22.00                     |
|                    | 50 (RB_Pos:0)  | 22.01       | 22.02 | 22.12 | 22.02 | 22.03 | 23.00                     | 21.10 | 21.12 | 21.26 | 21.12 | 21.05 | 22.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39675       | 40110 | 40620 | 41130 | 41565 |                           | 39675 | 40110 | 40620 | 41130 | 41565 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 23.00       | 23.08 | 23.16 | 23.01 | 23.09 | 24.00                     | 22.27 | 22.40 | 22.60 | 22.35 | 22.39 | 23.00                     |
|                    | 1 (RB_Pos:13)  | 23.02       | 23.10 | 23.20 | 23.06 | 23.13 | 24.00                     | 22.36 | 22.43 | 22.68 | 22.37 | 22.44 | 23.00                     |
|                    | 1 (RB_Pos:24)  | 22.93       | 22.96 | 23.12 | 22.95 | 23.01 | 24.00                     | 22.24 | 22.29 | 22.55 | 22.27 | 22.32 | 23.00                     |
|                    | 12 (RB_Pos:0)  | 21.98       | 22.06 | 22.14 | 22.02 | 22.03 | 23.00                     | 21.20 | 21.12 | 21.34 | 21.16 | 21.15 | 22.00                     |
|                    | 12 (RB_Pos:6)  | 22.02       | 22.07 | 22.17 | 22.07 | 22.07 | 23.00                     | 21.23 | 21.13 | 21.32 | 21.22 | 21.16 | 22.00                     |
|                    | 12 (RB_Pos:13) | 22.00       | 22.01 | 22.11 | 22.01 | 22.03 | 23.00                     | 21.15 | 21.12 | 21.37 | 21.16 | 21.15 | 22.00                     |
|                    | 25 (RB_Pos:0)  | 22.01       | 22.00 | 22.12 | 22.05 | 22.07 | 23.00                     | 21.05 | 21.15 | 21.20 | 21.16 | 21.19 | 22.00                     |

## 8.4 WIFI

### 8.4.1 2.4G WIFI

| Band (GHz)          | Mode          | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|---------------------|---------------|---------|-------------|-----------------------|---------------------|-------------------|
| 2.4<br>(2.4~2.4835) | 802.11b       | 1       | 2412        | 18.47                 | 19.50               | Yes               |
|                     |               | 6       | 2437        | <b>18.82</b>          | 19.50               | Yes               |
|                     |               | 11      | 2462        | 18.62                 | 19.50               | Yes               |
|                     | 802.11g       | 1       | 2412        | 17.00                 | 18.50               | No                |
|                     |               | 6       | 2437        | 16.75                 | 18.50               | No                |
|                     |               | 11      | 2462        | 16.90                 | 18.50               | No                |
|                     | 802.11n(HT20) | 1       | 2412        | 16.55                 | 18.50               | No                |
|                     |               | 6       | 2437        | 16.60                 | 18.50               | No                |
|                     |               | 11      | 2462        | 16.68                 | 18.50               | No                |

### 8.4.2 5G WIFI

| Band (GHz)         | Mode            | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|--------------------|-----------------|---------|-------------|-----------------------|---------------------|-------------------|
| 5.2<br>(5.15~5.25) | 802.11a         | 36      | 5180        | 18.40                 | 18.50               | No                |
|                    |                 | 44      | 5220        | 17.90                 | 18.50               | No                |
|                    |                 | 48      | 5240        | 17.90                 | 18.50               | No                |
|                    | 802.11n(HT20)   | 36      | 5180        | 18.25                 | 18.50               | No                |
|                    |                 | 44      | 5220        | 17.70                 | 18.50               | No                |
|                    |                 | 48      | 5240        | 17.75                 | 18.50               | No                |
|                    | 802.11n(HT40)   | 38      | 5190        | 15.63                 | 16.00               | Yes               |
|                    |                 | 46      | 5230        | <b>18.10</b>          | 18.50               | Yes               |
|                    | 802.11ac(VHT20) | 36      | 5180        | 18.30                 | 18.50               | No                |
|                    |                 | 44      | 5220        | 17.70                 | 18.50               | No                |
|                    |                 | 48      | 5240        | 17.80                 | 18.50               | No                |
|                    | 802.11ac(VHT40) | 38      | 5190        | 15.60                 | 16.00               | No                |
|                    |                 | 46      | 5230        | 18.10                 | 18.50               | No                |
|                    | 802.11ac(VHT80) | 42      | 5210        | 13.65                 | 14.00               | No                |
| 5.3<br>(5.25~5.35) | 802.11a         | 52      | 5260        | 17.20                 | 17.50               | No                |
|                    |                 | 60      | 5300        | 16.70                 | 17.50               | No                |
|                    |                 | 64      | 5320        | 17.00                 | 17.50               | No                |
|                    | 802.11n(HT20)   | 52      | 5260        | 17.00                 | 17.50               | No                |
|                    |                 | 60      | 5300        | 16.50                 | 17.50               | No                |
|                    |                 | 64      | 5320        | 16.80                 | 17.50               | No                |
|                    | 802.11n(HT40)   | 54      | 5270        | <b>17.35</b>          | 17.50               | Yes               |
|                    |                 | 62      | 5310        | 11.20                 | 11.50               | Yes               |
|                    | 802.11ac(VHT20) | 52      | 5260        | 17.05                 | 17.50               | No                |
|                    |                 | 60      | 5300        | 16.55                 | 17.50               | No                |
|                    |                 | 64      | 5320        | 16.80                 | 17.50               | No                |
|                    | 802.11ac(VHT40) | 54      | 5270        | 17.35                 | 17.50               | No                |

|                      |                 |     |      |              |       |     |
|----------------------|-----------------|-----|------|--------------|-------|-----|
|                      |                 | 62  | 5310 | 11.20        | 11.50 | No  |
|                      | 802.11ac(VHT80) | 58  | 5290 | 9.60         | 10.00 | No  |
| 5.6<br>(5.47~5.725)  | 802.11a         | 100 | 5500 | 17.79        | 18.50 | No  |
|                      |                 | 116 | 5580 | 17.71        | 18.50 | No  |
|                      |                 | 140 | 5700 | 16.48        | 16.50 | No  |
|                      | 802.11n(HT20)   | 100 | 5500 | 17.63        | 18.50 | No  |
|                      |                 | 116 | 5580 | 17.54        | 18.50 | No  |
|                      |                 | 140 | 5700 | 16.40        | 16.50 | No  |
|                      | 802.11n(HT40)   | 102 | 5510 | 14.10        | 14.50 | Yes |
|                      |                 | 118 | 5590 | <b>17.95</b> | 18.50 | Yes |
|                      |                 | 134 | 5670 | 15.40        | 15.50 | Yes |
|                      | 802.11ac(VHT20) | 100 | 5500 | 17.61        | 18.50 | No  |
|                      |                 | 116 | 5580 | 17.56        | 18.50 | No  |
|                      |                 | 140 | 5700 | 16.36        | 16.50 | No  |
|                      | 802.11ac(VHT40) | 102 | 5510 | 14.10        | 14.50 | No  |
|                      |                 | 118 | 5590 | 17.93        | 18.50 | No  |
|                      |                 | 134 | 5670 | 15.36        | 15.50 | No  |
|                      | 802.11ac(VHT80) | 106 | 5530 | 10.77        | 11.00 | No  |
|                      |                 | 122 | 5610 | 10.75        | 11.00 | No  |
| 5.8<br>(5.725~5.850) | 802.11a         | 149 | 5745 | 16.85        | 17.00 | No  |
|                      |                 | 157 | 5785 | 16.92        | 17.00 | No  |
|                      |                 | 165 | 5825 | 16.92        | 17.00 | No  |
|                      | 802.11n(HT20)   | 149 | 5745 | 16.62        | 17.00 | No  |
|                      |                 | 157 | 5785 | 16.75        | 17.00 | No  |
|                      |                 | 165 | 5825 | 16.76        | 17.00 | No  |
|                      | 802.11n(HT40)   | 151 | 5755 | 16.94        | 17.00 | No  |
|                      |                 | 159 | 5795 | 16.88        | 17.00 | No  |
|                      | 802.11ac(VHT20) | 149 | 5745 | 16.75        | 17.00 | No  |
|                      |                 | 157 | 5785 | 16.82        | 17.00 | No  |
|                      |                 | 165 | 5825 | 16.78        | 17.00 | No  |
|                      | 802.11ac(VHT40) | 151 | 5755 | 16.73        | 17.00 | No  |
|                      |                 | 159 | 5795 | 16.76        | 17.00 | No  |
|                      | 802.11ac(VHT80) | 155 | 5775 | <b>16.97</b> | 17.00 | Yes |

## 8.5 Bluetooth

| Mode                  | GFSK   |       |       | $\pi/4$ -DQPSK |              |       |
|-----------------------|--------|-------|-------|----------------|--------------|-------|
| Channel               | 0      | 39    | 78    | 0              | 39           | 78    |
| Frequency (MHz)       | 2402   | 2441  | 2480  | 2402           | 2441         | 2480  |
| Conducted Power (dBm) | 10.42  | 10.88 | 10.11 | 9.96           | 10.31        | 9.66  |
| Tune-Up Limit (dBm)   | 11.50  |       |       | 11.50          |              |       |
| Mode                  | 8-DPSK |       |       | BLE            |              |       |
| Channel               | 0      | 39    | 78    | 0              | 19           | 39    |
| Frequency (MHz)       | 2402   | 2441  | 2480  | 2402           | 2440         | 2480  |
| Conducted Power (dBm) | 10.14  | 10.59 | 9.84  | 10.59          | <b>11.44</b> | 10.26 |
| Tune-Up Limit (dBm)   | 11.50  |       |       | 12.50          |              |       |

## 8.6 Power Reduction List

### 8.6.1 Power Reduced Level 1 of GSM 1900

| GSM 1900              |                          |       |       |                        |                           |       |       |                        |
|-----------------------|--------------------------|-------|-------|------------------------|---------------------------|-------|-------|------------------------|
| GSM1900 Band          | Burst Average Power(dBm) |       |       | Tune-up<br>Limit (dBm) | Frame-Averaged power(dBm) |       |       | Tune-up<br>Limit (dBm) |
| Channel               | 512                      | 661   | 810   |                        | 512                       | 661   | 810   |                        |
| GSM (GMSK, 1-Slot)    | 24.87                    | 24.74 | 24.75 | 26.00                  | 15.68                     | 15.55 | 15.56 | 16.81                  |
| GPRS (GMSK, 1-Slot)   | 24.60                    | 24.47 | 24.47 | 26.00                  | 15.41                     | 15.28 | 15.28 | 16.81                  |
| GPRS (GMSK, 2-Slots)  | 22.59                    | 22.63 | 22.61 | 23.50                  | 16.46                     | 16.50 | 16.48 | 17.37                  |
| GPRS (GMSK, 3-Slots)  | 21.64                    | 21.36 | 21.53 | 22.50                  | <b>17.22</b>              | 16.94 | 17.11 | 18.08                  |
| GPRS (GMSK, 4-Slots)  | 19.87                    | 19.58 | 19.74 | 20.50                  | 16.69                     | 16.40 | 16.56 | 17.32                  |
| EGPRS (8PSK, 1-Slot)  | 24.81                    | 24.73 | 24.66 | 25.00                  | 15.62                     | 15.54 | 15.47 | 15.81                  |
| EGPRS (8PSK, 2-Slots) | 22.49                    | 22.50 | 22.50 | 23.00                  | 16.36                     | 16.37 | 16.37 | 16.87                  |
| EGPRS (8PSK, 3-Slots) | 20.72                    | 20.59 | 20.96 | 22.00                  | 16.30                     | 16.17 | 16.54 | 17.58                  |
| EGPRS (8PSK, 4-Slots) | 19.87                    | 19.82 | 19.73 | 20.50                  | 16.69                     | 16.64 | 16.55 | 17.32                  |

### 8.6.2 Power Reduced Level 2 of GSM 1900

| GSM 1900              |                          |       |       |                        |                           |       |       |                        |
|-----------------------|--------------------------|-------|-------|------------------------|---------------------------|-------|-------|------------------------|
| GSM1900 Band          | Burst Average Power(dBm) |       |       | Tune-up<br>Limit (dBm) | Frame-Averaged power(dBm) |       |       | Tune-up<br>Limit (dBm) |
| Channel               | 512                      | 661   | 810   |                        | 512                       | 661   | 810   |                        |
| GSM (GMSK, 1-Slot)    | 24.48                    | 24.31 | 24.29 | 25.50                  | 15.29                     | 15.12 | 15.10 | 16.31                  |
| GPRS (GMSK, 1-Slot)   | 24.34                    | 24.14 | 24.11 | 25.50                  | 15.15                     | 14.95 | 14.92 | 16.31                  |
| GPRS (GMSK, 2-Slots)  | 22.32                    | 22.30 | 22.27 | 23.00                  | 16.19                     | 16.17 | 16.14 | 16.87                  |
| GPRS (GMSK, 3-Slots)  | 21.38                    | 21.03 | 21.19 | 22.00                  | <b>16.96</b>              | 16.61 | 16.77 | 17.58                  |
| GPRS (GMSK, 4-Slots)  | 19.46                    | 19.31 | 19.47 | 20.00                  | 16.28                     | 16.13 | 16.29 | 16.82                  |
| EGPRS (8PSK, 1-Slot)  | 24.48                    | 24.31 | 24.34 | 24.50                  | 15.29                     | 15.12 | 15.15 | 15.31                  |
| EGPRS (8PSK, 2-Slots) | 22.42                    | 22.22 | 22.28 | 22.50                  | 16.29                     | 16.09 | 16.15 | 16.37                  |
| EGPRS (8PSK, 3-Slots) | 21.31                    | 21.14 | 20.88 | 21.50                  | 16.89                     | 16.72 | 16.46 | 17.08                  |
| EGPRS (8PSK, 4-Slots) | 19.68                    | 19.55 | 19.54 | 20.00                  | 16.50                     | 16.37 | 16.36 | 16.82                  |

### 8.6.3 Power Reduced Level 3 of GSM 1900

| GSM 1900              |                          |       |       |             |                           |       |       |             |
|-----------------------|--------------------------|-------|-------|-------------|---------------------------|-------|-------|-------------|
| GSM1900 Band          | Burst Average Power(dBm) |       |       | Tune-up     | Frame-Averaged power(dBm) |       |       | Tune-up     |
| Channel               | 512                      | 661   | 810   | Limit (dBm) | 512                       | 661   | 810   | Limit (dBm) |
| GSM (GMSK, 1-Slot)    | 23.92                    | 23.94 | 23.94 | 24.50       | 14.73                     | 14.75 | 14.75 | 15.31       |
| GPRS (GMSK, 1-Slot)   | 23.80                    | 23.81 | 23.78 | 24.50       | 14.61                     | 14.62 | 14.59 | 15.31       |
| GPRS (GMSK, 2-Slots)  | 21.84                    | 21.52 | 21.68 | 22.00       | 15.71                     | 15.39 | 15.55 | 15.87       |
| GPRS (GMSK, 3-Slots)  | 20.58                    | 20.25 | 20.40 | 21.00       | <b>16.16</b>              | 15.83 | 15.98 | 16.58       |
| GPRS (GMSK, 4-Slots)  | 18.57                    | 18.41 | 18.59 | 19.00       | 15.39                     | 15.23 | 15.41 | 15.82       |
| EGPRS (8PSK, 1-Slot)  | 23.74                    | 23.64 | 23.59 | 23.50       | 14.55                     | 14.45 | 14.40 | 14.31       |
| EGPRS (8PSK, 2-Slots) | 21.51                    | 21.46 | 21.29 | 21.50       | 15.38                     | 15.33 | 15.16 | 15.37       |
| EGPRS (8PSK, 3-Slots) | 20.55                    | 20.48 | 20.19 | 20.50       | 16.13                     | 16.06 | 15.77 | 16.08       |
| EGPRS (8PSK, 4-Slots) | 18.99                    | 18.80 | 18.59 | 19.00       | 15.81                     | 15.62 | 15.41 | 15.82       |



#### 8.6.4 Power Reduced Level 1&2 of WCDMA Band 2

| WCDMA           | Band 2       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 9262         | 9400  | 9538  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>16.07</b> | 15.98 | 16.02 | 17.00               |
| HSDPA Subtest-1 | 14.91        | 14.87 | 14.94 | 15.00               |
| HSDPA Subtest-2 | 14.90        | 14.89 | 14.95 | 15.00               |
| HSDPA Subtest-3 | 14.38        | 14.37 | 14.43 | 14.50               |
| HSDPA Subtest-4 | 14.40        | 14.38 | 14.43 | 14.50               |
| HSUPA Subtest-1 | 14.88        | 14.82 | 14.95 | 15.00               |
| HSUPA Subtest-2 | 12.80        | 12.92 | 12.87 | 13.00               |
| HSUPA Subtest-3 | 13.85        | 13.86 | 13.98 | 14.00               |
| HSUPA Subtest-4 | 12.87        | 12.82 | 12.95 | 13.00               |
| HSUPA Subtest-5 | 15.01        | 14.90 | 14.92 | 15.00               |

#### 8.6.5 Power Reduced Level 3 of WCDMA Band 2

| WCDMA           | Band 2       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 9262         | 9400  | 9538  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>14.72</b> | 14.63 | 14.65 | 15.50               |
| HSDPA Subtest-1 | 13.32        | 13.33 | 13.39 | 13.50               |
| HSDPA Subtest-2 | 13.34        | 13.32 | 13.40 | 13.50               |
| HSDPA Subtest-3 | 12.84        | 12.83 | 12.90 | 13.00               |
| HSDPA Subtest-4 | 12.87        | 12.83 | 12.90 | 13.00               |
| HSUPA Subtest-1 | 13.24        | 13.27 | 13.31 | 13.50               |
| HSUPA Subtest-2 | 11.31        | 11.36 | 11.26 | 11.50               |
| HSUPA Subtest-3 | 12.38        | 12.38 | 12.35 | 12.50               |
| HSUPA Subtest-4 | 11.31        | 11.29 | 11.42 | 11.50               |
| HSUPA Subtest-5 | 13.34        | 13.34 | 13.39 | 13.50               |

#### 8.6.6 Power Reduced Level 4 of WCDMA Band 2

| WCDMA           | Band 2       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 9262         | 9400  | 9538  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>20.11</b> | 19.84 | 19.97 | 21.00               |
| HSDPA Subtest-1 | 18.88        | 18.85 | 18.88 | 19.00               |
| HSDPA Subtest-2 | 18.88        | 18.87 | 18.91 | 19.00               |
| HSDPA Subtest-3 | 18.36        | 18.41 | 18.42 | 18.50               |
| HSDPA Subtest-4 | 18.36        | 18.39 | 18.42 | 18.50               |
| HSUPA Subtest-1 | 18.88        | 18.87 | 18.91 | 19.00               |
| HSUPA Subtest-2 | 16.90        | 16.81 | 16.94 | 17.00               |
| HSUPA Subtest-3 | 17.86        | 17.90 | 17.96 | 18.00               |

|                 |       |       |       |       |
|-----------------|-------|-------|-------|-------|
| HSUPA Subtest-4 | 16.76 | 16.97 | 16.87 | 17.00 |
| HSUPA Subtest-5 | 18.88 | 18.94 | 18.96 | 19.00 |

#### 8.6.7 Power Reduced Level 1 of WCDMA Band 4

| WCDMA           | Band 4       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 1312         | 1412  | 1513  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>18.12</b> | 17.89 | 18.05 | 19.00               |
| HSDPA Subtest-1 | 16.91        | 16.85 | 16.98 | 17.00               |
| HSDPA Subtest-2 | 16.95        | 16.88 | 17.02 | 17.00               |
| HSDPA Subtest-3 | 16.43        | 16.37 | 16.54 | 16.50               |
| HSDPA Subtest-4 | 16.62        | 16.36 | 16.51 | 16.50               |
| HSUPA Subtest-1 | 16.90        | 16.66 | 16.80 | 17.00               |
| HSUPA Subtest-2 | 14.88        | 14.62 | 14.83 | 15.00               |
| HSUPA Subtest-3 | 15.90        | 15.61 | 15.79 | 16.00               |
| HSUPA Subtest-4 | 14.94        | 14.65 | 14.79 | 15.00               |
| HSUPA Subtest-5 | 16.85        | 16.61 | 16.81 | 17.00               |

#### 8.6.8 Power Reduced Level 2 of WCDMA Band 4

| WCDMA           | Band 4       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 1312         | 1412  | 1513  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>16.82</b> | 16.54 | 16.71 | 17.50               |
| HSDPA Subtest-1 | 15.51        | 15.28 | 15.43 | 15.50               |
| HSDPA Subtest-2 | 15.22        | 15.32 | 15.48 | 15.50               |
| HSDPA Subtest-3 | 14.96        | 14.78 | 14.96 | 15.00               |
| HSDPA Subtest-4 | 14.85        | 14.81 | 14.96 | 15.00               |
| HSUPA Subtest-1 | 15.36        | 15.26 | 15.44 | 15.50               |
| HSUPA Subtest-2 | 13.42        | 13.28 | 13.47 | 13.50               |
| HSUPA Subtest-3 | 14.39        | 14.28 | 14.40 | 14.50               |
| HSUPA Subtest-4 | 13.47        | 13.23 | 13.42 | 13.50               |
| HSUPA Subtest-5 | 15.50        | 15.31 | 15.48 | 15.50               |

#### 8.6.9 Power Reduced Level 3 of WCDMA Band 4

| WCDMA           | Band 4       |       |       |                     |
|-----------------|--------------|-------|-------|---------------------|
| Channel         | 1312         | 1412  | 1513  | Tune-up Limit (dBm) |
| RMC 12.2Kbps    | <b>15.82</b> | 15.56 | 15.71 | 17.00               |
| HSDPA Subtest-1 | 14.83        | 14.56 | 14.75 | 15.00               |
| HSDPA Subtest-2 | 14.87        | 14.63 | 14.76 | 15.00               |
| HSDPA Subtest-3 | 14.34        | 14.10 | 14.25 | 14.50               |
| HSDPA Subtest-4 | 14.36        | 14.09 | 14.23 | 14.50               |
| HSUPA Subtest-1 | 14.83        | 14.52 | 14.76 | 15.00               |

|                 |       |       |       |       |
|-----------------|-------|-------|-------|-------|
| HSUPA Subtest-2 | 12.80 | 12.65 | 12.77 | 13.00 |
| HSUPA Subtest-3 | 13.73 | 13.63 | 13.72 | 14.00 |
| HSUPA Subtest-4 | 12.84 | 12.57 | 12.69 | 13.00 |
| HSUPA Subtest-5 | 14.84 | 14.61 | 14.77 | 15.00 |

#### 8.6.10 Power Reduced Level 1 of LTE Band 2

| FDD LTE Band 2     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18700       | 18900        | 19100 |                           | 18700 | 18900 | 19100 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 17.20       | <b>17.32</b> | 17.03 | 18.00                     | 17.21 | 17.71 | 17.41 | 18.00                     |
|                    | 1 (RB_Pos:50)  | 16.98       | 16.96        | 16.89 | 18.00                     | 17.04 | 17.31 | 17.24 | 18.00                     |
|                    | 1 (RB_Pos:99)  | 17.22       | 17.19        | 16.91 | 18.00                     | 17.06 | 17.60 | 17.26 | 18.00                     |
|                    | 50 (RB_Pos:0)  | 17.13       | 17.19        | 17.11 | 18.00                     | 17.36 | 17.33 | 17.21 | 18.00                     |
|                    | 50 (RB_Pos:25) | 17.15       | 17.00        | 17.04 | 18.00                     | 17.29 | 17.18 | 17.15 | 18.00                     |
|                    | 50 (RB_Pos:50) | 17.12       | 17.12        | 16.99 | 18.00                     | 17.27 | 17.29 | 17.10 | 18.00                     |
|                    | 100 (RB_Pos:0) | 17.11       | 17.30        | 17.00 | 18.00                     | 17.28 | 17.27 | 17.17 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18675       | 18900        | 19125 |                           | 18675 | 18900 | 19125 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 17.02       | 17.07        | 17.09 | 18.00                     | 17.14 | 17.37 | 17.44 | 18.00                     |
|                    | 1 (RB_Pos:38)  | 16.90       | 16.92        | 16.92 | 18.00                     | 16.98 | 17.24 | 17.27 | 18.00                     |
|                    | 1 (RB_Pos:74)  | 17.03       | 17.04        | 16.94 | 18.00                     | 17.11 | 17.38 | 17.33 | 18.00                     |
|                    | 36 (RB_Pos:0)  | 16.97       | 17.01        | 17.01 | 18.00                     | 17.16 | 17.19 | 17.13 | 18.00                     |
|                    | 36 (RB_Pos:20) | 17.07       | 16.97        | 16.99 | 18.00                     | 17.21 | 17.19 | 17.12 | 18.00                     |
|                    | 36 (RB_Pos:39) | 17.04       | 17.05        | 16.92 | 18.00                     | 17.19 | 17.28 | 17.05 | 18.00                     |
|                    | 75 (RB_Pos:0)  | 17.07       | 17.08        | 16.99 | 18.00                     | 17.22 | 17.20 | 17.16 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18650       | 18900        | 19150 |                           | 18650 | 18900 | 19150 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 17.18       | 17.19        | 16.98 | 18.00                     | 17.27 | 17.51 | 17.18 | 18.00                     |
|                    | 1 (RB_Pos:25)  | 16.86       | 16.93        | 16.89 | 18.00                     | 16.98 | 17.24 | 17.08 | 18.00                     |
|                    | 1 (RB_Pos:49)  | 17.16       | 17.13        | 16.92 | 18.00                     | 17.29 | 17.47 | 17.07 | 18.00                     |
|                    | 25 (RB_Pos:0)  | 16.97       | 17.01        | 17.02 | 18.00                     | 17.19 | 17.17 | 17.23 | 18.00                     |
|                    | 25 (RB_Pos:12) | 17.02       | 17.00        | 17.01 | 18.00                     | 17.16 | 17.15 | 17.22 | 18.00                     |
|                    | 25 (RB_Pos:25) | 17.09       | 17.01        | 17.00 | 18.00                     | 17.21 | 17.13 | 17.21 | 18.00                     |
|                    | 50 (RB_Pos:0)  | 17.12       | 17.01        | 17.01 | 18.00                     | 17.22 | 17.18 | 17.17 | 18.00                     |

| Bandwidth<br>(MHz) | RB Set | Power (dBm) |  |         |       |  |
|--------------------|--------|-------------|--|---------|-------|--|
|                    |        | QPSK        |  | Tune up | 16QAM |  |

|                    | Channel        | 18625       | 18900 | 19175 | limit<br>(dBm) | 18625 | 18900 | 19175 | up limit<br>(dBm) |
|--------------------|----------------|-------------|-------|-------|----------------|-------|-------|-------|-------------------|
| 5 MHz              | 1 (RB_Pos:0)   | 16.94       | 16.98 | 16.89 | 18.00          | 17.27 | 17.44 | 17.26 | 18.00             |
|                    | 1 (RB_Pos:13)  | 16.97       | 16.98 | 16.99 | 18.00          | 17.32 | 17.47 | 17.24 | 18.00             |
|                    | 1 (RB_Pos:24)  | 16.92       | 16.96 | 16.94 | 18.00          | 17.27 | 17.41 | 17.20 | 18.00             |
|                    | 12 (RB_Pos:0)  | 17.01       | 16.99 | 16.99 | 18.00          | 17.27 | 17.28 | 17.20 | 18.00             |
|                    | 12 (RB_Pos:6)  | 16.97       | 16.96 | 16.98 | 18.00          | 17.22 | 17.27 | 17.18 | 18.00             |
|                    | 12 (RB_Pos:13) | 16.96       | 16.99 | 16.98 | 18.00          | 17.18 | 17.27 | 17.16 | 18.00             |
|                    | 25 (RB_Pos:0)  | 16.97       | 16.96 | 17.00 | 18.00          | 17.19 | 17.22 | 17.08 | 18.00             |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                |       |       |       |                   |
|                    |                | QPSK        |       |       | Tune up        | 16QAM |       |       | Tune up           |
|                    | Channel        | 18615       | 18900 | 19185 | limit<br>(dBm) | 18615 | 18900 | 19185 | up limit<br>(dBm) |
| 3.0 MHz            | 1 (RB_Pos:0)   | 16.90       | 16.91 | 16.89 | 18.00          | 16.99 | 17.25 | 17.15 | 18.00             |
|                    | 1 (RB_Pos:8)   | 16.88       | 16.87 | 16.91 | 18.00          | 17.00 | 17.28 | 17.05 | 18.00             |
|                    | 1 (RB_Pos:14)  | 16.87       | 16.91 | 16.90 | 18.00          | 16.99 | 17.41 | 17.06 | 18.00             |
|                    | 8 (RB_Pos:0)   | 16.96       | 16.96 | 16.94 | 18.00          | 17.22 | 17.17 | 17.13 | 18.00             |
|                    | 8 (RB_Pos:3)   | 16.99       | 16.93 | 16.95 | 18.00          | 17.26 | 17.16 | 17.19 | 18.00             |
|                    | 8 (RB_Pos:7)   | 16.93       | 16.92 | 16.94 | 18.00          | 17.22 | 17.18 | 17.12 | 18.00             |
|                    | 15 (RB_Pos:0)  | 16.94       | 16.94 | 16.97 | 18.00          | 17.16 | 17.14 | 17.04 | 18.00             |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                |       |       |       |                   |
|                    |                | QPSK        |       |       | Tune up        | 16QAM |       |       | Tune up           |
|                    | Channel        | 18607       | 18900 | 19193 | limit<br>(dBm) | 18607 | 18900 | 19193 | up limit<br>(dBm) |
| 1.4 MHz            | 1 (RB_Pos:0)   | 16.81       | 16.81 | 16.80 | 18.00          | 17.12 | 17.19 | 17.03 | 18.00             |
|                    | 1 (RB_Pos:3)   | 16.86       | 16.90 | 16.89 | 18.00          | 17.18 | 17.25 | 17.09 | 18.00             |
|                    | 1 (RB_Pos:5)   | 16.80       | 16.82 | 16.79 | 18.00          | 17.14 | 17.20 | 17.03 | 18.00             |
|                    | 3 (RB_Pos:0)   | 16.92       | 16.92 | 16.95 | 18.00          | 17.12 | 17.30 | 17.20 | 18.00             |
|                    | 3 (RB_Pos:1)   | 16.92       | 16.98 | 16.98 | 18.00          | 17.20 | 17.32 | 17.31 | 18.00             |
|                    | 3 (RB_Pos:3)   | 16.90       | 16.93 | 16.93 | 18.00          | 17.12 | 17.26 | 17.23 | 18.00             |
|                    | 6 (RB_Pos:0)   | 16.81       | 16.84 | 16.85 | 18.00          | 17.15 | 16.88 | 17.19 | 18.00             |

## 8.6.11 Power Reduced Level 2 of LTE Band 2

| FDD LTE Band 2     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18700       | 18900        | 19100 |                           | 18700 | 18900 | 19100 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 16.37       | <b>16.54</b> | 16.19 | 17.00                     | 16.76 | 16.76 | 16.44 | 17.00                     |
|                    | 1 (RB_Pos:50)  | 16.19       | 16.14        | 16.05 | 17.00                     | 16.57 | 16.38 | 16.28 | 17.00                     |
|                    | 1 (RB_Pos:99)  | 16.42       | 16.41        | 16.04 | 17.00                     | 16.71 | 16.59 | 16.32 | 17.00                     |
|                    | 50 (RB_Pos:0)  | 16.34       | 16.39        | 16.29 | 17.00                     | 16.52 | 16.53 | 16.34 | 17.00                     |
|                    | 50 (RB_Pos:25) | 16.37       | 16.20        | 16.24 | 17.00                     | 16.44 | 16.34 | 16.29 | 17.00                     |
|                    | 50 (RB_Pos:50) | 16.34       | 16.31        | 16.20 | 17.00                     | 16.43 | 16.42 | 16.26 | 17.00                     |
|                    | 100 (RB_Pos:0) | 16.33       | 16.30        | 16.19 | 17.00                     | 16.51 | 16.41 | 16.31 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18675       | 18900        | 19125 |                           | 18675 | 18900 | 19125 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 16.20       | 16.23        | 16.21 | 17.00                     | 16.30 | 16.44 | 16.51 | 17.00                     |
|                    | 1 (RB_Pos:38)  | 16.08       | 16.09        | 16.06 | 17.00                     | 16.15 | 16.34 | 16.34 | 17.00                     |
|                    | 1 (RB_Pos:74)  | 16.22       | 16.23        | 16.12 | 17.00                     | 16.29 | 16.43 | 16.35 | 17.00                     |
|                    | 36 (RB_Pos:0)  | 16.18       | 16.17        | 16.16 | 17.00                     | 16.34 | 16.37 | 16.28 | 17.00                     |
|                    | 36 (RB_Pos:20) | 16.31       | 16.17        | 16.13 | 17.00                     | 16.37 | 16.36 | 16.23 | 17.00                     |
|                    | 36 (RB_Pos:39) | 16.29       | 16.28        | 16.13 | 17.00                     | 16.36 | 16.42 | 16.18 | 17.00                     |
|                    | 75 (RB_Pos:0)  | 16.28       | 16.27        | 16.16 | 17.00                     | 16.37 | 16.38 | 16.25 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18650       | 18900        | 19150 |                           | 18650 | 18900 | 19150 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 16.34       | 16.35        | 16.15 | 17.00                     | 16.47 | 16.84 | 16.33 | 17.00                     |
|                    | 1 (RB_Pos:25)  | 16.08       | 16.09        | 16.08 | 17.00                     | 16.16 | 16.31 | 16.24 | 17.00                     |
|                    | 1 (RB_Pos:49)  | 16.41       | 16.30        | 16.08 | 17.00                     | 16.45 | 16.78 | 16.22 | 17.00                     |
|                    | 25 (RB_Pos:0)  | 16.18       | 16.20        | 16.21 | 17.00                     | 16.36 | 16.33 | 16.39 | 17.00                     |
|                    | 25 (RB_Pos:12) | 16.22       | 16.20        | 16.21 | 17.00                     | 16.34 | 16.37 | 16.39 | 17.00                     |
|                    | 25 (RB_Pos:25) | 16.25       | 16.17        | 16.21 | 17.00                     | 16.40 | 16.32 | 16.36 | 17.00                     |
|                    | 50 (RB_Pos:0)  | 16.31       | 16.18        | 16.21 | 17.00                     | 16.41 | 16.36 | 16.31 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18625       | 18900        | 19175 |                           | 18625 | 18900 | 19175 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 16.13       | 16.14        | 16.16 | 17.00                     | 16.46 | 16.50 | 16.40 | 17.00                     |
|                    | 1 (RB_Pos:13)  | 16.12       | 16.13        | 16.17 | 17.00                     | 16.46 | 16.55 | 16.40 | 17.00                     |
|                    | 1 (RB_Pos:24)  | 16.05       | 16.14        | 16.11 | 17.00                     | 16.41 | 16.47 | 16.37 | 17.00                     |
|                    | 12 (RB_Pos:0)  | 16.18       | 16.18        | 16.16 | 17.00                     | 16.39 | 16.43 | 16.32 | 17.00                     |
|                    | 12 (RB_Pos:6)  | 16.11       | 16.19        | 16.19 | 17.00                     | 16.36 | 16.40 | 16.35 | 17.00                     |
|                    | 12 (RB_Pos:13) | 16.13       | 16.14        | 16.18 | 17.00                     | 16.37 | 16.41 | 16.33 | 17.00                     |

|                    | 25 (RB_Pos:0) | 16.14       | 16.12 | 16.22 | 17.00                     | 16.32 | 16.38 | 16.24 | 17.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18615       | 18900 | 19185 |                           | 18615 | 18900 | 19185 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 16.07       | 16.09 | 16.05 | 17.00                     | 16.13 | 16.28 | 16.25 | 17.00                     |
|                    | 1 (RB_Pos:8)  | 16.07       | 16.08 | 16.05 | 17.00                     | 16.17 | 16.30 | 16.18 | 17.00                     |
|                    | 1 (RB_Pos:14) | 16.04       | 16.04 | 16.05 | 17.00                     | 16.13 | 16.39 | 16.21 | 17.00                     |
|                    | 8 (RB_Pos:0)  | 16.12       | 16.09 | 16.09 | 17.00                     | 16.36 | 16.30 | 16.25 | 17.00                     |
|                    | 8 (RB_Pos:3)  | 16.16       | 16.14 | 16.17 | 17.00                     | 16.41 | 16.35 | 16.29 | 17.00                     |
|                    | 8 (RB_Pos:7)  | 16.11       | 16.11 | 16.09 | 17.00                     | 16.36 | 16.31 | 16.23 | 17.00                     |
|                    | 15 (RB_Pos:0) | 16.16       | 16.13 | 16.15 | 17.00                     | 16.33 | 16.29 | 16.21 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18607       | 18900 | 19193 |                           | 18607 | 18900 | 19193 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 16.02       | 15.99 | 15.98 | 17.00                     | 16.30 | 16.22 | 16.10 | 17.00                     |
|                    | 1 (RB_Pos:3)  | 16.09       | 16.08 | 16.04 | 17.00                     | 16.38 | 16.32 | 16.23 | 17.00                     |
|                    | 1 (RB_Pos:5)  | 16.04       | 16.02 | 15.99 | 17.00                     | 16.32 | 16.25 | 16.13 | 17.00                     |
|                    | 3 (RB_Pos:0)  | 16.10       | 16.05 | 16.12 | 17.00                     | 16.33 | 16.45 | 16.37 | 17.00                     |
|                    | 3 (RB_Pos:1)  | 16.17       | 16.18 | 16.18 | 17.00                     | 16.39 | 16.48 | 16.41 | 17.00                     |
|                    | 3 (RB_Pos:3)  | 16.12       | 16.06 | 16.15 | 17.00                     | 16.31 | 16.44 | 16.34 | 17.00                     |
|                    | 6 (RB_Pos:0)  | 16.01       | 15.99 | 15.96 | 17.00                     | 16.31 | 16.05 | 16.32 | 17.00                     |

### 8.6.12 Power Reduced Level 3 of LTE Band 2

| FDD LTE Band 2     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18700       | 18900        | 19100 |                           | 18700 | 18900 | 19100 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 15.34       | <b>15.51</b> | 15.22 | 16.00                     | 15.75 | 15.81 | 15.52 | 16.00                     |
|                    | 1 (RB_Pos:50)  | 15.22       | 15.17        | 15.03 | 16.00                     | 15.62 | 15.38 | 15.33 | 16.00                     |
|                    | 1 (RB_Pos:99)  | 15.37       | 15.36        | 15.08 | 16.00                     | 15.75 | 15.65 | 15.32 | 16.00                     |
|                    | 50 (RB_Pos:0)  | 15.37       | 15.34        | 15.24 | 16.00                     | 15.53 | 15.51 | 15.39 | 16.00                     |
|                    | 50 (RB_Pos:25) | 15.29       | 15.23        | 15.19 | 16.00                     | 15.50 | 15.34 | 15.33 | 16.00                     |
|                    | 50 (RB_Pos:50) | 15.28       | 15.28        | 15.19 | 16.00                     | 15.49 | 15.45 | 15.30 | 16.00                     |
|                    | 100 (RB_Pos:0) | 15.31       | 15.35        | 15.23 | 16.00                     | 15.48 | 15.43 | 15.32 | 16.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18675       | 18900        | 19125 |                           | 18675 | 18900 | 19125 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 15.20       | 15.21        | 15.25 | 16.00                     | 15.28 | 15.43 | 15.38 | 16.00                     |
|                    | 1 (RB_Pos:38)  | 15.10       | 15.10        | 15.11 | 16.00                     | 15.12 | 15.22 | 15.16 | 16.00                     |
|                    | 1 (RB_Pos:74)  | 15.24       | 15.18        | 15.08 | 16.00                     | 15.31 | 15.43 | 15.32 | 16.00                     |
|                    | 36 (RB_Pos:0)  | 15.14       | 15.15        | 15.21 | 16.00                     | 15.29 | 15.36 | 15.28 | 16.00                     |
|                    | 36 (RB_Pos:20) | 15.24       | 15.13        | 15.15 | 16.00                     | 15.41 | 15.35 | 15.28 | 16.00                     |
|                    | 36 (RB_Pos:39) | 15.22       | 15.22        | 15.12 | 16.00                     | 15.38 | 15.43 | 15.23 | 16.00                     |
|                    | 75 (RB_Pos:0)  | 15.22       | 15.27        | 15.11 | 16.00                     | 15.44 | 15.41 | 15.31 | 16.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18650       | 18900        | 19150 |                           | 18650 | 18900 | 19150 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 15.33       | 15.35        | 15.15 | 16.00                     | 15.43 | 15.82 | 15.39 | 16.00                     |
|                    | 1 (RB_Pos:25)  | 15.07       | 15.09        | 15.05 | 16.00                     | 15.18 | 15.26 | 15.27 | 16.00                     |
|                    | 1 (RB_Pos:49)  | 15.39       | 15.29        | 15.07 | 16.00                     | 15.48 | 15.79 | 15.28 | 16.00                     |
|                    | 25 (RB_Pos:0)  | 15.21       | 15.18        | 15.20 | 16.00                     | 15.32 | 15.34 | 15.38 | 16.00                     |
|                    | 25 (RB_Pos:12) | 15.19       | 15.22        | 15.19 | 16.00                     | 15.32 | 15.31 | 15.38 | 16.00                     |
|                    | 25 (RB_Pos:25) | 15.25       | 15.16        | 15.18 | 16.00                     | 15.43 | 15.30 | 15.38 | 16.00                     |
|                    | 50 (RB_Pos:0)  | 15.32       | 15.16        | 15.19 | 16.00                     | 15.45 | 15.35 | 15.32 | 16.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18625       | 18900        | 19175 |                           | 18625 | 18900 | 19175 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 15.11       | 15.12        | 15.15 | 16.00                     | 15.42 | 15.39 | 15.39 | 16.00                     |
|                    | 1 (RB_Pos:13)  | 15.16       | 15.13        | 15.13 | 16.00                     | 15.47 | 15.33 | 15.43 | 16.00                     |
|                    | 1 (RB_Pos:24)  | 15.07       | 15.15        | 15.08 | 16.00                     | 15.43 | 15.36 | 15.41 | 16.00                     |
|                    | 12 (RB_Pos:0)  | 15.16       | 15.18        | 15.14 | 16.00                     | 15.38 | 15.45 | 15.37 | 16.00                     |
|                    | 12 (RB_Pos:6)  | 15.15       | 15.14        | 15.17 | 16.00                     | 15.37 | 15.36 | 15.35 | 16.00                     |
|                    | 12 (RB_Pos:13) | 15.11       | 15.11        | 15.16 | 16.00                     | 15.35 | 15.40 | 15.36 | 16.00                     |

|                    | 25 (RB_Pos:0) | 15.13       | 15.13 | 15.17 | 16.00                     | 15.32 | 15.30 | 15.27 | 16.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18615       | 18900 | 19185 |                           | 18615 | 18900 | 19185 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 15.06       | 15.08 | 15.07 | 16.00                     | 15.14 | 15.37 | 15.28 | 16.00                     |
|                    | 1 (RB_Pos:8)  | 15.04       | 15.03 | 15.07 | 16.00                     | 15.16 | 15.37 | 15.24 | 16.00                     |
|                    | 1 (RB_Pos:14) | 15.02       | 15.02 | 15.08 | 16.00                     | 15.12 | 15.32 | 15.26 | 16.00                     |
|                    | 8 (RB_Pos:0)  | 15.12       | 15.12 | 15.08 | 16.00                     | 15.32 | 15.31 | 15.27 | 16.00                     |
|                    | 8 (RB_Pos:3)  | 15.12       | 15.12 | 15.10 | 16.00                     | 15.38 | 15.29 | 15.29 | 16.00                     |
|                    | 8 (RB_Pos:7)  | 15.11       | 15.08 | 15.09 | 16.00                     | 15.32 | 15.26 | 15.27 | 16.00                     |
|                    | 15 (RB_Pos:0) | 15.16       | 15.11 | 15.15 | 16.00                     | 15.33 | 15.26 | 15.21 | 16.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18607       | 18900 | 19193 |                           | 18607 | 18900 | 19193 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 14.98       | 14.97 | 14.97 | 16.00                     | 15.28 | 15.23 | 15.20 | 16.00                     |
|                    | 1 (RB_Pos:3)  | 15.05       | 15.06 | 15.05 | 16.00                     | 15.35 | 15.27 | 15.26 | 16.00                     |
|                    | 1 (RB_Pos:5)  | 14.98       | 14.98 | 14.95 | 16.00                     | 15.30 | 15.21 | 15.19 | 16.00                     |
|                    | 3 (RB_Pos:0)  | 15.15       | 15.06 | 15.11 | 16.00                     | 15.26 | 15.40 | 15.39 | 16.00                     |
|                    | 3 (RB_Pos:1)  | 15.11       | 15.11 | 15.15 | 16.00                     | 15.32 | 15.43 | 15.43 | 16.00                     |
|                    | 3 (RB_Pos:3)  | 15.09       | 15.09 | 15.13 | 16.00                     | 15.28 | 15.39 | 15.42 | 16.00                     |
|                    | 6 (RB_Pos:0)  | 14.98       | 15.01 | 15.00 | 16.00                     | 15.30 | 15.05 | 15.35 | 16.00                     |



### 8.6.13 Power Reduced Level 4 of LTE Band 2

| FDD LTE Band 2     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18700       | 18900        | 19100 |                           | 18700 | 18900 | 19100 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 20.40       | <b>20.50</b> | 20.24 | 21.00                     | 20.69 | 20.74 | 20.46 | 21.00                     |
|                    | 1 (RB_Pos:50)  | 20.19       | 20.16        | 20.06 | 21.00                     | 20.57 | 20.38 | 20.31 | 21.00                     |
|                    | 1 (RB_Pos:99)  | 20.40       | 20.43        | 20.06 | 21.00                     | 20.73 | 20.59 | 20.30 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.38       | 20.32        | 20.25 | 21.00                     | 20.50 | 20.49 | 20.36 | 21.00                     |
|                    | 50 (RB_Pos:25) | 20.32       | 20.22        | 20.21 | 21.00                     | 20.48 | 20.35 | 20.31 | 21.00                     |
|                    | 50 (RB_Pos:50) | 20.31       | 20.30        | 20.16 | 21.00                     | 20.48 | 20.46 | 20.26 | 21.00                     |
|                    | 100 (RB_Pos:0) | 20.29       | 20.31        | 20.25 | 21.00                     | 20.46 | 20.47 | 20.30 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18675       | 18900        | 19125 |                           | 18675 | 18900 | 19125 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 20.20       | 20.22        | 20.25 | 21.00                     | 20.30 | 20.45 | 20.53 | 21.00                     |
|                    | 1 (RB_Pos:38)  | 20.09       | 20.10        | 20.08 | 21.00                     | 20.14 | 20.31 | 20.31 | 21.00                     |
|                    | 1 (RB_Pos:74)  | 20.25       | 20.24        | 20.13 | 21.00                     | 20.28 | 20.45 | 20.32 | 21.00                     |
|                    | 36 (RB_Pos:0)  | 20.19       | 20.23        | 20.22 | 21.00                     | 20.36 | 20.36 | 20.31 | 21.00                     |
|                    | 36 (RB_Pos:20) | 20.29       | 20.17        | 20.18 | 21.00                     | 20.45 | 20.35 | 20.29 | 21.00                     |
|                    | 36 (RB_Pos:39) | 20.28       | 20.30        | 20.14 | 21.00                     | 20.44 | 20.42 | 20.24 | 21.00                     |
|                    | 75 (RB_Pos:0)  | 20.26       | 20.26        | 20.15 | 21.00                     | 20.44 | 20.43 | 20.27 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18650       | 18900        | 19150 |                           | 18650 | 18900 | 19150 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 20.37       | 20.39        | 20.19 | 21.00                     | 20.42 | 20.84 | 20.36 | 21.00                     |
|                    | 1 (RB_Pos:25)  | 20.05       | 20.09        | 20.11 | 21.00                     | 20.14 | 20.54 | 20.24 | 21.00                     |
|                    | 1 (RB_Pos:49)  | 20.41       | 20.28        | 20.13 | 21.00                     | 20.42 | 20.31 | 20.24 | 21.00                     |
|                    | 25 (RB_Pos:0)  | 20.19       | 20.19        | 20.19 | 21.00                     | 20.32 | 20.30 | 20.40 | 21.00                     |
|                    | 25 (RB_Pos:12) | 20.18       | 20.20        | 20.17 | 21.00                     | 20.32 | 20.32 | 20.39 | 21.00                     |
|                    | 25 (RB_Pos:25) | 20.30       | 20.16        | 20.19 | 21.00                     | 20.39 | 20.30 | 20.35 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.32       | 20.18        | 20.23 | 21.00                     | 20.45 | 20.35 | 20.32 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 18625       | 18900        | 19175 |                           | 18625 | 18900 | 19175 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 20.12       | 20.17        | 20.15 | 21.00                     | 20.41 | 20.46 | 20.37 | 21.00                     |
|                    | 1 (RB_Pos:13)  | 20.16       | 20.18        | 20.17 | 21.00                     | 20.47 | 20.50 | 20.36 | 21.00                     |
|                    | 1 (RB_Pos:24)  | 20.06       | 20.13        | 20.11 | 21.00                     | 20.41 | 20.43 | 20.33 | 21.00                     |
|                    | 12 (RB_Pos:0)  | 20.20       | 20.17        | 20.18 | 21.00                     | 20.34 | 20.41 | 20.33 | 21.00                     |
|                    | 12 (RB_Pos:6)  | 20.14       | 20.16        | 20.19 | 21.00                     | 20.37 | 20.39 | 20.34 | 21.00                     |
|                    | 12 (RB_Pos:13) | 20.14       | 20.12        | 20.16 | 21.00                     | 20.33 | 20.38 | 20.32 | 21.00                     |

|                    | 25 (RB_Pos:0) | 20.14       | 20.15 | 20.20 | 21.00                     | 20.33 | 20.34 | 20.22 | 21.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18615       | 18900 | 19185 |                           | 18615 | 18900 | 19185 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 20.05       | 20.08 | 20.12 | 21.00                     | 20.14 | 20.29 | 20.28 | 21.00                     |
|                    | 1 (RB_Pos:8)  | 20.06       | 20.07 | 20.06 | 21.00                     | 20.13 | 20.28 | 20.21 | 21.00                     |
|                    | 1 (RB_Pos:14) | 20.04       | 20.05 | 20.10 | 21.00                     | 20.11 | 20.27 | 20.23 | 21.00                     |
|                    | 8 (RB_Pos:0)  | 20.13       | 20.11 | 20.10 | 21.00                     | 20.40 | 20.30 | 20.29 | 21.00                     |
|                    | 8 (RB_Pos:3)  | 20.14       | 20.13 | 20.15 | 21.00                     | 20.37 | 20.30 | 20.33 | 21.00                     |
|                    | 8 (RB_Pos:7)  | 20.09       | 20.10 | 20.09 | 21.00                     | 20.33 | 20.28 | 20.25 | 21.00                     |
|                    | 15 (RB_Pos:0) | 20.14       | 20.11 | 20.18 | 21.00                     | 20.29 | 20.27 | 20.17 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 18607       | 18900 | 19193 |                           | 18607 | 18900 | 19193 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 19.97       | 19.96 | 20.00 | 21.00                     | 20.25 | 20.21 | 20.13 | 21.00                     |
|                    | 1 (RB_Pos:3)  | 20.02       | 20.04 | 20.06 | 21.00                     | 20.33 | 20.26 | 20.21 | 21.00                     |
|                    | 1 (RB_Pos:5)  | 19.96       | 19.98 | 19.97 | 21.00                     | 20.26 | 20.20 | 20.13 | 21.00                     |
|                    | 3 (RB_Pos:0)  | 20.03       | 20.06 | 20.10 | 21.00                     | 20.24 | 20.39 | 20.32 | 21.00                     |
|                    | 3 (RB_Pos:1)  | 20.13       | 20.09 | 20.17 | 21.00                     | 20.29 | 20.45 | 20.40 | 21.00                     |
|                    | 3 (RB_Pos:3)  | 20.03       | 20.04 | 20.11 | 21.00                     | 20.24 | 20.37 | 20.34 | 21.00                     |
|                    | 6 (RB_Pos:0)  | 19.99       | 19.99 | 20.01 | 21.00                     | 20.26 | 20.04 | 20.32 | 21.00                     |

## 8.6.14 Power Reduced Level 1 of LTE Band 4

| FDD LTE Band 4     |                |             |       |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20050       | 20175 | 20300 |                           | 20050 | 20175 | 20300 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 18.41       | 18.57 | 18.50 | 19.50                     | 18.80 | 18.62 | 19.00 | 19.50                     |
|                    | 1 (RB_Pos:50)  | 18.31       | 18.46 | 18.50 | 19.50                     | 18.61 | 18.91 | 18.98 | 19.50                     |
|                    | 1 (RB_Pos:99)  | 18.39       | 18.61 | 18.41 | 19.50                     | 18.80 | 19.10 | 18.75 | 19.50                     |
|                    | 50 (RB_Pos:0)  | 18.44       | 18.53 | 18.51 | 19.50                     | 18.57 | 18.62 | 18.62 | 19.50                     |
|                    | 50 (RB_Pos:25) | 18.41       | 18.51 | 18.49 | 19.50                     | 18.56 | 18.57 | 18.60 | 19.50                     |
|                    | 50 (RB_Pos:50) | 18.42       | 18.50 | 18.48 | 19.50                     | 18.49 | 18.55 | 18.58 | 19.50                     |
|                    | 100 (RB_Pos:0) | 18.39       | 18.72 | 18.49 | 19.50                     | 18.53 | 18.56 | 18.62 | 19.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19275       | 19575 | 19875 |                           | 19275 | 19575 | 19875 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 18.44       | 18.51 | 18.63 | 19.50                     | 18.48 | 19.00 | 18.70 | 19.50                     |
|                    | 1 (RB_Pos:38)  | 18.33       | 18.36 | 18.50 | 19.50                     | 18.40 | 18.60 | 18.76 | 19.50                     |
|                    | 1 (RB_Pos:74)  | 18.33       | 18.52 | 18.38 | 19.50                     | 18.39 | 18.98 | 18.47 | 19.50                     |
|                    | 36 (RB_Pos:0)  | 18.43       | 18.44 | 18.55 | 19.50                     | 18.52 | 18.65 | 18.67 | 19.50                     |
|                    | 36 (RB_Pos:20) | 18.37       | 18.43 | 18.41 | 19.50                     | 18.52 | 18.64 | 18.55 | 19.50                     |
|                    | 36 (RB_Pos:39) | 18.40       | 18.46 | 18.43 | 19.50                     | 18.46 | 18.61 | 18.49 | 19.50                     |
|                    | 75 (RB_Pos:0)  | 18.35       | 18.43 | 18.44 | 19.50                     | 18.51 | 18.58 | 18.53 | 19.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19250       | 19575 | 19900 |                           | 19250 | 19575 | 19900 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 18.41       | 18.47 | 18.51 | 19.50                     | 18.46 | 18.93 | 18.66 | 19.50                     |
|                    | 1 (RB_Pos:25)  | 18.31       | 18.39 | 18.37 | 19.50                     | 18.38 | 18.84 | 18.47 | 19.50                     |
|                    | 1 (RB_Pos:49)  | 18.34       | 18.42 | 18.38 | 19.50                     | 18.38 | 18.89 | 18.49 | 19.50                     |
|                    | 25 (RB_Pos:0)  | 18.46       | 18.46 | 18.46 | 19.50                     | 18.56 | 18.61 | 18.67 | 19.50                     |
|                    | 25 (RB_Pos:12) | 18.45       | 18.48 | 18.45 | 19.50                     | 18.54 | 18.64 | 18.67 | 19.50                     |
|                    | 25 (RB_Pos:25) | 18.45       | 18.47 | 18.40 | 19.50                     | 18.52 | 18.60 | 18.63 | 19.50                     |
|                    | 50 (RB_Pos:0)  | 18.41       | 18.45 | 18.43 | 19.50                     | 18.48 | 18.60 | 18.59 | 19.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |                | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19225       | 19575 | 19925 |                           | 19225 | 19575 | 19925 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 18.38       | 18.46 | 18.40 | 19.50                     | 18.64 | 18.74 | 18.65 | 19.50                     |
|                    | 1 (RB_Pos:13)  | 18.44       | 18.46 | 18.42 | 19.50                     | 18.68 | 18.81 | 18.66 | 19.50                     |
|                    | 1 (RB_Pos:24)  | 18.33       | 18.45 | 18.41 | 19.50                     | 18.63 | 18.75 | 18.66 | 19.50                     |
|                    | 12 (RB_Pos:0)  | 18.45       | 18.48 | 18.45 | 19.50                     | 18.61 | 18.71 | 18.58 | 19.50                     |
|                    | 12 (RB_Pos:6)  | 18.40       | 18.44 | 18.43 | 19.50                     | 18.59 | 18.70 | 18.59 | 19.50                     |
|                    | 12 (RB_Pos:13) | 18.42       | 18.42 | 18.44 | 19.50                     | 18.52 | 18.67 | 18.56 | 19.50                     |

|                    | 25 (RB_Pos:0) | 18.41       | 18.42 | 18.45 | 19.50                     | 18.56 | 18.58 | 18.48 | 19.50                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19215       | 19575 | 19935 |                           | 19215 | 19575 | 19935 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 18.35       | 18.42 | 18.36 | 19.50                     | 18.38 | 18.87 | 18.53 | 19.50                     |
|                    | 1 (RB_Pos:8)  | 18.36       | 18.38 | 18.38 | 19.50                     | 18.38 | 18.84 | 18.52 | 19.50                     |
|                    | 1 (RB_Pos:14) | 18.35       | 18.42 | 18.40 | 19.50                     | 18.39 | 18.90 | 18.49 | 19.50                     |
|                    | 8 (RB_Pos:0)  | 18.38       | 18.40 | 18.34 | 19.50                     | 18.60 | 18.58 | 18.52 | 19.50                     |
|                    | 8 (RB_Pos:3)  | 18.40       | 18.43 | 18.42 | 19.50                     | 18.60 | 18.59 | 18.61 | 19.50                     |
|                    | 8 (RB_Pos:7)  | 18.39       | 18.40 | 18.34 | 19.50                     | 18.55 | 18.55 | 18.53 | 19.50                     |
|                    | 15 (RB_Pos:0) | 18.38       | 18.42 | 18.44 | 19.50                     | 18.53 | 18.55 | 18.44 | 19.50                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19207       | 19575 | 19943 |                           | 19207 | 19575 | 19943 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 18.24       | 18.28 | 18.26 | 19.50                     | 18.54 | 18.52 | 18.43 | 19.50                     |
|                    | 1 (RB_Pos:3)  | 18.31       | 18.36 | 18.36 | 19.50                     | 18.63 | 18.86 | 18.48 | 19.50                     |
|                    | 1 (RB_Pos:5)  | 18.25       | 18.32 | 18.26 | 19.50                     | 18.50 | 18.79 | 18.44 | 19.50                     |
|                    | 3 (RB_Pos:0)  | 18.30       | 18.35 | 18.32 | 19.50                     | 18.47 | 18.65 | 18.62 | 19.50                     |
|                    | 3 (RB_Pos:1)  | 18.34       | 18.43 | 18.39 | 19.50                     | 18.53 | 18.71 | 18.66 | 19.50                     |
|                    | 3 (RB_Pos:3)  | 18.31       | 18.37 | 18.35 | 19.50                     | 18.50 | 18.59 | 18.59 | 19.50                     |
|                    | 6 (RB_Pos:0)  | 18.29       | 18.39 | 18.28 | 19.50                     | 18.56 | 18.41 | 18.60 | 19.50                     |

### 8.6.15 Power Reduced Level 2 of LTE Band 4

| FDD LTE Band 4     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20050       | 20175        | 20300 |                           | 20050 | 20175 | 20300 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 17.25       | 17.24        | 17.21 | 18.00                     | 17.74 | 17.46 | 17.68 | 18.00                     |
|                    | 1 (RB_Pos:50)  | 17.01       | 17.15        | 17.17 | 18.00                     | 17.18 | 17.63 | 17.39 | 18.00                     |
|                    | 1 (RB_Pos:99)  | 17.09       | <b>17.30</b> | 17.10 | 18.00                     | 17.29 | 17.72 | 17.57 | 18.00                     |
|                    | 50 (RB_Pos:0)  | 17.15       | 17.19        | 17.23 | 18.00                     | 17.30 | 17.33 | 17.28 | 18.00                     |
|                    | 50 (RB_Pos:25) | 17.11       | 17.22        | 17.20 | 18.00                     | 17.27 | 17.32 | 17.25 | 18.00                     |
|                    | 50 (RB_Pos:50) | 17.08       | 17.20        | 17.16 | 18.00                     | 17.19 | 17.31 | 17.20 | 18.00                     |
|                    | 100 (RB_Pos:0) | 17.14       | 17.20        | 17.19 | 18.00                     | 17.24 | 17.26 | 17.25 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19275       | 19575        | 19875 |                           | 19275 | 19575 | 19875 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 17.26       | 17.20        | 17.35 | 18.00                     | 17.22 | 17.42 | 17.81 | 18.00                     |
|                    | 1 (RB_Pos:38)  | 17.09       | 17.05        | 17.25 | 18.00                     | 17.08 | 17.36 | 17.71 | 18.00                     |
|                    | 1 (RB_Pos:74)  | 17.08       | 17.21        | 17.09 | 18.00                     | 17.14 | 17.65 | 17.22 | 18.00                     |
|                    | 36 (RB_Pos:0)  | 17.13       | 17.15        | 17.29 | 18.00                     | 17.20 | 17.31 | 17.33 | 18.00                     |
|                    | 36 (RB_Pos:20) | 17.07       | 17.13        | 17.15 | 18.00                     | 17.23 | 17.27 | 17.21 | 18.00                     |
|                    | 36 (RB_Pos:39) | 17.08       | 17.16        | 17.15 | 18.00                     | 17.17 | 17.28 | 17.22 | 18.00                     |
|                    | 75 (RB_Pos:0)  | 17.13       | 17.15        | 17.18 | 18.00                     | 17.22 | 17.27 | 17.25 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19250       | 19575        | 19900 |                           | 19250 | 19575 | 19900 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 17.21       | 17.17        | 17.25 | 18.00                     | 17.17 | 17.63 | 17.41 | 18.00                     |
|                    | 1 (RB_Pos:25)  | 17.12       | 17.09        | 17.12 | 18.00                     | 17.10 | 17.56 | 17.21 | 18.00                     |
|                    | 1 (RB_Pos:49)  | 17.17       | 17.12        | 17.07 | 18.00                     | 17.07 | 17.59 | 17.19 | 18.00                     |
|                    | 25 (RB_Pos:0)  | 17.19       | 17.22        | 17.18 | 18.00                     | 17.29 | 17.34 | 17.30 | 18.00                     |
|                    | 25 (RB_Pos:12) | 17.16       | 17.21        | 17.15 | 18.00                     | 17.24 | 17.33 | 17.30 | 18.00                     |
|                    | 25 (RB_Pos:25) | 17.12       | 17.20        | 17.16 | 18.00                     | 17.24 | 17.28 | 17.32 | 18.00                     |
|                    | 50 (RB_Pos:0)  | 17.17       | 17.22        | 17.15 | 18.00                     | 17.22 | 17.30 | 17.27 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19225       | 19575        | 19925 |                           | 19225 | 19575 | 19925 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 17.22       | 17.19        | 17.10 | 18.00                     | 17.37 | 17.37 | 17.38 | 18.00                     |
|                    | 1 (RB_Pos:13)  | 17.23       | 17.19        | 17.15 | 18.00                     | 17.43 | 17.37 | 17.37 | 18.00                     |
|                    | 1 (RB_Pos:24)  | 17.17       | 17.16        | 17.11 | 18.00                     | 17.38 | 17.46 | 17.36 | 18.00                     |
|                    | 12 (RB_Pos:0)  | 17.20       | 17.18        | 17.16 | 18.00                     | 17.27 | 17.42 | 17.30 | 18.00                     |
|                    | 12 (RB_Pos:6)  | 17.23       | 17.18        | 17.17 | 18.00                     | 17.27 | 17.39 | 17.30 | 18.00                     |
|                    | 12 (RB_Pos:13) | 17.07       | 17.13        | 17.12 | 18.00                     | 17.31 | 17.35 | 17.25 | 18.00                     |

|                    | 25 (RB_Pos:0) | 17.14       | 17.16 | 17.13 | 18.00                     | 17.22 | 17.29 | 17.17 | 18.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19215       | 19575 | 19935 |                           | 19215 | 19575 | 19935 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 17.16       | 17.12 | 17.12 | 18.00                     | 17.10 | 17.59 | 17.24 | 18.00                     |
|                    | 1 (RB_Pos:8)  | 17.16       | 17.07 | 17.06 | 18.00                     | 17.07 | 17.54 | 17.16 | 18.00                     |
|                    | 1 (RB_Pos:14) | 17.10       | 17.12 | 17.07 | 18.00                     | 17.05 | 17.54 | 17.18 | 18.00                     |
|                    | 8 (RB_Pos:0)  | 17.08       | 17.11 | 17.03 | 18.00                     | 17.30 | 17.29 | 17.24 | 18.00                     |
|                    | 8 (RB_Pos:3)  | 17.11       | 17.13 | 17.09 | 18.00                     | 17.31 | 17.30 | 17.26 | 18.00                     |
|                    | 8 (RB_Pos:7)  | 17.06       | 17.11 | 17.03 | 18.00                     | 17.27 | 17.25 | 17.17 | 18.00                     |
|                    | 15 (RB_Pos:0) | 17.10       | 17.13 | 17.11 | 18.00                     | 17.21 | 17.26 | 17.14 | 18.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19207       | 19575 | 19943 |                           | 19207 | 19575 | 19943 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 17.10       | 17.00 | 16.99 | 18.00                     | 17.21 | 17.49 | 17.11 | 18.00                     |
|                    | 1 (RB_Pos:3)  | 17.11       | 17.07 | 17.06 | 18.00                     | 17.27 | 17.53 | 17.16 | 18.00                     |
|                    | 1 (RB_Pos:5)  | 17.05       | 17.03 | 17.01 | 18.00                     | 17.23 | 17.50 | 17.13 | 18.00                     |
|                    | 3 (RB_Pos:0)  | 17.16       | 17.06 | 17.04 | 18.00                     | 17.18 | 17.36 | 17.23 | 18.00                     |
|                    | 3 (RB_Pos:1)  | 17.15       | 17.14 | 17.11 | 18.00                     | 17.21 | 17.38 | 17.28 | 18.00                     |
|                    | 3 (RB_Pos:3)  | 17.02       | 17.04 | 17.04 | 18.00                     | 17.15 | 17.31 | 17.23 | 18.00                     |
|                    | 6 (RB_Pos:0)  | 16.99       | 17.09 | 16.97 | 18.00                     | 17.30 | 17.06 | 17.27 | 18.00                     |

### 8.6.16 Power Reduced Level 3 of LTE Band 4

| FDD LTE Band 4     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20050       | 20175        | 20300 |                           | 20050 | 20175 | 20300 |                           |
| 20 MHz             | 1 (RB_Pos:0)   | 16.25       | 16.23        | 16.19 | 17.00                     | 16.57 | 16.55 | 16.50 | 17.00                     |
|                    | 1 (RB_Pos:50)  | 16.11       | 16.15        | 16.13 | 17.00                     | 16.47 | 16.32 | 16.51 | 17.00                     |
|                    | 1 (RB_Pos:99)  | 16.18       | <b>16.28</b> | 16.09 | 17.00                     | 16.42 | 16.77 | 16.47 | 17.00                     |
|                    | 50 (RB_Pos:0)  | 16.24       | 16.19        | 16.19 | 17.00                     | 16.31 | 16.36 | 16.28 | 17.00                     |
|                    | 50 (RB_Pos:25) | 16.20       | 16.21        | 16.19 | 17.00                     | 16.28 | 16.31 | 16.26 | 17.00                     |
|                    | 50 (RB_Pos:50) | 16.16       | 16.19        | 16.15 | 17.00                     | 16.25 | 16.30 | 16.22 | 17.00                     |
|                    | 100 (RB_Pos:0) | 16.23       | 16.16        | 16.18 | 17.00                     | 16.22 | 16.29 | 16.27 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19275       | 19575        | 19875 |                           | 19275 | 19575 | 19875 |                           |
| 15 MHz             | 1 (RB_Pos:0)   | 16.25       | 16.17        | 16.36 | 17.00                     | 16.30 | 16.33 | 16.85 | 17.00                     |
|                    | 1 (RB_Pos:38)  | 16.10       | 16.05        | 16.15 | 17.00                     | 16.17 | 16.42 | 16.46 | 17.00                     |
|                    | 1 (RB_Pos:74)  | 16.17       | 16.22        | 16.08 | 17.00                     | 16.24 | 16.70 | 16.38 | 17.00                     |
|                    | 36 (RB_Pos:0)  | 16.23       | 16.16        | 16.30 | 17.00                     | 16.33 | 16.34 | 16.38 | 17.00                     |
|                    | 36 (RB_Pos:20) | 16.20       | 16.14        | 16.14 | 17.00                     | 16.32 | 16.30 | 16.25 | 17.00                     |
|                    | 36 (RB_Pos:39) | 16.20       | 16.17        | 16.09 | 17.00                     | 16.29 | 16.32 | 16.22 | 17.00                     |
|                    | 75 (RB_Pos:0)  | 16.15       | 16.12        | 16.12 | 17.00                     | 16.36 | 16.25 | 16.24 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 19250       | 19575        | 19900 |                           | 19250 | 19575 | 19900 |                           |
| 10 MHz             | 1 (RB_Pos:0)   | 16.19       | 16.17        | 16.26 | 17.00                     | 16.25 | 16.63 | 16.38 | 17.00                     |
|                    | 1 (RB_Pos:25)  | 16.12       | 16.11        | 16.07 | 17.00                     | 16.15 | 16.55 | 16.23 | 17.00                     |
|                    | 1 (RB_Pos:49)  | 16.13       | 16.10        | 16.09 | 17.00                     | 16.21 | 16.56 | 16.19 | 17.00                     |
|                    | 25 (RB_Pos:0)  | 16.21       | 16.16        | 16.16 | 17.00                     | 16.35 | 16.36 | 16.33 | 17.00                     |
|                    | 25 (RB_Pos:12) | 16.21       | 16.17        | 16.16 | 17.00                     | 16.37 | 16.35 | 16.36 | 17.00                     |
|                    | 25 (RB_Pos:25) | 16.21       | 16.18        | 16.12 | 17.00                     | 16.33 | 16.29 | 16.29 | 17.00                     |
|                    | 50 (RB_Pos:0)  | 16.21       | 16.17        | 16.17 | 17.00                     | 16.36 | 16.32 | 16.28 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 19225       | 19575        | 19925 |                           | 19225 | 19575 | 19925 |                           |
| 5 MHz              | 1 (RB_Pos:0)   | 16.18       | 16.17        | 16.11 | 17.00                     | 16.50 | 16.34 | 16.35 | 17.00                     |
|                    | 1 (RB_Pos:13)  | 16.19       | 16.19        | 16.12 | 17.00                     | 16.50 | 16.41 | 16.38 | 17.00                     |
|                    | 1 (RB_Pos:24)  | 16.12       | 16.15        | 16.08 | 17.00                     | 16.47 | 16.22 | 16.35 | 17.00                     |
|                    | 12 (RB_Pos:0)  | 16.17       | 16.17        | 16.12 | 17.00                     | 16.41 | 16.43 | 16.28 | 17.00                     |
|                    | 12 (RB_Pos:6)  | 16.23       | 16.17        | 16.12 | 17.00                     | 16.39 | 16.40 | 16.29 | 17.00                     |
|                    | 12 (RB_Pos:13) | 16.21       | 16.14        | 16.10 | 17.00                     | 16.36 | 16.38 | 16.30 | 17.00                     |

|                    | 25 (RB_Pos:0) | 16.20       | 16.11 | 16.12 | 17.00                     | 16.36 | 16.31 | 16.21 | 17.00                     |
|--------------------|---------------|-------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19215       | 19575 | 19935 |                           | 19215 | 19575 | 19935 |                           |
| 3.0 MHz            | 1 (RB_Pos:0)  | 16.17       | 16.10 | 16.08 | 17.00                     | 16.20 | 16.59 | 16.23 | 17.00                     |
|                    | 1 (RB_Pos:8)  | 16.12       | 16.05 | 16.05 | 17.00                     | 16.20 | 16.26 | 16.18 | 17.00                     |
|                    | 1 (RB_Pos:14) | 16.14       | 16.10 | 16.04 | 17.00                     | 16.18 | 16.57 | 16.21 | 17.00                     |
|                    | 8 (RB_Pos:0)  | 16.14       | 16.11 | 16.08 | 17.00                     | 16.38 | 16.26 | 16.23 | 17.00                     |
|                    | 8 (RB_Pos:3)  | 16.16       | 16.14 | 16.10 | 17.00                     | 16.43 | 16.33 | 16.26 | 17.00                     |
|                    | 8 (RB_Pos:7)  | 16.16       | 16.12 | 16.04 | 17.00                     | 16.35 | 16.28 | 16.20 | 17.00                     |
|                    | 15 (RB_Pos:0) | 16.16       | 16.15 | 16.09 | 17.00                     | 16.36 | 16.24 | 16.12 | 17.00                     |
| Bandwidth<br>(MHz) | RB Set        | Power (dBm) |       |       |                           |       |       |       |                           |
|                    |               | QPSK        |       |       | Tune up<br>limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel       | 19207       | 19575 | 19943 |                           | 19207 | 19575 | 19943 |                           |
| 1.4 MHz            | 1 (RB_Pos:0)  | 16.06       | 16.04 | 15.95 | 17.00                     | 16.33 | 16.48 | 16.13 | 17.00                     |
|                    | 1 (RB_Pos:3)  | 16.11       | 16.10 | 16.03 | 17.00                     | 16.43 | 16.55 | 16.20 | 17.00                     |
|                    | 1 (RB_Pos:5)  | 16.09       | 16.01 | 15.97 | 17.00                     | 16.33 | 16.51 | 16.18 | 17.00                     |
|                    | 3 (RB_Pos:0)  | 16.11       | 16.04 | 16.02 | 17.00                     | 16.30 | 16.31 | 16.25 | 17.00                     |
|                    | 3 (RB_Pos:1)  | 16.19       | 16.10 | 16.08 | 17.00                     | 16.32 | 16.36 | 16.33 | 17.00                     |
|                    | 3 (RB_Pos:3)  | 16.11       | 16.05 | 16.05 | 17.00                     | 16.30 | 16.31 | 16.29 | 17.00                     |
|                    | 6 (RB_Pos:0)  | 16.10       | 16.06 | 16.00 | 17.00                     | 16.36 | 16.06 | 16.29 | 17.00                     |



## 8.6.17 Power Reduced Level 1&amp;2 of LTE Band 7

| FDD LTE Band 7     |                |              |       |       |                           |       |       |       |                           |
|--------------------|----------------|--------------|-------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |       |       |                           |       |       |       |                           |
|                    |                | QPSK         |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20850        | 21100 | 21350 |                           | 20850 | 21100 | 21350 |                           |
| 20MHz              | 1 (RB_Pos:0)   | <b>18.18</b> | 18.14 | 18.01 | 19.00                     | 18.60 | 18.62 | 18.45 | 19.00                     |
|                    | 1 (RB_Pos:50)  | 18.02        | 18.02 | 17.85 | 19.00                     | 18.42 | 18.47 | 18.30 | 19.00                     |
|                    | 1 (RB_Pos:99)  | 18.02        | 18.11 | 17.93 | 19.00                     | 18.38 | 18.54 | 18.42 | 19.00                     |
|                    | 50 (RB_Pos:0)  | 18.20        | 18.09 | 18.03 | 19.00                     | 18.23 | 18.17 | 18.06 | 19.00                     |
|                    | 50 (RB_Pos:25) | 18.15        | 18.22 | 17.98 | 19.00                     | 18.19 | 18.29 | 18.00 | 19.00                     |
|                    | 50 (RB_Pos:50) | 18.08        | 18.09 | 17.91 | 19.00                     | 18.12 | 18.16 | 17.95 | 19.00                     |
|                    | 100 (RB_Pos:0) | 18.13        | 18.17 | 17.97 | 19.00                     | 18.19 | 18.23 | 18.00 | 19.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |       |       |                           |       |       |       |                           |
|                    |                | QPSK         |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20825        | 21100 | 21375 |                           | 20825 | 21100 | 21375 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 18.15        | 18.12 | 18.04 | 19.00                     | 18.18 | 18.53 | 18.51 | 19.00                     |
|                    | 1 (RB_Pos:38)  | 18.03        | 17.97 | 17.91 | 19.00                     | 18.07 | 18.45 | 18.39 | 19.00                     |
|                    | 1 (RB_Pos:74)  | 17.96        | 18.04 | 17.95 | 19.00                     | 18.05 | 18.46 | 18.24 | 19.00                     |
|                    | 36 (RB_Pos:0)  | 18.13        | 18.03 | 17.94 | 19.00                     | 18.19 | 18.17 | 18.00 | 19.00                     |
|                    | 36 (RB_Pos:20) | 18.12        | 18.15 | 17.96 | 19.00                     | 18.16 | 18.28 | 18.02 | 19.00                     |
|                    | 36 (RB_Pos:39) | 18.06        | 18.10 | 17.90 | 19.00                     | 18.11 | 18.22 | 17.97 | 19.00                     |
|                    | 75 (RB_Pos:0)  | 18.03        | 18.10 | 17.90 | 19.00                     | 18.19 | 18.21 | 17.99 | 19.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |       |       |                           |       |       |       |                           |
|                    |                | QPSK         |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20800        | 21100 | 21400 |                           | 20800 | 21100 | 21400 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 18.10        | 18.05 | 17.97 | 19.00                     | 18.17 | 18.49 | 18.06 | 19.00                     |
|                    | 1 (RB_Pos:25)  | 18.04        | 17.99 | 18.04 | 19.00                     | 18.07 | 18.41 | 18.12 | 19.00                     |
|                    | 1 (RB_Pos:49)  | 18.04        | 18.06 | 18.01 | 19.00                     | 18.07 | 18.48 | 18.08 | 19.00                     |
|                    | 25 (RB_Pos:0)  | 18.17        | 18.09 | 17.96 | 19.00                     | 18.22 | 18.19 | 18.11 | 19.00                     |
|                    | 25 (RB_Pos:12) | 18.15        | 18.05 | 17.96 | 19.00                     | 18.24 | 18.14 | 18.11 | 19.00                     |
|                    | 25 (RB_Pos:25) | 18.11        | 18.17 | 18.06 | 19.00                     | 18.24 | 18.26 | 18.20 | 19.00                     |
|                    | 50 (RB_Pos:0)  | 18.10        | 18.17 | 17.93 | 19.00                     | 18.19 | 18.25 | 18.07 | 19.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |       |       |                           |       |       |       |                           |
|                    |                | QPSK         |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20775        | 21100 | 21425 |                           | 20775 | 21100 | 21425 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 18.08        | 18.01 | 18.04 | 19.00                     | 18.35 | 18.31 | 18.27 | 19.00                     |
|                    | 1 (RB_Pos:13)  | 18.17        | 18.08 | 18.10 | 19.00                     | 18.42 | 18.44 | 18.28 | 19.00                     |
|                    | 1 (RB_Pos:24)  | 18.06        | 18.00 | 18.01 | 19.00                     | 18.36 | 18.28 | 18.20 | 19.00                     |
|                    | 12 (RB_Pos:0)  | 18.15        | 18.06 | 18.12 | 19.00                     | 18.31 | 18.25 | 18.21 | 19.00                     |
|                    | 12 (RB_Pos:6)  | 18.14        | 18.07 | 18.09 | 19.00                     | 18.29 | 18.23 | 18.19 | 19.00                     |
|                    | 12 (RB_Pos:13) | 18.09        | 17.99 | 18.08 | 19.00                     | 18.27 | 18.24 | 18.18 | 19.00                     |

|  |               |       |       |       |       |       |       |       |       |
|--|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | 25 (RB_Pos:0) | 18.13 | 18.03 | 18.03 | 19.00 | 18.26 | 18.15 | 18.06 | 19.00 |
|--|---------------|-------|-------|-------|-------|-------|-------|-------|-------|

### 8.6.18 Power Reduced Level 3 of LTE Band 7

| FDD LTE Band 7     |                |              |              |       |                           |       |       |       |                           |
|--------------------|----------------|--------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |              |       |                           |       |       |       |                           |
|                    |                | QPSK         |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20850        | 21100        | 21350 |                           | 20850 | 21100 | 21350 |                           |
| 20MHz              | 1 (RB_Pos:0)   | <b>16.79</b> | <b>16.79</b> | 16.62 | 17.50                     | 17.13 | 17.26 | 16.84 | 17.50                     |
|                    | 1 (RB_Pos:50)  | 16.68        | 16.63        | 16.50 | 17.50                     | 17.06 | 17.11 | 16.97 | 17.50                     |
|                    | 1 (RB_Pos:99)  | 16.63        | 16.70        | 16.53 | 17.50                     | 16.95 | 17.17 | 17.02 | 17.50                     |
|                    | 50 (RB_Pos:0)  | 16.80        | 16.69        | 16.60 | 17.50                     | 16.91 | 16.86 | 16.67 | 17.50                     |
|                    | 50 (RB_Pos:25) | 16.77        | 16.81        | 16.63 | 17.50                     | 16.87 | 16.87 | 16.61 | 17.50                     |
|                    | 50 (RB_Pos:50) | 16.64        | 16.75        | 16.53 | 17.50                     | 16.75 | 16.81 | 16.59 | 17.50                     |
|                    | 100 (RB_Pos:0) | 16.70        | 16.77        | 16.62 | 17.50                     | 16.87 | 16.83 | 16.67 | 17.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |              |       |                           |       |       |       |                           |
|                    |                | QPSK         |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20825        | 21100        | 21375 |                           | 20825 | 21100 | 21375 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 16.75        | 16.74        | 16.68 | 17.50                     | 16.81 | 17.18 | 17.13 | 17.50                     |
|                    | 1 (RB_Pos:38)  | 16.62        | 16.61        | 16.54 | 17.50                     | 16.69 | 17.06 | 17.01 | 17.50                     |
|                    | 1 (RB_Pos:74)  | 16.64        | 16.64        | 16.56 | 17.50                     | 16.69 | 17.11 | 17.06 | 17.50                     |
|                    | 36 (RB_Pos:0)  | 16.71        | 16.65        | 16.61 | 17.50                     | 16.87 | 16.86 | 16.71 | 17.50                     |
|                    | 36 (RB_Pos:20) | 16.68        | 16.76        | 16.56 | 17.50                     | 16.87 | 16.91 | 16.64 | 17.50                     |
|                    | 36 (RB_Pos:39) | 16.66        | 16.71        | 16.52 | 17.50                     | 16.80 | 16.85 | 16.58 | 17.50                     |
|                    | 75 (RB_Pos:0)  | 16.69        | 16.72        | 16.57 | 17.50                     | 16.81 | 16.89 | 16.68 | 17.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |              |       |                           |       |       |       |                           |
|                    |                | QPSK         |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20800        | 21100        | 21400 |                           | 20800 | 21100 | 21400 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 16.75        | 16.68        | 16.59 | 17.50                     | 16.81 | 17.12 | 16.70 | 17.50                     |
|                    | 1 (RB_Pos:25)  | 16.69        | 16.60        | 16.66 | 17.50                     | 16.73 | 17.06 | 16.75 | 17.50                     |
|                    | 1 (RB_Pos:49)  | 16.66        | 16.68        | 16.61 | 17.50                     | 16.70 | 17.12 | 16.71 | 17.50                     |
|                    | 25 (RB_Pos:0)  | 16.74        | 16.69        | 16.56 | 17.50                     | 16.91 | 16.77 | 16.73 | 17.50                     |
|                    | 25 (RB_Pos:12) | 16.77        | 16.69        | 16.60 | 17.50                     | 16.86 | 16.79 | 16.75 | 17.50                     |
|                    | 25 (RB_Pos:25) | 16.72        | 16.75        | 16.65 | 17.50                     | 16.81 | 16.85 | 16.84 | 17.50                     |
|                    | 50 (RB_Pos:0)  | 16.72        | 16.76        | 16.59 | 17.50                     | 16.79 | 16.82 | 16.66 | 17.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm)  |              |       |                           |       |       |       |                           |
|                    |                | QPSK         |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20775        | 21100        | 21425 |                           | 20775 | 21100 | 21425 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 16.70        | 16.66        | 16.64 | 17.50                     | 17.04 | 16.94 | 16.84 | 17.50                     |
|                    | 1 (RB_Pos:13)  | 16.77        | 16.73        | 16.70 | 17.50                     | 17.06 | 16.98 | 16.89 | 17.50                     |
|                    | 1 (RB_Pos:24)  | 16.66        | 16.61        | 16.62 | 17.50                     | 17.01 | 16.93 | 16.83 | 17.50                     |
|                    | 12 (RB_Pos:0)  | 16.77        | 16.63        | 16.70 | 17.50                     | 16.97 | 16.89 | 16.83 | 17.50                     |

|  |                |       |       |       |       |       |       |       |       |
|--|----------------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | 12 (RB_Pos:6)  | 16.77 | 16.66 | 16.71 | 17.50 | 16.95 | 16.91 | 16.82 | 17.50 |
|  | 12 (RB_Pos:13) | 16.72 | 16.61 | 16.64 | 17.50 | 16.92 | 16.86 | 16.79 | 17.50 |
|  | 25 (RB_Pos:0)  | 16.74 | 16.62 | 16.65 | 17.50 | 16.86 | 16.78 | 16.68 | 17.50 |

### 8.6.19 Power Reduced Level 4 of LTE Band 7

| FDD LTE Band 7     |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 20850       | 21100        | 21350 |                           | 20850 | 21100 | 21350 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 19.69       | <b>19.71</b> | 19.55 | 20.50                     | 20.11 | 19.94 | 19.73 | 20.50                     |
|                    | 1 (RB_Pos:50)  | 19.57       | 19.54        | 19.38 | 20.50                     | 19.84 | 19.86 | 19.75 | 20.50                     |
|                    | 1 (RB_Pos:99)  | 19.52       | 19.62        | 19.42 | 20.50                     | 19.96 | 19.77 | 19.76 | 20.50                     |
|                    | 50 (RB_Pos:0)  | 19.67       | 19.66        | 19.52 | 20.50                     | 19.89 | 19.85 | 19.66 | 20.50                     |
|                    | 50 (RB_Pos:25) | 19.69       | 19.71        | 19.54 | 20.50                     | 19.85 | 19.86 | 19.66 | 20.50                     |
|                    | 50 (RB_Pos:50) | 19.62       | 19.62        | 19.47 | 20.50                     | 19.79 | 19.80 | 19.57 | 20.50                     |
|                    | 100 (RB_Pos:0) | 19.67       | 19.73        | 19.51 | 20.50                     | 19.84 | 19.84 | 19.67 | 20.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20825       | 21100        | 21375 |                           | 20825 | 21100 | 21375 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 19.79       | 19.71        | 19.65 | 20.50                     | 19.82 | 20.19 | 20.10 | 20.50                     |
|                    | 1 (RB_Pos:38)  | 19.64       | 19.63        | 19.54 | 20.50                     | 19.72 | 20.04 | 20.03 | 20.50                     |
|                    | 1 (RB_Pos:74)  | 19.62       | 19.66        | 19.60 | 20.50                     | 19.62 | 20.09 | 20.06 | 20.50                     |
|                    | 36 (RB_Pos:0)  | 19.72       | 19.70        | 19.61 | 20.50                     | 19.86 | 19.84 | 19.64 | 20.50                     |
|                    | 36 (RB_Pos:20) | 19.73       | 19.77        | 19.60 | 20.50                     | 19.82 | 19.88 | 19.65 | 20.50                     |
|                    | 36 (RB_Pos:39) | 19.69       | 19.73        | 19.52 | 20.50                     | 19.76 | 19.86 | 19.56 | 20.50                     |
|                    | 75 (RB_Pos:0)  | 19.71       | 19.74        | 19.61 | 20.50                     | 19.83 | 19.86 | 19.62 | 20.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20800       | 21100        | 21400 |                           | 20800 | 21100 | 21400 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 19.78       | 19.67        | 19.62 | 20.50                     | 19.79 | 20.14 | 19.68 | 20.50                     |
|                    | 1 (RB_Pos:25)  | 19.73       | 19.62        | 19.67 | 20.50                     | 19.75 | 20.09 | 19.73 | 20.50                     |
|                    | 1 (RB_Pos:49)  | 19.71       | 19.71        | 19.63 | 20.50                     | 19.69 | 20.14 | 19.71 | 20.50                     |
|                    | 25 (RB_Pos:0)  | 19.80       | 19.71        | 19.60 | 20.50                     | 19.92 | 19.80 | 19.73 | 20.50                     |
|                    | 25 (RB_Pos:12) | 19.79       | 19.74        | 19.58 | 20.50                     | 19.87 | 19.82 | 19.73 | 20.50                     |
|                    | 25 (RB_Pos:25) | 19.77       | 19.75        | 19.66 | 20.50                     | 19.82 | 19.84 | 19.80 | 20.50                     |
|                    | 50 (RB_Pos:0)  | 19.76       | 19.77        | 19.62 | 20.50                     | 19.88 | 19.84 | 19.72 | 20.50                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune up<br>limit<br>(dBm) |
|                    | Channel        | 20775       | 21100        | 21425 |                           | 20775 | 21100 | 21425 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 19.75       | 19.69        | 19.64 | 20.50                     | 20.01 | 20.05 | 19.83 | 20.50                     |
|                    | 1 (RB_Pos:13)  | 19.79       | 19.72        | 19.67 | 20.50                     | 20.04 | 19.98 | 19.87 | 20.50                     |

|  |                |       |       |       |       |       |       |       |       |
|--|----------------|-------|-------|-------|-------|-------|-------|-------|-------|
|  | 1 (RB_Pos:24)  | 19.69 | 19.61 | 19.61 | 20.50 | 19.97 | 19.95 | 19.79 | 20.50 |
|  | 12 (RB_Pos:0)  | 19.79 | 19.68 | 19.69 | 20.50 | 19.94 | 19.89 | 19.84 | 20.50 |
|  | 12 (RB_Pos:6)  | 19.81 | 19.71 | 19.71 | 20.50 | 19.95 | 19.89 | 19.80 | 20.50 |
|  | 12 (RB_Pos:13) | 19.74 | 19.65 | 19.69 | 20.50 | 19.90 | 19.84 | 19.80 | 20.50 |
|  | 25 (RB_Pos:0)  | 19.76 | 19.64 | 19.65 | 20.50 | 19.88 | 19.80 | 19.69 | 20.50 |

### 8.6.20 Power Reduced Level 1&2 of LTE Band 38

| TDD LTE Band 38    |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37850       | 38000        | 38150 |                           | 37850 | 38000 | 38150 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 20.22       | <b>20.29</b> | 20.23 | 21.00                     | 20.56 | 20.62 | 20.57 | 21.00                     |
|                    | 1 (RB_Pos:50)  | 20.11       | 20.11        | 20.22 | 21.00                     | 20.46 | 20.47 | 20.64 | 21.00                     |
|                    | 1 (RB_Pos:99)  | 20.16       | 20.11        | 20.13 | 21.00                     | 20.53 | 20.31 | 20.58 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.23       | 20.29        | 20.24 | 21.00                     | 20.30 | 20.40 | 20.38 | 21.00                     |
|                    | 50 (RB_Pos:25) | 20.18       | 20.25        | 20.22 | 21.00                     | 20.26 | 20.41 | 20.36 | 21.00                     |
|                    | 50 (RB_Pos:50) | 20.24       | 20.16        | 20.11 | 21.00                     | 20.29 | 20.30 | 20.26 | 21.00                     |
|                    | 100 (RB_Pos:0) | 20.25       | 20.24        | 20.16 | 21.00                     | 20.38 | 20.33 | 20.28 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37825       | 38000        | 38175 |                           | 37825 | 38000 | 38175 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 20.19       | 20.28        | 20.24 | 21.00                     | 20.55 | 20.54 | 20.69 | 20.00                     |
|                    | 1 (RB_Pos:38)  | 20.12       | 20.12        | 20.07 | 21.00                     | 20.45 | 20.41 | 20.55 | 21.00                     |
|                    | 1 (RB_Pos:74)  | 20.04       | 20.14        | 20.11 | 21.00                     | 20.39 | 20.35 | 20.43 | 21.00                     |
|                    | 36 (RB_Pos:0)  | 20.16       | 20.20        | 20.16 | 21.00                     | 20.26 | 20.32 | 20.32 | 21.00                     |
|                    | 36 (RB_Pos:20) | 20.11       | 20.20        | 20.13 | 21.00                     | 20.21 | 20.30 | 20.28 | 21.00                     |
|                    | 36 (RB_Pos:39) | 20.07       | 20.12        | 20.07 | 21.00                     | 20.17 | 20.23 | 20.21 | 21.00                     |
|                    | 75 (RB_Pos:0)  | 20.14       | 20.18        | 20.12 | 21.00                     | 20.25 | 20.30 | 20.21 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37800       | 38000        | 38200 |                           | 37800 | 38000 | 38200 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 20.08       | 20.24        | 20.16 | 21.00                     | 20.48 | 20.42 | 20.41 | 21.00                     |
|                    | 1 (RB_Pos:25)  | 20.07       | 20.14        | 20.08 | 21.00                     | 20.46 | 20.44 | 20.34 | 21.00                     |
|                    | 1 (RB_Pos:49)  | 20.02       | 20.06        | 20.03 | 21.00                     | 20.43 | 20.35 | 20.31 | 21.00                     |
|                    | 25 (RB_Pos:0)  | 20.16       | 20.23        | 20.15 | 21.00                     | 20.30 | 20.33 | 20.30 | 21.00                     |
|                    | 25 (RB_Pos:12) | 20.16       | 20.24        | 20.19 | 21.00                     | 20.29 | 20.31 | 20.31 | 21.00                     |
|                    | 25 (RB_Pos:25) | 20.12       | 20.18        | 20.09 | 21.00                     | 20.23 | 20.27 | 20.25 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.19       | 20.21        | 20.14 | 21.00                     | 20.27 | 20.31 | 20.28 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37775       | 38000        | 38225 |                           | 37775 | 38000 | 38225 |                           |

|      |                |       |       |       |       |       |       |       |       |
|------|----------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 5MHz | 1 (RB_Pos:0)   | 20.11 | 20.17 | 20.06 | 21.00 | 20.50 | 20.67 | 20.43 | 21.00 |
|      | 1 (RB_Pos:13)  | 20.14 | 20.19 | 20.11 | 21.00 | 20.53 | 20.40 | 20.49 | 21.00 |
|      | 1 (RB_Pos:24)  | 20.05 | 20.12 | 20.00 | 21.00 | 20.41 | 20.59 | 20.38 | 21.00 |
|      | 12 (RB_Pos:0)  | 20.13 | 20.14 | 20.12 | 21.00 | 20.21 | 20.38 | 20.26 | 21.00 |
|      | 12 (RB_Pos:6)  | 20.12 | 20.17 | 20.13 | 21.00 | 20.26 | 20.44 | 20.29 | 21.00 |
|      | 12 (RB_Pos:13) | 20.12 | 20.19 | 20.07 | 21.00 | 20.23 | 20.36 | 20.27 | 21.00 |
|      | 25 (RB_Pos:0)  | 20.11 | 20.18 | 20.10 | 21.00 | 20.28 | 20.26 | 20.21 | 21.00 |

### 8.6.21 Power Reduced Level 3 of LTE Band 38

| TDD LTE Band 38    |                |             |              |       |                           |       |       |       |                           |
|--------------------|----------------|-------------|--------------|-------|---------------------------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37850       | 38000        | 38150 |                           | 37850 | 38000 | 38150 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 19.28       | <b>19.43</b> | 19.42 | 20.00                     | 19.62 | 19.64 | 19.69 | 20.00                     |
|                    | 1 (RB_Pos:50)  | 19.20       | 19.18        | 19.18 | 20.00                     | 19.67 | 19.58 | 19.50 | 20.00                     |
|                    | 1 (RB_Pos:99)  | 19.18       | 19.16        | 19.21 | 20.00                     | 19.63 | 19.48 | 19.61 | 20.00                     |
|                    | 50 (RB_Pos:0)  | 19.32       | 19.39        | 19.29 | 20.00                     | 19.45 | 19.51 | 19.46 | 20.00                     |
|                    | 50 (RB_Pos:25) | 19.28       | 19.35        | 19.26 | 20.00                     | 19.37 | 19.49 | 19.44 | 20.00                     |
|                    | 50 (RB_Pos:50) | 19.30       | 19.26        | 19.16 | 20.00                     | 19.41 | 19.40 | 19.36 | 20.00                     |
|                    | 100 (RB_Pos:0) | 19.35       | 19.32        | 19.22 | 20.00                     | 19.48 | 19.47 | 19.34 | 20.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37825       | 38000        | 38175 |                           | 37825 | 38000 | 38175 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 19.28       | 19.35        | 19.32 | 20.00                     | 19.75 | 19.50 | 19.44 | 20.00                     |
|                    | 1 (RB_Pos:38)  | 19.14       | 19.23        | 19.18 | 20.00                     | 19.60 | 19.46 | 19.65 | 20.00                     |
|                    | 1 (RB_Pos:74)  | 19.07       | 19.17        | 19.13 | 20.00                     | 19.55 | 19.41 | 19.60 | 20.00                     |
|                    | 36 (RB_Pos:0)  | 19.24       | 19.30        | 19.25 | 20.00                     | 19.38 | 19.42 | 19.41 | 20.00                     |
|                    | 36 (RB_Pos:20) | 19.22       | 19.27        | 19.22 | 20.00                     | 19.37 | 19.38 | 19.40 | 20.00                     |
|                    | 36 (RB_Pos:39) | 19.16       | 19.20        | 19.16 | 20.00                     | 19.29 | 19.33 | 19.32 | 20.00                     |
|                    | 75 (RB_Pos:0)  | 19.22       | 19.28        | 19.21 | 20.00                     | 19.32 | 19.41 | 19.33 | 20.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 37800       | 38000        | 38200 |                           | 37800 | 38000 | 38200 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 19.23       | 19.33        | 19.26 | 20.00                     | 19.64 | 19.46 | 19.38 | 20.00                     |
|                    | 1 (RB_Pos:25)  | 19.13       | 19.23        | 19.23 | 20.00                     | 19.62 | 19.33 | 19.73 | 20.00                     |
|                    | 1 (RB_Pos:49)  | 19.15       | 19.21        | 19.17 | 20.00                     | 19.57 | 19.49 | 19.67 | 20.00                     |
|                    | 25 (RB_Pos:0)  | 19.29       | 19.32        | 19.25 | 20.00                     | 19.40 | 19.44 | 19.40 | 20.00                     |
|                    | 25 (RB_Pos:12) | 19.28       | 19.32        | 19.25 | 20.00                     | 19.43 | 19.44 | 19.42 | 20.00                     |
|                    | 25 (RB_Pos:25) | 19.22       | 19.27        | 19.19 | 20.00                     | 19.34 | 19.39 | 19.34 | 20.00                     |
|                    | 50 (RB_Pos:0)  | 19.26       | 19.30        | 19.21 | 20.00                     | 19.38 | 19.44 | 19.38 | 20.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |              |       |                           |       |       |       |                           |
|                    |                | QPSK        |              |       | Tune                      | 16QAM |       |       | Tune                      |

|      | Channel        | 37775 | 38000 | 38225 | up limit<br>(dBm) | 37775 | 38000 | 38225 | up limit<br>(dBm) |
|------|----------------|-------|-------|-------|-------------------|-------|-------|-------|-------------------|
| 5MHz | 1 (RB_Pos:0)   | 19.25 | 19.31 | 19.17 | 20.00             | 19.66 | 19.78 | 19.55 | 20.00             |
|      | 1 (RB_Pos:13)  | 19.24 | 19.36 | 19.22 | 20.00             | 19.70 | 19.72 | 19.59 | 20.00             |
|      | 1 (RB_Pos:24)  | 19.18 | 19.24 | 19.10 | 20.00             | 19.60 | 19.56 | 19.49 | 20.00             |
|      | 12 (RB_Pos:0)  | 19.24 | 19.30 | 19.23 | 20.00             | 19.39 | 19.55 | 19.40 | 20.00             |
|      | 12 (RB_Pos:6)  | 19.26 | 19.32 | 19.22 | 20.00             | 19.42 | 19.55 | 19.41 | 20.00             |
|      | 12 (RB_Pos:13) | 19.24 | 19.29 | 19.19 | 20.00             | 19.37 | 19.50 | 19.37 | 20.00             |
|      | 25 (RB_Pos:0)  | 19.22 | 19.28 | 19.20 | 20.00             | 19.38 | 19.43 | 19.32 | 20.00             |

### 8.6.22 Power Reduced Level 1&2 of LTE Band 41

| TDD LTE Band 41    |                |             |       |              |       |       |                           |       |       |       |       |       |                           |
|--------------------|----------------|-------------|-------|--------------|-------|-------|---------------------------|-------|-------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |       |       |                           |       |       |       |       |       |                           |
|                    | Channel        | QPSK        |       |              |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    |                | 39750       | 40185 | 40620        | 41055 | 41490 |                           | 39750 | 40185 | 40620 | 41055 | 41490 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 20.17       | 20.08 | <b>20.45</b> | 20.25 | 20.41 | 21.00                     | 20.57 | 20.40 | 20.45 | 20.73 | 20.80 | 21.00                     |
|                    | 1 (RB_Pos:50)  | 20.22       | 20.04 | 20.09        | 20.03 | 20.34 | 21.00                     | 20.44 | 20.49 | 20.27 | 20.37 | 20.72 | 21.00                     |
|                    | 1 (RB_Pos:99)  | 20.13       | 20.03 | 20.10        | 19.90 | 20.39 | 21.00                     | 20.42 | 20.45 | 20.37 | 20.22 | 20.80 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.31       | 20.26 | 20.39        | 20.35 | 20.33 | 21.00                     | 20.34 | 20.35 | 20.26 | 20.48 | 20.41 | 21.00                     |
|                    | 50 (RB_Pos:25) | 20.23       | 20.25 | 20.16        | 20.15 | 20.30 | 21.00                     | 20.29 | 20.23 | 20.21 | 20.50 | 20.40 | 21.00                     |
|                    | 50 (RB_Pos:50) | 20.15       | 20.30 | 20.06        | 19.94 | 20.21 | 21.00                     | 20.23 | 20.15 | 20.16 | 20.21 | 20.23 | 21.00                     |
|                    | 100 (RB_Pos:0) | 20.22       | 20.39 | 20.16        | 20.07 | 20.24 | 21.00                     | 20.25 | 20.19 | 20.21 | 20.28 | 20.33 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |       |       |                           |       |       |       |       |       |                           |
|                    | Channel        | QPSK        |       |              |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    |                | 39725       | 40160 | 40620        | 41080 | 41515 |                           | 39725 | 40160 | 40620 | 41080 | 41515 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 20.14       | 20.19 | 20.21        | 20.38 | 20.33 | 21.00                     | 20.54 | 20.49 | 20.70 | 20.65 | 20.67 | 21.00                     |
|                    | 1 (RB_Pos:38)  | 20.12       | 20.16 | 20.09        | 20.12 | 20.24 | 21.00                     | 20.50 | 20.51 | 20.58 | 20.52 | 20.60 | 21.00                     |
|                    | 1 (RB_Pos:74)  | 20.08       | 20.07 | 20.13        | 20.08 | 20.30 | 21.00                     | 20.39 | 20.26 | 20.24 | 20.51 | 20.66 | 21.00                     |
|                    | 36 (RB_Pos:0)  | 20.09       | 20.19 | 20.15        | 20.01 | 20.23 | 21.00                     | 20.18 | 20.13 | 20.22 | 20.43 | 20.37 | 21.00                     |
|                    | 36 (RB_Pos:20) | 20.21       | 20.13 | 20.12        | 19.94 | 20.21 | 21.00                     | 20.28 | 20.17 | 20.20 | 20.19 | 20.34 | 21.00                     |
|                    | 36 (RB_Pos:39) | 20.12       | 20.01 | 20.03        | 20.07 | 20.14 | 21.00                     | 20.22 | 20.28 | 20.13 | 20.30 | 20.28 | 21.00                     |
|                    | 75 (RB_Pos:0)  | 20.15       | 20.20 | 20.12        | 20.12 | 20.22 | 21.00                     | 20.30 | 20.31 | 20.17 | 20.33 | 20.32 | 21.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |              |       |       |                           |       |       |       |       |       |                           |
|                    | Channel        | QPSK        |       |              |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    |                | 39700       | 40135 | 40620        | 41105 | 41540 |                           | 39700 | 40135 | 40620 | 41105 | 41540 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 20.07       | 20.05 | 20.16        | 20.01 | 20.32 | 21.00                     | 20.47 | 20.30 | 20.62 | 20.31 | 20.74 | 21.00                     |
|                    | 1 (RB_Pos:25)  | 20.02       | 19.96 | 20.09        | 19.96 | 20.30 | 21.00                     | 20.43 | 20.42 | 20.55 | 20.29 | 20.74 | 21.00                     |
|                    | 1 (RB_Pos:49)  | 20.13       | 20.19 | 20.11        | 20.18 | 20.32 | 21.00                     | 20.51 | 20.58 | 20.13 | 20.55 | 20.75 | 21.00                     |
|                    | 25 (RB_Pos:0)  | 20.15       | 20.08 | 20.14        | 20.24 | 20.28 | 21.00                     | 20.28 | 20.28 | 20.22 | 20.29 | 20.36 | 21.00                     |
|                    | 25 (RB_Pos:12) | 20.14       | 20.23 | 20.14        | 20.31 | 20.25 | 21.00                     | 20.21 | 20.14 | 20.21 | 20.39 | 20.34 | 21.00                     |
|                    | 25 (RB_Pos:25) | 20.22       | 20.24 | 20.12        | 20.05 | 20.34 | 21.00                     | 20.27 | 20.24 | 20.17 | 20.48 | 20.41 | 21.00                     |
|                    | 50 (RB_Pos:0)  | 20.20       | 20.36 | 20.06        | 19.97 | 20.24 | 21.00                     | 20.34 | 20.34 | 20.17 | 20.28 | 20.33 | 21.00                     |

| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|--------------------|----------------|-------------|-------|-------|-------|-------|---------------------------|-------|-------|-------|-------|-------|---------------------------|
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39675       | 40110 | 40620 | 41130 | 41565 |                           | 39675 | 40110 | 40620 | 41130 | 41565 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 20.08       | 20.07 | 20.12 | 20.04 | 20.34 | 21.00                     | 20.43 | 20.23 | 20.43 | 20.22 | 20.76 | 21.00                     |
|                    | 1 (RB_Pos:13)  | 20.09       | 20.24 | 20.14 | 20.34 | 20.34 | 21.00                     | 20.49 | 20.47 | 20.49 | 20.80 | 20.82 | 21.00                     |
|                    | 1 (RB_Pos:24)  | 20.00       | 19.98 | 20.07 | 19.94 | 20.29 | 21.00                     | 20.40 | 20.38 | 20.38 | 19.94 | 20.73 | 21.00                     |
|                    | 12 (RB_Pos:0)  | 20.13       | 20.02 | 20.14 | 20.26 | 20.32 | 21.00                     | 20.30 | 20.24 | 20.19 | 20.48 | 20.51 | 21.00                     |
|                    | 12 (RB_Pos:6)  | 20.15       | 20.20 | 20.12 | 20.00 | 20.33 | 21.00                     | 20.27 | 20.37 | 20.19 | 20.47 | 20.50 | 21.00                     |
|                    | 12 (RB_Pos:13) | 20.10       | 20.04 | 20.11 | 20.14 | 20.34 | 21.00                     | 20.30 | 20.28 | 20.17 | 20.44 | 20.50 | 21.00                     |
|                    | 25 (RB_Pos:0)  | 20.10       | 20.07 | 20.12 | 20.09 | 20.31 | 21.00                     | 20.22 | 20.30 | 20.22 | 20.34 | 20.45 | 21.00                     |

### 8.6.23 Power Reduced Level 3 of LTE Band 41

| TDD LTE Band 41    |                |             |       |       |       |       |                           |       |       |       |       |       |                           |
|--------------------|----------------|-------------|-------|-------|-------|-------|---------------------------|-------|-------|-------|-------|-------|---------------------------|
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39750       | 40185 | 40620 | 41055 | 41490 |                           | 39750 | 40185 | 40620 | 41055 | 41490 |                           |
| 20MHz              | 1 (RB_Pos:0)   | 19.37       | 19.39 | 19.56 | 19.55 | 19.47 | 20.00                     | 19.60 | 19.57 | 19.62 | 19.93 | 19.91 | 20.00                     |
|                    | 1 (RB_Pos:50)  | 19.26       | 19.07 | 19.12 | 19.31 | 19.28 | 20.00                     | 19.64 | 19.53 | 19.37 | 19.42 | 19.74 | 20.00                     |
|                    | 1 (RB_Pos:99)  | 19.25       | 19.38 | 19.20 | 19.44 | 19.38 | 20.00                     | 19.58 | 19.38 | 19.46 | 19.49 | 19.80 | 20.00                     |
|                    | 50 (RB_Pos:0)  | 19.39       | 19.40 | 19.29 | 19.25 | 19.37 | 20.00                     | 19.49 | 19.60 | 19.35 | 19.43 | 19.50 | 20.00                     |
|                    | 50 (RB_Pos:25) | 19.36       | 19.45 | 19.47 | 19.43 | 19.32 | 20.00                     | 19.42 | 19.26 | 19.35 | 19.49 | 19.46 | 20.00                     |
|                    | 50 (RB_Pos:50) | 19.24       | 19.22 | 19.15 | 19.28 | 19.26 | 20.00                     | 19.35 | 19.39 | 19.27 | 19.35 | 19.41 | 20.00                     |
|                    | 100 (RB_Pos:0) | 19.29       | 19.13 | 19.21 | 19.15 | 19.31 | 20.00                     | 19.44 | 19.54 | 19.34 | 19.28 | 19.43 | 20.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39725       | 40160 | 40620 | 41080 | 41515 |                           | 39725 | 40160 | 40620 | 41080 | 41515 |                           |
| 15MHz              | 1 (RB_Pos:0)   | 19.23       | 19.26 | 19.30 | 19.38 | 19.41 | 20.00                     | 19.61 | 19.55 | 19.43 | 19.42 | 19.75 | 20.00                     |
|                    | 1 (RB_Pos:38)  | 19.23       | 19.46 | 19.15 | 19.19 | 19.29 | 20.00                     | 19.63 | 19.79 | 19.65 | 19.18 | 19.66 | 20.00                     |
|                    | 1 (RB_Pos:74)  | 19.16       | 19.15 | 19.20 | 19.34 | 19.30 | 20.00                     | 19.57 | 19.22 | 19.69 | 19.66 | 19.70 | 20.00                     |
|                    | 36 (RB_Pos:0)  | 19.25       | 19.43 | 19.22 | 19.34 | 19.30 | 20.00                     | 19.28 | 19.12 | 19.34 | 19.51 | 19.45 | 20.00                     |
|                    | 36 (RB_Pos:20) | 19.32       | 19.15 | 19.20 | 19.49 | 19.28 | 20.00                     | 19.44 | 19.41 | 19.31 | 19.32 | 19.42 | 20.00                     |
|                    | 36 (RB_Pos:39) | 19.22       | 19.09 | 19.12 | 19.33 | 19.22 | 20.00                     | 19.38 | 19.36 | 19.24 | 19.20 | 19.35 | 20.00                     |
|                    | 75 (RB_Pos:0)  | 19.26       | 19.48 | 19.17 | 19.35 | 19.28 | 20.00                     | 19.45 | 19.63 | 19.31 | 19.33 | 19.38 | 20.00                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39700       | 40135 | 40620 | 41105 | 41540 |                           | 39700 | 40135 | 40620 | 41105 | 41540 |                           |
| 10MHz              | 1 (RB_Pos:0)   | 19.20       | 19.40 | 19.22 | 19.35 | 19.38 | 20.00                     | 19.60 | 19.41 | 19.34 | 19.72 | 19.80 | 20.00                     |
|                    | 1 (RB_Pos:25)  | 19.16       | 19.20 | 19.16 | 19.22 | 19.32 | 20.00                     | 19.51 | 19.36 | 19.65 | 19.67 | 19.80 | 20.00                     |
|                    | 1 (RB_Pos:49)  | 19.23       | 19.25 | 19.25 | 19.38 | 19.34 | 20.00                     | 19.64 | 19.61 | 19.73 | 19.83 | 19.81 | 20.00                     |
|                    | 25 (RB_Pos:0)  | 19.28       | 19.43 | 19.23 | 19.26 | 19.33 | 20.00                     | 19.33 | 19.38 | 19.34 | 19.50 | 19.48 | 20.00                     |
|                    | 25 (RB_Pos:12) | 19.26       | 19.14 | 19.20 | 19.34 | 19.34 | 20.00                     | 19.38 | 19.21 | 19.31 | 19.60 | 19.43 | 20.00                     |

|                    | 25 (RB_Pos:25) | 19.32       | 19.25 | 19.18 | 19.32 | 19.35 | 20.00                     | 19.45 | 19.36 | 19.25 | 19.35 | 19.47 | 20.00                     |
|--------------------|----------------|-------------|-------|-------|-------|-------|---------------------------|-------|-------|-------|-------|-------|---------------------------|
|                    | 50 (RB_Pos:0)  | 19.35       | 19.19 | 19.19 | 19.33 | 19.35 | 20.00                     | 19.44 | 19.44 | 19.34 | 19.55 | 19.36 | 19.35                     |
| Bandwidth<br>(MHz) | RB Set         | Power (dBm) |       |       |       |       |                           |       |       |       |       |       |                           |
|                    |                | QPSK        |       |       |       |       | Tune<br>up limit<br>(dBm) | 16QAM |       |       |       |       | Tune<br>up limit<br>(dBm) |
|                    | Channel        | 39675       | 40110 | 40620 | 41130 | 41565 |                           | 39675 | 40110 | 40620 | 41130 | 41565 |                           |
| 5MHz               | 1 (RB_Pos:0)   | 19.22       | 19.36 | 19.23 | 19.02 | 19.37 | 20.00                     | 19.54 | 19.51 | 19.55 | 19.43 | 19.84 | 20.00                     |
|                    | 1 (RB_Pos:13)  | 19.25       | 19.42 | 19.25 | 19.18 | 19.44 | 20.00                     | 19.58 | 19.76 | 19.61 | 19.39 | 19.90 | 20.00                     |
|                    | 1 (RB_Pos:24)  | 19.15       | 19.22 | 19.17 | 18.97 | 19.36 | 20.00                     | 19.45 | 19.48 | 19.49 | 19.46 | 19.81 | 20.00                     |
|                    | 12 (RB_Pos:0)  | 19.28       | 19.31 | 19.20 | 19.26 | 19.39 | 20.00                     | 19.45 | 19.34 | 19.30 | 19.12 | 19.57 | 20.00                     |
|                    | 12 (RB_Pos:6)  | 19.27       | 19.37 | 19.23 | 19.42 | 19.41 | 20.00                     | 19.38 | 19.21 | 19.31 | 19.51 | 19.58 | 20.00                     |
|                    | 12 (RB_Pos:13) | 19.23       | 19.15 | 19.18 | 19.07 | 19.39 | 20.00                     | 19.38 | 19.33 | 19.28 | 19.21 | 19.59 | 20.00                     |
|                    | 25 (RB_Pos:0)  | 19.24       | 19.36 | 19.17 | 19.33 | 19.35 | 20.00                     | 19.34 | 19.52 | 19.32 | 19.50 | 19.53 | 20.00                     |



#### 8.6.24 Power Reduced Level 1 of 2.4G WIFI

| Band (GHz)          | Mode          | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|---------------------|---------------|---------|-------------|-----------------------|---------------------|-------------------|
| 2.4<br>(2.4~2.4835) | 802.11b       | 1       | 2412        | 17.79                 | 18.50               | Yes               |
|                     |               | 6       | 2437        | <b>17.92</b>          | 18.50               | Yes               |
|                     |               | 11      | 2462        | 17.86                 | 18.50               | Yes               |
|                     | 802.11g       | 1       | 2412        | 16.22                 | 17.50               | No                |
|                     |               | 6       | 2437        | 15.82                 | 17.50               | No                |
|                     |               | 11      | 2462        | 15.87                 | 17.50               | No                |
|                     | 802.11n(HT20) | 1       | 2412        | 15.76                 | 17.50               | No                |
|                     |               | 6       | 2437        | 15.74                 | 17.50               | No                |
|                     |               | 11      | 2462        | 15.56                 | 17.50               | No                |

#### 8.6.25 Power Reduced Level 2 of 2.4G WIFI

| Band (GHz)          | Mode          | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|---------------------|---------------|---------|-------------|-----------------------|---------------------|-------------------|
| 2.4<br>(2.4~2.4835) | 802.11b       | 1       | 2412        | 16.41                 | 17.50               | Yes               |
|                     |               | 6       | 2437        | <b>16.73</b>          | 17.50               | Yes               |
|                     |               | 11      | 2462        | 16.35                 | 17.50               | Yes               |
|                     | 802.11g       | 1       | 2412        | 14.80                 | 16.50               | No                |
|                     |               | 6       | 2437        | 14.94                 | 16.50               | No                |
|                     |               | 11      | 2462        | 14.85                 | 16.50               | No                |
|                     | 802.11n(HT20) | 1       | 2412        | 14.72                 | 16.50               | No                |
|                     |               | 6       | 2437        | 14.38                 | 16.50               | No                |
|                     |               | 11      | 2462        | 14.78                 | 16.50               | No                |

### 8.6.26 Power Reduced Level 1 of 5G WIFI


| Band (GHz)           | Mode            | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|----------------------|-----------------|---------|-------------|-----------------------|---------------------|-------------------|
| 5.6<br>(5.47~5.725)  | 802.11a         | 100     | 5500        | 16.81                 | 17.50               | No                |
|                      |                 | 116     | 5580        | 16.83                 | 17.50               | No                |
|                      |                 | 140     | 5700        | 15.40                 | 15.50               | No                |
|                      | 802.11n(HT20)   | 100     | 5500        | 16.57                 | 17.50               | No                |
|                      |                 | 116     | 5580        | 16.48                 | 17.50               | No                |
|                      |                 | 140     | 5700        | 15.53                 | 15.50               | No                |
|                      | 802.11n(HT40)   | 102     | 5510        | 13.26                 | 13.50               | Yes               |
|                      |                 | 118     | 5590        | <b>17.09</b>          | 17.50               | Yes               |
|                      |                 | 134     | 5670        | 14.32                 | 14.50               | Yes               |
|                      | 802.11ac(VHT20) | 100     | 5500        | 16.74                 | 17.50               | No                |
|                      |                 | 116     | 5580        | 16.71                 | 17.50               | No                |
|                      |                 | 140     | 5700        | 15.29                 | 15.50               | No                |
|                      | 802.11ac(VHT40) | 102     | 5510        | 13.26                 | 13.50               | No                |
|                      |                 | 118     | 5590        | 16.91                 | 17.50               | No                |
|                      |                 | 134     | 5670        | 14.44                 | 14.50               | No                |
|                      | 802.11ac(VHT80) | 106     | 5530        | 9.72                  | 10.00               | No                |
|                      |                 | 122     | 5610        | 9.72                  | 10.00               | No                |
| 5.8<br>(5.725~5.850) | 802.11a         | 149     | 5745        | 16.47                 | 16.50               | No                |
|                      |                 | 157     | 5785        | 16.42                 | 16.50               | No                |
|                      |                 | 165     | 5825        | 16.37                 | 16.50               | No                |
|                      | 802.11n(HT20)   | 149     | 5745        | 16.28                 | 16.50               | No                |
|                      |                 | 157     | 5785        | 16.16                 | 16.50               | No                |
|                      |                 | 165     | 5825        | 16.42                 | 16.50               | No                |
|                      | 802.11n(HT40)   | 151     | 5755        | 16.56                 | 16.50               | No                |
|                      |                 | 159     | 5795        | 16.32                 | 16.50               | No                |
|                      | 802.11ac(VHT20) | 149     | 5745        | 16.26                 | 16.50               | No                |
|                      |                 | 157     | 5785        | 16.26                 | 16.50               | No                |
|                      |                 | 165     | 5825        | 16.46                 | 16.50               | No                |
|                      | 802.11ac(VHT40) | 151     | 5755        | 16.25                 | 16.50               | No                |
|                      |                 | 159     | 5795        | 16.17                 | 16.50               | No                |
|                      | 802.11ac(VHT80) | 155     | 5775        | <b>16.48</b>          | 16.50               | Yes               |

### 8.6.27 Power Reduced Level 2 of 5G WIFI

| Band (GHz)          | Mode            | Channel | Freq. (MHz) | Conducted Power (dBm) | Tune-up Limit (dBm) | SAR Test Require. |
|---------------------|-----------------|---------|-------------|-----------------------|---------------------|-------------------|
| 5.2<br>(5.15~5.25)  | 802.11a         | 36      | 5180        | 16.34                 | 16.50               | No                |
|                     |                 | 44      | 5220        | 15.61                 | 16.50               | No                |
|                     |                 | 48      | 5240        | 15.74                 | 16.50               | No                |
|                     | 802.11n(HT20)   | 36      | 5180        | 16.31                 | 16.50               | No                |
|                     |                 | 44      | 5220        | 15.67                 | 16.50               | No                |
|                     |                 | 48      | 5240        | 15.81                 | 16.50               | No                |
|                     | 802.11n(HT40)   | 38      | 5190        | 13.56                 | 14.00               | Yes               |
|                     |                 | 46      | 5230        | <b>15.84</b>          | 16.50               | Yes               |
|                     | 802.11ac(VHT20) | 36      | 5180        | 16.16                 | 16.50               | No                |
|                     |                 | 44      | 5220        | 15.40                 | 16.50               | No                |
|                     |                 | 48      | 5240        | 15.56                 | 16.50               | No                |
|                     | 802.11ac(VHT40) | 38      | 5190        | 13.54                 | 14.00               | No                |
|                     |                 | 46      | 5230        | 15.80                 | 16.50               | No                |
|                     | 802.11ac(VHT80) | 42      | 5210        | 11.50                 | 12.00               | No                |
| 5.3<br>(5.25~5.35)  | 802.11a         | 52      | 5260        | 15.10                 | 15.50               | No                |
|                     |                 | 60      | 5300        | 14.85                 | 15.50               | No                |
|                     |                 | 64      | 5320        | 15.08                 | 15.50               | No                |
|                     | 802.11n(HT20)   | 52      | 5260        | 15.09                 | 15.50               | No                |
|                     |                 | 60      | 5300        | 14.48                 | 15.50               | No                |
|                     |                 | 64      | 5320        | 14.84                 | 15.50               | No                |
|                     | 802.11n(HT40)   | 54      | 5270        | 15.28                 | 15.50               | No                |
|                     |                 | 62      | 5310        | 9.13                  | 9.50                | No                |
|                     | 802.11ac(VHT20) | 52      | 5260        | 14.90                 | 15.50               | No                |
|                     |                 | 60      | 5300        | 14.36                 | 15.50               | No                |
|                     |                 | 64      | 5320        | 14.89                 | 15.50               | No                |
|                     | 802.11ac(VHT40) | 54      | 5270        | 15.26                 | 15.50               | No                |
|                     |                 | 62      | 5310        | 9.39                  | 9.50                | No                |
|                     | 802.11ac(VHT80) | 58      | 5290        | 7.48                  | 8.00                | No                |
| 5.6<br>(5.47~5.725) | 802.11a         | 100     | 5500        | 14.67                 | 15.50               | No                |
|                     |                 | 116     | 5580        | 14.70                 | 15.50               | No                |
|                     |                 | 140     | 5700        | 13.22                 | 13.50               | No                |
|                     | 802.11n(HT20)   | 100     | 5500        | 14.61                 | 15.50               | No                |
|                     |                 | 116     | 5580        | 14.51                 | 15.50               | No                |
|                     |                 | 140     | 5700        | 13.37                 | 13.50               | No                |
|                     | 802.11n(HT40)   | 102     | 5510        | 10.94                 | 11.50               | Yes               |
|                     |                 | 118     | 5590        | <b>14.92</b>          | 15.50               | Yes               |
|                     |                 | 134     | 5670        | 12.28                 | 12.50               | Yes               |
|                     | 802.11ac(VHT20) | 100     | 5500        | 14.52                 | 15.50               | No                |
|                     |                 | 116     | 5580        | 14.28                 | 15.50               | No                |
|                     |                 | 140     | 5700        | 13.24                 | 13.50               | No                |
|                     | 802.11ac(VHT40) | 102     | 5510        | 11.02                 | 11.50               | No                |
|                     |                 | 118     | 5590        | 14.84                 | 15.50               | No                |

|                      |                 |     |      |              |       |     |
|----------------------|-----------------|-----|------|--------------|-------|-----|
|                      | 802.11ac(VHT80) | 134 | 5670 | 12.14        | 12.50 | No  |
|                      |                 | 106 | 5530 | 7.61         | 8.00  | No  |
|                      |                 | 122 | 5610 | 7.64         | 8.00  | No  |
| 5.8<br>(5.725~5.850) | 802.11a         | 149 | 5745 | 13.82        | 14.00 | No  |
|                      |                 | 157 | 5785 | 13.66        | 14.00 | No  |
|                      |                 | 165 | 5825 | 13.71        | 14.00 | No  |
|                      | 802.11n(HT20)   | 149 | 5745 | 13.55        | 14.00 | No  |
|                      |                 | 157 | 5785 | 13.69        | 14.00 | No  |
|                      |                 | 165 | 5825 | 13.47        | 14.00 | No  |
|                      | 802.11n(HT40)   | 151 | 5755 | 13.83        | 14.00 | No  |
|                      |                 | 159 | 5795 | 13.82        | 14.00 | No  |
|                      | 802.11ac(VHT20) | 149 | 5745 | 13.46        | 14.00 | No  |
|                      |                 | 157 | 5785 | 13.56        | 14.00 | No  |
|                      |                 | 165 | 5825 | 13.48        | 14.00 | No  |
|                      | 802.11ac(VHT40) | 151 | 5755 | 13.49        | 14.00 | No  |
|                      |                 | 159 | 5795 | 13.54        | 14.00 | No  |
|                      | 802.11ac(VHT80) | 155 | 5775 | <b>13.92</b> | 14.00 | Yes |

## 9 TEST EXCLUSION CONSIDERATION

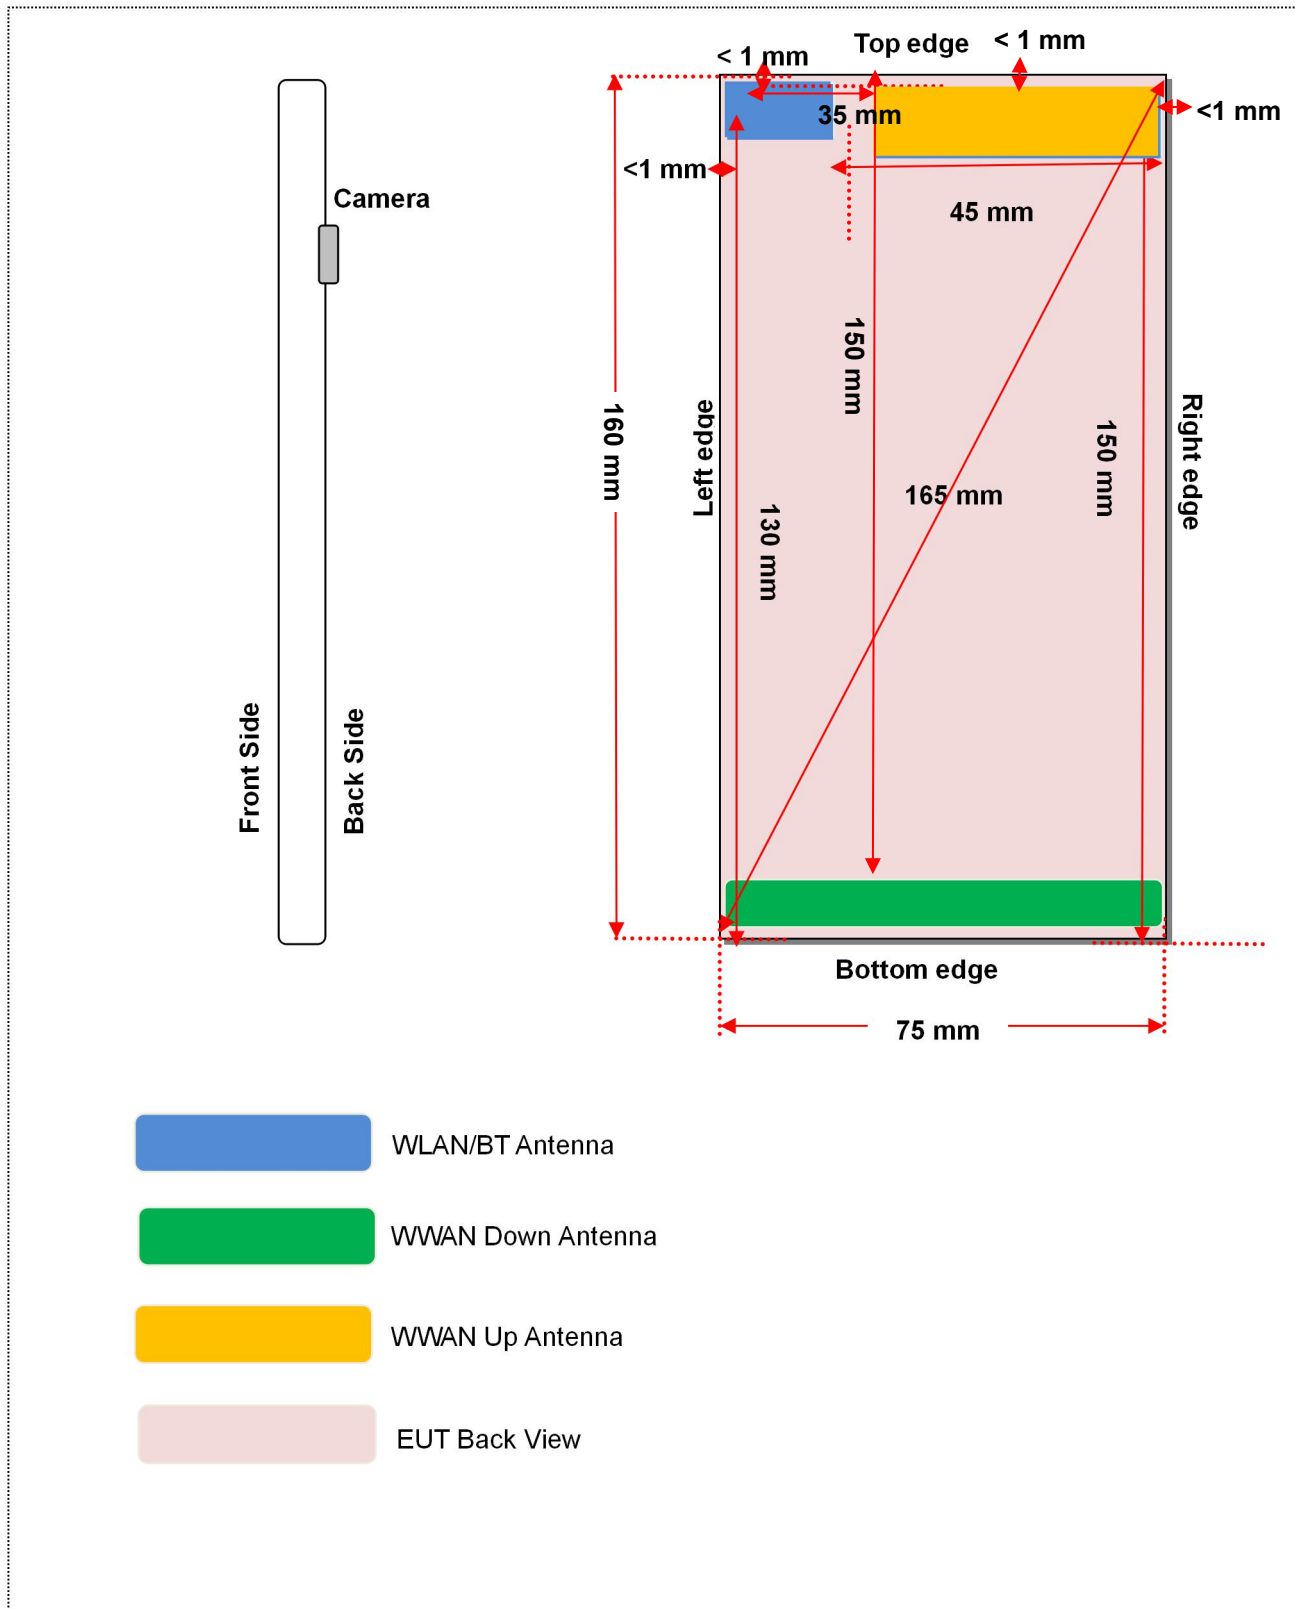

## 9.1 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

WWLAN Up Antenna:

| Band            | Mode             | Max. Peak Power |         | Test Position Configurations |                |              |               |             |                |
|-----------------|------------------|-----------------|---------|------------------------------|----------------|--------------|---------------|-------------|----------------|
|                 |                  | dBm             | mW      | Head                         | Front/<br>Back | Left<br>Edge | Right<br>Edge | Top<br>Edge | Bottom<br>Edge |
| GSM 850         | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | Voice            | 33.50           | 2238.72 | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
|                 | Data             | 31.50           | 1412.54 | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| GSM 1900        | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | Voice            | 30.50           | 1122.02 | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
|                 | Data             | 28.00           | 630.96  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| WCDMA<br>Band 2 | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | RMC              | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| WCDMA<br>Band 4 | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | RMC              | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| WCDMA<br>Band 5 | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | RMC              | 24.30           | 269.15  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 2      | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 4      | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 5      | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 24.30           | 269.15  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 7      | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 23.50           | 281.84  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 38     | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
| LTE Band 41     | Distance to User |                 |         | <5mm                         | <5mm           | 35mm         | <5mm          | <5mm        | 150mm          |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |

## WWLAN Down Antenna:

| Band            | Mode             | Max. Peak Power |         | Test Position Configurations |                |              |               |             |                |
|-----------------|------------------|-----------------|---------|------------------------------|----------------|--------------|---------------|-------------|----------------|
|                 |                  | dBm             | mW      | Head                         | Front/<br>Back | Left<br>Edge | Right<br>Edge | Top<br>Edge | Bottom<br>Edge |
| GSM 850         | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | Voice            | 33.50           | 2238.72 | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
|                 | Data             | 31.50           | 1412.54 | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| GSM 1900        | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | Voice            | 30.50           | 1122.02 | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
|                 | Data             | 28.00           | 630.96  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| WCDMA<br>Band 2 | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | RMC              | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| WCDMA<br>Band 4 | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | RMC              | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| WCDMA<br>Band 5 | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | RMC              | 24.30           | 269.15  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 2      | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 4      | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 5      | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 24.30           | 269.15  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 7      | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 23.50           | 281.84  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 38     | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| LTE Band 41     | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | <5mm          | 150mm       | <5mm           |
|                 | QPSK             | 24.00           | 251.19  | Yes                          | Yes            | Yes          | Yes           | No          | Yes            |
| WLAN<br>2.4 G   | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | 45mm          | <5mm        | 130mm          |
|                 | 802.11b          | 19.50           | 89.13   | Yes                          | Yes            | Yes          | No            | Yes         | No             |
|                 | 802.11g          | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
|                 | 802.11n(HT20)    | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
| WLAN<br>5.2 G   | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | 45mm          | <5mm        | 130mm          |
|                 | 802.11a          | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
|                 | 802.11n(HT20)    | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
|                 | 802.11n(HT40)    | 18.50           | 70.79   | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
|                 | 802.11ac(VHT20)  | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
|                 | 802.11ac(VHT40)  | 18.50           | 70.79   | No                           | No             | No           | No            | No          | No             |
| WLAN<br>5.3 G   | Distance to User |                 |         | <5mm                         | <5mm           | <5mm         | 45mm          | <5mm        | 130mm          |
|                 | 802.11a          | 17.50           | 56.23   | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |
|                 | 802.11n(HT20)    | 17.50           | 56.23   | No                           | No             | No           | No            | No          | No             |
|                 | 802.11n(HT40)    | 17.50           | 56.23   | Yes                          | Yes            | Yes          | Yes           | Yes         | No             |

|               |                  |       |       |      |      |      |      |      |       |
|---------------|------------------|-------|-------|------|------|------|------|------|-------|
|               | 802.11ac(VHT20)  | 17.50 | 56.23 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT40)  | 17.50 | 56.23 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT80)  | 10.00 | 10.00 | No   | No   | No   | No   | No   | No    |
| WLAN<br>5.6 G | Distance to User |       |       | <5mm | <5mm | <5mm | 45mm | <5mm | 130mm |
|               | 802.11a          | 18.50 | 70.79 | No   | No   | No   | No   | No   | No    |
|               | 802.11n(HT20)    | 18.50 | 70.79 | No   | No   | No   | No   | No   | No    |
|               | 802.11n(HT40)    | 18.50 | 70.79 | Yes  | Yes  | Yes  | Yes  | Yes  | No    |
|               | 802.11ac(VHT20)  | 18.50 | 70.79 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT40)  | 18.50 | 70.79 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT80)  | 11.00 | 12.29 | No   | No   | No   | No   | No   | No    |
| WLAN<br>5.8 G | Distance to User |       |       | <5mm | <5mm | <5mm | 45mm | <5mm | 130mm |
|               | 802.11a          | 17.00 | 50.12 | No   | No   | No   | No   | No   | No    |
|               | 802.11n(HT20)    | 17.00 | 50.12 | No   | No   | No   | No   | No   | No    |
|               | 802.11n(HT40)    | 17.00 | 50.12 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT20)  | 17.00 | 50.12 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT40)  | 17.00 | 50.12 | No   | No   | No   | No   | No   | No    |
|               | 802.11ac(VHT80)  | 17.00 | 50.12 | Yes  | Yes  | Yes  | Yes  | Yes  | No    |
| Bluetooth     | Distance to User |       |       | <5mm | <5mm | <5mm | 45mm | <5mm | 130mm |
|               | BR/EDR           | 11.50 | 14.13 | No   | No   | No   | No   | No   | No    |
|               | BLE              | 12.50 | 17.78 | Yes  | Yes  | Yes  | No   | Yes  | No    |

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
- Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
  - $f(\text{GHz})$  is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison
  - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.
This formula is  $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW}$
- Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and  $\leq 6$  GHz
- Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC12.2kbps, or reported SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum



average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate

8. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
9. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
  - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
  - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

# 10 TEST RESULT

## 10.1 GSM 850 GSM 850 Head SAR

| Antenna                                                                  | Power Reduction | Mode          | Position    | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|--------------------------------------------------------------------------|-----------------|---------------|-------------|------------|-----|-------------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                                                                     |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | GPRS (2slots) | Left Cheek  | 0          | 251 | 848.80      | -0.17            | 0.388               | 31.04             | 31.50                    | 1.112          | 0.431                 | /         |
|                                                                          | Off             |               | Left Tilt   | 0          | 251 | 848.80      | -0.10            | 0.324               | 31.04             | 31.50                    | 1.112          | 0.360                 | /         |
|                                                                          | Off             |               | Right Cheek | 0          | 251 | 848.80      | -0.03            | 0.515               | 31.04             | 31.50                    | 1.112          | <b>0.573</b>          | 1#        |
|                                                                          | Off             |               | Right Tilt  | 0          | 251 | 848.80      | -0.08            | 0.409               | 31.04             | 31.50                    | 1.112          | 0.455                 | /         |
| Down                                                                     | Off             | GPRS (2slots) | Left Cheek  | 0          | 251 | 848.80      | -0.10            | 0.245               | 31.04             | 31.50                    | 1.112          | 0.272                 | /         |
|                                                                          | Off             |               | Left Tilt   | 0          | 251 | 848.80      | 0.09             | 0.090               | 31.04             | 31.50                    | 1.112          | 0.100                 | /         |
|                                                                          | Off             |               | Right Cheek | 0          | 251 | 848.80      | 0.07             | 0.160               | 31.04             | 31.50                    | 1.112          | 0.178                 | /         |
|                                                                          | Off             |               | Right Tilt  | 0          | 251 | 848.80      | 0.03             | 0.087               | 31.04             | 31.50                    | 1.112          | 0.097                 | /         |
| Body-worn Accessory (15mm)                                               |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | Voice         | Front Side  | 15         | 128 | 824.20      | 0.02             | 0.016               | 33.40             | 33.50                    | 1.023          | 0.016                 | /         |
|                                                                          | Off             |               | Back Side   | 15         | 128 | 824.20      | 0.07             | 0.038               | 33.40             | 33.50                    | 1.023          | 0.039                 | /         |
|                                                                          | Off             | GPRS (2slots) | Front Side  | 15         | 251 | 848.80      | 0.13             | 0.034               | 31.04             | 31.50                    | 1.112          | 0.038                 | /         |
|                                                                          | Off             |               | Back Side   | 15         | 251 | 848.80      | -0.10            | 0.067               | 31.04             | 31.50                    | 1.112          | 0.074                 | /         |
| Down                                                                     | Off             | Voice         | Front Side  | 15         | 128 | 824.20      | 0.17             | 0.100               | 33.40             | 33.50                    | 1.023          | 0.102                 | /         |
|                                                                          | Off             |               | Back Side   | 15         | 128 | 824.20      | 0.18             | 0.126               | 33.40             | 33.50                    | 1.023          | 0.129                 | /         |
|                                                                          | Off             | GPRS (2slots) | Front Side  | 15         | 251 | 848.80      | 0.00             | 0.157               | 31.04             | 31.50                    | 1.112          | 0.175                 | /         |
|                                                                          | Off             |               | Back Side   | 15         | 251 | 848.80      | -0.02            | 0.172               | 31.04             | 31.50                    | 1.112          | <b>0.191</b>          | 2#        |
| Hotspot (10mm)                                                           |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | GPRS (2slots) | Front Side  | 10         | 251 | 848.80      | 0.14             | 0.044               | 31.04             | 31.50                    | 1.112          | 0.049                 | /         |
|                                                                          | Off             |               | Back Side   | 10         | 251 | 848.80      | 0.08             | 0.078               | 31.04             | 31.50                    | 1.112          | 0.087                 | /         |
|                                                                          | Off             |               | Left Edge   | 10         | 251 | 848.80      | 0.06             | 0.003               | 31.04             | 31.50                    | 1.112          | 0.003                 | /         |
|                                                                          | Off             |               | Right Edge  | 10         | 251 | 848.80      | 0.14             | 0.005               | 31.04             | 31.50                    | 1.112          | 0.006                 | /         |
|                                                                          | Off             |               | Top Edge    | 10         | 251 | 848.80      | 0.11             | 0.072               | 31.04             | 31.50                    | 1.112          | 0.080                 | /         |
| Down                                                                     | Off             | GPRS (2slots) | Front Side  | 10         | 251 | 848.80      | 0.12             | 0.296               | 31.04             | 31.50                    | 1.112          | 0.329                 | /         |
|                                                                          | Off             |               | Back Side   | 10         | 251 | 848.80      | -0.02            | 0.314               | 31.04             | 31.50                    | 1.112          | 0.349                 | /         |
|                                                                          | Off             |               | Left Edge   | 10         | 251 | 848.80      | 0.03             | 0.094               | 31.04             | 31.50                    | 1.112          | 0.105                 | /         |
|                                                                          | Off             |               | Right Edge  | 10         | 251 | 848.80      | 0.14             | 0.195               | 31.04             | 31.50                    | 1.112          | 0.217                 | /         |
|                                                                          | Off             |               | Bottom Edge | 10         | 251 | 848.80      | 0.07             | 0.333               | 31.04             | 31.50                    | 1.112          | <b>0.370</b>          | 3#        |
| Note: Refer to 0 for the detailed test data for each test configuration. |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |

# 10.2GSM 1900

| Antenna                    | Power Reduction | Mode          | Position    | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|----------------------------|-----------------|---------------|-------------|------------|-----|-------------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                       |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Level1          | GPRS (3slots) | Left Cheek  | 0          | 512 | 1850.20     | 0.20             | 0.430               | 21.64             | 22.50                    | 1.219          | 0.524                 | /         |
|                            | Level1          |               | Left Tilt   | 0          | 512 | 1850.20     | 0.19             | 0.481               | 21.64             | 22.50                    | 1.219          | 0.586                 | /         |
|                            | Level1          |               | Right Cheek | 0          | 512 | 1850.20     | 0.10             | 0.677               | 21.64             | 22.50                    | 1.219          | 0.825                 | /         |
|                            | Level1          |               |             | 0          | 661 | 1880.00     | 0.04             | 0.709               | 21.36             | 22.50                    | 1.300          | 0.922                 | /         |
|                            | Level1          |               |             | 0          | 810 | 1909.80     | 0.14             | 0.764               | 21.53             | 22.50                    | 1.250          | 0.955                 | /         |
|                            | Level1          |               | Right Tilt  | 0          | 512 | 1850.20     | 0.17             | 0.759               | 21.64             | 22.50                    | 1.219          | 0.925                 | /         |
|                            | Level1          |               |             | 0          | 661 | 1880.00     | 0.09             | 0.789               | 21.36             | 22.50                    | 1.300          | 1.026                 | /         |
|                            | Level1          |               |             | 0          | 810 | 1909.80     | 0.01             | 0.865               | 21.53             | 22.50                    | 1.250          | 1.081                 | 4#        |
| Up                         | Level2          | GPRS (3slots) | Left Cheek  | 0          | 512 | 1850.20     | 0.06             | 0.398               | 21.38             | 22.00                    | 1.153          | 0.459                 | /         |
|                            | Level2          |               | Left Tilt   | 0          | 512 | 1850.20     | 0.13             | 0.416               | 21.38             | 22.00                    | 1.153          | 0.480                 | /         |
|                            | Level2          |               | Right Cheek | 0          | 512 | 1850.20     | 0.06             | 0.612               | 21.38             | 22.00                    | 1.153          | 0.706                 | /         |
|                            | Level2          |               | Right Tilt  | 0          | 512 | 1850.20     | 0.09             | 0.664               | 21.38             | 22.00                    | 1.153          | 0.766                 | /         |
| Up                         | Level3          | GPRS (3slots) | Left Cheek  | 0          | 512 | 1850.20     | 0.00             | 0.316               | 20.58             | 21.00                    | 1.102          | 0.348                 | /         |
|                            | Level3          |               | Left Tilt   | 0          | 512 | 1850.20     | 0.05             | 0.331               | 20.58             | 21.00                    | 1.102          | 0.364                 | /         |
|                            | Level3          |               | Right Cheek | 0          | 512 | 1850.20     | 0.16             | 0.408               | 20.58             | 21.00                    | 1.102          | 0.449                 | /         |
|                            | Level3          |               | Right Tilt  | 0          | 512 | 1850.20     | 0.14             | 0.486               | 20.58             | 21.00                    | 1.102          | 0.535                 | /         |
| Down                       | Off             | GPRS (3slots) | Left Cheek  | 0          | 810 | 1909.80     | 0.15             | 0.044               | 26.41             | 27.00                    | 1.146          | 0.051                 | /         |
|                            | Off             |               | Left Tilt   | 0          | 810 | 1909.80     | 0.07             | 0.033               | 26.41             | 27.00                    | 1.146          | 0.037                 | /         |
|                            | Off             |               | Right Cheek | 0          | 810 | 1909.80     | 0.18             | 0.040               | 26.41             | 27.00                    | 1.146          | 0.045                 | /         |
|                            | Off             |               | Right Tilt  | 0          | 810 | 1909.80     | 0.05             | 0.032               | 26.41             | 27.00                    | 1.146          | 0.037                 | /         |
| Body-worn Accessory (15mm) |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Off             | Voice         | Front Side  | 15         | 512 | 1850.20     | 0.02             | 0.177               | 30.01             | 30.50                    | 1.119          | 0.198                 | /         |
|                            | Off             |               | Back Side   | 15         | 512 | 1850.20     | 0.18             | 0.230               | 30.01             | 30.50                    | 1.119          | 0.257                 | /         |
|                            | Off             | GPRS (3slots) | Front Side  | 15         | 810 | 1909.80     | 0.06             | 0.270               | 26.41             | 27.00                    | 1.146          | 0.309                 | /         |
|                            | Off             |               | Back Side   | 15         | 810 | 1909.80     | -0.02            | 0.309               | 26.41             | 27.00                    | 1.146          | 0.354                 | 5#        |
| Down                       | Off             | Voice         | Front Side  | 15         | 512 | 1850.20     | 0.03             | 0.084               | 30.01             | 30.50                    | 1.119          | 0.094                 | /         |
|                            | Off             |               | Back Side   | 15         | 512 | 1850.20     | 0.10             | 0.125               | 30.01             | 30.50                    | 1.119          | 0.140                 | /         |
|                            | Off             | GPRS (3slots) | Front Side  | 15         | 810 | 1909.80     | 0.09             | 0.122               | 26.41             | 27.00                    | 1.146          | 0.140                 | /         |
|                            | Off             |               | Back Side   | 15         | 810 | 1909.80     | 0.15             | 0.197               | 26.41             | 27.00                    | 1.146          | 0.226                 | /         |
| Hotspot (10mm)             |                 |               |             |            |     |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Off             | GPRS (3slots) | Front Side  | 10         | 810 | 1909.80     | -0.13            | 0.595               | 26.41             | 27.00                    | 1.146          | 0.682                 | /         |
|                            | Off             |               | Back Side   | 10         | 810 | 1909.80     | 0.00             | 0.622               | 26.41             | 27.00                    | 1.146          | 0.713                 | /         |
|                            | Off             |               | Left Edge   | 10         | 810 | 1909.80     | 0.16             | 0.076               | 26.41             | 27.00                    | 1.146          | 0.087                 | /         |
|                            | Off             |               | Right Edge  | 10         | 810 | 1909.80     | 0.07             | 0.162               | 26.41             | 27.00                    | 1.146          | 0.186                 | /         |
|                            | Off             |               | Top Edge    | 10         | 810 | 1909.80     | 0.08             | 0.896               | 26.41             | 27.00                    | 1.146          | 1.026                 | /         |
|                            | Off             |               |             | 10         | 512 | 1850.20     | 0.20             | 0.792               | 26.01             | 27.00                    | 1.256          | 0.995                 | /         |
|                            | Off             |               |             | 10         | 661 | 1880.00     | -0.11            | 0.910               | 26.28             | 27.00                    | 1.180          | 1.074                 | 6#        |
| Down                       | Off             | GPRS (3slots) | Front Side  | 10         | 810 | 1909.80     | 0.02             | 0.186               | 26.41             | 27.00                    | 1.146          | 0.213                 | /         |
|                            | Off             |               | Back Side   | 10         | 810 | 1909.80     | 0.02             | 0.443               | 26.41             | 27.00                    | 1.146          | 0.507                 | /         |

|                                                                          |     |  |             |    |     |         |      |       |       |       |       |       |   |
|--------------------------------------------------------------------------|-----|--|-------------|----|-----|---------|------|-------|-------|-------|-------|-------|---|
|                                                                          | Off |  | Left Edge   | 10 | 810 | 1909.80 | 0.19 | 0.084 | 26.41 | 27.00 | 1.146 | 0.096 | / |
|                                                                          | Off |  | Right Edge  | 10 | 810 | 1909.80 | 0.17 | 0.032 | 26.41 | 27.00 | 1.146 | 0.037 | / |
|                                                                          | Off |  | Bottom Edge | 10 | 810 | 1909.80 | 0.07 | 0.476 | 26.41 | 27.00 | 1.146 | 0.545 | / |
| Note: Refer to 0 for the detailed test data for each test configuration. |     |  |             |    |     |         |      |       |       |       |       |       |   |

## 10.3WCDMA Band 2

| Antenna                    | Power Reduction | Mode | Position    | Dist. (mm) | Ch.  | Freq. (MHz) | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|----------------------------|-----------------|------|-------------|------------|------|-------------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                       |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Level1&2        | RMC  | Left Cheek  | 0          | 9262 | 1852.40     | 0.10             | 0.402               | 16.07             | 17.00                    | 1.239          | 0.498                 | /         |
|                            | Level1&2        |      | Left Tilt   | 0          | 9262 | 1852.40     | 0.08             | 0.458               | 16.07             | 17.00                    | 1.239          | 0.567                 | /         |
|                            | Level1&2        |      | Right Cheek | 0          | 9262 | 1852.40     | 0.16             | 0.582               | 16.07             | 17.00                    | 1.239          | 0.721                 | /         |
|                            | Level1&2        |      | Right Tilt  | 0          | 9262 | 1852.40     | 0.07             | 0.688               | 16.07             | 17.00                    | 1.239          | 0.852                 | /         |
|                            | Level1&2        |      |             | 0          | 9400 | 1880.00     | -0.07            | 0.802               | 15.98             | 17.00                    | 1.265          | 1.014                 | /         |
|                            | Level1&2        |      |             | 0          | 9538 | 1907.60     | 0.04             | 0.951               | 16.02             | 17.00                    | 1.253          | 1.192                 | 7#        |
| Up                         | Level3          | RMC  | Left Cheek  | 0          | 9262 | 1852.40     | 0.14             | 0.282               | 14.72             | 15.50                    | 1.197          | 0.337                 | /         |
|                            | Level3          |      | Left Tilt   | 0          | 9262 | 1852.40     | 0.19             | 0.336               | 14.72             | 15.50                    | 1.197          | 0.402                 | /         |
|                            | Level3          |      | Right Cheek | 0          | 9262 | 1852.40     | 0.00             | 0.430               | 14.72             | 15.50                    | 1.197          | 0.515                 | /         |
|                            | Level3          |      | Right Tilt  | 0          | 9262 | 1852.40     | -0.15            | 0.487               | 14.72             | 15.50                    | 1.197          | 0.583                 | /         |
| Down                       | Off             | RMC  | Left Cheek  | 0          | 9262 | 1852.40     | 0.13             | 0.089               | 22.72             | 24.00                    | 1.343          | 0.120                 | /         |
|                            | Off             |      | Left Tilt   | 0          | 9262 | 1852.40     | -0.12            | 0.078               | 22.72             | 24.00                    | 1.343          | 0.105                 | /         |
|                            | Off             |      | Right Cheek | 0          | 9262 | 1852.40     | 0.06             | 0.130               | 22.72             | 24.00                    | 1.343          | 0.175                 | /         |
|                            | Off             |      | Right Tilt  | 0          | 9262 | 1852.40     | 0.08             | 0.096               | 22.72             | 24.00                    | 1.343          | 0.129                 | /         |
| Body-worn Accessory (15mm) |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Level4          | RMC  | Front Side  | 15         | 9262 | 1852.40     | 0.17             | 0.174               | 20.11             | 21.00                    | 1.227          | 0.214                 | /         |
|                            | Level4          |      | Back Side   | 15         | 9262 | 1852.40     | -0.05            | 0.189               | 20.11             | 21.00                    | 1.227          | 0.232                 | /         |
| Down                       | Off             | RMC  | Front Side  | 15         | 9262 | 1852.40     | 0.15             | 0.123               | 22.72             | 24.00                    | 1.343          | 0.165                 | /         |
|                            | Off             |      | Back Side   | 15         | 9262 | 1852.40     | 0.19             | 0.278               | 22.72             | 24.00                    | 1.343          | 0.373                 | 8#        |
| Hotspot (10mm)             |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Level4          | RMC  | Front Side  | 10         | 9262 | 1852.40     | 0.17             | 0.239               | 20.11             | 21.00                    | 1.227          | 0.293                 | /         |
|                            | Level4          |      | Back Side   | 10         | 9262 | 1852.40     | 0.06             | 0.303               | 20.11             | 21.00                    | 1.227          | 0.372                 | /         |
|                            | Level4          |      | Left Edge   | 10         | 9262 | 1852.40     | 0.16             | 0.044               | 20.11             | 21.00                    | 1.227          | 0.053                 | /         |
|                            | Level4          |      | Right Edge  | 10         | 9262 | 1852.40     | -0.08            | 0.090               | 20.11             | 21.00                    | 1.227          | 0.110                 | /         |
|                            | Level4          |      | Top Edge    | 10         | 9262 | 1852.40     | -0.02            | 0.492               | 20.11             | 21.00                    | 1.227          | 0.604                 | /         |
| Down                       | Off             | RMC  | Front Side  | 10         | 9262 | 1852.40     | 0.07             | 0.226               | 22.72             | 24.00                    | 1.343          | 0.303                 | /         |
|                            | Off             |      | Back Side   | 10         | 9262 | 1852.40     | -0.08            | 0.576               | 22.72             | 24.00                    | 1.343          | 0.773                 | /         |
|                            | Off             |      | Left Edge   | 10         | 9262 | 1852.40     | 0.06             | 0.107               | 22.72             | 24.00                    | 1.343          | 0.144                 | /         |
|                            | Off             |      | Right Edge  | 10         | 9262 | 1852.40     | 0.01             | 0.055               | 22.72             | 24.00                    | 1.343          | 0.074                 | /         |
|                            | Off             |      | Bottom Edge | 10         | 9262 | 1852.40     | 0.14             | 0.630               | 22.72             | 24.00                    | 1.343          | 0.846                 | 9#        |
|                            | Off             |      |             | 10         | 9400 | 1880.00     | -0.01            | 0.560               | 22.56             | 24.00                    | 1.393          | 0.780                 | /         |
|                            | Off             |      |             | 10         | 9538 | 1907.60     | 0.13             | 0.482               | 22.69             | 24.00                    | 1.352          | 0.652                 | /         |

|                                                                          | Reduction |     |            | (mm) |      | (MHz)   | Drift<br>(dB) | SAR10 g<br>(W/Kg) | Power<br>(dBm) | tune-up<br>Power (dBm) | Factor | Scaled<br>SAR<br>(W/Kg) | No. |
|--------------------------------------------------------------------------|-----------|-----|------------|------|------|---------|---------------|-------------------|----------------|------------------------|--------|-------------------------|-----|
| ProductSpecific10g SAR (0mm)                                             |           |     |            |      |      |         |               |                   |                |                        |        |                         |     |
| Up                                                                       | Level4    | RMC | Front Side | 0    | 9262 | 1852.40 | 0.05          | 0.750             | 20.11          | 21.00                  | 1.227  | 0.921                   | /   |
|                                                                          | Level4    |     | Back Side  | 0    | 9262 | 1852.40 | -0.07         | 0.897             | 20.11          | 21.00                  | 1.227  | 1.101                   | /   |
|                                                                          | Level4    |     | Left Edge  | 0    | 9262 | 1852.40 | 0.08          | 0.061             | 20.11          | 21.00                  | 1.227  | 0.075                   | /   |
|                                                                          | Level4    |     | Right Edge | 0    | 9262 | 1852.40 | 0.16          | 0.173             | 20.11          | 21.00                  | 1.227  | 0.212                   | /   |
|                                                                          | Level4    |     | Top Edge   | 0    | 9262 | 1852.40 | 0.19          | 1.380             | 20.11          | 21.00                  | 1.227  | 1.694                   | 10# |
| Note: Refer to 0 for the detailed test data for each test configuration. |           |     |            |      |      |         |               |                   |                |                        |        |                         |     |

## 10.4WCDMA Band 4

| Antenna                    | Power Reduction | Mode | Position    | Dist. (mm) | Ch.  | Freq. (MHz) | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|----------------------------|-----------------|------|-------------|------------|------|-------------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                       |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Level1          | RMC  | Left Cheek  | 0          | 1312 | 1712.40     | 0.04             | 0.582               | 18.12             | 19.00                    | 1.225          | 0.713                 | /         |
|                            | Level1          |      | Left Tilt   | 0          | 1312 | 1712.40     | -0.08            | 0.671               | 18.12             | 19.00                    | 1.225          | 0.822                 | /         |
|                            | Level1          |      |             | 0          | 1412 | 1732.40     | 0.15             | 0.722               | 17.89             | 19.00                    | 1.291          | 0.932                 | /         |
|                            | Level1          |      |             | 0          | 1513 | 1752.60     | -0.18            | 0.816               | 18.05             | 19.00                    | 1.245          | 1.016                 | /         |
|                            | Level1          |      | Right Cheek | 0          | 1312 | 1712.40     | -0.06            | 0.622               | 18.12             | 19.00                    | 1.225          | 0.762                 | /         |
|                            | Level1          |      | Right Tilt  | 0          | 1312 | 1712.40     | 0.17             | 0.702               | 18.12             | 19.00                    | 1.225          | 0.860                 | /         |
|                            | Level1          |      |             | 0          | 1412 | 1732.40     | 0.08             | 0.751               | 17.89             | 19.00                    | 1.291          | 0.970                 | /         |
|                            | Level1          |      |             | 0          | 1513 | 1752.60     | 0.11             | 0.837               | 18.05             | 19.00                    | 1.245          | 1.042                 | 11#       |
| Up                         | Level2          | RMC  | Left Cheek  | 0          | 1312 | 1712.40     | 0.09             | 0.423               | 16.82             | 17.50                    | 1.169          | 0.495                 | /         |
|                            | Level2          |      | Left Tilt   | 0          | 1312 | 1712.40     | 0.12             | 0.475               | 16.82             | 17.50                    | 1.169          | 0.556                 | /         |
|                            | Level2          |      | Right Cheek | 0          | 1312 | 1712.40     | 0.14             | 0.431               | 16.82             | 17.50                    | 1.169          | 0.504                 | /         |
|                            | Level2          |      | Right Tilt  | 0          | 1312 | 1712.40     | -0.07            | 0.522               | 16.82             | 17.50                    | 1.169          | 0.610                 | /         |
| Up                         | Level3          | RMC  | Left Cheek  | 0          | 1312 | 1712.40     | 0.06             | 0.326               | 15.82             | 17.00                    | 1.312          | 0.427                 | /         |
|                            | Level3          |      | Left Tilt   | 0          | 1312 | 1712.40     | 0.07             | 0.384               | 15.82             | 17.00                    | 1.312          | 0.504                 | /         |
|                            | Level3          |      | Right Cheek | 0          | 1312 | 1712.40     | -0.20            | 0.352               | 15.82             | 17.00                    | 1.312          | 0.462                 | /         |
|                            | Level3          |      | Right Tilt  | 0          | 1312 | 1712.40     | -0.07            | 0.488               | 15.82             | 17.00                    | 1.312          | 0.641                 | /         |
| Down                       | Off             | RMC  | Left Cheek  | 0          | 1513 | 1752.60     | 0.04             | 0.081               | 22.89             | 24.00                    | 1.291          | 0.105                 | /         |
|                            | Off             |      | Left Tilt   | 0          | 1513 | 1752.60     | 0.18             | 0.096               | 22.89             | 24.00                    | 1.291          | 0.124                 | /         |
|                            | Off             |      | Right Cheek | 0          | 1513 | 1752.60     | 0.09             | 0.132               | 22.89             | 24.00                    | 1.291          | 0.170                 | /         |
|                            | Off             |      | Right Tilt  | 0          | 1513 | 1752.60     | 0.02             | 0.106               | 22.89             | 24.00                    | 1.291          | 0.137                 | /         |
| Body-worn Accessory (15mm) |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Off             | RMC  | Front Side  | 15         | 1513 | 1752.60     | -0.16            | 0.310               | 22.89             | 24.00                    | 1.291          | 0.400                 | /         |
|                            | Off             |      | Back Side   | 15         | 1513 | 1752.60     | 0.12             | 0.312               | 22.89             | 24.00                    | 1.291          | 0.403                 | 12#       |
| Down                       | Off             | RMC  | Front Side  | 15         | 1513 | 1752.60     | 0.12             | 0.127               | 22.89             | 24.00                    | 1.291          | 0.164                 | /         |
|                            | Off             |      | Back Side   | 15         | 1513 | 1752.60     | 0.18             | 0.248               | 22.89             | 24.00                    | 1.291          | 0.320                 | /         |
| Hotspot (10mm)             |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                         | Off             | RMC  | Front Side  | 10         | 1513 | 1752.60     | -0.08            | 0.509               | 22.89             | 24.00                    | 1.291          | 0.657                 | /         |
|                            | Off             |      | Back Side   | 10         | 1513 | 1752.60     | -0.05            | 0.614               | 22.89             | 24.00                    | 1.291          | 0.793                 | /         |

|                                                                          |     |     |             |    |      |         |       |       |       |       |       |              |     |
|--------------------------------------------------------------------------|-----|-----|-------------|----|------|---------|-------|-------|-------|-------|-------|--------------|-----|
|                                                                          | Off |     | Left Edge   | 10 | 1513 | 1752.60 | 0.08  | 0.098 | 22.89 | 24.00 | 1.291 | 0.126        | /   |
|                                                                          | Off |     | Right Edge  | 10 | 1513 | 1752.60 | 0.15  | 0.172 | 22.89 | 24.00 | 1.291 | 0.222        | /   |
|                                                                          | Off |     | Top Edge    | 10 | 1513 | 1752.60 | 0.03  | 0.674 | 22.89 | 24.00 | 1.291 | <b>0.870</b> | 13# |
|                                                                          | Off |     |             | 10 | 1312 | 1712.40 | 0.00  | 0.578 | 22.66 | 24.00 | 1.361 | 0.787        | /   |
|                                                                          | Off |     |             | 10 | 1412 | 1732.40 | 0.03  | 0.631 | 22.79 | 24.00 | 1.321 | 0.834        | /   |
| Down                                                                     | Off | RMC | Front Side  | 10 | 1513 | 1752.60 | 0.06  | 0.238 | 22.89 | 24.00 | 1.291 | 0.307        | /   |
|                                                                          | Off |     | Back Side   | 10 | 1513 | 1752.60 | -0.04 | 0.522 | 22.89 | 24.00 | 1.291 | 0.674        | /   |
|                                                                          | Off |     | Left Edge   | 10 | 1513 | 1752.60 | 0.14  | 0.156 | 22.89 | 24.00 | 1.291 | 0.201        | /   |
|                                                                          | Off |     | Right Edge  | 10 | 1513 | 1752.60 | 0.10  | 0.110 | 22.89 | 24.00 | 1.291 | 0.142        | /   |
|                                                                          | Off |     | Bottom Edge | 10 | 1513 | 1752.60 | -0.10 | 0.594 | 22.89 | 24.00 | 1.291 | 0.767        | /   |
| Note: Refer to 0 for the detailed test data for each test configuration. |     |     |             |    |      |         |       |       |       |       |       |              |     |

## 10.5WCDMA Band 5

| Antenna                                                                  | Power Reduction | Mode | Position    | Dist. (mm) | Ch.  | Freq. (MHz) | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|--------------------------------------------------------------------------|-----------------|------|-------------|------------|------|-------------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                                                                     |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | RMC  | Left Cheek  | 0          | 4132 | 826.40      | -0.01            | 0.264               | 22.99             | 24.00                    | 1.262          | 0.333                 | /         |
|                                                                          | Off             |      | Left Tilt   | 0          | 4132 | 826.40      | 0.02             | 0.213               | 22.99             | 24.00                    | 1.262          | 0.269                 | /         |
|                                                                          | Off             |      | Right Cheek | 0          | 4132 | 826.40      | -0.02            | 0.336               | 22.99             | 24.00                    | 1.262          | <b>0.424</b>          | 14#       |
|                                                                          | Off             |      | Right Tilt  | 0          | 4132 | 826.40      | 0.00             | 0.284               | 22.99             | 24.00                    | 1.262          | 0.358                 | /         |
| Down                                                                     | Off             | RMC  | Left Cheek  | 0          | 4132 | 826.40      | 0.18             | 0.172               | 22.99             | 24.00                    | 1.262          | 0.217                 | /         |
|                                                                          | Off             |      | Left Tilt   | 0          | 4132 | 826.40      | 0.11             | 0.081               | 22.99             | 24.00                    | 1.262          | 0.102                 | /         |
|                                                                          | Off             |      | Right Cheek | 0          | 4132 | 826.40      | 0.11             | 0.156               | 22.99             | 24.00                    | 1.262          | 0.197                 | /         |
|                                                                          | Off             |      | Right Tilt  | 0          | 4132 | 826.40      | 0.10             | 0.085               | 22.99             | 24.00                    | 1.262          | 0.107                 | /         |
| Body-worn Accessory (15mm)                                               |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | RMC  | Front Side  | 15         | 4132 | 826.40      | 0.04             | 0.022               | 22.99             | 24.00                    | 1.262          | 0.028                 | /         |
|                                                                          | Off             |      | Back Side   | 15         | 4132 | 826.40      | 0.20             | 0.056               | 22.99             | 24.00                    | 1.262          | 0.070                 | /         |
|                                                                          | Off             | RMC  | Front Side  | 15         | 4132 | 826.40      | -0.01            | 0.150               | 22.99             | 24.00                    | 1.262          | 0.189                 | /         |
|                                                                          | Off             |      | Back Side   | 15         | 4132 | 826.40      | 0.00             | 0.178               | 22.99             | 24.00                    | 1.262          | <b>0.225</b>          | 15#       |
| Hotspot (10mm)                                                           |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |
| Up                                                                       | Off             | RMC  | Front Side  | 10         | 4132 | 826.40      | -0.20            | 0.065               | 22.99             | 24.00                    | 1.262          | 0.082                 | /         |
|                                                                          | Off             |      | Back Side   | 10         | 4132 | 826.40      | 0.02             | 0.083               | 22.99             | 24.00                    | 1.262          | 0.104                 | /         |
|                                                                          | Off             |      | Left Edge   | 10         | 4132 | 826.40      | 0.14             | 0.004               | 22.99             | 24.00                    | 1.262          | 0.005                 | /         |
|                                                                          | Off             |      | Right Edge  | 10         | 4132 | 826.40      | -0.01            | 0.009               | 22.99             | 24.00                    | 1.262          | 0.011                 | /         |
|                                                                          | Off             |      | Top Edge    | 10         | 4132 | 826.40      | 0.01             | 0.076               | 22.99             | 24.00                    | 1.262          | 0.096                 | /         |
| Down                                                                     | Off             | RMC  | Front Side  | 10         | 4132 | 826.40      | 0.03             | 0.218               | 22.99             | 24.00                    | 1.262          | 0.275                 | /         |
|                                                                          | Off             |      | Back Side   | 10         | 4132 | 826.40      | 0.08             | 0.208               | 22.99             | 24.00                    | 1.262          | 0.262                 | /         |
|                                                                          | Off             |      | Left Edge   | 10         | 4132 | 826.40      | -0.12            | 0.108               | 22.99             | 24.00                    | 1.262          | 0.136                 | /         |
|                                                                          | Off             |      | Right Edge  | 10         | 4132 | 826.40      | -0.05            | 0.216               | 22.99             | 24.00                    | 1.262          | 0.273                 | /         |
|                                                                          | Off             |      | Bottom Edge | 10         | 4132 | 826.40      | -0.04            | 0.224               | 22.99             | 24.00                    | 1.262          | <b>0.283</b>          | 16#       |
| Note: Refer to 0 for the detailed test data for each test configuration. |                 |      |             |            |      |             |                  |                     |                   |                          |                |                       |           |

## 10.6LTE Band 2 (20MHz Bandwidth)

| Antenna | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Numb. | RB Start | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|---------|-----------------|------|-------------|------------|-------|-------------|----------|----------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head    |                 |      |             |            |       |             |          |          |                  |                     |                   |                          |                |                       |           |
| Up      | level1          | QPSK | Left Cheek  | 0          | 18900 | 1880        | 1        | Low      | -0.04            | 0.543               | 17.32             | 18.00                    | 1.169          | 0.635                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 50       | Low      | -0.10            | 0.502               | 17.19             | 18.00                    | 1.205          | 0.605                 | /         |
|         | level1          |      | Left Tilt   | 0          | 18900 | 1880        | 1        | Low      | 0.18             | 0.618               | 17.32             | 18.00                    | 1.169          | 0.723                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 50       | Low      | -0.19            | 0.580               | 17.19             | 18.00                    | 1.205          | 0.699                 | /         |
|         | level1          |      | Right Cheek | 0          | 18900 | 1880        | 1        | Low      | 0.11             | 0.862               | 17.32             | 18.00                    | 1.169          | 1.008                 | /         |
|         | level1          |      |             | 0          | 18700 | 1860        | 1        | High     | 0.08             | 0.768               | 17.22             | 18.00                    | 1.197          | 0.919                 | /         |
|         | level1          |      |             | 0          | 19100 | 1900        | 1        | Low      | -0.04            | 0.554               | 17.03             | 18.00                    | 1.250          | 0.693                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.11             | 0.744               | 17.19             | 18.00                    | 1.205          | 0.897                 | /         |
|         | level1          |      |             | 0          | 18700 | 1860        | 50       | Mid      | 0.06             | 0.628               | 17.15             | 18.00                    | 1.216          | 0.764                 | /         |
|         | level1          |      |             | 0          | 19100 | 1900        | 50       | Low      | -0.04            | 0.469               | 17.11             | 18.00                    | 1.227          | 0.576                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 100      | Low      | -0.18            | 0.573               | 17.30             | 18.00                    | 1.175          | 0.673                 | /         |
|         | level1          |      | Right Tilt  | 0          | 18900 | 1880        | 1        | Low      | 0.11             | 1.010               | 17.32             | 18.00                    | 1.169          | <b>1.181</b>          | 17#       |
|         | level1          |      |             | 0          | 18700 | 1860        | 1        | High     | 0.08             | 0.907               | 17.22             | 18.00                    | 1.197          | 1.085                 | /         |
|         | level1          |      |             | 0          | 19100 | 1900        | 1        | Low      | 0.14             | 0.682               | 17.03             | 18.00                    | 1.250          | 0.853                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.19             | 0.858               | 17.19             | 18.00                    | 1.205          | 1.034                 | /         |
|         | level1          |      |             | 0          | 18700 | 1860        | 50       | Mid      | -0.16            | 0.726               | 17.15             | 18.00                    | 1.216          | 0.883                 | /         |
|         | level1          |      |             | 0          | 19100 | 1900        | 50       | Low      | -0.08            | 0.552               | 17.11             | 18.00                    | 1.227          | 0.678                 | /         |
|         | level1          |      |             | 0          | 18900 | 1880        | 100      | Low      | -0.12            | 0.672               | 17.30             | 18.00                    | 1.175          | 0.790                 | /         |
| Up      | level2          | QPSK | Left Cheek  | 0          | 18900 | 1880        | 1        | Low      | 0.05             | 0.436               | 16.54             | 17.00                    | 1.112          | 0.485                 | /         |
|         | level2          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.09             | 0.412               | 16.39             | 17.00                    | 1.151          | 0.474                 | /         |
|         | level2          |      | Left Tilt   | 0          | 18900 | 1880        | 1        | Low      | -0.14            | 0.513               | 16.54             | 17.00                    | 1.112          | 0.570                 | /         |
|         | level2          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.15             | 0.488               | 16.39             | 17.00                    | 1.151          | 0.562                 | /         |
|         | level2          |      | Right Cheek | 0          | 18900 | 1880        | 1        | Low      | -0.18            | 0.642               | 16.54             | 17.00                    | 1.112          | 0.714                 | /         |
|         | level2          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.05             | 0.603               | 16.39             | 17.00                    | 1.151          | 0.694                 | /         |
|         | level2          |      | Right Tilt  | 0          | 18900 | 1880        | 1        | Low      | -0.03            | 0.813               | 16.54             | 17.00                    | 1.112          | 0.904                 | /         |
|         | level2          |      |             | 0          | 18700 | 1860        | 1        | High     | 0.11             | 0.726               | 16.42             | 17.00                    | 1.143          | 0.830                 | /         |
|         | level2          |      |             | 0          | 19100 | 1900        | 1        | Low      | 0.14             | 0.538               | 16.19             | 17.00                    | 1.205          | 0.648                 | /         |
|         | level2          |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.05             | 0.644               | 16.39             | 17.00                    | 1.151          | 0.741                 | /         |
|         | level2          |      |             | 0          | 18700 | 1860        | 100      | Low      | -0.04            | 0.518               | 16.33             | 17.00                    | 1.167          | 0.604                 | /         |
| Up      | level3          | QPSK | Left Cheek  |            | 18900 | 1880        | 1        | Low      | -0.12            | 0.344               | 15.51             | 16.00                    | 1.119          | 0.385                 | /         |
|         | level3          |      |             | 0          | 18700 | 1860        | 50       | Low      | 0.07             | 0.316               | 15.37             | 16.00                    | 1.156          | 0.365                 | /         |
|         | level3          |      | Left Tilt   | 0          | 18900 | 1880        | 1        | Low      | -0.10            | 0.402               | 15.51             | 16.00                    | 1.119          | 0.450                 | /         |
|         | level3          |      |             | 0          | 18700 | 1860        | 50       | Low      | 0.10             | 0.348               | 15.37             | 16.00                    | 1.156          | 0.402                 | /         |
|         | level3          |      | Right Cheek | 0          | 18900 | 1880        | 1        | Low      | 0.09             | 0.533               | 15.51             | 16.00                    | 1.119          | 0.597                 | /         |
|         | level3          |      |             | 0          | 18700 | 1860        | 50       | Low      | 0.16             | 0.474               | 15.37             | 16.00                    | 1.156          | 0.548                 | /         |
|         | level3          |      | Right Tilt  | 0          | 18900 | 1880        | 1        | Low      | 0.04             | 0.643               | 15.51             | 16.00                    | 1.119          | 0.720                 | /         |
|         | level3          |      |             | 0          | 18700 | 1860        | 50       | Low      | -0.20            | 0.506               | 15.37             | 16.00                    | 1.156          | 0.585                 | /         |
| Down    | Off             | QPSK | Left Cheek  | 0          | 18900 | 1880        | 1        | Low      | -0.14            | 0.063               | 23.34             | 24.00                    | 1.164          | 0.074                 | /         |
|         | Off             |      |             | 0          | 18900 | 1880        | 50       | Low      | -0.11            | 0.061               | 22.18             | 23.00                    | 1.208          | 0.074                 | /         |

|                              |                 |      |             |            |       |             |          |          |                  |                      |                   |                          |                |                        |           |
|------------------------------|-----------------|------|-------------|------------|-------|-------------|----------|----------|------------------|----------------------|-------------------|--------------------------|----------------|------------------------|-----------|
|                              | Off             |      | Left Tilt   | 0          | 18900 | 1880        | 1        | Low      | 0.20             | 0.067                | 23.34             | 24.00                    | 1.164          | 0.078                  | /         |
|                              | Off             |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.00             | 0.070                | 22.18             | 23.00                    | 1.208          | 0.085                  | /         |
|                              | Off             |      | Right Cheek | 0          | 18900 | 1880        | 1        | Low      | 0.16             | 0.118                | 23.34             | 24.00                    | 1.164          | 0.137                  | /         |
|                              | Off             |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.16             | 0.109                | 22.18             | 23.00                    | 1.208          | 0.132                  | /         |
|                              | Off             |      | Right Tilt  | 0          | 18900 | 1880        | 1        | Low      | -0.10            | 0.061                | 23.34             | 24.00                    | 1.164          | 0.071                  | /         |
|                              | Off             |      |             | 0          | 18900 | 1880        | 50       | Low      | 0.01             | 0.052                | 22.18             | 23.00                    | 1.208          | 0.063                  | /         |
| Body-worn Accessory (15mm)   |                 |      |             |            |       |             |          |          |                  |                      |                   |                          |                |                        |           |
| Up                           | Level4          | QPSK | Front Side  | 15         | 18900 | 1880        | 1        | Low      | -0.16            | 0.173                | 20.50             | 21.00                    | 1.122          | 0.194                  | /         |
|                              | Level4          |      |             | 15         | 18700 | 1860        | 50       | Low      | 0.06             | 0.141                | 20.38             | 21.00                    | 1.153          | 0.163                  | /         |
|                              | Level4          |      | Back Side   | 15         | 18900 | 1880        | 1        | Low      | -0.11            | 0.220                | 20.50             | 21.00                    | 1.122          | 0.247                  | /         |
|                              | Level4          |      |             | 15         | 18700 | 1860        | 50       | Low      | 0.01             | 0.155                | 20.38             | 21.00                    | 1.153          | 0.179                  | /         |
| Down                         | Off             | QPSK | Front Side  | 15         | 18900 | 1880        | 1        | Low      | -0.15            | 0.194                | 23.34             | 24.00                    | 1.164          | 0.226                  | /         |
|                              | Off             |      |             | 15         | 18900 | 1880        | 50       | Low      | 0.01             | 0.143                | 22.18             | 23.00                    | 1.208          | 0.173                  | /         |
|                              | Off             |      | Back Side   | 15         | 18900 | 1880        | 1        | Low      | 0.16             | 0.331                | 23.34             | 24.00                    | 1.164          | 0.385                  | 18#       |
|                              | Off             |      |             | 15         | 18900 | 1880        | 50       | Low      | -0.07            | 0.264                | 22.18             | 23.00                    | 1.208          | 0.319                  | /         |
| Hotspot (10mm)               |                 |      |             |            |       |             |          |          |                  |                      |                   |                          |                |                        |           |
| Up                           | Level4          | QPSK | Front Side  | 10         | 18900 | 1880        | 1        | Low      | 0.03             | 0.350                | 20.50             | 21.00                    | 1.122          | 0.392                  | /         |
|                              | Level4          |      |             | 10         | 18700 | 1860        | 50       | Low      | 0.14             | 0.280                | 20.38             | 21.00                    | 1.153          | 0.322                  | /         |
|                              | Level4          |      | Back Side   | 10         | 18900 | 1880        | 1        | Low      | -0.03            | 0.388                | 20.50             | 21.00                    | 1.122          | 0.435                  | /         |
|                              | Level4          |      |             | 10         | 18700 | 1860        | 50       | Low      | 0.16             | 0.308                | 20.38             | 21.00                    | 1.153          | 0.355                  | /         |
|                              | Level4          |      | Left Edge   | 10         | 18900 | 1880        | 1        | Low      | -0.12            | 0.046                | 20.50             | 21.00                    | 1.122          | 0.051                  | /         |
|                              | Level4          |      |             | 10         | 18700 | 1860        | 50       | Low      | 0.08             | 0.036                | 20.38             | 21.00                    | 1.153          | 0.041                  | /         |
|                              | Level4          |      | Right Edge  | 10         | 18900 | 1880        | 1        | Low      | 0.13             | 0.093                | 20.50             | 21.00                    | 1.122          | 0.104                  | /         |
|                              | Level4          |      |             | 10         | 18700 | 1860        | 50       | Low      | -0.12            | 0.073                | 20.38             | 21.00                    | 1.153          | 0.084                  | /         |
|                              | Level4          |      | Top Edge    | 10         | 18900 | 1880        | 1        | Low      | 0.00             | 0.575                | 20.50             | 21.00                    | 1.122          | 0.645                  | /         |
|                              | Level4          |      |             | 10         | 18700 | 1860        | 50       | Low      | -0.18            | 0.437                | 20.38             | 21.00                    | 1.153          | 0.504                  | /         |
| Down                         | Off             | QPSK | Front Side  | 10         | 18900 | 1880        | 1        | Low      | 0.07             | 0.226                | 23.34             | 24.00                    | 1.164          | 0.263                  | /         |
|                              | Off             |      |             | 10         | 18900 | 1880        | 50       | Low      | 0.01             | 0.165                | 22.18             | 23.00                    | 1.208          | 0.199                  | /         |
|                              | Off             |      | Back Side   | 10         | 18900 | 1880        | 1        | Low      | 0.00             | 0.555                | 23.34             | 24.00                    | 1.164          | 0.646                  | 19#       |
|                              | Off             |      |             | 10         | 18900 | 1880        | 50       | Low      | -0.15            | 0.411                | 22.18             | 23.00                    | 1.208          | 0.496                  | /         |
|                              | Off             |      | Left Edge   | 10         | 18900 | 1880        | 1        | Low      | -0.11            | 0.113                | 23.34             | 24.00                    | 1.164          | 0.132                  | /         |
|                              | Off             |      |             | 10         | 18900 | 1880        | 50       | Low      | 0.13             | 0.104                | 22.18             | 23.00                    | 1.208          | 0.126                  | /         |
|                              | Off             |      | Right Edge  | 10         | 18900 | 1880        | 1        | Low      | 0.02             | 0.058                | 23.34             | 24.00                    | 1.164          | 0.068                  | /         |
|                              | Off             |      |             | 10         | 18900 | 1880        | 50       | Low      | -0.13            | 0.045                | 22.18             | 23.00                    | 1.208          | 0.054                  | /         |
|                              | Off             |      | Top Edge    | 10         | 18900 | 1880        | 1        | Low      | 0.15             | 0.514                | 23.34             | 24.00                    | 1.164          | 0.598                  | /         |
|                              | Off             |      |             | 10         | 18900 | 1880        | 50       | Low      | -0.03            | 0.439                | 22.18             | 23.00                    | 1.208          | 0.530                  | /         |
| Antenna                      | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Numb. | RB Start | Power Drift (dB) | Meas. SAR10 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 10 g Scaled SAR (W/Kg) | Meas. No. |
| ProductSpecific10g SAR (0mm) |                 |      |             |            |       |             |          |          |                  |                      |                   |                          |                |                        |           |
| Up                           | Level4          | QPSK | Front Side  | 0          | 18900 | 1880        | 1        | Low      | 0.05             | 1.070                | 20.50             | 21.00                    | 1.122          | 1.201                  | /         |
|                              | Level4          |      |             | 0          | 18700 | 1860        | 50       | Low      | 0.15             | 0.877                | 20.38             | 21.00                    | 1.153          | 1.012                  | /         |
|                              | Level4          |      | Back Side   | 0          | 18900 | 1880        | 1        | Low      | -0.17            | 1.260                | 20.50             | 21.00                    | 1.122          | 1.414                  | /         |
|                              | Level4          |      |             | 0          | 18700 | 1860        | 50       | Low      | 0.03             | 1.040                | 20.38             | 21.00                    | 1.153          | 1.200                  | /         |
|                              | Level4          |      | Left Edge   | 0          | 18900 | 1880        | 1        | Low      | 0.09             | 0.074                | 20.50             | 21.00                    | 1.122          | 0.083                  | /         |



|  |        |  |            |   |       |      |    |     |       |       |       |       |       |              |     |
|--|--------|--|------------|---|-------|------|----|-----|-------|-------|-------|-------|-------|--------------|-----|
|  | Level4 |  |            | 0 | 18700 | 1860 | 50 | Low | -0.01 | 0.062 | 20.38 | 21.00 | 1.153 | 0.072        | /   |
|  | Level4 |  |            | 0 | 18900 | 1880 | 1  | Low | 0.18  | 0.233 | 20.50 | 21.00 | 1.122 | 0.261        | /   |
|  | Level4 |  | Right Edge | 0 | 18700 | 1860 | 50 | Low | 0.18  | 0.186 | 20.38 | 21.00 | 1.153 | 0.215        | /   |
|  | Level4 |  | Bottom Edg | 0 | 18900 | 1880 | 1  | Low | 0.16  | 1.480 | 20.50 | 21.00 | 1.122 | <b>1.661</b> | 20# |
|  | Level4 |  | e          | 0 | 18700 | 1860 | 50 | Low | -0.15 | 1.180 | 20.38 | 21.00 | 1.153 | 1.361        | /   |

Note: Refer to 0 for the detailed test data for each test configuration.

## 10.7LTE Band 4 (20MHz Bandwidth)

| Antenna | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Num b. | RB Start | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|---------|-----------------|------|-------------|------------|-------|-------------|-----------|----------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head    |                 |      |             |            |       |             |           |          |                  |                     |                   |                          |                |                       |           |
| Up      | level1          | QPSK | Left Cheek  | 0          | 20175 | 1732.5      | 1         | High     | -0.14            | 0.726               | 18.61             | 19.50                    | 1.227          | 0.891                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 1         | Low      | -0.18            | 0.644               | 18.41             | 19.50                    | 1.285          | 0.828                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 1         | Low      | -0.07            | 0.822               | 18.50             | 19.50                    | 1.259          | 1.034                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 50        | Low      | 0.10             | 0.728               | 18.53             | 19.50                    | 1.250          | 0.910                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 50        | Low      | 0.20             | 0.670               | 18.44             | 19.50                    | 1.276          | 0.855                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 50        | Low      | -0.01            | 0.726               | 18.51             | 19.50                    | 1.256          | 0.912                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 100       | Low      | -0.03            | 0.542               | 18.72             | 19.50                    | 1.197          | 0.649                 | /         |
|         | level1          |      | Left Tilt   | 0          | 20175 | 1732.5      | 1         | High     | 0.00             | 0.802               | 18.61             | 19.50                    | 1.227          | 0.984                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 1         | Low      | -0.04            | 0.716               | 18.41             | 19.50                    | 1.285          | 0.920                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 1         | Low      | 0.02             | 0.892               | 18.50             | 19.50                    | 1.259          | 1.123                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 50        | Low      | 0.10             | 0.810               | 18.53             | 19.50                    | 1.250          | 1.013                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 50        | Low      | -0.11            | 0.732               | 18.44             | 19.50                    | 1.276          | 0.934                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 50        | Low      | -0.14            | 0.798               | 18.51             | 19.50                    | 1.256          | 1.002                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 100       | Low      | 0.15             | 0.587               | 18.72             | 19.50                    | 1.197          | 0.702                 | /         |
|         | level1          |      | Right Cheek | 0          | 20175 | 1732.5      | 1         | High     | -0.05            | 0.765               | 18.61             | 19.50                    | 1.227          | 0.939                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 1         | Low      | 0.16             | 0.682               | 18.41             | 19.50                    | 1.285          | 0.877                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 1         | Low      | 0.06             | 0.792               | 18.50             | 19.50                    | 1.259          | 0.997                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 50        | Low      | -0.07            | 0.750               | 18.53             | 19.50                    | 1.250          | 0.938                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 50        | Low      | 0.01             | 0.711               | 18.44             | 19.50                    | 1.276          | 0.908                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 50        | Low      | 0.09             | 0.806               | 18.51             | 19.50                    | 1.256          | 1.012                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 100       | Low      | 0.19             | 0.554               | 18.72             | 19.50                    | 1.197          | 0.663                 | /         |
|         | level1          |      | Right Tilt  | 0          | 20175 | 1732.5      | 1         | High     | -0.04            | 0.875               | 18.61             | 19.50                    | 1.227          | 1.074                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 1         | Low      | -0.15            | 0.783               | 18.41             | 19.50                    | 1.285          | 1.006                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 1         | Low      | 0.10             | 0.886               | 18.50             | 19.50                    | 1.259          | 1.115                 | /         |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 50        | Low      | -0.09            | 0.877               | 18.53             | 19.50                    | 1.250          | 1.096                 | /         |
|         | level1          |      |             | 0          | 20050 | 1720        | 50        | Low      | -0.19            | 0.807               | 18.44             | 19.50                    | 1.276          | 1.030                 | /         |
|         | level1          |      |             | 0          | 20300 | 1745        | 50        | Low      | 0.10             | 0.906               | 18.51             | 19.50                    | 1.256          | <b>1.138</b>          | 21#       |
|         | level1          |      |             | 0          | 20175 | 1732.5      | 100       | Low      | 0.10             | 0.646               | 18.72             | 19.50                    | 1.197          | 0.773                 | /         |
| Up      | level2          | QPSK | Left Cheek  | 0          | 20175 | 1745        | 1         | High     | -0.11            | 0.501               | 17.30             | 18.00                    | 1.175          | 0.589                 | /         |
|         | level2          |      |             | 0          | 20300 | 1732.5      | 50        | Low      | 0.02             | 0.495               | 17.23             | 18.00                    | 1.194          | 0.591                 | /         |
|         | level2          |      | Left Tilt   | 0          | 20175 | 1745        | 1         | High     | 0.19             | 0.607               | 17.30             | 18.00                    | 1.175          | 0.713                 | /         |
|         | level2          |      |             | 0          | 20300 | 1732.5      | 50        | Low      | -0.18            | 0.584               | 17.23             | 18.00                    | 1.194          | 0.697                 | /         |

|                            |        |      |             |    |       |        |    |      |       |       |       |       |       |       |     |
|----------------------------|--------|------|-------------|----|-------|--------|----|------|-------|-------|-------|-------|-------|-------|-----|
|                            | level2 |      | Right Cheek | 0  | 20175 | 1745   | 1  | High | 0.04  | 0.577 | 17.30 | 18.00 | 1.175 | 0.678 | /   |
|                            | level2 |      |             | 0  | 20300 | 1732.5 | 50 | Low  | -0.09 | 0.516 | 17.23 | 18.00 | 1.194 | 0.616 | /   |
|                            | level2 |      | Right Tilt  | 0  | 20175 | 1745   | 1  | High | -0.17 | 0.619 | 17.30 | 18.00 | 1.175 | 0.727 | /   |
|                            | level2 |      |             | 0  | 20300 | 1732.5 | 50 | Low  | 0.14  | 0.604 | 17.23 | 18.00 | 1.194 | 0.721 | /   |
| Up                         | level3 | QPSK | Left Cheek  | 0  | 20175 | 1732.5 | 1  | High | 0.02  | 0.424 | 16.28 | 17.00 | 1.180 | 0.500 | /   |
|                            | level3 |      |             | 0  | 20050 | 1720   | 50 | Low  | 0.11  | 0.390 | 16.24 | 17.00 | 1.191 | 0.465 | /   |
|                            | level3 |      | Left Tilt   | 0  | 20175 | 1732.5 | 1  | High | 0.15  | 0.434 | 16.28 | 17.00 | 1.180 | 0.512 | /   |
|                            | level3 |      |             | 0  | 20050 | 1720   | 50 | Low  | 0.18  | 0.431 | 16.24 | 17.00 | 1.191 | 0.513 | /   |
|                            | level3 |      | Right Cheek | 0  | 20175 | 1732.5 | 1  | High | 0.06  | 0.428 | 16.28 | 17.00 | 1.180 | 0.505 | /   |
|                            | level3 |      |             | 0  | 20050 | 1720   | 50 | Low  | 0.19  | 0.410 | 16.24 | 17.00 | 1.191 | 0.488 | /   |
|                            | level3 |      | Right Tilt  | 0  | 20175 | 1732.5 | 1  | High | -0.17 | 0.499 | 16.28 | 17.00 | 1.180 | 0.589 | /   |
|                            | level3 |      |             | 0  | 20050 | 1720   | 50 | Low  | -0.20 | 0.457 | 16.24 | 17.00 | 1.191 | 0.544 | /   |
| Down                       | Off    | QPSK | Left Cheek  | 0  | 20300 | 1745   | 1  | Low  | 0.10  | 0.082 | 23.37 | 24.00 | 1.156 | 0.095 | /   |
|                            | Off    |      |             | 0  | 20175 | 1732.5 | 50 | Low  | -0.09 | 0.076 | 22.42 | 23.00 | 1.143 | 0.087 | /   |
|                            | Off    |      | Left Tilt   | 0  | 20300 | 1745   | 1  | Low  | 0.06  | 0.100 | 23.37 | 24.00 | 1.156 | 0.116 | /   |
|                            | Off    |      |             | 0  | 20175 | 1732.5 | 50 | Low  | -0.02 | 0.096 | 22.42 | 23.00 | 1.143 | 0.110 | /   |
|                            | Off    |      | Right Cheek | 0  | 20300 | 1745   | 1  | Low  | -0.11 | 0.132 | 23.37 | 24.00 | 1.156 | 0.153 | /   |
|                            | Off    |      |             | 0  | 20175 | 1732.5 | 50 | Low  | -0.08 | 0.136 | 22.42 | 23.00 | 1.143 | 0.155 | /   |
|                            | Off    |      | Right Tilt  | 0  | 20300 | 1745   | 1  | Low  | 0.00  | 0.102 | 23.37 | 24.00 | 1.156 | 0.118 | /   |
|                            | Off    |      |             | 0  | 20175 | 1732.5 | 50 | Low  | -0.18 | 0.094 | 22.42 | 23.00 | 1.143 | 0.107 | /   |
| Body-worn Accessory (15mm) |        |      |             |    |       |        |    |      |       |       |       |       |       |       |     |
| Up                         | Off    | QPSK | Front Side  | 15 | 20300 | 1745   | 1  | Low  | -0.13 | 0.312 | 23.37 | 24.00 | 1.156 | 0.361 | /   |
|                            | Off    |      |             | 15 | 20175 | 1732.5 | 50 | Low  | 0.17  | 0.238 | 22.42 | 23.00 | 1.143 | 0.272 | /   |
|                            | Off    |      | Back Side   | 15 | 20300 | 1745   | 1  | Low  | 0.18  | 0.345 | 23.37 | 24.00 | 1.156 | 0.399 | 22# |
|                            | Off    |      |             | 15 | 20175 | 1732.5 | 50 | Low  | 0.17  | 0.265 | 22.42 | 23.00 | 1.143 | 0.303 | /   |
| Down                       | Off    | QPSK | Front Side  | 15 | 20300 | 1745   | 1  | Low  | 0.14  | 0.131 | 23.37 | 24.00 | 1.156 | 0.151 | /   |
|                            | Off    |      |             | 15 | 20175 | 1732.5 | 50 | Low  | 0.17  | 0.099 | 22.42 | 23.00 | 1.143 | 0.113 | /   |
|                            | Off    |      | Back Side   | 15 | 20300 | 1745   | 1  | Low  | 0.09  | 0.262 | 23.37 | 24.00 | 1.156 | 0.303 | /   |
|                            | Off    |      |             | 15 | 20175 | 1732.5 | 50 | Low  | 0.16  | 0.196 | 22.42 | 23.00 | 1.143 | 0.224 | /   |
| Hotspot (10mm)             |        |      |             |    |       |        |    |      |       |       |       |       |       |       |     |
| Up                         | Off    | QPSK | Front Side  | 10 | 20300 | 1745   | 1  | Low  | -0.11 | 0.630 | 23.37 | 24.00 | 1.156 | 0.728 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | -0.08 | 0.481 | 22.42 | 23.00 | 1.143 | 0.550 | /   |
|                            | Off    |      | Back Side   | 10 | 20300 | 1745   | 1  | Low  | 0.03  | 0.573 | 23.37 | 24.00 | 1.156 | 0.662 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.05  | 0.437 | 22.42 | 23.00 | 1.143 | 0.499 | /   |
|                            | Off    |      | Left Edge   | 10 | 20300 | 1745   | 1  | Low  | -0.15 | 0.099 | 23.37 | 24.00 | 1.156 | 0.115 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.10  | 0.068 | 22.42 | 23.00 | 1.143 | 0.077 | /   |
|                            | Off    |      | Right Edge  | 10 | 20300 | 1745   | 1  | Low  | 0.13  | 0.172 | 23.37 | 24.00 | 1.156 | 0.199 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.13  | 0.129 | 22.42 | 23.00 | 1.143 | 0.147 | /   |
|                            | Off    |      | Top Edge    | 10 | 20300 | 1745   | 1  | Low  | -0.16 | 0.668 | 23.37 | 24.00 | 1.156 | 0.772 | 23# |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.11  | 0.572 | 22.42 | 23.00 | 1.143 | 0.654 | /   |
| Down                       | Off    | QPSK | Front Side  | 10 | 20300 | 1745   | 1  | Low  | 0.10  | 0.253 | 23.37 | 24.00 | 1.156 | 0.292 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.14  | 0.204 | 22.42 | 23.00 | 1.143 | 0.233 | /   |
|                            | Off    |      | Back Side   | 10 | 20300 | 1745   | 1  | Low  | 0.09  | 0.499 | 23.37 | 24.00 | 1.156 | 0.577 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | -0.06 | 0.379 | 22.42 | 23.00 | 1.143 | 0.433 | /   |
|                            | Off    |      | Left Edge   | 10 | 20300 | 1745   | 1  | Low  | 0.20  | 0.156 | 23.37 | 24.00 | 1.156 | 0.180 | /   |
|                            | Off    |      |             | 10 | 20175 | 1732.5 | 50 | Low  | 0.09  | 0.118 | 22.42 | 23.00 | 1.143 | 0.135 | /   |

|  |     |  |            |    |       |        |    |     |       |       |       |       |       |       |   |
|--|-----|--|------------|----|-------|--------|----|-----|-------|-------|-------|-------|-------|-------|---|
|  | Off |  | Right Edge | 10 | 20300 | 1745   | 1  | Low | 0.09  | 0.106 | 23.37 | 24.00 | 1.156 | 0.123 | / |
|  | Off |  | Right Edge | 10 | 20175 | 1732.5 | 50 | Low | 0.10  | 0.081 | 22.42 | 23.00 | 1.143 | 0.093 | / |
|  | Off |  | Bottom Edg | 10 | 20300 | 1745   | 1  | Low | -0.07 | 0.583 | 23.37 | 24.00 | 1.156 | 0.674 | / |
|  | Off |  | e          | 10 | 20175 | 1732.5 | 50 | Low | 0.01  | 0.442 | 22.42 | 23.00 | 1.143 | 0.505 | / |

Note: Refer to 0 for the detailed test data for each test configuration.

## 10.8LTE Band 5 (10MHz Bandwidth)

| Antenna                    | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Number | RB Start | Power Drift (dB) | Meas. SAR 1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|----------------------------|-----------------|------|-------------|------------|-------|-------------|-----------|----------|------------------|----------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head                       |                 |      |             |            |       |             |           |          |                  |                      |                   |                          |                |                       |           |
| Up                         | Off             | QPSK | Left Cheek  | 0          | 20600 | 844         | 1         | Low      | 0.08             | 0.368                | 23.31             | 24.00                    | 1.172          | 0.431                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | 0.01             | 0.251                | 22.30             | 23.00                    | 1.175          | 0.295                 | /         |
|                            | Off             |      | Left Tilt   | 0          | 20600 | 844         | 1         | Low      | 0.02             | 0.300                | 23.31             | 24.00                    | 1.172          | 0.352                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | 0.00             | 0.215                | 22.30             | 23.00                    | 1.175          | 0.253                 | /         |
|                            | Off             |      | Right Cheek | 0          | 20600 | 844         | 1         | Low      | 0.04             | 0.410                | 23.31             | 24.00                    | 1.172          | 0.481                 | 24#       |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | 0.00             | 0.330                | 22.30             | 23.00                    | 1.175          | 0.388                 | /         |
|                            | Off             |      | Right Tilt  | 0          | 20600 | 844         | 1         | Low      | -0.05            | 0.373                | 23.31             | 24.00                    | 1.172          | 0.437                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | -0.03            | 0.304                | 22.30             | 23.00                    | 1.175          | 0.357                 | /         |
| Down                       | Off             | QPSK | Left Cheek  | 0          | 20600 | 844         | 1         | Low      | -0.14            | 0.190                | 23.31             | 24.00                    | 1.172          | 0.223                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | -0.16            | 0.150                | 22.30             | 23.00                    | 1.175          | 0.176                 | /         |
|                            | Off             |      | Left Tilt   | 0          | 20600 | 844         | 1         | Low      | 0.02             | 0.083                | 23.31             | 24.00                    | 1.172          | 0.097                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | 0.17             | 0.066                | 22.30             | 23.00                    | 1.175          | 0.077                 | /         |
|                            | Off             |      | Right Cheek | 0          | 20600 | 844         | 1         | Low      | 0.01             | 0.157                | 23.31             | 24.00                    | 1.172          | 0.184                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | -0.12            | 0.122                | 22.30             | 23.00                    | 1.175          | 0.143                 | /         |
|                            | Off             |      | Right Tilt  | 0          | 20600 | 844         | 1         | Low      | 0.00             | 0.075                | 23.31             | 24.00                    | 1.172          | 0.088                 | /         |
|                            | Off             |      |             | 0          | 20600 | 844         | 25        | Low      | 0.13             | 0.059                | 22.30             | 23.00                    | 1.175          | 0.069                 | /         |
| Body-worn Accessory (15mm) |                 |      |             |            |       |             |           |          |                  |                      |                   |                          |                |                       |           |
| Up                         | Off             | QPSK | Front Side  | 15         | 20600 | 844         | 1         | Low      | 0.04             | 0.041                | 23.31             | 24.00                    | 1.172          | 0.048                 | /         |
|                            | Off             |      |             | 15         | 20600 | 844         | 25        | Low      | 0.08             | 0.033                | 22.30             | 23.00                    | 1.175          | 0.039                 | /         |
|                            | Off             |      | Back Side   | 15         | 20600 | 844         | 1         | Low      | 0.00             | 0.059                | 23.31             | 24.00                    | 1.172          | 0.069                 | /         |
|                            | Off             |      |             | 15         | 20600 | 844         | 25        | Low      | 0.01             | 0.049                | 22.30             | 23.00                    | 1.175          | 0.057                 | /         |
| Down                       | Off             | QPSK | Front Side  | 15         | 20600 | 844         | 1         | Low      | -0.08            | 0.160                | 23.31             | 24.00                    | 1.172          | 0.188                 | /         |
|                            | Off             |      |             | 15         | 20600 | 844         | 25        | Low      | 0.02             | 0.128                | 22.30             | 23.00                    | 1.175          | 0.150                 | /         |
|                            | Off             |      | Back Side   | 15         | 20600 | 844         | 1         | Low      | 0.02             | 0.188                | 23.31             | 24.00                    | 1.172          | 0.220                 | 25#       |
|                            | Off             |      |             | 15         | 20600 | 844         | 25        | Low      | 0.00             | 0.151                | 22.30             | 23.00                    | 1.175          | 0.177                 | /         |
| Hotspot (10mm)             |                 |      |             |            |       |             |           |          |                  |                      |                   |                          |                |                       |           |
| Up                         | Off             | QPSK | Front Side  | 10         | 20600 | 844         | 1         | Low      | -0.02            | 0.071                | 23.31             | 24.00                    | 1.172          | 0.083                 | /         |
|                            | Off             |      |             | 10         | 20600 | 844         | 25        | Low      | 0.19             | 0.059                | 22.30             | 23.00                    | 1.175          | 0.069                 | /         |
|                            | Off             |      | Back Side   | 10         | 20600 | 844         | 1         | Low      | 0.10             | 0.105                | 23.31             | 24.00                    | 1.172          | 0.123                 | /         |
|                            | Off             |      |             | 10         | 20600 | 844         | 25        | Low      | 0.08             | 0.087                | 22.30             | 23.00                    | 1.175          | 0.103                 | /         |
|                            | Off             |      | Left Edge   | 10         | 20600 | 844         | 1         | Low      | -0.06            | 0.043                | 23.31             | 24.00                    | 1.172          | 0.050                 | /         |
|                            | Off             |      |             | 10         | 20600 | 844         | 25        | Low      | -0.16            | 0.038                | 22.30             | 23.00                    | 1.175          | 0.044                 | /         |
|                            | Off             |      | Right Edge  | 10         | 20600 | 844         | 1         | Low      | -0.01            | 0.028                | 23.31             | 24.00                    | 1.172          | 0.033                 | /         |
|                            | Off             |      |             | 10         | 20600 | 844         | 1         | Low      | -0.01            | 0.028                | 23.31             | 24.00                    | 1.172          | 0.033                 | /         |

|                                                                          |     |      |             |    |       |     |    |     |       |       |       |       |       |       |     |
|--------------------------------------------------------------------------|-----|------|-------------|----|-------|-----|----|-----|-------|-------|-------|-------|-------|-------|-----|
|                                                                          | Off |      | Top Edge    | 10 | 20600 | 844 | 25 | Low | 0.10  | 0.025 | 22.30 | 23.00 | 1.175 | 0.029 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 1  | Low | 0.06  | 0.069 | 23.31 | 24.00 | 1.172 | 0.081 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | 0.08  | 0.058 | 22.30 | 23.00 | 1.175 | 0.068 | /   |
| Down                                                                     | Off | QPSK | Front Side  | 10 | 20600 | 844 | 1  | Low | 0.05  | 0.287 | 23.31 | 24.00 | 1.172 | 0.336 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | 0.04  | 0.234 | 22.30 | 23.00 | 1.175 | 0.275 | /   |
|                                                                          | Off |      | Back Side   | 10 | 20600 | 844 | 1  | Low | 0.02  | 0.263 | 23.31 | 24.00 | 1.172 | 0.308 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | 0.07  | 0.218 | 22.30 | 23.00 | 1.175 | 0.256 | /   |
|                                                                          | Off |      | Left Edge   | 10 | 20600 | 844 | 1  | Low | 0.03  | 0.110 | 23.31 | 24.00 | 1.172 | 0.129 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | -0.06 | 0.084 | 22.30 | 23.00 | 1.175 | 0.099 | /   |
|                                                                          | Off |      | Right Edge  | 10 | 20600 | 844 | 1  | Low | -0.01 | 0.235 | 23.31 | 24.00 | 1.172 | 0.275 | /   |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | 0.02  | 0.190 | 22.30 | 23.00 | 1.175 | 0.223 | /   |
|                                                                          | Off |      | Bottom Edge | 10 | 20600 | 844 | 1  | Low | 0.01  | 0.291 | 23.31 | 24.00 | 1.172 | 0.341 | 26# |
|                                                                          | Off |      |             | 10 | 20600 | 844 | 25 | Low | 0.01  | 0.239 | 22.30 | 23.00 | 1.175 | 0.281 | /   |
| Note: Refer to 0 for the detailed test data for each test configuration. |     |      |             |    |       |     |    |     |       |       |       |       |       |       |     |

## 10.9LTE Band 7 (20MHz Bandwidth)

| Antenna | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Num b. | RB Start | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|---------|-----------------|------|-------------|------------|-------|-------------|-----------|----------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head    |                 |      |             |            |       |             |           |          |                  |                     |                   |                          |                |                       |           |
| Up      | Level 1&2       | QPSK | Left Cheek  | 0          | 20850 | 2510        | 1         | Low      | 0.19             | 0.300               | 18.18             | 19.00                    | 1.208          | 0.362                 | /         |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 50        | Mid      | 0.12             | 0.284               | 18.22             | 19.00                    | 1.197          | 0.340                 | /         |
|         | Level 1&2       |      | Left Tilt   | 0          | 21100 | 2535        | 1         | Low      | 0.20             | 0.332               | 18.18             | 19.00                    | 1.208          | 0.401                 | /         |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 50        | Mid      | 0.16             | 0.299               | 18.22             | 19.00                    | 1.197          | 0.358                 | /         |
|         | Level 1&2       |      | Right Cheek | 0          | 20850 | 2510        | 1         | Low      | 0.07             | 0.938               | 18.18             | 19.00                    | 1.208          | 1.133                 | 27#       |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 1         | Low      | 0.16             | 0.907               | 18.14             | 19.00                    | 1.219          | 1.106                 | /         |
|         | Level 1&2       |      |             | 0          | 21350 | 2560        | 1         | Low      | 0.03             | 0.829               | 18.01             | 19.00                    | 1.256          | 1.041                 | /         |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 50        | Mid      | -0.14            | 0.867               | 18.22             | 19.00                    | 1.197          | 1.038                 | /         |
|         | Level 1&2       |      |             | 0          | 20850 | 2510        | 50        | Low      | 0.04             | 0.889               | 18.20             | 19.00                    | 1.202          | 1.069                 | /         |
|         | Level 1&2       |      |             | 0          | 21350 | 2560        | 50        | Low      | -0.17            | 0.802               | 18.03             | 19.00                    | 1.250          | 1.003                 | /         |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 100       | Low      | 0.05             | 0.659               | 18.17             | 19.00                    | 1.211          | 0.798                 | /         |
|         | Level 1&2       |      |             | 0          | 21100 | 2535        | 1         | Low      | -0.02            | 0.867               | 18.18             | 19.00                    | 1.208          | 1.047                 | /         |

|                            |           |      |             |    |       |      |     |     |       |       |       |       |       |              |     |
|----------------------------|-----------|------|-------------|----|-------|------|-----|-----|-------|-------|-------|-------|-------|--------------|-----|
|                            | Level 1&2 |      |             | 0  | 21100 | 2535 | 1   | Low | -0.03 | 0.832 | 18.14 | 19.00 | 1.219 | 1.014        | /   |
|                            | Level 1&2 |      |             | 0  | 21350 | 2560 | 1   | Low | -0.16 | 0.776 | 18.01 | 19.00 | 1.256 | 0.975        | /   |
|                            | Level 1&2 |      |             | 0  | 21100 | 2535 | 50  | Mid | 0.19  | 0.800 | 18.22 | 19.00 | 1.197 | 0.957        | /   |
|                            | Level 1&2 |      |             | 0  | 20850 | 2510 | 50  | Low | 0.20  | 0.824 | 18.20 | 19.00 | 1.202 | 0.991        | /   |
|                            | Level 1&2 |      |             | 0  | 21350 | 2560 | 50  | Low | 0.15  | 0.731 | 18.03 | 19.00 | 1.250 | 0.914        | /   |
|                            | Level 1&2 |      |             | 0  | 21100 | 2535 | 100 | Low | 0.04  | 0.621 | 18.17 | 19.00 | 1.211 | 0.752        | /   |
| Up                         | Level3    | QPSK | Left Cheek  | 0  | 21100 | 2535 | 1   | Low | 0.10  | 0.220 | 16.79 | 17.50 | 1.178 | 0.259        | /   |
|                            | Level3    |      |             | 0  | 21100 | 2535 | 50  | Low | -0.11 | 0.196 | 16.81 | 17.50 | 1.172 | 0.230        | /   |
|                            | Level3    |      | Left Tilt   | 0  | 21100 | 2535 | 1   | Low | 0.06  | 0.242 | 16.79 | 17.50 | 1.178 | 0.285        | /   |
|                            | Level3    |      |             | 0  | 21100 | 2535 | 50  | Mid | 0.04  | 0.208 | 16.81 | 17.50 | 1.172 | 0.244        | /   |
|                            | Level3    |      | Right Cheek | 0  | 21100 | 2535 | 1   | Low | -0.16 | 0.625 | 16.79 | 17.50 | 1.178 | 0.736        | /   |
|                            | Level3    |      |             | 0  | 21100 | 2535 | 50  | Low | 0.07  | 0.609 | 16.81 | 17.50 | 1.172 | 0.714        | /   |
|                            | Level3    |      | Right Tilt  | 0  | 21100 | 2535 | 1   | Low | 0.06  | 0.594 | 16.79 | 17.50 | 1.178 | 0.699        | /   |
|                            | Level3    |      |             | 0  | 21100 | 2535 | 50  | Mid | 0.10  | 0.588 | 16.81 | 17.50 | 1.172 | 0.689        | /   |
| Down                       | Off       | QPSK | Left Cheek  | 0  | 21100 | 2535 | 1   | Low | -0.07 | 0.062 | 22.80 | 23.50 | 1.175 | 0.073        | /   |
|                            | Off       |      |             | 0  | 21100 | 2535 | 50  | Mid | -0.13 | 0.066 | 21.83 | 22.50 | 1.167 | 0.077        | /   |
|                            | Off       |      | Left Tilt   | 0  | 21100 | 2535 | 1   | Low | -0.16 | 0.084 | 22.80 | 23.50 | 1.175 | 0.099        | /   |
|                            | Off       |      |             | 0  | 21100 | 2535 | 50  | Mid | -0.12 | 0.079 | 21.83 | 22.50 | 1.167 | 0.092        | /   |
|                            | Off       |      | Right Cheek | 0  | 21100 | 2535 | 1   | Low | 0.16  | 0.111 | 22.80 | 23.50 | 1.175 | 0.130        | /   |
|                            | Off       |      |             | 0  | 21100 | 2535 | 50  | Mid | 0.20  | 0.103 | 21.83 | 22.50 | 1.167 | 0.120        | /   |
|                            | Off       |      | Right Tilt  | 0  | 21100 | 2535 | 1   | Low | 0.11  | 0.062 | 22.80 | 23.50 | 1.175 | 0.073        | /   |
|                            | Off       |      |             | 0  | 21100 | 2535 | 50  | Mid | 0.20  | 0.060 | 21.83 | 22.50 | 1.167 | 0.070        | /   |
| Body-worn Accessory (15mm) |           |      |             |    |       |      |     |     |       |       |       |       |       |              |     |
| Up                         | Level4    | QPSK | Front Side  | 15 | 21100 | 2535 | 1   | Low | 0.04  | 0.138 | 19.71 | 20.50 | 1.199 | 0.166        | /   |
|                            | Level4    |      |             | 15 | 21100 | 2535 | 50  | Mid | -0.08 | 0.118 | 19.71 | 20.50 | 1.199 | 0.141        | /   |
|                            | Level4    |      | Back Side   | 15 | 21100 | 2535 | 1   | Low | -0.16 | 0.226 | 19.71 | 20.50 | 1.199 | <b>0.271</b> | 28# |
|                            | Level4    |      |             | 15 | 21100 | 2535 | 50  | Mid | 0.17  | 0.152 | 19.71 | 20.50 | 1.199 | 0.182        | /   |
| Down                       | Off       | QPSK | Front Side  | 15 | 21100 | 2535 | 1   | Low | 0.12  | 0.205 | 22.80 | 23.50 | 1.175 | 0.241        | /   |
|                            | Off       |      |             | 15 | 21100 | 2535 | 50  | Mid | 0.19  | 0.154 | 21.83 | 22.50 | 1.167 | 0.180        | /   |
|                            | Off       |      | Back Side   | 15 | 21100 | 2535 | 1   | Low | 0.08  | 0.194 | 22.80 | 23.50 | 1.175 | 0.228        | /   |
|                            | Off       |      |             | 15 | 21100 | 2535 | 50  | Mid | -0.20 | 0.163 | 21.83 | 22.50 | 1.167 | 0.190        | /   |
| Hotspot (10mm)             |           |      |             |    |       |      |     |     |       |       |       |       |       |              |     |
| Up                         | Level4    | QPSK | Front Side  | 10 | 21100 | 2535 | 1   | Low | -0.13 | 0.256 | 19.71 | 20.50 | 1.199 | 0.307        | /   |
|                            | Level4    |      |             | 10 | 21100 | 2535 | 50  | Mid | 0.18  | 0.204 | 19.71 | 20.50 | 1.199 | 0.245        | /   |
|                            | Level4    |      | Back Side   | 10 | 21100 | 2535 | 1   | Low | -0.14 | 0.504 | 19.71 | 20.50 | 1.199 | <b>0.605</b> | 29# |
|                            | Level4    |      |             | 10 | 21100 | 2535 | 50  | Mid | -0.06 | 0.472 | 19.71 | 20.50 | 1.199 | 0.566        | /   |
|                            | Level4    |      | Left Edge   | 10 | 21100 | 2535 | 1   | Low | 0.20  | 0.016 | 19.71 | 20.50 | 1.199 | 0.019        | /   |
|                            | Level4    |      |             | 10 | 21100 | 2535 | 50  | Mid | 0.16  | 0.012 | 19.71 | 20.50 | 1.199 | 0.014        | /   |
|                            | Level4    |      | Right Edge  | 10 | 21100 | 2535 | 1   | Low | -0.13 | 0.301 | 19.71 | 20.50 | 1.199 | 0.361        | /   |
|                            | Level4    |      |             | 10 | 21100 | 2535 | 50  | Mid | -0.03 | 0.216 | 19.71 | 20.50 | 1.199 | 0.259        | /   |

|                                                                                | Level4          |      | Top Edge    | 10         | 21100 | 2535        | 1         | Low      | -0.14            | 0.491                | 19.71             | 20.50                    | 1.199          | 0.589                  | /         |
|--------------------------------------------------------------------------------|-----------------|------|-------------|------------|-------|-------------|-----------|----------|------------------|----------------------|-------------------|--------------------------|----------------|------------------------|-----------|
|                                                                                | Level4          |      |             | 10         | 21100 | 2535        | 50        | Mid      | -0.15            | 0.418                | 19.71             | 20.50                    | 1.199          | 0.501                  | /         |
| Down                                                                           | Off             | QPSK | Front Side  | 10         | 21100 | 2535        | 1         | Low      | -0.02            | 0.326                | 22.80             | 23.50                    | 1.175          | 0.383                  | /         |
|                                                                                | Off             |      |             | 10         | 21100 | 2535        | 50        | Mid      | 0.08             | 0.259                | 21.83             | 22.50                    | 1.167          | 0.302                  | /         |
|                                                                                | Off             |      | Back Side   | 10         | 21100 | 2535        | 1         | Low      | -0.15            | 0.372                | 22.80             | 23.50                    | 1.175          | 0.437                  | /         |
|                                                                                | Off             |      |             | 10         | 21100 | 2535        | 50        | Mid      | -0.11            | 0.292                | 21.83             | 22.50                    | 1.167          | 0.341                  | /         |
|                                                                                | Off             |      | Left Edge   | 10         | 21100 | 2535        | 1         | Low      | -0.10            | 0.257                | 22.80             | 23.50                    | 1.175          | 0.302                  | /         |
|                                                                                | Off             |      |             | 10         | 21100 | 2535        | 50        | Mid      | -0.15            | 0.256                | 21.83             | 22.50                    | 1.167          | 0.299                  | /         |
|                                                                                | Off             |      | Right Edge  | 10         | 21100 | 2535        | 1         | Low      | 0.02             | 0.068                | 22.80             | 23.50                    | 1.175          | 0.080                  | /         |
|                                                                                | Off             |      |             | 10         | 21100 | 2535        | 50        | Mid      | -0.15            | 0.060                | 21.83             | 22.50                    | 1.167          | 0.070                  | /         |
|                                                                                | Off             |      | Bottom Edge | 10         | 21100 | 2535        | 1         | Low      | 0.17             | 0.211                | 22.80             | 23.50                    | 1.175          | 0.248                  | /         |
|                                                                                | Off             |      |             | 10         | 21100 | 2535        | 50        | Mid      | -0.17            | 0.164                | 21.83             | 22.50                    | 1.167          | 0.191                  | /         |
| Antenna                                                                        | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Number | RB Start | Power Drift (dB) | Meas. SAR10 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 10 g Scaled SAR (W/Kg) | Meas. No. |
| Product Specific 10g SAR (0mm)                                                 |                 |      |             |            |       |             |           |          |                  |                      |                   |                          |                |                        |           |
| Up                                                                             | Level4          | QPSK | Front Side  | 0          | 21100 | 2535        | 1         | Low      | -0.18            | 1.010                | 19.71             | 20.50                    | 1.199          | 1.211                  | /         |
|                                                                                | Level4          |      |             | 0          | 21100 | 2535        | 50        | Mid      | 0.18             | 0.948                | 19.71             | 20.50                    | 1.199          | 1.137                  | /         |
|                                                                                | Level4          |      | Back Side   | 0          | 21100 | 2535        | 1         | Low      | 0.13             | 1.120                | 19.71             | 20.50                    | 1.199          | 1.343                  | 30#       |
|                                                                                | Level4          |      |             | 0          | 21100 | 2535        | 50        | Mid      | 0.11             | 1.070                | 19.71             | 20.50                    | 1.199          | 1.283                  | /         |
|                                                                                | Level4          |      | Left Edge   | 0          | 21100 | 2535        | 1         | Low      | 0.10             | 0.216                | 19.71             | 20.50                    | 1.199          | 0.259                  | /         |
|                                                                                | Level4          |      |             | 0          | 21100 | 2535        | 50        | Mid      | -0.14            | 0.213                | 19.71             | 20.50                    | 1.199          | 0.255                  | /         |
|                                                                                | Level4          |      | Right Edge  | 0          | 21100 | 2535        | 1         | Low      | 0.07             | 0.724                | 19.71             | 20.50                    | 1.199          | 0.868                  | /         |
|                                                                                | Level4          |      |             | 0          | 21100 | 2535        | 50        | Mid      | 0.14             | 0.707                | 19.71             | 20.50                    | 1.199          | 0.848                  | /         |
|                                                                                | Level4          |      | Top Edge    | 0          | 21100 | 2535        | 1         | Low      | -0.14            | 1.040                | 19.71             | 20.50                    | 1.199          | 1.247                  | /         |
|                                                                                | Level4          |      |             | 0          | 21100 | 2535        | 50        | Mid      | -0.06            | 1.020                | 19.71             | 20.50                    | 1.199          | 1.223                  | /         |
| Note: Refer to ANNEX C for the detailed test data for each test configuration. |                 |      |             |            |       |             |           |          |                  |                      |                   |                          |                |                        |           |

## 10.10 LTE Band 41 (20MHz Bandwidth)

| Antenna | Power Reduction | Mode | Position    | Dist. (mm) | Ch.   | Freq. (MHz) | RB Number | RB Start | Power Drift (dB) | Meas. SAR1 g (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|---------|-----------------|------|-------------|------------|-------|-------------|-----------|----------|------------------|---------------------|-------------------|--------------------------|----------------|-----------------------|-----------|
| Head    |                 |      |             |            |       |             |           |          |                  |                     |                   |                          |                |                       |           |
| Up      | Level 1&2       | QPSK | Left Cheek  | 0          | 40620 | 2593        | 1         | Low      | 0.10             | 0.275               | 20.45             | 21.00                    | 1.135          | 0.312                 | /         |
|         | Level 1&2       |      |             | 0          | 40620 | 2593        | 50        | Low      | -0.19            | 0.246               | 20.39             | 21.00                    | 1.151          | 0.283                 | /         |
|         | Level 1&2       |      | Left Tilt   | 0          | 40620 | 2593        | 1         | Low      | 0.00             | 0.303               | 20.45             | 21.00                    | 1.135          | 0.344                 | /         |
|         | Level 1&2       |      |             | 0          | 40620 | 2593        | 50        | Low      | 0.07             | 0.249               | 20.39             | 21.00                    | 1.151          | 0.287                 | /         |
|         | Level 1&2       |      | Right Cheek | 0          | 40620 | 2593        | 1         | Low      | 0.12             | 0.733               | 20.45             | 21.00                    | 1.135          | 0.832                 | /         |

|                            |           |      |             |    |       |        |     |      |       |       |       |       |       |              |     |
|----------------------------|-----------|------|-------------|----|-------|--------|-----|------|-------|-------|-------|-------|-------|--------------|-----|
|                            | Level 1&2 |      |             | 0  | 39750 | 2506   | 1   | Mid  | -0.19 | 0.821 | 20.22 | 21.00 | 1.197 | 0.983        | /   |
|                            | Level 1&2 |      |             | 0  | 40185 | 2549.5 | 1   | Low  | 0.12  | 0.804 | 20.08 | 21.00 | 1.236 | <b>0.994</b> | 31# |
|                            | Level 1&2 |      |             | 0  | 41055 | 2536.5 | 1   | Low  | 0.15  | 0.669 | 20.25 | 21.00 | 1.189 | 0.795        | /   |
|                            | Level 1&2 |      |             | 0  | 41490 | 2680   | 1   | Low  | -0.04 | 0.545 | 20.41 | 21.00 | 1.146 | 0.624        | /   |
|                            | Level 1&2 |      |             | 0  | 40620 | 2593   | 50  | Low  | 0.09  | 0.714 | 20.39 | 21.00 | 1.151 | 0.822        | /   |
|                            | Level 1&2 |      |             | 0  | 39750 | 2506   | 50  | Low  | 0.06  | 0.810 | 20.31 | 21.00 | 1.172 | 0.950        | /   |
|                            | Level 1&2 |      | Right Tilt  | 0  | 40185 | 2549.5 | 50  | High | 0.12  | 0.811 | 20.30 | 21.00 | 1.175 | 0.953        | /   |
|                            | Level 1&2 |      |             | 0  | 41055 | 2536.5 | 50  | Low  | -0.17 | 0.649 | 20.35 | 21.00 | 1.161 | 0.754        | /   |
| Up                         | Level3    | QPSK | Left Cheek  | 0  | 41490 | 2680   | 50  | Mid  | 0.07  | 0.532 | 20.33 | 21.00 | 1.167 | 0.620        | /   |
|                            | Level3    |      |             | 0  | 40185 | 2549.5 | 100 | Low  | 0.04  | 0.548 | 20.39 | 21.00 | 1.151 | 0.631        | /   |
|                            | Level3    |      | Left Tilt   | 0  | 40620 | 2593   | 1   | Low  | -0.12 | 0.648 | 20.45 | 21.00 | 1.135 | 0.735        | /   |
|                            | Level3    |      |             | 0  | 40620 | 2593   | 50  | Low  | 0.15  | 0.622 | 20.39 | 21.00 | 1.151 | 0.716        | /   |
|                            | Level3    |      | Right Cheek | 0  | 40620 | 2593   | 1   | Low  | 0.06  | 0.225 | 19.56 | 20.00 | 1.107 | 0.249        | /   |
|                            | Level3    |      |             | 0  | 40620 | 2593   | 50  | Mid  | 0.02  | 0.202 | 19.47 | 20.00 | 1.130 | 0.228        | /   |
|                            | Level3    |      | Right Tilt  | 0  | 40620 | 2593   | 1   | Low  | 0.07  | 0.248 | 19.56 | 20.00 | 1.107 | 0.275        | /   |
|                            | Level3    |      |             | 0  | 40620 | 2593   | 50  | Low  | 0.17  | 0.204 | 19.47 | 20.00 | 1.130 | 0.231        | /   |
| Down                       | Off       | QPSK | Left Cheek  | 0  | 40620 | 2593   | 1   | Low  | 0.01  | 0.611 | 19.56 | 20.00 | 1.107 | 0.676        | /   |
|                            | Off       |      |             | 0  | 40620 | 2593   | 50  | Low  | -0.09 | 0.585 | 19.47 | 20.00 | 1.130 | 0.661        | /   |
|                            | Off       |      | Left Tilt   | 0  | 40620 | 2593   | 1   | Low  | 0.08  | 0.524 | 19.56 | 20.00 | 1.107 | 0.580        | /   |
|                            | Off       |      |             | 0  | 40620 | 2593   | 50  | Low  | -0.19 | 0.482 | 19.47 | 20.00 | 1.130 | 0.545        | /   |
|                            | Off       |      | Right Cheek | 0  | 40620 | 2593   | 1   | Low  | -0.02 | 0.072 | 23.33 | 24.00 | 1.167 | 0.084        | /   |
|                            | Off       |      |             | 0  | 40620 | 2593   | 50  | Low  | -0.08 | 0.068 | 22.21 | 23.00 | 1.199 | 0.082        | /   |
|                            | Off       |      | Right Tilt  | 0  | 40620 | 2593   | 1   | Low  | 0.14  | 0.058 | 23.33 | 24.00 | 1.167 | 0.068        | /   |
|                            | Off       |      |             | 0  | 40620 | 2593   | 50  | Low  | -0.07 | 0.052 | 22.21 | 23.00 | 1.199 | 0.062        | /   |
| Body-worn Accessory (15mm) |           |      |             |    |       |        |     |      |       |       |       |       |       |              |     |
| Up                         | Off       | QPSK | Front Side  | 15 | 40620 | 2593   | 1   | Low  | -0.10 | 0.182 | 23.33 | 24.00 | 1.167 | 0.212        | /   |
|                            | Off       |      |             | 15 | 40620 | 2593   | 50  | Low  | 0.05  | 0.142 | 22.21 | 23.00 | 1.199 | 0.170        | /   |
|                            | Off       |      | Back Side   | 15 | 40620 | 2593   | 1   | Low  | -0.18 | 0.286 | 23.33 | 24.00 | 1.167 | <b>0.334</b> | 32# |
|                            | Off       |      |             | 15 | 40620 | 2593   | 50  | Low  | -0.05 | 0.182 | 22.21 | 23.00 | 1.199 | 0.218        | /   |
| Down                       | Off       | QPSK | Front Side  | 15 | 40620 | 2593   | 1   | Low  | 0.00  | 0.110 | 23.33 | 24.00 | 1.167 | 0.128        | /   |
|                            | Off       |      |             | 15 | 40620 | 2593   | 50  | Low  | -0.04 | 0.084 | 22.21 | 23.00 | 1.199 | 0.100        | /   |
|                            | Off       |      | Back Side   | 15 | 40620 | 2593   | 1   | Low  | -0.20 | 0.188 | 23.33 | 24.00 | 1.167 | 0.219        | /   |
|                            | Off       |      |             | 15 | 40620 | 2593   | 50  | Low  | 0.18  | 0.120 | 22.21 | 23.00 | 1.199 | 0.144        | /   |
| Hotspot (10mm)             |           |      |             |    |       |        |     |      |       |       |       |       |       |              |     |
| Up                         | Off       | QPSK | Front Side  | 10 | 40620 | 2593   | 1   | Low  | -0.19 | 0.249 | 23.33 | 24.00 | 1.167 | 0.291        | /   |
|                            | Off       |      |             | 10 | 40620 | 2593   | 50  | Low  | 0.02  | 0.194 | 22.21 | 23.00 | 1.199 | 0.233        | /   |
|                            | Off       |      | Back Side   | 10 | 40620 | 2593   | 1   | Low  | -0.01 | 0.409 | 23.33 | 24.00 | 1.167 | <b>0.477</b> | 33# |
|                            | Off       |      |             | 10 | 40620 | 2593   | 50  | Low  | 0.08  | 0.318 | 22.21 | 23.00 | 1.199 | 0.381        | /   |

|      |     |      |             |    |       |      |    |     |       |       |       |       |       |       |   |
|------|-----|------|-------------|----|-------|------|----|-----|-------|-------|-------|-------|-------|-------|---|
| Down | Off | QPSK | Left Edge   | 10 | 40620 | 2593 | 1  | Low | 0.07  | 0.026 | 23.33 | 24.00 | 1.167 | 0.030 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | -0.01 | 0.021 | 22.21 | 23.00 | 1.199 | 0.025 | / |
|      | Off |      | Right Edge  | 10 | 40620 | 2593 | 1  | Low | -0.16 | 0.393 | 23.33 | 24.00 | 1.167 | 0.459 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | -0.08 | 0.304 | 22.21 | 23.00 | 1.199 | 0.365 | / |
|      | Off |      | Top Edge    | 10 | 40620 | 2593 | 1  | Low | 0.15  | 0.364 | 23.33 | 24.00 | 1.167 | 0.425 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | 0.04  | 0.290 | 22.21 | 23.00 | 1.199 | 0.348 | / |
|      | Off |      | Front Side  | 10 | 40620 | 2593 | 1  | Low | 0.17  | 0.211 | 23.33 | 24.00 | 1.167 | 0.246 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | 0.01  | 0.154 | 22.21 | 23.00 | 1.199 | 0.185 | / |
|      | Off |      | Back Side   | 10 | 40620 | 2593 | 1  | Low | -0.03 | 0.395 | 23.33 | 24.00 | 1.167 | 0.461 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | 0.08  | 0.218 | 22.21 | 23.00 | 1.199 | 0.261 | / |
|      | Off |      | Left Edge   | 10 | 40620 | 2593 | 1  | Low | 0.08  | 0.220 | 23.33 | 24.00 | 1.167 | 0.257 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | 0.00  | 0.175 | 22.21 | 23.00 | 1.199 | 0.210 | / |
|      | Off |      | Right Edge  | 10 | 40620 | 2593 | 1  | Low | 0.02  | 0.012 | 23.33 | 24.00 | 1.167 | 0.014 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | -0.09 | 0.011 | 22.21 | 23.00 | 1.199 | 0.013 | / |
|      | Off |      | Bottom Edge | 10 | 40620 | 2593 | 1  | Low | -0.03 | 0.152 | 23.33 | 24.00 | 1.167 | 0.177 | / |
|      | Off |      |             | 10 | 40620 | 2593 | 50 | Low | 0.13  | 0.128 | 22.21 | 23.00 | 1.199 | 0.154 | / |

Note: Refer to ANNEX C for the detailed test data for each test configuration.

## 10.11 WIFI 2.4GHz

| Mode                       | Power Reduction | Position    | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | 1 g Meas. SAR (W/Kg) | Meas. Power (dBm) | Max. 1tune-up Power (dBm) | Scaling Factor | Duty Cycle (%) | Duty Cycle Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|----------------------------|-----------------|-------------|------------|-----|-------------|------------------|----------------------|-------------------|---------------------------|----------------|----------------|-------------------|-----------------------|-----------|
| Head                       |                 |             |            |     |             |                  |                      |                   |                           |                |                |                   |                       |           |
| 802.11 b                   | Level1          | Left Cheek  | 0          | 6   | 2437        | 0.12             | 1.010                | 17.92             | 18.50                     | 1.143          | 98.08          | 1.02              | 1.177                 | 34#       |
|                            | Level1          |             | 0          | 1   | 2412        | 0.08             | 0.974                | 17.79             | 18.50                     | 1.178          | 98.08          | 1.02              | 1.169                 | /         |
|                            | Level1          |             | 0          | 11  | 2462        | 0.13             | 0.912                | 17.86             | 18.50                     | 1.159          | 98.08          | 1.02              | 1.077                 | /         |
|                            | Level1          | Left Tilt   | 0          | 6   | 2437        | 0.07             | 0.795                | 17.92             | 18.50                     | 1.143          | 98.08          | 1.02              | 0.926                 | /         |
|                            | Level1          |             | 0          | 1   | 2412        | 0.08             | 0.735                | 17.79             | 18.50                     | 1.178          | 98.08          | 1.02              | 0.882                 | /         |
|                            | Level1          |             | 0          | 11  | 2462        | 0.13             | 0.705                | 17.86             | 18.50                     | 1.159          | 98.08          | 1.02              | 0.833                 | /         |
|                            | Level1          | Right Cheek | 0          | 6   | 2437        | -0.14            | 0.331                | 17.92             | 18.50                     | 1.143          | 98.08          | 1.02              | 0.385                 | /         |
|                            | Level1          | Right Tilt  | 0          | 6   | 2437        | -0.08            | 0.331                | 17.92             | 18.50                     | 1.143          | 98.08          | 1.02              | 0.385                 | /         |
| 802.11 b                   | Level2          | Left Cheek  | 0          | 6   | 2437        | 0.00             | 0.745                | 16.73             | 17.50                     | 1.194          | 98.08          | 1.02              | 0.907                 | /         |
|                            | Level2          |             | 0          | 1   | 2412        | -0.12            | 0.657                | 16.41             | 17.50                     | 1.285          | 98.08          | 1.02              | 0.861                 | /         |
|                            | Level2          |             | 0          | 11  | 2462        | -0.13            | 0.597                | 16.34             | 17.50                     | 1.306          | 98.08          | 1.02              | 0.795                 | /         |
|                            | Level2          | Left Tilt   | 0          | 6   | 2437        | -0.01            | 0.631                | 16.73             | 17.50                     | 1.194          | 98.08          | 1.02              | 0.768                 | /         |
|                            | Level2          | Right Cheek | 0          | 6   | 2437        | -0.06            | 0.263                | 16.73             | 17.50                     | 1.194          | 98.08          | 1.02              | 0.320                 | /         |
|                            | Level2          | Right Tilt  | 0          | 6   | 2437        | 0.01             | 0.251                | 16.73             | 17.50                     | 1.194          | 98.08          | 1.02              | 0.306                 | /         |
| Body-worn Accessory (15mm) |                 |             |            |     |             |                  |                      |                   |                           |                |                |                   |                       |           |
| 802.11 b                   | Off             | Front Side  | 15         | 6   | 2437        | -0.06            | 0.085                | 18.82             | 19.50                     | 1.169          | 98.08          | 1.02              | 0.101                 | /         |
|                            | Off             | Back Side   | 15         | 6   | 2437        | -0.11            | 0.215                | 18.82             | 19.50                     | 1.169          | 98.08          | 1.02              | 0.256                 | 35#       |
| Hotspot (10mm)             |                 |             |            |     |             |                  |                      |                   |                           |                |                |                   |                       |           |
| 802.11 b                   | Off             | Front Side  | 10         | 6   | 2437        | 0.19             | 0.127                | 18.82             | 19.50                     | 1.169          | 98.08          | 1.02              | 0.151                 | /         |
|                            | Off             | Back Side   | 10         | 6   | 2437        | 0.05             | 0.386                | 18.82             | 19.50                     | 1.169          | 98.08          | 1.02              | 0.460                 | 36#       |
|                            | Off             | Left Edge   | 10         | 6   | 2437        | -0.17            | 0.197                | 18.82             | 19.50                     | 1.169          | 98.08          | 1.02              | 0.235                 | /         |





|                                                                          |     |          |    |   |      |      |       |       |       |       |       |      |       |   |
|--------------------------------------------------------------------------|-----|----------|----|---|------|------|-------|-------|-------|-------|-------|------|-------|---|
|                                                                          | Off | Top Edge | 10 | 6 | 2437 | 0.11 | 0.150 | 18.82 | 19.50 | 1.169 | 98.08 | 1.02 | 0.179 | / |
| Note: Refer to 0 for the detailed test data for each test configuration. |     |          |    |   |      |      |       |       |       |       |       |      |       |   |

## 10.12 5G WIFI

| Fre. Band                  | Power Reduction | Mode             | Position    | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | 1 g Meas. SAR (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | Duty Cycle (%) | Duty Cycle Factor | 1 g Scaled SAR (W/Kg) | Measurements No. |
|----------------------------|-----------------|------------------|-------------|------------|-----|-------------|------------------|----------------------|-------------------|--------------------------|----------------|----------------|-------------------|-----------------------|------------------|
| Head                       |                 |                  |             |            |     |             |                  |                      |                   |                          |                |                |                   |                       |                  |
| 5.2G                       | Off             | 802.11n (HT40)   | Left Cheek  | 0          | 46  | 5230        | 0.02             | 0.746                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.849                 | /                |
|                            | Off             |                  |             | 0          | 38  | 5190        | -0.08            | 0.474                | 15.63             | 16.00                    | 1.089          | 96.30          | 1.04              | 0.536                 | /                |
|                            | Off             |                  | Left Tilt   | 0          | 46  | 5230        | 0.05             | 1.020                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 1.161                 | 37#              |
|                            | Off             |                  |             | 0          | 38  | 5190        | 0.14             | 0.613                | 15.63             | 16.00                    | 1.089          | 96.30          | 1.04              | 0.693                 | /                |
|                            | Off             |                  | Right Cheek | 0          | 46  | 5230        | 0.08             | 0.662                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.754                 | /                |
|                            | Off             |                  | Right Tilt  | 0          | 46  | 5230        | 0.12             | 0.746                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.849                 | /                |
| 5.2G                       | Level2          | 802.11n (HT40)   | Left Cheek  | 0          | 46  | 5230        | 0.09             | 0.572                | 15.84             | 16.50                    | 1.164          | 96.30          | 1.04              | 0.691                 | /                |
|                            | Level2          |                  | Left Tilt   | 0          | 46  | 5230        | -0.01            | 0.594                | 15.84             | 16.50                    | 1.164          | 96.30          | 1.04              | 0.718                 | /                |
|                            | Level2          |                  | Right Cheek | 0          | 46  | 5230        | 0.11             | 0.412                | 15.84             | 16.50                    | 1.164          | 96.30          | 1.04              | 0.498                 | /                |
|                            | Level2          |                  | Right Tilt  | 0          | 46  | 5230        | -0.19            | 0.431                | 15.84             | 16.50                    | 1.164          | 96.30          | 1.04              | 0.521                 | /                |
| 5.6G                       | Level1          | 802.11n (HT40)   | Left Cheek  | 0          | 118 | 5590        | 0.14             | 0.458                | 17.09             | 17.50                    | 1.099          | 96.30          | 1.04              | 0.523                 | /                |
|                            | Level1          |                  | Left Tilt   | 0          | 118 | 5590        | -0.03            | 0.501                | 17.09             | 17.50                    | 1.099          | 96.30          | 1.04              | 0.572                 | 38#              |
|                            | Level1          |                  | Right Cheek | 0          | 118 | 5590        | 0.09             | 0.329                | 17.09             | 17.50                    | 1.099          | 96.30          | 1.04              | 0.375                 | /                |
|                            | Level1          |                  | Right Tilt  | 0          | 118 | 5590        | -0.16            | 0.373                | 17.09             | 17.50                    | 1.099          | 96.30          | 1.04              | 0.426                 | /                |
| 5.6G                       | Level2          | 802.11n (HT40)   | Left Cheek  | 0          | 118 | 5590        | -0.07            | 0.289                | 14.92             | 15.50                    | 1.143          | 96.30          | 1.04              | 0.343                 | /                |
|                            | Level2          |                  | Left Tilt   | 0          | 118 | 5590        | 0.01             | 0.315                | 14.92             | 15.50                    | 1.143          | 96.30          | 1.04              | 0.374                 | /                |
|                            | Level2          |                  | Right Cheek | 0          | 118 | 5590        | -0.01            | 0.208                | 14.92             | 15.50                    | 1.143          | 96.30          | 1.04              | 0.246                 | /                |
|                            | Level2          |                  | Right Tilt  | 0          | 118 | 5590        | 0.13             | 0.235                | 14.92             | 15.50                    | 1.143          | 96.30          | 1.04              | 0.279                 | /                |
| 5.8G                       | Level1          | 802.11ac (VHT80) | Left Cheek  | 0          | 155 | 5775        | -0.10            | 0.963                | 16.48             | 16.50                    | 1.005          | 92.70          | 1.08              | 1.044                 | /                |
|                            | Level1          |                  | Left Tilt   | 0          | 155 | 5775        | 0.00             | 1.040                | 16.48             | 16.50                    | 1.005          | 92.70          | 1.08              | 1.127                 | 39#              |
|                            | Level1          |                  | Right Cheek | 0          | 155 | 5775        | -0.17            | 0.737                | 16.48             | 16.50                    | 1.005          | 92.70          | 1.08              | 0.799                 | /                |
|                            | Level1          |                  | Right Tilt  | 0          | 155 | 5775        | 0.02             | 0.803                | 16.48             | 16.50                    | 1.005          | 92.70          | 1.08              | 0.870                 | /                |
| 5.8G                       | Level2          | 802.11ac (VHT80) | Left Cheek  | 0          | 155 | 5775        | 0.14             | 0.504                | 13.92             | 14.00                    | 1.019          | 92.70          | 1.08              | 0.554                 | /                |
|                            | Level2          |                  | Left Tilt   | 0          | 155 | 5775        | 0.01             | 0.680                | 13.92             | 14.00                    | 1.019          | 92.70          | 1.08              | 0.747                 | /                |
|                            | Level2          |                  | Right Cheek | 0          | 155 | 5775        | -0.05            | 0.575                | 13.92             | 14.00                    | 1.019          | 92.70          | 1.08              | 0.632                 | /                |
|                            | Level2          |                  | Right Tilt  | 0          | 155 | 5775        | -0.03            | 0.603                | 13.92             | 14.00                    | 1.019          | 92.70          | 1.08              | 0.663                 | /                |
| Body-worn Accessory (15mm) |                 |                  |             |            |     |             |                  |                      |                   |                          |                |                |                   |                       |                  |
| 5.2G                       | Off             | 802.11n (HT40)   | Front Side  | 15         | 46  | 5230        | 0.01             | 0.101                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.115                 | /                |
|                            | Off             |                  | Back Side   | 15         | 46  | 5230        | -0.13            | 0.186                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.212                 | 40#              |
| 5.6G                       | Off             | 802.11n (HT40)   | Front Side  | 15         | 118 | 5590        | 0.02             | 0.161                | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.190                 | /                |
|                            | Off             |                  | Back Side   | 15         | 118 | 5590        | 0.01             | 0.194                | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.229                 | 41#              |
| 5.8G                       | Off             | 802.11ac (VHT80) | Front Side  | 15         | 155 | 5775        | 0.00             | 0.101                | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.110                 | /                |
|                            | Off             |                  | Back Side   | 15         | 155 | 5775        | 0.00             | 0.124                | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.135                 | 42#              |
| Hotspot (10mm)             |                 |                  |             |            |     |             |                  |                      |                   |                          |                |                |                   |                       |                  |
| 5.2G                       | Off             | 802.11a          | Front Side  | 10         | 46  | 5230        | 0.12             | 0.230                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.262                 | /                |
|                            | Off             |                  | Back Side   | 10         | 46  | 5230        | 0.14             | 0.360                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.410                 | 43#              |
|                            | Off             |                  | Left Edge   | 10         | 46  | 5230        | -0.15            | 0.137                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.156                 | /                |
|                            | Off             |                  | Right Edge  | 10         | 46  | 5230        | 0.00             | 0.030                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.034                 | /                |
|                            | Off             |                  | Top Edge    | 10         | 46  | 5230        | 0.02             | 0.344                | 18.10             | 18.50                    | 1.096          | 96.30          | 1.04              | 0.392                 | /                |

|                                                                          |                 |         |            |            |     |             |                  |                       |                   |                          |                |                |                   |                        |                  |
|--------------------------------------------------------------------------|-----------------|---------|------------|------------|-----|-------------|------------------|-----------------------|-------------------|--------------------------|----------------|----------------|-------------------|------------------------|------------------|
| 5.8G                                                                     | Off             | 802.11a | Front Side | 10         | 155 | 5775        | 0.08             | 0.217                 | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.236                  | /                |
|                                                                          | Off             |         | Back Side  | 10         | 155 | 5775        | 0.18             | 0.218                 | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.237                  | 44#              |
|                                                                          | Off             |         | Left Edge  | 10         | 155 | 5775        | -0.19            | 0.118                 | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.128                  | /                |
|                                                                          | Off             |         | Right Edge | 10         | 155 | 5775        | 0.11             | 0.022                 | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.024                  | /                |
|                                                                          | Off             |         | Top Edge   | 10         | 155 | 5775        | 0.03             | 0.286                 | 16.97             | 17.00                    | 1.007          | 92.70          | 1.08              | 0.311                  | /                |
| Fre. Band                                                                | Power Reduction | Mode    | Position   | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | 10 g Meas. SAR (W/Kg) | Meas. Power (dBm) | Max. tune-up Power (dBm) | Scaling Factor | Duty Cycle (%) | Duty Cycle Factor | 10 g Scaled SAR (W/Kg) | Measurements No. |
| Product Specific 10g SAR (0mm)                                           |                 |         |            |            |     |             |                  |                       |                   |                          |                |                |                   |                        |                  |
| 5.3G                                                                     | Off             | 802.11a | Front Side | 0          | 54  | 5270        | -0.20            | 0.236                 | 17.35             | 17.50                    | 1.035          | 96.30          | 1.04              | 0.254                  | /                |
|                                                                          | Off             |         | Back Side  | 0          | 54  | 5270        | -0.15            | 0.179                 | 17.35             | 17.50                    | 1.035          | 96.30          | 1.04              | 0.192                  | /                |
|                                                                          | Off             |         | Left Edge  | 0          | 54  | 5270        | 0.17             | 0.113                 | 17.35             | 17.50                    | 1.035          | 96.30          | 1.04              | 0.121                  | /                |
|                                                                          | Off             |         | Right Edge | 0          | 54  | 5270        | -0.08            | 0.038                 | 17.35             | 17.50                    | 1.035          | 96.30          | 1.04              | 0.041                  | /                |
|                                                                          | Off             |         | Top Edge   | 0          | 54  | 5270        | -0.19            | 0.255                 | 17.35             | 17.50                    | 1.035          | 96.30          | 1.04              | 0.274                  | 45#              |
| 5.6G                                                                     | Off             | 802.11a | Front Side | 0          | 118 | 5590        | -0.18            | 0.312                 | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.368                  | /                |
|                                                                          | Off             |         | Back Side  | 0          | 118 | 5590        | -0.01            | 0.249                 | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.293                  | /                |
|                                                                          | Off             |         | Left Edge  | 0          | 118 | 5590        | -0.14            | 0.157                 | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.185                  | /                |
|                                                                          | Off             |         | Right Edge | 0          | 118 | 5590        | 0.16             | 0.046                 | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.054                  | /                |
|                                                                          | Off             |         | Top Edge   | 0          | 118 | 5590        | 0.02             | 0.353                 | 17.95             | 18.50                    | 1.135          | 96.30          | 1.04              | 0.416                  | 46#              |
| Note: Refer to 0 for the detailed test data for each test configuration. |                 |         |            |            |     |             |                  |                       |                   |                          |                |                |                   |                        |                  |

## 10.13 Bluetooth

| Mode                                                                     | Position    | Dist. (mm) | Ch. | Freq. (MHz) | Power Drift (dB) | 1 g Meas. SAR (W/Kg) | Meas. Power (dBm) | Max. 1 tune-up Power (dBm) | Scaling Factor | Duty Cycle (%) | Duty Cycle Factor | 1 g Scaled SAR (W/Kg) | Meas. No. |
|--------------------------------------------------------------------------|-------------|------------|-----|-------------|------------------|----------------------|-------------------|----------------------------|----------------|----------------|-------------------|-----------------------|-----------|
| <b>Head</b>                                                              |             |            |     |             |                  |                      |                   |                            |                |                |                   |                       |           |
| BLE                                                                      | Left Cheek  | 0          | 19  | 2440        | -0.01            | 0.133                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | <b>0.272</b>          | 47#       |
|                                                                          | Left Tilt   | 0          | 19  | 2440        | 0.09             | 0.116                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.237                 | /         |
|                                                                          | Right Cheek | 0          | 19  | 2440        | 0.10             | 0.051                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.104                 | /         |
|                                                                          | Right Tilt  | 0          | 19  | 2440        | -0.13            | 0.046                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.094                 | /         |
| <b>Body-worn Accessory (15mm)</b>                                        |             |            |     |             |                  |                      |                   |                            |                |                |                   |                       |           |
| BLE                                                                      | Front Side  | 15         | 19  | 2440        | 0.08             | 0.022                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.045                 | /         |
|                                                                          | Back Side   | 15         | 19  | 2440        | 0.16             | 0.031                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | <b>0.063</b>          | 48#       |
| <b>Hotspot (10mm)</b>                                                    |             |            |     |             |                  |                      |                   |                            |                |                |                   |                       |           |
| BLE                                                                      | Front Side  | 10         | 19  | 2440        | 0.07             | 0.059                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.120                 | /         |
|                                                                          | Back Side   | 10         | 19  | 2440        | 0.00             | 0.062                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | <b>0.127</b>          | 49#       |
|                                                                          | Left Edge   | 10         | 0   | 2402        | 0.02             | 0.026                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.053                 | /         |
|                                                                          | Top Edge    | 10         | 39  | 2480        | -0.17            | 0.019                | 11.44             | 12.50                      | 1.276          | 62.50          | 1.60              | 0.038                 | /         |
| Note: Refer to 0 for the detailed test data for each test configuration. |             |            |     |             |                  |                      |                   |                            |                |                |                   |                       |           |

## 11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

| Frequency Band (MHz) | Wireless Band    | RF Exposure Conditions | Test Position | Highest Measured SAR (W/kg) | Repeated SAR (Yes/No) | Highest Measured SAR (W/kg) | Largest to Smallest SAR Ratio |
|----------------------|------------------|------------------------|---------------|-----------------------------|-----------------------|-----------------------------|-------------------------------|
| 1750                 | WCDMA Band 4     | Head                   | Right Tilt    | 0.837                       | Yes                   | 0.812                       | 1.03                          |
|                      | LTE Band 4       | Head                   | Right Tilt    | 0.906                       | Yes                   | 0.883                       | 1.03                          |
| 1900                 | GSM 1900         | Head                   | Right Tilt    | 0.865                       | Yes                   | 0.814                       | 1.06                          |
|                      |                  | Body                   | Top Edge      | 0.910                       | Yes                   | 0.862                       | 1.06                          |
|                      | WCDMA Band 2     | Head                   | Right Tilt    | 0.951                       | Yes                   | 0.844                       | 1.13                          |
|                      | LTE Band 2       | Head                   | Right Tilt    | 1.010                       | Yes                   | 0.983                       | 1.03                          |
| 2600                 | LTE Band 7       | Head                   | Right Cheek   | 0.938                       | Yes                   | 0.877                       | 1.07                          |
|                      | LTE Band 41      | Head                   | Right Cheek   | 0.821                       | Yes                   | 0.813                       | 1.01                          |
| 2450                 | 802.11 b         | Head                   | Left Cheek    | 1.010                       | Yes                   | 0.976                       | 1.04                          |
| 5250                 | 802.11n(HT40)    | Head                   | Left Tilt     | 1.020                       | Yes                   | 0.974                       | 1.05                          |
| 5750                 | 802.11 ac(VHT80) | Head                   | Left Tilt     | 1.040                       | Yes                   | 0.982                       | 1.06                          |

Note: The ratio of largest to smallest SAR for the original and first repeated measurements is  $< 1.20$ , the second repeated measurement. is not required.

## 12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

### 12.1 Simultaneous Transmission Mode Consider

| No. | Simultaneous Tx Combination | Head | Body-worn | Hotspot | Product Specific |
|-----|-----------------------------|------|-----------|---------|------------------|
| 1   | GSM + WiFi 2.4G             | Yes  | Yes       | Yes     | Yes              |
| 2   | GSM + WiFi 5G               | Yes  | Yes       | Yes     | Yes              |
| 3   | GSM + Bluetooth             | Yes  | Yes       | Yes     | Yes              |
| 4   | GSM + WiFi 5G + Bluetooth   | Yes  | Yes       | No      | Yes              |
| 5   | UMTS + WiFi 2.4G            | Yes  | Yes       | Yes     | Yes              |
| 6   | UMTS + WiFi 5G              | Yes  | Yes       | Yes     | Yes              |
| 7   | UMTS + Bluetooth            | Yes  | Yes       | Yes     | Yes              |
| 8   | UMTS + WiFi 5G + Bluetooth  | Yes  | Yes       | No      | Yes              |
| 9   | LTE + WiFi 2.4G             | Yes  | Yes       | Yes     | Yes              |
| 10  | LTE + WiFi 5G               | Yes  | Yes       | Yes     | Yes              |
| 11  | LTE + Bluetooth             | Yes  | Yes       | Yes     | Yes              |
| 12  | LTE + WiFi 5G + Bluetooth   | Yes  | Yes       | No      | Yes              |

Note:

1. 2G&3G&4G share the same antenna and can't transmit simultaneously.
2. The Bluetooth and 2.4G WLAN share the same antenna, can't transmitting together.
3. The 2.4G WLAN or 5G WLAN can transmit simultaneously with each WWAN.
4. Two WWAN antennas can switch automatically, but up and down antenna can't transmit simultaneously.
5. The maximum SAR summation is calculated based on the same configuration and test position.

## 12.2 Sum SAR of Simultaneous Transmission

### 12.2.1 Head Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 2.4G WLAN

| Band     | Power Reduction | Position    | Stand alone SAR |          | SUM SAR          |
|----------|-----------------|-------------|-----------------|----------|------------------|
|          |                 |             | 1               | 2        | WWAN+2.4G WIFI   |
|          |                 |             | WWAN            | 2.4GWIFI | Sum SAR<br>(1+2) |
| GSM 850  | Off             | Left Cheek  | 0.431           | 0.907    | 1.338            |
|          | Off             | Left Tilt   | 0.360           | 0.769    | 1.129            |
|          | Off             | Right Cheek | 0.573           | 0.320    | 0.893            |
|          | Off             | Right Tilt  | 0.455           | 0.320    | 0.775            |
| GSM1900  | Level 2         | Left Cheek  | 0.459           | 0.907    | 1.366            |
|          | Level 2         | Left Tilt   | 0.480           | 0.769    | 1.249            |
|          | Level 2         | Right Cheek | 0.706           | 0.320    | 1.026            |
|          | Level 2         | Right Tilt  | 0.766           | 0.320    | 1.086            |
| WCDMA B2 | Level 2         | Left Cheek  | 0.498           | 0.907    | 1.405            |
|          | Level 2         | Left Tilt   | 0.567           | 0.769    | 1.336            |
|          | Level 2         | Right Cheek | 0.721           | 0.320    | 1.041            |
|          | Level 2         | Right Tilt  | 1.192           | 0.306    | <b>1.498</b>     |
| WCDMA B4 | Level 2         | Left Cheek  | 0.495           | 0.907    | 1.402            |
|          | Level 2         | Left Tilt   | 0.556           | 0.769    | 1.325            |
|          | Level 2         | Right Cheek | 0.504           | 0.320    | 0.824            |
|          | Level 2         | Right Tilt  | 0.610           | 0.320    | 0.930            |
| WCDMA B5 | Off             | Left Cheek  | 0.333           | 0.907    | 1.240            |
|          | Off             | Left Tilt   | 0.269           | 0.769    | 1.038            |
|          | Off             | Right Cheek | 0.424           | 0.320    | 0.744            |
|          | Off             | Right Tilt  | 0.358           | 0.320    | 0.678            |
| LTE B2   | Level 2         | Left Cheek  | 0.485           | 0.907    | 1.392            |
|          | Level 2         | Left Tilt   | 0.570           | 0.769    | 1.339            |
|          | Level 2         | Right Cheek | 0.714           | 0.320    | 1.034            |
|          | Level 2         | Right Tilt  | 0.904           | 0.320    | 1.224            |
| LTE B4   | Level 2         | Left Cheek  | 0.589           | 0.907    | 1.496            |
|          | Level 2         | Left Tilt   | 0.713           | 0.769    | 1.482            |
|          | Level 2         | Right Cheek | 0.678           | 0.320    | 0.998            |
|          | Level 2         | Right Tilt  | 0.727           | 0.320    | 1.047            |
| LTE B5   | Off             | Left Cheek  | 0.431           | 0.907    | 1.338            |
|          | Off             | Left Tilt   | 0.352           | 0.769    | 1.121            |
|          | Off             | Right Cheek | 0.481           | 0.320    | 0.801            |
|          | Off             | Right Tilt  | 0.437           | 0.320    | 0.757            |
| LTE B7   | Level 2         | Left Cheek  | 0.362           | 0.907    | 1.269            |
|          | Level 2         | Left Tilt   | 0.401           | 0.769    | 1.170            |
|          | Level 2         | Right Cheek | 1.133           | 0.320    | 1.453            |

|         |         |             |       |       |       |
|---------|---------|-------------|-------|-------|-------|
|         | Level 2 | Right Tilt  | 1.047 | 0.320 | 1.367 |
| LTE B41 | Level 2 | Left Cheek  | 0.312 | 0.907 | 1.219 |
|         | Level 2 | Left Tilt   | 0.344 | 0.769 | 1.113 |
|         | Level 2 | Right Cheek | 0.994 | 0.320 | 1.314 |
|         | Level 2 | Right Tilt  | 0.735 | 0.320 | 1.055 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 10g SAR is 1.498 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

## 12.2.2 Head Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position    | Stand alone SAR |         |           | SUM SAR<br>WWAN+5G<br>WIFI | SUM SAR<br>WWAN+Bluetooth | SUM SAR<br>WWAN+5G+Bluetooth |
|----------|-----------------|-------------|-----------------|---------|-----------|----------------------------|---------------------------|------------------------------|
|          |                 |             | 1               | 2       | 3         | Sum SAR<br>(1+2)           | Sum SAR<br>(1+3)          | Sum SAR<br>(1+2+3)           |
|          |                 |             | WWAN            | 5G WIFI | Bluetooth |                            |                           |                              |
| GSM 850  | Off             | Left Cheek  | 0.431           | 0.691   | 0.272     | 1.122                      | 0.703                     | 1.394                        |
|          | Off             | Left Tilt   | 0.360           | 0.747   | 0.237     | 1.107                      | 0.597                     | 1.344                        |
|          | Off             | Right Cheek | 0.573           | 0.632   | 0.104     | 1.205                      | 0.677                     | 1.309                        |
|          | Off             | Right Tilt  | 0.455           | 0.663   | 0.094     | 1.118                      | 0.549                     | 1.212                        |
| GSM1900  | Level 3         | Left Cheek  | 0.348           | 0.691   | 0.272     | 1.039                      | 0.620                     | 1.311                        |
|          | Level 3         | Left Tilt   | 0.364           | 0.747   | 0.237     | 1.111                      | 0.601                     | 1.348                        |
|          | Level 3         | Right Cheek | 0.449           | 0.632   | 0.104     | 1.081                      | 0.553                     | 1.185                        |
|          | Level 3         | Right Tilt  | 0.535           | 0.663   | 0.094     | 1.198                      | 0.629                     | 1.292                        |
| WCDMA B2 | Level 3         | Left Cheek  | 0.337           | 0.691   | 0.272     | 1.028                      | 0.609                     | 1.300                        |
|          | Level 3         | Left Tilt   | 0.402           | 0.747   | 0.237     | 1.149                      | 0.639                     | 1.386                        |
|          | Level 3         | Right Cheek | 0.515           | 0.632   | 0.104     | 1.147                      | 0.619                     | 1.251                        |
|          | Level 3         | Right Tilt  | 0.583           | 0.663   | 0.094     | 1.246                      | 0.677                     | 1.340                        |
| WCDMA B4 | Level 3         | Left Cheek  | 0.427           | 0.691   | 0.272     | 1.118                      | 0.699                     | 1.390                        |
|          | Level 3         | Left Tilt   | 0.504           | 0.747   | 0.237     | 1.251                      | 0.741                     | 1.488                        |
|          | Level 3         | Right Cheek | 0.462           | 0.632   | 0.104     | 1.094                      | 0.566                     | 1.198                        |
|          | Level 3         | Right Tilt  | 0.641           | 0.663   | 0.094     | 1.304                      | 0.735                     | 1.398                        |
| WCDMA B5 | Off             | Left Cheek  | 0.333           | 0.691   | 0.272     | 1.024                      | 0.605                     | 1.296                        |
|          | Off             | Left Tilt   | 0.269           | 0.747   | 0.237     | 1.016                      | 0.506                     | 1.253                        |
|          | Off             | Right Cheek | 0.424           | 0.632   | 0.104     | 1.056                      | 0.528                     | 1.160                        |
|          | Off             | Right Tilt  | 0.358           | 0.663   | 0.094     | 1.021                      | 0.452                     | 1.115                        |
| LTE B2   | Level 3         | Left Cheek  | 0.385           | 0.691   | 0.272     | 1.076                      | 0.657                     | 1.348                        |
|          | Level 3         | Left Tilt   | 0.450           | 0.747   | 0.237     | 1.197                      | 0.687                     | 1.434                        |
|          | Level 3         | Right Cheek | 0.597           | 0.632   | 0.104     | 1.229                      | 0.701                     | 1.333                        |
|          | Level 3         | Right Tilt  | 0.720           | 0.663   | 0.094     | 1.383                      | 0.814                     | 1.477                        |
| LTE B4   | Level 3         | Left Cheek  | 0.500           | 0.691   | 0.272     | 1.191                      | 0.772                     | 1.463                        |
|          | Level 3         | Left Tilt   | 0.513           | 0.747   | 0.237     | 1.260                      | 0.750                     | <b>1.497</b>                 |
|          | Level 3         | Right Cheek | 0.505           | 0.632   | 0.104     | 1.137                      | 0.609                     | 1.241                        |

|         |         |             |       |       |       |       |       |       |
|---------|---------|-------------|-------|-------|-------|-------|-------|-------|
|         | Level 3 | Right Tilt  | 0.589 | 0.663 | 0.094 | 1.252 | 0.683 | 1.346 |
| LTE B5  | Off     | Left Cheek  | 0.431 | 0.691 | 0.272 | 1.122 | 0.703 | 1.394 |
|         | Off     | Left Tilt   | 0.352 | 0.747 | 0.237 | 1.099 | 0.589 | 1.336 |
|         | Off     | Right Cheek | 0.481 | 0.632 | 0.104 | 1.113 | 0.585 | 1.217 |
|         | Off     | Right Tilt  | 0.437 | 0.663 | 0.094 | 1.100 | 0.531 | 1.194 |
| LTE B7  | Level 3 | Left Cheek  | 0.259 | 0.691 | 0.272 | 0.950 | 0.531 | 1.222 |
|         | Level 3 | Left Tilt   | 0.285 | 0.747 | 0.237 | 1.032 | 0.522 | 1.269 |
|         | Level 3 | Right Cheek | 0.736 | 0.632 | 0.104 | 1.368 | 0.840 | 1.472 |
|         | Level 3 | Right Tilt  | 0.699 | 0.663 | 0.094 | 1.362 | 0.793 | 1.456 |
| LTE B41 | Level 3 | Left Cheek  | 0.249 | 0.691 | 0.272 | 0.940 | 0.521 | 1.212 |
|         | Level 3 | Left Tilt   | 0.275 | 0.747 | 0.237 | 1.022 | 0.512 | 1.259 |
|         | Level 3 | Right Cheek | 0.676 | 0.632 | 0.104 | 1.308 | 0.780 | 1.412 |
|         | Level 3 | Right Tilt  | 0.580 | 0.663 | 0.094 | 1.243 | 0.674 | 1.337 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 10g SAR is 1.497 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.3 Body-worn Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 2.4G WLAN

| Band     | Power Reduction | Position        | Stand alone SAR |          | SUM SAR          |
|----------|-----------------|-----------------|-----------------|----------|------------------|
|          |                 |                 | 1               | 2        | WWAN+2.4G WIFI   |
|          |                 |                 | WWAN            | 2.4GWIFI | Sum SAR<br>(1+2) |
| GSM 850  | Off             | Front Side 15mm | 0.039           | 0.101    | 0.140            |
|          | Off             | Back Side 15mm  | 0.074           | 0.256    | 0.330            |
| GSM1900  | Off             | Front Side 15mm | 0.309           | 0.101    | 0.410            |
|          | Off             | Back Side 15mm  | 0.354           | 0.256    | 0.610            |
| WCDMA B2 | Level 4         | Front Side 15mm | 0.207           | 0.101    | 0.308            |
|          | Level 4         | Back Side 15mm  | 0.225           | 0.256    | 0.481            |
| WCDMA B4 | Off             | Front Side 15mm | 0.400           | 0.101    | 0.501            |
|          | Off             | Back Side 15mm  | 0.403           | 0.256    | <b>0.659</b>     |
| WCDMA B5 | Off             | Front Side 15mm | 0.028           | 0.101    | 0.129            |
|          | Off             | Back Side 15mm  | 0.070           | 0.256    | 0.326            |
| LTE B2   | Level 4         | Front Side 15mm | 0.194           | 0.101    | 0.295            |
|          | Level 4         | Back Side 15mm  | 0.247           | 0.256    | 0.503            |
| LTE B4   | Off             | Front Side 15mm | 0.361           | 0.101    | 0.462            |
|          | Off             | Back Side 15mm  | 0.399           | 0.256    | 0.655            |
| LTE B5   | Off             | Front Side 15mm | 0.048           | 0.101    | 0.149            |
|          | Off             | Back Side 15mm  | 0.069           | 0.256    | 0.325            |
| LTE B7   | Level 4         | Front Side 15mm | 0.162           | 0.101    | 0.263            |
|          | Level 4         | Back Side 15mm  | 0.266           | 0.256    | 0.522            |
| LTE B41  | Off             | Front Side 15mm | 0.212           | 0.101    | 0.313            |
|          | Off             | Back Side 15mm  | 0.334           | 0.256    | 0.590            |



## Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 10g SAR is 0.659 W/Kg &lt; 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.4 Body-worn Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position           | Stand alone SAR |         |           | SUM SAR<br>WWAN+5G<br>WIFI | SUM SAR<br>WWAN+Bluetooth | SUM SAR<br>WWAN+5G+Bluetooth |
|----------|-----------------|--------------------|-----------------|---------|-----------|----------------------------|---------------------------|------------------------------|
|          |                 |                    | 1               | 2       | 3         |                            |                           |                              |
|          |                 |                    | WWAN            | 5G WIFI | Bluetooth | Sum SAR<br>(1+2)           | Sum SAR<br>(1+3)          | Sum SAR<br>(1+2+3)           |
| GSM 850  | Off             | Front Side<br>15mm | 0.039           | 0.171   | 0.040     | 0.210                      | 0.079                     | 0.250                        |
|          | Off             | Back Side<br>15mm  | 0.074           | 0.212   | 0.056     | 0.286                      | 0.130                     | 0.342                        |
| GSM1900  | Off             | Front Side<br>15mm | 0.309           | 0.171   | 0.040     | 0.480                      | 0.349                     | 0.520                        |
|          | Off             | Back Side<br>15mm  | 0.354           | 0.212   | 0.056     | 0.566                      | 0.410                     | 0.622                        |
| WCDMA B2 | Level 4         | Front Side<br>15mm | 0.184           | 0.171   | 0.040     | 0.355                      | 0.224                     | 0.395                        |
|          | Level 4         | Back Side<br>15mm  | 0.204           | 0.212   | 0.056     | 0.416                      | 0.260                     | 0.472                        |
| WCDMA B4 | Off             | Front Side<br>15mm | 0.400           | 0.171   | 0.040     | 0.571                      | 0.440                     | 0.611                        |
|          | Off             | Back Side<br>15mm  | 0.403           | 0.212   | 0.056     | 0.615                      | 0.459                     | <b>0.671</b>                 |
| WCDMA B5 | Off             | Front Side<br>15mm | 0.028           | 0.171   | 0.040     | 0.199                      | 0.068                     | 0.239                        |
|          | Off             | Back Side<br>15mm  | 0.070           | 0.212   | 0.056     | 0.282                      | 0.126                     | 0.338                        |
| LTE B2   | Level 4         | Front Side<br>15mm | 0.194           | 0.171   | 0.040     | 0.365                      | 0.234                     | 0.405                        |
|          | Level 4         | Back Side<br>15mm  | 0.247           | 0.212   | 0.056     | 0.459                      | 0.303                     | 0.515                        |
| LTE B4   | Off             | Front Side<br>15mm | 0.361           | 0.171   | 0.040     | 0.532                      | 0.401                     | 0.572                        |
|          | Off             | Back Side<br>15mm  | 0.399           | 0.212   | 0.056     | 0.611                      | 0.455                     | 0.667                        |
| LTE B5   | Off             | Front Side<br>15mm | 0.048           | 0.171   | 0.040     | 0.219                      | 0.088                     | 0.259                        |
|          | Off             | Back Side<br>15mm  | 0.069           | 0.212   | 0.056     | 0.281                      | 0.125                     | 0.337                        |
| LTE B7   | Level 4         | Front Side         | 0.162           | 0.171   | 0.040     | 0.333                      | 0.202                     | 0.373                        |

|         |         |                    |       |       |       |       |       |       |
|---------|---------|--------------------|-------|-------|-------|-------|-------|-------|
|         |         | 15mm               |       |       |       |       |       |       |
|         | Level 4 | Back Side<br>15mm  | 0.266 | 0.212 | 0.056 | 0.478 | 0.322 | 0.534 |
| LTE B41 | Off     | Front Side<br>15mm | 0.212 | 0.171 | 0.040 | 0.383 | 0.252 | 0.423 |
|         | Off     | Back Side<br>15mm  | 0.334 | 0.212 | 0.056 | 0.546 | 0.390 | 0.602 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 0.671 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.5 Hotspot Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 2.4G WLAN

| Band     | Power Reduction | Position        | Stand alone SAR |          | SUM SAR          |
|----------|-----------------|-----------------|-----------------|----------|------------------|
|          |                 |                 | 1               | 2        | WWAN+2.4G WIFI   |
|          |                 |                 | WWAN            | 2.4GWIFI | Sum SAR<br>(1+2) |
| GSM 850  | Off             | Front Side 10mm | 0.049           | 0.151    | 0.200            |
|          | Off             | Back Side 10mm  | 0.087           | 0.460    | 0.547            |
|          | Off             | Left Edge 10mm  | 0.003           | 0.235    | 0.238            |
|          | Off             | Right Edge 10mm | 0.006           | 0.000    | 0.006            |
|          | Off             | Top Edge 10mm   | 0.080           | 0.179    | 0.259            |
| GSM1900  | Off             | Front Side 10mm | 0.682           | 0.151    | 0.833            |
|          | Off             | Back Side 10mm  | 0.713           | 0.460    | 1.173            |
|          | Off             | Left Edge 10mm  | 0.087           | 0.235    | 0.322            |
|          | Off             | Right Edge 10mm | 0.186           | 0.000    | 0.186            |
|          | Off             | Top Edge 10mm   | 1.074           | 0.179    | <b>1.253</b>     |
| WCDMA B2 | Level 4         | Front Side 10mm | 0.284           | 0.151    | 0.435            |
|          | Level 4         | Back Side 10mm  | 0.360           | 0.460    | 0.820            |
|          | Level 4         | Left Edge 10mm  | 0.052           | 0.235    | 0.287            |
|          | Level 4         | Right Edge 10mm | 0.107           | 0.000    | 0.107            |
|          | Level 4         | Top Edge 10mm   | 0.585           | 0.179    | 0.764            |
| WCDMA B4 | Off             | Front Side 10mm | 0.657           | 0.151    | 0.808            |
|          | Off             | Back Side 10mm  | 0.793           | 0.460    | <b>1.253</b>     |
|          | Off             | Left Edge 10mm  | 0.126           | 0.235    | 0.361            |
|          | Off             | Right Edge 10mm | 0.222           | 0.000    | 0.222            |
|          | Off             | Top Edge 10mm   | 0.870           | 0.179    | 1.049            |
| WCDMA B5 | Off             | Front Side 10mm | 0.082           | 0.151    | 0.233            |
|          | Off             | Back Side 10mm  | 0.104           | 0.460    | 0.564            |
|          | Off             | Left Edge 10mm  | 0.005           | 0.235    | 0.240            |
|          | Off             | Right Edge 10mm | 0.011           | 0.000    | 0.011            |
|          | Off             | Top Edge 10mm   | 0.096           | 0.179    | 0.275            |
| LTE B2   | Level 4         | Front Side 10mm | 0.392           | 0.151    | 0.543            |

|         |         |                 |       |       |       |
|---------|---------|-----------------|-------|-------|-------|
|         | Level 4 | Back Side 10mm  | 0.435 | 0.460 | 0.895 |
|         | Level 4 | Left Edge 10mm  | 0.051 | 0.235 | 0.286 |
|         | Level 4 | Right Edge 10mm | 0.104 | 0.000 | 0.104 |
|         | Level 4 | Top Edge 10mm   | 0.645 | 0.179 | 0.824 |
| LTE B4  | Off     | Front Side 10mm | 0.728 | 0.151 | 0.879 |
|         | Off     | Back Side 10mm  | 0.662 | 0.460 | 1.122 |
|         | Off     | Left Edge 10mm  | 0.115 | 0.235 | 0.350 |
|         | Off     | Right Edge 10mm | 0.199 | 0.000 | 0.199 |
|         | Off     | Top Edge 10mm   | 0.772 | 0.179 | 0.951 |
| LTE B5  | Off     | Front Side 10mm | 0.083 | 0.151 | 0.234 |
|         | Off     | Back Side 10mm  | 0.123 | 0.460 | 0.583 |
|         | Off     | Left Edge 10mm  | 0.050 | 0.235 | 0.285 |
|         | Off     | Right Edge 10mm | 0.033 | 0.000 | 0.033 |
|         | Off     | Top Edge 10mm   | 0.081 | 0.179 | 0.260 |
| LTE B7  | Level 4 | Front Side 10mm | 0.300 | 0.151 | 0.451 |
|         | Level 4 | Back Side 10mm  | 0.591 | 0.460 | 1.051 |
|         | Level 4 | Left Edge 10mm  | 0.019 | 0.235 | 0.254 |
|         | Level 4 | Right Edge 10mm | 0.353 | 0.000 | 0.353 |
|         | Level 4 | Top Edge 10mm   | 0.576 | 0.179 | 0.755 |
| LTE B41 | Off     | Front Side 10mm | 0.291 | 0.151 | 0.442 |
|         | Off     | Back Side 10mm  | 0.477 | 0.460 | 0.937 |
|         | Off     | Left Edge 10mm  | 0.030 | 0.235 | 0.265 |
|         | Off     | Right Edge 10mm | 0.459 | 0.000 | 0.459 |
|         | Off     | Top Edge 10mm   | 0.425 | 0.179 | 0.604 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 1.253 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.6 Hotspot Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position           | Stand alone SAR |         |           | SUM SAR          | SUM SAR          | SUM SAR            |
|----------|-----------------|--------------------|-----------------|---------|-----------|------------------|------------------|--------------------|
|          |                 |                    | 1               | 2       | 3         | WWAN+5G WIFI     | WWAN+Bluetooth   | WWAN+5G+Bluetooth  |
|          |                 |                    | WWAN            | 5G WIFI | Bluetooth | Sum SAR<br>(1+2) | Sum SAR<br>(1+3) | Sum SAR<br>(1+2+3) |
| GSM 850  | Off             | Front Side<br>10mm | 0.049           | 0.262   | 0.107     | 0.311            | 0.156            | 0.418              |
|          | Off             | Back Side<br>10mm  | 0.087           | 0.410   | 0.113     | 0.497            | 0.200            | 0.610              |
|          | Off             | Left Edge<br>10mm  | 0.003           | 0.156   | 0.047     | 0.159            | 0.050            | 0.206              |
|          | Off             | Right Edge<br>10mm | 0.006           | 0.034   | 0.000     | 0.040            | 0.006            | 0.040              |
|          | Off             | Top Edge<br>10mm   | 0.080           | 0.392   | 0.034     | 0.472            | 0.114            | 0.506              |
| GSM1900  | Off             | Front Side<br>10mm | 0.682           | 0.262   | 0.107     | 0.944            | 0.789            | 1.051              |
|          | Off             | Back Side<br>10mm  | 0.713           | 0.410   | 0.113     | 1.123            | 0.826            | 1.236              |
|          | Off             | Left Edge<br>10mm  | 0.087           | 0.156   | 0.047     | 0.243            | 0.134            | 0.290              |
|          | Off             | Right Edge<br>10mm | 0.186           | 0.034   | 0.000     | 0.220            | 0.186            | 0.220              |
|          | Off             | Top Edge<br>10mm   | 1.074           | 0.392   | 0.034     | 1.466            | 1.108            | <b>1.500</b>       |
| WCDMA B2 | Level 4         | Front Side<br>10mm | 0.247           | 0.262   | 0.107     | 0.509            | 0.354            | 0.616              |
|          | Level 4         | Back Side<br>10mm  | 0.318           | 0.410   | 0.113     | 0.728            | 0.431            | 0.841              |
|          | Level 4         | Left Edge<br>10mm  | 0.046           | 0.156   | 0.047     | 0.202            | 0.093            | 0.249              |
|          | Level 4         | Right Edge<br>10mm | 0.095           | 0.034   | 0.000     | 0.129            | 0.095            | 0.129              |
|          | Level 4         | Top Edge<br>10mm   | 0.513           | 0.392   | 0.034     | 0.905            | 0.547            | 0.939              |
| WCDMA B4 | Off             | Front Side<br>10mm | 0.657           | 0.262   | 0.107     | 0.919            | 0.764            | 1.026              |
|          | Off             | Back Side<br>10mm  | 0.793           | 0.410   | 0.113     | 1.203            | 0.906            | 1.316              |
|          | Off             | Left Edge<br>10mm  | 0.126           | 0.156   | 0.047     | 0.282            | 0.173            | 0.329              |
|          | Off             | Right Edge<br>10mm | 0.222           | 0.034   | 0.000     | 0.256            | 0.222            | 0.256              |
|          | Off             | Top Edge           | 0.870           | 0.392   | 0.034     | 1.262            | 0.904            | 1.296              |

|          |         |                    |       |       |       |       |       |       |
|----------|---------|--------------------|-------|-------|-------|-------|-------|-------|
|          |         | 10mm               |       |       |       |       |       |       |
| WCDMA B5 | Off     | Front Side<br>10mm | 0.082 | 0.262 | 0.107 | 0.344 | 0.189 | 0.451 |
|          | Off     | Back Side<br>10mm  | 0.104 | 0.410 | 0.113 | 0.514 | 0.217 | 0.627 |
|          | Off     | Left Edge<br>10mm  | 0.005 | 0.156 | 0.047 | 0.161 | 0.052 | 0.208 |
|          | Off     | Right Edge<br>10mm | 0.011 | 0.034 | 0.000 | 0.045 | 0.011 | 0.045 |
|          | Off     | Top Edge<br>10mm   | 0.096 | 0.392 | 0.034 | 0.488 | 0.130 | 0.522 |
| LTE B2   | Level 4 | Front Side<br>10mm | 0.392 | 0.262 | 0.107 | 0.654 | 0.499 | 0.761 |
|          | Level 4 | Back Side<br>10mm  | 0.435 | 0.410 | 0.113 | 0.845 | 0.548 | 0.958 |
|          | Level 4 | Left Edge<br>10mm  | 0.051 | 0.156 | 0.047 | 0.207 | 0.098 | 0.254 |
|          | Level 4 | Right Edge<br>10mm | 0.104 | 0.034 | 0.000 | 0.138 | 0.104 | 0.138 |
|          | Level 4 | Top Edge<br>10mm   | 0.645 | 0.392 | 0.034 | 1.037 | 0.679 | 1.071 |
| LTE B4   | Off     | Front Side<br>10mm | 0.728 | 0.262 | 0.107 | 0.990 | 0.835 | 1.097 |
|          | Off     | Back Side<br>10mm  | 0.662 | 0.410 | 0.113 | 1.072 | 0.775 | 1.185 |
|          | Off     | Left Edge<br>10mm  | 0.115 | 0.156 | 0.047 | 0.271 | 0.162 | 0.318 |
|          | Off     | Right Edge<br>10mm | 0.199 | 0.034 | 0.000 | 0.233 | 0.199 | 0.233 |
|          | Off     | Top Edge<br>10mm   | 0.772 | 0.392 | 0.034 | 1.164 | 0.806 | 1.198 |
| LTE B5   | Off     | Front Side<br>10mm | 0.083 | 0.262 | 0.107 | 0.345 | 0.190 | 0.452 |
|          | Off     | Back Side<br>10mm  | 0.123 | 0.410 | 0.113 | 0.533 | 0.236 | 0.646 |
|          | Off     | Left Edge<br>10mm  | 0.050 | 0.156 | 0.047 | 0.206 | 0.097 | 0.253 |
|          | Off     | Right Edge<br>10mm | 0.033 | 0.034 | 0.000 | 0.067 | 0.033 | 0.067 |
|          | Off     | Top Edge<br>10mm   | 0.081 | 0.392 | 0.034 | 0.473 | 0.115 | 0.507 |
| LTE B7   | Level 4 | Front Side<br>10mm | 0.300 | 0.262 | 0.107 | 0.562 | 0.407 | 0.669 |
|          | Level 4 | Back Side<br>10mm  | 0.591 | 0.410 | 0.113 | 1.001 | 0.704 | 1.114 |

|         |         |                    |       |       |       |       |       |       |
|---------|---------|--------------------|-------|-------|-------|-------|-------|-------|
|         | Level 4 | Left Edge<br>10mm  | 0.019 | 0.156 | 0.047 | 0.175 | 0.066 | 0.222 |
|         | Level 4 | Right Edge<br>10mm | 0.353 | 0.034 | 0.000 | 0.387 | 0.353 | 0.387 |
|         | Level 4 | Top Edge<br>10mm   | 0.576 | 0.392 | 0.034 | 0.968 | 0.610 | 1.002 |
| LTE B41 | Off     | Front Side<br>10mm | 0.291 | 0.262 | 0.107 | 0.553 | 0.398 | 0.660 |
|         | Off     | Back Side<br>10mm  | 0.477 | 0.410 | 0.113 | 0.887 | 0.590 | 1.000 |
|         | Off     | Left Edge<br>10mm  | 0.030 | 0.156 | 0.047 | 0.186 | 0.077 | 0.233 |
|         | Off     | Right Edge<br>10mm | 0.459 | 0.034 | 0.000 | 0.493 | 0.459 | 0.493 |
|         | Off     | Top Edge<br>10mm   | 0.425 | 0.392 | 0.034 | 0.817 | 0.459 | 0.851 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 1.5 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.7 Product Specific Simultaneous Transmission SAR Evaluation for WWAN Antenna Up with 5G WLAN and Bluetooth(10g)

| Band     | Power<br>Reduction | Position        | SUM SAR<br>WWAN+5G WIFI |         | SUM SAR<br>WWAN+5G WIFI |
|----------|--------------------|-----------------|-------------------------|---------|-------------------------|
|          |                    |                 | 1                       | 2       |                         |
|          |                    |                 | WWAN                    | 5G WIFI | Sum SAR<br>(1+2)        |
| WCDMA B2 | Level 4            | Front Side 10mm | 0.783                   | 0.332   | 1.115                   |
|          | Level 4            | Back Side 10mm  | 0.936                   | 0.265   | 1.201                   |
|          | Level 4            | Left Edge 10mm  | 0.057                   | 0.167   | 0.224                   |
|          | Level 4            | Right Edge 10mm | 0.191                   | 0.049   | 0.240                   |
|          | Level 4            | Top Edge 10mm   | 1.447                   | 0.375   | 1.822                   |
| LTE B2   | Level 4            | Front Side 10mm | 1.201                   | 0.332   | 1.533                   |
|          | Level 4            | Back Side 10mm  | 1.414                   | 0.265   | 1.679                   |
|          | Level 4            | Left Edge 10mm  | 0.083                   | 0.167   | 0.250                   |
|          | Level 4            | Right Edge 10mm | 0.261                   | 0.049   | 0.310                   |
|          | Level 4            | Top Edge 10mm   | 1.661                   | 0.375   | <b>2.036</b>            |
| LTE B7   | Level 4            | Front Side 10mm | 1.184                   | 0.332   | 1.516                   |
|          | Level 4            | Back Side 10mm  | 1.313                   | 0.265   | 1.578                   |
|          | Level 4            | Left Edge 10mm  | 0.253                   | 0.167   | 0.420                   |
|          | Level 4            | Right Edge 10mm | 0.849                   | 0.049   | 0.898                   |
|          | Level 4            | Top Edge 10mm   | 1.219                   | 0.375   | 1.594                   |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 10g SAR is 2.036 W/Kg < 4.0 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.8 Head Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 2.4G WLAN

| Band     | Power Reduction | Position    | Stand alone SAR |          | SUM SAR          |
|----------|-----------------|-------------|-----------------|----------|------------------|
|          |                 |             | 1               | 2        | WWAN+2.4G WIFI   |
|          |                 |             | WWAN            | 2.4GWIFI | Sum SAR<br>(1+2) |
| GSM 850  | Off             | Left Cheek  | 0.272           | 0.907    | <b>1.179</b>     |
|          | Off             | Left Tilt   | 0.100           | 0.769    | 0.869            |
|          | Off             | Right Cheek | 0.178           | 0.320    | 0.498            |
|          | Off             | Right Tilt  | 0.097           | 0.320    | 0.417            |
| GSM1900  | Off             | Left Cheek  | 0.051           | 0.907    | 0.958            |
|          | Off             | Left Tilt   | 0.037           | 0.769    | 0.806            |
|          | Off             | Right Cheek | 0.045           | 0.320    | 0.365            |
|          | Off             | Right Tilt  | 0.037           | 0.320    | 0.357            |
| WCDMA B2 | Off             | Left Cheek  | 0.120           | 0.907    | 1.027            |
|          | Off             | Left Tilt   | 0.105           | 0.769    | 0.874            |
|          | Off             | Right Cheek | 0.175           | 0.320    | 0.495            |
|          | Off             | Right Tilt  | 0.129           | 0.320    | 0.449            |
| WCDMA B4 | Off             | Left Cheek  | 0.105           | 0.907    | 1.012            |
|          | Off             | Left Tilt   | 0.124           | 0.769    | 0.893            |
|          | Off             | Right Cheek | 0.170           | 0.320    | 0.490            |
|          | Off             | Right Tilt  | 0.137           | 0.320    | 0.457            |
| WCDMA B5 | Off             | Left Cheek  | 0.217           | 0.907    | 1.124            |
|          | Off             | Left Tilt   | 0.102           | 0.769    | 0.871            |
|          | Off             | Right Cheek | 0.197           | 0.320    | 0.517            |
|          | Off             | Right Tilt  | 0.107           | 0.320    | 0.427            |
| LTE B2   | Off             | Left Cheek  | 0.074           | 0.907    | 0.981            |
|          | Off             | Left Tilt   | 0.078           | 0.769    | 0.847            |
|          | Off             | Right Cheek | 0.137           | 0.320    | 0.457            |
|          | Off             | Right Tilt  | 0.071           | 0.320    | 0.391            |
| LTE B4   | Off             | Left Cheek  | 0.095           | 0.907    | 1.002            |
|          | Off             | Left Tilt   | 0.116           | 0.769    | 0.885            |
|          | Off             | Right Cheek | 0.153           | 0.320    | 0.473            |
|          | Off             | Right Tilt  | 0.118           | 0.320    | 0.438            |
| LTE B5   | Off             | Left Cheek  | 0.223           | 0.907    | 1.130            |
|          | Off             | Left Tilt   | 0.097           | 0.769    | 0.866            |
|          | Off             | Right Cheek | 0.184           | 0.320    | 0.504            |
|          | Off             | Right Tilt  | 0.088           | 0.320    | 0.408            |
| LTE B7   | Off             | Left Cheek  | 0.073           | 0.907    | 0.980            |
|          | Off             | Left Tilt   | 0.099           | 0.769    | 0.868            |
|          | Off             | Right Cheek | 0.130           | 0.320    | 0.450            |

|         |     |             |       |       |       |
|---------|-----|-------------|-------|-------|-------|
|         | Off | Right Tilt  | 0.073 | 0.320 | 0.393 |
| LTE B41 | Off | Left Cheek  | 0.084 | 0.907 | 0.991 |
|         | Off | Left Tilt   | 0.068 | 0.769 | 0.837 |
|         | Off | Right Cheek | 0.132 | 0.320 | 0.452 |
|         | Off | Right Tilt  | 0.065 | 0.320 | 0.385 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 1.179 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.9 Head Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position    | Stand alone SAR |         |           | SUM SAR<br>WWAN+5G<br>WIFI | SUM SAR<br>WWAN+Bluetooth | SUM SAR<br>WWAN+5G+Bluetooth |
|----------|-----------------|-------------|-----------------|---------|-----------|----------------------------|---------------------------|------------------------------|
|          |                 |             | 1               | 2       | 3         |                            |                           |                              |
|          |                 |             | WWAN            | 5G WIFI | Bluetooth | Sum SAR<br>(1+2)           | Sum SAR<br>(1+3)          | Sum SAR<br>(1+2+3)           |
| GSM 850  | Off             | Left Cheek  | 0.272           | 0.691   | 0.242     | 0.963                      | 0.514                     | <b>1.205</b>                 |
|          | Off             | Left Tilt   | 0.100           | 0.747   | 0.211     | 0.847                      | 0.311                     | 1.058                        |
|          | Off             | Right Cheek | 0.178           | 0.632   | 0.093     | 0.810                      | 0.271                     | 0.903                        |
|          | Off             | Right Tilt  | 0.097           | 0.663   | 0.084     | 0.760                      | 0.181                     | 0.844                        |
| GSM1900  | Off             | Left Cheek  | 0.051           | 0.691   | 0.265     | 0.742                      | 0.316                     | 1.007                        |
|          | Off             | Left Tilt   | 0.037           | 0.747   | 0.211     | 0.784                      | 0.248                     | 0.995                        |
|          | Off             | Right Cheek | 0.045           | 0.632   | 0.093     | 0.677                      | 0.138                     | 0.770                        |
|          | Off             | Right Tilt  | 0.037           | 0.663   | 0.084     | 0.700                      | 0.121                     | 0.784                        |
| WCDMA B2 | Off             | Left Cheek  | 0.120           | 0.691   | 0.265     | 0.811                      | 0.385                     | 1.076                        |
|          | Off             | Left Tilt   | 0.105           | 0.747   | 0.211     | 0.852                      | 0.316                     | 1.063                        |
|          | Off             | Right Cheek | 0.175           | 0.632   | 0.093     | 0.807                      | 0.268                     | 0.900                        |
|          | Off             | Right Tilt  | 0.129           | 0.663   | 0.084     | 0.792                      | 0.213                     | 0.876                        |
| WCDMA B4 | Off             | Left Cheek  | 0.105           | 0.691   | 0.265     | 0.796                      | 0.370                     | 1.061                        |
|          | Off             | Left Tilt   | 0.124           | 0.747   | 0.211     | 0.871                      | 0.335                     | 1.082                        |
|          | Off             | Right Cheek | 0.170           | 0.632   | 0.093     | 0.802                      | 0.263                     | 0.895                        |
|          | Off             | Right Tilt  | 0.137           | 0.663   | 0.084     | 0.800                      | 0.221                     | 0.884                        |
| WCDMA B5 | Off             | Left Cheek  | 0.217           | 0.691   | 0.265     | 0.908                      | 0.482                     | 1.173                        |
|          | Off             | Left Tilt   | 0.102           | 0.747   | 0.211     | 0.849                      | 0.313                     | 1.060                        |
|          | Off             | Right Cheek | 0.197           | 0.632   | 0.093     | 0.829                      | 0.290                     | 0.922                        |
|          | Off             | Right Tilt  | 0.107           | 0.663   | 0.084     | 0.770                      | 0.191                     | 0.854                        |
| LTE B2   | Off             | Left Cheek  | 0.074           | 0.691   | 0.265     | 0.765                      | 0.339                     | 1.030                        |
|          | Off             | Left Tilt   | 0.078           | 0.747   | 0.211     | 0.825                      | 0.289                     | 1.036                        |
|          | Off             | Right Cheek | 0.137           | 0.632   | 0.093     | 0.769                      | 0.230                     | 0.862                        |
|          | Off             | Right Tilt  | 0.071           | 0.663   | 0.084     | 0.734                      | 0.155                     | 0.818                        |
| LTE B4   | Off             | Left Cheek  | 0.095           | 0.691   | 0.265     | 0.786                      | 0.360                     | 1.051                        |
|          | Off             | Left Tilt   | 0.116           | 0.747   | 0.211     | 0.863                      | 0.327                     | 1.074                        |
|          | Off             | Right Cheek | 0.153           | 0.632   | 0.093     | 0.785                      | 0.246                     | 0.878                        |



|         |     |             |       |       |       |       |       |       |
|---------|-----|-------------|-------|-------|-------|-------|-------|-------|
|         | Off | Right Tilt  | 0.118 | 0.663 | 0.084 | 0.781 | 0.202 | 0.865 |
| LTE B5  | Off | Left Cheek  | 0.223 | 0.691 | 0.265 | 0.914 | 0.488 | 1.179 |
|         | Off | Left Tilt   | 0.097 | 0.747 | 0.211 | 0.844 | 0.308 | 1.055 |
|         | Off | Right Cheek | 0.184 | 0.632 | 0.093 | 0.816 | 0.277 | 0.909 |
|         | Off | Right Tilt  | 0.088 | 0.663 | 0.084 | 0.751 | 0.172 | 0.835 |
| LTE B7  | Off | Left Cheek  | 0.073 | 0.691 | 0.265 | 0.764 | 0.338 | 1.029 |
|         | Off | Left Tilt   | 0.099 | 0.747 | 0.211 | 0.846 | 0.310 | 1.057 |
|         | Off | Right Cheek | 0.130 | 0.632 | 0.093 | 0.762 | 0.223 | 0.855 |
|         | Off | Right Tilt  | 0.073 | 0.663 | 0.084 | 0.736 | 0.157 | 0.820 |
| LTE B41 | Off | Left Cheek  | 0.084 | 0.691 | 0.265 | 0.775 | 0.349 | 1.040 |
|         | Off | Left Tilt   | 0.068 | 0.747 | 0.211 | 0.815 | 0.279 | 1.026 |
|         | Off | Right Cheek | 0.132 | 0.632 | 0.093 | 0.764 | 0.225 | 0.857 |
|         | Off | Right Tilt  | 0.065 | 0.663 | 0.084 | 0.728 | 0.149 | 0.812 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 1.205 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.10 Body-worn Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 2.4G WLAN

| Band     | Power Reduction | Position        | Stand alone SAR |          | SUM SAR          |
|----------|-----------------|-----------------|-----------------|----------|------------------|
|          |                 |                 | 1               | 2        | WWAN+2.4G WIFI   |
|          |                 |                 | WWAN            | 2.4GWIFI | Sum SAR<br>(1+2) |
| GSM 850  | Off             | Front Side 15mm | 0.175           | 0.101    | 0.276            |
|          | Off             | Back Side 15mm  | 0.191           | 0.256    | 0.447            |
| GSM1900  | Off             | Front Side 15mm | 0.140           | 0.101    | 0.241            |
|          | Off             | Back Side 15mm  | 0.226           | 0.256    | 0.482            |
| WCDMA B2 | Off             | Front Side 15mm | 0.165           | 0.101    | 0.266            |
|          | Off             | Back Side 15mm  | 0.373           | 0.256    | 0.629            |
| WCDMA B4 | Off             | Front Side 15mm | 0.164           | 0.101    | 0.265            |
|          | Off             | Back Side 15mm  | 0.320           | 0.256    | 0.576            |
| WCDMA B5 | Off             | Front Side 15mm | 0.189           | 0.101    | 0.290            |
|          | Off             | Back Side 15mm  | 0.225           | 0.256    | 0.481            |
| LTE B2   | Off             | Front Side 15mm | 0.226           | 0.101    | 0.327            |
|          | Off             | Back Side 15mm  | 0.385           | 0.256    | <b>0.641</b>     |
| LTE B4   | Off             | Front Side 15mm | 0.151           | 0.101    | 0.252            |
|          | Off             | Back Side 15mm  | 0.303           | 0.256    | 0.559            |
| LTE B5   | Off             | Front Side 15mm | 0.188           | 0.101    | 0.289            |
|          | Off             | Back Side 15mm  | 0.220           | 0.256    | 0.476            |
| LTE B7   | Off             | Front Side 15mm | 0.241           | 0.101    | 0.342            |
|          | Off             | Back Side 15mm  | 0.228           | 0.256    | 0.484            |
| LTE B41  | Off             | Front Side 15mm | 0.128           | 0.101    | 0.229            |
|          | Off             | Back Side 15mm  | 0.219           | 0.256    | 0.475            |

**Note:**

- 1: Only the worst simultaneous transmission combinations was shown in this table.
- 2: The highest Combined 1g SAR is 0.641 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.11 Body-worn Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position           | Stand alone SAR |         |           | SUM SAR<br>WWAN+5G<br>WIFI | SUM SAR<br>WWAN+Bluetooth | SUM SAR<br>WWAN+5G+Bluetooth |
|----------|-----------------|--------------------|-----------------|---------|-----------|----------------------------|---------------------------|------------------------------|
|          |                 |                    | 1               | 2       | 3         |                            |                           |                              |
|          |                 |                    | WWAN            | 5G WIFI | Bluetooth | Sum SAR<br>(1+2)           | Sum SAR<br>(1+3)          | Sum SAR<br>(1+2+3)           |
| GSM 850  | Off             | Front Side<br>15mm | 0.175           | 0.171   | 0.040     | 0.346                      | 0.215                     | 0.386                        |
|          | Off             | Back Side<br>15mm  | 0.191           | 0.212   | 0.056     | 0.403                      | 0.247                     | 0.459                        |
| GSM1900  | Off             | Front Side<br>15mm | 0.140           | 0.171   | 0.040     | 0.311                      | 0.180                     | 0.351                        |
|          | Off             | Back Side<br>15mm  | 0.226           | 0.212   | 0.056     | 0.438                      | 0.282                     | 0.494                        |
| WCDMA B2 | Off             | Front Side<br>15mm | 0.165           | 0.171   | 0.040     | 0.336                      | 0.205                     | 0.376                        |
|          | Off             | Back Side<br>15mm  | 0.373           | 0.212   | 0.056     | 0.585                      | 0.429                     | 0.641                        |
| WCDMA B4 | Off             | Front Side<br>15mm | 0.164           | 0.171   | 0.040     | 0.335                      | 0.204                     | 0.375                        |
|          | Off             | Back Side<br>15mm  | 0.320           | 0.212   | 0.056     | 0.532                      | 0.376                     | 0.588                        |
| WCDMA B5 | Off             | Front Side<br>15mm | 0.189           | 0.171   | 0.040     | 0.360                      | 0.229                     | 0.400                        |
|          | Off             | Back Side<br>15mm  | 0.225           | 0.212   | 0.056     | 0.437                      | 0.281                     | 0.493                        |
| LTE B2   | Off             | Front Side<br>15mm | 0.226           | 0.171   | 0.040     | 0.397                      | 0.266                     | 0.437                        |
|          | Off             | Back Side<br>15mm  | 0.385           | 0.212   | 0.056     | 0.597                      | 0.441                     | <b>0.653</b>                 |
| LTE B4   | Off             | Front Side<br>15mm | 0.151           | 0.171   | 0.040     | 0.322                      | 0.191                     | 0.362                        |
|          | Off             | Back Side<br>15mm  | 0.303           | 0.212   | 0.056     | 0.515                      | 0.359                     | 0.571                        |
| LTE B5   | Off             | Front Side<br>15mm | 0.188           | 0.171   | 0.040     | 0.359                      | 0.228                     | 0.399                        |
|          | Off             | Back Side<br>15mm  | 0.220           | 0.212   | 0.056     | 0.432                      | 0.276                     | 0.488                        |
| LTE B7   | Off             | Front Side<br>15mm | 0.241           | 0.171   | 0.040     | 0.412                      | 0.281                     | 0.452                        |
|          | Off             | Back Side<br>15mm  | 0.228           | 0.212   | 0.056     | 0.440                      | 0.284                     | 0.496                        |
| LTE B41  | Off             | Front Side<br>15mm | 0.128           | 0.171   | 0.040     | 0.299                      | 0.168                     | 0.339                        |

|  |     |                   |       |       |       |       |       |       |
|--|-----|-------------------|-------|-------|-------|-------|-------|-------|
|  | Off | Back Side<br>15mm | 0.219 | 0.212 | 0.056 | 0.431 | 0.275 | 0.487 |
|--|-----|-------------------|-------|-------|-------|-------|-------|-------|

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 0.653 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.12 Hotspot Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 2.4G WLAN

| Band     | Power Reduction | Position         | Stand alone SAR |          | SUM SAR<br>WWAN+2.4G WIFI |
|----------|-----------------|------------------|-----------------|----------|---------------------------|
|          |                 |                  | 1               | 2        | Sum SAR<br>(1+2)          |
|          |                 |                  | WWAN            | 2.4GWIFI |                           |
| GSM 850  | Off             | Front Side 10mm  | 0.329           | 0.151    | 0.480                     |
|          | Off             | Back Side 10mm   | 0.349           | 0.460    | 0.809                     |
|          | Off             | Left Edge 10mm   | 0.105           | 0.235    | 0.340                     |
|          | Off             | Right Edge 10mm  | 0.217           | 0.000    | 0.217                     |
|          | Off             | Bottom Edge 10mm | 0.370           | 0.179    | 0.549                     |
| GSM1900  | Off             | Front Side 10mm  | 0.213           | 0.151    | 0.364                     |
|          | Off             | Back Side 10mm   | 0.507           | 0.460    | 0.967                     |
|          | Off             | Left Edge 10mm   | 0.096           | 0.235    | 0.331                     |
|          | Off             | Right Edge 10mm  | 0.037           | 0.000    | 0.037                     |
|          | Off             | Bottom Edge 10mm | 0.545           | 0.179    | 0.724                     |
| WCDMA B2 | Off             | Front Side 10mm  | 0.303           | 0.151    | 0.454                     |
|          | Off             | Back Side 10mm   | 0.773           | 0.460    | <b>1.233</b>              |
|          | Off             | Left Edge 10mm   | 0.144           | 0.235    | 0.379                     |
|          | Off             | Right Edge 10mm  | 0.074           | 0.000    | 0.074                     |
|          | Off             | Bottom Edge 10mm | 0.846           | 0.179    | 1.025                     |
| WCDMA B4 | Off             | Front Side 10mm  | 0.307           | 0.151    | 0.458                     |
|          | Off             | Back Side 10mm   | 0.674           | 0.460    | 1.134                     |
|          | Off             | Left Edge 10mm   | 0.201           | 0.235    | 0.436                     |
|          | Off             | Right Edge 10mm  | 0.142           | 0.000    | 0.142                     |
|          | Off             | Bottom Edge 10mm | 0.767           | 0.179    | 0.946                     |
| WCDMA B5 | Off             | Front Side 10mm  | 0.275           | 0.151    | 0.426                     |
|          | Off             | Back Side 10mm   | 0.262           | 0.460    | 0.722                     |
|          | Off             | Left Edge 10mm   | 0.136           | 0.235    | 0.371                     |
|          | Off             | Right Edge 10mm  | 0.273           | 0.000    | 0.273                     |
|          | Off             | Bottom Edge 10mm | 0.283           | 0.179    | 0.462                     |
| LTE B2   | Off             | Front Side 10mm  | 0.263           | 0.151    | 0.414                     |
|          | Off             | Back Side 10mm   | 0.646           | 0.460    | 1.106                     |
|          | Off             | Left Edge 10mm   | 0.132           | 0.235    | 0.367                     |
|          | Off             | Right Edge 10mm  | 0.068           | 0.000    | 0.068                     |
|          | Off             | Bottom Edge 10mm | 0.598           | 0.179    | 0.777                     |
| LTE B4   | Off             | Front Side 10mm  | 0.292           | 0.151    | 0.443                     |

|         |     |                  |       |       |       |
|---------|-----|------------------|-------|-------|-------|
|         | Off | Back Side 10mm   | 0.577 | 0.460 | 1.037 |
|         | Off | Left Edge 10mm   | 0.180 | 0.235 | 0.415 |
|         | Off | Right Edge 10mm  | 0.123 | 0.000 | 0.123 |
|         | Off | Bottom Edge 10mm | 0.674 | 0.179 | 0.853 |
| LTE B5  | Off | Front Side 10mm  | 0.336 | 0.151 | 0.487 |
|         | Off | Back Side 10mm   | 0.308 | 0.460 | 0.768 |
|         | Off | Left Edge 10mm   | 0.129 | 0.235 | 0.364 |
|         | Off | Right Edge 10mm  | 0.275 | 0.000 | 0.275 |
|         | Off | Bottom Edge 10mm | 0.341 | 0.179 | 0.520 |
| LTE B7  | Off | Front Side 10mm  | 0.383 | 0.151 | 0.534 |
|         | Off | Back Side 10mm   | 0.437 | 0.460 | 0.897 |
|         | Off | Left Edge 10mm   | 0.302 | 0.235 | 0.537 |
|         | Off | Right Edge 10mm  | 0.080 | 0.000 | 0.080 |
|         | Off | Bottom Edge 10mm | 0.248 | 0.179 | 0.427 |
| LTE B41 | Off | Front Side 10mm  | 0.246 | 0.151 | 0.397 |
|         | Off | Back Side 10mm   | 0.461 | 0.460 | 0.921 |
|         | Off | Left Edge 10mm   | 0.257 | 0.235 | 0.492 |
|         | Off | Right Edge 10mm  | 0.014 | 0.000 | 0.014 |
|         | Off | Bottom Edge 10mm | 0.177 | 0.179 | 0.356 |

Note:

1: Only the worst simultaneous transmission combinations was shown in this table.

2: The highest Combined 1g SAR is 1.233 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

### 12.2.13 Hotspot Simultaneous Transmission SAR Evaluation for WWAN Antenna Down with 5G WLAN and Bluetooth

| Band     | Power Reduction | Position            | Stand alone SAR |         |           | SUM SAR<br>WWAN+5G<br>WIFI | SUM SAR<br>WWAN+Bluetooth | SUM SAR<br>WWAN+5G+Bluetooth |
|----------|-----------------|---------------------|-----------------|---------|-----------|----------------------------|---------------------------|------------------------------|
|          |                 |                     | 1               | 2       | 3         |                            |                           |                              |
|          |                 |                     | WWAN            | 5G WIFI | Bluetooth | Sum SAR<br>(1+2)           | Sum SAR<br>(1+3)          | Sum SAR<br>(1+2+3)           |
| GSM 850  | Off             | Front Side<br>10mm  | 0.329           | 0.262   | 0.107     | 0.591                      | 0.436                     | 0.698                        |
|          | Off             | Back Side<br>10mm   | 0.349           | 0.410   | 0.113     | 0.759                      | 0.462                     | 0.872                        |
|          | Off             | Left Edge<br>10mm   | 0.105           | 0.156   | 0.047     | 0.261                      | 0.152                     | 0.308                        |
|          | Off             | Right Edge<br>10mm  | 0.217           | 0.034   | 0.000     | 0.251                      | 0.217                     | 0.251                        |
|          | Off             | Bottom Edge<br>10mm | 0.370           | 0.392   | 0.034     | 0.762                      | 0.404                     | 0.796                        |
| GSM1900  | Off             | Front Side<br>10mm  | 0.213           | 0.262   | 0.107     | 0.475                      | 0.320                     | 0.582                        |
|          | Off             | Back Side<br>10mm   | 0.507           | 0.410   | 0.113     | 0.917                      | 0.620                     | 1.030                        |
|          | Off             | Left Edge<br>10mm   | 0.096           | 0.156   | 0.047     | 0.252                      | 0.143                     | 0.299                        |
|          | Off             | Right Edge<br>10mm  | 0.037           | 0.034   | 0.000     | 0.071                      | 0.037                     | 0.071                        |
|          | Off             | Bottom Edge<br>10mm | 0.545           | 0.392   | 0.034     | 0.937                      | 0.579                     | 0.971                        |
| WCDMA B2 | Off             | Front Side<br>10mm  | 0.303           | 0.262   | 0.107     | 0.565                      | 0.410                     | 0.672                        |
|          | Off             | Back Side<br>10mm   | 0.773           | 0.410   | 0.113     | 1.183                      | 0.886                     | <b>1.296</b>                 |
|          | Off             | Left Edge<br>10mm   | 0.144           | 0.156   | 0.047     | 0.300                      | 0.191                     | 0.347                        |
|          | Off             | Right Edge<br>10mm  | 0.074           | 0.034   | 0.000     | 0.108                      | 0.074                     | 0.108                        |
|          | Off             | Bottom Edge<br>10mm | 0.846           | 0.392   | 0.034     | 1.238                      | 0.880                     | 1.272                        |
| WCDMA B4 | Off             | Front Side<br>10mm  | 0.307           | 0.262   | 0.107     | 0.569                      | 0.414                     | 0.676                        |
|          | Off             | Back Side<br>10mm   | 0.674           | 0.410   | 0.113     | 1.084                      | 0.787                     | 1.197                        |
|          | Off             | Left Edge<br>10mm   | 0.201           | 0.156   | 0.047     | 0.357                      | 0.248                     | 0.404                        |
|          | Off             | Right Edge<br>10mm  | 0.142           | 0.034   | 0.000     | 0.176                      | 0.142                     | 0.176                        |

|          |     |                     |       |       |       |       |       |       |
|----------|-----|---------------------|-------|-------|-------|-------|-------|-------|
|          | Off | Bottom Edge<br>10mm | 0.767 | 0.392 | 0.034 | 1.159 | 0.801 | 1.193 |
| WCDMA B5 | Off | Front Side<br>10mm  | 0.275 | 0.262 | 0.107 | 0.537 | 0.382 | 0.644 |
|          | Off | Back Side<br>10mm   | 0.262 | 0.410 | 0.113 | 0.672 | 0.375 | 0.785 |
|          | Off | Left Edge<br>10mm   | 0.136 | 0.156 | 0.047 | 0.292 | 0.183 | 0.339 |
|          | Off | Right Edge<br>10mm  | 0.273 | 0.034 | 0.000 | 0.307 | 0.273 | 0.307 |
|          | Off | Bottom Edge<br>10mm | 0.283 | 0.392 | 0.034 | 0.675 | 0.317 | 0.709 |
|          |     |                     |       |       |       |       |       |       |
| LTE B2   | Off | Front Side<br>10mm  | 0.263 | 0.262 | 0.107 | 0.525 | 0.370 | 0.632 |
|          | Off | Back Side<br>10mm   | 0.646 | 0.410 | 0.113 | 1.056 | 0.759 | 1.169 |
|          | Off | Left Edge<br>10mm   | 0.132 | 0.156 | 0.047 | 0.288 | 0.179 | 0.335 |
|          | Off | Right Edge<br>10mm  | 0.068 | 0.034 | 0.000 | 0.102 | 0.068 | 0.102 |
|          | Off | Bottom Edge<br>10mm | 0.598 | 0.392 | 0.034 | 0.990 | 0.632 | 1.024 |
| LTE B4   | Off | Front Side<br>10mm  | 0.292 | 0.262 | 0.107 | 0.554 | 0.399 | 0.661 |
|          | Off | Back Side<br>10mm   | 0.577 | 0.410 | 0.113 | 0.987 | 0.690 | 1.100 |
|          | Off | Left Edge<br>10mm   | 0.180 | 0.156 | 0.047 | 0.336 | 0.227 | 0.383 |
|          | Off | Right Edge<br>10mm  | 0.123 | 0.034 | 0.000 | 0.157 | 0.123 | 0.157 |
|          | Off | Bottom Edge<br>10mm | 0.674 | 0.392 | 0.034 | 1.066 | 0.708 | 1.100 |
| LTE B5   | Off | Front Side<br>10mm  | 0.336 | 0.262 | 0.107 | 0.598 | 0.443 | 0.705 |
|          | Off | Back Side<br>10mm   | 0.308 | 0.410 | 0.113 | 0.718 | 0.421 | 0.831 |
|          | Off | Left Edge<br>10mm   | 0.129 | 0.156 | 0.047 | 0.285 | 0.176 | 0.332 |
|          | Off | Right Edge<br>10mm  | 0.275 | 0.034 | 0.000 | 0.309 | 0.275 | 0.309 |
|          | Off | Bottom Edge<br>10mm | 0.341 | 0.392 | 0.034 | 0.733 | 0.375 | 0.767 |
| LTE B7   | Off | Front Side<br>10mm  | 0.383 | 0.262 | 0.107 | 0.645 | 0.490 | 0.752 |
|          | Off | Back Side           | 0.437 | 0.410 | 0.113 | 0.847 | 0.550 | 0.960 |

|         |     |                     |       |       |       |       |       |       |
|---------|-----|---------------------|-------|-------|-------|-------|-------|-------|
|         |     | 10mm                |       |       |       |       |       |       |
|         | Off | Left Edge<br>10mm   | 0.302 | 0.156 | 0.047 | 0.458 | 0.349 | 0.505 |
|         | Off | Right Edge<br>10mm  | 0.080 | 0.034 | 0.000 | 0.114 | 0.080 | 0.114 |
|         | Off | Bottom Edge<br>10mm | 0.248 | 0.392 | 0.034 | 0.640 | 0.282 | 0.674 |
| LTE B41 | Off | Front Side<br>10mm  | 0.246 | 0.262 | 0.107 | 0.508 | 0.353 | 0.615 |
|         | Off | Back Side<br>10mm   | 0.461 | 0.410 | 0.113 | 0.871 | 0.574 | 0.984 |
|         | Off | Left Edge<br>10mm   | 0.257 | 0.156 | 0.047 | 0.413 | 0.304 | 0.460 |
|         | Off | Right Edge<br>10mm  | 0.014 | 0.034 | 0.000 | 0.048 | 0.014 | 0.048 |
|         | Off | Bottom Edge<br>10mm | 0.177 | 0.392 | 0.034 | 0.569 | 0.211 | 0.603 |



## 13 TEST EQUIPMENTS LIST

| Description                     | Manufacturer | Model       | Serial No./Version | Cal. Date  | Cal. Due   |
|---------------------------------|--------------|-------------|--------------------|------------|------------|
| PC                              | Dell         | N/A         | N/A                | N/A        | N/A        |
| Test Software                   | Speag        | DASY5       | 52.8.8.1222        | N/A        | N/A        |
| 835MHz Validation Dipole        | Speag        | D835V2      | SN: 4d187          | 2017/06/26 | 2020/06/25 |
| 1750MHz Validation Dipole       | Speag        | D1750V2     | SN: 1130           | 2017/07/01 | 2020/06/30 |
| 1900MHz Validation Dipole       | Speag        | D1900V2     | SN: 5d193          | 2017/06/30 | 2020/06/29 |
| 2450MHz Validation Dipole       | Speag        | D2450V2     | SN: 952            | 2017/03/21 | 2020/03/20 |
| 2600MHz Validation Dipole       | Speag        | D2600V2     | SN: 1095           | 2017/07/10 | 2020/07/09 |
| 5GHz Validation Dipole          | Speag        | D5GHzV2     | SN: 1200           | 2017/06/29 | 2020/06/28 |
| E-Field Probe                   | Speag        | EX3DV4      | SN: 7510           | 2019/08/02 | 2020/08/01 |
| Data Acquisition Electronics    | Speag        | DAE4        | SN: 1454           | 2019/08/02 | 2020/08/01 |
| Signal Generator                | R&S          | SMBV100A    | 260592             | 2019/06/13 | 2020/06/12 |
| Power Meter                     | R&S          | NRVD-B2     | 7250BJ-0112/2011   | 2019/10/30 | 2020/10/29 |
| Power Sensor                    | R&S          | NRV-Z4      | 100381             | 2019/10/30 | 2020/10/29 |
| Power Sensor                    | R&S          | NRV-Z2      | 100211             | 2019/10/30 | 2020/10/29 |
| Wireless Communication Test Set | Agilent      | 8960-E5515C | MY50260493         | 2019/10/30 | 2020/10/29 |
| Wireless Communication Test Set | R&S          | CMW 500     | 104946             | 2019/10/30 | 2020/10/29 |
| Network Analyzer                | R&S          | ZVL-6       | 101380             | 2019/06/20 | 2020/06/19 |
| Thermometer                     | Elitech      | RC-4HC      | N/A                | 2019/11/02 | 2020/11/01 |
| Power Amplifier                 | SATIMO       | 6552B       | 22374              | N/A        | N/A        |
| Dielectric Probe Kit            | SATIMO       | SCLMP       | SN 25/13 OCPG56    | N/A        | N/A        |
| Phantom1                        | Speag        | SAM         | SN: 1859           | N/A        | N/A        |
| Phantom2                        | Speag        | SAM         | SN: 1857           | N/A        | N/A        |
| Attenuator                      | COM-MW       | ZA-S1-31    | 1305003187         | N/A        | N/A        |
| Directional coupler             | AA-MCS       | AAMCS-UDC   | 000272             | N/A        | N/A        |

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

| Date       | Liquid Type | Fre. (MHz) | Temp. (°C) | Meas. Conductivity ( $\sigma$ ) (S/m) | Meas. Permittivity ( $\epsilon$ ) | Target Conductivity ( $\sigma$ ) (S/m) | Target Permittivity ( $\epsilon$ ) | Conductivity Tolerance (%) | Permittivity Tolerance (%) |
|------------|-------------|------------|------------|---------------------------------------|-----------------------------------|----------------------------------------|------------------------------------|----------------------------|----------------------------|
| 2019.11.18 | Head        | 835        | 21.3       | 0.91                                  | 41.44                             | 0.90                                   | 41.50                              | 1.11                       | -0.14                      |
| 2019.11.19 | Body        | 835        | 21.8       | 0.98                                  | 55.71                             | 0.97                                   | 55.20                              | 1.03                       | 0.92                       |
| 2019.11.20 | Body        | 835        | 21.3       | 0.98                                  | 55.35                             | 0.97                                   | 55.20                              | 1.03                       | 0.27                       |
| 2019.11.21 | Head        | 1750       | 21.5       | 1.37                                  | 39.33                             | 1.37                                   | 40.08                              | 0.00                       | -1.87                      |
| 2019.11.22 | Head        | 1750       | 21.5       | 1.39                                  | 39.77                             | 1.37                                   | 40.08                              | 1.46                       | -0.77                      |
| 2019.11.23 | Body        | 1750       | 21.5       | 1.50                                  | 53.79                             | 1.49                                   | 53.43                              | 0.67                       | 0.67                       |
| 2019.11.24 | Body        | 1750       | 21.6       | 1.53                                  | 54.05                             | 1.49                                   | 53.43                              | 2.68                       | 1.16                       |
| 2019.11.25 | Head        | 1900       | 21.7       | 1.42                                  | 39.39                             | 1.40                                   | 40.00                              | 1.43                       | -1.53                      |
| 2019.11.26 | Head        | 1900       | 21.5       | 1.44                                  | 38.97                             | 1.40                                   | 40.00                              | 2.86                       | -2.58                      |
| 2019.11.27 | Head        | 1900       | 21.8       | 1.42                                  | 38.83                             | 1.40                                   | 40.00                              | 1.43                       | -2.93                      |
| 2019.11.28 | Body        | 1900       | 21.2       | 1.54                                  | 53.42                             | 1.52                                   | 53.30                              | 1.32                       | 0.23                       |
| 2019.11.30 | Body        | 1900       | 21.1       | 1.55                                  | 53.44                             | 1.52                                   | 53.30                              | 1.97                       | 0.26                       |
| 2019.11.39 | Body        | 1900       | 21.1       | 1.55                                  | 53.78                             | 1.52                                   | 53.30                              | 1.97                       | 0.90                       |
| 2019.12.09 | Head        | 2450       | 21.8       | 1.82                                  | 38.28                             | 1.80                                   | 39.20                              | 1.11                       | -2.35                      |
| 2019.12.10 | Body        | 2450       | 21.0       | 1.97                                  | 52.74                             | 1.95                                   | 52.70                              | 1.03                       | 0.08                       |
| 2019.12.05 | Head        | 2600       | 21.7       | 2.02                                  | 38.85                             | 1.96                                   | 39.01                              | 3.06                       | -0.41                      |
| 2019.12.06 | Head        | 2600       | 21.2       | 1.99                                  | 37.95                             | 1.96                                   | 39.01                              | 1.53                       | -2.72                      |
| 2019.12.07 | Body        | 2600       | 21.2       | 2.20                                  | 52.14                             | 2.16                                   | 52.51                              | 1.85                       | -0.70                      |
| 2019.12.08 | Body        | 2600       | 21.4       | 2.20                                  | 50.66                             | 2.16                                   | 52.51                              | 1.85                       | -3.52                      |
| 2019.12.01 | Head        | 5250       | 21.5       | 4.75                                  | 36.35                             | 4.71                                   | 35.93                              | 0.85                       | 1.17                       |
| 2019.12.03 | Body        | 5250       | 21.8       | 5.39                                  | 49.03                             | 5.36                                   | 48.95                              | 0.56                       | 0.16                       |
| 2019.12.02 | Head        | 5600       | 21.7       | 5.11                                  | 35.21                             | 5.07                                   | 35.53                              | 0.79                       | -0.90                      |
| 2019.12.04 | Body        | 5600       | 21.6       | 5.86                                  | 48.16                             | 5.77                                   | 48.47                              | 1.56                       | -0.64                      |
| 2019.12.02 | Head        | 5750       | 21.7       | 5.36                                  | 34.61                             | 5.22                                   | 35.36                              | 2.68                       | -2.12                      |
| 2019.12.04 | Body        | 5750       | 21.6       | 6.14                                  | 47.35                             | 5.94                                   | 48.27                              | 3.37                       | -1.91                      |

Note: The tolerance limit of Conductivity and Permittivity is  $\pm 5\%$ .

## ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g Head and Body SAR).

| Date       | Liquid Type | Freq. (MHz) | Power (mW) | Measured SAR (W/kg) | Normalized SAR (W/kg) | Dipole SAR (W/kg) | Tolerance (%) | Targeted SAR(W/kg) | Tolerance (%) |
|------------|-------------|-------------|------------|---------------------|-----------------------|-------------------|---------------|--------------------|---------------|
| 2019.11.18 | Head        | 835         | 100        | 0.937               | 9.37                  | 9.75              | -3.90         | 9.56               | -1.99         |
| 2019.11.19 | Body        | 835         | 100        | 0.972               | 9.72                  | 9.53              | 1.99          | 9.56               | 1.67          |
| 2019.11.20 | Body        | 835         | 100        | 0.978               | 9.78                  | 9.53              | 2.62          | 9.56               | 2.30          |
| 2019.11.21 | Head        | 1750        | 100        | 3.820               | 38.20                 | 36.90             | 3.52          | 36.40              | 4.95          |
| 2019.11.22 | Head        | 1750        | 100        | 3.720               | 37.20                 | 36.90             | 0.81          | 36.40              | 2.20          |
| 2019.11.23 | Body        | 1750        | 100        | 3.710               | 37.10                 | 36.70             | 1.09          | 36.40              | 1.92          |
| 2019.11.24 | Body        | 1750        | 100        | 3.680               | 36.80                 | 36.70             | 0.27          | 36.40              | 1.10          |
| 2019.11.25 | Head        | 1900        | 100        | 4.030               | 40.30                 | 39.90             | 1.00          | 39.70              | 1.51          |
| 2019.11.26 | Head        | 1900        | 100        | 4.110               | 41.10                 | 39.90             | 3.01          | 39.70              | 3.53          |
| 2019.11.27 | Head        | 1900        | 100        | 4.090               | 40.90                 | 39.90             | 2.51          | 39.70              | 3.02          |
| 2019.11.28 | Body        | 1900        | 100        | 4.030               | 40.30                 | 39.90             | 1.00          | 39.70              | 1.51          |
| 2019.11.30 | Body        | 1900        | 100        | 3.910               | 39.10                 | 39.90             | -2.01         | 39.70              | -1.51         |
| 2019.11.29 | Body        | 1900        | 100        | 4.160               | 41.60                 | 39.90             | 4.26          | 39.70              | 4.79          |
| 2019.12.09 | Head        | 2450        | 100        | 5.180               | 51.80                 | 52.40             | -1.15         | 52.40              | -1.15         |
| 2019.12.10 | Body        | 2450        | 100        | 5.270               | 52.70                 | 50.50             | 4.36          | 52.40              | 0.57          |
| 2019.12.05 | Head        | 2600        | 100        | 5.320               | 53.20                 | 56.40             | -5.67         | 55.30              | -3.80         |
| 2019.12.06 | Head        | 2600        | 100        | 5.430               | 54.30                 | 56.40             | -3.72         | 55.30              | -1.81         |
| 2019.12.07 | Body        | 2600        | 100        | 5.530               | 55.30                 | 54.30             | 1.84          | 55.30              | 0.00          |
| 2019.12.08 | Body        | 2600        | 100        | 5.700               | 57.00                 | 54.30             | 4.97          | 55.30              | 3.07          |
| 2019.12.01 | Head        | 5250        | 100        | 7.820               | 78.20                 | 76.20             | 2.62          | 76.50              | 2.22          |
| 2019.12.03 | Body        | 5250        | 100        | 7.810               | 78.10                 | 75.20             | 3.86          | 76.50              | 2.09          |
| 2019.12.02 | Head        | 5600        | 100        | 8.020               | 80.20                 | 82.60             | -2.91         | 83.30              | -3.72         |
| 2019.12.04 | Body        | 5600        | 100        | 8.120               | 81.20                 | 77.90             | 4.24          | 83.30              | -2.52         |
| 2019.12.02 | Head        | 5750        | 100        | 8.040               | 80.40                 | 80.80             | -0.50         | 78.00              | 3.08          |
| 2019.12.04 | Body        | 5750        | 100        | 7.840               | 78.40                 | 75.00             | 4.53          | 78.00              | 0.51          |

Note: The tolerance limit of System validation  $\pm 10\%$ .

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %(for 10 g Specific SAR).

| Date                                                        | Liquid Type | Freq. (MHz) | Power (mW) | Measured SAR (W/kg) | Normalized SAR (W/kg) | Dipole SAR (W/kg) | Tolerance (%) | Targeted SAR(W/kg) | Tolerance (%) |
|-------------------------------------------------------------|-------------|-------------|------------|---------------------|-----------------------|-------------------|---------------|--------------------|---------------|
| 2019.11.30                                                  | Body        | 1900        | 100        | 2.04                | 20.40                 | 21.00             | -2.86         | 20.50              | -0.49         |
| 2019.11.29                                                  | Body        | 1900        | 100        | 2.14                | 21.40                 | 21.00             | 1.90          | 20.50              | 4.39          |
| 2019.12.07                                                  | Body        | 2600        | 100        | 2.36                | 23.60                 | 24.40             | -3.28         | 24.60              | -4.07         |
| 2019.12.03                                                  | Body        | 5250        | 100        | 2.14                | 21.40                 | 21.20             | 0.94          | 21.60              | -0.93         |
| 2019.12.04                                                  | Body        | 5600        | 100        | 2.24                | 22.40                 | 21.90             | 2.28          | 23.40              | -4.27         |
| Note: The tolerance limit of System validation $\pm 10\%$ . |             |             |            |                     |                       |                   |               |                    |               |

# System Performance Check Data (835MHz Head)

Date: 2019.11.18

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated):  $f = 835 \text{ MHz}$ ;  $\sigma = 0.912 \text{ S/m}$ ;  $\epsilon_r = 41.438$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.02, 10.02, 10.02); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 835-Head-100mW/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.927 \text{ W/kg}$


**CW 835-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $33.05 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$

Peak SAR (extrapolated) =  $1.32 \text{ W/kg}$

**SAR(1 g) =  $0.937 \text{ W/kg}$ ; SAR(10 g) =  $0.606 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.974 \text{ W/kg}$

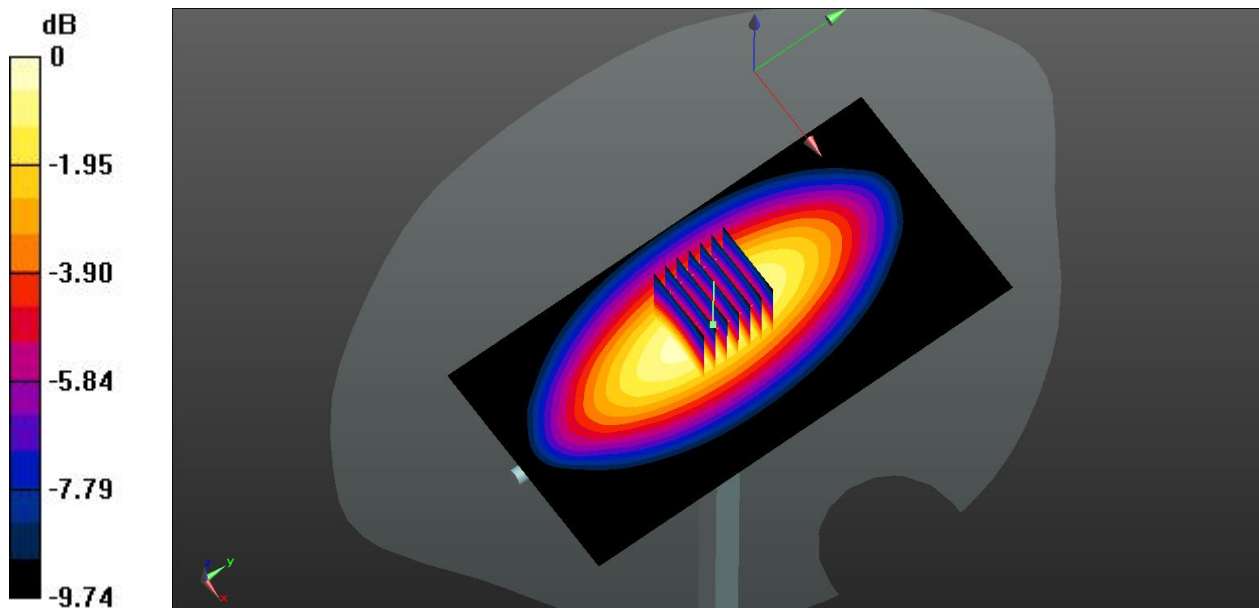

0 dB =  $0.974 \text{ W/kg}$

# System Performance Check Data (835MHz Body)

Date: 2019.11.19

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ S/m}$ ;  $\epsilon_r = 55.712$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 835-Body-100mW/Area Scan (61x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.04 W/kg


**CW 835-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 33.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.628 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

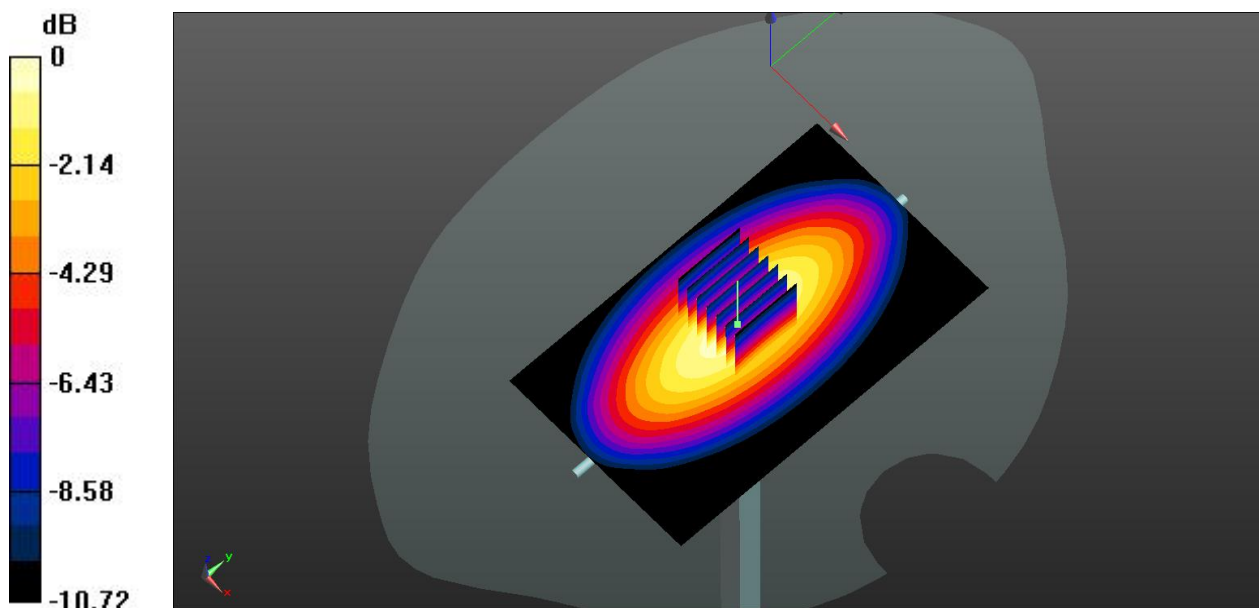

0 dB = 1.06 W/kg

## System Performance Check Data (835MHz Body)

Date: 2019.11.20

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ S/m}$ ;  $\epsilon_r = 55.349$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 835-Body-100mW/Area Scan (61x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.07 W/kg


**CW 835-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 33.68 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.636 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

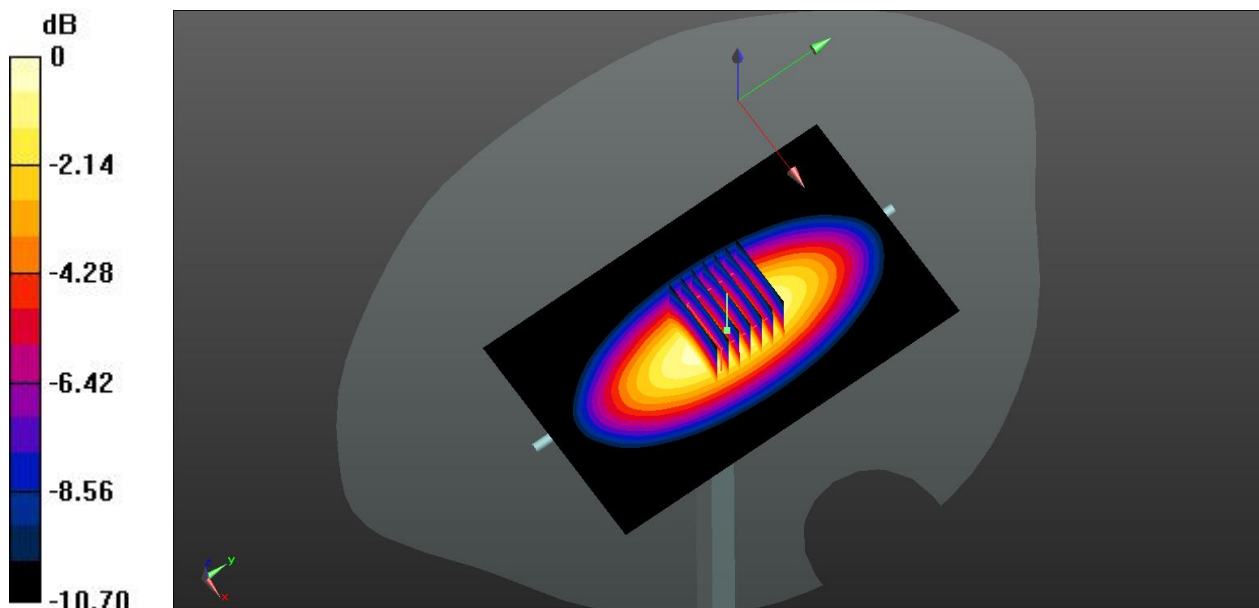

0 dB = 1.06 W/kg

# System Performance Check Data (1750MHz Head)

Date: 2019.11.21

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 39.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1750-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.07 W/kg


**CW 1750-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.57 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.68 W/kg

**SAR(1 g) = 3.82 W/kg; SAR(10 g) = 2.04 W/kg**

Maximum value of SAR (measured) = 4.04 W/kg

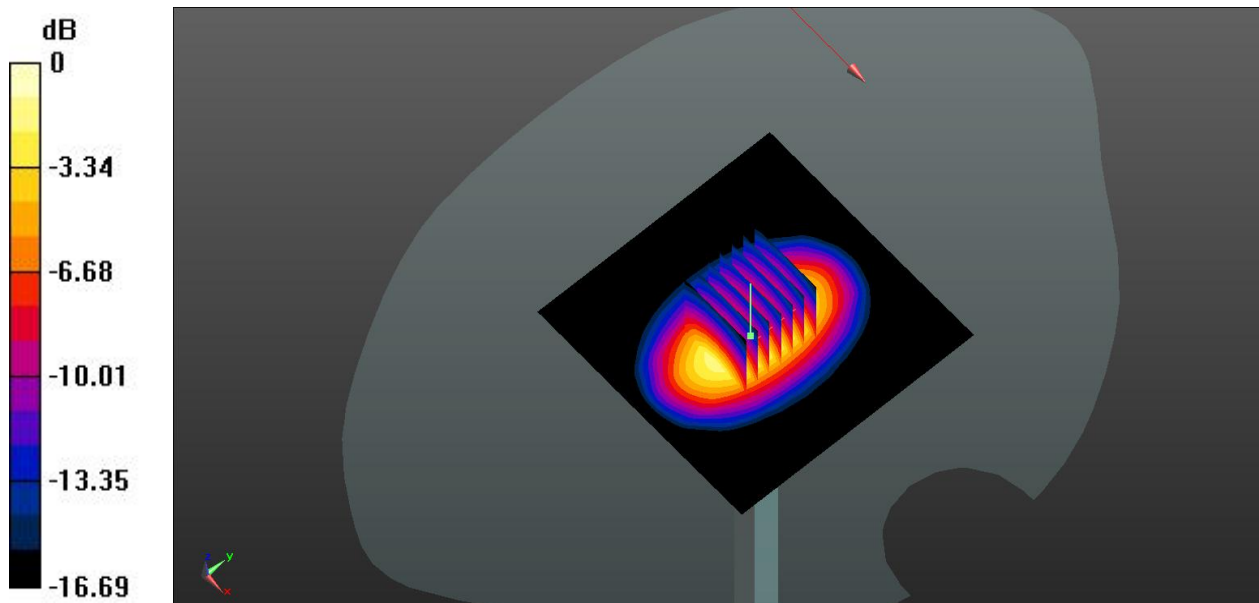

0 dB = 4.04 W/kg



# System Performance Check Data (1750MHz Head)

Date: 2019.11.22

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.391$  S/m;  $\epsilon_r = 39.77$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1750-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.16 W/kg


**CW 1750-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.49 W/kg

**SAR(1 g) = 3.72 W/kg; SAR(10 g) = 2.01 W/kg**

Maximum value of SAR (measured) = 4.16 W/kg

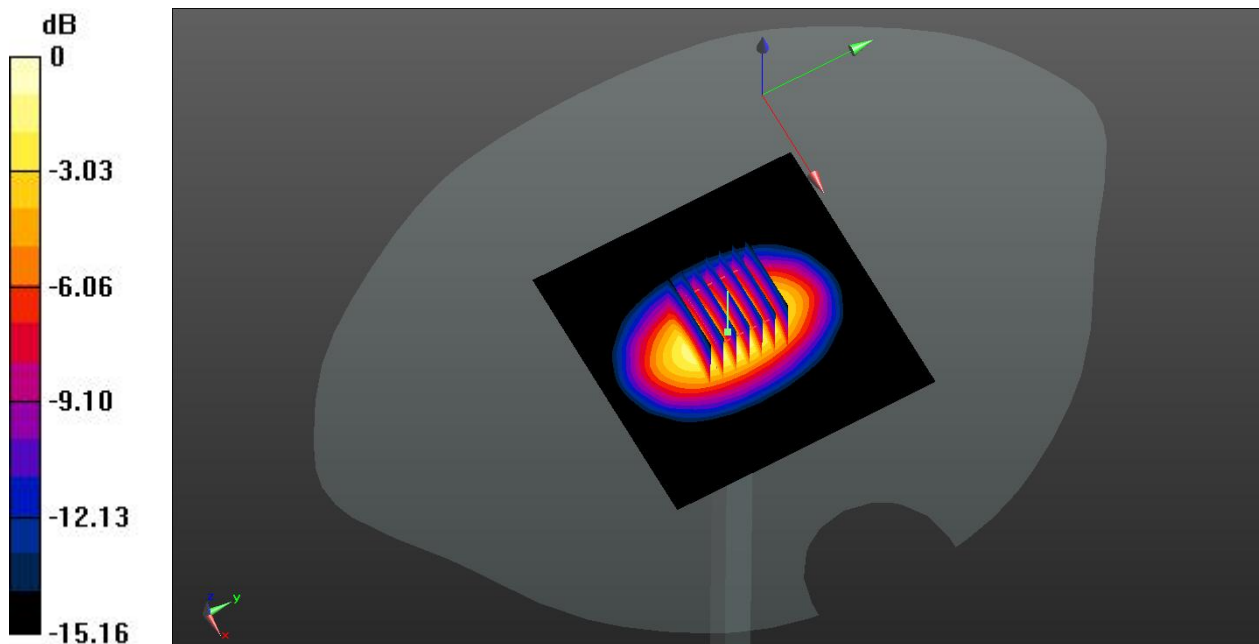

0 dB = 4.16 W/kg

# System Performance Check Data (1750MHz Body)

Date: 2019.11.23

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.503$  S/m;  $\epsilon_r = 53.788$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1750-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.19 W/kg


**CW 1750-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.22 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 6.48 W/kg

**SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.95 W/kg**

Maximum value of SAR (measured) = 4.18 W/kg

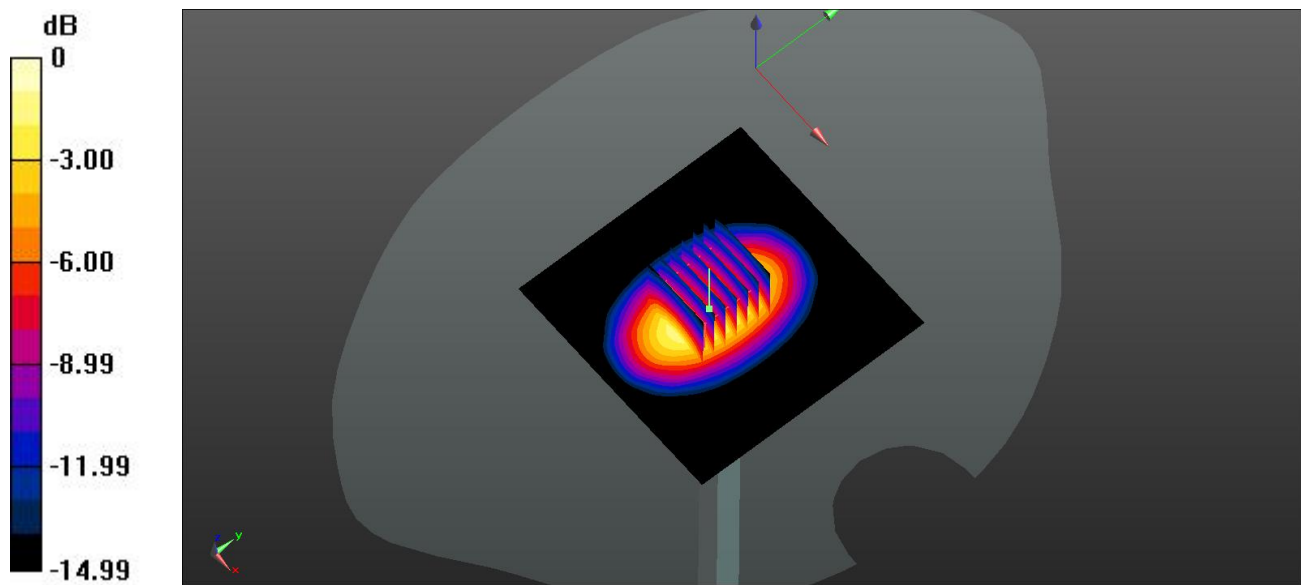

0 dB = 4.18 W/kg

# System Performance Check Data (1750MHz Body)

Date: 2019.11.24

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.532$  S/m;  $\epsilon_r = 54.045$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1750-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.03 W/kg


**CW 1750-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.02 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 6.73 W/kg

**SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.92 W/kg**

Maximum value of SAR (measured) = 4.05 W/kg

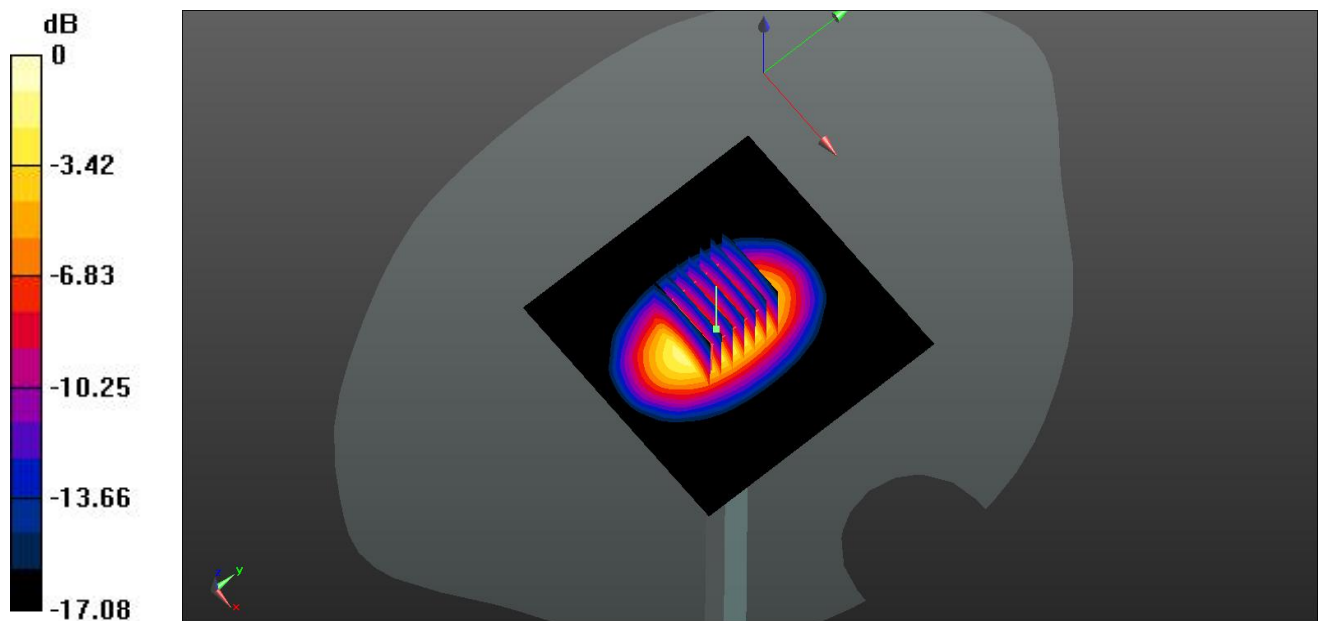

0 dB = 4.05 W/kg

# System Performance Check Data (1900MHz Head)

Date: 2019.11.25

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.422$  S/m;  $\epsilon_r = 39.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.54 W/kg


**CW 1900-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.77 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 7.85 W/kg

**SAR(1 g) = 4.03 W/kg; SAR(10 g) = 2.09 W/kg**

Maximum value of SAR (measured) = 4.58 W/kg

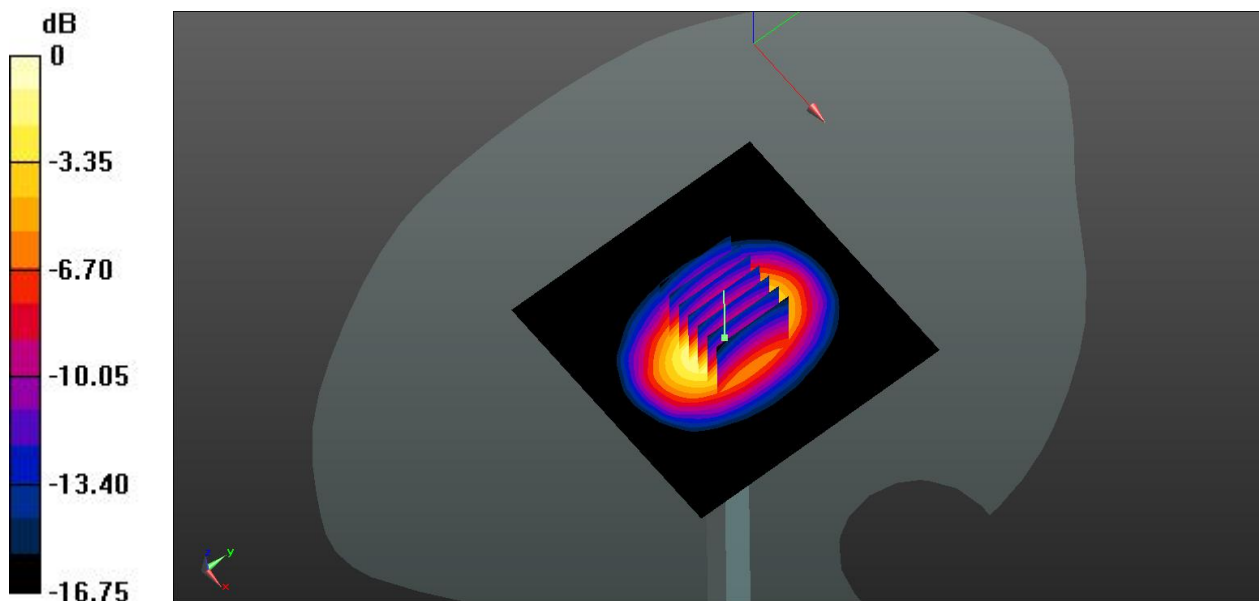

0 dB = 4.58 W/kg

# System Performance Check Data (1900MHz Head)

Date: 2019.11.26

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.441$  S/m;  $\epsilon_r = 38.97$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.61 W/kg


**CW 1900-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.20 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 7.52 W/kg

**SAR(1 g) = 4.11 W/kg; SAR(10 g) = 2.13 W/kg**

Maximum value of SAR (measured) = 4.63 W/kg

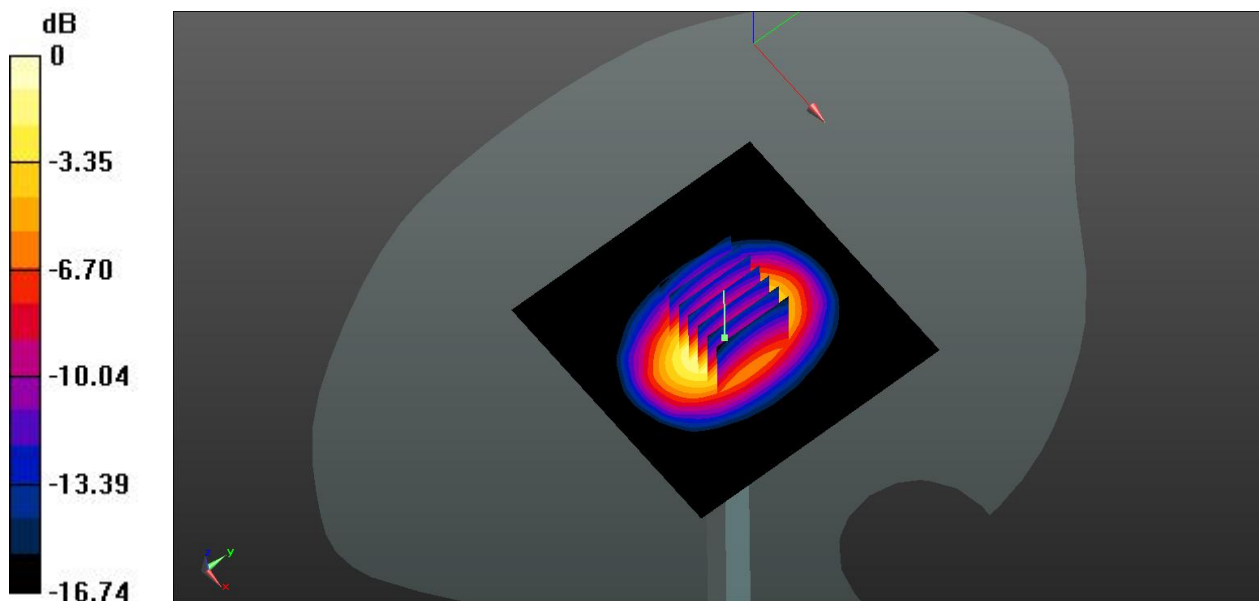

0 dB = 4.63 W/kg

# System Performance Check Data (1900MHz Head)

Date: 2019.11.27

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 38.828$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.65 W/kg


**CW 1900-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.52 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 7.36 W/kg

**SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.12 W/kg**

Maximum value of SAR (measured) = 4.66 W/kg

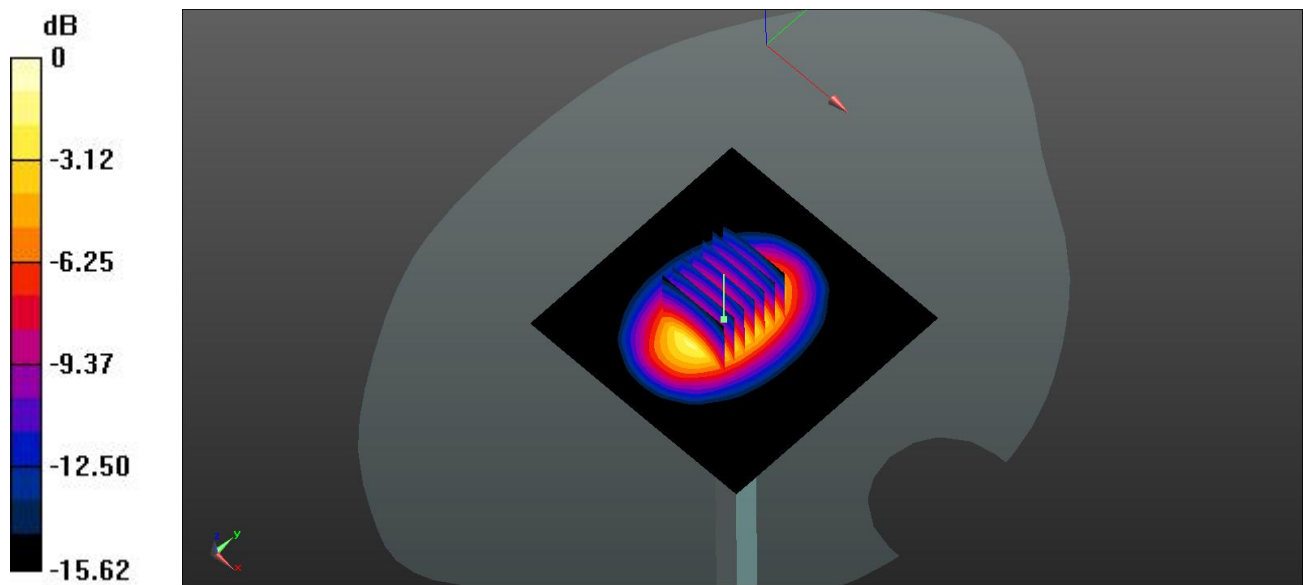

0 dB = 4.66 W/kg

# System Performance Check Data (1900MHz Body)

Date: 2019.11.28

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 53.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.54 W/kg


**CW 1900-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.51 W/kg

**SAR(1 g) = 4.03 W/kg; SAR(10 g) = 2.1 W/kg**

Maximum value of SAR (measured) = 4.54 W/kg

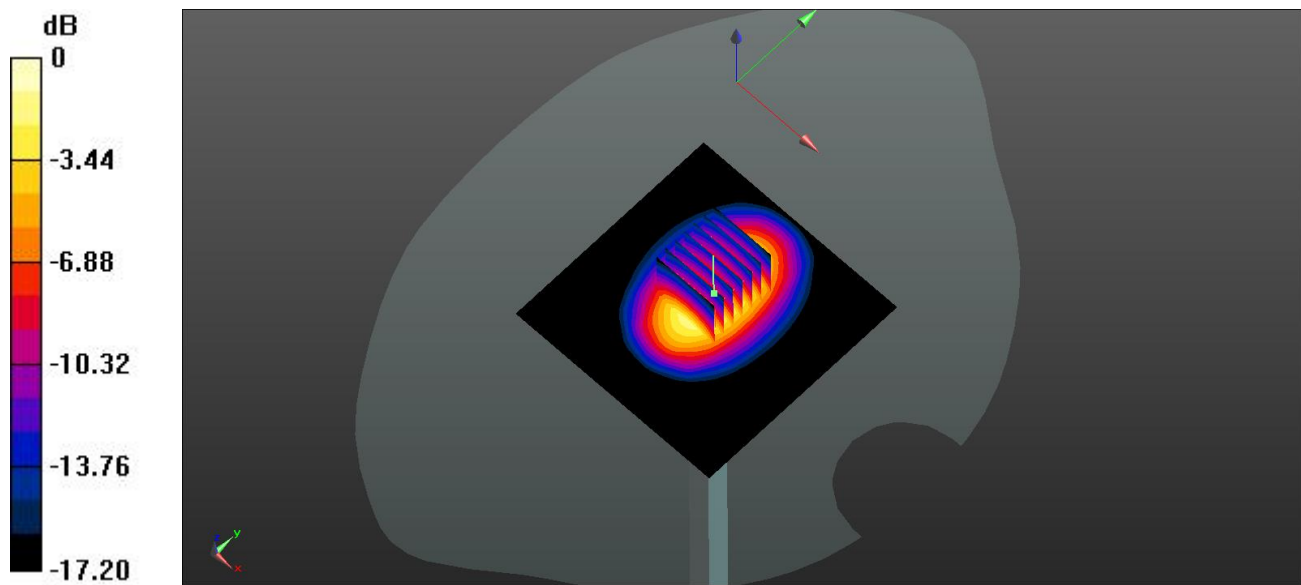

0 dB = 4.54 W/kg



# System Performance Check Data (1900MHz Body)

Date: 2019.11.30

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.547$  S/m;  $\epsilon_r = 53.436$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 1900-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.45 W/kg


**CW 1900-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.57 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 7.26 W/kg

**SAR(1 g) = 3.91 W/kg; SAR(10 g) = 2.04 W/kg**

Maximum value of SAR (measured) = 4.43 W/kg

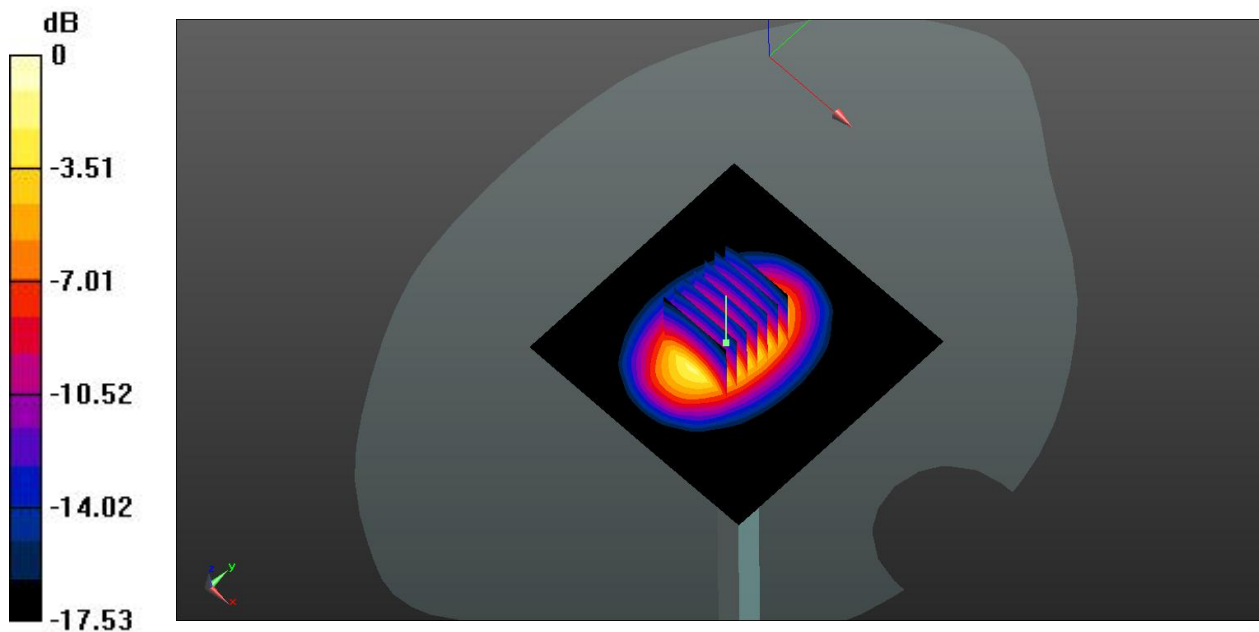

0 dB = 4.43 W/kg



# System Performance Check Data (2450MHz Head)

Date: 2019.12.09

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 38.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.81, 7.81, 7.81); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 5.86 W/kg


**CW 2450-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 10.22 W/kg

**SAR(1 g) = 5.18 W/kg; SAR(10 g) = 2.47 W/kg**

Maximum value of SAR (measured) = 5.91 W/kg

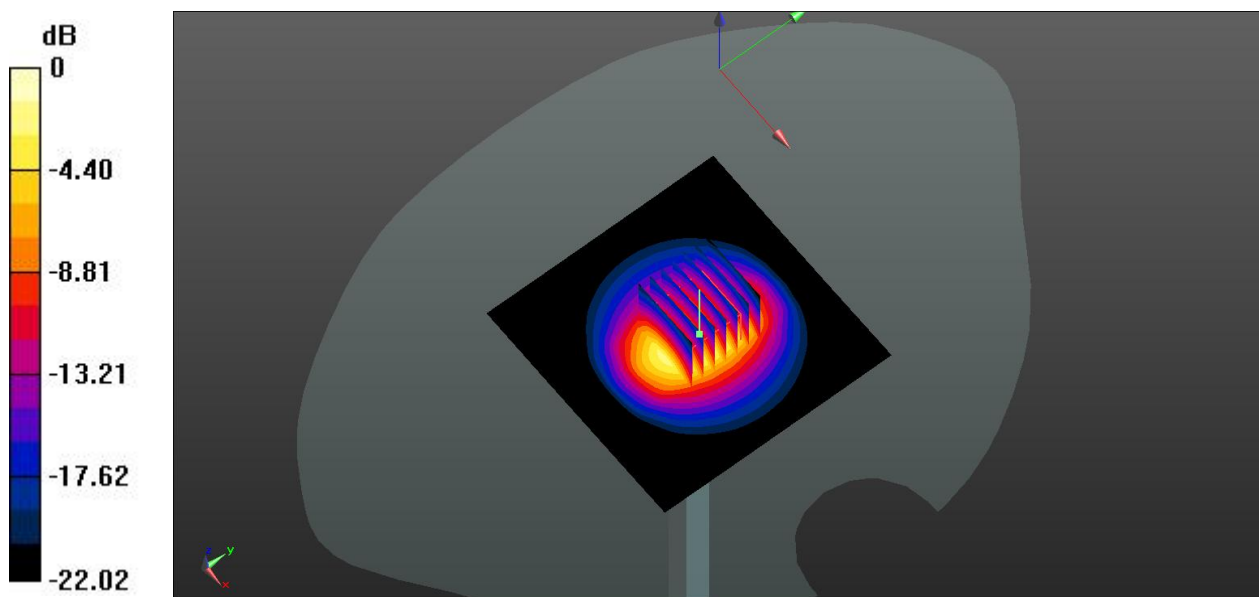

0 dB = 5.91 W/kg

## System Performance Check Data (2450MHz Body)

Date: 2019.12.10

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$  S/m;  $\epsilon_r = 52.744$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.25 W/kg


**CW 2450-Body-100mW Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.73 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 10.8 W/kg

**SAR(1 g) = 5.27 W/kg; SAR(10 g) = 2.43 W/kg**

Maximum value of SAR (measured) = 6.10 W/kg

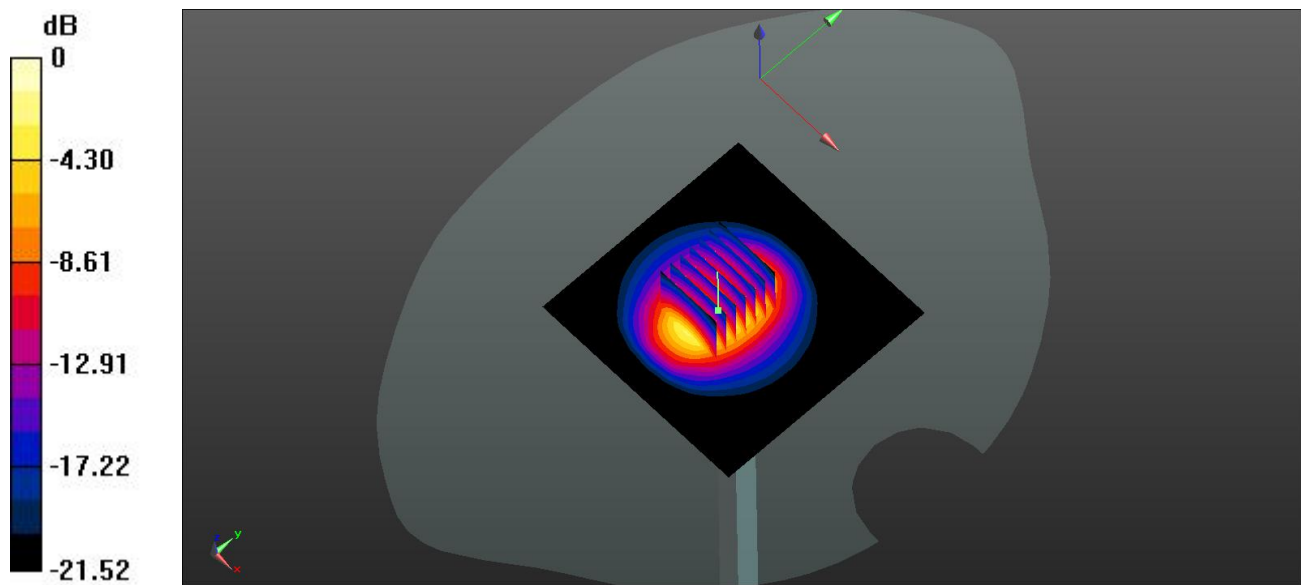

0 dB = 6.10 W/kg

## System Performance Check Data (2600MHz Head)

Date: 2019.12.05

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.02$  S/m;  $\epsilon_r = 38.847$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.61, 7.61, 7.61); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.44 W/kg


**CW 2600-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.63 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 12.2 W/kg

**SAR(1 g) = 5.32 W/kg; SAR(10 g) = 2.37 W/kg**

Maximum value of SAR (measured) = 6.06 W/kg

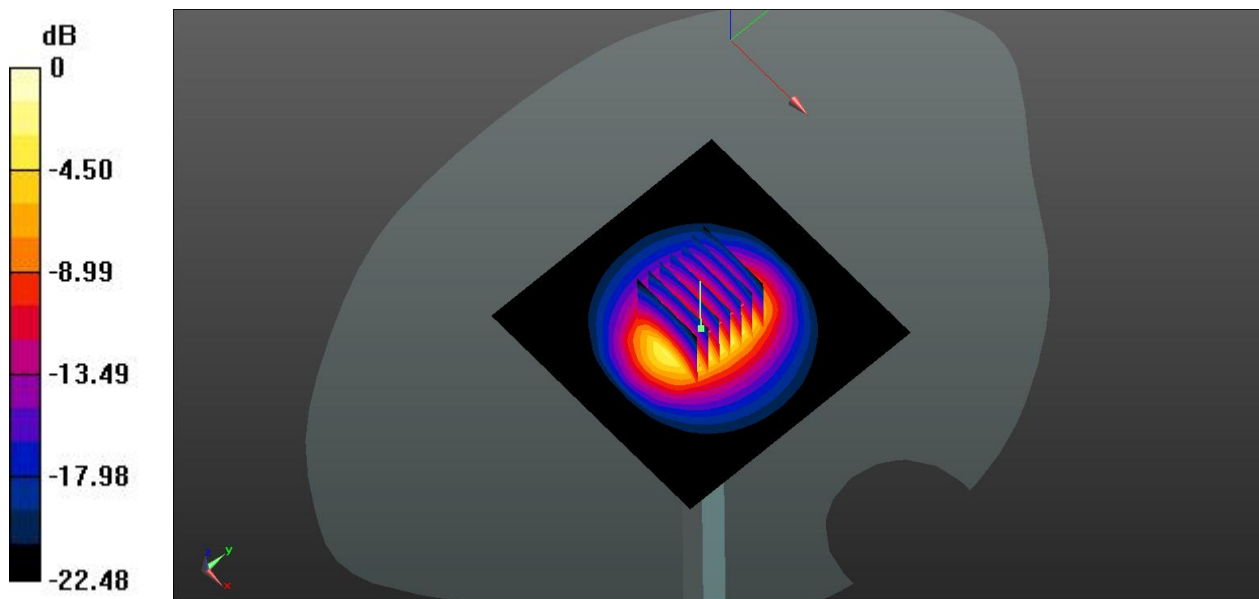

0 dB = 6.06 W/kg

# System Performance Check Data (2600MHz Head)

Date: 2019.12.06

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.992$  S/m;  $\epsilon_r = 37.948$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.61, 7.61, 7.61); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600-Head-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.45 W/kg


**CW 2600-Head-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.65 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 12.7 W/kg

**SAR(1 g) = 5.43 W/kg; SAR(10 g) = 2.42 W/kg**

Maximum value of SAR (measured) = 6.29 W/kg

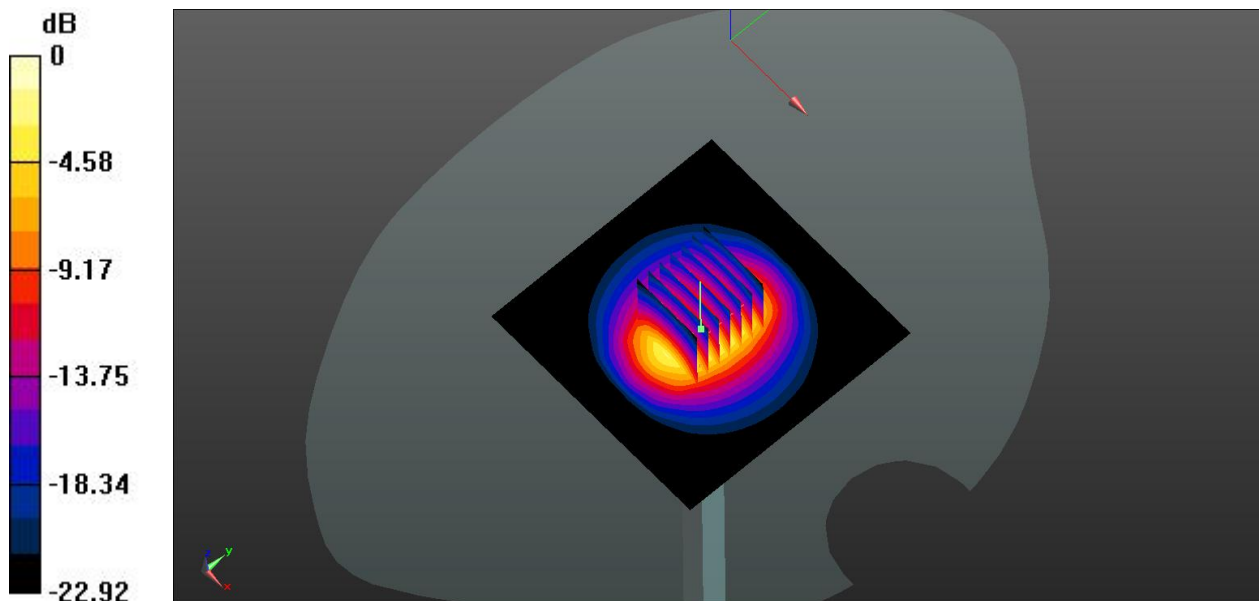

0 dB = 6.29 W/kg

# System Performance Check Data (2600MHz Body)

Date: 2019.12.07

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2600$  MHz;  $\sigma = 2.196$  S/m;  $\epsilon_r = 52.138$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.46, 7.46, 7.46); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.60 W/kg


**CW 2600-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 45.73 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.5 W/kg

**SAR(1 g) = 5.53 W/kg; SAR(10 g) = 2.36 W/kg**

Maximum value of SAR (measured) = 6.37 W/kg

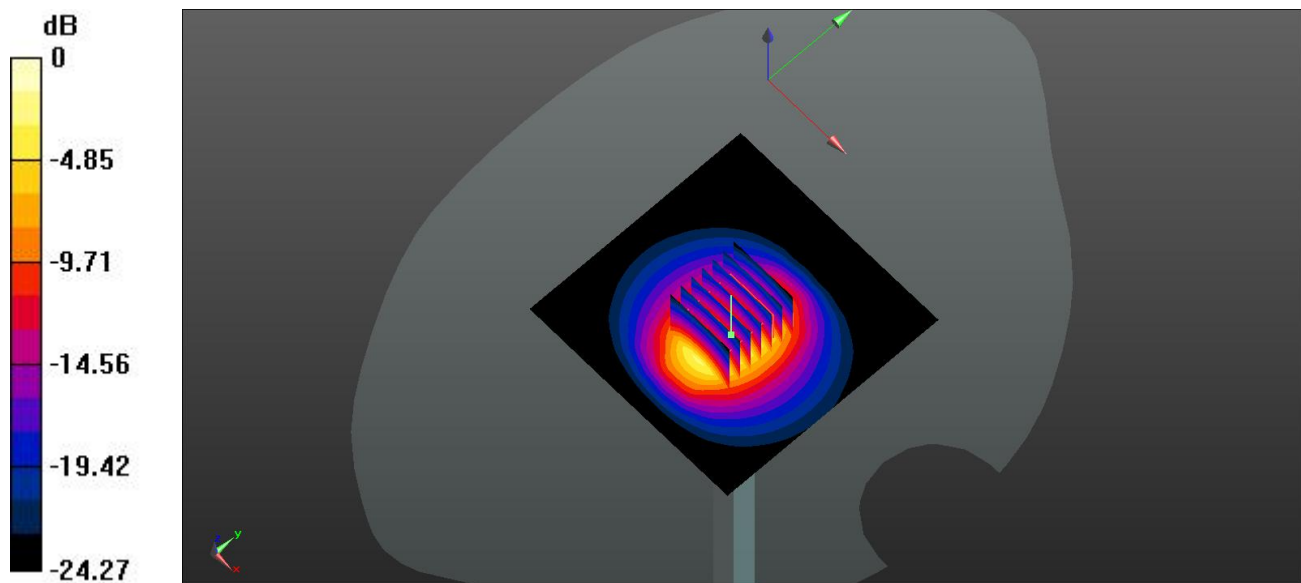

0 dB = 6.37 W/kg

# System Performance Check Data (2600MHz Body)

Date: 2019.12.08

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2600$  MHz;  $\sigma = 2.203$  S/m;  $\epsilon_r = 50.656$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.46, 7.46, 7.46); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2600-Body-100mW/Area Scan (101x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.56 W/kg


**CW 2600-Body-100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.58 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 13.2 W/kg

**SAR(1 g) = 5.7 W/kg; SAR(10 g) = 2.49 W/kg**

Maximum value of SAR (measured) = 6.50 W/kg

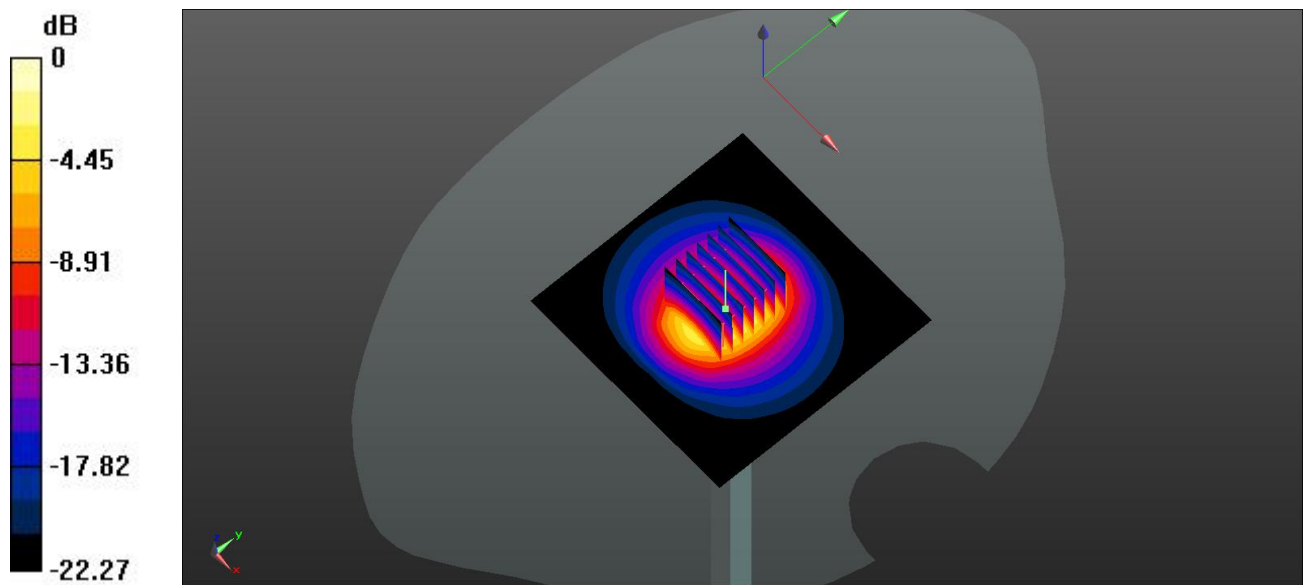

0 dB = 6.50 W/kg

## System Performance Check Data (5250MHz Head)

Date: 2019.12.01

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.754$  S/m;  $\epsilon_r = 36.345$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.51, 5.51, 5.51); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5250-Head-100mW/Area Scan (81x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 9.16 W/kg


**CW 5250-Head-100mW/Zoom Scan (7x7x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 34.87 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 33.9 W/kg

**SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 16.22 W/kg

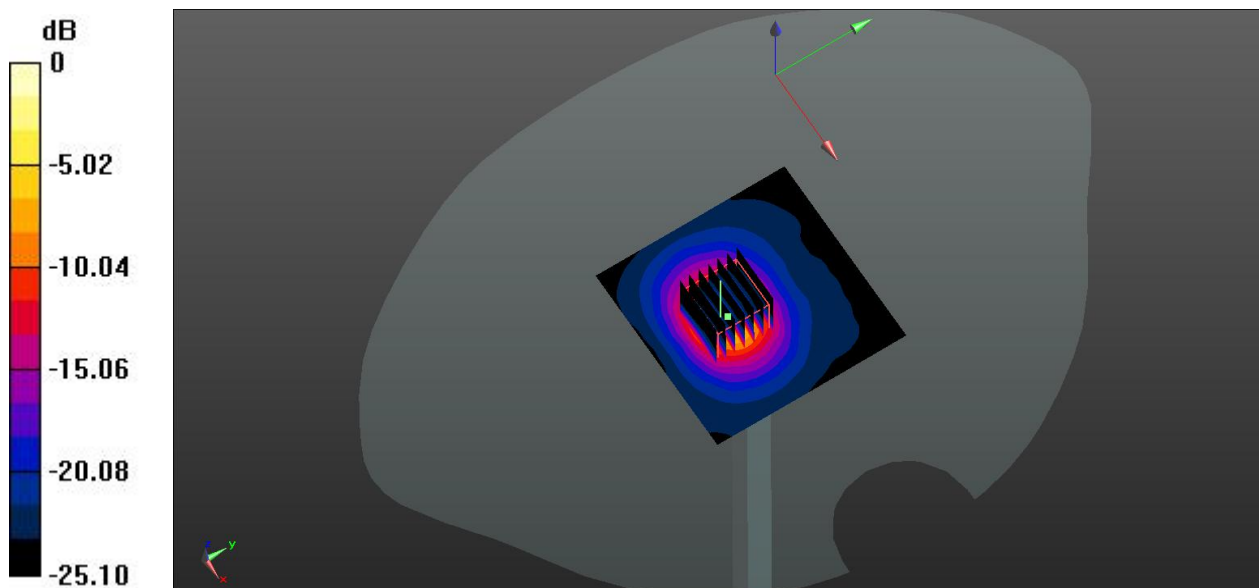

0 dB = 16.22 W/kg



## System Performance Check Data (5250MHz Body)

Date: 2019.12.03

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.392$  S/m;  $\epsilon_r = 49.026$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.08, 5.08, 5.08); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5250-Body-100mW /Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.39 W/kg


**CW 5250-Body-100mW /Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 37.06 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 33.2 W/kg

**SAR(1 g) = 7.81 W/kg; SAR(10 g) = 2.14 W/kg**

Maximum value of SAR (measured) = 19.7 W/kg

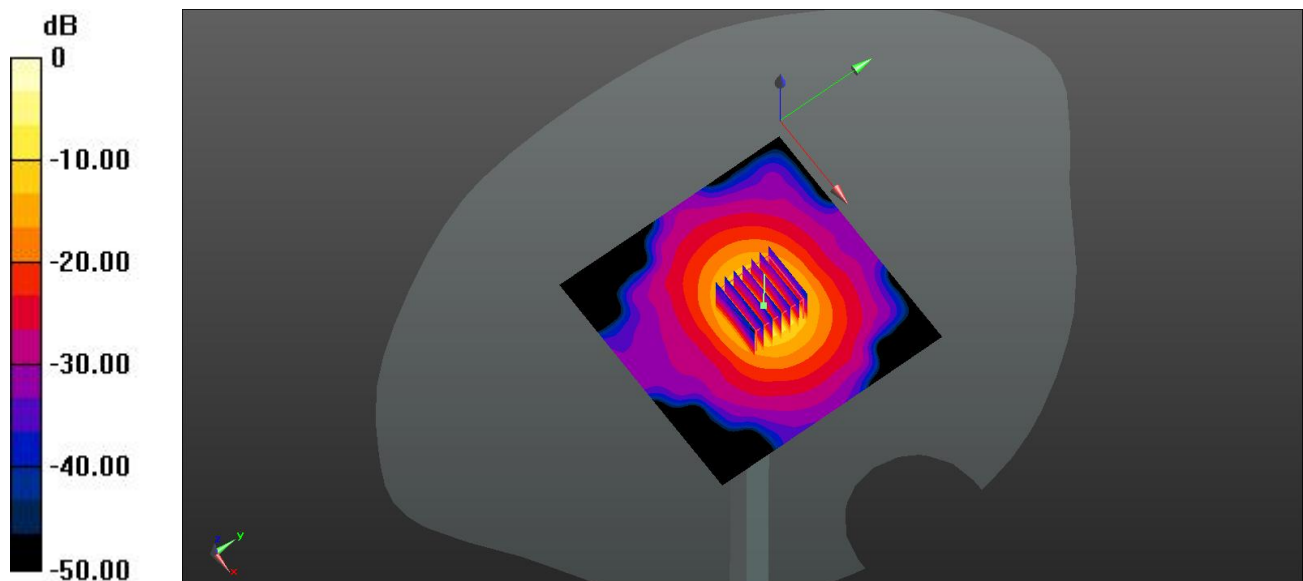

0 dB = 19.7 W/kg



# System Performance Check Data (5600MHz Head)

Date: 2019.12.02

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.112$  S/m;  $\epsilon_r = 35.213$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.8, 4.8, 4.8); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5600-Head-100mW/Area Scan (81x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 8.85 W/kg


**CW 5600-Head-100mW/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 31.58 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 37.88 W/kg

**SAR(1 g) = 8.02 W/kg; SAR(10 g) = 2.31 W/kg**

Maximum value of SAR (measured) = 16.1 W/kg

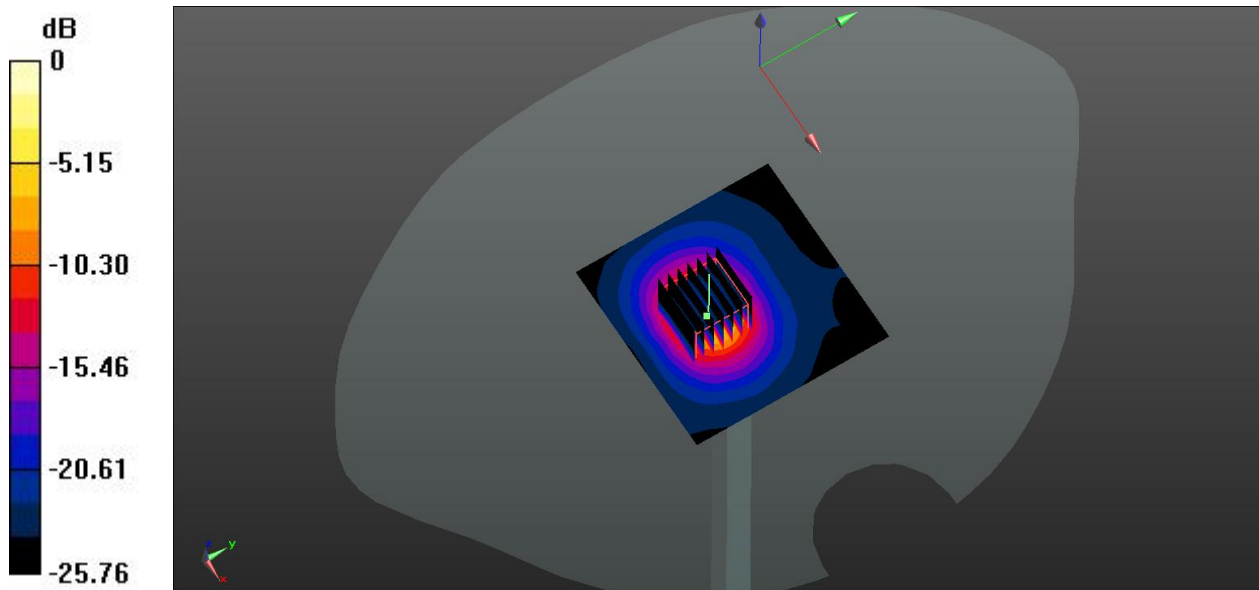

0 dB = 16.1 W/kg

# System Performance Check Data (5600MHz Body)

Date: 2019.12.04

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.858$  S/m;  $\epsilon_r = 48.163$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.36, 4.36, 4.36); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW5600-Body-100mw /Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.61 W/kg


**CW5600-Body-100mw /Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 28.27 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 38.4 W/kg

**SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 20.7 W/kg

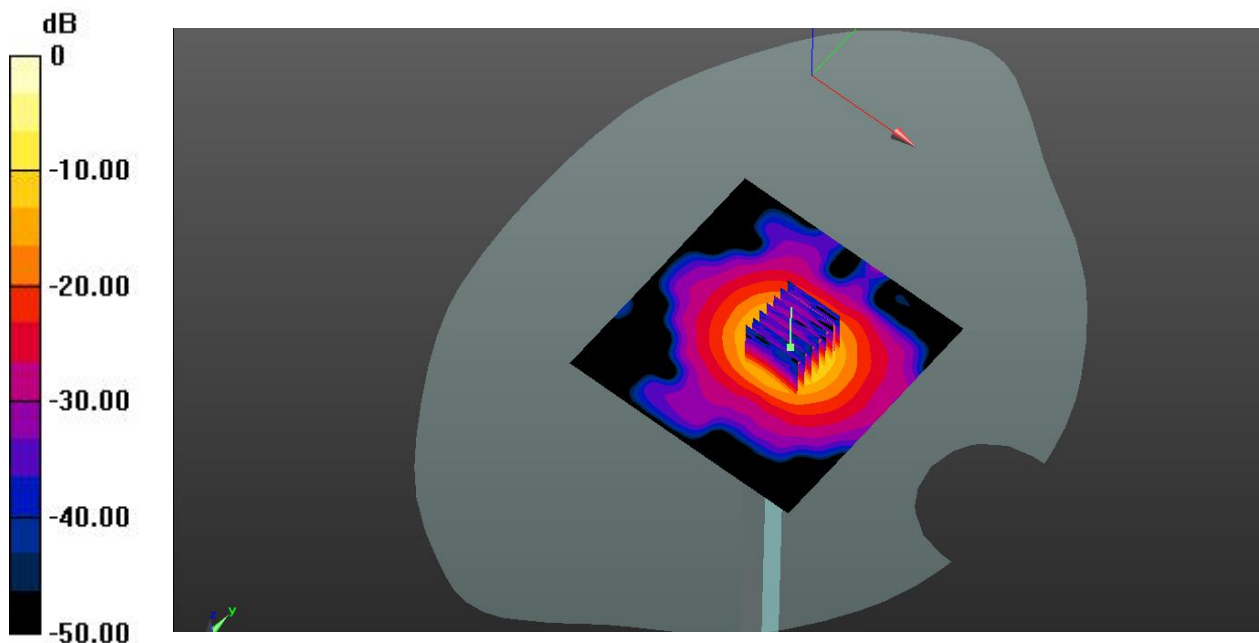

0 dB = 20.7 W/kg

## System Performance Check Data (5750MHz Head)

Date: 2019.12.02

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.358$  S/m;  $\epsilon_r = 34.607$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.06, 5.06, 5.06); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5750-Head-100mW/Area Scan (81x101x1):** Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 8.96 W/kg


**CW 5750-Head-100mW/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 37.42 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 40.3 W/kg

**SAR(1 g) = 8.04 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 17.4 W/kg

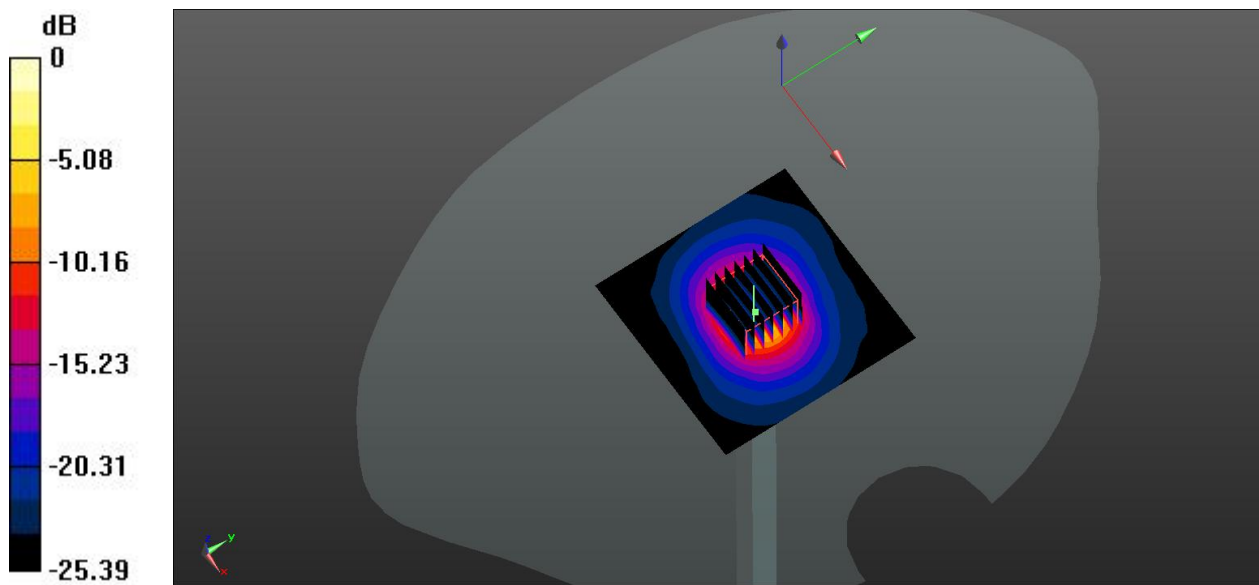

0 dB = 17.4 W/kg

## System Performance Check Data (5750MHz Body)

Date: 2019.12.04

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.144$  S/m;  $\epsilon_r = 47.349$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.51, 4.51, 4.51); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW5750-Body-100mw/Area Scan (81x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.09 W/kg


**CW5750-Body-100mw/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 27.34 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 38.1 W/kg

**SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 16.3 W/kg

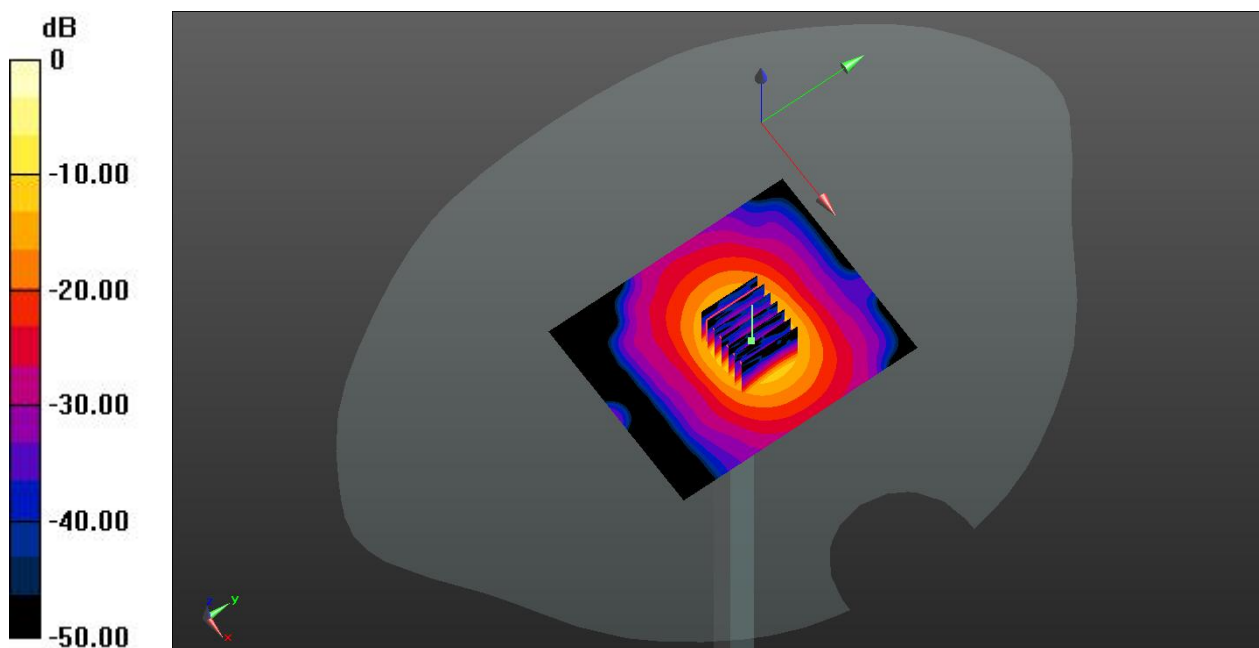

0 dB = 16.3 W/kg

## ANNEX C TEST DATA

### MEAS.1 Right Head with Cheek on High Channel in GPRS850 2Slots mode with Up Antenna

Date: 2019.11.18

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.926$  S/m;  $\epsilon_r = 40.674$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.0 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.02, 10.02, 10.02); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 251/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.638 W/kg


**Ch 251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.07 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.311 W/kg**

Maximum value of SAR (measured) = 0.535 W/kg

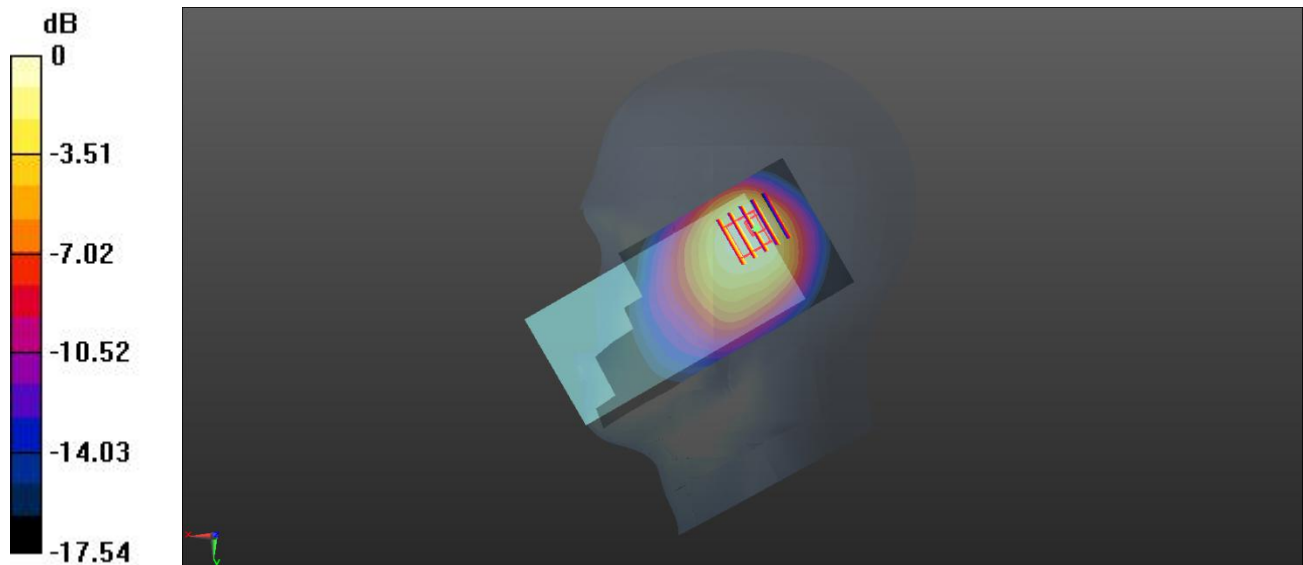

0 dB = 0.535 W/kg

## MEAS.2 Body Plane with Back Side 15mm on High Channel in GPRS850 2Slots mode with Down Antenna

Date: 2019.11.19

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.997$  S/m;  $\epsilon_r = 55.138$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 251/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


**Ch 251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.44 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

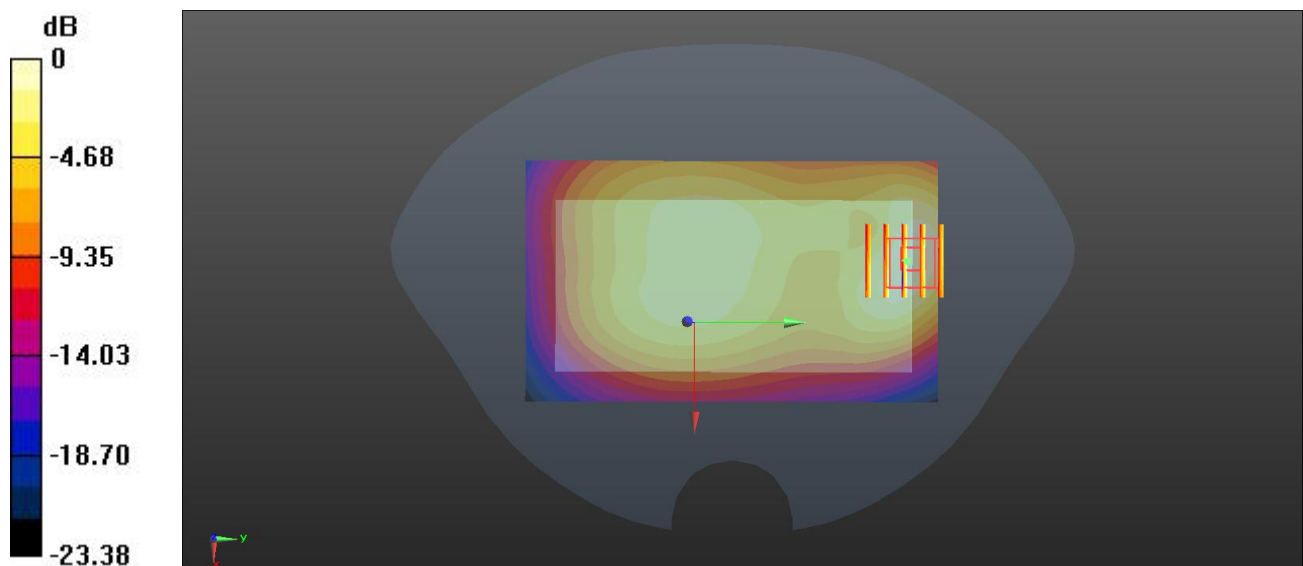

0 dB = 0.175 W/kg

### MEAS.3 Body Plane with Bottom Edge 10mm on High Channel in GPRS850 2Slots mode with Down Antenna

Date: 2019.11.19

Communication System Band: GPRS850; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.997$  S/m;  $\epsilon_r = 55.138$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 251/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.384 W/kg


**Ch 251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.34 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.636 W/kg

**SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 0.376 W/kg

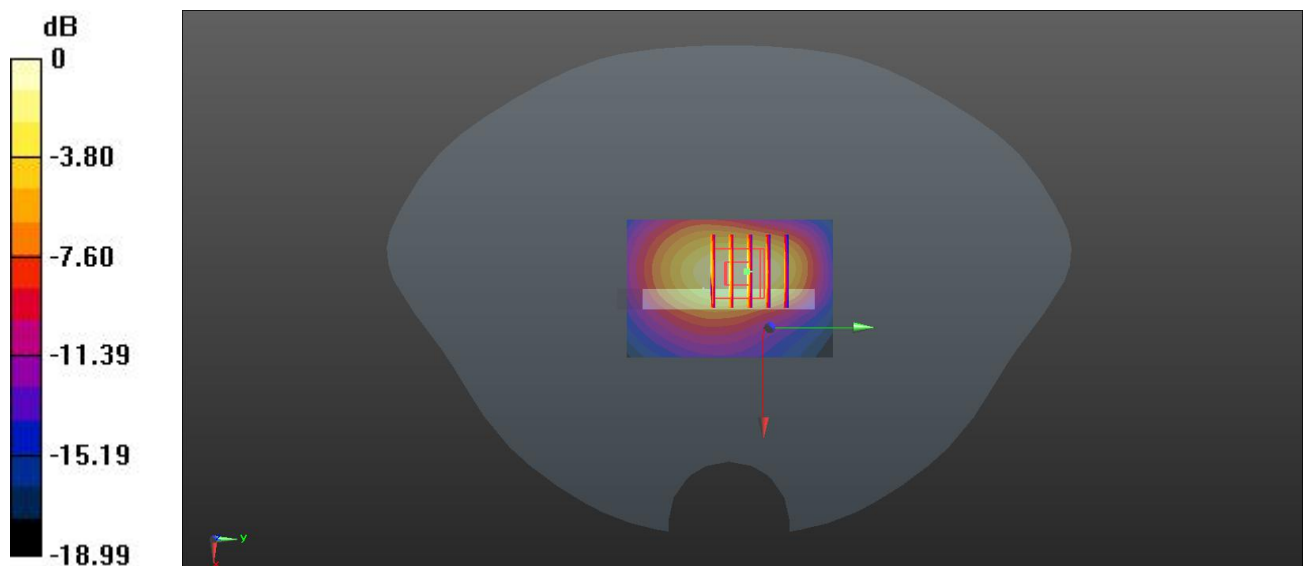

0 dB = 0.376 W/kg

# MEAS.4 Right Head with Tilt on High Channel in GPRS1900 3Slots mode with Up Antenna

Date: 2019.11.25

Communication System Band: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77

Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.433$  S/m;  $\epsilon_r = 39.013$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.3 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 810/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


**Ch 810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.01 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.384 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

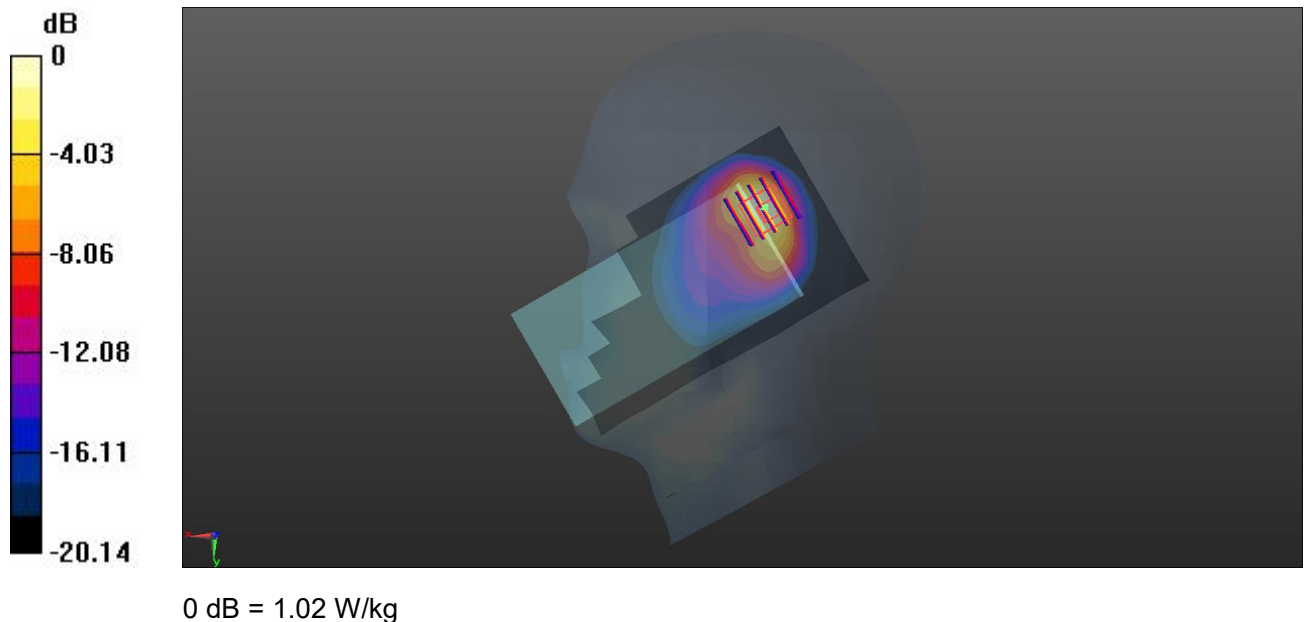



# MEAS.5 Body Plane with Back Side 15mm on High Channel in GPRS1900 3Slots mode with Up Antenna

Date: 2019.11.28

Communication System Band: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77

Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.553$  S/m;  $\epsilon_r = 52.748$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.345 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.662 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.496 W/kg

**SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.340 W/kg

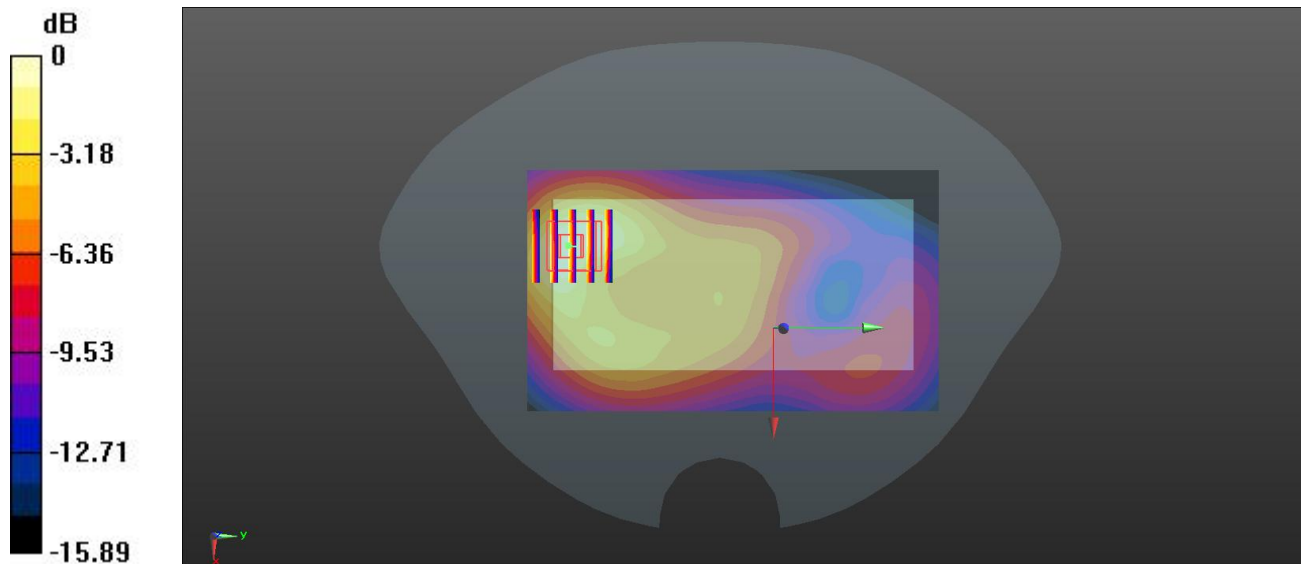

0 dB = 0.340 W/kg

## MEAS.6 Body Plane with Top Edge 10mm on Middle Channel in GPRS1900 3Slots mode with Up Antenna

Date: 2019.11.28

Communication System Band: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.77

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.512$  S/m;  $\epsilon_r = 53.907$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch661/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.14 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.446 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

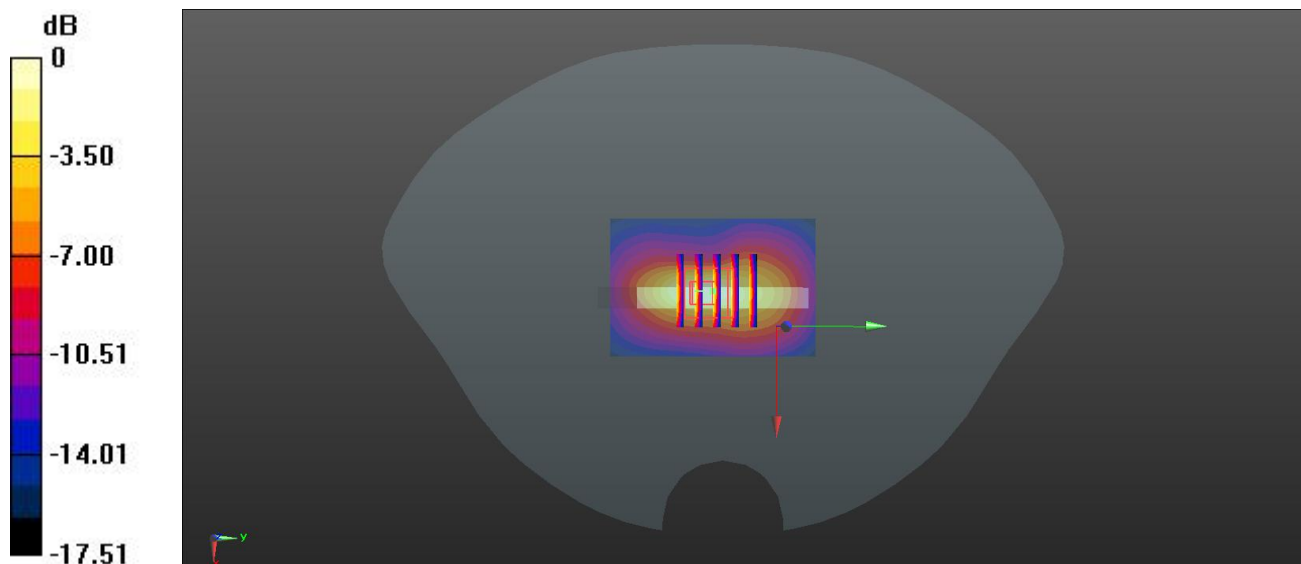

0 dB = 1.04 W/kg

## MEAS.7 Right Head with Tilt on High Channel in WCDMA Band 2 mode with Up Antenna

Date: 2019.11.25

Communication System Band: II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 39.206$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.3 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 9538/Area Scan (71x131x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Ch 9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 20.03 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.21 W/kg

**SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.413 W/kg**

Maximum value of SAR (measured) = 1.12 W/kg

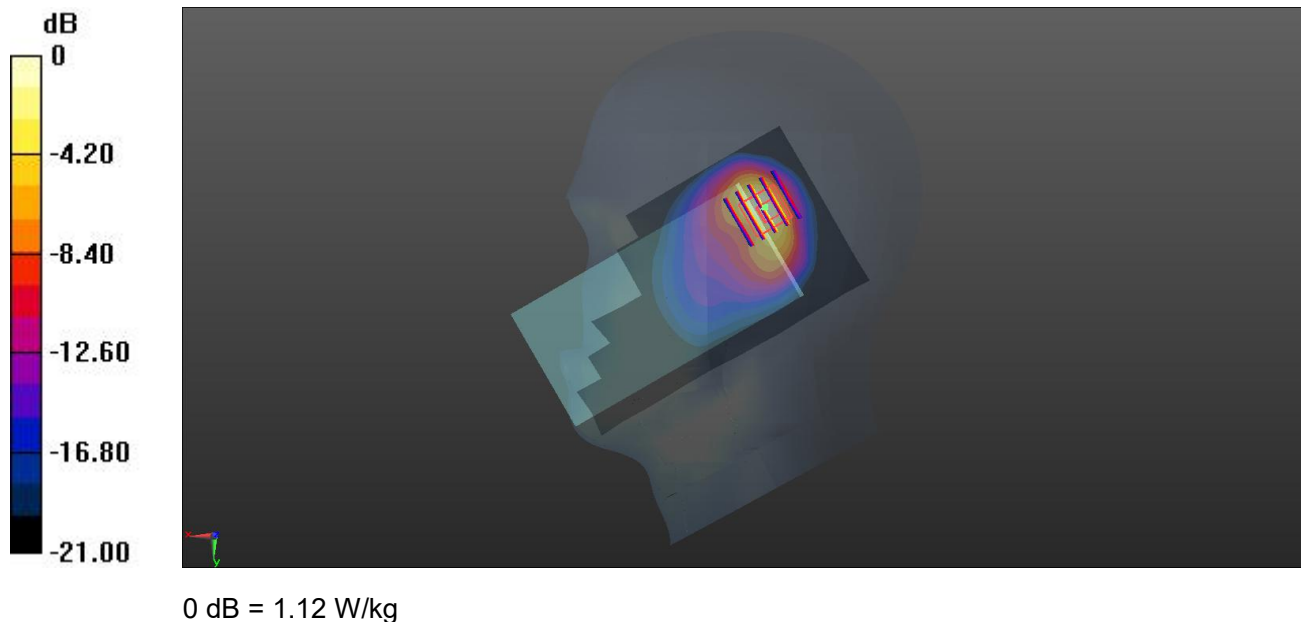

# MEAS.8 Body Plane with Back Side 15mm on Low Channel in WCDMA Band 2 mode with Down Antenna

Date: 2019.11.30

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 54.188$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.300 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.278 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.434 W/kg

**SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.174 W/kg**

Maximum value of SAR (measured) = 0.298 W/kg

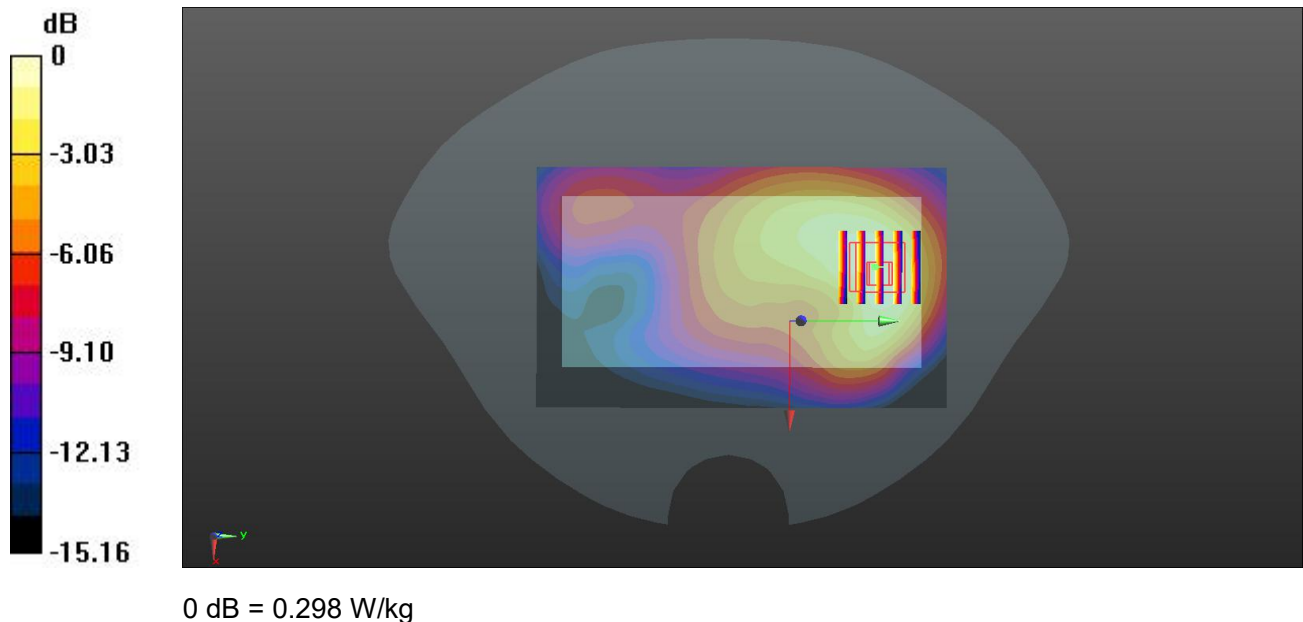

## MEAS.9 Body Plane with Bottom Edge 10mm on Low Channel in WCDMA Band 2 mode with Down Antenna

Date: 2019.11.30

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 54.188$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.727 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.28 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.361 W/kg**

Maximum value of SAR (measured) = 0.692 W/kg

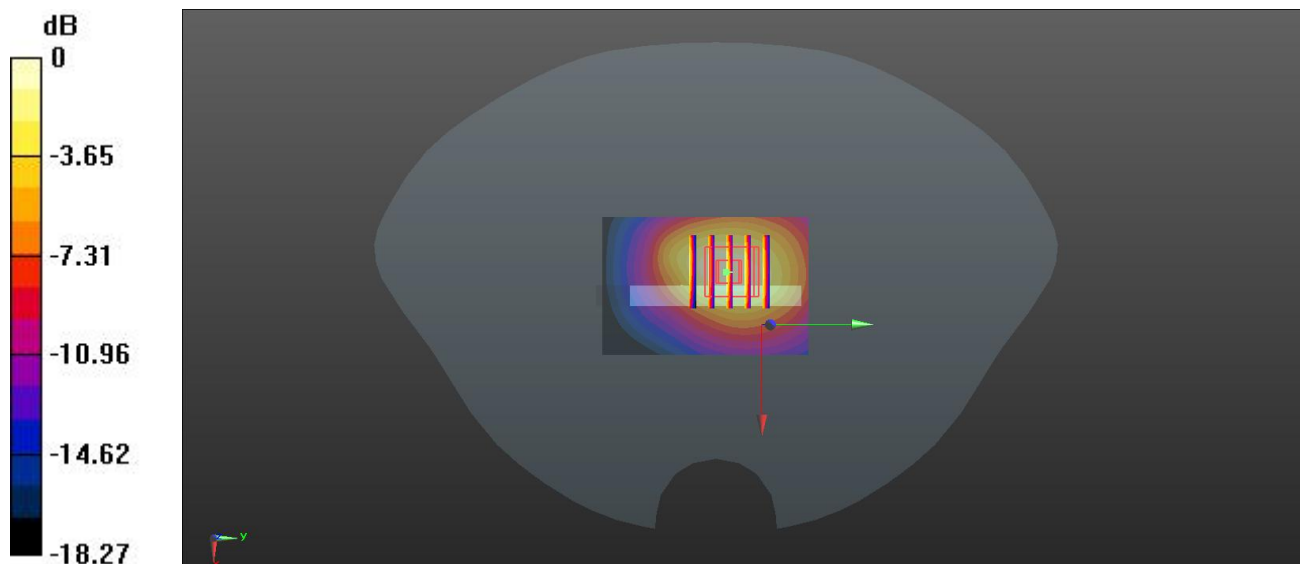

0 dB = 0.692 W/kg

# MEAS.10 Body Plane with Top Edge 0mm on Low Channel in WCDMA Band 2 mode with Up Antenna

Date: 2019.11.30

Communication System Band: II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.529$  S/m;  $\epsilon_r = 54.188$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9262/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.67 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 8.74 W/kg

**SAR(1 g) = 3.57 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 4.54 W/kg

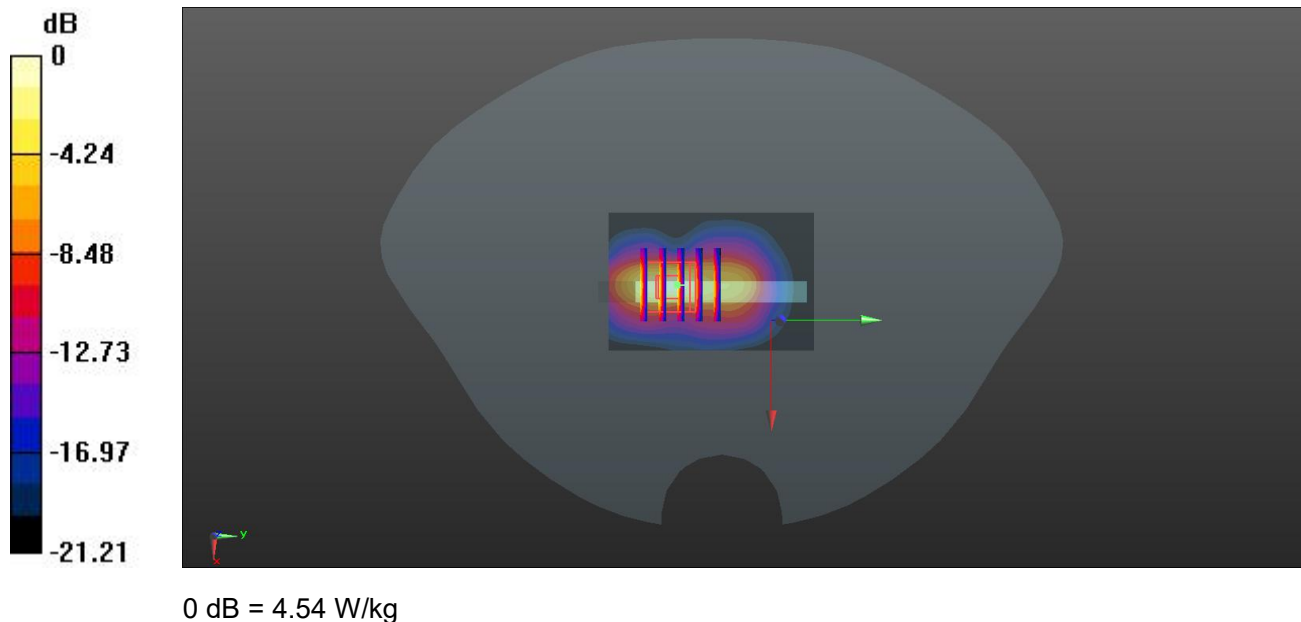

## MEAS.11 Right Head with Tilt on High Channel in WCDMA Band 4 mode with Up Antenna

Date: 2019.11.21

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 39.074$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.7 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 1513/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.995 W/kg


**Ch 1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.36 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.405 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

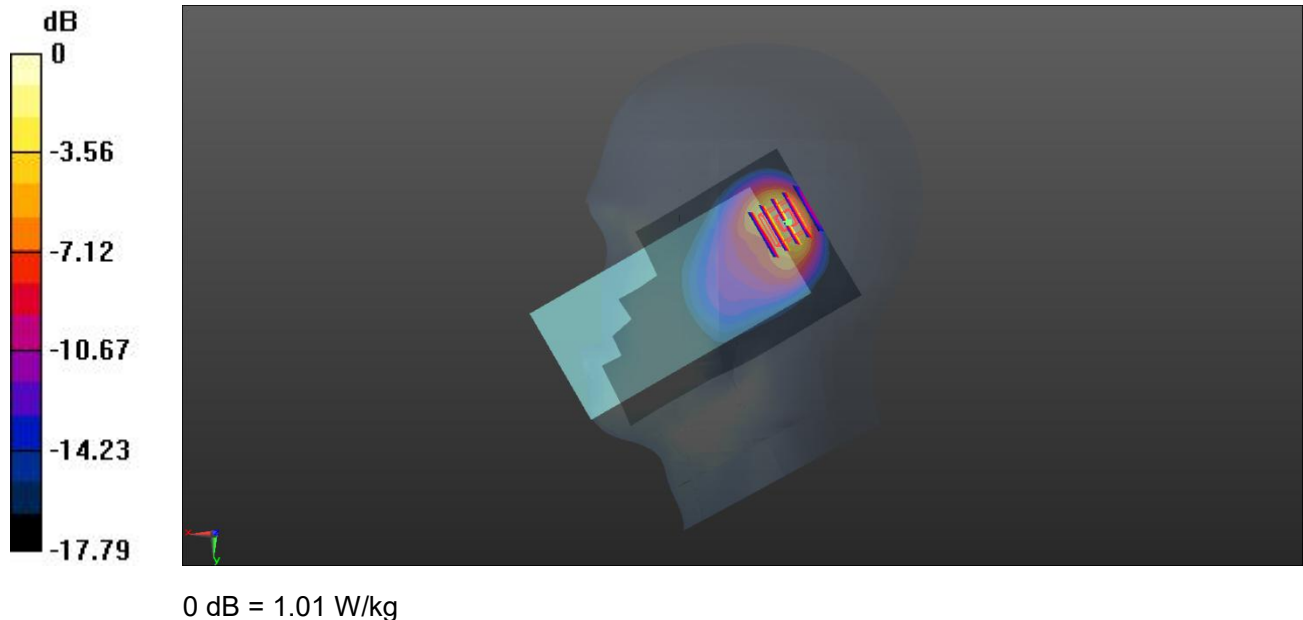

## MEAS.12 Body Plane with Back Side 15mm on High Channel in WCDMA Band 4 mode with Up Antenna

Date: 2019.11.23

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 53.129$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 1513/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Ch 1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.14 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.510 W/kg

**SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 0.342 W/kg

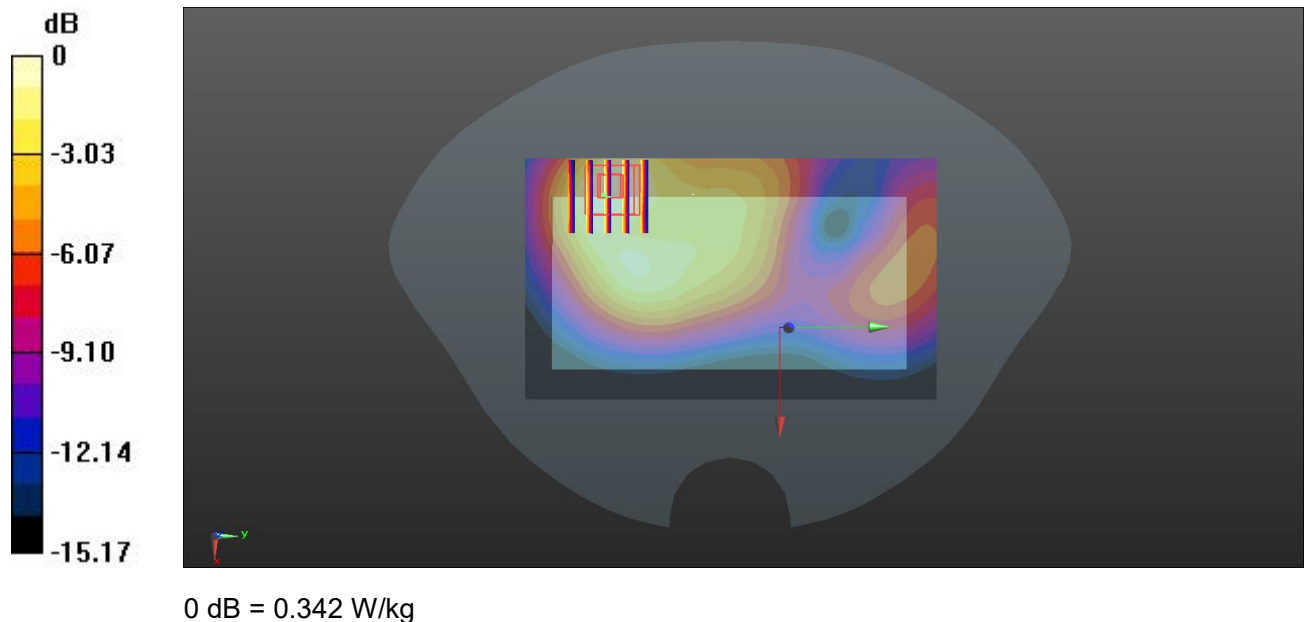



# MEAS.13 Body Plane with Top Edge 10mm on High Channel in WCDMA Band 4 mode with Up Antenna

Date: 2019.11.23

Communication System Band: IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 53.129$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 1513/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.762 W/kg


**Ch 1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.359 W/kg**

Maximum value of SAR (measured) = 0.763 W/kg

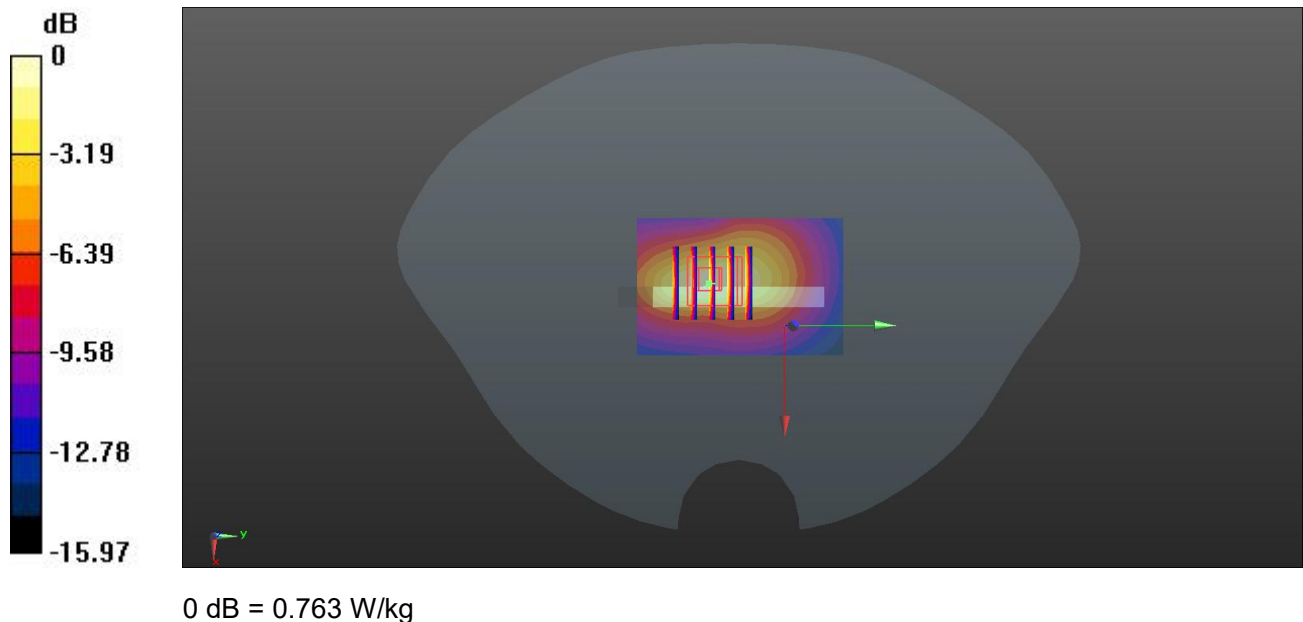

# MEAS.14 Right Head with Cheek on Low Channel in WCDMA Band 5 mode with Up Antenna

Date: 2019.10.31

Communication System Band: V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.903$  S/m;  $\epsilon_r = 42.01$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.0 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.02, 10.02, 10.02); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 4132/Area Scan (61x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.414 W/kg


**Ch 4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 17.35 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.670 W/kg

**SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.205 W/kg**

Maximum value of SAR (measured) = 0.350 W/kg

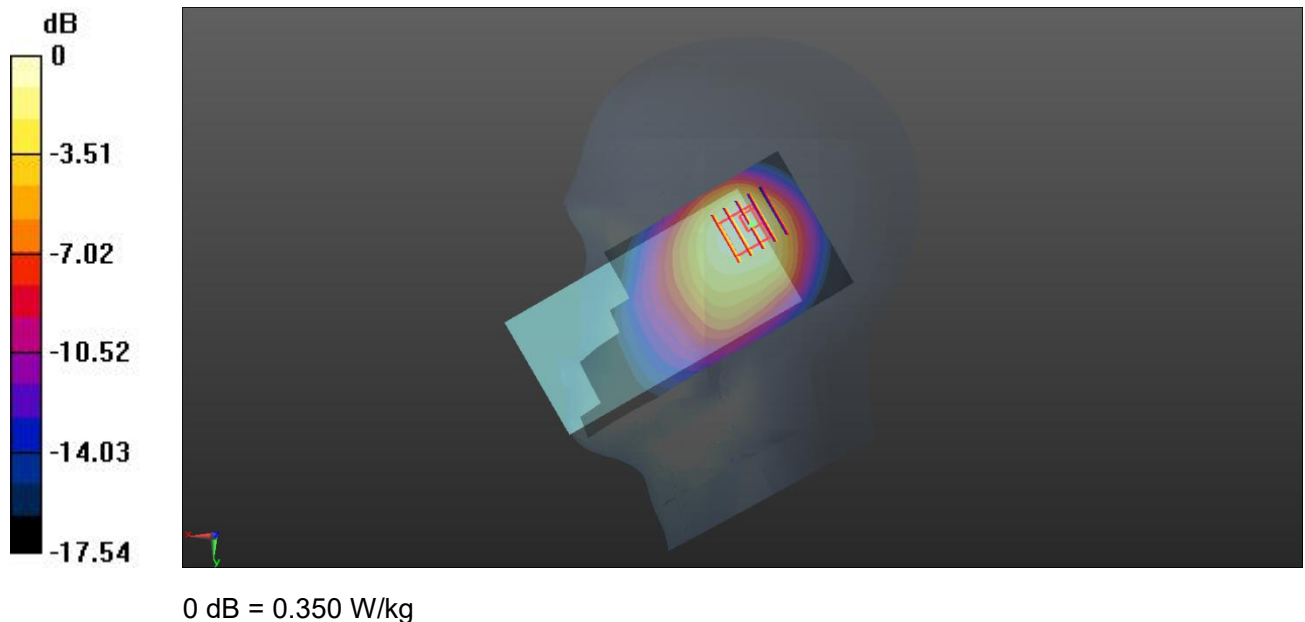

## MEAS.15 Body Plane with Back Side 15mm on Low Channel in WCDMA Band 5 mode with Down Antenna

Date: 2019.11.19

Communication System Band: V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.978$  S/m;  $\epsilon_r = 56.051$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 4132/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


**Ch 4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.63 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

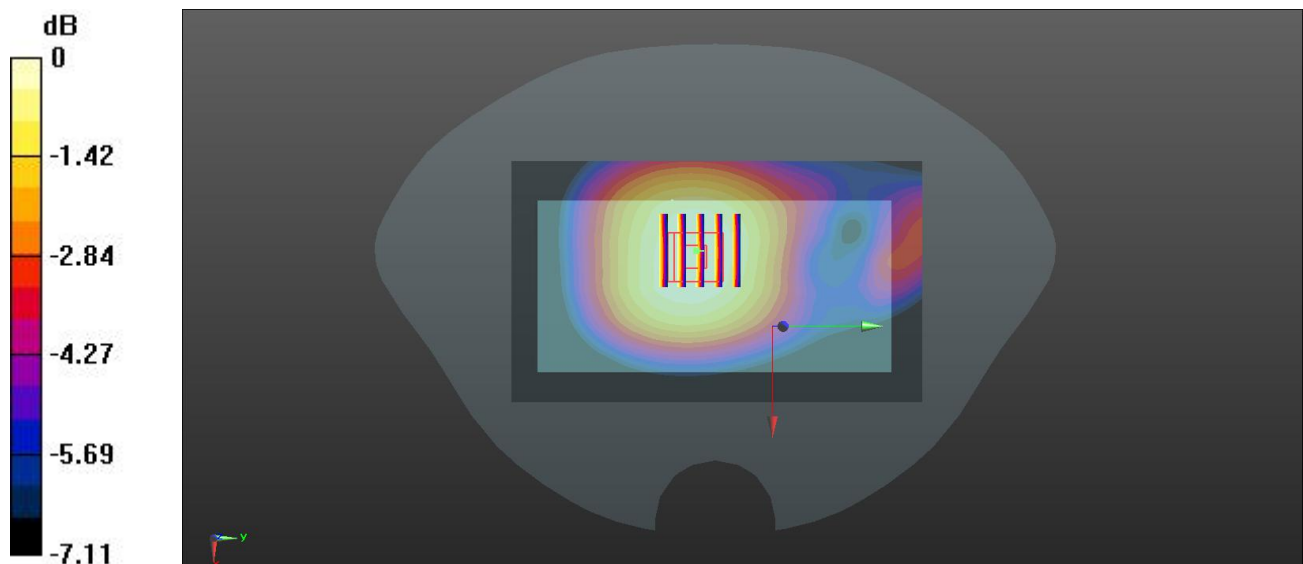

0 dB = 0.186 W/kg

# MEAS.16 Body Plane with Bottom 10mm on Low Channel in WCDMA Band 5 mode with Down Antenna

Date: 2019.11.19

Communication System Band: V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.978$  S/m;  $\epsilon_r = 56.051$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.6 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 4132/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.224 W/kg


**Ch 4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.92 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.238 W/kg

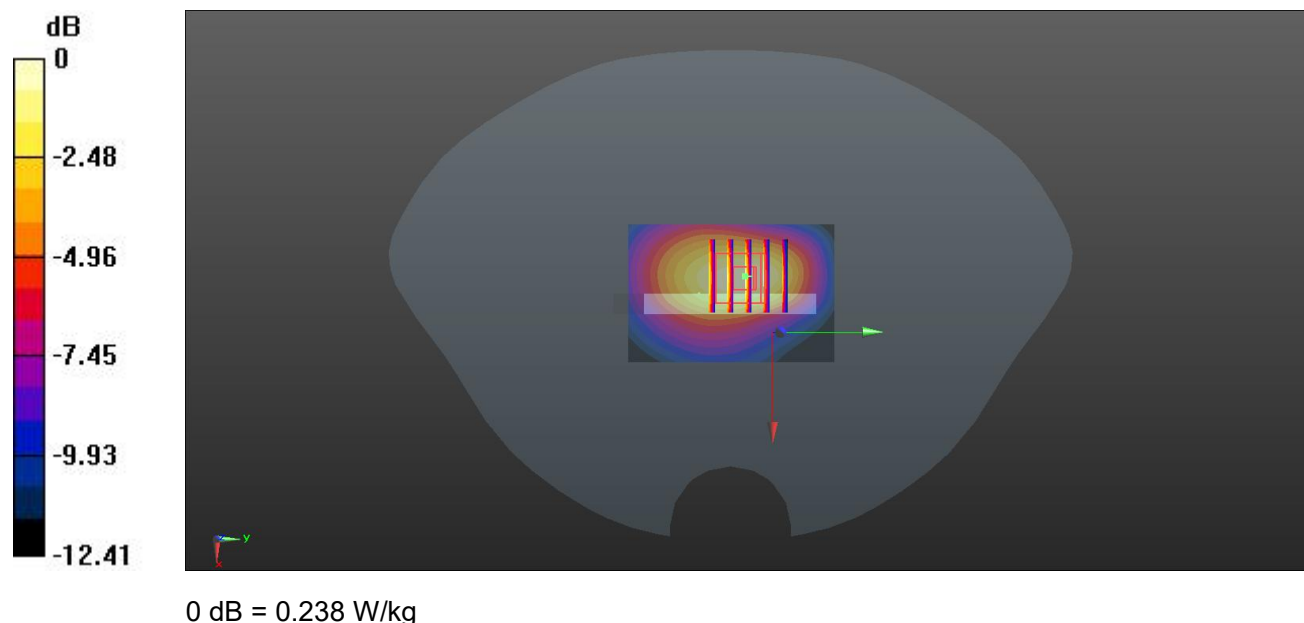

## MEAS.17 Right Head with Tilt on Middle Channel in LTE Band 2 mode with Up Antenna

Date: 2019.11.26

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.434$  S/m;  $\epsilon_r = 39.142$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.4 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.38, 8.38, 8.38); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 18900/Area Scan (71x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.20 W/kg


**Ch 18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.56 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.448 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

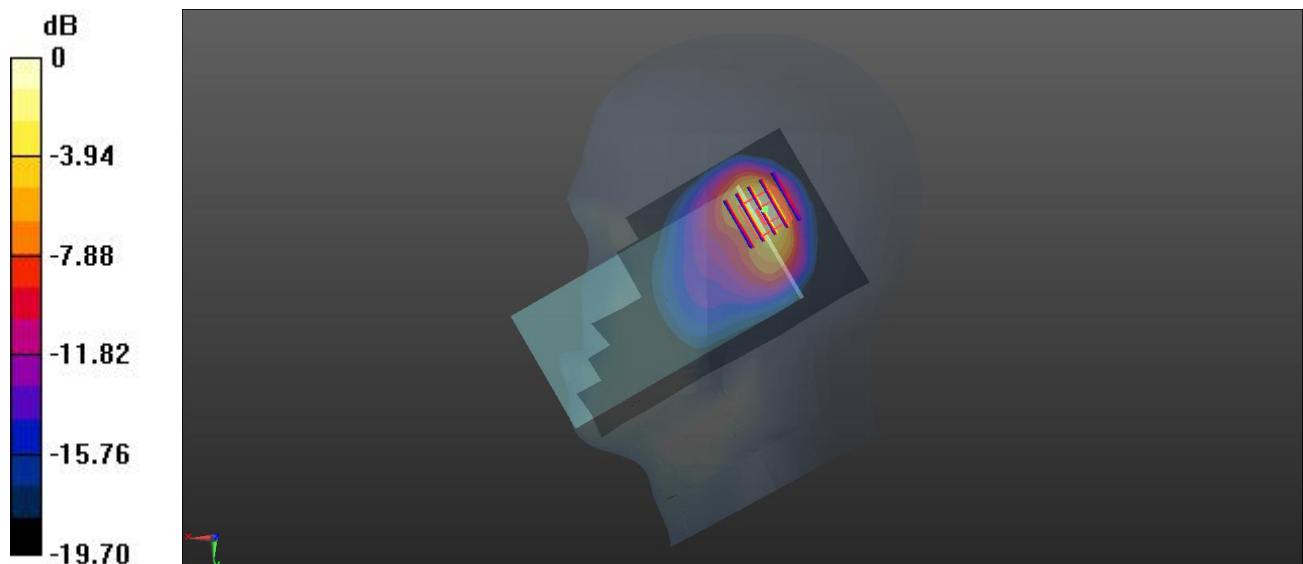

0 dB = 1.19 W/kg

# MEAS.18 Body Plane with Back Side 15mm on Middle Channel in LTE Band 2 mode with Down Antenna

Date: 2019.11.29

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 54.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.3 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.043 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.533 W/kg

**SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.201 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

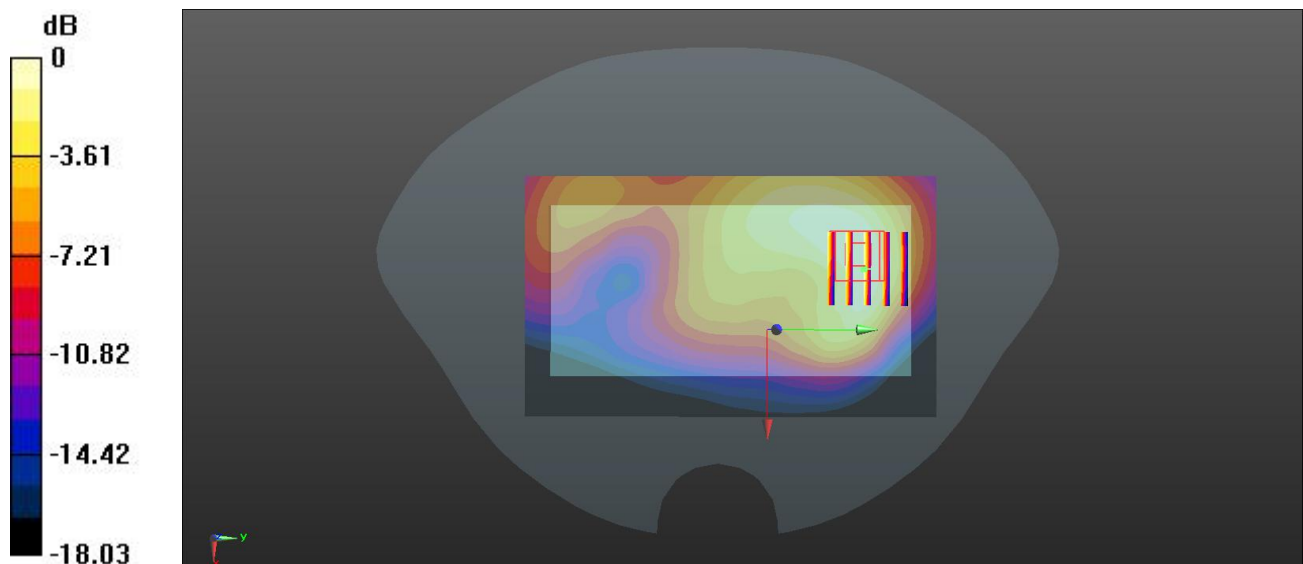

0 dB = 0.355 W/kg

# MEAS.19 Body Plane with Back Side 10mm on Middle Channel in LTE Band 2 mode with Down Antenna

Date: 2019.11.29

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 54.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.3 Liquid Temperature:21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.94 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.963 W/kg

**SAR(1 g) = 0.555 W/kg; SAR(10 g) = 0.322 W/kg**

Maximum value of SAR (measured) = 0.608 W/kg

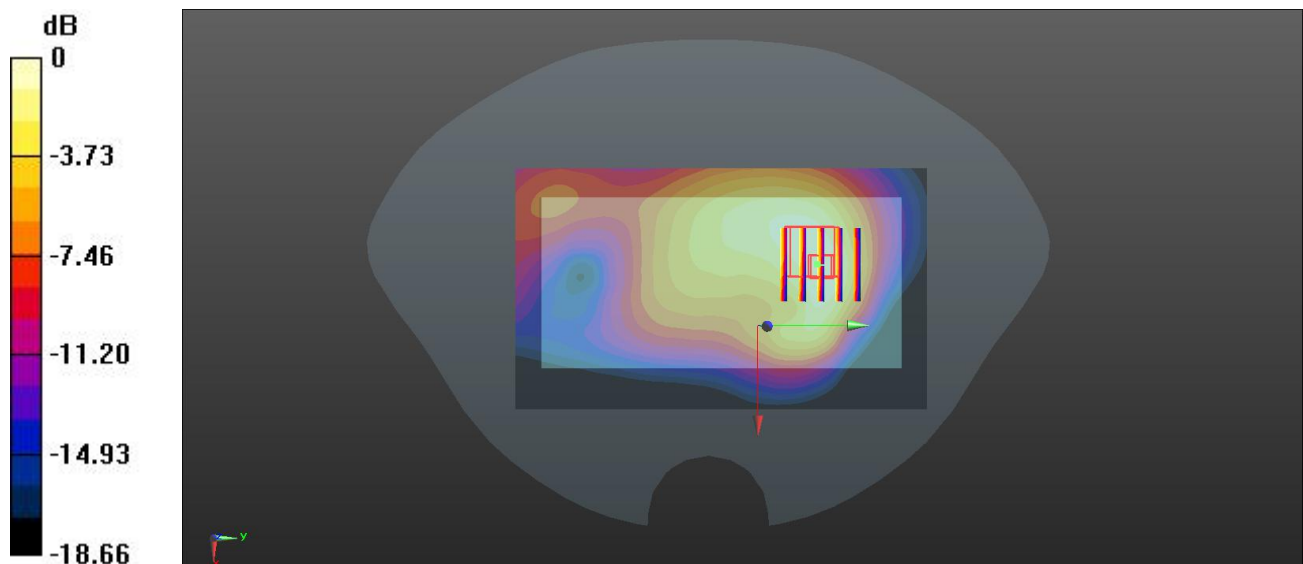

0 dB = 0.608 W/kg

## MEAS.20 Body Plane with Top Edge 0mm on Middle Channel in LTE Band 2 mode with Up Antenna

Date: 2019.11.29

Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.526$  S/m;  $\epsilon_r = 54.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.99, 7.99, 7.99); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.70 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.10 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 9.87 W/kg

**SAR(1 g) = 3.86 W/kg; SAR(10 g) = 1.48 W/kg**

Maximum value of SAR (measured) = 5.00 W/kg

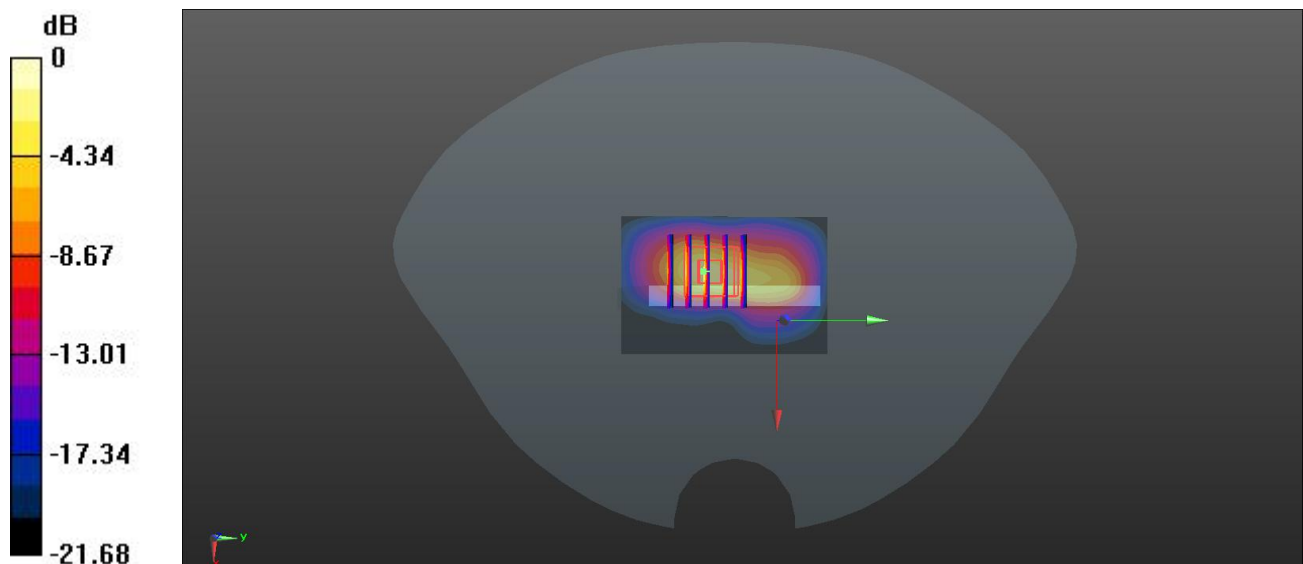

0 dB = 5.00 W/kg



## MEAS.21 Right Head with Tilt on High Channel in LTE Band 4 mode with Up Antenna

Date: 2019.11.22

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 40.294$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.5 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.67, 8.67, 8.67); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20300/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


**Ch 20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.05 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.437 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

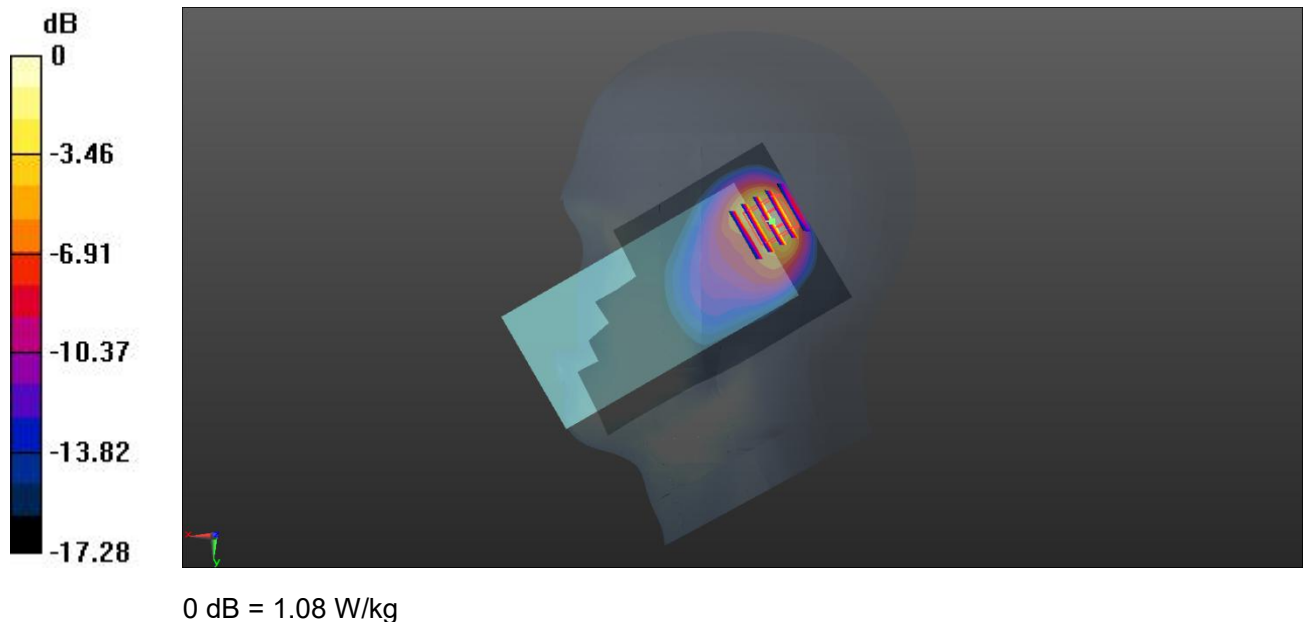

## MEAS.22 Body Plane with Back Side 15mm on High Channel in LTE Band 4 mode with Up Antenna

Date: 2019.11.24

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.511$  S/m;  $\epsilon_r = 54.437$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20300/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.362 W/kg


**Ch 20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.367 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.552 W/kg

**SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.210 W/kg**

Maximum value of SAR (measured) = 0.377 W/kg

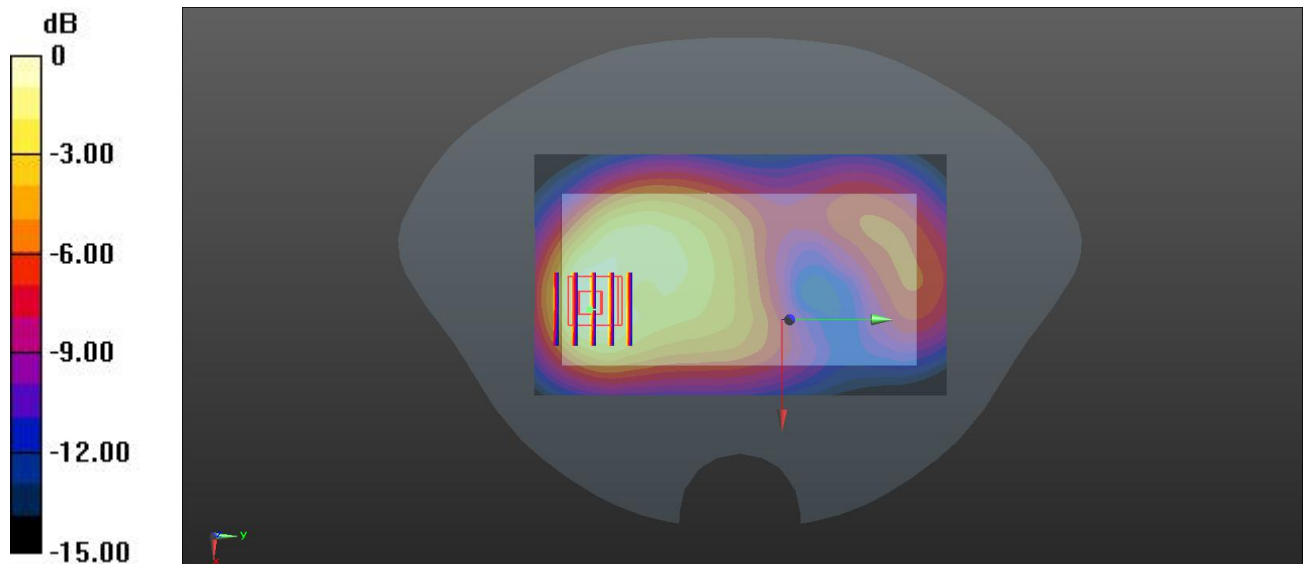

0 dB = 0.377 W/kg

# MEAS.23 Body Plane with Top Edge 10mm on High Channel in LTE Band 4 mode with Up Antenna

Date: 2019.11.24

Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1745 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.511$  S/m;  $\epsilon_r = 54.437$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(8.31, 8.31, 8.31); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20300/Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.726 W/kg


**Ch 20300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.71 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.358 W/kg**

Maximum value of SAR (measured) = 0.763 W/kg

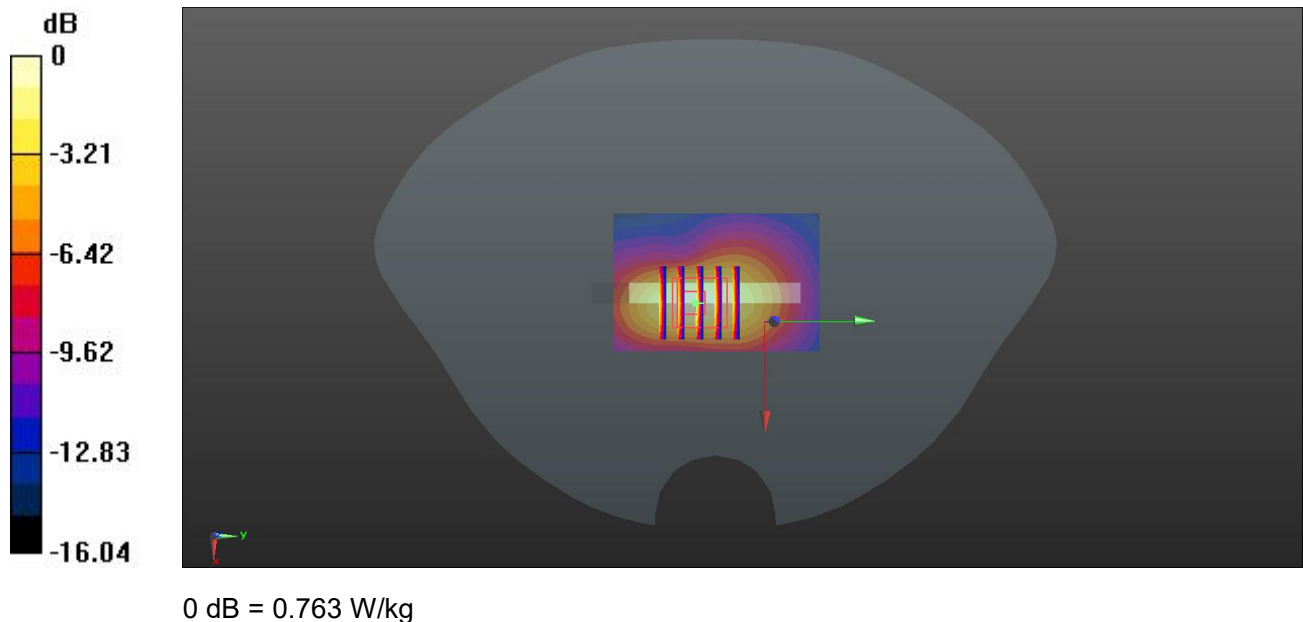

## MEAS.24 Right Head with Cheek on High Channel in LTE Band 5 mode with Up Antenna

Date: 2019.11.18

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 844$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 40.977$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.0 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.02, 10.02, 10.02); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20600/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.500 W/kg


**Ch 20600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.68 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.808 W/kg

**SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.431 W/kg

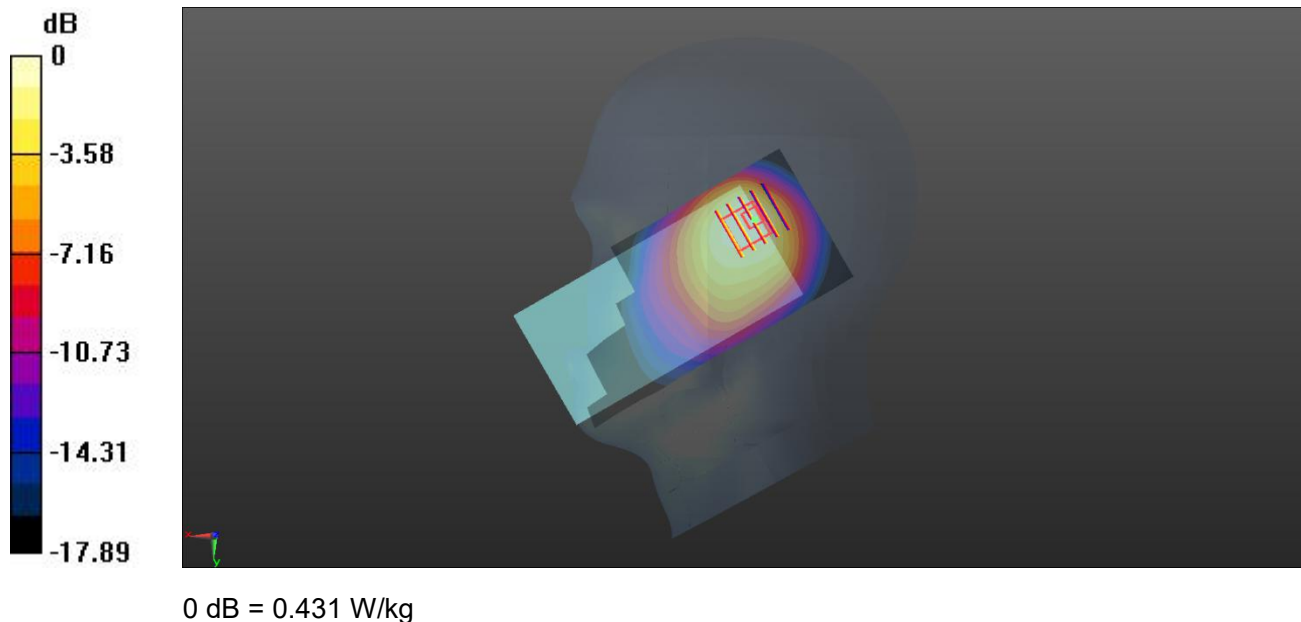

# MEAS.25 Body Plane with Back Side 15mm on High Channel in LTE Band 5 mode with Down Antenna

Date: 2019.11.20

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 844 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 54.094$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20600/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.197 W/kg


**Ch 20600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.43 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.196 W/kg

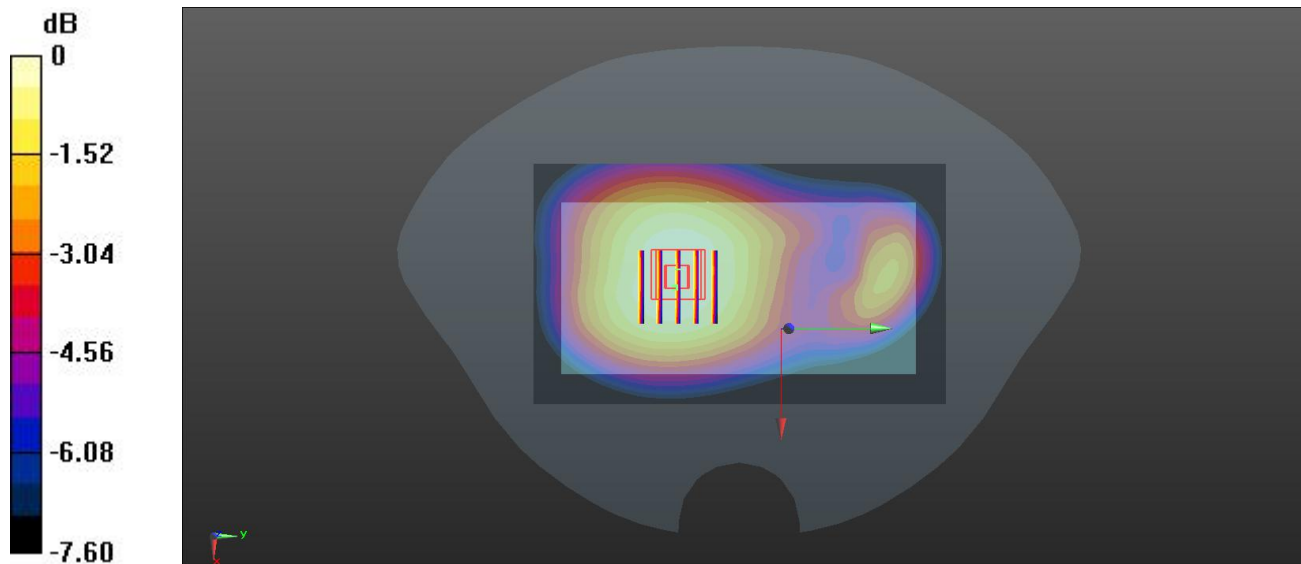

0 dB = 0.196 W/kg

## MEAS.26 Body Plane with Bottom Edge 10mm on High Channel in LTE Band 5 mode with Down Antenna

Date: 2019.11.20

Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated):  $f = 844$  MHz;  $\sigma = 0.998$  S/m;  $\epsilon_r = 54.094$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.3

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(10.07, 10.07, 10.07); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 20600/Area Scan (41x61x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.322 W/kg


**Ch 20600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 15.83 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.525 W/kg

**SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.158 W/kg**

Maximum value of SAR (measured) = 0.328 W/kg

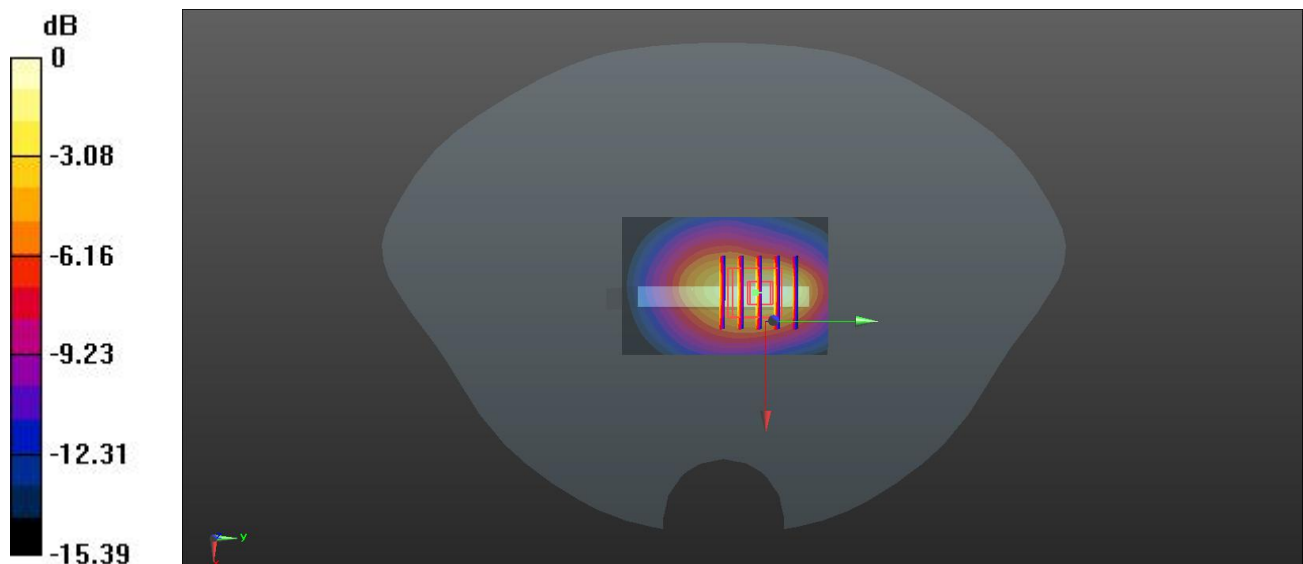

0 dB = 0.328 W/kg

## MEAS.27 Right Head with Cheek on Low Channel in LTE Band 7 mode with Up Antenna

Date: 2019.12.05

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2510$  MHz;  $\sigma = 1.878$  S/m;  $\epsilon_r = 39.872$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature: 22.3 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.81, 7.81, 7.81); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20850/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.24 W/kg


**Ch20850/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.906 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.34 W/kg

**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.485 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

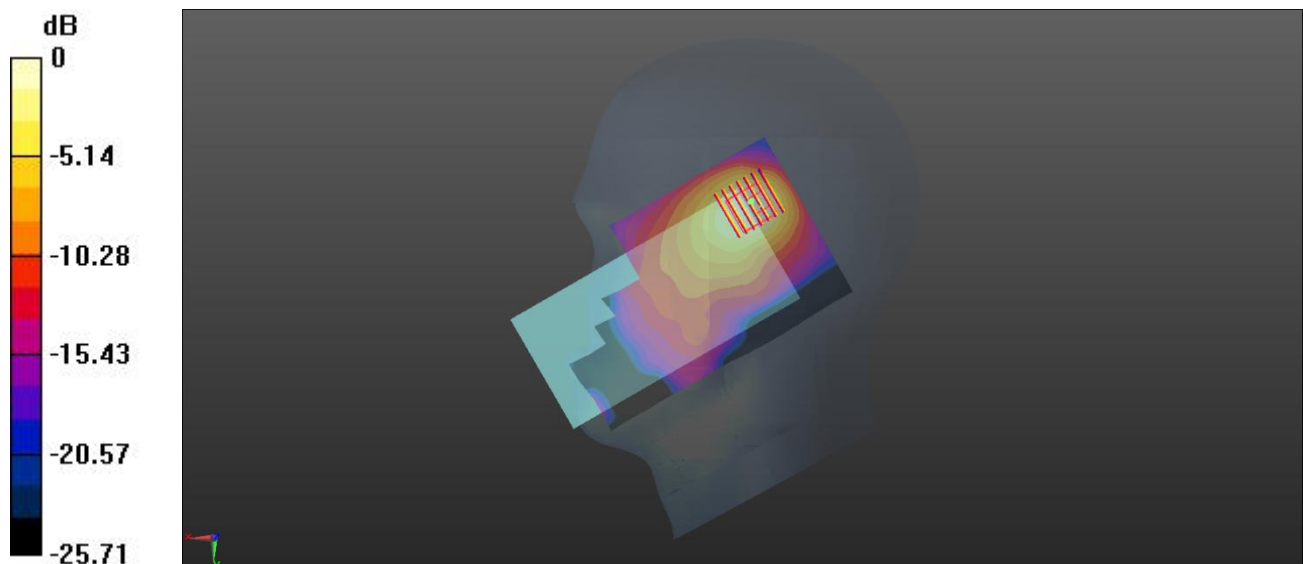

0 dB = 1.05 W/kg

## MEAS.28 Body Plane with Back Side 15mm on Middle Channel in LTE Band 7 mode with Up Antenna

Date: 2019.12.07

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.099$  S/m;  $\epsilon_r = 53.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 21100/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.256 W/kg


**Ch 21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.432 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

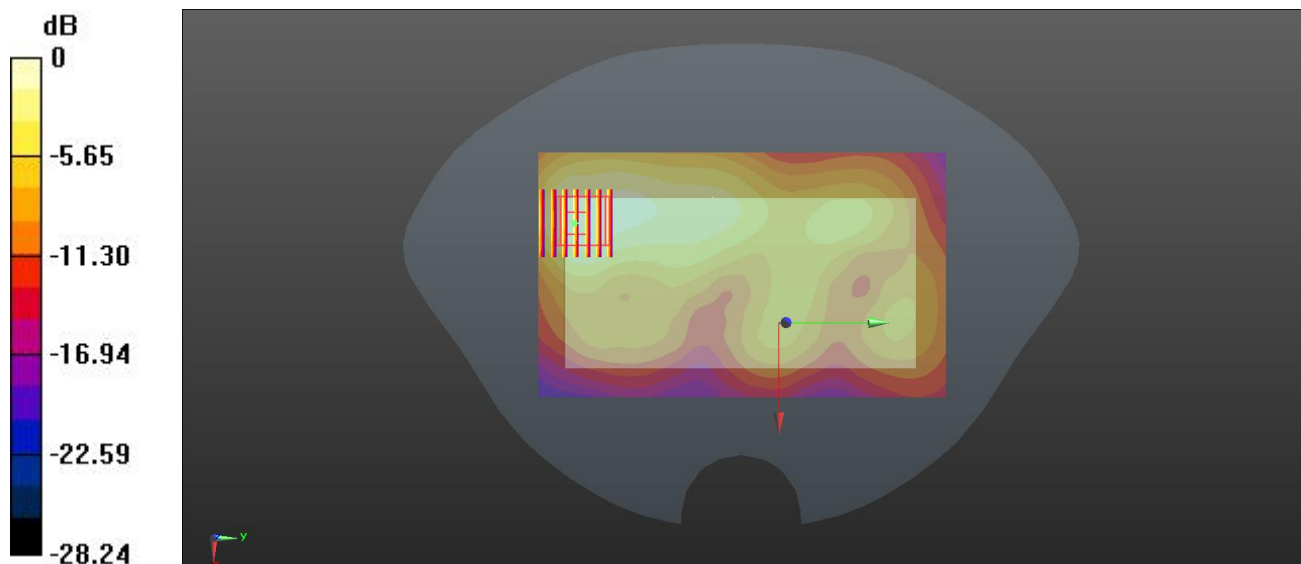

0 dB = 0.255 W/kg



## MEAS.29 Body Plane with Back Side 10mm on Middle Channel in LTE Band 7 mode with Up Antenna

Date: 2019.12.07

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.099$  S/m;  $\epsilon_r = 53.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 21100/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.543 W/kg


**Ch 21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.566 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.233 W/kg**

Maximum value of SAR (measured) = 0.588 W/kg

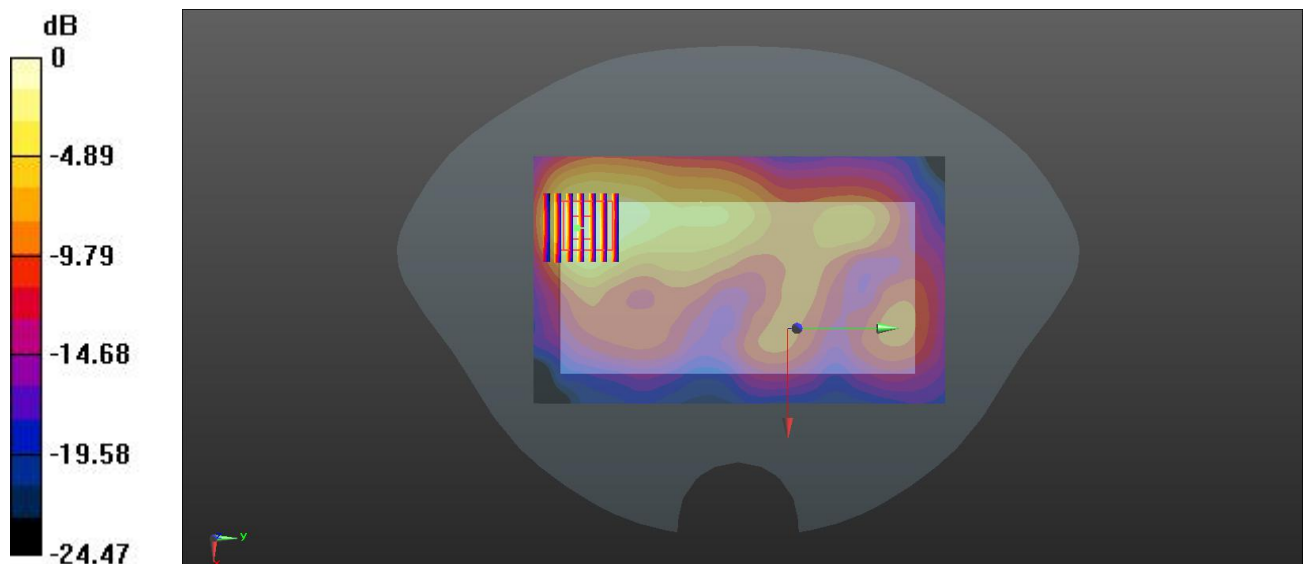

0 dB = 0.588 W/kg

# MEAS.30 Body Plane with Back Side 0mm on Middle Channel in LTE Band 7 mode with Up Antenna

Date: 2019.12.07

Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.099$  S/m;  $\epsilon_r = 53.118$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.4 Liquid Temperature:21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 21100/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.39 W/kg


**Ch 21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.160 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 8.02 W/kg

**SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.12 W/kg**

Maximum value of SAR (measured) = 3.52 W/kg

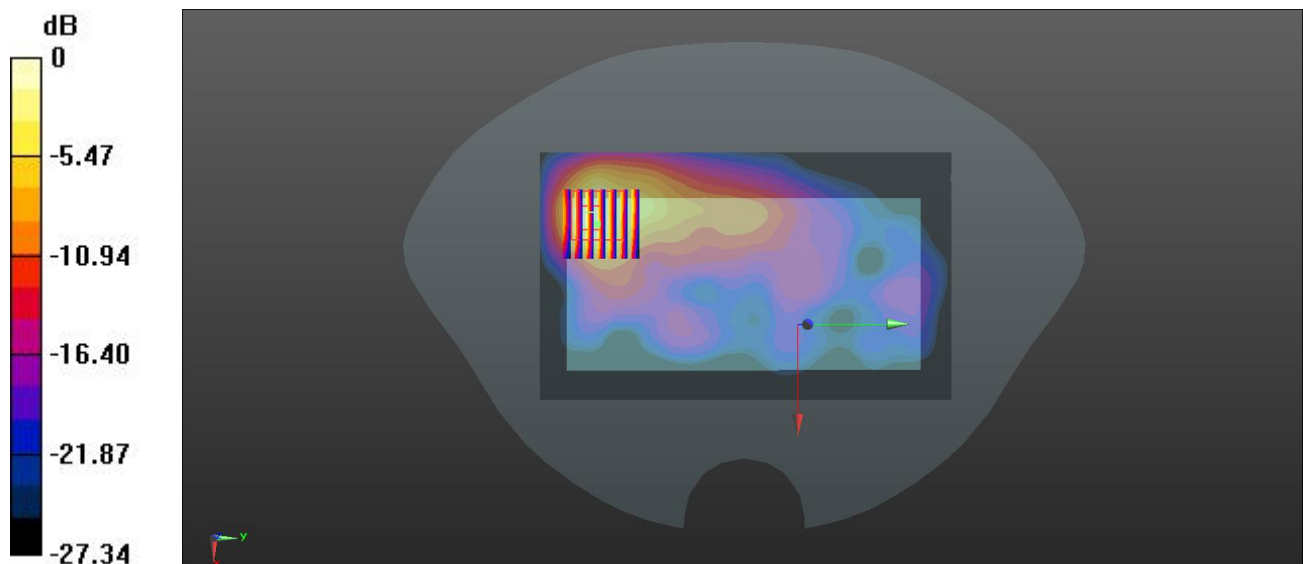

0 dB = 3.52 W/kg

# MEAS.31 Right Head with Cheek on Channel 40185 in LTE Band 41 mode with Up Antenna

Date: 2019.12.06

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated):  $f = 2549.5$  MHz;  $\sigma = 1.895$  S/m;  $\epsilon_r = 38.322$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Ambient Temperature:22.6 Liquid Temperature:21.2

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.81, 7.81, 7.81); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch40185/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.996 W/kg


**Ch40185/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.214 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.83 W/kg

**SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.409 W/kg**

Maximum value of SAR (measured) = 0.905 W/kg

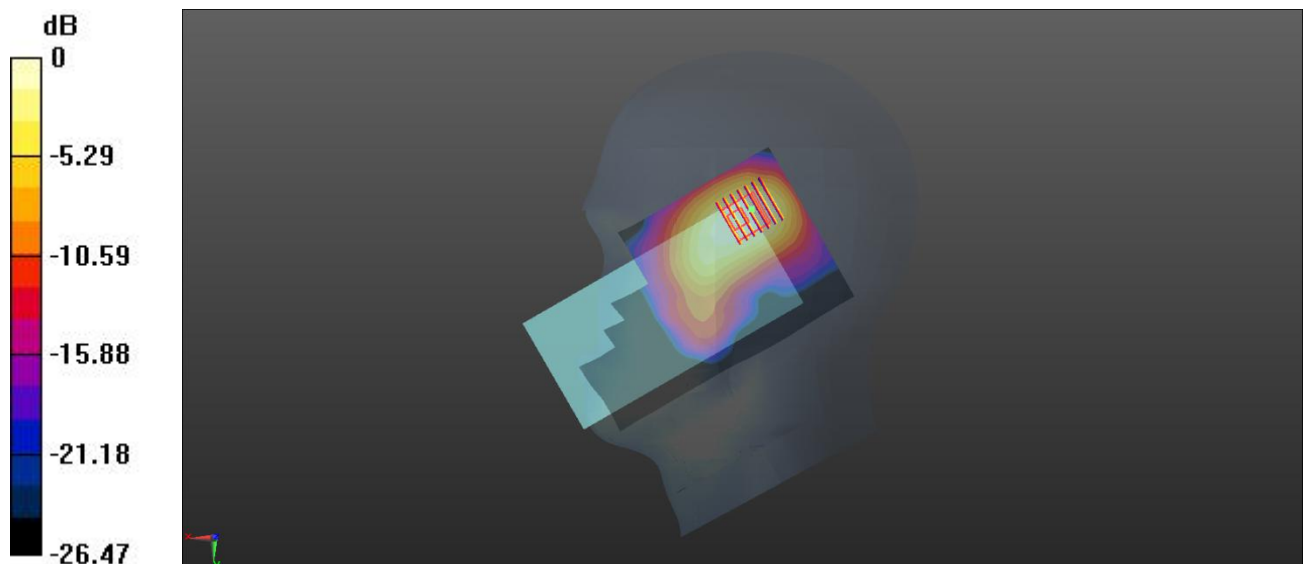

0 dB = 0.905 W/kg

# MEAS.32 Body Plane with Back Side 15mm on Middle Channel in LTE Band 41 mode with Up Antenna

Date: 2019.12.08

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1 .58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.184$  S/m;  $\epsilon_r = 50.918$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.2 Liquid Temperature:21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.46, 7.46, 7.46); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch 40620/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.313 W/kg


**Ch 40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.882 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.600 W/kg

**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.319 W/kg

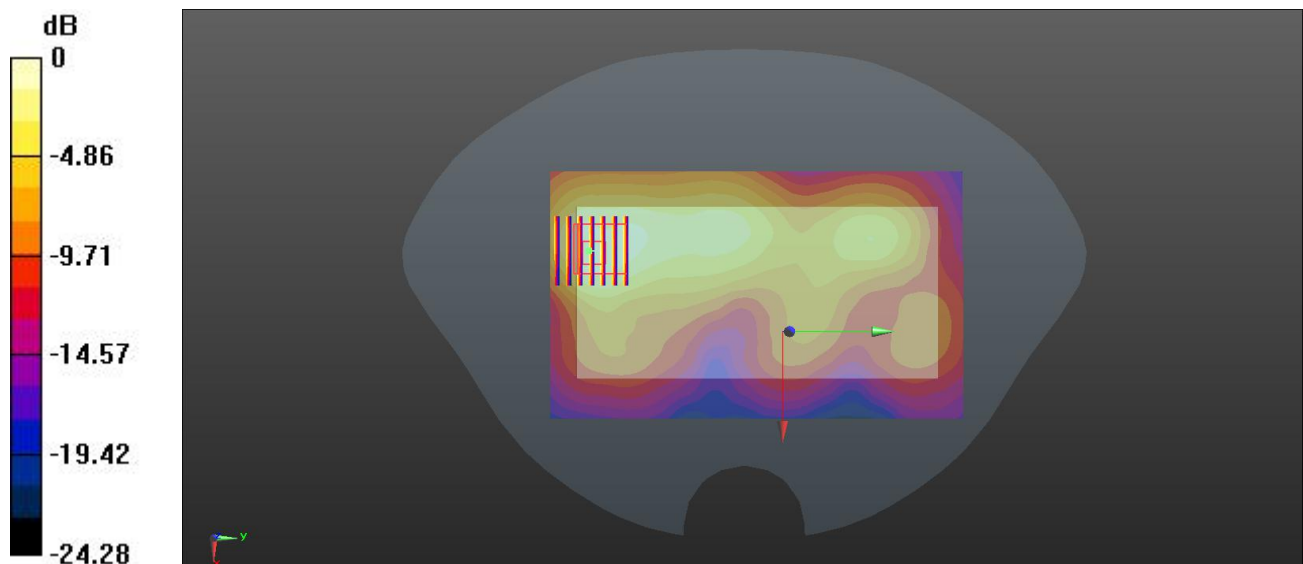

0 dB = 0.319 W/kg

### MEAS.33 Body Plane with Back Side 10mm on Middle Channel in LTE Band 41 mode with Up Antenna

Date: 2019.12.08

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.184$  S/m;  $\epsilon_r = 50.918$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.46, 7.46, 7.46); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch40620/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.479 W/kg


**Ch40620/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.022 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.881 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.453 W/kg

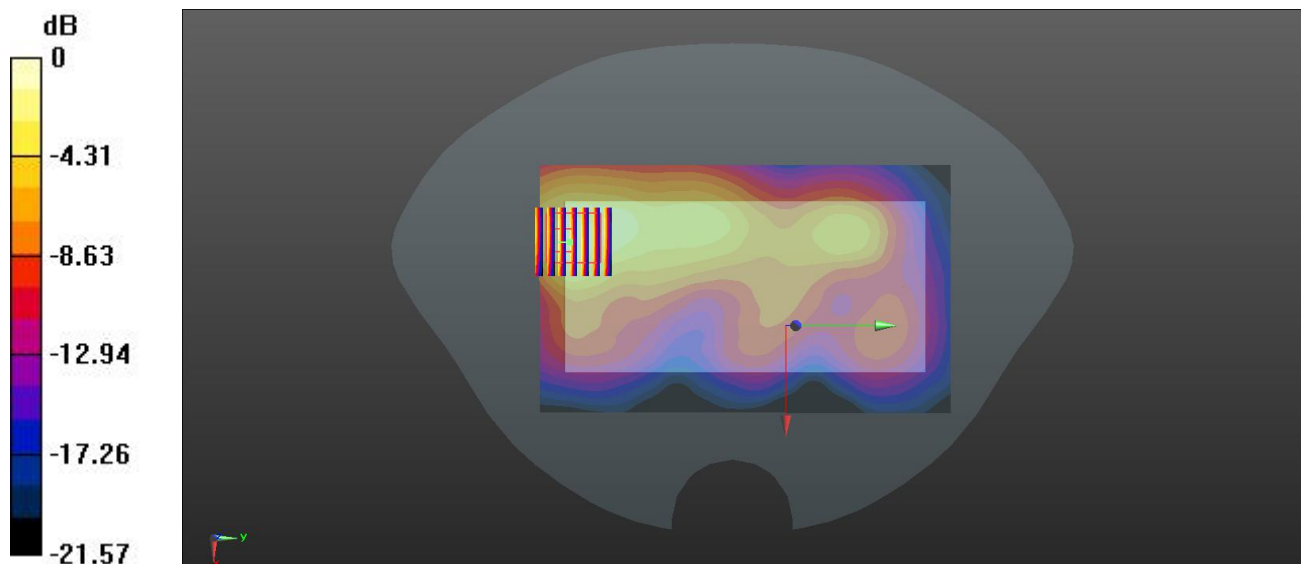

0 dB = 0.453 W/kg

### MEAS.34 Left Head with Cheek on Middle Channel in IEEE802.11b mode

Date: 2019.12.09

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.772$  S/m;  $\epsilon_r = 39.647$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature: 22.4 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.81, 7.81, 7.81); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x151x1):** Interpolated grid:  $dx=1.200$  mm,  $dy=1.200$  mm

Maximum value of SAR (interpolated) = 1.19 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 11.38 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.38 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.485 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

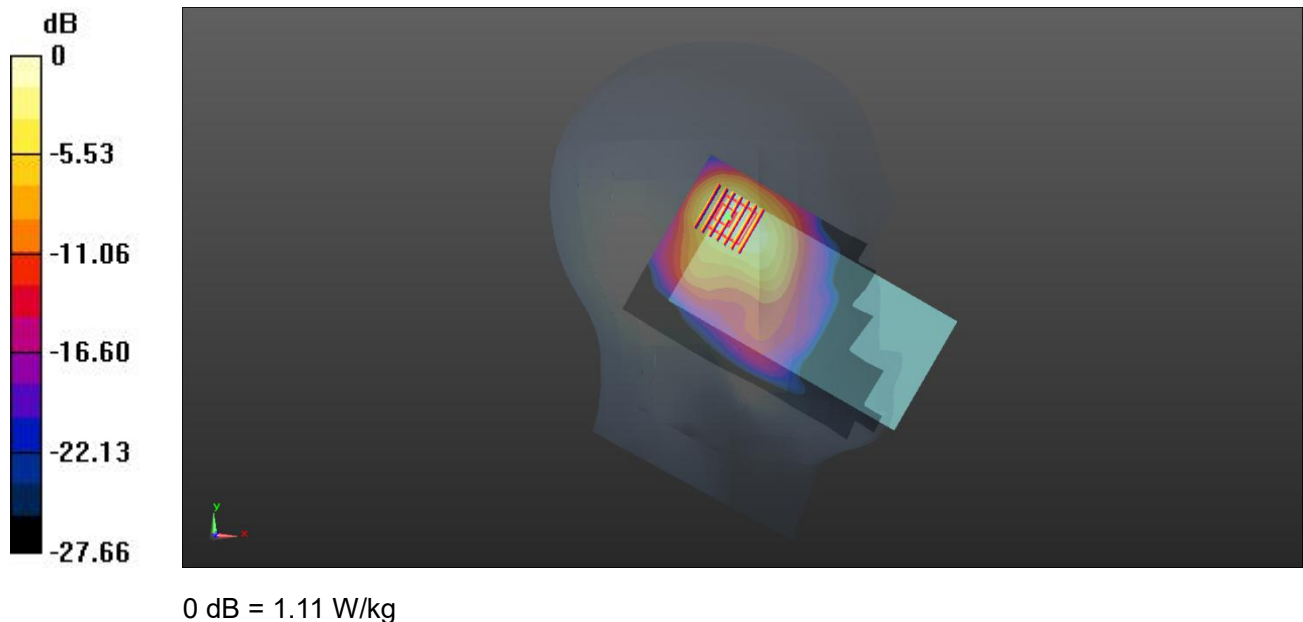

# MEAS.35 Body Plane with Back Side 15mm on Middle Channel in IEEE802.11b mode

Date: 2019.12.10

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.128 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.239 W/kg

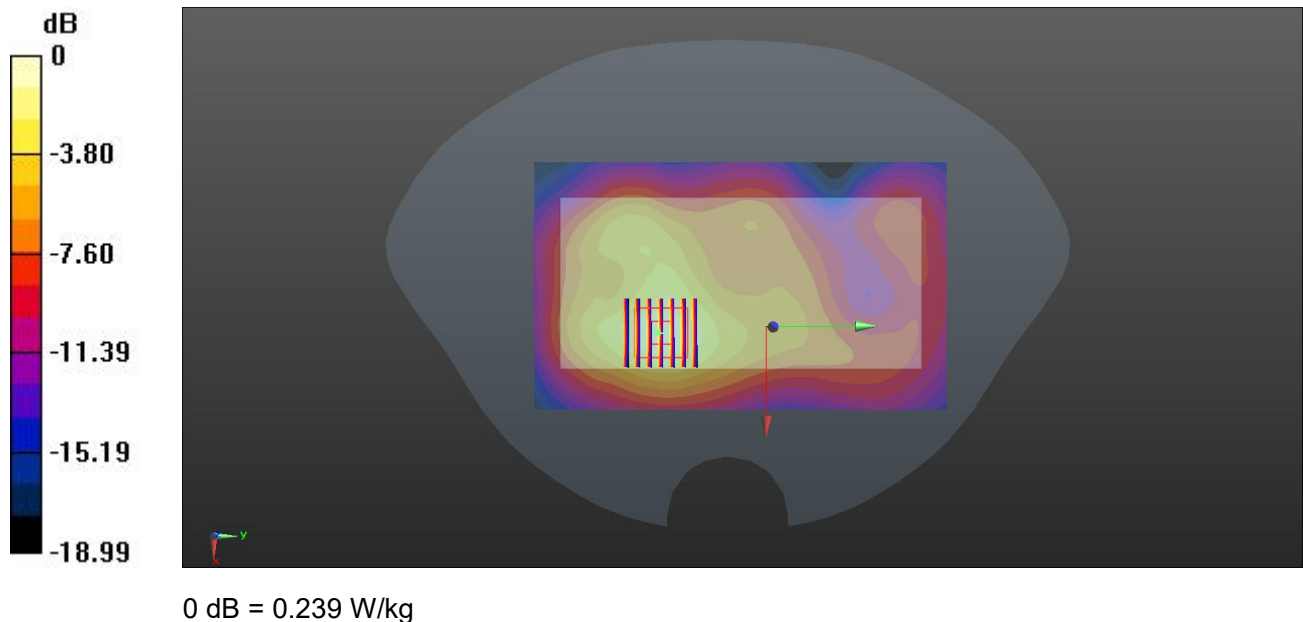

# MEAS.36 Body Plane with Back Side 10mm on Middle Channel in IEEE802.11b mode

Date: 2019.12.10

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1.02

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.924$  S/m;  $\epsilon_r = 53.26$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.433 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.233 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.696 W/kg

**SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.436 W/kg

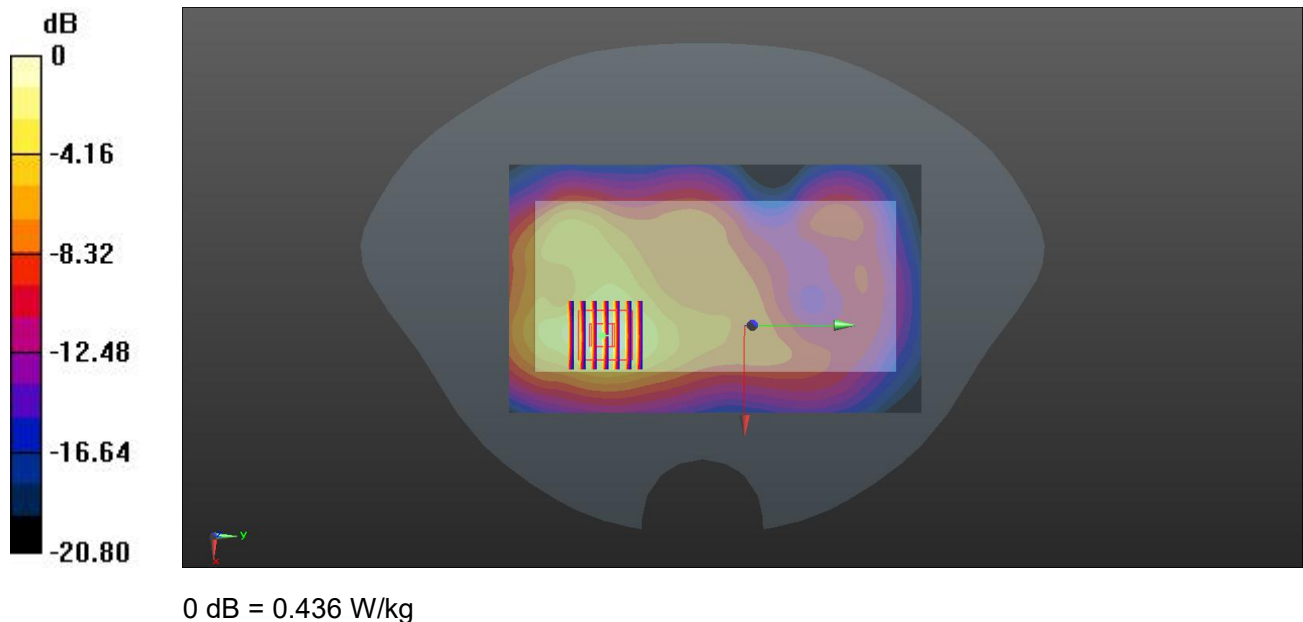



### MEAS.37 Left Head with Tilt on Channel 46 in IEEE802.11n(HT40) mode

Date: 2019.12.01

Communication System Band: WLAN(n)40MHz; Frequency: 5230 MHz; Duty Cycle: 1:1.04

Medium parameters used:  $f = 5230$  MHz;  $\sigma = 4.585$  S/m;  $\epsilon_r = 36.893$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature:22.4 Liquid Temperature:21.5

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.51, 5.51, 5.51); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch46/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Ch46/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.410 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.60 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.314 W/kg**

Maximum value of SAR (measured) = 2.25 W/kg

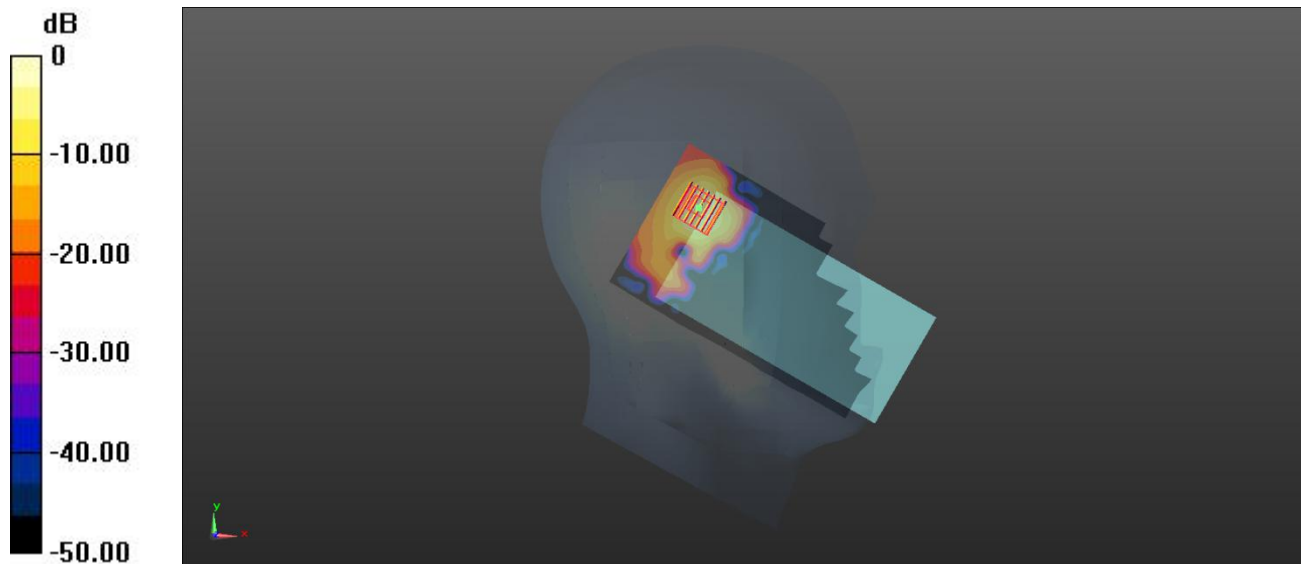

0 dB = 2.25 W/kg

# MEAS.38 Left Head with Tilt on Channel 118 in IEEE802.11n(HT40) mode

Date: 2019.12.02

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz;Duty Cycle: 1:1.04

Medium parameters used (interpolated):  $f = 5590$  MHz;  $\sigma = 4.998$  S/m;  $\epsilon_r = 35.502$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature:22.4 Liquid Temperature:21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.8, 4.8, 4.8); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch118/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.537 W/kg


**Ch118/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.985 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.41 W/kg

**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

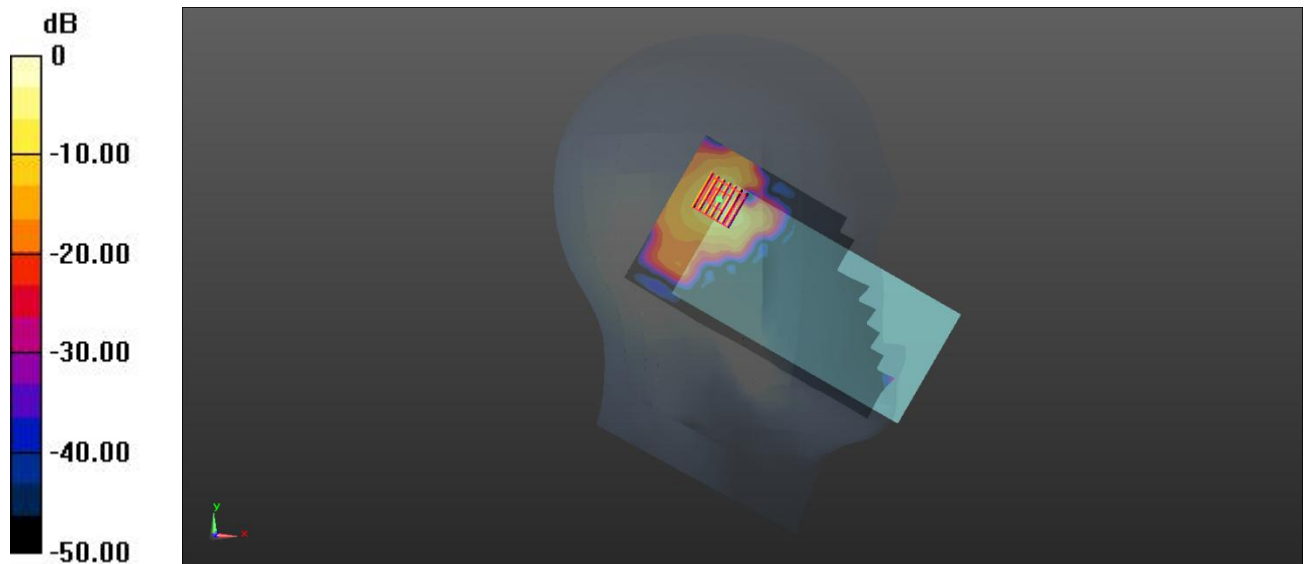

0 dB = 1.09 W/kg

### MEAS.39 Left Head with Tilt on Channel 155 in IEEE802.11ac(VHT80) mode

Date: 2019.12.02

Communication System Band: WLAN(ac) 80Mhz; Frequency: 5775 MHz;Duty Cycle: 1:1.08

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.364$  S/m;  $\epsilon_r = 34.138$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature:22.4 Liquid Temperature:21.7

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.06, 5.06, 5.06); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x191x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.02 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.748 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.24 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.305 W/kg**

Maximum value of SAR (measured) = 2.28 W/kg

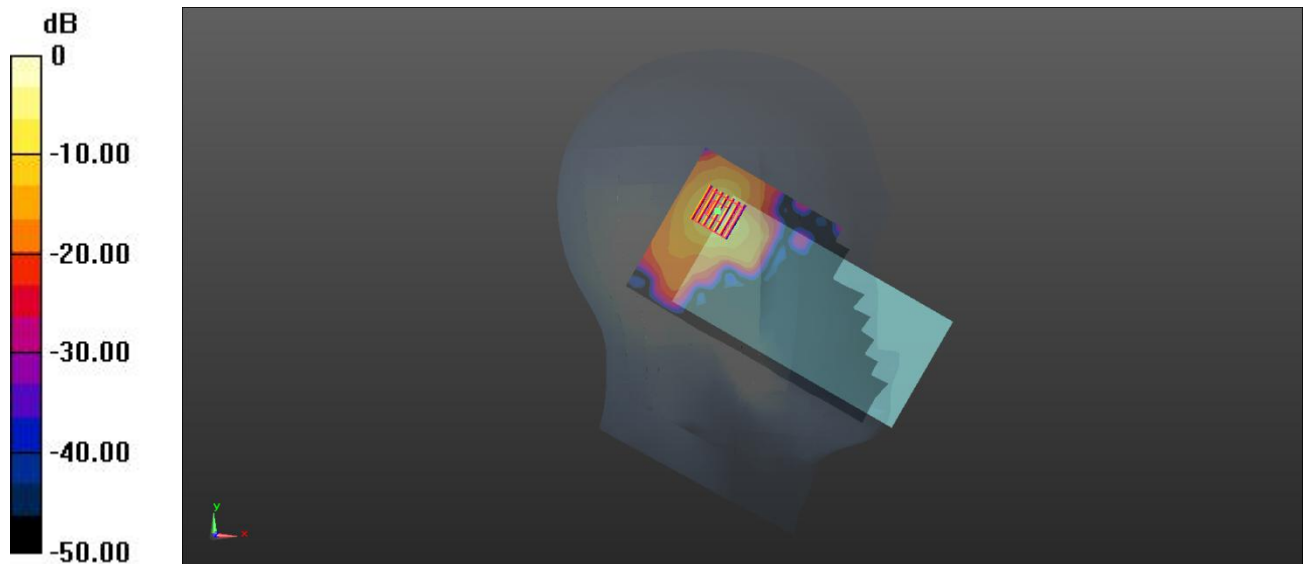

0 dB = 2.28 W/kg

# MEAS.40 Body Plane with Back Side 15mm on Channel 46 in IEEE802.11n(HT40) mode

Date: 2019.12.03

Communication System Band: WLAN(n)40MHz; Frequency: 5230 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 5230$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 49.525$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.08, 5.08, 5.08); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch46/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.191 W/kg


**Ch46/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.2670 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.677 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.333 W/kg

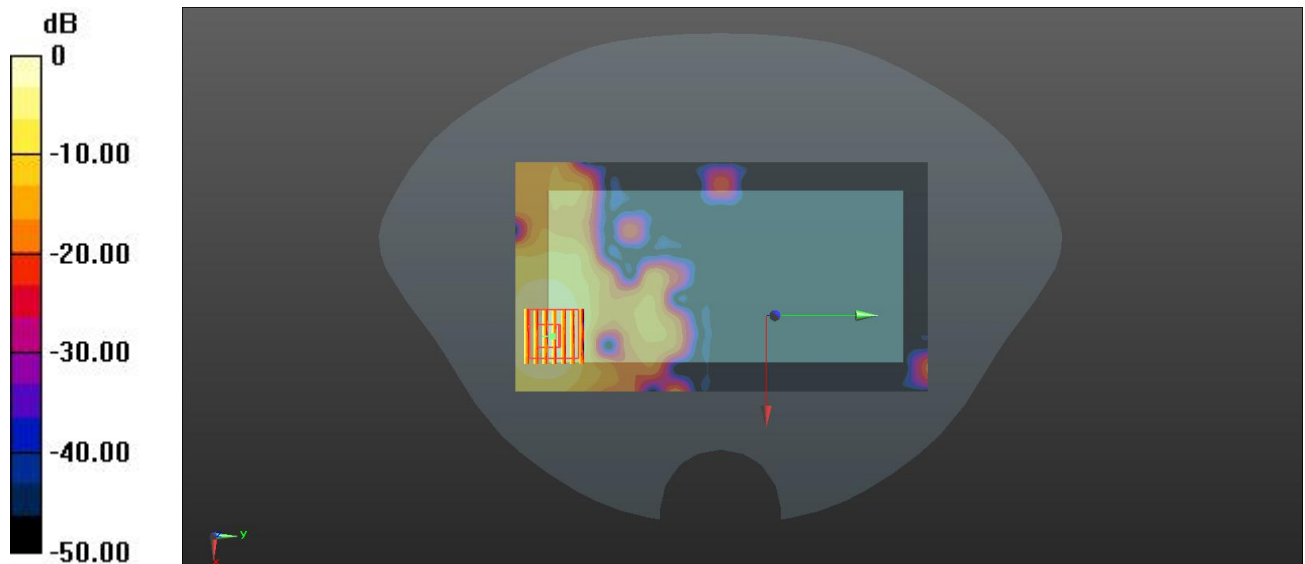

0 dB = 0.333 W/kg

# MEAS.41 Body Plane with Back Side 15mm on Channel 118 in IEEE802.11n(HT40) mode

Date: 2019.12.04

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 5590$  MHz;  $\sigma = 5.84$  S/m;  $\epsilon_r = 48.212$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.36, 4.36, 4.36); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch134/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.210 W/kg


**Ch134/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.770 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.611 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.329 W/kg

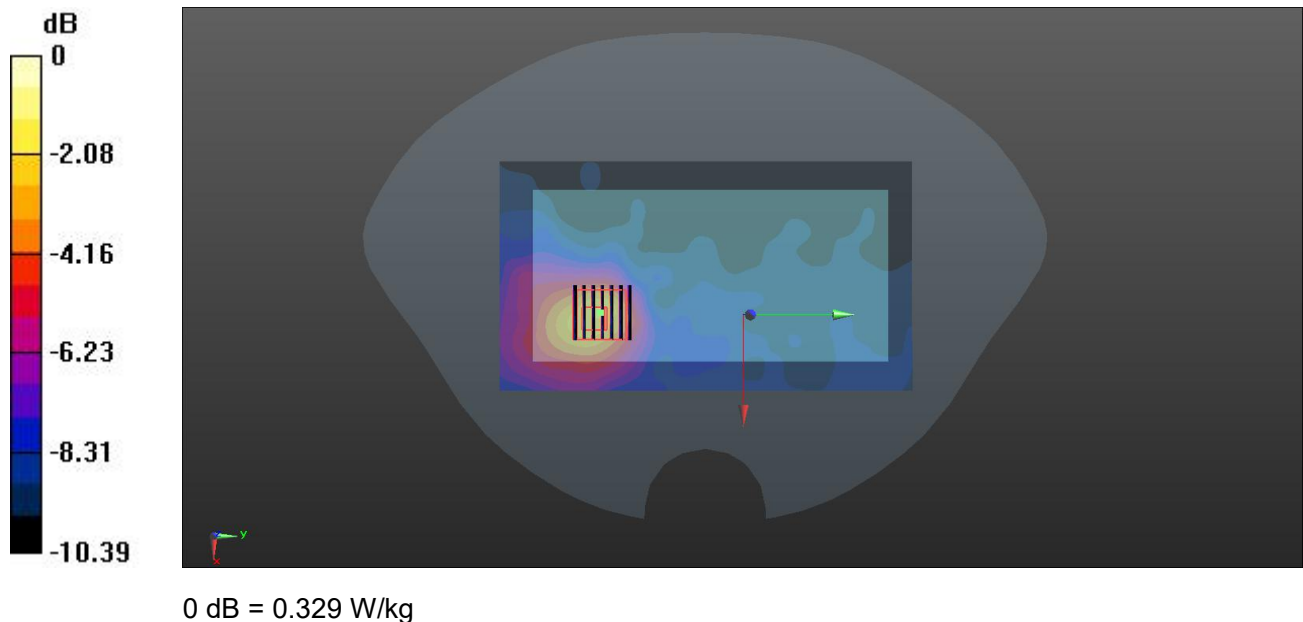

# MEAS.42 Body Plane with Back Side 15mm on Channel 155 in IEEE802.11ac(VHT80) mode

Date: 2019.12.04

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz;Duty Cycle: 1:1.08

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 6.153$  S/m;  $\epsilon_r = 47.107$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.51, 4.51, 4.51); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.485 W/kg

**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

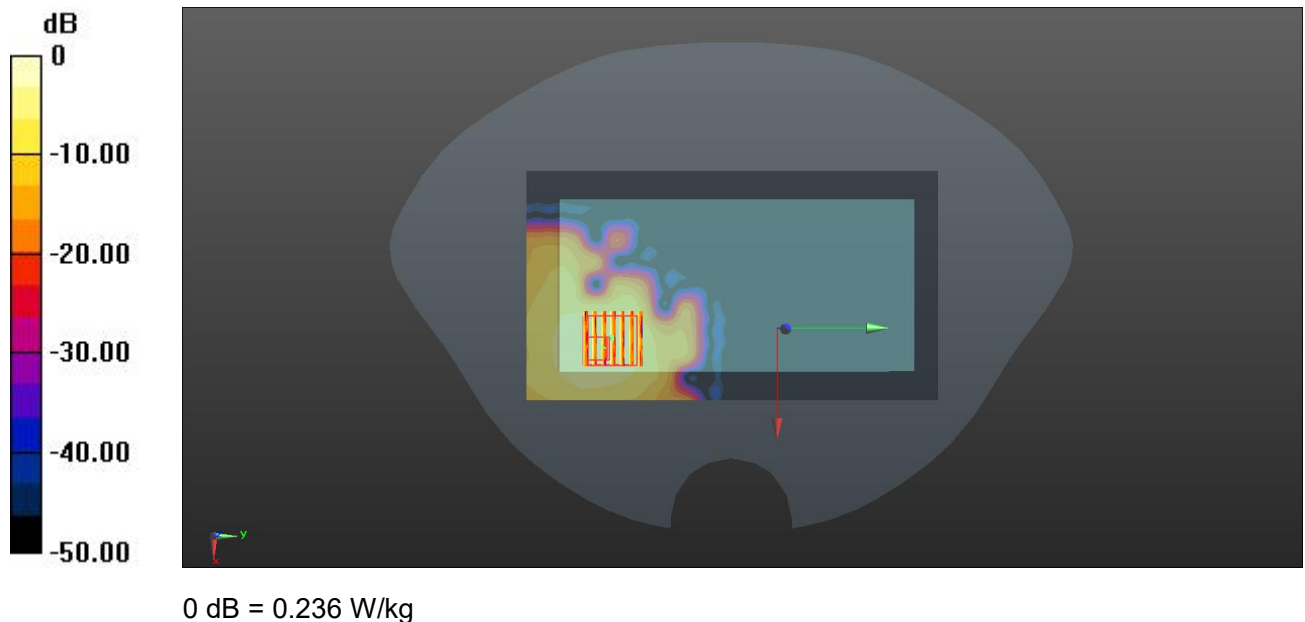

# MEAS.43 Body Plane with Back Side 10mm on Channel 46 in IEEE802.11n(HT40) mode

Date: 2019.12.03

Communication System Band: WLAN(n)40MHz; Frequency: 5230 MHz; Duty Cycle: 1:1.04

Medium parameters used:  $f = 5230$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 49.525$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.08, 5.08, 5.08); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch46/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.383 W/kg


**Ch46/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.821 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.645 W/kg

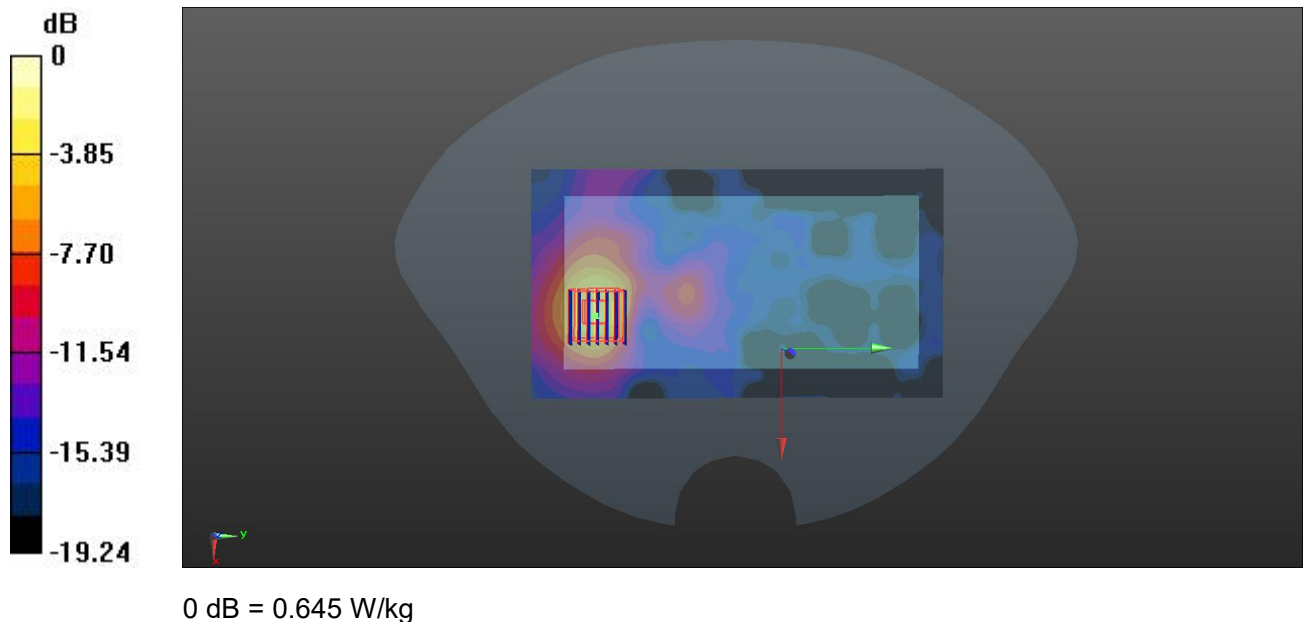

# MEAS.44 Body Plane with Back Side 10mm on Channel 155 in IEEE802.11ac(VHT80) mode

Date: 2019.12.04

Communication System Band: WLAN(ac)80MHz; Frequency: 5775 MHz;Duty Cycle: 1:1.08

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 6.153$  S/m;  $\epsilon_r = 47.107$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.51, 4.51, 4.51); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.438 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.904 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.409 W/kg

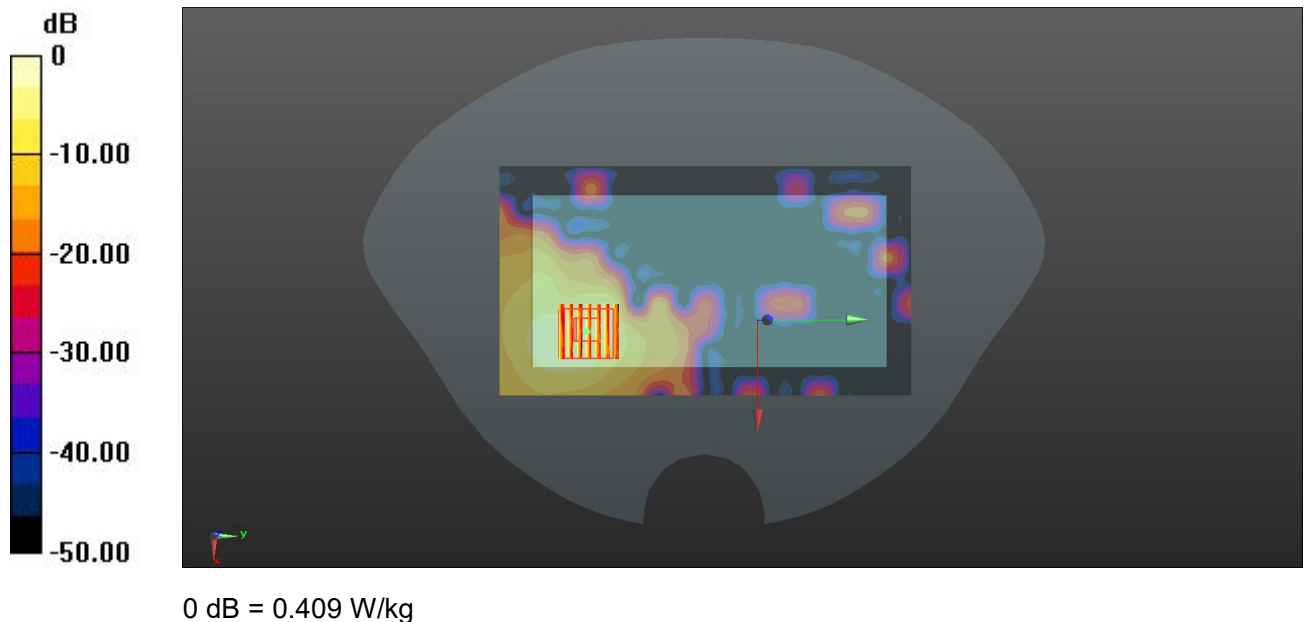



# MEAS.45 Body Plane with Top Edge 0mm on Channel 54 in IEEE802.11n(HT40) mode

Date: 2019.12.03

Communication System Band: WLAN(n)40Mhz; Frequency: 5270 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 5270$  MHz;  $\sigma = 5.424$  S/m;  $\epsilon_r = 48.275$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.5 Liquid Temperature:21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.08, 5.08, 5.08); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch54/Area Scan (61x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.65 W/kg


**Ch54/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.345 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 5.82 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.255 W/kg**

Maximum value of SAR (measured) = 2.93 W/kg

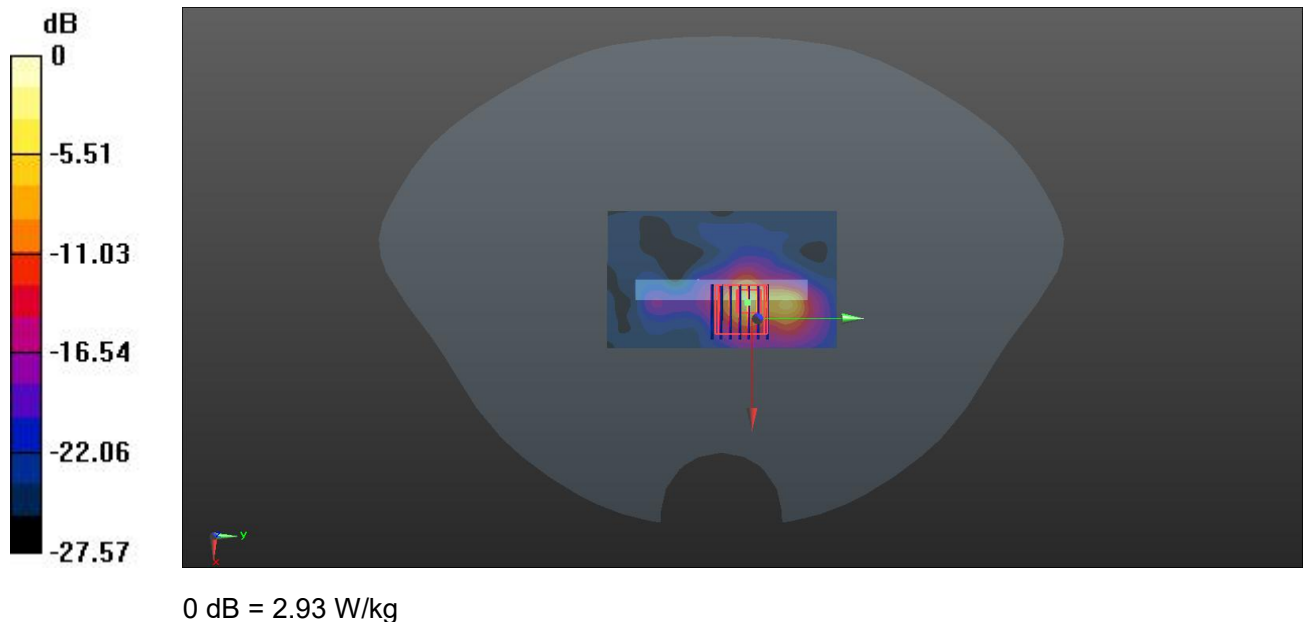

# MEAS.46 Body Plane with Top Edge 0mm on Channel 118 in IEEE802.11n(HT40) mode

Date: 2019.12.04

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz;Duty Cycle: 1:1.04

Medium parameters used:  $f = 5590$  MHz;  $\sigma = 5.84$  S/m;  $\epsilon_r = 48.212$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature:22.6 Liquid Temperature:21.6

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.36, 4.36, 4.36); Calibrated: 2019.08.02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch134/Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.948 W/kg


**Ch134/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.466 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.29 W/kg

**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 1.68 W/kg

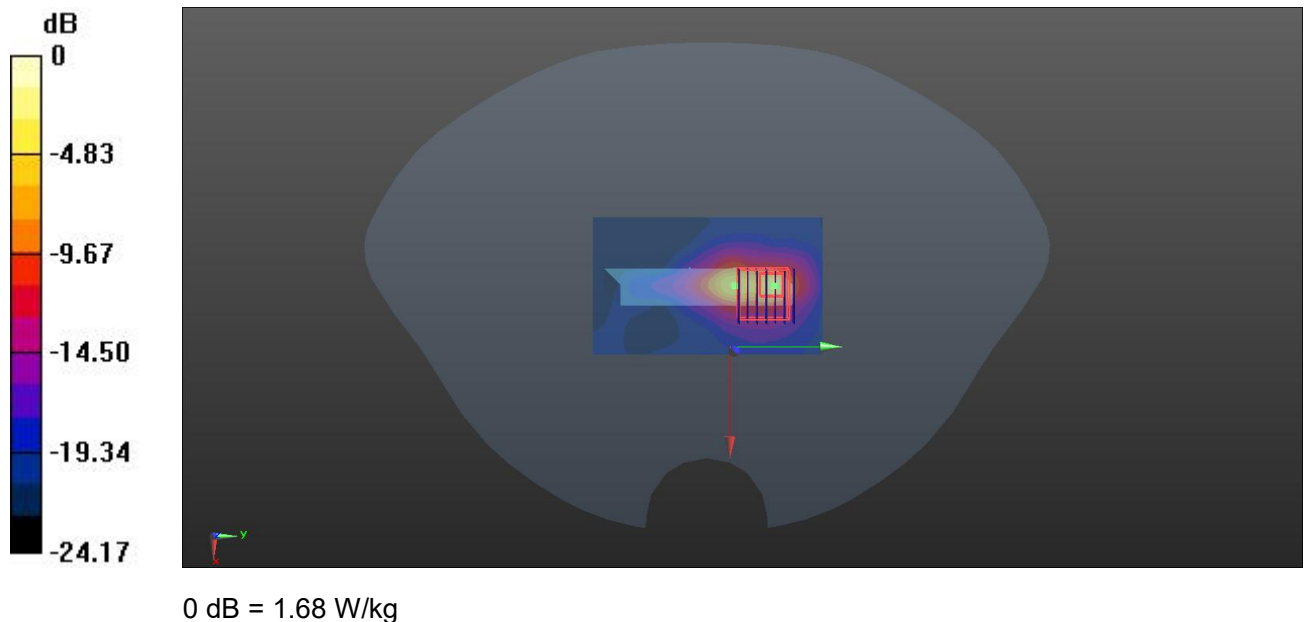

## MEAS.47 Left Head with Cheek on Middle Channel in Bluetooth DH5 mode

Date: 2019.12.09

Communication System Band: BLE; Frequency: 2440 MHz; Duty Cycle: 1:1.6

Medium parameters used:  $f = 2440$  MHz;  $\sigma = 1.787$  S/m;  $\epsilon_r = 39.563$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Ambient Temperature: 22.4 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.81, 7.81, 7.81); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch19/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.153 W/kg


**Ch19/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.876 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

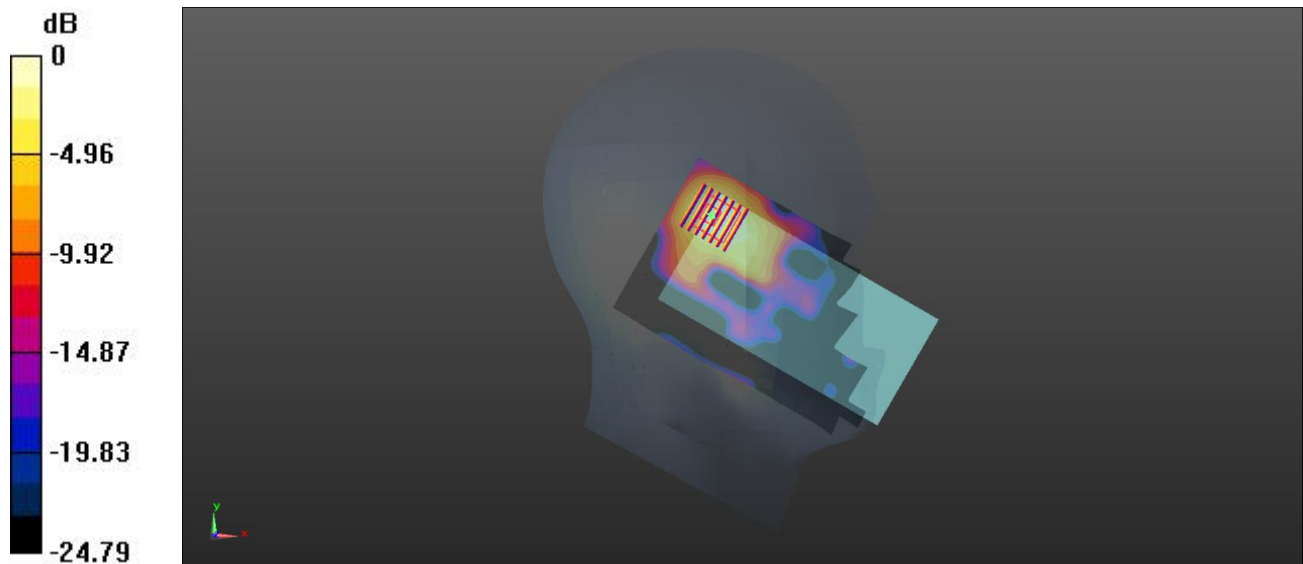

0 dB = 0.151 W/kg

# MEAS.48 Body Plane with Back Side 15mm on Middle Channel in Bluetooth BLE mode

Date: 2019.12.10

Communication System Band: BLE; Frequency: 2440 MHz; Duty Cycle: 1:1.6

Medium parameters used (interpolated):  $f = 2440$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 52.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch19/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0332 W/kg


**Ch19/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 1.258 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0590 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0341 W/kg

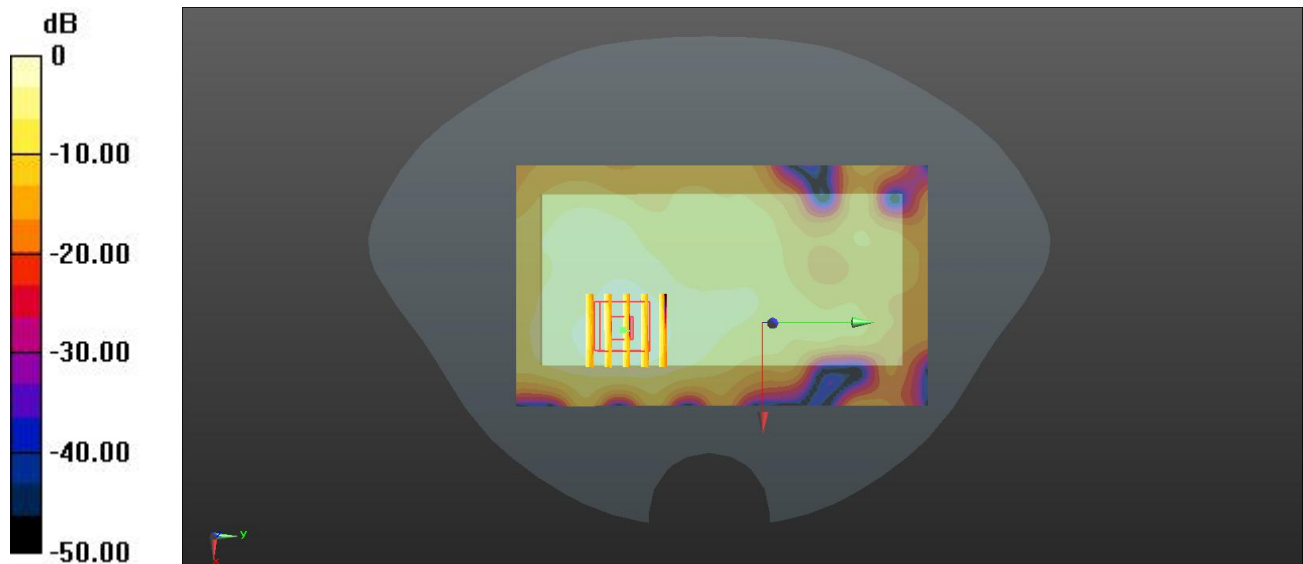

0 dB = 0.0341 W/kg

# MEAS.49 Body Plane with Back Side 15mm on Middle Channel in Bluetooth BLE mode

Date: 2019.12.10

Communication System Band: BLE; Frequency: 2440 MHz; Duty Cycle: 1:1.6

Medium parameters used (interpolated):  $f = 2440$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 52.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.79, 7.79, 7.79); Calibrated: 2019.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1454; Calibrated: 2019.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch19/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0692 W/kg


**Ch19/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.194 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0702 W/kg

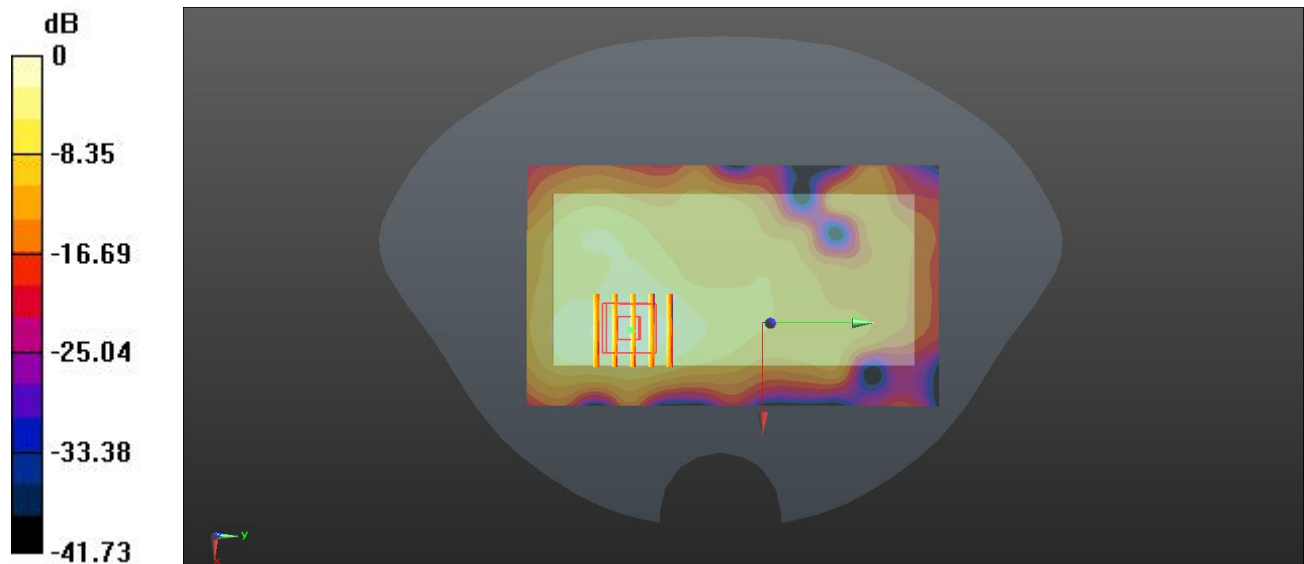

0 dB = 0.0702 W/kg

## **ANNEX D EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ19A0431-AW.pdf".

## **ANNEX E SAR TEST SETUP PHOTOS**

Please refer the document "BL-SZ19A0431-AS.pdf".

## **ANNEX F CALIBRATION REPORT**

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--