

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Mobile Phone

ISSUED TO
Realme Chongqing Mobile Telecommunications Corp., Ltd.
No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China



Tested by: Ye Hongji
Ye Hongji

Date: Sep. 16, 2021

Approved by: Liao Jianming

Liao Jianming
(Technical Director)

Date: Sep. 16, 2021

Report No.: BL-SZ2170683-601

EUT Name: Mobile Phone

Model Name: RMX3430

Brand Name: realme

Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)

FCC ID: 2AUYFRMX3430

Test conclusion: Pass

Test Date: Jul. 26, 2021 ~ Aug. 05, 2021

Date of Issue: Sep. 16, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Sep. 16, 2021</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	11
4.4	Description of Test Setup	12
4.4.1	For Antenna Port Test	12
4.4.2	For AC Power Supply Port Test	12
4.4.3	For Radiated Test (Below 30 MHz)	13
4.4.4	For Radiated Test (30 MHz-1 GHz)	13
4.4.5	For Radiated Test (Above 1 GHz)	14
4.5	Measurement Results Explanation Example	15
4.5.1	For conducted test items:	15

5	TEST ITEMS.....	16
5.1	Antenna Requirements.....	16
5.1.1	Relevant Standards.....	16
5.1.2	Antenna Anti-Replacement Construction	16
5.1.3	Antenna Gain	16
5.2	Frequency Hopping Systems	17
5.2.1	Relevant Standards.....	17
5.2.2	Description of the systems	17
5.3	Number of Hopping Frequencies	19
5.3.1	Limit.....	19
5.3.2	Test Setup.....	19
5.3.3	Test Procedure.....	19
5.3.4	Test Result	19
5.4	Peak Output Power	20
5.4.1	Test Limit.....	20
5.4.2	Test Setup.....	20
5.4.3	Test Procedure.....	20
5.4.4	Test Result	20
5.5	Occupied Bandwidth	21
5.5.1	Limit.....	21
5.5.2	Test Setup.....	21
5.5.3	Test Procedure.....	21
5.5.4	Test Result	21
5.6	Carrier Frequency Separation	22
5.6.1	Limit.....	22
5.6.2	Test Setup.....	22
5.6.3	Test Procedure.....	22
5.6.4	Test Result	22
5.7	Time of Occupancy (Dwell time)	23
5.7.1	Limit.....	23
5.7.2	Test Setup.....	23
5.7.3	Test Procedure.....	23
5.7.4	Test Result	24

5.8	Conducted Spurious Emission & Authorized-band band-edge	25
5.8.1	Limit.....	25
5.8.2	Test Setup	25
5.8.3	Test Procedure	25
5.8.4	Test Result	25
5.9	Conducted Emission	26
5.9.1	Limit.....	26
5.9.2	Test Setup	26
5.9.3	Test Procedure	26
5.9.4	Test Result	26
5.10	Radiated Spurious Emission	27
5.10.1	Limit.....	27
5.10.2	Test Setup	27
5.10.3	Test Procedure	27
5.10.4	Test Result	28
5.11	Band Edge (Restricted-band band-edge).....	29
5.11.1	Limit.....	29
5.11.2	Test Setup	29
5.11.3	Test Procedure	29
5.11.4	Test Result	29
ANNEX A	TEST RESULT	30
A.1	Number of Hopping Frequency	30
A.2	Peak Output Power	31
A.3	20 dB and 99% bandwidth	34
A.4	Hopping Frequency Separation.....	39
A.5	Average Time of Occupancy	40
A.6	Conducted Spurious Emissions & Authorized-band band-edge	43
A.7	Conducted Emissions.....	50
A.8	Radiated Spurious Emission	52
A.9	Band Edge (Restricted-band band-edge).....	70
ANNEX B	TEST SETUP PHOTOS	73
ANNEX C	EUT EXTERNAL PHOTOS	73
ANNEX D	EUT INTERNAL PHOTOS	73

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v5.7.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

2.2 Manufacturer Information

Manufacturer	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

2.3 Factory Information

Factory	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address	No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Mobile Phone
Model Name Under Test	RMX3430
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	11
Software Version	realme UI V2.0
Dimensions (Approx.)	164.5*75.9*9.6mm
Weight (Approx.)	207g(with battery)

2.5 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/1900 MHz 3G Network WCDMA/HSDPA/HSUPA Band 5 4G Network LTE FDD Band 5/7 LTE TDD Band 38/41 Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GPS, GLONASS, BDS, SBAS, NFC
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	-3.0 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.6 Additional Instructions

EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software			
Test Software Version	*##*3646633##*#*		
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

8:37




LOGG
-ING

27

TX Only test

Tx Pattern
Pseudo random..

Channel
Single Frequen..

Tx channel
0

Packet Type
DH5(0x0F)

Packet Length[0~339]
339

START
STOP

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power	15.247(b)	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.3	Pass	Note ²
5	Carrier Frequency Separation	15.247(a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Hopping Mode, Low/Middle/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	--	--	N/A	Note ³

Note ¹: Please refer to section 5.1

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.87 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2022.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2022.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±2.8%
RF output power, conducted	±1.28 dB
Power Spectral Density, conducted	±1.30 dB
Unwanted Emissions, conducted	±1.84 dB
All emissions, radiated	±5.36 dB
Temperature	±0.82°C
Humidity	±4.1%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

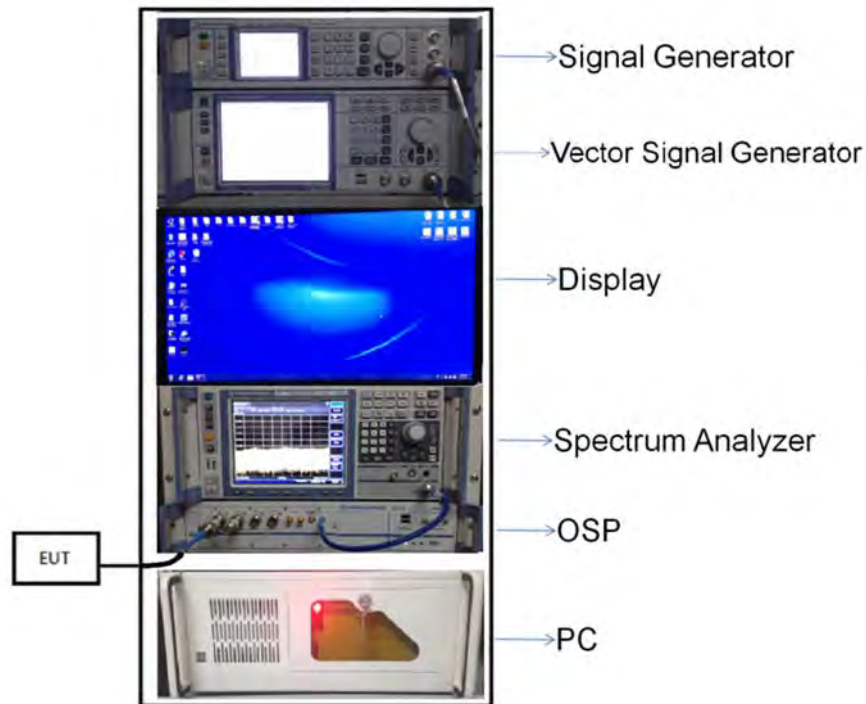


(Diagram 1)

4.4.2 For AC Power Supply Port Test




(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

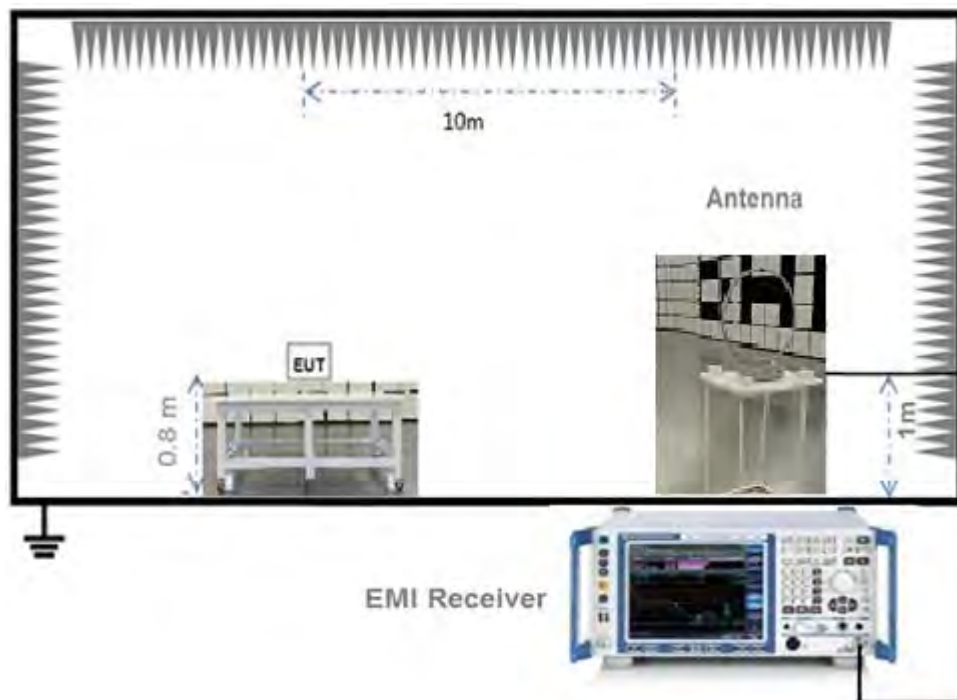


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

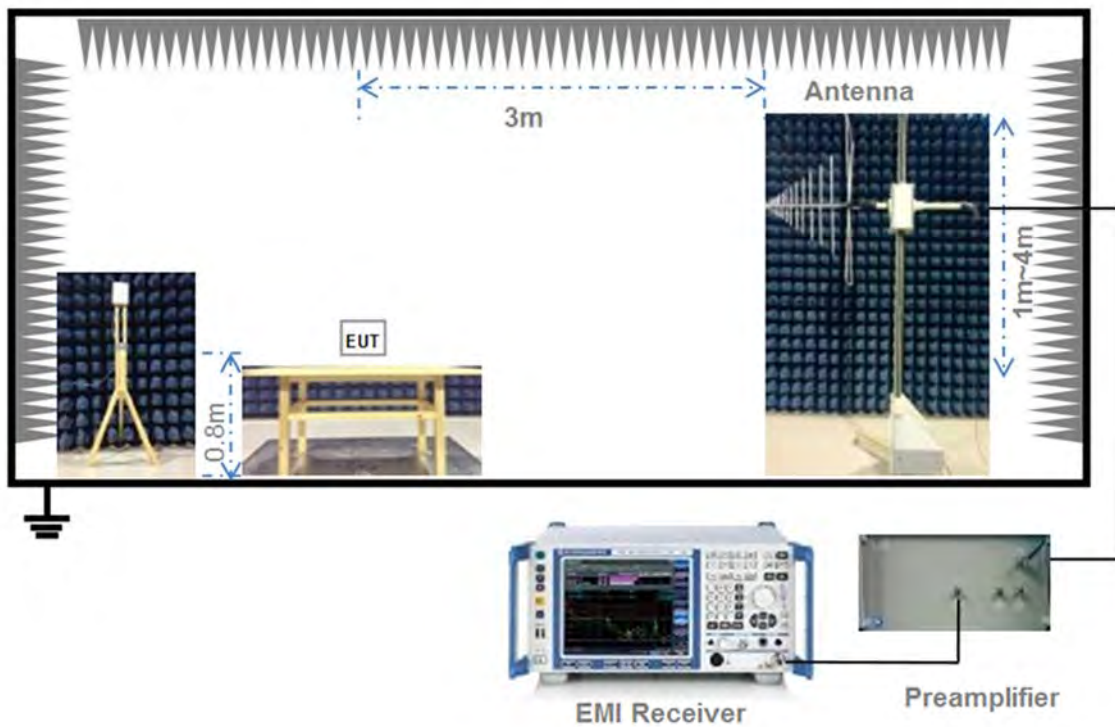

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

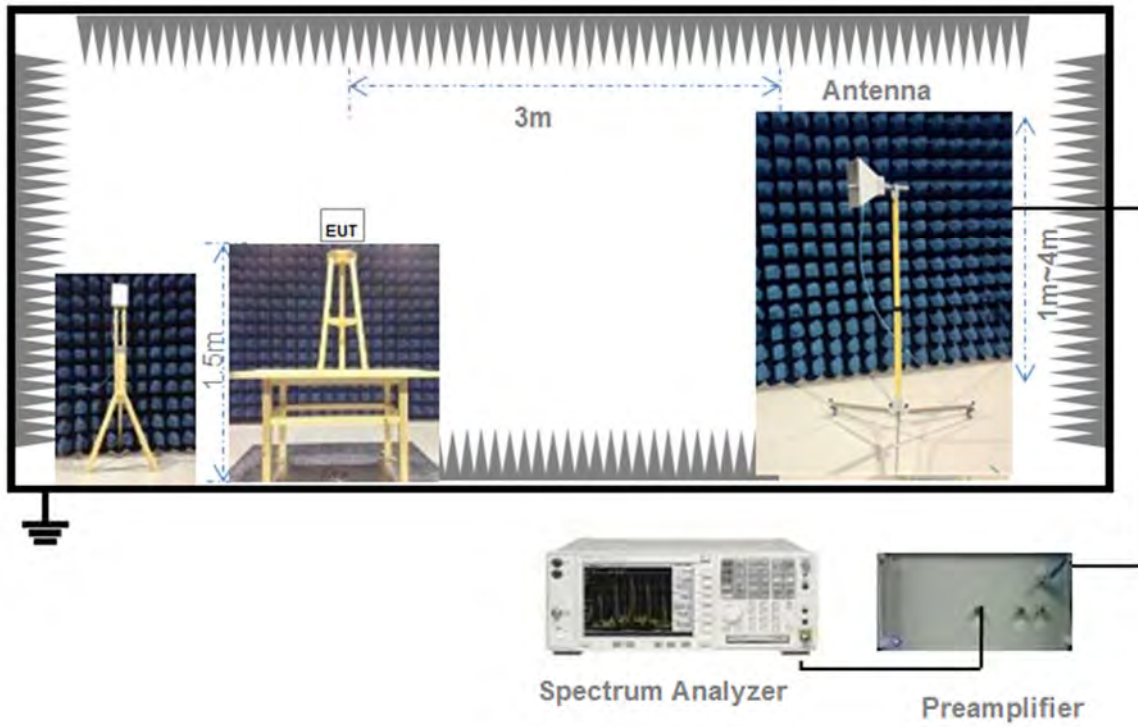

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h)

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.

For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents	
数据传输过程中刚开始跳频的状态图片 表现为随机的	等待一段时间所有信道都使用了的状态图片 跳频表现为均匀分布

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 5.1 (d)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 5.4 (b)

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 5.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 5.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 5.1 (d)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For AFH Mode:

For DH1 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH3 package type

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

{Period} = 0.4 s * {Number of Hopping Frequency}

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test plots


GFSK 2.4 GHz ~ 2.4415 GHz

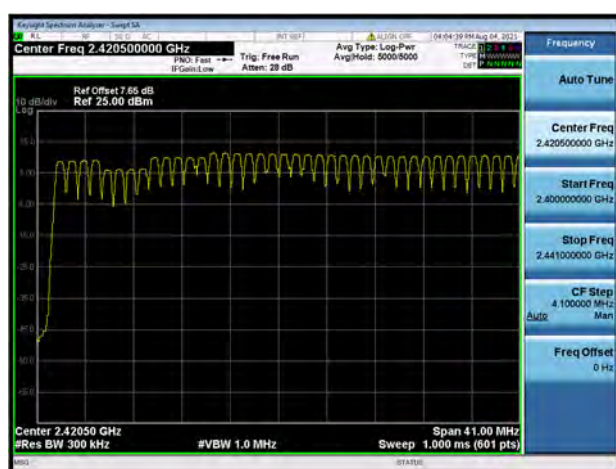

GFSK 2.4415 GHz ~ 2.4835 GHz

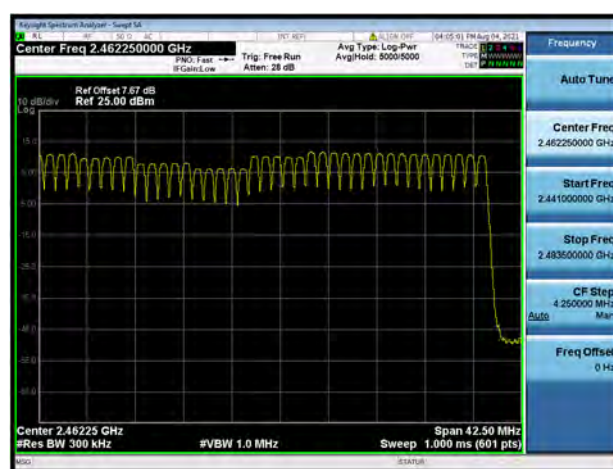

8-DPSK 2.4 GHz ~ 2.4415 GHz

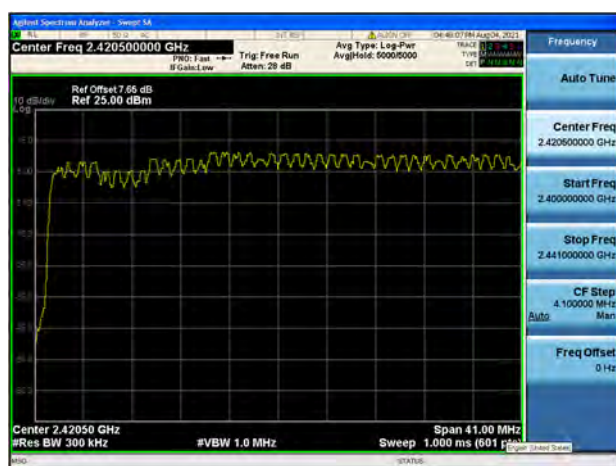

8-DPSK 2.4415 GHz ~ 2.4835 GHz



A.2 Peak Output Power


Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	9.30	8.51	21	125	Pass
Middle	10.89	12.28			Pass
High	10.65	11.61			Pass

Channel	Measured Output Peak Power				Limit		Verdict
	$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW			
Low	8.05	6.38	8.07	6.41	21	125	Pass
Middle	10.74	11.85	10.72	11.79			Pass
High	11.03	12.69	10.85	12.16			Pass

Test plots

GFSK LOW CHANNEL

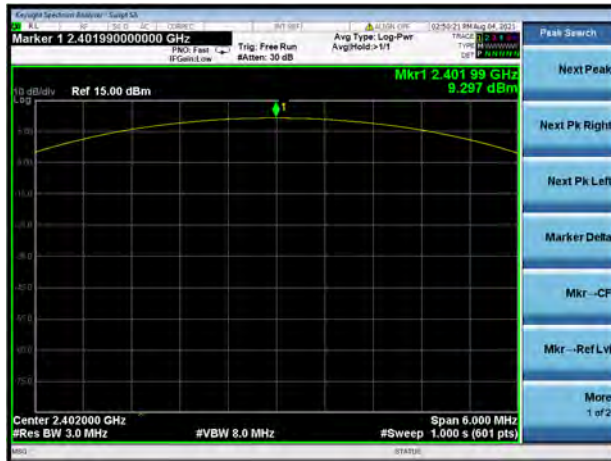

GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL



$\pi/4$ -DQPSK LOW CHANNEL



$\pi/4$ -DQPSK MIDDLE CHANNEL

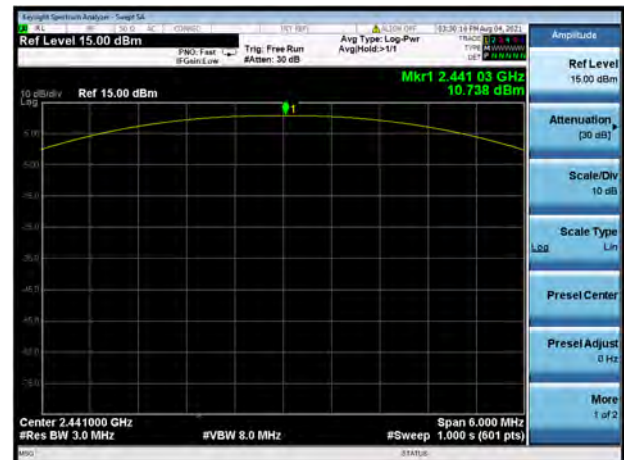

$\pi/4$ -DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL

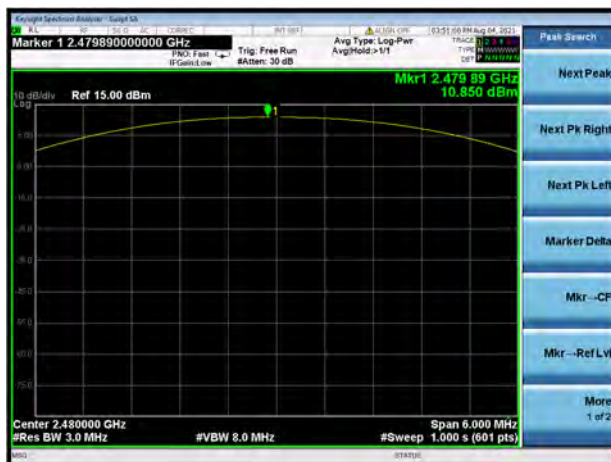

A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	0.865000	0.757710
Middle	0.870000	0.773530
High	0.870000	0.772720
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.260000	1.143800
Middle	1.280000	1.155500
High	1.280000	1.159400
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.260000	1.143500
Middle	1.270000	1.162000
High	1.275000	1.171400


Test plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL

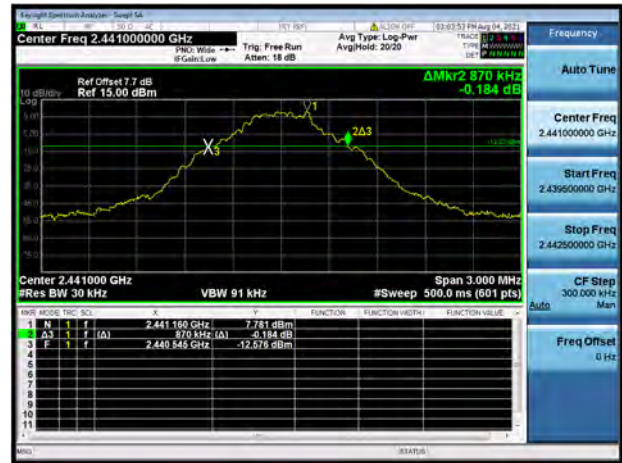

GFSK HIGH CHANNEL



π/4-DQPSK LOW CHANNEL



π/4-DQPSK MIDDLE CHANNEL



Copyright Spectrum Analyzer - Screenshot

Center Freq 2.480000000 GHz

Ref Offset 7.6 dB
Ref 13.00 dBm

DMkr2 1.280 MHz
0.631 dB

Center 2.48000000 GHz
#Res BW 30 kHz

Span 3.000 MHz
#Sweep 500.0 ms (601 pts)

Log

FREQ

2.475 2.480 2.485

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

2.480000000 GHz

2.479999999 GHz

2.480000001 GHz

2.480000002 GHz

2.480000003 GHz

2.480000004 GHz

2.480000005 GHz

2.480000006 GHz

2.480000007 GHz

2.480000008 GHz

2.480000009 GHz

2.480000010 GHz

2.480000011 GHz

2.480000012 GHz

2.480000013 GHz

2.480000014 GHz

2.480000015 GHz

2.480000016 GHz

2.480000017 GHz

2.480000018 GHz

2.480000019 GHz

2.480000020 GHz

2.480000021 GHz

2.480000022 GHz

2.480000023 GHz

2.480000024 GHz

2.480000025 GHz

2.480000026 GHz

2.480000027 GHz

2.480000028 GHz

2.480000029 GHz

2.480000030 GHz

2.480000031 GHz

2.480000032 GHz

2.480000033 GHz

2.480000034 GHz

2.480000035 GHz

2.480000036 GHz

2.480000037 GHz

2.480000038 GHz

2.480000039 GHz

2.480000040 GHz

2.480000041 GHz

2.480000042 GHz

2.480000043 GHz

2.480000044 GHz

2.480000045 GHz

2.480000046 GHz

2.480000047 GHz

2.480000048 GHz

2.480000049 GHz

2.480000050 GHz

2.480000051 GHz

2.480000052 GHz

2.480000053 GHz

2.480000054 GHz

2.480000055 GHz

2.480000056 GHz

2.480000057 GHz

2.480000058 GHz

2.480000059 GHz

2.480000060 GHz

2.480000061 GHz

2.480000062 GHz

2.480000063 GHz

2.480000064 GHz

2.480000065 GHz

2.480000066 GHz

2.480000067 GHz

2.480000068 GHz

2.480000069 GHz

2.480000070 GHz

2.480000071 GHz

2.480000072 GHz

2.480000073 GHz

2.480000074 GHz

2.480000075 GHz

2.480000076 GHz

2.480000077 GHz

2.480000078 GHz

2.480000079 GHz

2.480000080 GHz

2.480000081 GHz

2.480000082 GHz

2.480000083 GHz

2.480000084 GHz

2.480000085 GHz

2.480000086 GHz

2.480000087 GHz

2.480000088 GHz

2.480000089 GHz

2.480000090 GHz

2.480000091 GHz

2.480000092 GHz

2.480000093 GHz

2.480000094 GHz

2.480000095 GHz

2.480000096 GHz

2.480000097 GHz

2.480000098 GHz

2.480000099 GHz

2.480000100 GHz

2.480000101 GHz

2.480000102 GHz

2.480000103 GHz

2.480000104 GHz

2.480000105 GHz

2.480000106 GHz

2.480000107 GHz

2.480000108 GHz

2.480000109 GHz

2.480000110 GHz

2.480000111 GHz

2.480000112 GHz

2.480000113 GHz

2.480000114 GHz

2.480000115 GHz

2.480000116 GHz

2.480000117 GHz

2.480000118 GHz

2.480000119 GHz

2.480000120 GHz

2.480000121 GHz

2.480000122 GHz

2.480000123 GHz

2.480000124 GHz

2.480000125 GHz

2.480000126 GHz

2.480000127 GHz

2.480000128 GHz

2.480000129 GHz

2.480000130 GHz

2.480000131 GHz

2.480000132 GHz

2.480000133 GHz

2.480000134 GHz

2.480000135 GHz

2.480000136 GHz

2.480000137 GHz

2.480000138 GHz

2.480000139 GHz

2.480000140 GHz

2.480000141 GHz

2.480000142 GHz

2.480000143 GHz

2.480000144 GHz

2.480000145 GHz

2.480000146 GHz

2.480000147 GHz

2.480000148 GHz

2.480000149 GHz

2.480000150 GHz

2.480000151 GHz

2.480000152 GHz

2.480000153 GHz

2.480000154 GHz

2.480000155 GHz

2.480000156 GHz

2.480000157 GHz

2.480000158 GHz

2.480000159 GHz

2.480000160 GHz

2.480000161 GHz

2.480000162 GHz

2.480000163 GHz

2.480000164 GHz

2.480000165 GHz

2.480000166 GHz

2.480000167 GHz

2.480000168 GHz

2.480000169 GHz

2.480000170 GHz

2.480000171 GHz

2.480000172 GHz

2.480000173 GHz

2.480000174 GHz

2.480000175 GHz

2.480000176 GHz

2.480000177 GHz

2.480000178 GHz

2.480000179 GHz

2.480000180 GHz

2.480000181 GHz

2.480000182 GHz

2.480000183 GHz

2.480000184 GHz

2.480000185 GHz

2.480000186 GHz

2.480000187 GHz

2.480000188 GHz

2.480000189 GHz

2.480000190 GHz

2.480000191 GHz

2.480000192 GHz

2.480000193 GHz

2.480000194 GHz

2.480000195 GHz

2.480000196 GHz

2.480000197 GHz

2.480000198 GHz

2.480000199 GHz

2.480000200 GHz

2.480000201 GHz

Example Spectrum Analyzer - Range 500 MHz

Center Freq 2.402000000 GHz

Span 3.000 MHz

Res BW 30 kHz

VBW 91 kHz

#Sweep 500.0 ms (601 pts)

Ref Offset 7.81 dB

Ref 15.00 dBm

Peak 1: 2.402 GHz, 0.497 dB

Peak 2: 2.402 GHz, -15.439 dBm

Keysight E8060A Spectrum Analyzer - Default GSP

Center Freq 2.441000000 GHz

Ref Offset 7.7 dB
Ref 15.00 dBm

PMW: Wide BW
Gating: Low

Trig: Free Run
Action: 18 dB

Avg Type: Log-Pwr
Avg/Hold: 20/20

Trace 1: 1 2 3 4 5
Type: Spectrum
Format: dBm/Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.439500000 GHz

Stop Freq
2.442500000 GHz

CF Stop
300.000 MHz

Auto

Freq Offset
0 Hz

Span 3.000 MHz
#Res BW 30 kHz
VBW 91 kHz
#Sweep 500.0 ms (601 pts)

10 dBm/Hz
Log

2.441160 GHz
-12.970 dBm

INR	MODE	TH	SQL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	W	W	W	2.441160 GHz	7.773 dBm			
2	A3	1	f	(A)	1.270 MHz (A)	0.702 dB		
3	F	1	f	2.440388 GHz	-12.970 dBm			

MINI

(STATUS)

Keysight Spectrum Analyzer - Single Shot

Center Freq 2.480000000 GHz

Ref Offset 7.6 dB
Ref 13.00 dBm

Span 3.000 MHz
Res BW 30 kHz

VBW 91 kHz

#Sweep 500.0 ms (601 pts)

Auto Tune

Center Freq 2.480000000 GHz

Start Freq 2.478500000 GHz

Stop Freq 2.481500000 GHz

CF Step 300.000 MHz

Man

Freq Offset 0 Hz

Trace 1: 2.480000000 GHz

Trace 2: 2.480000000 GHz

Trace 3: 2.480000000 GHz

Trace 4: 2.480000000 GHz

Trace 5: 2.480000000 GHz

Trace 6: 2.480000000 GHz

Trace 7: 2.480000000 GHz

Trace 8: 2.480000000 GHz

Trace 9: 2.480000000 GHz

Trace 10: 2.480000000 GHz

Trace 11: 2.480000000 GHz

Trace 12: 2.480000000 GHz

Trace 13: 2.480000000 GHz

Trace 14: 2.480000000 GHz

Trace 15: 2.480000000 GHz

Trace 16: 2.480000000 GHz

Trace 17: 2.480000000 GHz

Trace 18: 2.480000000 GHz

Trace 19: 2.480000000 GHz

Trace 20: 2.480000000 GHz

Trace 21: 2.480000000 GHz

Trace 22: 2.480000000 GHz

Trace 23: 2.480000000 GHz

Trace 24: 2.480000000 GHz

Trace 25: 2.480000000 GHz

Trace 26: 2.480000000 GHz

Trace 27: 2.480000000 GHz

Trace 28: 2.480000000 GHz

Trace 29: 2.480000000 GHz

Trace 30: 2.480000000 GHz

Trace 31: 2.480000000 GHz

Trace 32: 2.480000000 GHz

Trace 33: 2.480000000 GHz

Trace 34: 2.480000000 GHz

Trace 35: 2.480000000 GHz

Trace 36: 2.480000000 GHz

Trace 37: 2.480000000 GHz

Trace 38: 2.480000000 GHz

Trace 39: 2.480000000 GHz

Trace 40: 2.480000000 GHz

Trace 41: 2.480000000 GHz

Trace 42: 2.480000000 GHz

Trace 43: 2.480000000 GHz

Trace 44: 2.480000000 GHz

Trace 45: 2.480000000 GHz

Trace 46: 2.480000000 GHz

Trace 47: 2.480000000 GHz

Trace 48: 2.480000000 GHz

Trace 49: 2.480000000 GHz

Trace 50: 2.480000000 GHz

Trace 51: 2.480000000 GHz

Trace 52: 2.480000000 GHz

Trace 53: 2.480000000 GHz

Trace 54: 2.480000000 GHz

Trace 55: 2.480000000 GHz

Trace 56: 2.480000000 GHz

Trace 57: 2.480000000 GHz

Trace 58: 2.480000000 GHz

Trace 59: 2.480000000 GHz

Trace 60: 2.480000000 GHz

Trace 61: 2.480000000 GHz

Trace 62: 2.480000000 GHz

Trace 63: 2.480000000 GHz

Trace 64: 2.480000000 GHz

Trace 65: 2.480000000 GHz

Trace 66: 2.480000000 GHz

Trace 67: 2.480000000 GHz

Trace 68: 2.480000000 GHz

Trace 69: 2.480000000 GHz

Trace 70: 2.480000000 GHz

Trace 71: 2.480000000 GHz

Trace 72: 2.480000000 GHz

Trace 73: 2.480000000 GHz

Trace 74: 2.480000000 GHz

Trace 75: 2.480000000 GHz

Trace 76: 2.480000000 GHz

Trace 77: 2.480000000 GHz

Trace 78: 2.480000000 GHz

Trace 79: 2.480000000 GHz

Trace 80: 2.480000000 GHz

Trace 81: 2.480000000 GHz

Trace 82: 2.480000000 GHz

Trace 83: 2.480000000 GHz

Trace 84: 2.480000000 GHz

Trace 85: 2.480000000 GHz

Trace 86: 2.480000000 GHz

Trace 87: 2.480000000 GHz

Trace 88: 2.480000000 GHz

Trace 89: 2.480000000 GHz

Trace 90: 2.480000000 GHz

Trace 91: 2.480000000 GHz

Trace 92: 2.480000000 GHz

Trace 93: 2.480000000 GHz

Trace 94: 2.480000000 GHz

Trace 95: 2.480000000 GHz

Trace 96: 2.480000000 GHz

Trace 97: 2.480000000 GHz

Trace 98: 2.480000000 GHz

Trace 99: 2.480000000 GHz

Trace 100: 2.480000000 GHz

Trace 101: 2.480000000 GHz

Trace 102: 2.480000000 GHz

Trace 103: 2.480000000 GHz

Trace 104: 2.480000000 GHz

Trace 105: 2.480000000 GHz

Trace 106: 2.480000000 GHz

Trace 107: 2.480000000 GHz

Trace 108: 2.480000000 GHz

Trace 109: 2.480000000 GHz

Trace 110: 2.480000000 GHz

Trace 111: 2.480000000 GHz

Trace 112: 2.480000000 GHz

Trace 113: 2.480000000 GHz

Trace 114: 2.480000000 GHz

Trace 115: 2.480000000 GHz

Trace 116: 2.480000000 GHz

Trace 117: 2.480000000 GHz

Trace 118: 2.480000000 GHz

Trace 119: 2.480000000 GHz

Trace 120: 2.480000000 GHz

Trace 121: 2.480000000 GHz

Trace 122: 2.480000000 GHz

Trace 123: 2.480000000 GHz

Trace 124: 2.480000000 GHz

Trace 125: 2.480000000 GHz

Trace 126: 2.480000000 GHz

Trace 127: 2.480000000 GHz

Trace 128: 2.480000000 GHz

Trace 129: 2.480000000 GHz

Trace 130: 2.480000000 GHz

Trace 131: 2.480000000 GHz

Trace 132: 2.480000000 GHz

Trace 133: 2.480000000 GHz

Trace 134: 2.480000000 GHz

Trace 135: 2.480000000 GHz

Trace 136: 2.480000000 GHz

Trace 137: 2.480000000 GHz

Trace 138: 2.480000000 GHz

Trace 139: 2.480000000 GHz

Trace 140: 2.480000000 GHz

Trace 141: 2.480000000 GHz

Trace 142: 2.480000000 GHz

Trace 143: 2.480000000 GHz

Trace 144: 2.480000000 GHz

Trace 145: 2.480000000 GHz

Trace 146: 2.480000000 GHz

Trace 147: 2.480000000 GHz

Trace 148: 2.480000000 GHz

Trace 149: 2.480000000 GHz


Trace 150: 2.480000000 GHz

Trace 151: 2.480000000 GHz


Trace 152: 2.4800000

99% Bandwidth


GFSK LOW CHANNEL

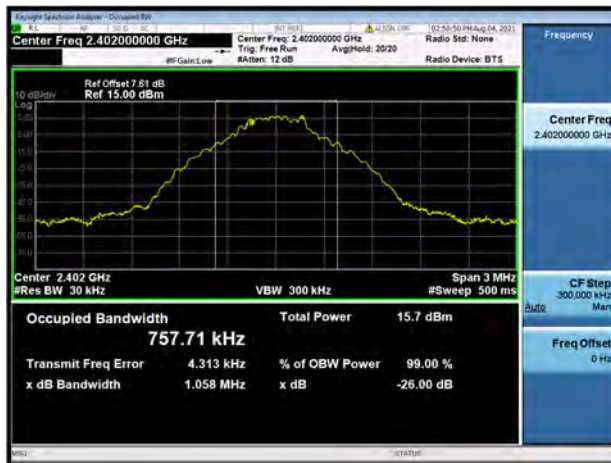


GFSK MIDDLE CHANNEL

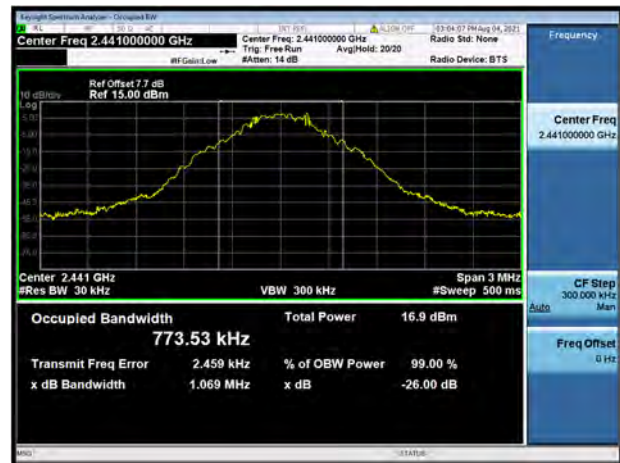


GFSK HIGH CHANNEL

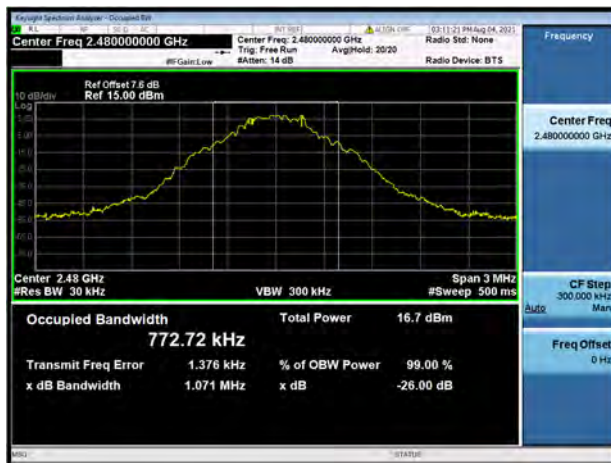


$\pi/4$ -DQPSK LOW CHANNEL

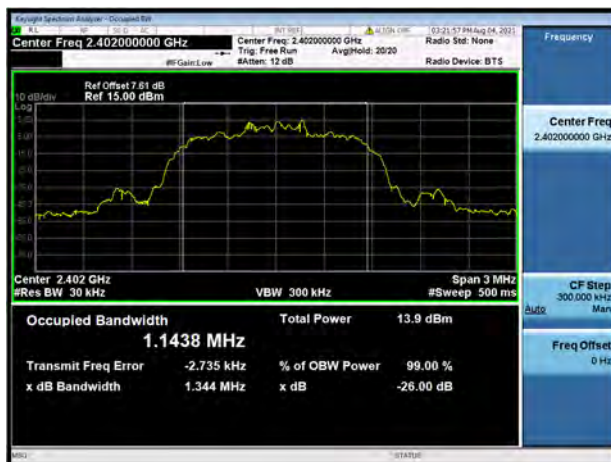


$\pi/4$ -DQPSK MIDDLE CHANNEL

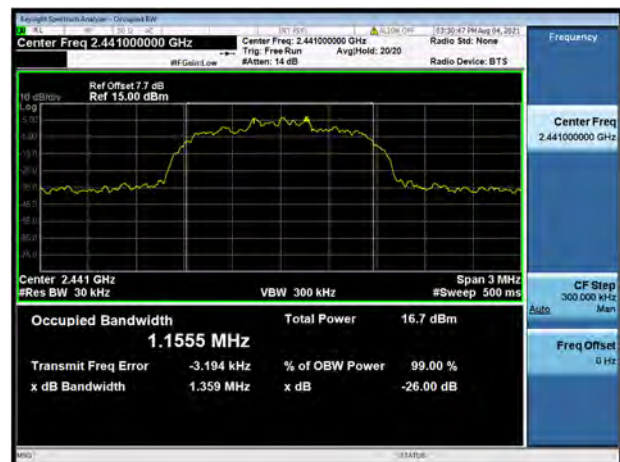


$\pi/4$ -DQPSK HIGH CHANNEL

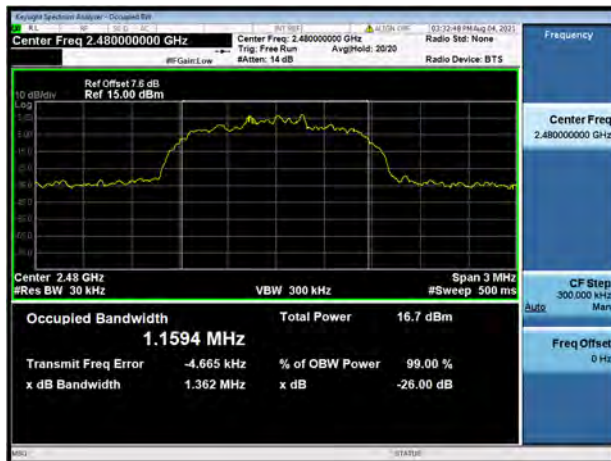


8-DPSK LOW CHANNEL

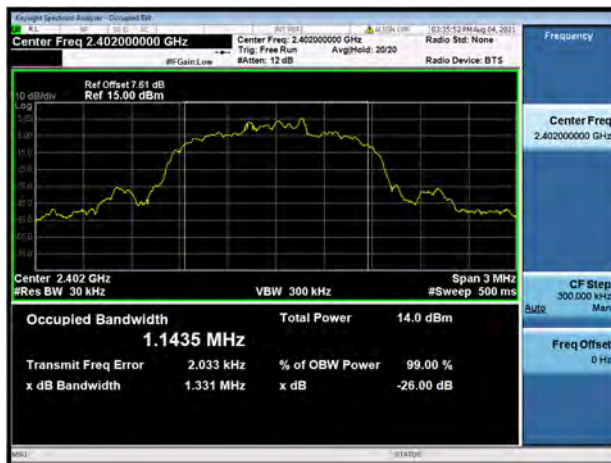

8-DPSK MIDDLE CHANNEL

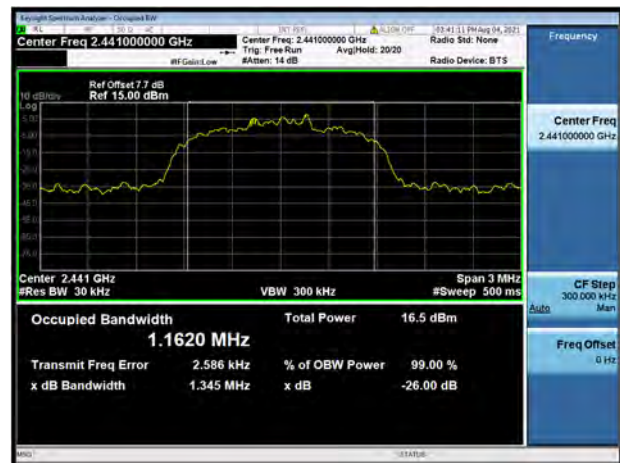

8-DPSK HIGH CHANNEL

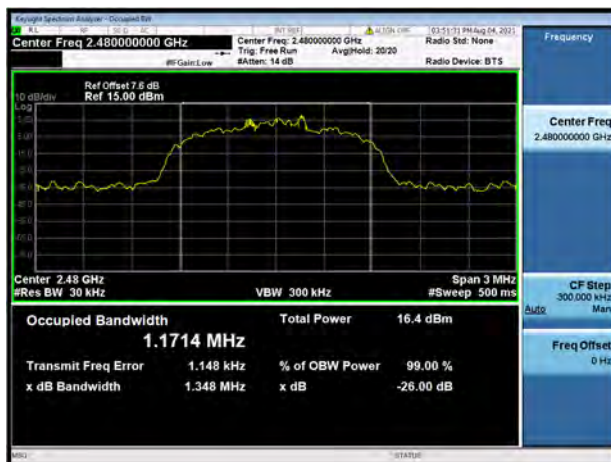


A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.00	0.580000	Pass
8-DPSK	1.01	0.850000	Pass

Test Plots

GFSK

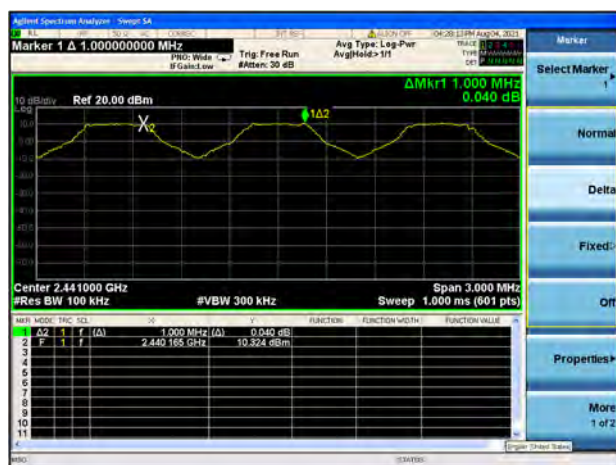

8-DPSK

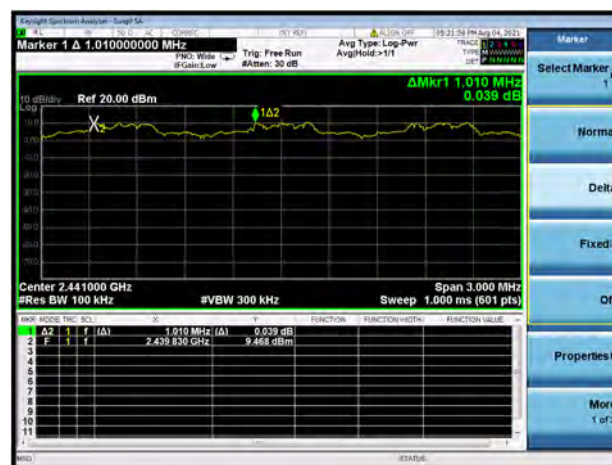


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37710	120.672	0.4	Pass
DH 3	1.62700	260.320	0.4	Pass
DH 5	2.88000	307.200	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38450	123.040	0.4	Pass
DH 3	1.63500	261.600	0.4	Pass
DH 5	2.88000	307.200	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37710	60.336	0.4	Pass
DH 3	1.63500	130.800	0.4	Pass
DH 5	2.86700	152.907	0.4	Pass

Test Plots


GFSK DH1

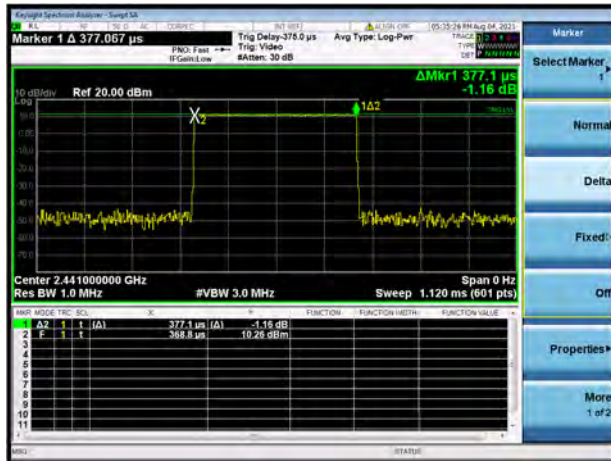


GFSK DH3

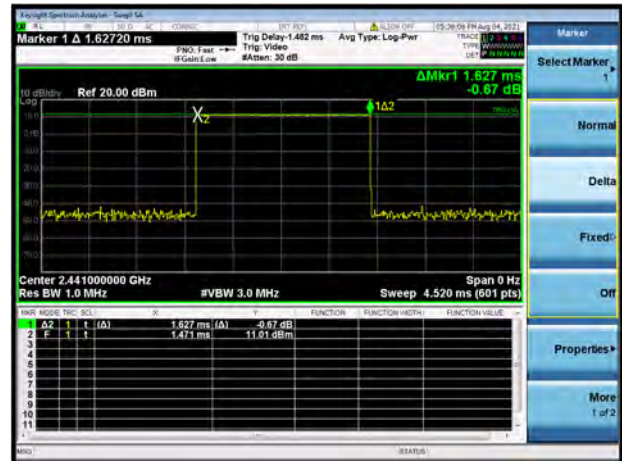


GFSK DH5

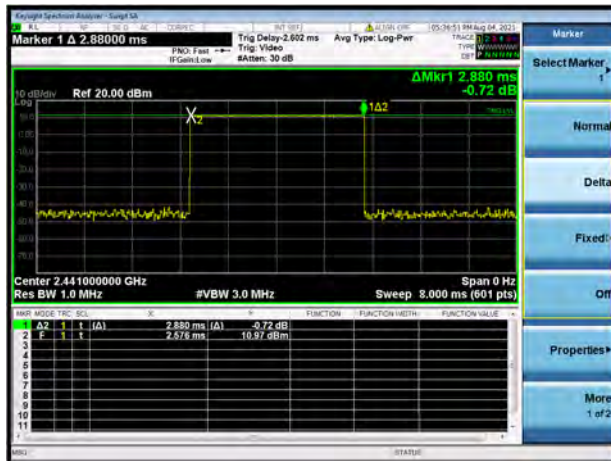


8-DPSK DH1

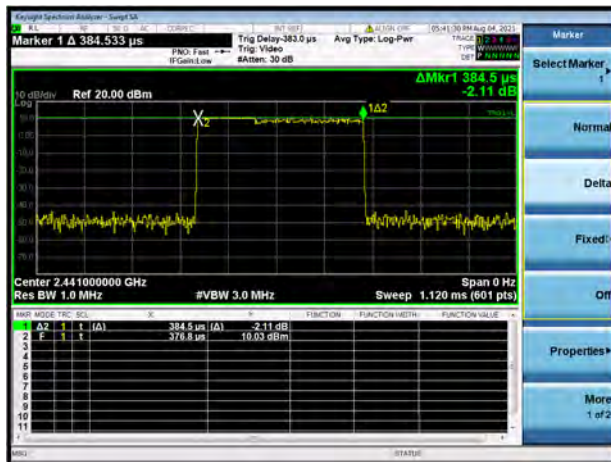


8-DPSK DH3

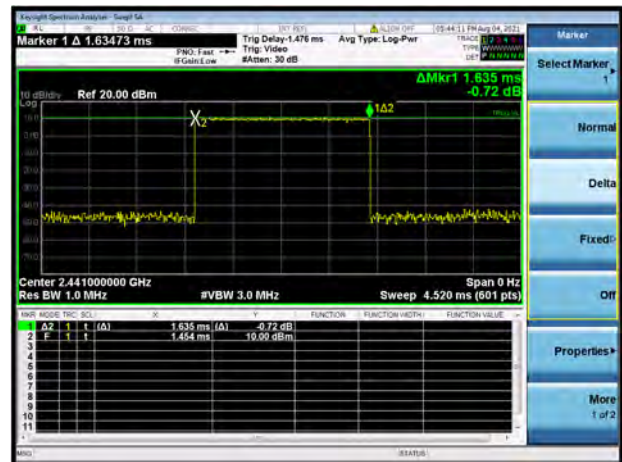


8-DPSK DH5

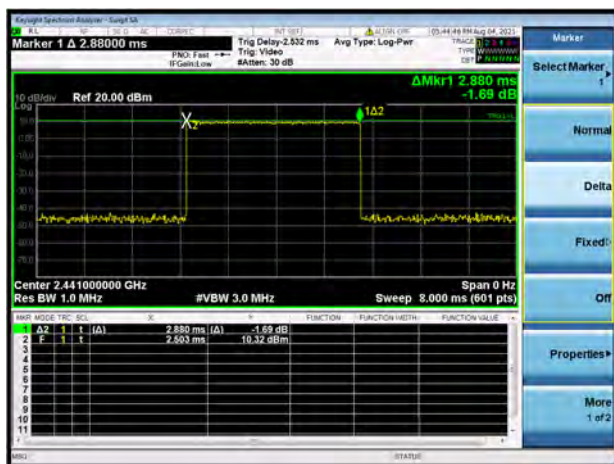


AFH Mode DH1

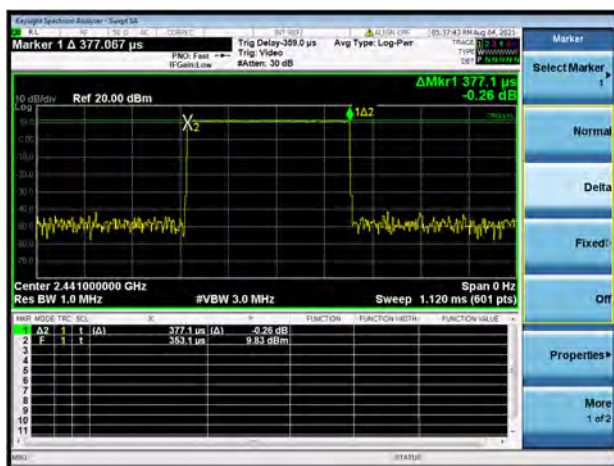

AFH Mode DH3

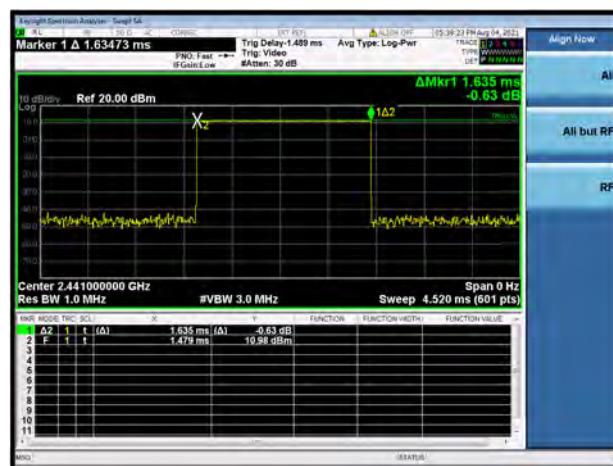

AFH Mode DH5

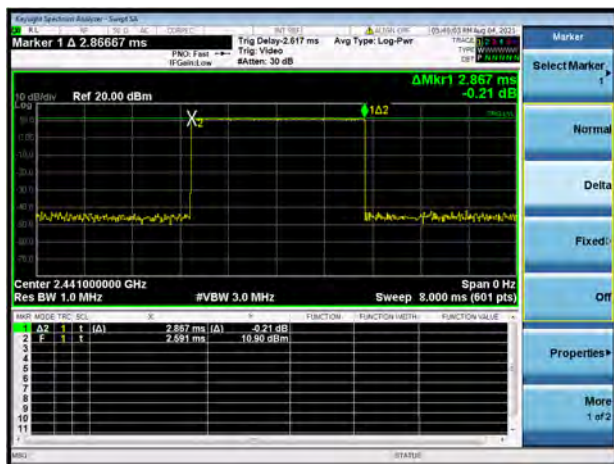


A.6 Conducted Spurious Emissions & Authorized-band band-edge

Test Data


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.96	8.73	-11.27	Pass
Middle	-34.39	10.38	-9.62	Pass
High	-34.39	10.12	-9.89	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.53	7.79	-12.21	Pass
Middle	-36.22	9.87	-10.13	Pass
High	-35.63	10.22	-9.78	Pass
Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.94	11.19	-8.81	Pass
8-DPSK	-35.46	10.69	-9.31	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

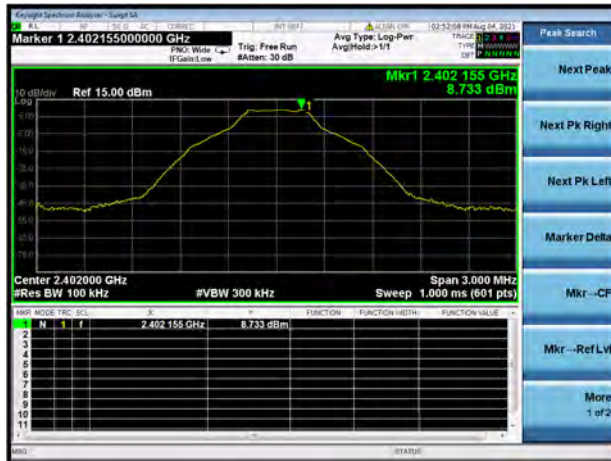

GFSK LOW CHANNEL, BAND EDGE

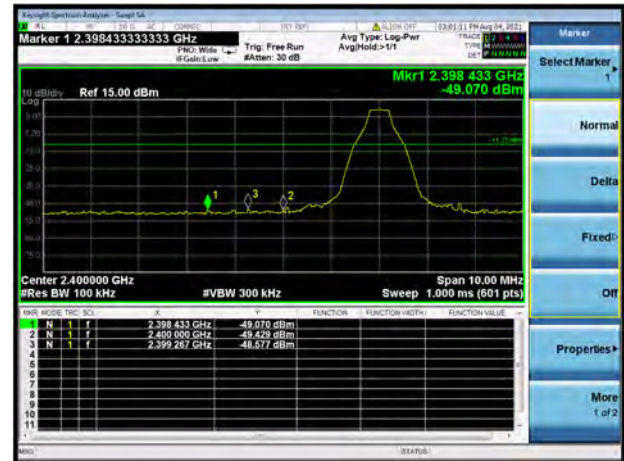


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

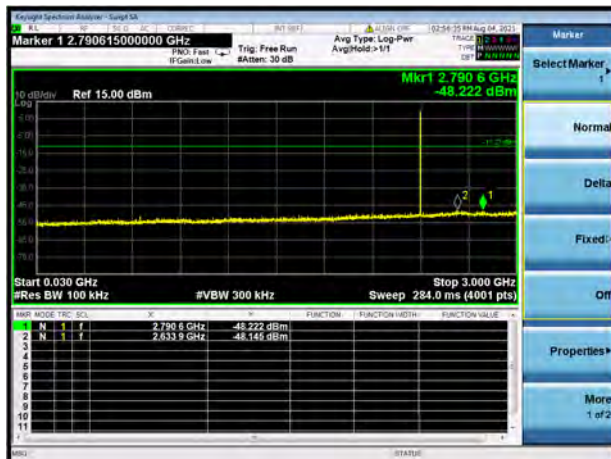


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz




GFSK MIDDLE CHANNEL, CARRIER LEVEL

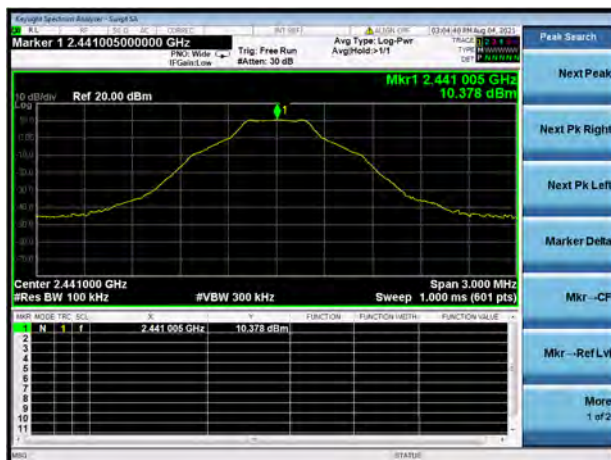


GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

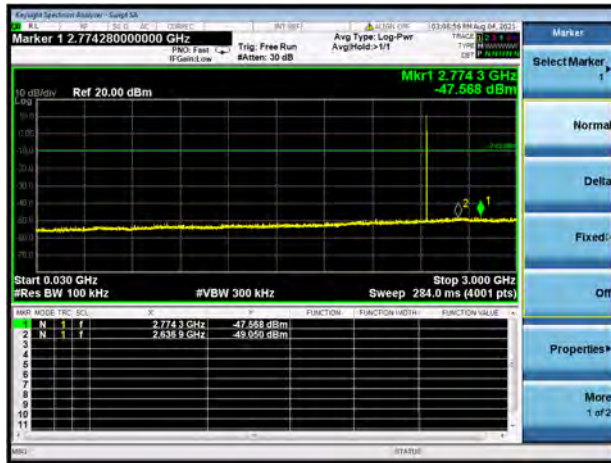


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

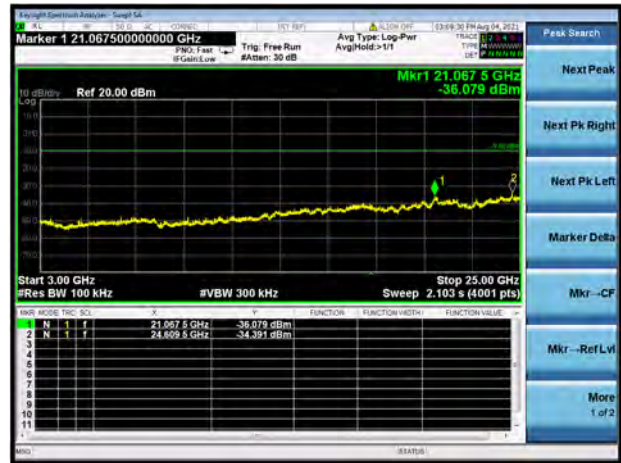


GFSK HIGH CHANNEL, CARRIER LEVEL

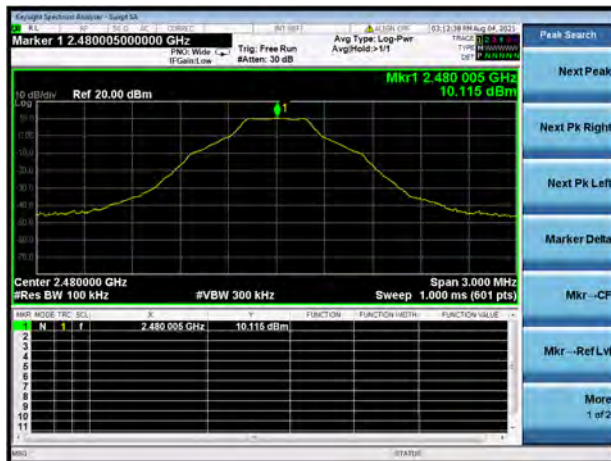


GFSK HIGH CHANNEL, BAND EDGE

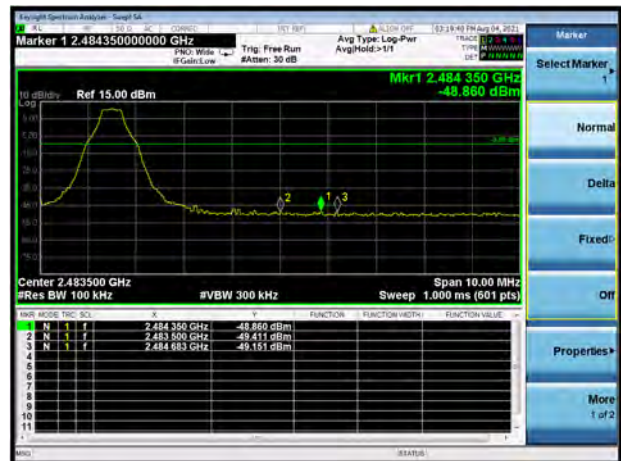


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

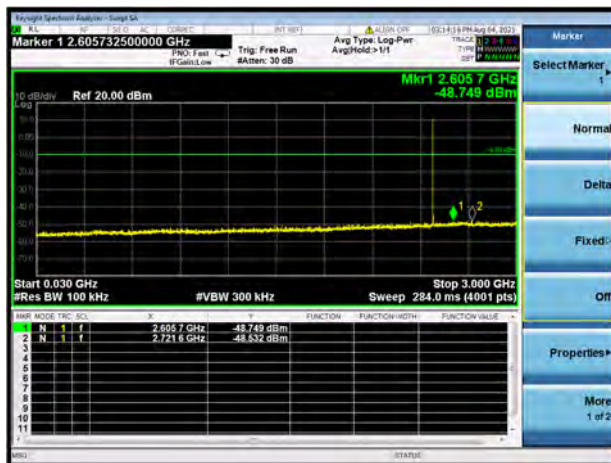


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

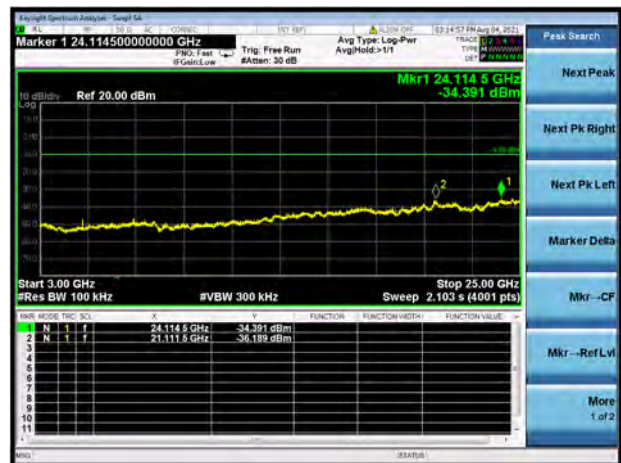


8-DPSK LOW CHANNEL, CARRIER LEVEL

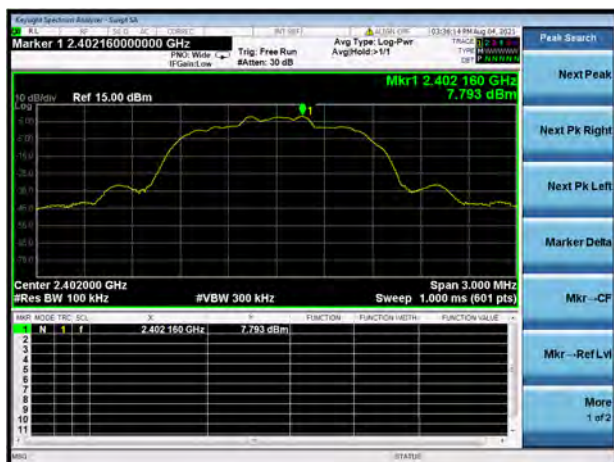


8-DPSK LOW CHANNEL, BAND EDGE

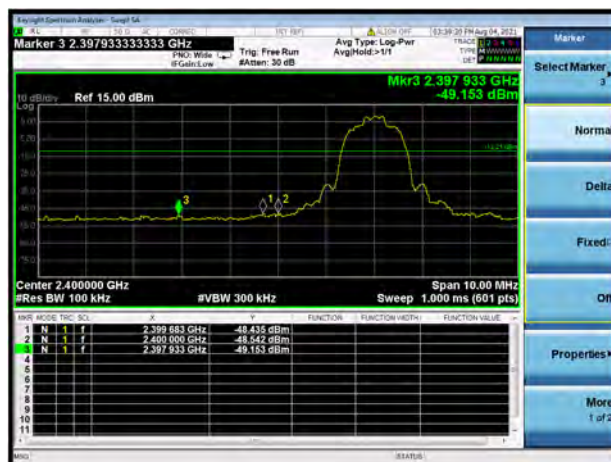


8-DPSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

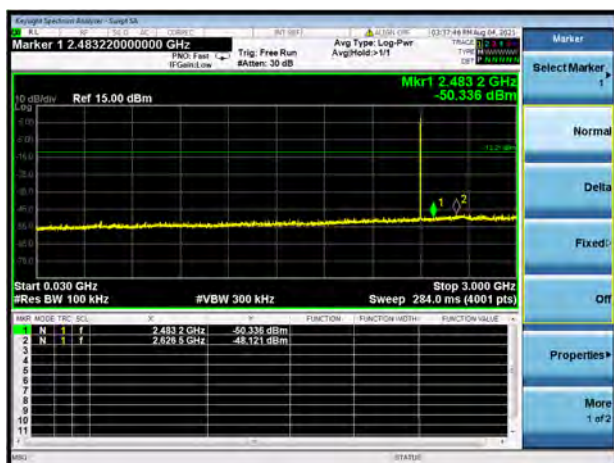


8-DPSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

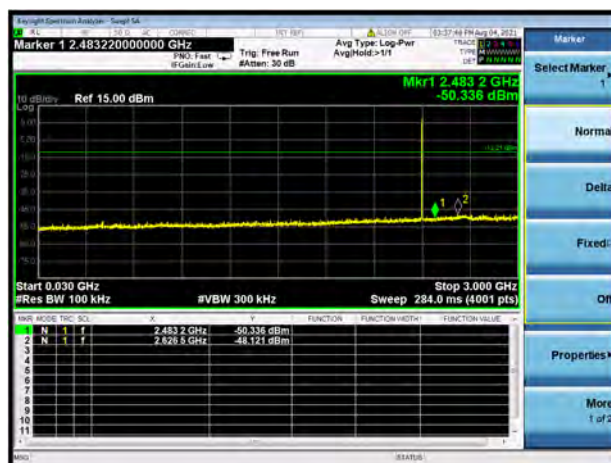


8-DPSK MIDDLE CHANNEL, CARRIER LEVEL

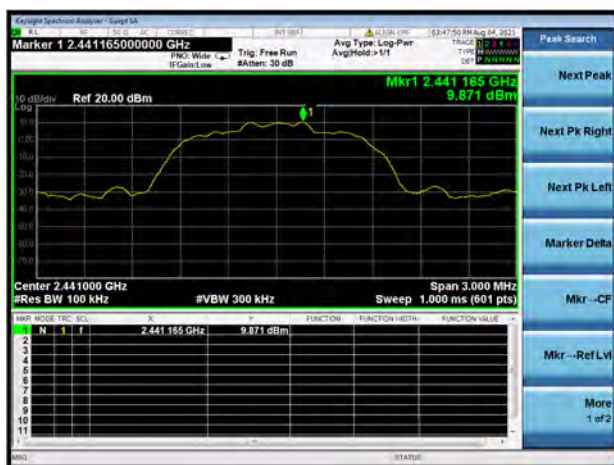


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

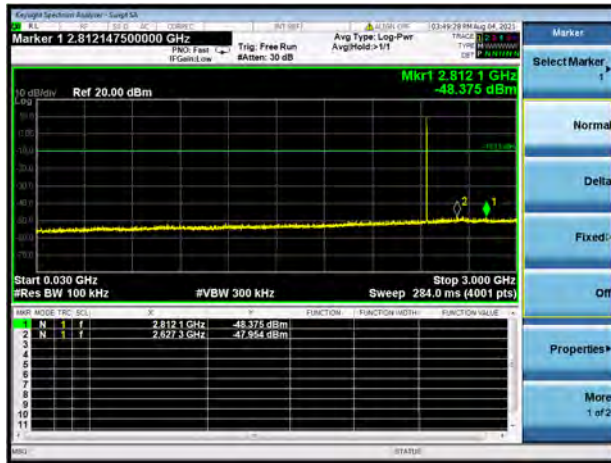


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

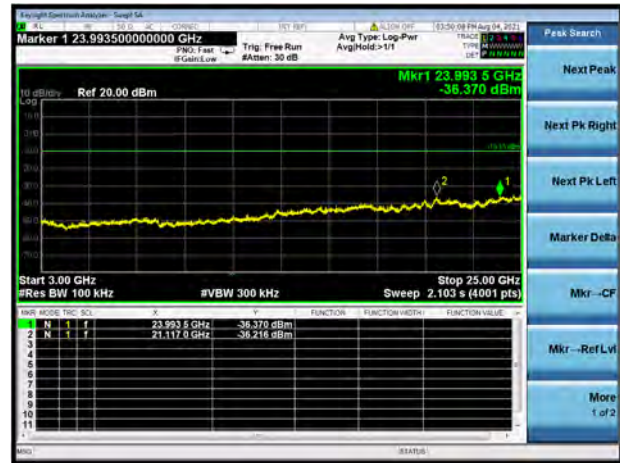


8-DPSK HIGH CHANNEL, CARRIER LEVEL

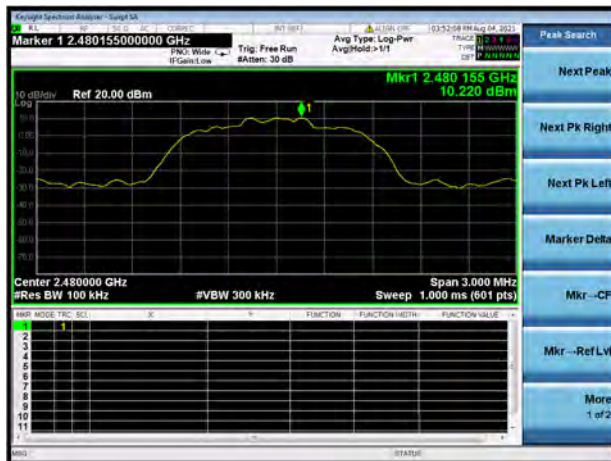

8-DPSK HIGH CHANNEL, BAND EDGE

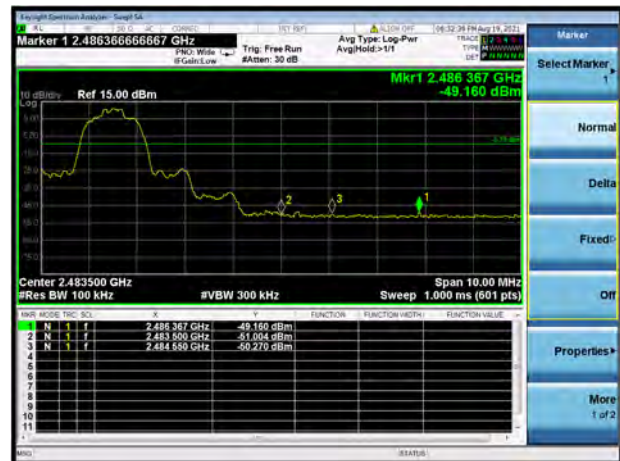


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

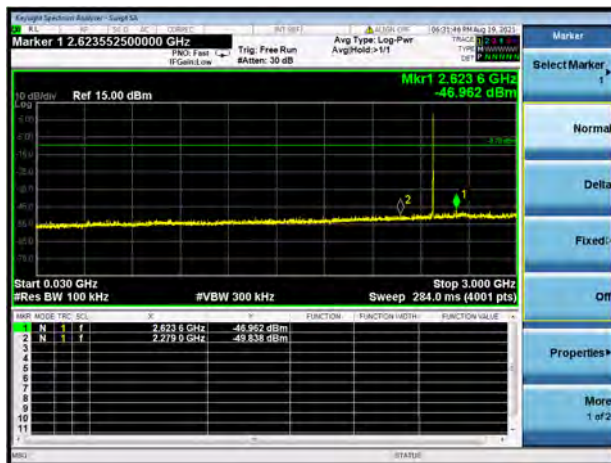


8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz



GFSK HOPPING, CARRIER LEVEL

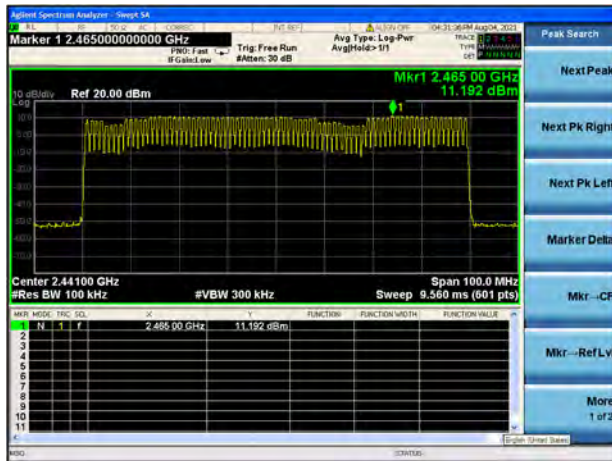


GFSK HOPPING BAND EDGE (LOW)

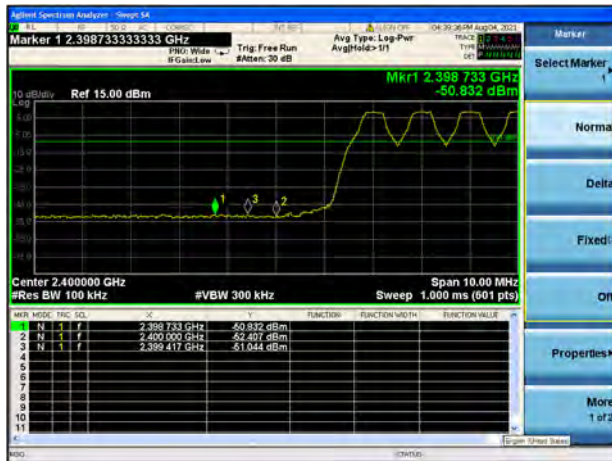


GFSK HOPPING BAND EDGE (HIGH)




GFSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

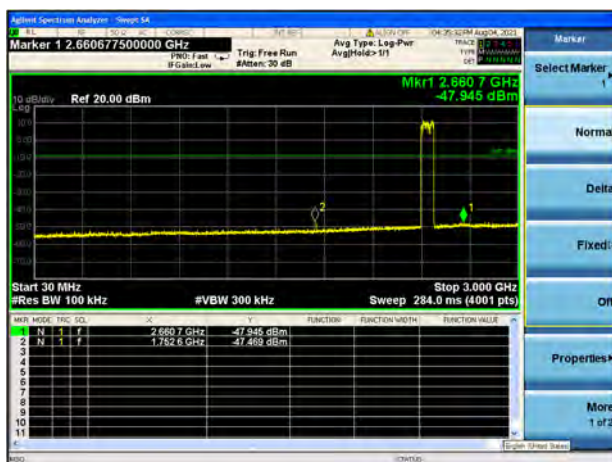


GFSK Hopping Mode, SPURIOUS 30 3GHz ~ 25 GHz

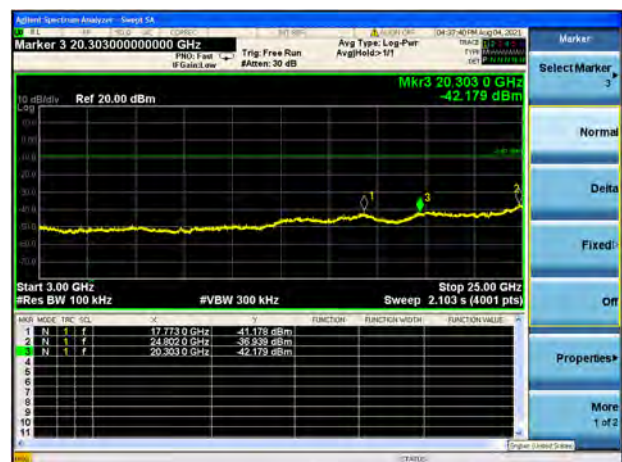

8-DPSK HOPPING, CARRIER LEVEL

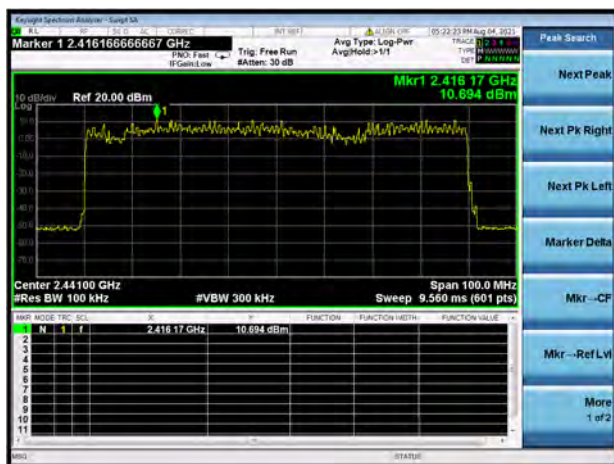


8-DPSK Hopping BAND EDGE (LOW)

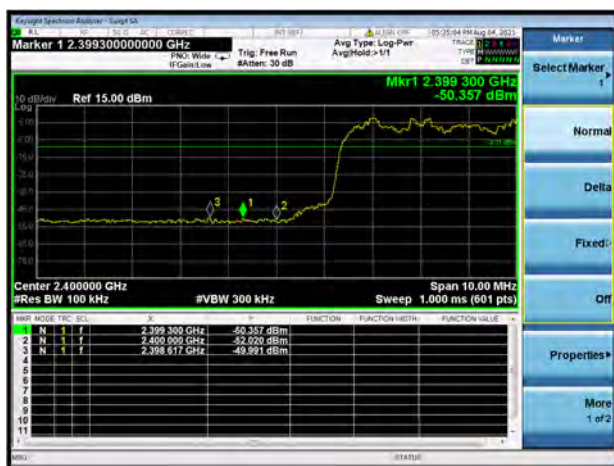


8-DPSK Hopping BAND EDGE (HIGH)



8-DPSK Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

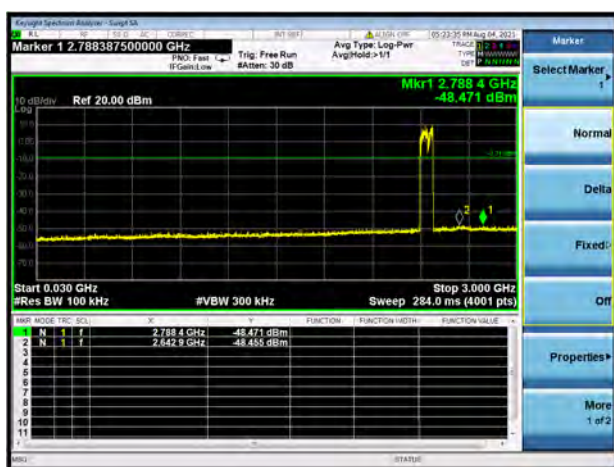

8-DPSK Hopping Mode, SPURIOUS 30 GHz ~ 25 GHz

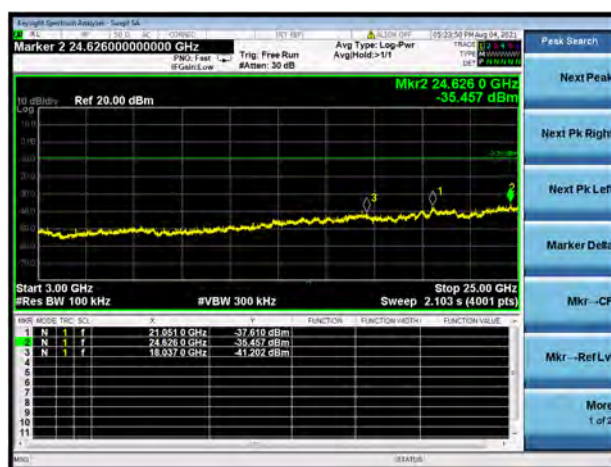

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

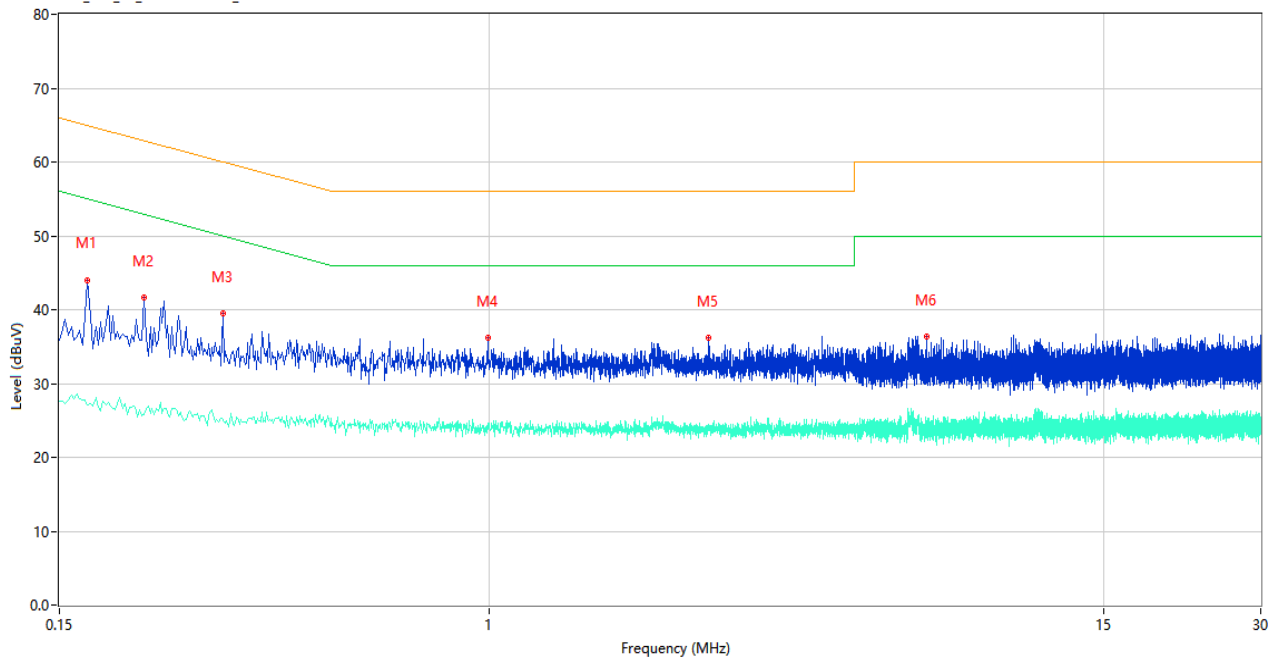

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.170	44.02	10.40	64.96	-20.94	Peak	L	Pass
1**	0.170	27.08	10.40	54.96	-27.88	AV	L	Pass
2	0.218	41.64	10.37	62.89	-21.25	Peak	L	Pass
2**	0.218	25.86	10.37	52.89	-27.03	AV	L	Pass
3	0.308	39.54	10.33	60.02	-20.48	Peak	L	Pass
3**	0.308	25.11	10.33	50.02	-24.91	AV	L	Pass
4	0.992	36.13	10.23	56.00	-19.87	Peak	L	Pass
4**	0.992	23.88	10.23	46.00	-22.12	AV	L	Pass
5	2.632	36.12	10.28	56.00	-19.88	Peak	L	Pass
5**	2.632	23.84	10.28	46.00	-22.16	AV	L	Pass
6	6.866	36.45	10.34	60.00	-23.55	Peak	L	Pass
6**	6.866	23.94	10.34	50.00	-26.06	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

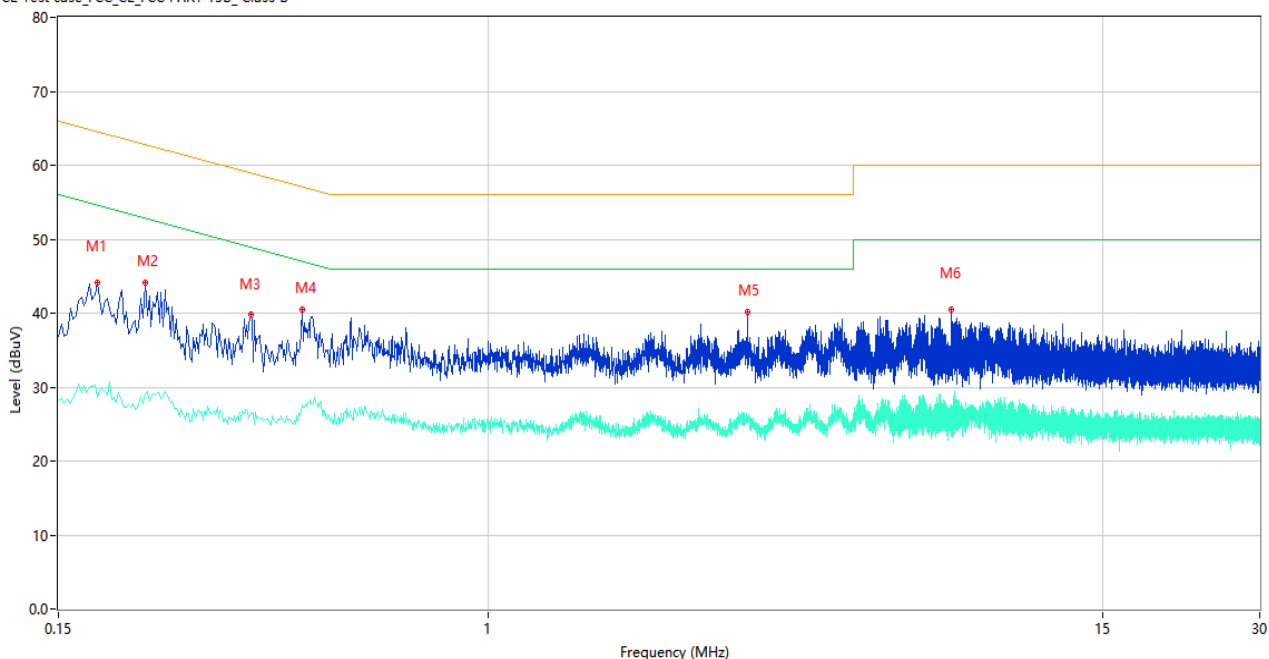

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.178	44.17	10.39	64.58	-20.41	Peak	N	Pass
1**	0.178	28.59	10.39	54.58	-25.99	AV	N	Pass
2	0.220	44.11	10.37	62.82	-18.71	Peak	N	Pass
2**	0.220	29.03	10.37	52.82	-23.79	AV	N	Pass
3	0.350	39.75	10.32	58.96	-19.21	Peak	N	Pass
3**	0.350	26.58	10.32	48.96	-22.38	AV	N	Pass
4	0.440	40.53	10.31	57.06	-16.53	Peak	N	Pass
4**	0.440	27.59	10.31	47.06	-19.47	AV	N	Pass
5	3.132	40.23	10.28	56.00	-15.77	Peak	N	Pass
5**	3.132	25.93	10.28	46.00	-20.07	AV	N	Pass
6	7.710	40.47	10.35	60.00	-19.53	Peak	N	Pass
6**	7.710	26.95	10.35	50.00	-23.05	AV	N	Pass

A.8 Radiated Spurious Emission

Test Data and Plots

Note¹: The symbol of "--" in the table which means not application.


Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.

Note⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


30 MHz to 1 GHz, ANT H

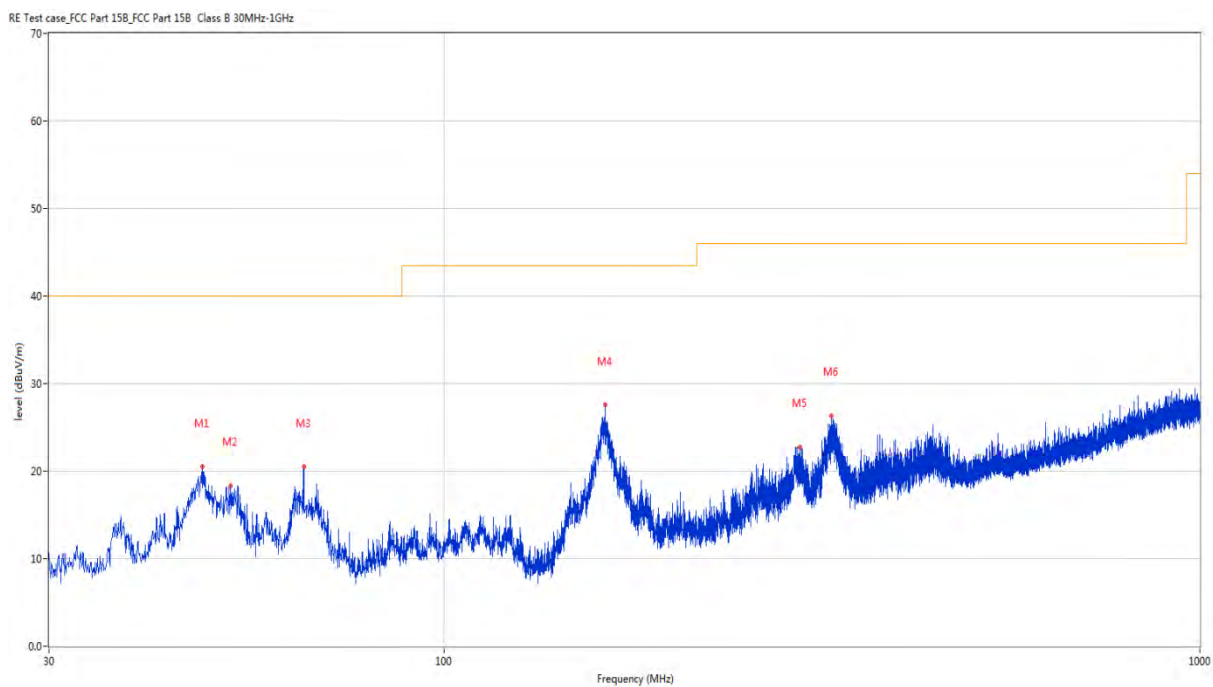

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	47.848	20.50	-22.67	40.0	-19.50	Peak	360.00	200	Horizontal	Pass
2	52.164	18.36	-23.14	40.0	-21.64	Peak	360.00	200	Horizontal	Pass
3	65.211	20.50	-25.05	40.0	-19.50	Peak	355.70	100	Horizontal	Pass
4	163.327	27.54	-26.92	43.5	-15.96	Peak	257.30	100	Horizontal	Pass
5	295.538	22.77	-21.85	46.0	-23.23	Peak	283.60	100	Horizontal	Pass
6	325.220	26.34	-20.85	46.0	-19.66	Peak	104.30	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

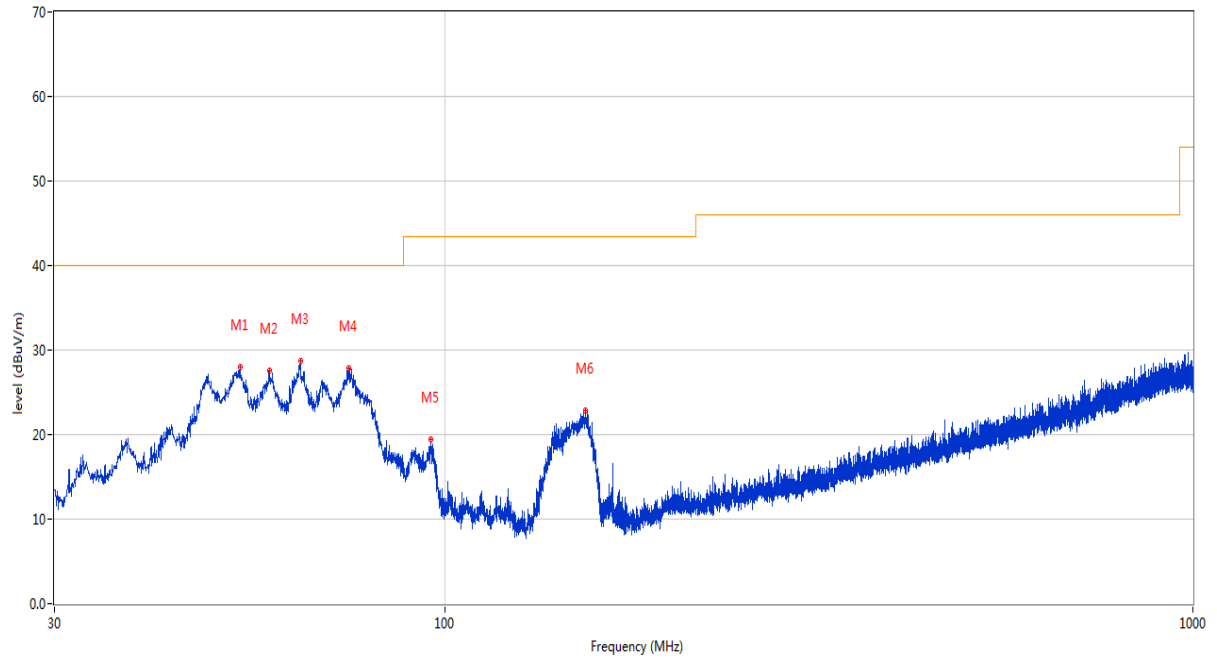


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.135	28.00	-22.98	40.0	-12.00	Peak	254.10	100	Vertical	Pass
2	58.130	27.58	-24.10	40.0	-12.42	Peak	238.10	100	Vertical	Pass
3	63.950	28.76	-24.92	40.0	-11.24	Peak	254.10	100	Vertical	Pass
4	74.184	27.88	-28.52	40.0	-12.12	Peak	179.00	100	Vertical	Pass
5	95.572	19.40	-24.83	43.5	-24.10	Peak	232.90	100	Vertical	Pass
6	154.014	22.92	-27.45	43.5	-20.58	Peak	312.20	100	Vertical	Pass

Test Data and Plots (1 GHz ~ 10th Harmonic)

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.


GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H

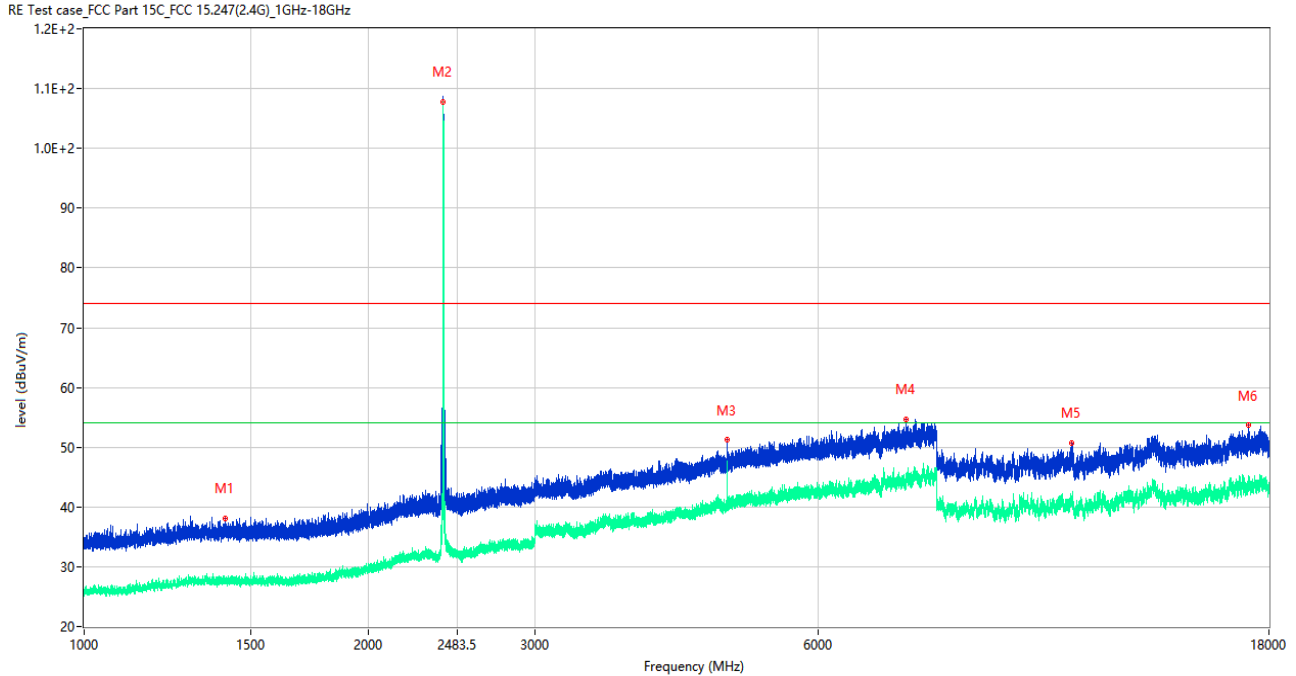

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1411.400	38.00	-17.41	74.0	-36.00	Peak	316.00	150	Horizontal	Pass
1**	1411.400	28.06	-17.41	54.0	-25.94	AV	316.00	150	Horizontal	Pass
2	2401.900	108.68	-13.07	74.0	34.68	Peak	348.00	150	Horizontal	N/A
2**	2401.900	107.40	-13.07	54.0	53.40	AV	348.00	150	Horizontal	N/A
3	4803.500	51.19	-2.58	74.0	-22.81	Peak	221.00	150	Horizontal	Pass
3**	4803.500	43.32	-2.58	54.0	-10.68	AV	221.00	150	Horizontal	Pass
4	7420.750	54.73	1.75	74.0	-19.27	Peak	339.00	150	Horizontal	Pass
4**	7420.750	44.61	1.75	54.0	-9.39	AV	339.00	150	Horizontal	Pass
5	11119.500	50.69	-2.73	74.0	-23.31	Peak	267.00	150	Horizontal	Pass
5**	11119.500	40.91	-2.73	54.0	-13.09	AV	267.00	150	Horizontal	Pass
6	17140.500	53.62	2.19	74.0	-20.38	Peak	209.00	150	Horizontal	Pass
6**	17140.500	45.28	2.19	54.0	-8.72	AV	209.00	150	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

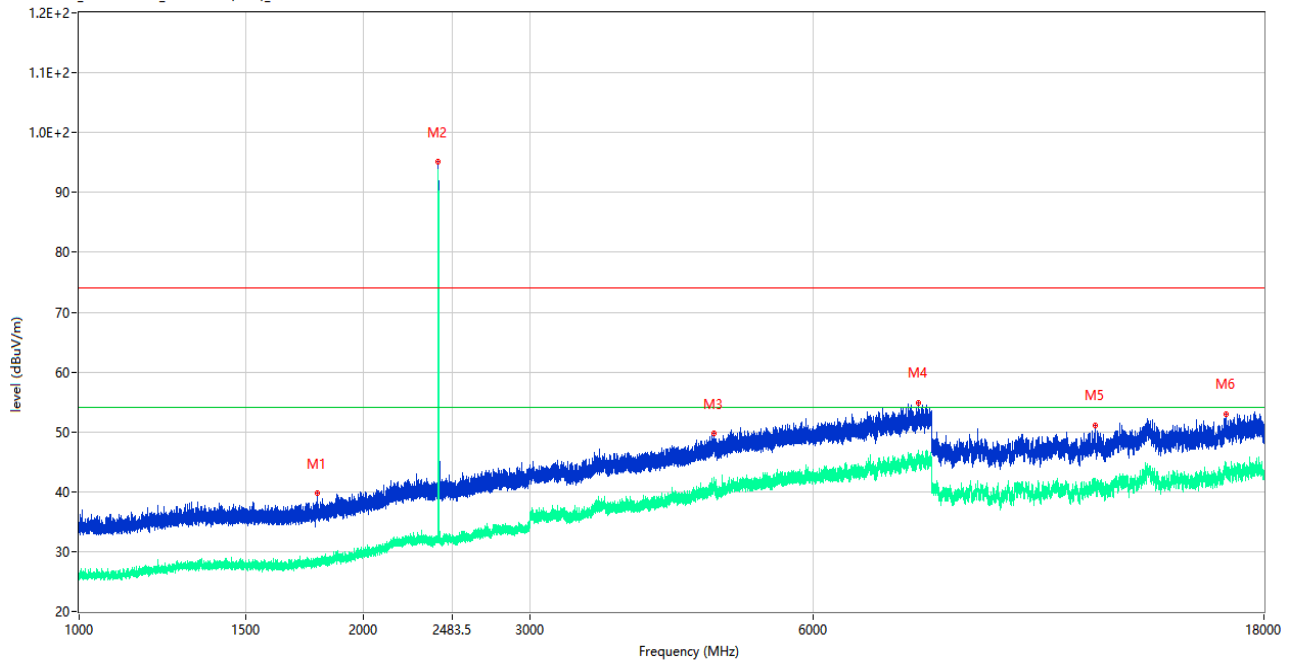

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1786.100	39.80	-16.91	74.0	-34.20	Peak	75.00	150	Vertical	Pass
1**	1786.100	27.77	-16.91	54.0	-26.23	AV	75.00	150	Vertical	Pass
2	2401.900	95.17	-13.07	74.0	21.17	Peak	56.00	150	Vertical	N/A
2**	2401.900	91.49	-13.07	54.0	37.49	AV	56.00	150	Vertical	N/A
3	4701.750	49.67	-2.37	74.0	-24.33	Peak	346.00	150	Vertical	Pass
3**	4701.750	40.35	-2.37	54.0	-13.65	AV	346.00	150	Vertical	Pass
4	7748.750	54.86	2.65	74.0	-19.14	Peak	95.00	150	Vertical	Pass
4**	7748.750	45.40	2.65	54.0	-8.60	AV	95.00	150	Vertical	Pass
5	11915.500	51.15	-1.69	74.0	-22.85	Peak	224.00	150	Vertical	Pass
5**	11915.500	41.40	-1.69	54.0	-12.60	AV	224.00	150	Vertical	Pass
6	16407.500	52.90	0.81	74.0	-21.10	Peak	341.00	150	Vertical	Pass
6**	16407.500	43.08	0.81	54.0	-10.92	AV	341.00	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

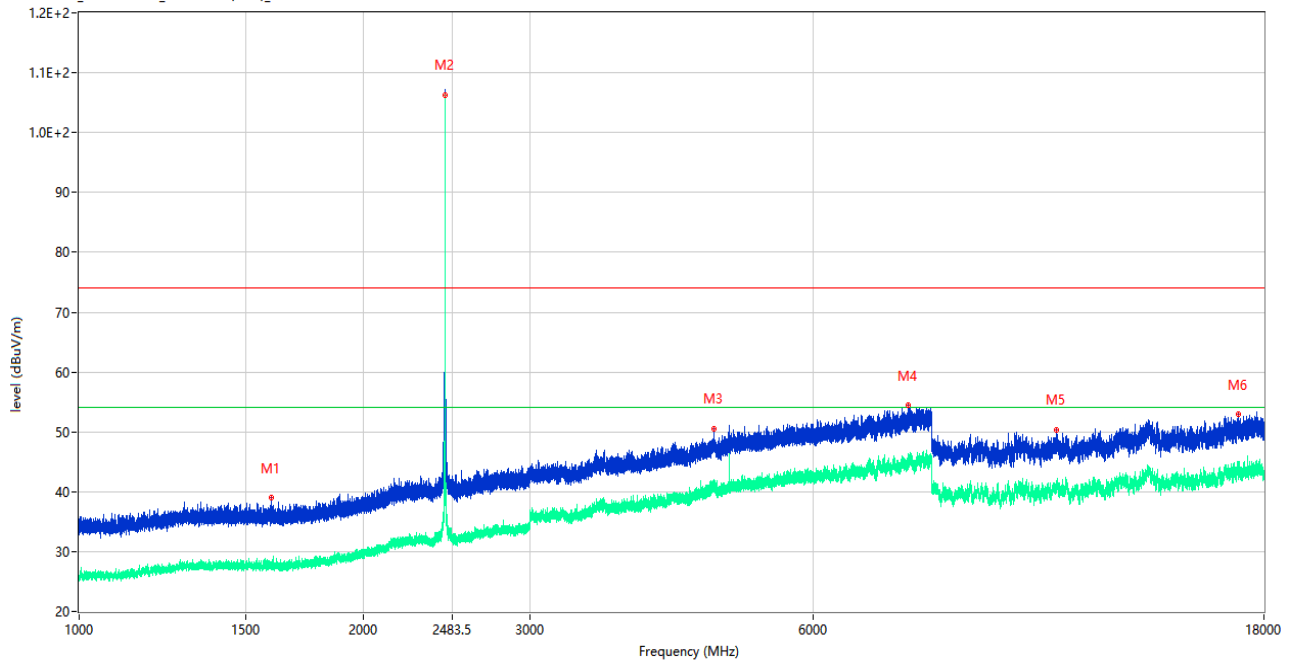

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1597.400	38.96	-17.47	74.0	-35.04	Peak	335.00	100	Horizontal	Pass
1**	1597.400	27.96	-17.47	54.0	-26.04	AV	335.00	100	Horizontal	Pass
2	2440.900	107.21	-12.09	74.0	33.21	Peak	349.00	100	Horizontal	N/A
2**	2440.900	105.53	-12.09	54.0	51.53	AV	349.00	100	Horizontal	N/A
3	4705.500	50.45	-2.39	74.0	-23.55	Peak	156.00	100	Horizontal	Pass
3**	4705.500	40.75	-2.39	54.0	-13.25	AV	156.00	100	Horizontal	Pass
4	7559.000	54.55	1.41	74.0	-19.45	Peak	222.00	100	Horizontal	Pass
4**	7559.000	44.17	1.41	54.0	-9.83	AV	222.00	100	Horizontal	Pass
5	10845.000	50.33	-2.45	74.0	-23.67	Peak	0.00	100	Horizontal	Pass
5**	10845.000	40.34	-2.45	54.0	-13.66	AV	0.00	100	Horizontal	Pass
6	16898.500	53.04	1.63	74.0	-20.96	Peak	256.00	100	Horizontal	Pass
6**	16898.500	43.71	1.63	54.0	-10.29	AV	256.00	100	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

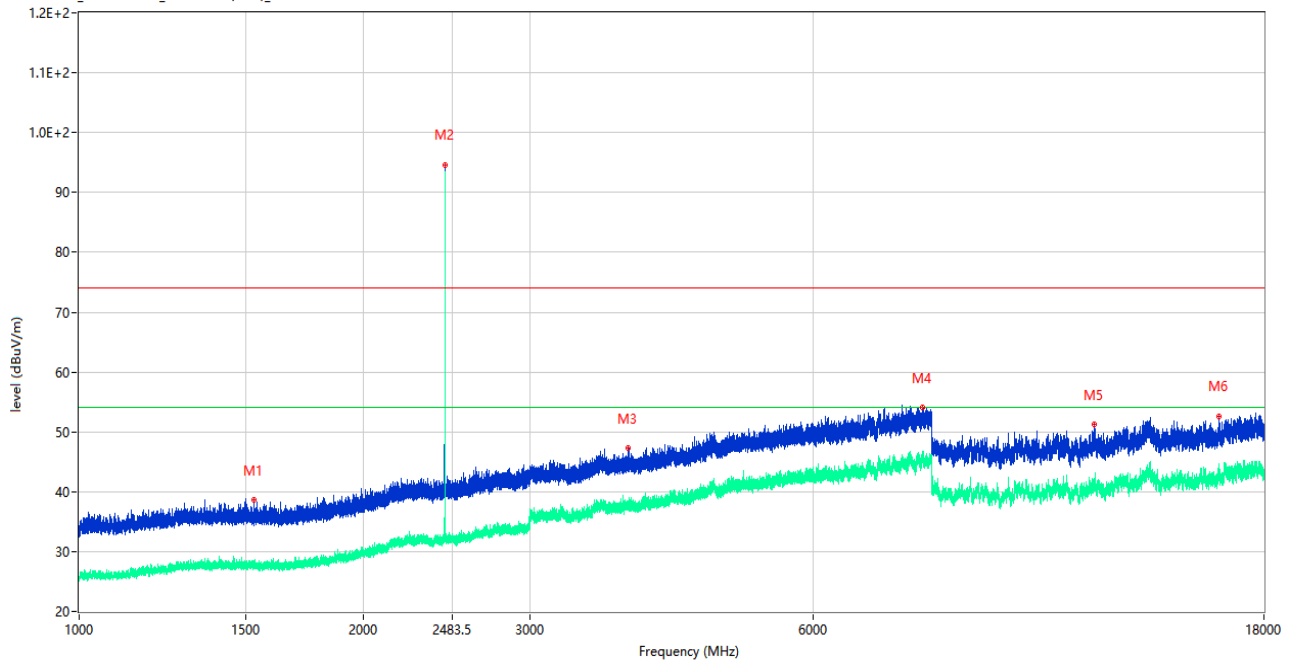

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1530.200	38.62	-17.39	74.0	-35.38	Peak	326.00	150	Vertical	Pass
1**	1530.200	27.43	-17.39	54.0	-26.57	AV	326.00	150	Vertical	Pass
2	2441.000	94.53	-12.08	74.0	20.53	Peak	83.00	150	Vertical	N/A
2**	2441.000	93.07	-12.08	54.0	39.07	AV	83.00	150	Vertical	N/A
3	3819.750	47.28	-5.25	74.0	-26.72	Peak	13.00	150	Vertical	Pass
3**	3819.750	37.74	-5.25	54.0	-16.26	AV	13.00	150	Vertical	Pass
4	7827.000	54.00	2.36	74.0	-20.00	Peak	189.00	150	Vertical	Pass
4**	7827.000	45.71	2.36	54.0	-8.29	AV	189.00	150	Vertical	Pass
5	11898.500	51.27	-1.39	74.0	-22.73	Peak	165.00	150	Vertical	Pass
5**	11898.500	40.19	-1.39	54.0	-13.81	AV	165.00	150	Vertical	Pass
6	16134.500	52.61	-0.38	74.0	-21.39	Peak	23.00	150	Vertical	Pass
6**	16134.500	43.43	-0.38	54.0	-10.57	AV	23.00	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

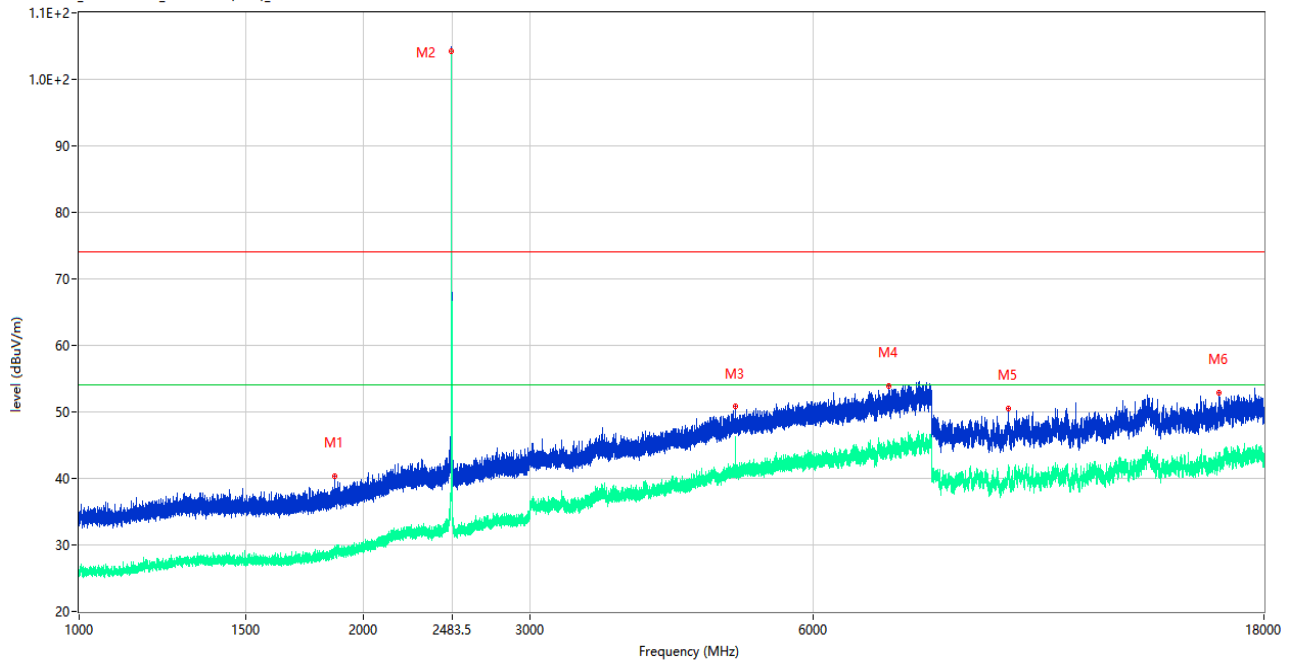

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1863.300	40.38	-16.29	74.0	-33.62	Peak	260.00	150	Horizontal	Pass
1**	1863.300	28.98	-16.29	54.0	-25.02	AV	260.00	150	Horizontal	Pass
2	2480.000	104.90	-12.82	74.0	30.90	Peak	344.00	150	Horizontal	N/A
2**	2480.000	104.04	-12.82	54.0	50.04	AV	344.00	150	Horizontal	N/A
3	4960.000	50.79	-2.62	74.0	-23.21	Peak	156.00	150	Horizontal	Pass
3**	4960.000	46.26	-2.62	54.0	-7.74	AV	156.00	150	Horizontal	Pass
4	7211.500	53.94	0.59	74.0	-20.06	Peak	114.00	150	Horizontal	Pass
4**	7211.500	44.68	0.59	54.0	-9.32	AV	114.00	150	Horizontal	Pass
5	9655.000	50.49	-2.29	74.0	-23.51	Peak	8.00	150	Horizontal	Pass
5**	9655.000	41.31	-2.29	54.0	-12.69	AV	8.00	150	Horizontal	Pass
6	16135.000	52.89	-0.37	74.0	-21.11	Peak	66.00	150	Horizontal	Pass
6**	16135.000	42.28	-0.37	54.0	-11.72	AV	66.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

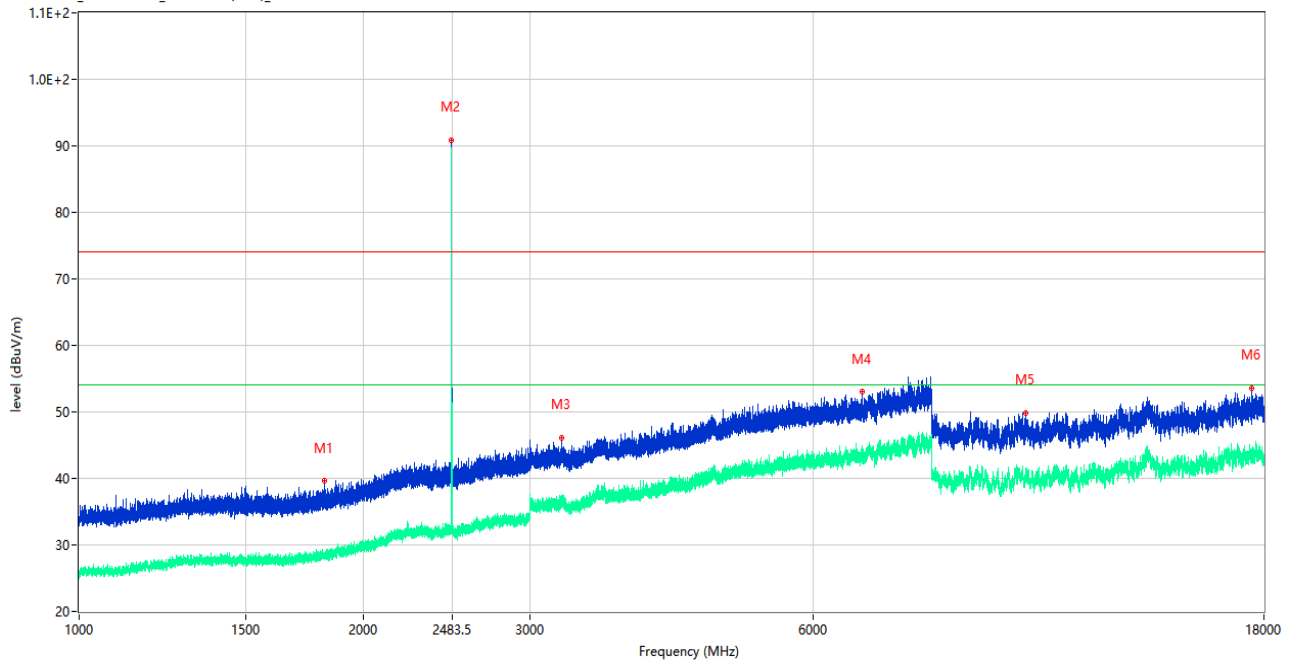

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1817.900	39.62	-16.69	74.0	-34.38	Peak	0.00	150	Vertical	Pass
1**	1817.900	28.32	-16.69	54.0	-25.68	AV	0.00	150	Vertical	Pass
2	2479.900	90.81	-12.82	74.0	16.81	Peak	80.00	150	Vertical	N/A
2**	2479.900	89.48	-12.82	54.0	35.48	AV	80.00	150	Vertical	N/A
3	3244.000	46.07	-6.43	74.0	-27.93	Peak	155.00	150	Vertical	Pass
3**	3244.000	36.96	-6.43	54.0	-17.04	AV	155.00	150	Vertical	Pass
4	6759.250	53.01	-0.53	74.0	-20.99	Peak	305.00	150	Vertical	Pass
4**	6759.250	44.00	-0.53	54.0	-10.00	AV	305.00	150	Vertical	Pass
5	10077.000	49.91	-3.73	74.0	-24.09	Peak	198.00	150	Vertical	Pass
5**	10077.000	40.43	-3.73	54.0	-13.57	AV	198.00	150	Vertical	Pass
6	17478.001	53.53	2.23	74.0	-20.47	Peak	292.00	150	Vertical	Pass
6**	17478.001	44.23	2.23	54.0	-9.77	AV	292.00	150	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

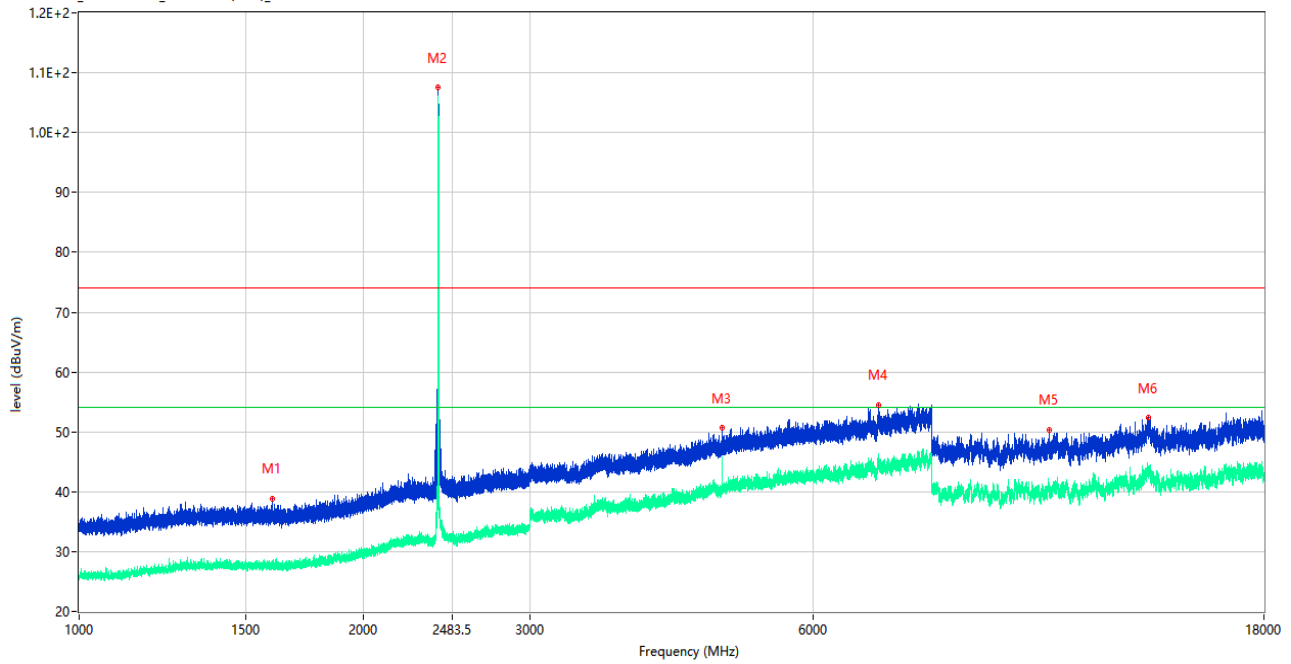

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1602.800	38.83	-17.42	74.0	-35.17	Peak	331.00	150	Horizontal	Pass
1**	1602.800	28.10	-17.42	54.0	-25.90	AV	331.00	150	Horizontal	Pass
2	2401.900	107.49	-13.07	74.0	33.49	Peak	349.00	150	Horizontal	N/A
2**	2401.900	103.29	-13.07	54.0	49.29	AV	349.00	150	Horizontal	N/A
3	4803.750	50.62	-2.59	74.0	-23.38	Peak	222.00	150	Horizontal	Pass
3**	4803.750	44.46	-2.59	54.0	-9.54	AV	222.00	150	Horizontal	Pass
4	7032.250	54.49	0.92	74.0	-19.51	Peak	114.00	150	Horizontal	Pass
4**	7032.250	44.92	0.92	54.0	-9.08	AV	114.00	150	Horizontal	Pass
5	10658.000	50.34	-3.83	74.0	-23.66	Peak	315.00	150	Horizontal	Pass
5**	10658.000	39.43	-3.83	54.0	-14.57	AV	315.00	150	Horizontal	Pass
6	13593.500	52.32	3.18	74.0	-21.68	Peak	220.00	150	Horizontal	Pass
6**	13593.500	43.20	3.18	54.0	-10.80	AV	220.00	150	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

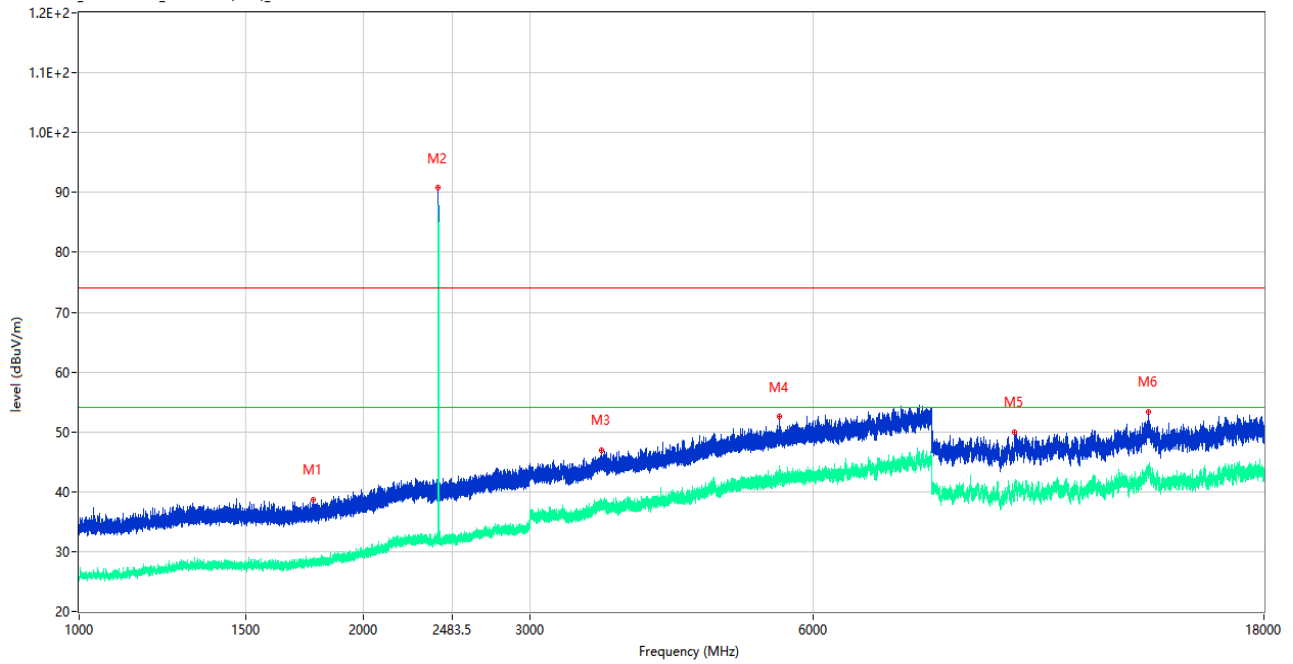

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1770.800	38.68	-16.94	74.0	-35.32	Peak	55.00	150	Vertical	Pass
1**	1770.800	27.71	-16.94	54.0	-26.29	AV	55.00	150	Vertical	Pass
2	2401.800	90.72	-13.07	74.0	16.72	Peak	101.00	150	Vertical	N/A
2**	2401.800	87.17	-13.07	54.0	33.17	AV	101.00	150	Vertical	N/A
3	3579.500	47.02	-5.59	74.0	-26.98	Peak	163.00	150	Vertical	Pass
3**	3579.500	37.02	-5.59	54.0	-16.98	AV	163.00	150	Vertical	Pass
4	5520.250	52.52	-1.45	74.0	-21.48	Peak	131.00	150	Vertical	Pass
4**	5520.250	42.02	-1.45	54.0	-11.98	AV	131.00	150	Vertical	Pass
5	9799.000	49.97	-3.07	74.0	-24.03	Peak	35.00	150	Vertical	Pass
5**	9799.000	40.94	-3.07	54.0	-13.06	AV	35.00	150	Vertical	Pass
6	13585.000	53.40	3.16	74.0	-20.60	Peak	106.00	150	Vertical	Pass
6**	13585.000	42.79	3.16	54.0	-11.21	AV	106.00	150	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

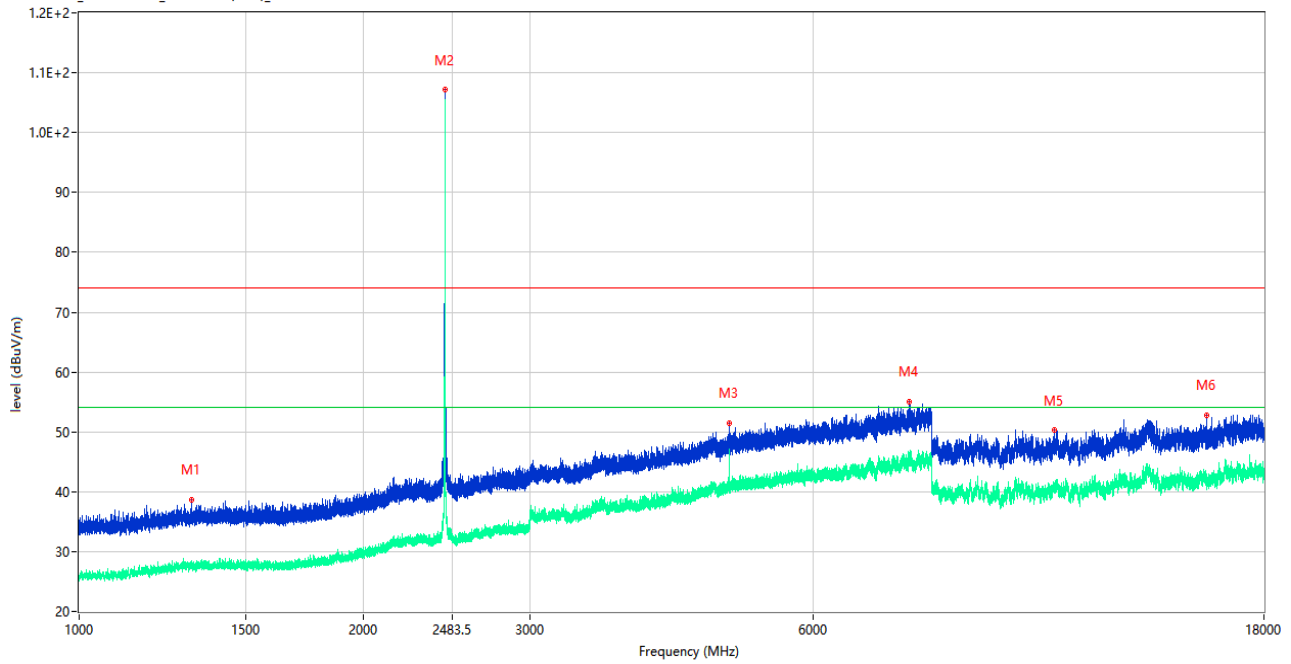

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1316.000	38.73	-17.42	74.0	-35.27	Peak	171.00	150	Horizontal	Pass
1**	1316.000	27.56	-17.42	54.0	-26.44	AV	171.00	150	Horizontal	Pass
2	2440.900	107.12	-12.09	74.0	33.12	Peak	360.00	150	Horizontal	N/A
2**	2440.900	103.49	-12.09	54.0	49.49	AV	360.00	150	Horizontal	N/A
3	4882.000	51.51	-2.71	74.0	-22.49	Peak	164.00	150	Horizontal	Pass
3**	4882.000	44.80	-2.71	54.0	-9.20	AV	164.00	150	Horizontal	Pass
4	7566.750	55.06	2.21	74.0	-18.94	Peak	206.00	150	Horizontal	Pass
4**	7566.750	44.70	2.21	54.0	-9.30	AV	206.00	150	Horizontal	Pass
5	10787.000	50.31	-3.86	74.0	-23.69	Peak	171.00	150	Horizontal	Pass
5**	10787.000	40.61	-3.86	54.0	-13.39	AV	171.00	150	Horizontal	Pass
6	15662.500	52.82	-1.58	74.0	-21.18	Peak	360.00	150	Horizontal	Pass
6**	15662.500	41.76	-1.58	54.0	-12.24	AV	360.00	150	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

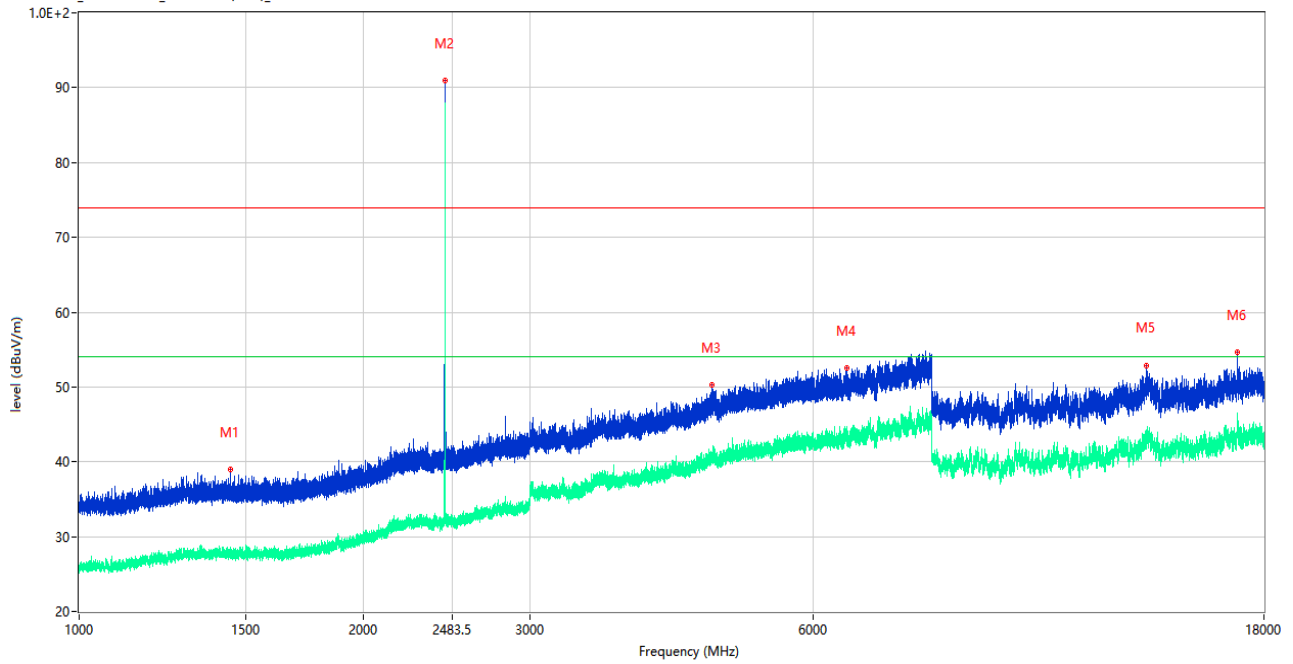

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1447.800	38.91	-17.40	74.0	-35.09	Peak	253.00	150	Vertical	Pass
1**	1447.800	27.90	-17.40	54.0	-26.10	AV	253.00	150	Vertical	Pass
2	2441.200	90.98	-12.07	74.0	16.98	Peak	87.00	150	Vertical	N/A
2**	2441.200	87.93	-12.07	54.0	33.93	AV	87.00	150	Vertical	N/A
3	4684.250	50.31	-3.24	74.0	-23.69	Peak	121.00	150	Vertical	Pass
3**	4684.250	40.77	-3.24	54.0	-13.23	AV	121.00	150	Vertical	Pass
4	6512.750	52.61	-1.43	74.0	-21.39	Peak	336.00	150	Vertical	Pass
4**	6512.750	42.18	-1.43	54.0	-11.82	AV	336.00	150	Vertical	Pass
5	13523.500	52.91	1.85	74.0	-21.09	Peak	107.00	150	Vertical	Pass
5**	13523.500	42.72	1.85	54.0	-11.28	AV	107.00	150	Vertical	Pass
6	16866.000	54.65	1.06	74.0	-19.35	Peak	294.00	150	Vertical	Pass
6**	16866.000	43.80	1.06	54.0	-10.20	AV	294.00	150	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

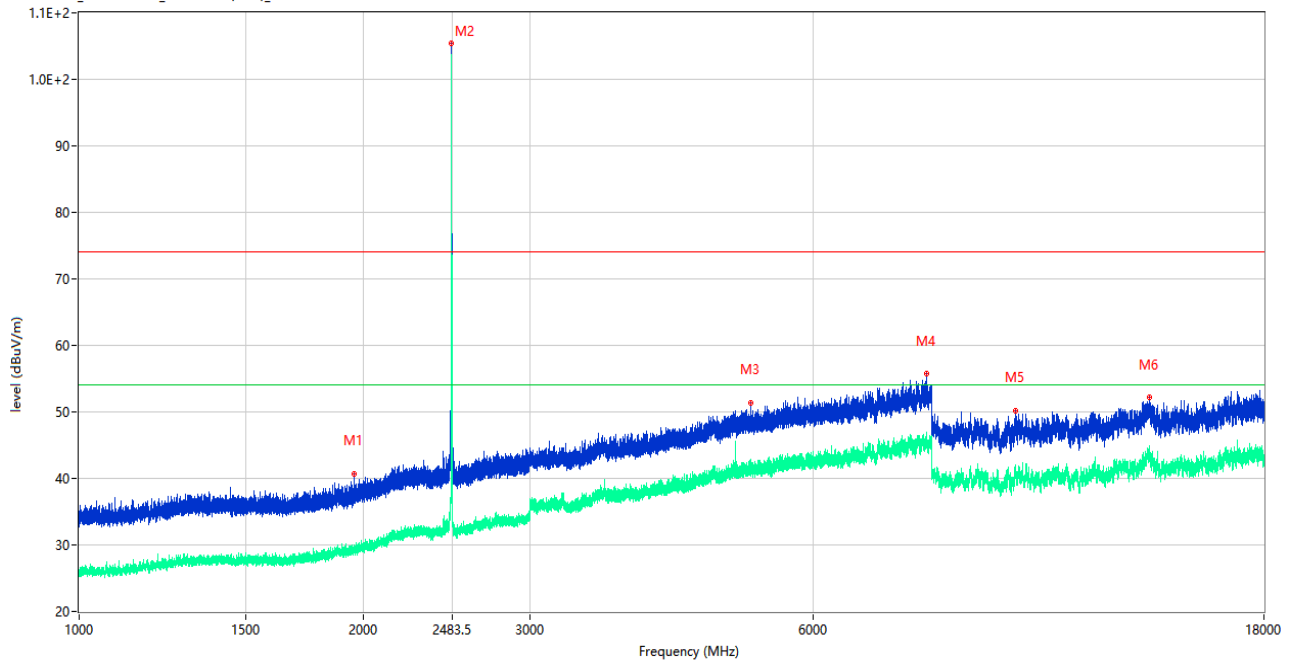

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1955.100	40.72	-15.98	74.0	-33.28	Peak	178.00	150	Horizontal	Pass
1**	1955.100	29.74	-15.98	54.0	-24.26	AV	178.00	150	Horizontal	Pass
2	2479.800	105.48	-12.81	74.0	31.48	Peak	345.00	150	Horizontal	N/A
2**	2479.800	101.99	-12.81	54.0	47.99	AV	345.00	150	Horizontal	N/A
3	5145.750	51.34	-1.95	74.0	-22.66	Peak	330.00	150	Horizontal	Pass
3**	5145.750	41.38	-1.95	54.0	-12.62	AV	330.00	150	Horizontal	Pass
4	7903.000	55.74	2.72	74.0	-18.26	Peak	264.00	150	Horizontal	Pass
4**	7903.000	45.02	2.72	54.0	-8.98	AV	264.00	150	Horizontal	Pass
5	9824.500	50.25	-3.59	74.0	-23.75	Peak	277.00	150	Horizontal	Pass
5**	9824.500	40.80	-3.59	54.0	-13.20	AV	277.00	150	Horizontal	Pass
6	13612.500	52.21	3.10	74.0	-21.79	Peak	55.00	150	Horizontal	Pass
6**	13612.500	43.26	3.10	54.0	-10.74	AV	55.00	150	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

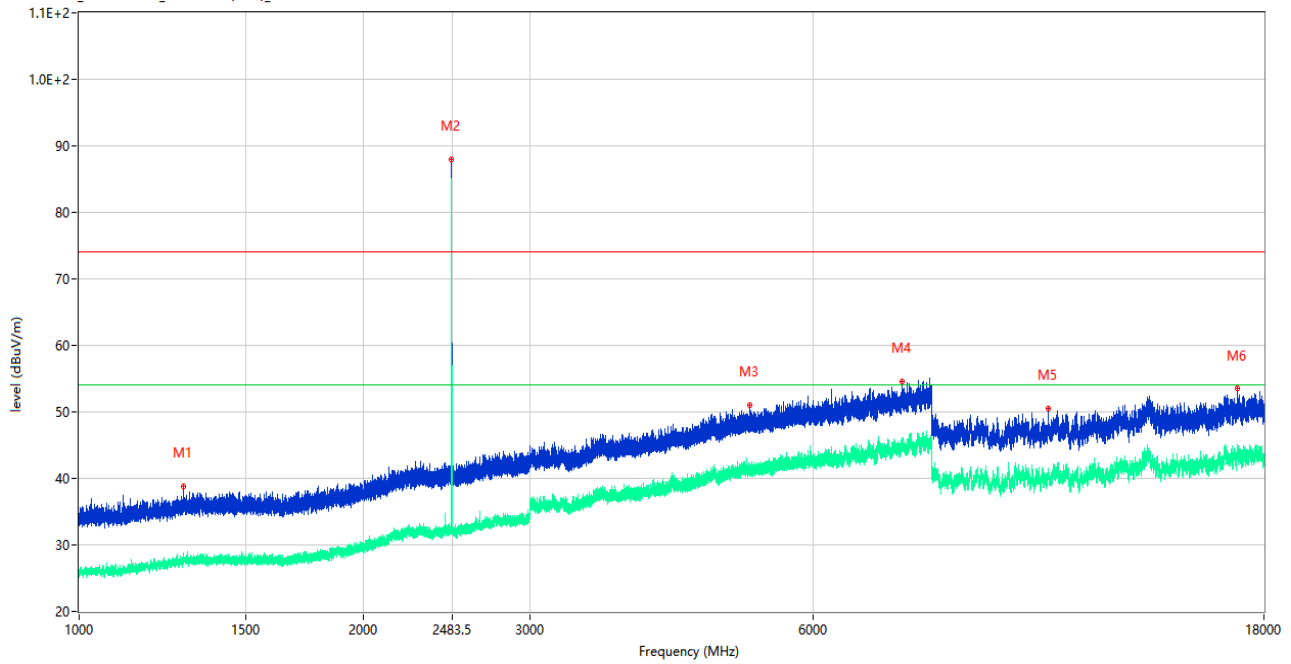


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.200	38.74	-17.33	74.0	-35.26	Peak	68.00	150	Vertical	Pass
1**	1289.200	27.48	-17.33	54.0	-26.52	AV	68.00	150	Vertical	Pass
2	2479.900	88.00	-12.82	74.0	14.00	Peak	100.00	150	Vertical	N/A
2**	2479.900	84.89	-12.82	54.0	30.89	AV	100.00	150	Vertical	N/A
3	5136.000	50.94	-2.21	74.0	-23.06	Peak	0.00	150	Vertical	Pass
3**	5136.000	40.76	-2.21	54.0	-13.24	AV	0.00	150	Vertical	Pass
4	7437.750	54.63	1.63	74.0	-19.37	Peak	344.00	150	Vertical	Pass
4**	7437.750	44.58	1.63	54.0	-9.42	AV	344.00	150	Vertical	Pass
5	10633.000	50.49	-3.56	74.0	-23.51	Peak	246.00	150	Vertical	Pass
5**	10633.000	41.15	-3.56	54.0	-12.85	AV	246.00	150	Vertical	Pass
6	16878.000	53.56	1.27	74.0	-20.44	Peak	176.00	150	Vertical	Pass
6**	16878.000	44.51	1.27	54.0	-9.49	AV	176.00	150	Vertical	Pass

Hopping Mode:

GFSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

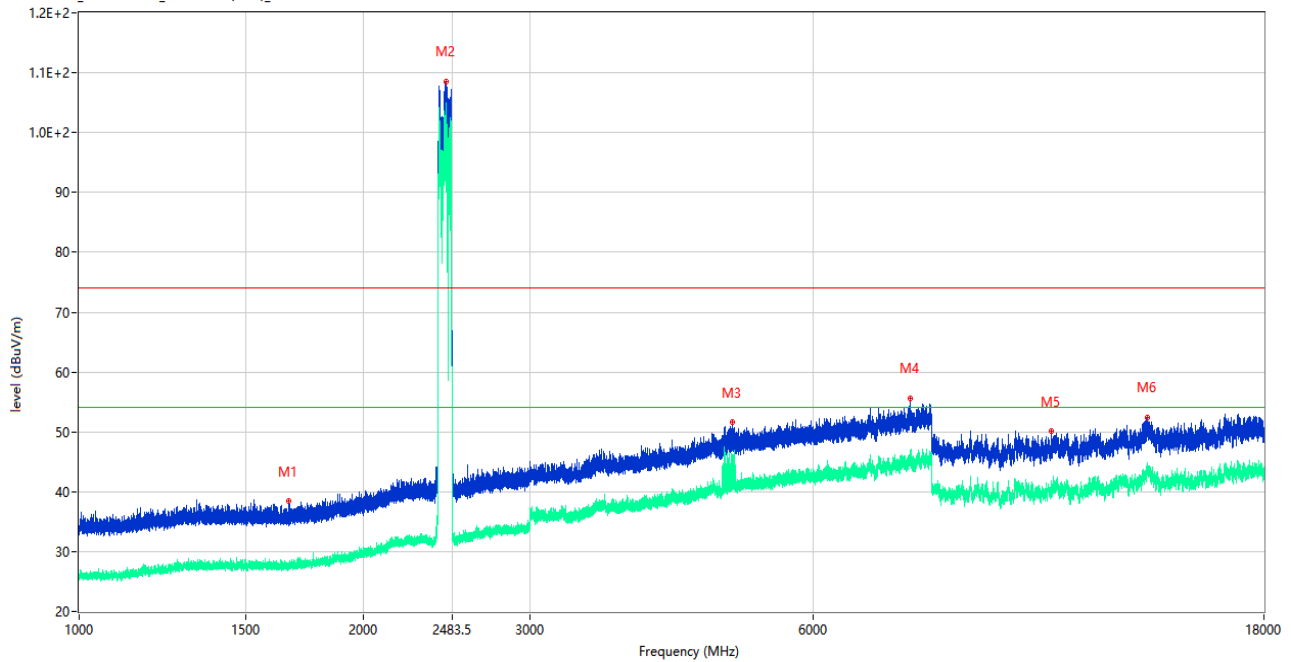

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1669.400	38.47	-17.28	74.0	-35.53	Peak	270.00	150	Horizontal	Pass
1**	1669.400	27.77	-17.28	54.0	-26.23	AV	270.00	150	Horizontal	Pass
2	2450.000	108.53	-11.81	74.0	34.53	Peak	345.00	150	Horizontal	N/A
2**	2450.000	104.96	-11.81	54.0	50.96	AV	345.00	150	Horizontal	N/A
3	4916.000	51.64	-2.52	74.0	-22.36	Peak	179.00	150	Horizontal	Pass
3**	4916.000	44.71	-2.52	54.0	-9.29	AV	179.00	150	Horizontal	Pass
4	7589.000	55.66	2.47	74.0	-18.34	Peak	296.00	150	Horizontal	Pass
4**	7589.000	45.42	2.47	54.0	-8.58	AV	296.00	150	Horizontal	Pass
5	10725.500	50.22	-4.10	74.0	-23.78	Peak	130.00	150	Horizontal	Pass
5**	10725.500	39.76	-4.10	54.0	-14.24	AV	130.00	150	Horizontal	Pass
6	13548.000	52.31	2.97	74.0	-21.69	Peak	223.00	150	Horizontal	Pass
6**	13548.000	44.45	2.97	54.0	-9.55	AV	223.00	150	Horizontal	Pass

GFSK MODE 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

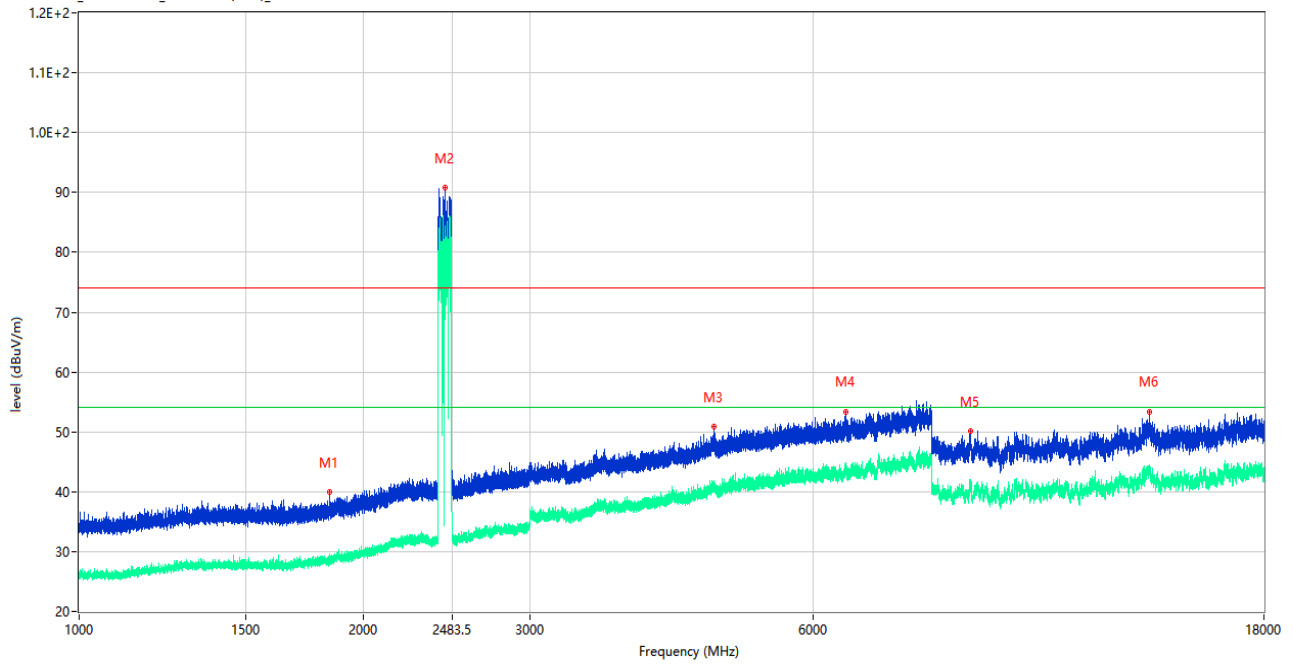

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1843.900	39.87	-16.47	74.0	-34.13	Peak	312.00	150	Vertical	Pass
1**	1843.900	28.90	-16.47	54.0	-25.10	AV	312.00	150	Vertical	Pass
2	2441.800	90.73	-12.04	74.0	16.73	Peak	92.00	150	Vertical	N/A
2**	2441.800	82.98	-12.04	54.0	28.98	AV	92.00	150	Vertical	N/A
3	4708.000	50.91	-2.36	74.0	-23.09	Peak	132.00	150	Vertical	Pass
3**	4708.000	40.56	-2.36	54.0	-13.44	AV	132.00	150	Vertical	Pass
4	6489.250	53.29	-0.28	74.0	-20.71	Peak	239.00	150	Vertical	Pass
4**	6489.250	43.79	-0.28	54.0	-10.21	AV	239.00	150	Vertical	Pass
5	8789.000	50.15	-2.52	74.0	-23.85	Peak	112.00	150	Vertical	Pass
5**	8789.000	40.98	-2.52	54.0	-13.02	AV	112.00	150	Vertical	Pass
6	13607.999	53.25	3.14	74.0	-20.75	Peak	240.00	150	Vertical	Pass
6**	13607.999	43.31	3.14	54.0	-10.69	AV	240.00	150	Vertical	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

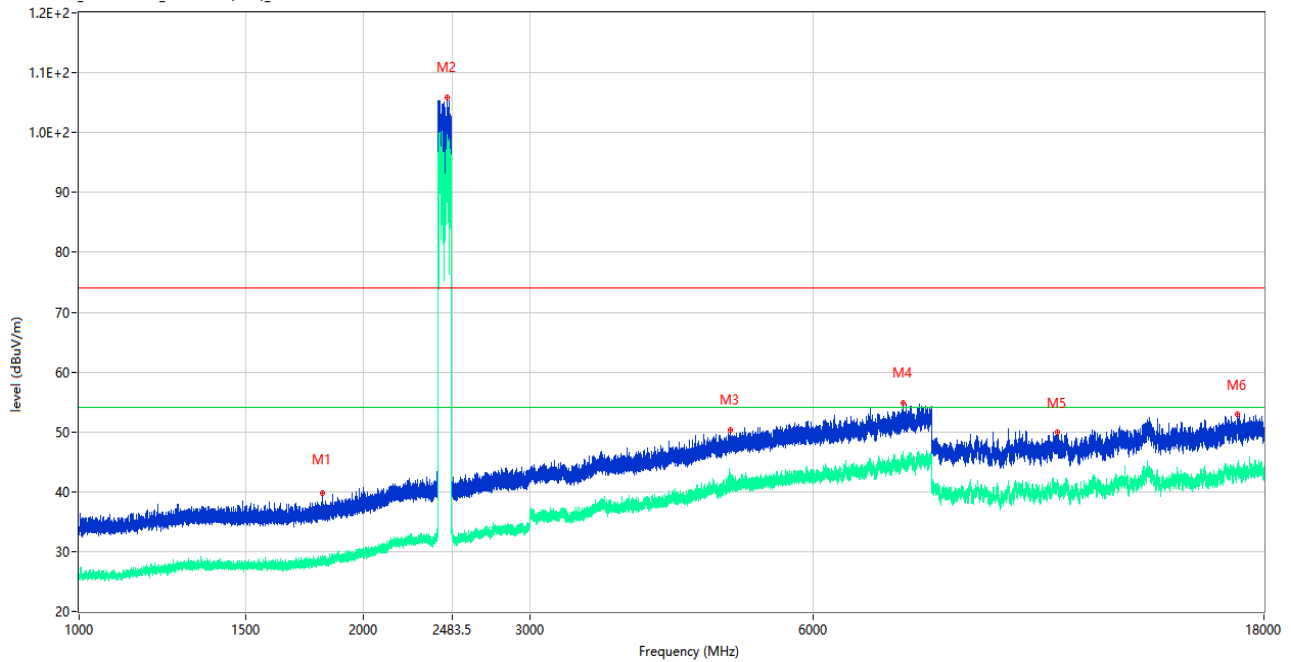

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1808.200	39.83	-16.63	74.0	-34.17	Peak	348.00	150	Horizontal	Pass
1**	1808.200	28.32	-16.63	54.0	-25.68	AV	348.00	150	Horizontal	Pass
2	2451.800	105.89	-12.10	74.0	31.89	Peak	1.00	150	Horizontal	N/A
2**	2451.800	96.36	-12.10	54.0	42.36	AV	1.00	150	Horizontal	N/A
3	4898.250	50.41	-2.59	74.0	-23.59	Peak	306.00	150	Horizontal	Pass
3**	4898.250	40.97	-2.59	54.0	-13.03	AV	306.00	150	Horizontal	Pass
4	7468.750	54.75	1.03	74.0	-19.25	Peak	214.00	150	Horizontal	Pass
4**	7468.750	44.59	1.03	54.0	-9.41	AV	214.00	150	Horizontal	Pass
5	10885.500	49.92	-3.30	74.0	-24.08	Peak	101.00	150	Horizontal	Pass
5**	10885.500	40.45	-3.30	54.0	-13.55	AV	101.00	150	Horizontal	Pass
6	16872.500	52.88	1.18	74.0	-21.12	Peak	338.00	150	Horizontal	Pass
6**	16872.500	44.50	1.18	54.0	-9.50	AV	338.00	150	Horizontal	Pass

8-DPSK MODE 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

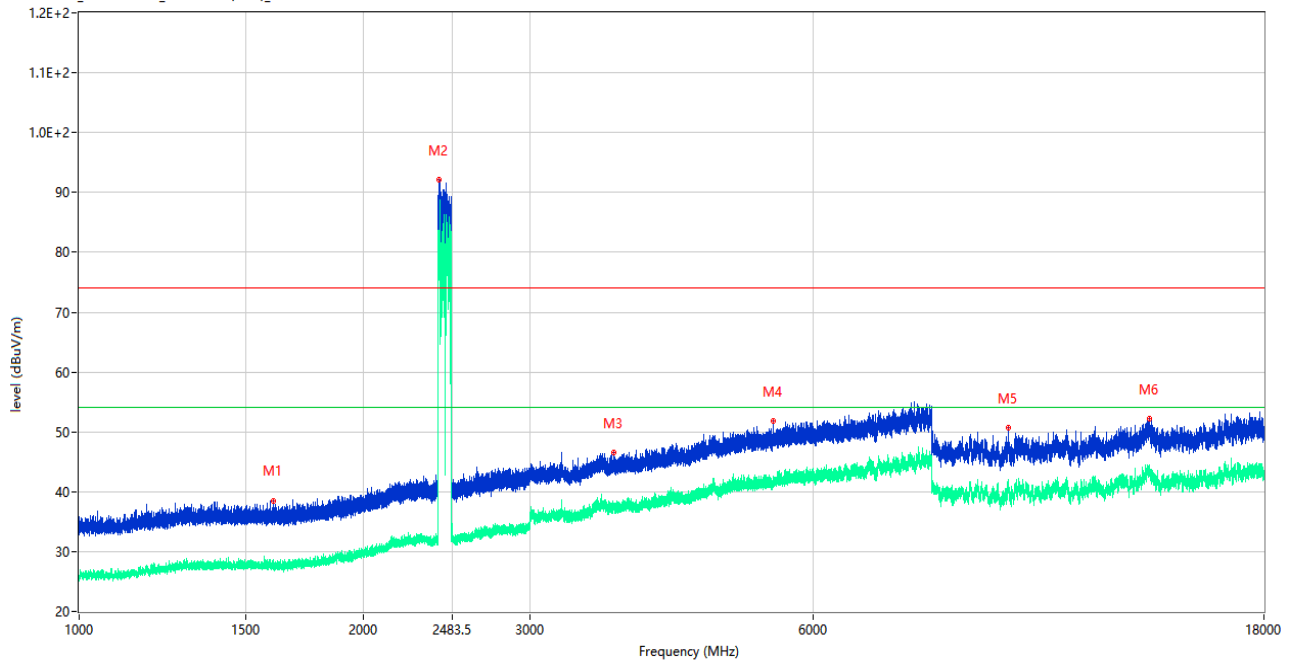

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	TaBT (Degree)	Height (cm)	Antenna	Verdict
1	1607.900	38.48	-17.61	74.0	-35.52	Peak	328.00	150	Vertical	Pass
1**	1607.900	27.36	-17.61	54.0	-26.64	AV	328.00	150	Vertical	Pass
2	2403.600	92.08	-13.01	74.0	18.08	Peak	54.00	150	Vertical	N/A
2**	2403.600	81.53	-13.01	54.0	27.53	AV	54.00	150	Vertical	N/A
3	3684.500	46.60	-5.23	74.0	-27.40	Peak	87.00	150	Vertical	Pass
3**	3684.500	37.78	-5.23	54.0	-16.22	AV	87.00	150	Vertical	Pass
4	5437.250	51.75	-1.42	74.0	-22.25	Peak	253.00	150	Vertical	Pass
4**	5437.250	41.79	-1.42	54.0	-12.21	AV	253.00	150	Vertical	Pass
5	9657.000	50.61	-2.43	74.0	-23.39	Peak	293.00	150	Vertical	Pass
5**	9657.000	39.99	-2.43	54.0	-14.01	AV	293.00	150	Vertical	Pass
6	13623.500	52.20	3.01	74.0	-21.80	Peak	11.00	150	Vertical	Pass
6**	13623.500	43.46	3.01	54.0	-10.54	AV	11.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Test Data

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390.00	52.173	31.47	74	21.827	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.50	52.901	31.40	74	21.099	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	Low	2390.00	53.178	31.47	74	20.822	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK	HIGH	2483.50	53.314	31.40	74	20.686	PEAK	Pass
		2483.50	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	Low	2390.00	53.206	31.47	74	20.794	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK(Hopping)	HIGH	2483.50	54.350	32.54	74	19.650	PEAK	Pass
		2483.50	44.532	32.54	54	9.468	AVERAGE	Pass
8-DPSK (Hopping)	Low	2390.00	52.835	31.47	74	21.165	PEAK	Pass
		2390.00	N/A	N/A	54	N/A	AVERAGE	Pass
8-DPSK (Hopping)	HIGH	2483.50	55.954	32.54	74	18.046	PEAK	Pass
		2483.50	44.548	32.54	54	9.452	AVERAGE	Pass

Test Plots


GFSK LOW CHANNEL, PEAK

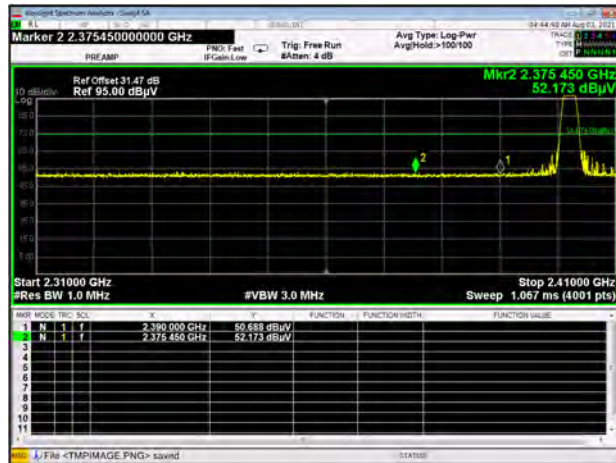

GFSK HIGH CHANNEL, PEAK



8-DPSK LOW CHANNEL, PEAK

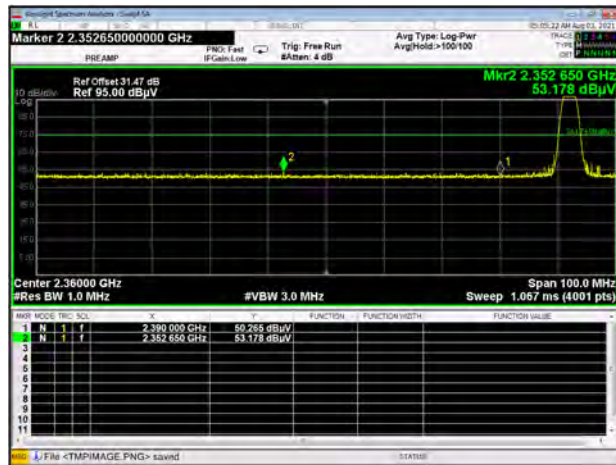


8-DPSK HIGH CHANNEL, PEAK




Hopping Mode:

GFSK LOW FREQUENCY BAND, PEAK

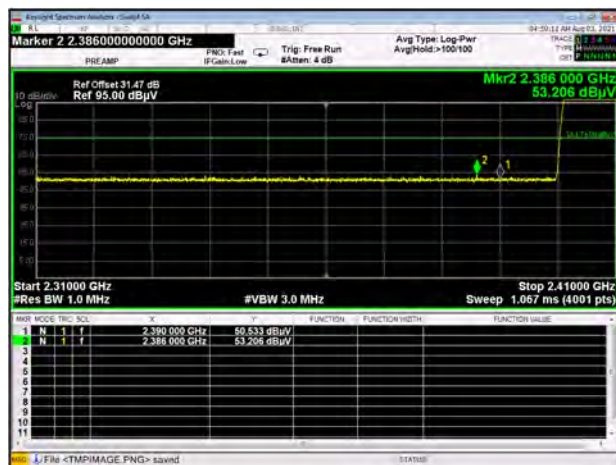

GFSK HIGH FREQUENCY BAND, PEAK

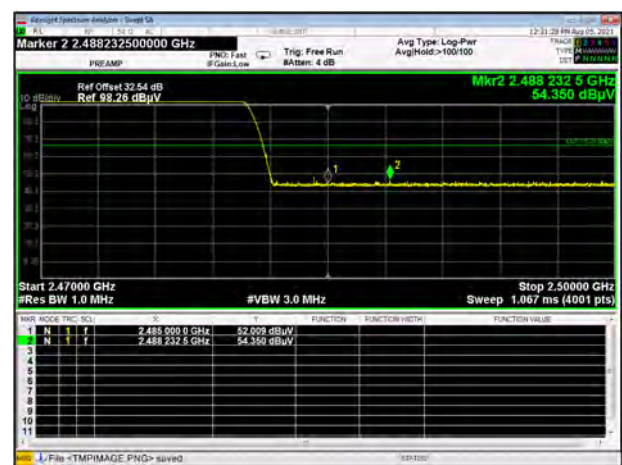

GFSK HIGH FREQUENCY BAND, AV



8-DPSK LOW FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



8-DPSK HIGH FREQUENCY BAND, PEAK



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ2170683-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ2170683-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ2170683-AI.PDF".

--END OF REPORT--