



2.27. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	RBW (MHz)	PAR (dB)	Upper Limit (dB)	Verdict
1770	0.1	20	6.42	13	Pass

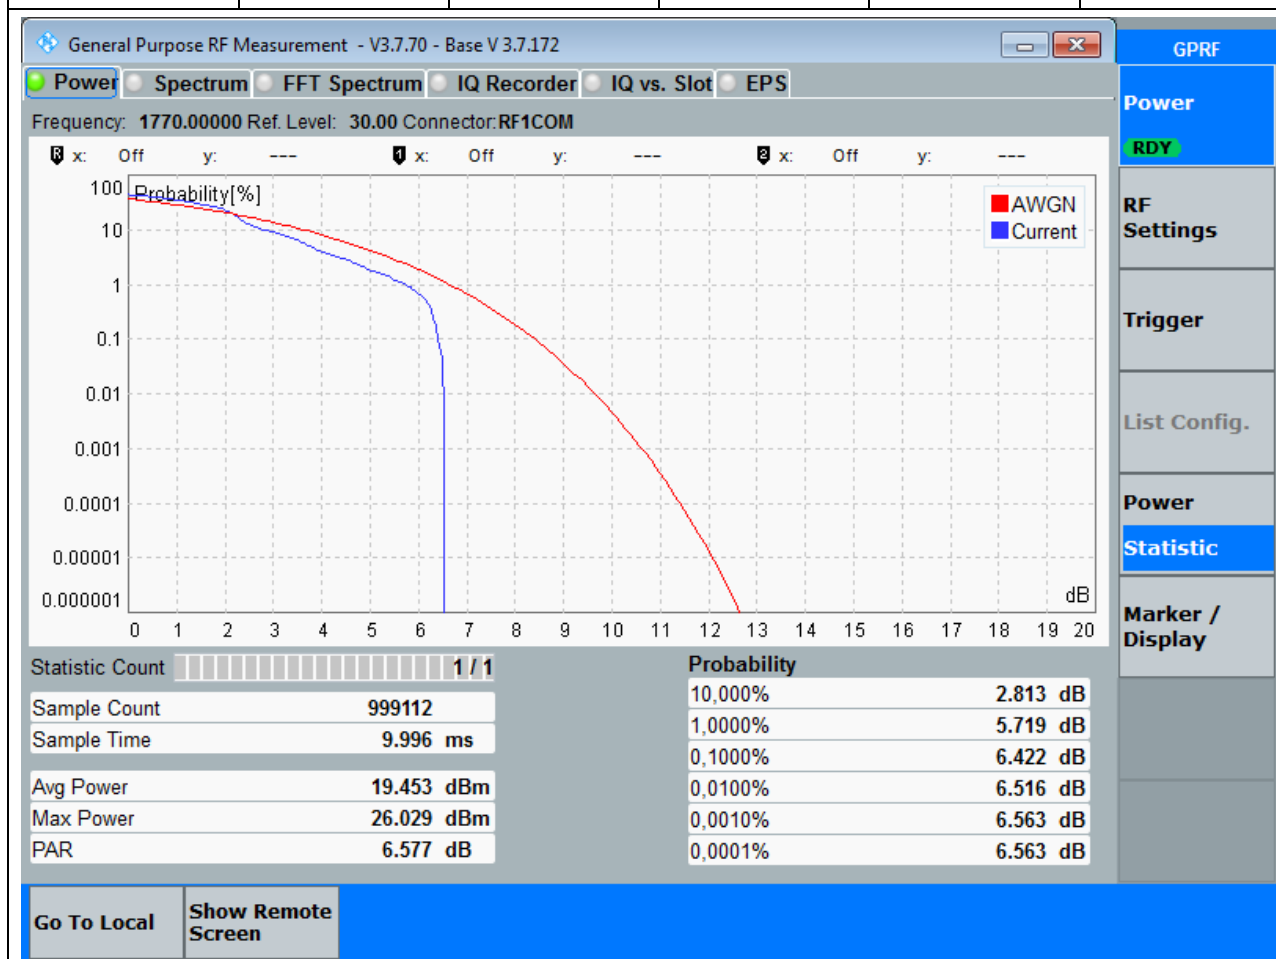


2.28. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:64QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	RBW (MHz)	PAR (dB)	Upper Limit (dB)	Verdict
1770	0.1	20	6.42	13	Pass

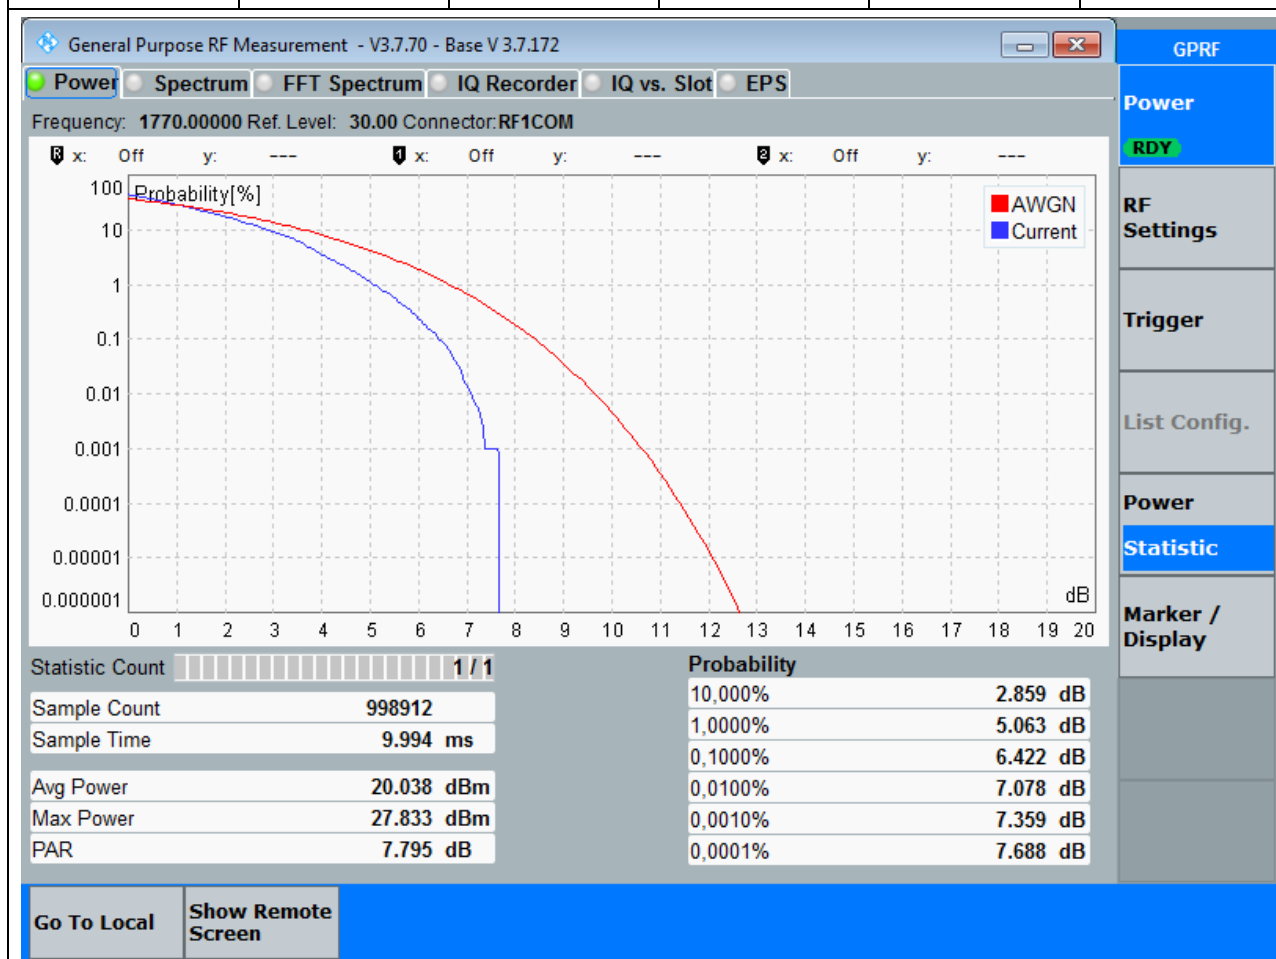


2.29. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	RBW (MHz)	PAR (dB)	Upper Limit (dB)	Verdict
1770	0.1	20	6	13	Pass

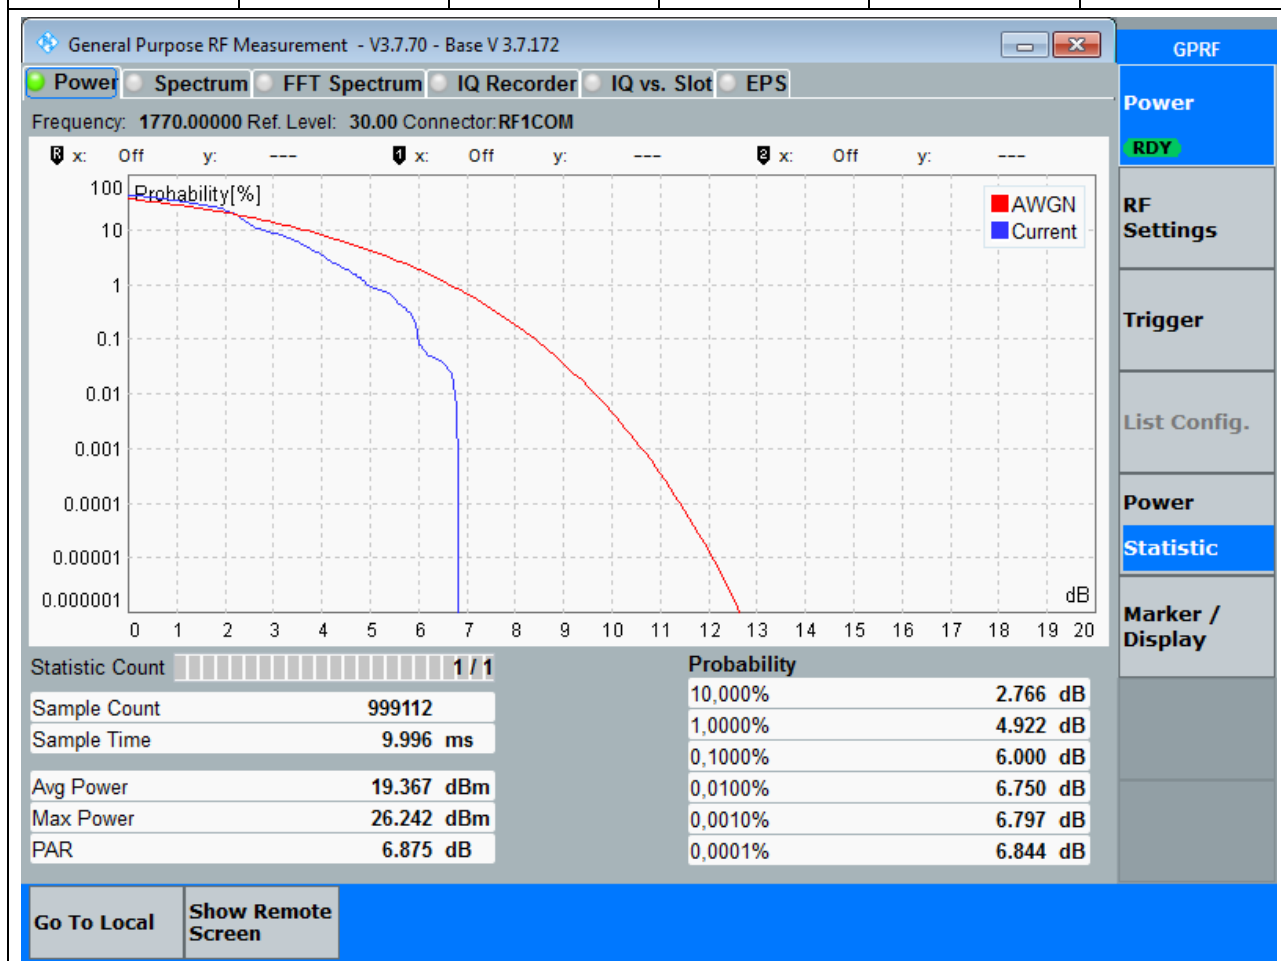

2.30. Peak to Average Ratio for SA_Part22-24-27(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:256QAM, RB Number:100, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	RBW (MHz)	PAR (dB)	Upper Limit (dB)	Verdict
1770	0.1	20	6.42	13	Pass

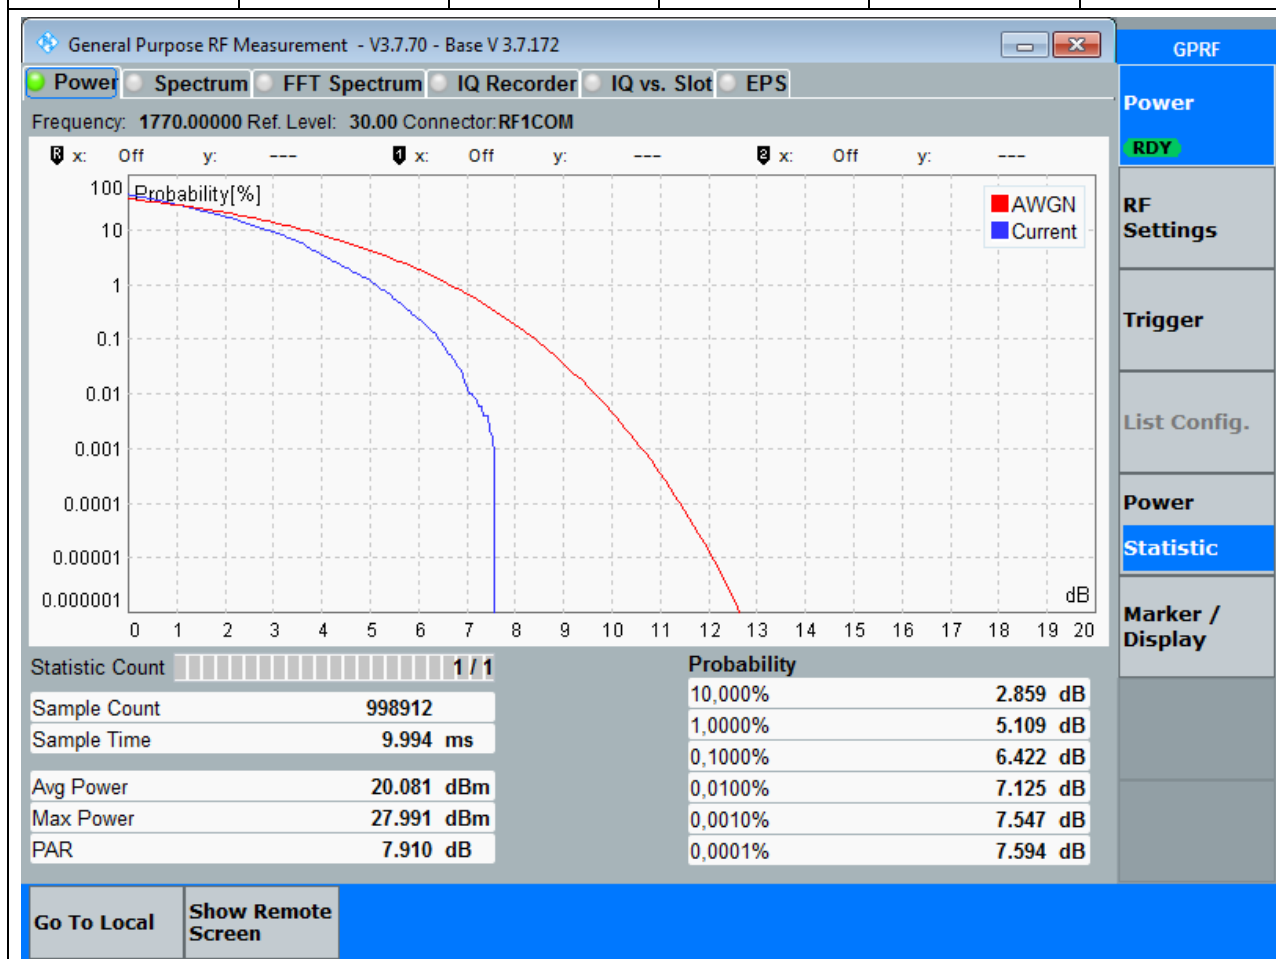

--BLANK BELOW--