

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/2/15

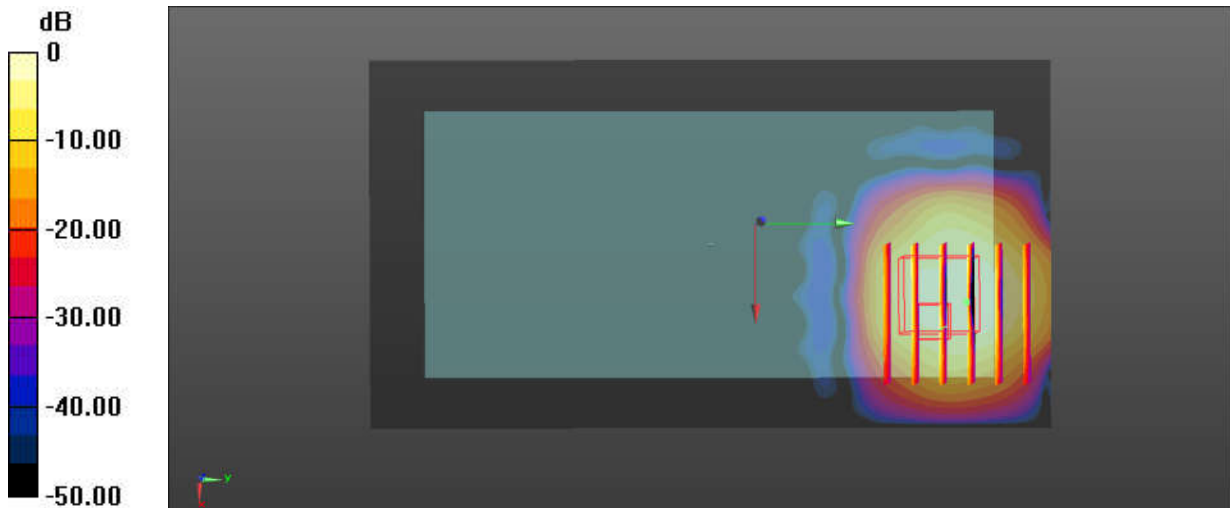
01_NFC_ASK_Back_0mm

Communication System: UID 0, NRF (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13 Medium parameters used: $f = 14 \text{ MHz}$; $\sigma = 0.749 \text{ S/m}$; $\epsilon_r = 56.099$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(16.39, 13.97, 15.19); Calibrated: 2024/8/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2024/8/30
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 0.282 W/kg **Zoom Scan (6x6x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0 V/m ; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.494 W/kg **SAR(1 g) = 0.093 W/kg ; SAR(10 g) = 0.036 W/kg** Smallest distance from peaks to all points 3 dB below = 8.5 mm Ratio of SAR at M2 to SAR at M1 = 46.2% Maximum value of SAR (measured) = 0.260 W/kg  $0 \text{ dB} = 0.260 \text{ W/kg} = -5.85 \text{ dBW/kg}$