

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-254-RWD-016

Reception No. : 2403001087

Applicant : Charmcare Co.,Ltd.

Address : (Gasan-dong, Woolim Lions2-cha), 714, 2, Gasandigital1-ro, Guemcheon-gu, Seoul,
South Korea

Manufacturer : Charmcare Co.,Ltd.

Address : (Gasan-dong, Woolim Lions2-cha), 714, 2, Gasandigital1-ro, Guemcheon-gu, Seoul,
South Korea

Type of Equipment : Automated electronic sphygmomanometer

FCC ID. : 2AUYU-4A02

Model Name : H2-BP

Multiple Model Name : H2-BPL, H2-BPS

Serial number : N/A

Total page of Report : 25 pages (including this page)

Date of Incoming : August 20, 2024

Date of issue : April 15, 2025

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.



Tested by
Yun-Bok, Wi / Project Engineer
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Chief Engineer
ONETECH Corp.

Approved by
Jae-Ho, Lee / Director
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 MEASUREMENT UNCERTAINTY	11
7.4 TEST DATE	11
7.5 TEST DATA FOR 1 MBPS	11
8. MAXIMUM PEAK OUTPUT POWER.....	12
8.1 OPERATING ENVIRONMENT	12
8.2 TEST SET-UP	12
8.3 MEASUREMENT UNCERTAINTY	12
8.4 TEST DATE	12

8.5 TEST DATA FOR 1 MBPS	12
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	13
9.1 OPERATING ENVIRONMENT	13
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	13
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	13
9.4 MEASUREMENT UNCERTAINTY	13
9.5 TEST DATE	13
9.6 TEST DATA FOR CONDUCTED EMISSION	13
9.7 TEST DATA FOR RADIATED EMISSION.....	14
<i>9.7.1 Radiated Emission which fall in the Restricted Band.....</i>	<i>14</i>
<i>9.7.2 Spurious & Harmonic Radiated Emission.....</i>	<i>15</i>
10. PEAK POWER SPECTRAL DENSITY	17
10.1 OPERATING ENVIRONMENT	17
10.2 TEST SET-UP	17
10.3 MEASUREMENT UNCERTAINTY	17
10.4 TEST DATE	17
10.5 TEST DATA FOR 1 MBPS	17
11. RADIATED EMISSION TEST	18
11.1 OPERATING ENVIRONMENT	18
11.2 TEST SET-UP	18
11.3 MEASUREMENT UNCERTAINTY	19
11.4 TEST DATE	19
11.5 TEST DATA FOR 30 MHz ~ 1 GHz.....	20
<i>11.5.1 Test data for Transmitting Mode.....</i>	<i>20</i>
11.6 TEST DATA FOR BELOW 30 MHz	21
11.7 TEST DATA FOR ABOVE 1 GHz	21
12. CONDUCTED EMISSION TEST.....	22
12.1 OPERATING ENVIRONMENT	22
12.2 TEST SET-UP	22
12.3 TEST DATE	22
12.4 TEST DATA.....	23
13. LIST OF TEST EQUIPMENT	25

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-254-RWD-016	April 15, 2025	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Charmcare Co.,Ltd.

Address : (Gasam-dong, Woolim Lions2-cha), 714, 2, Gasandigital1-ro, Guemcheon-gu, Seoul, South Korea

Contact Person : DongHwa, Lee / CEO

Telephone No. : +82-70-4742-7878

FCC ID : 2AUUYU-4A02

Model Name : H2-BP

Brand Name : -

Serial Number : N/A

Date : April 15, 2025

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Automated electronic sphygmomanometer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Charmcare Co.,Ltd., Model H2-BP (referred to as the EUT in this report) is a Automated electronic sphygmomanometer. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Automated electronic sphygmomanometer
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	-3.09 dBm
NUMBER OF CHANNEL	40 Channel
ANTENNA TYPE	PCB Antenna
ANTENNA GAIN	-2.87 dBi
Electrical Rating	DC 3.7 V
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. The following lists consist of the added model and their differences.

Model Name	Differences	Tested
H2-BP	Basic Model	☒
H2-BPL, H2-BPS	This model is identical to the basic model except for the difference of the length of the wrist strap.	☐

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacture is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Charmcare Co.,Ltd.	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
H2-BP	Charmcare Co.,Ltd.	Automated electronic sphygmomanometer (EUT)	-
ProBook 450 G7	HP	NoteBook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		

-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE_1 Mbps	2.106	0.118	94.70	0.24

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

5.4 Configuration of Test System

Line Conducted Test: As the EUT is operated by DC battery, this test item is not requirement to be performed.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Antenna on the main Board in the EUT, so that it cannot be replaced by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
As the EUT is operated by DC battery, this test item is not requirement to be performed.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 54 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

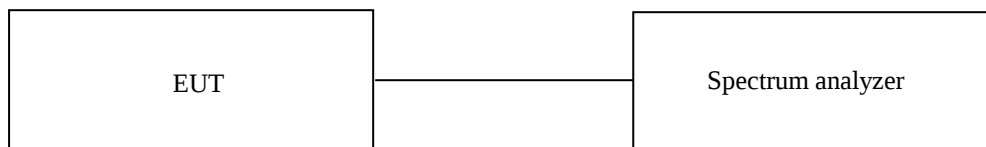

7.3 Measurement uncertainty

The uncertainty for Minimum 6 dB bandwidth is $\pm 5\,555.70\text{ Hz}$

7.4 Test Date

August 20, 2024 ~ August 22, 2024

7.5 Test data for 1 Mbps

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	509.50	500.00	9.50
Middle	2 440.00	504.50	500.00	4.50
High	2 480.00	504.50	500.00	4.50

Remark. Margin = Measured Value - Limit

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment


Temperature : 24 °C

Relative humidity : 54 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

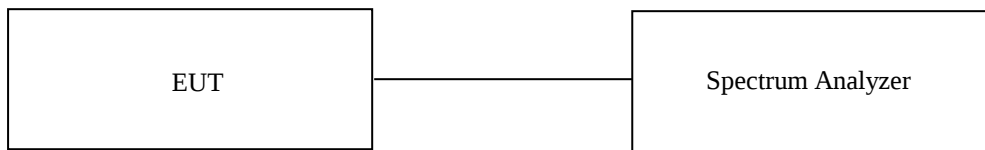

8.3 Measurement uncertainty

The uncertainty for Maximum peak output power is ± 1.20 dB.

8.4 Test Date

August 20, 2024 ~ August 22, 2024

8.5 Test data for 1 Mbps

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-3.13	30.00	33.13
MIDDLE	2 440.00	-3.11	30.00	33.11
HIGH	2 480.00	-3.09	30.00	33.09

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 54 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

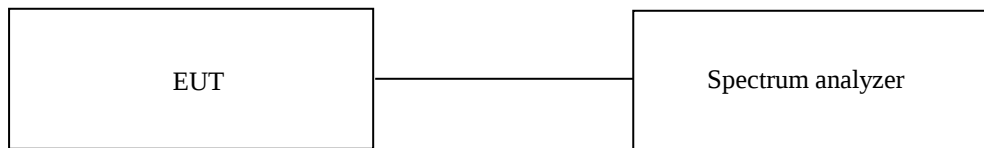

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Measurement uncertainty

Radiated emission electric field intensity, 9 kHz ~ 30 MHz : ± 3.30 dB
Radiated emission electric field intensity, 30 MHz ~ 1 000 MHz : ± 4.42 dB
Radiated emission electric field intensity, 1 GHz ~ 26.5 GHz : ± 5.10 dB

9.5 Test Date

August 20, 2024 ~ August 22, 2024

9.6 Test data for conducted emission

Please refer to the Annex

9.7 Test data for radiated emission

9.7.1 Radiated Emission which fall in the Restricted Band

9.7.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 94.70 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 338.17	57.34	Peak	H	27.75	4.63	41.74	-	-	47.98	74.00	26.02
2 338.08	47.93	Average	H	27.75	4.63	41.74	-	0.24	38.81	54.00	15.19
2 341.11	57.30	Peak	V	27.74	4.63	41.74	-	-	47.93	74.00	26.07
2 338.17	47.39	Average	V	27.75	4.63	41.74	-	0.24	38.27	54.00	15.73
Test Data for High Channel											
2 483.67	69.00	Peak	H	27.40	4.83	41.73	-	-	59.50	74.00	14.50
2 484.65	48.05	Average	H	27.40	4.83	41.73	-	0.24	38.79	54.00	15.21
2 483.93	63.58	Peak	V	27.40	4.83	41.73	-	-	54.08	74.00	19.92
2 483.69	46.06	Average	V	27.40	4.83	41.73	-	0.24	36.80	54.00	17.20

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + ATT + Duty Factor – AMP Gain

9.7.2 Spurious & Harmonic Radiated Emission

9.7.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 94.70 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
4 804.00	50.29	Peak	H	31.20	6.50	41.29	-	46.70	74.00	27.30
4 804.00	38.91	Average	H	31.20	6.50	41.29	0.24	35.56	54.00	18.44
4 804.00	52.89	Peak	V	31.20	6.50	41.29	-	49.30	74.00	24.70
4 804.00	45.53	Average	V	31.20	6.50	41.29	0.24	42.18	54.00	11.82
4 880.00	49.88	Peak	H	31.26	6.60	41.27	-	46.47	74.00	27.53
4 880.00	39.60	Average	H	31.26	6.63	41.27	0.24	36.46	54.00	17.54
4 880.00	53.53	Peak	V	31.26	6.63	41.27	-	50.15	74.00	23.85
4 880.00	47.84	Average	V	31.26	6.63	41.27	0.24	44.70	54.00	9.30
4 960.00	51.35	Peak	H	31.54	6.64	41.25	-	48.28	74.00	25.72
4 960.00	41.38	Average	H	31.54	6.64	41.25	0.24	38.55	54.00	15.45
4 960.00	55.33	Peak	V	31.54	6.64	41.25	-	52.26	74.00	21.74
4 960.00	50.19	Average	V	31.54	6.64	41.25	0.24	47.36	54.00	6.64

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor – AMP Gain

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
7 206.00	51.29	Peak	H	36.11	8.29	41.38	-	54.31	74.00	19.69
7 206.00	38.99	Average	H	36.11	8.29	41.38	0.24	42.25	54.00	11.75
7 206.00	54.20	Peak	V	36.11	8.29	41.38	-	57.22	74.00	16.78
7 206.00	45.64	Average	V	36.11	8.29	41.38	0.24	48.90	54.00	5.10
7 320.00	51.11	Peak	H	36.30	9.18	41.37	-	55.22	74.00	18.78
7 320.00	39.24	Average	H	36.30	9.18	41.37	0.24	43.59	54.00	10.41
7 320.00	53.26	Peak	V	36.30	9.18	41.37	-	57.37	74.00	16.63
7 320.00	45.08	Average	V	36.30	9.18	41.37	0.24	49.43	54.00	4.57
7 440.00	51.53	Peak	H	36.40	8.48	41.35	-	55.06	74.00	18.94
7 440.00	39.56	Average	H	36.40	8.48	41.35	0.24	43.33	54.00	10.67
7 440.00	53.63	Peak	V	36.40	8.48	41.35	-	57.16	74.00	16.84
7 440.00	45.54	Average	V	36.40	8.48	41.35	0.24	49.31	54.00	4.69

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor – AMP Gain

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 24 °C

Relative humidity : 54 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

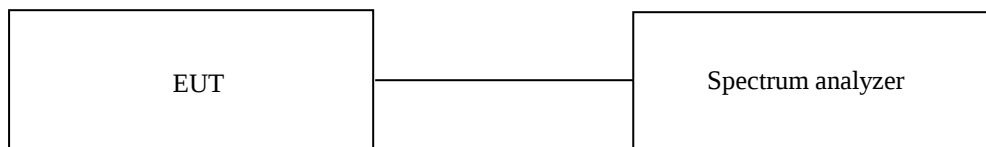

10.3 Measurement uncertainty

The uncertainty for Peak power spectral density is $\pm 1.20 \text{ dB}$.

10.4 Test Date

August 20, 2024 ~ August 22, 2024

10.5 Test data for 1 Mbps

-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-14.20	8.00	22.20
Middle	2 440.00	-15.20	8.00	23.20
High	2 480.00	-14.80	8.00	22.80

Remark. Margin = Limit – Measured value

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24 °C

Relative humidity : 54 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

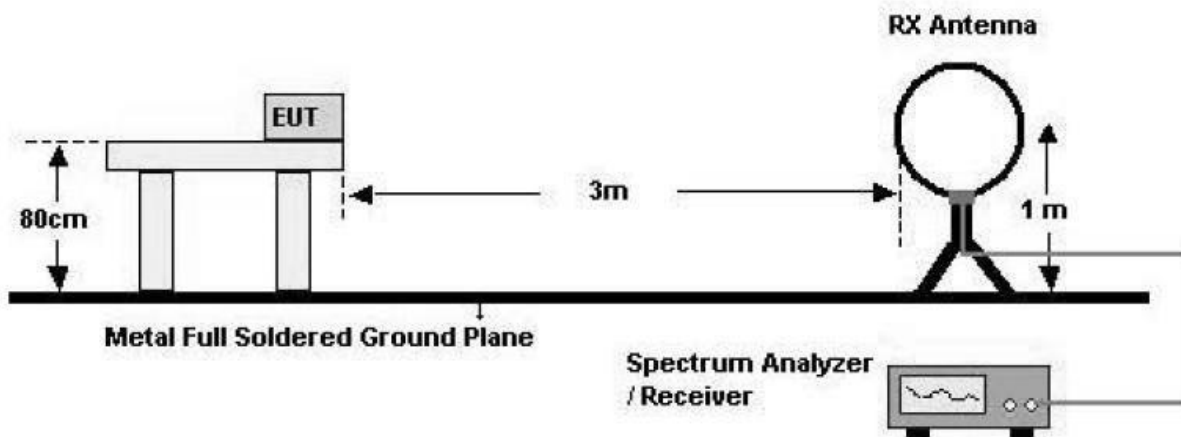

2. 30 MHz - 1 GHz

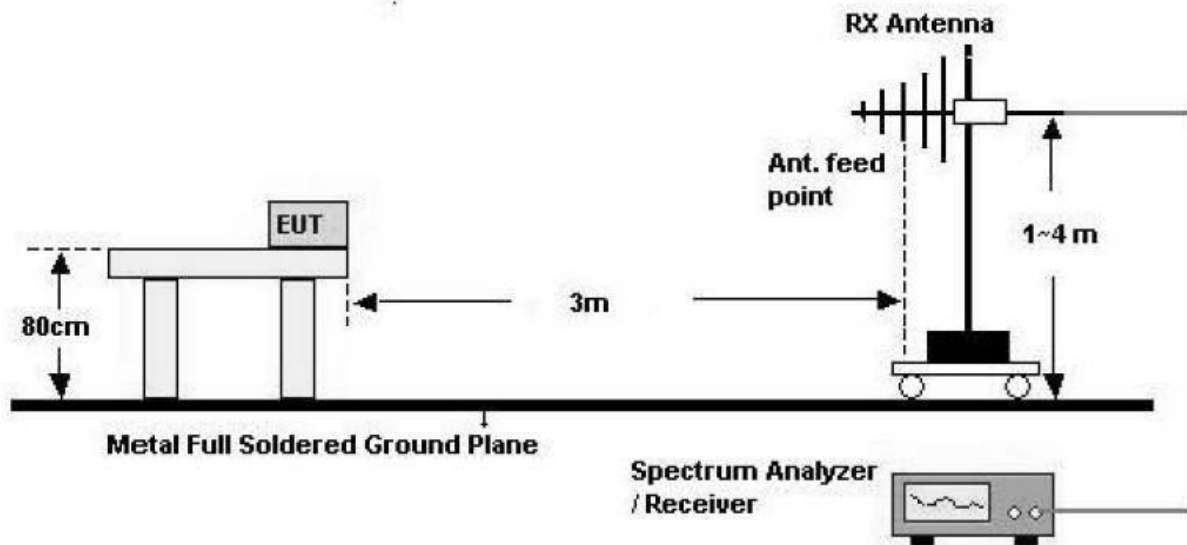

3. Above 1 GHz

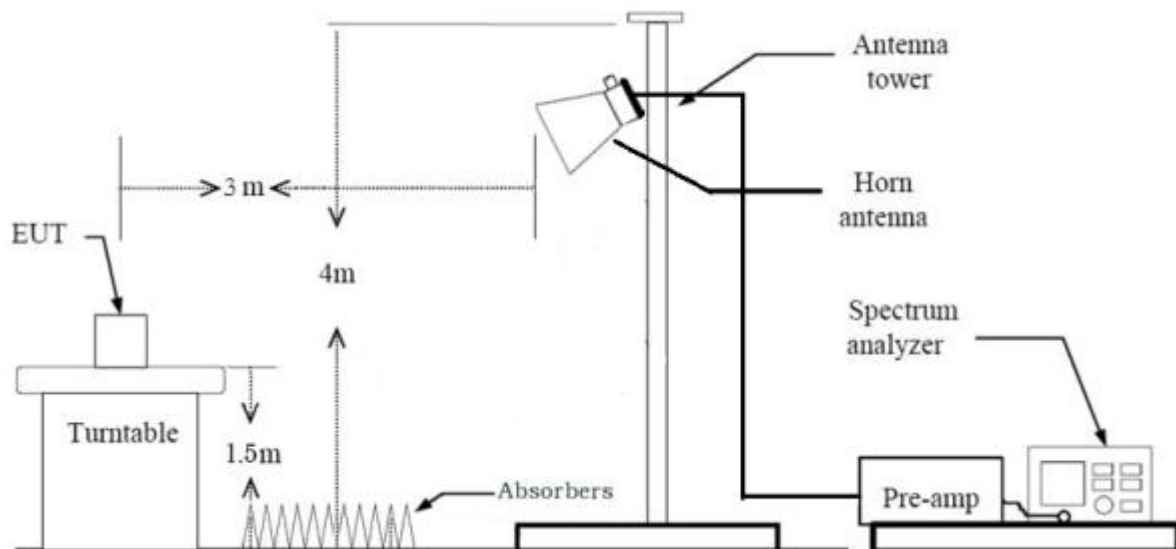

11.3 Measurement uncertainty

Radiated emission electric field intensity, 9 kHz ~ 30 MHz : ± 4.09 dB

Radiated emission electric field intensity, 30 MHz ~ 1 000 MHz : ± 3.98 dB

Radiated emission electric field intensity, 1 GHz ~ 26.5 GHz : ± 5.56 dB

11.4 Test Date

August 20, 2024 ~ August 22, 2024

11.5 Test data for 30 MHz ~ 1 GHz


11.5.1 Test data for Transmitting Mode

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Automated electronic sphygmomanometer

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

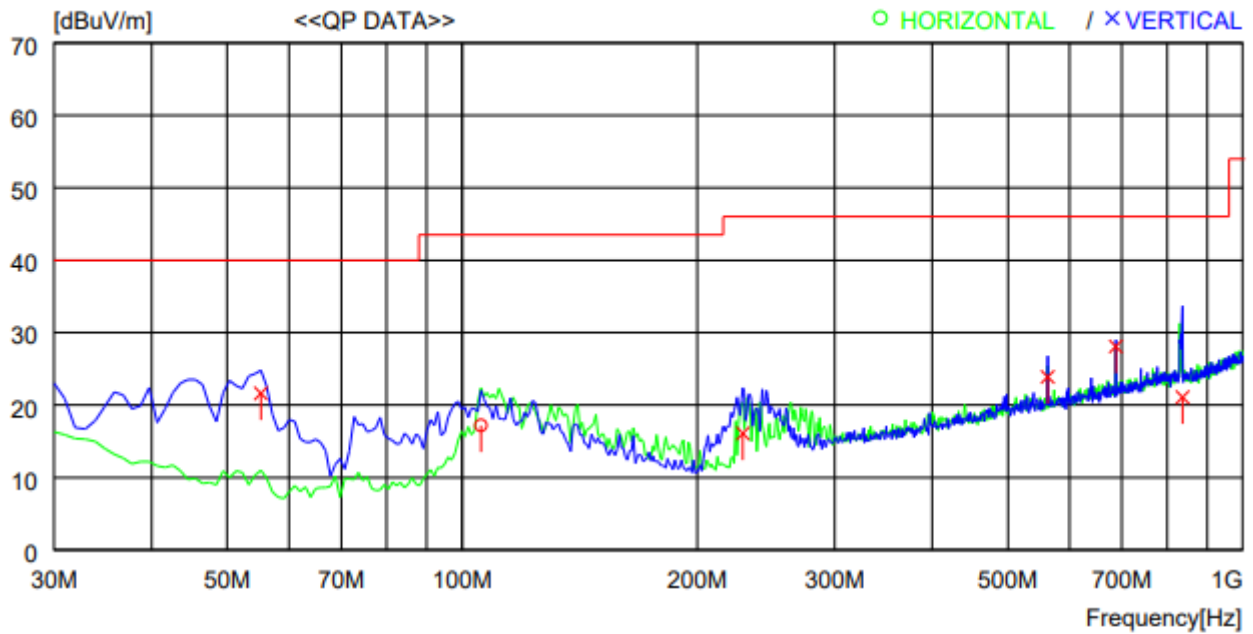

11.6 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.7 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 54 R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test Date

August 20, 2024 ~ August 22, 2024


12.4 Test data

- . Resolution bandwidth : 9 kHz
- . Frequency range : 0.15 MHz ~ 30 MHz
- . Tested Line : HOT LINE

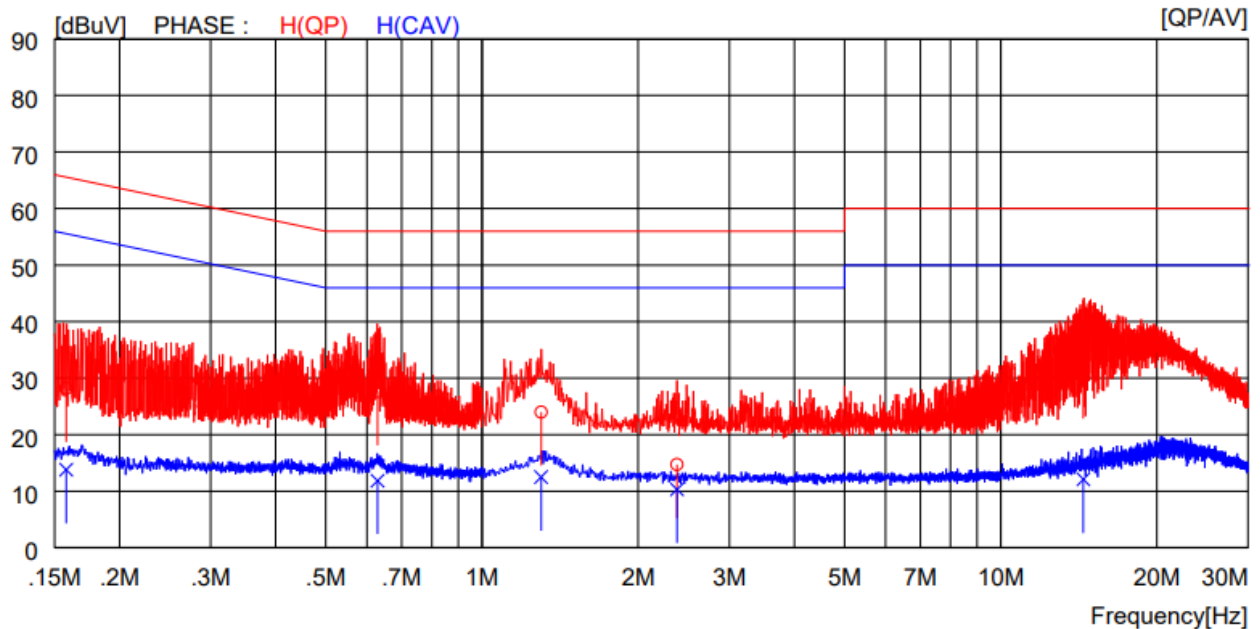

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15800	18.1	----	10.1	28.2	----	65.6	----	37.4	----	H (QP)
2	0.62900	17.5	----	10.1	27.6	----	56.0	----	28.4	----	H (QP)
3	1.30000	13.9	----	10.1	24.0	----	56.0	----	32.0	----	H (QP)
4	2.37600	4.5	----	10.2	14.7	----	56.0	----	41.3	----	H (QP)
5	14.43000	21.7	----	10.6	32.3	----	60.0	----	27.7	----	H (QP)
6	0.15800	----	3.7	10.1	----	13.8	----	55.6	----	41.8	H (CAV)
7	0.62900	----	1.8	10.1	----	11.9	----	46.0	----	34.1	H (CAV)
8	1.30000	----	2.4	10.1	----	12.5	----	46.0	----	33.5	H (CAV)
9	2.37600	----	0.1	10.2	----	10.3	----	46.0	----	35.7	H (CAV)
10	14.43000	----	1.5	10.6	----	12.1	----	50.0	----	37.9	H (CAV)

-. Tested Line : NEUTRAL LINE

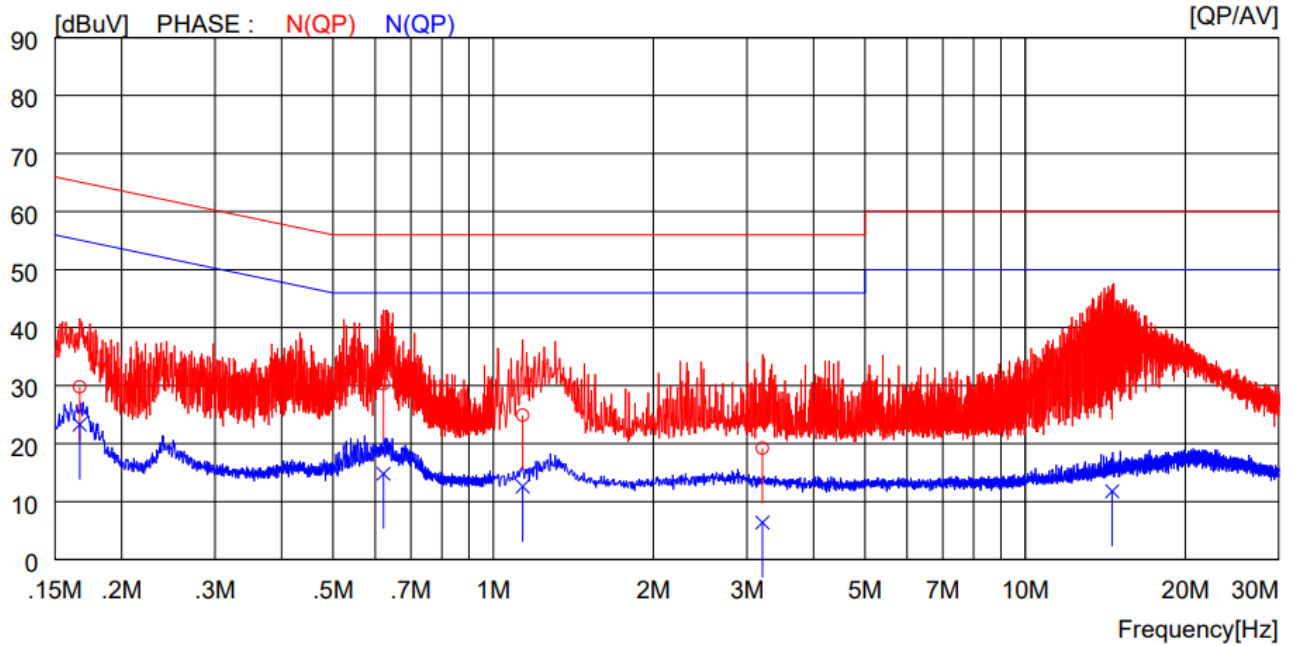

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16700	19.7	----	10.1	29.8	----	65.1	----	35.3	----	N(QP)
2	0.62200	20.2	----	10.1	30.3	----	56.0	----	25.7	----	N(QP)
3	1.13600	14.8	----	10.1	24.9	----	56.0	----	31.1	----	N(QP)
4	3.20800	9.0	----	10.2	19.2	----	56.0	----	36.8	----	N(QP)
5	14.58000	23.0	----	10.6	33.6	----	60.0	----	26.4	----	N(QP)
6	0.16700	----	13.2	10.1	----	23.3	----	55.1	----	31.8	N(CAV)
7	0.62200	----	4.7	10.1	----	14.8	----	46.0	----	31.2	N(CAV)
8	1.13600	----	2.5	10.1	----	12.6	----	46.0	----	33.4	N(CAV)
9	3.20800	----	-3.8	10.2	----	6.4	----	46.0	----	39.6	N(CAV)
10	14.58000	----	1.2	10.6	----	11.8	----	50.0	----	38.2	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102165	Jan. 15, 2024 (1Y)
ESR	Rohde & Schwarz	EMI TEST RECEIVER	101470	Jun. 13, 2024 (1Y)
ESCI	Rohde & Schwarz	Test Receiver	101012	Sep. 26, 2023 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2023 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 04, 2024 (1Y)
SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Jan. 23, 2024 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 15, 2024 (1Y)
WT-A3882-R10	Microwave	Cavity Band Rejection Filter	WT22040502-1	Jan. 16, 2024 (1Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
MA-4640-XPET	Innco System	Antenna Master	MA4640/652/43100318/P	N/A
CO3000	Innco System	Controller	1026/40960617/P	N/A
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 09, 2024 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jul. 02, 2024 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 04, 2024 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 20, 2024 (2Y)
NSLK8128	Schwarzbeck	V - LISN	8128216	Mar. 12, 2024 (1Y)
ESH3-Z2	Rohde & Schwarz	Pulse Limiter	100655	Mar. 12, 2024 (1Y)