

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Zmbizi Z1 4G smartphone

Trademark : Zmbizi

Model Name : Zmbizi Z1

Family Model : N/A

Report No. : STR190924001009E

FCC ID : 2AUYYV-ZMBIZI-Z1

Prepared for

ZMBIZI APP LLC

10000, Suite 503, Los Angeles, California, 90067, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District,

Shenzhen, Guangdong, China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**.....: ZMBIZI APP LLC

Address.....: 10000, Suite 503, Los Angeles, California, 90067, United States

Manufacturer's Name.....: ZMBIZI APP LLC

Address.....: 10000, Suite 503, Los Angeles, California, 90067, United States

Product description

Product name.....: Zmbizi Z1 4G smartphone

Trademark: Zmbizi

Model Name: Zmbizi Z1

Family Model.....: N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards.....: IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: Sep. 28, 2019 ~ Oct. 14, 2019

Date of Issue: Nov. 05, 2019

Test Result: **Pass**Prepared By
(Test Engineer): 

(Cheng Jiawen)

Approved By
(Lab Manager): 

(Sam Chen)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Nov. 05, 2019	Cheng Jiawen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	10
1.5. Ambient Condition.....	10
2. SAR Measurement System	11
2.1. SATIMO SAR Measurement Set-up Diagram	11
2.2. Robot	12
2.3. E-Field Probe.....	13
2.3.1. E-Field Probe Calibration	13
2.4. SAM phantoms	14
2.4.1. Technical Data	15
2.5. Device Holder	16
2.6. Test Equipment List	17
3. SAR Measurement Procedures	19
3.1. Power Reference	19
3.2. Area scan & Zoom scan.....	19
3.3. Description of interpolation/extrapolation scheme	21
3.4. Volumetric Scan	21
3.5. Power Drift	21
4. System Verification Procedure	22
4.1. Tissue Verification	22
4.1.1. Tissue Dielectric Parameter Check Results	23
4.2. System Verification Procedure	24
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	26
5.1. SAR measurement variability.....	26
5.2. SAR measurement uncertainty	26
6. RF Exposure Positions	27
6.1. Ear and handset reference point	27
6.2. Definition of the cheek position	27
6.3. Definition of the tilt position	29
6.4. Body Worn Accessory	29
6.5. Wireless Router Devices	30
7. RF Output Power	31
7.1. GSM Conducted Power	31
7.2. WCDMA Conducted Power	32
7.3. LTE Conducted Power	33

7.4. WLAN & Bluetooth Output Power	48
7.4.1. Output Power Results Of WLAN	48
7.4.2. Output Power Results Of Bluetooth.....	50
8. Antenna Location.....	51
9. Stand-alone SAR test exclusion.....	52
10. SAR Results	53
10.1. SAR measurement results	53
10.1.1. SAR measurement Result of GSM850.....	53
10.1.2. SAR measurement Result of GSM1900.....	53
10.1.3. SAR measurement Result of WCDMA Band 2.....	54
10.1.4. SAR measurement Result of WCDMA Band 5.....	55
10.1.5. SAR measurement Result of LTE Band 2	56
10.1.6. SAR measurement Result of LTE Band 4	57
10.1.7. SAR measurement Result of LTE Band 5	59
10.1.8. SAR measurement Result of LTE Band 7	61
10.1.9. SAR measurement Result of LTE Band 12	62
10.1.10. SAR measurement Result of LTE Band 13	64
10.1.11. SAR measurement Result of LTE Band 17	66
10.1.12. SAR measurement Result of LTE Band 66	67
10.1.13. SAR measurement Result of WLAN 2.4G	69
10.1.14. SAR measurement Result of WLAN 5.2G	70
10.1.15. SAR measurement Result of WLAN 5.8G	71
10.2. SAR Summation Scenario.....	72
11. Appendix A. Photo documentation	92
12. Appendix B. System Check Plots.....	93
13. Appendix C. Plots of High SAR Measurement.....	124
14. Appendix D. Calibration Certificate	185

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
 HEAD AND TRUNK LIMIT
 1.6 W/kg
 APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Zmbizi Z1 are as follows.

Band	Max Reported SAR Value(W/kg)			
	1-g Head	1-g Body-Worn (Separation distance of 10mm)	1-g Hotspot (Separation distance of 10mm)	Max Simultaneous Tx
GSM 850	0.275	0.664	0.664	1.237
GSM 1900	0.144	0.123	0.123	
WCDMA Band 2	0.146	0.248	0.248	
WCDMA Band 5	0.163	0.385	0.385	
LTE Band 2	0.140	0.173	0.173	
LTE Band 4	0.124	0.154	0.154	
LTE Band 5	0.141	0.335	0.335	
LTE Band 7	0.153	0.192	0.192	
LTE Band 12	0.121	0.264	0.264	
LTE Band 13	0.081	0.367	0.367	
LTE Band 17	0.117	0.255	0.255	
LTE Band 66	0.126	0.153	0.153	
WLAN 2.4G	0.491	0.211	0.211	
WLAN 5.2G	0.332	0.573	0.573	
WLAN 5.8G	0.061	0.307	0.307	

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Zmbizi Z1 4G smartphone
Trade Name	Zmbizi
Model Name	Zmbizi Z1
Family Model	N/A
FCC ID	2AUYYV-ZMBIZI-Z1
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	PIFA Antenna

Battery Information	DC 3.85V, 3300mAh		
Device Operating Configurations			
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/5, LTE Band 2/4/5/7/12/13/17/66, WLAN 2.4G/5.2G/5.8G, Bluetooth, NFC		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK), NFC(ASK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 13	777-787	746-756
	LTE Band 17	704-716	734-746
	LTE Band 66	1710-1780	2110-2200
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control “all 1”(WCDMA Band 2)		
	3, tested with power control “all 1”(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		

Test Channels (low-mid-high)	3, tested with power control all Max.(LTE Band 12)
	3, tested with power control all Max.(LTE Band 13)
	3, tested with power control all Max.(LTE Band 17)
	3, tested with power control all Max.(LTE Band 66)
	128-189-251(GSM 850)
	512-661-810(GSM 1900)
	9262-9400-9538(WCDMA Band 2)
	4132-4182-4233(WCDMA Band 5)
	18607-18900-19193(LTE Band 2 BW=1.4MHz)
	18615-18900-19185(LTE Band 2 BW=3MHz)
	18625-18900-19175(LTE Band 2 BW=5MHz)
	18650-18900-19150(LTE Band 2 BW=10MHz)
	18675-18900-19125(LTE Band 2 BW=15MHz)
	18700-18900-19100(LTE Band 2 BW=20MHz)
	19957-20175-20393(LTE Band 4 BW=1.4MHz)
	19965-20175-20385(LTE Band 4 BW=3MHz)
	19975-20175-20375(LTE Band 4 BW=5MHz)
	20000-20175-20350(LTE Band 4 BW=10MHz)
	20025-20175-20325(LTE Band 4 BW=15MHz)
	20050-20175-20300(LTE Band 4 BW=20MHz)
	20407-20525-20643(LTE Band 5 BW=1.4MHz)
	20415-20525-20635(LTE Band 5 BW=3MHz)
	20425-20525-20625(LTE Band 5 BW=5MHz)
	20450-20525-20600(LTE Band 5 BW=10MHz)
	20775-21100-21425(LTE Band 7 BW=5MHz)
	20800-21100-21400(LTE Band 7 BW=10MHz)
	20825-21100-21375(LTE Band 7 BW=15MHz)
	20850-21100-21350(LTE Band 7 BW=20MHz)
	23017-23095-23173 (LTE Band 12 BW=1.4MHz)
	23025-23095-23165 (LTE Band 12 BW=3MHz)
	23035-23095-23155 (LTE Band 12 BW=5MHz)
	23060-23095-23130 (LTE Band 12 BW=10MHz)
	23205-23230-23255(LTE Band 13 BW=5MHz)
	23230(LTE Band 13 BW=10MHz)
	23755-23790-23825(LTE Band 17 BW=5MHz)
	23780-23790-23800(LTE Band 17 BW=10MHz)
	131979-132322-132665 (LTE Band 66 BW=1.4MHz)
	131987-132322-132657 (LTE Band 66 BW=3MHz)
	131997-132322-132647 (LTE Band 66 BW=5MHz)
	132022-132322-132622 (LTE Band 66 BW=10MHz)

	132047-132322-132597 (LTE Band 66 BW=15MHz)
	132072-132322-132572 (LTE Band 66 BW=20MHz)
	1-3-6-9-11(WLAN 2.4G)
	36-38-40-42-46-48(WLAN 5.2G)
	149-151-155-157-159-165(WLAN 5.8G)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

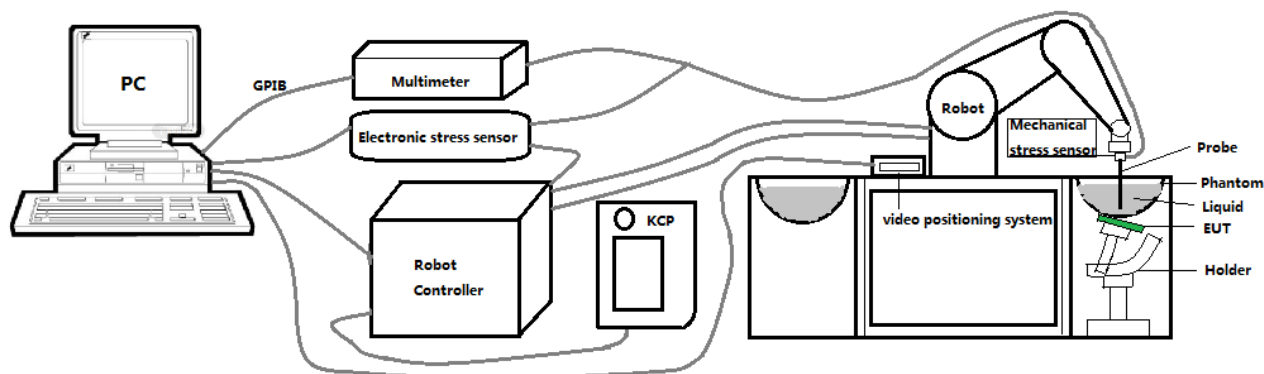

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 41/18 EPGO330 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.10 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.09 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 9mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

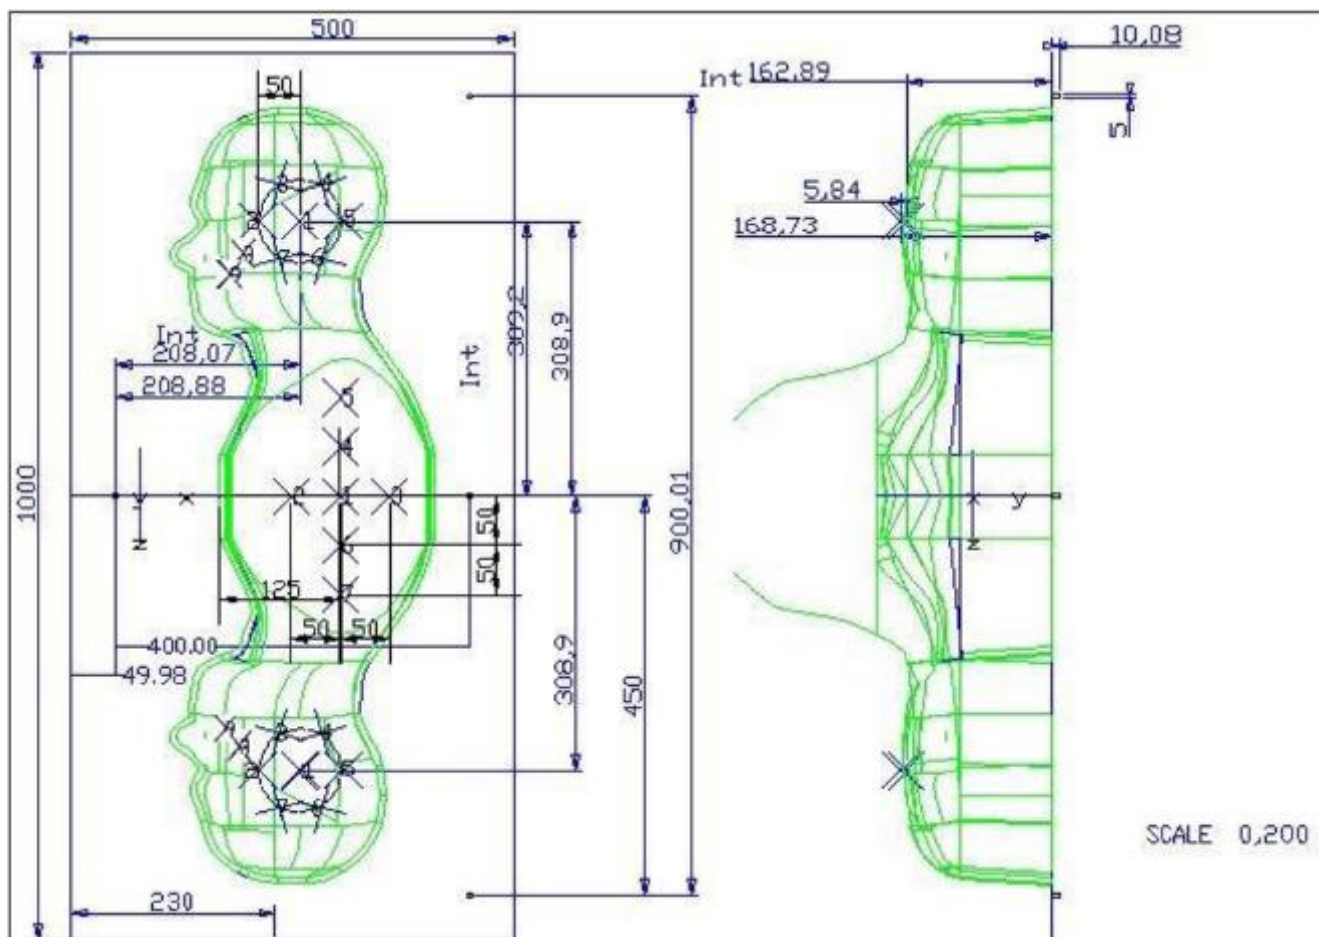


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

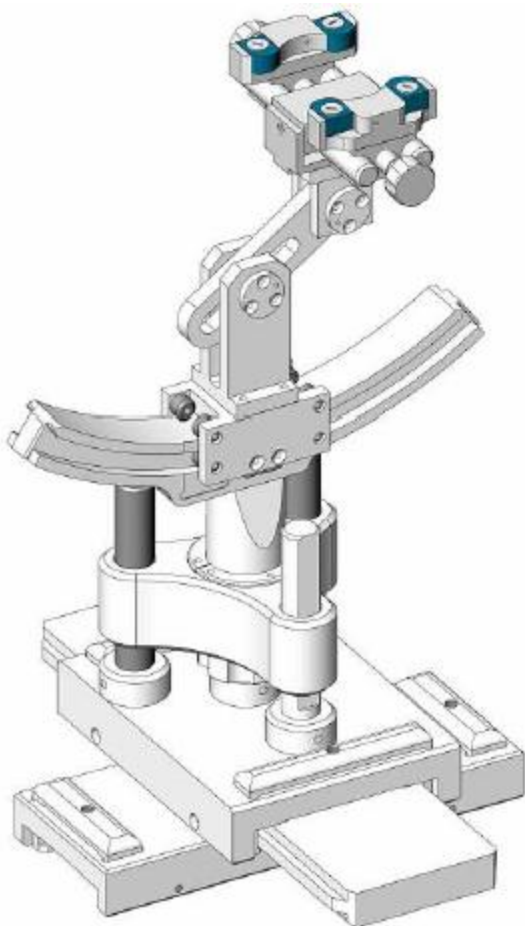

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 41/18 EPG0330	May 21, 2019	May 20, 2020
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Aug. 06, 2019	Aug. 05, 2020
☒	R&S	Wideband radio communication tester	CMW500	103917	Aug. 28, 2019	Aug. 27, 2020
☒	HP	Network Analyzer	8753D	3410J01136	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Aug. 06, 2019	Aug. 05, 2020

☒	Agilent	Power meter	E4419B	MY45102538	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	Power sensor	E9301A	MY41495644	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	Power sensor	E9301A	US39212148	Aug. 06, 2019	Aug. 05, 2020
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Aug. 06, 2019	Aug. 05, 2020

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter is within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.17	0.92	21.5 °C	Oct. 13, 2019
Body 750	750	55.55 (52.77~58.33)	0.96 (0.91~1.01)	55.31	0.97	21.5 °C	Oct. 14, 2019
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.36	0.93	21.5 °C	Sep. 28, 2019
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.36	1.01	21.5 °C	Sep. 28, 2019
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.47	1.41	21.7 °C	Sep. 29, 2019
Body 1800	1800	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.15	1.57	21.5 °C	Sep. 29, 2019
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.89	1.46	21.5 °C	Sep. 30, 2019
Body 1900	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.48	1.58	21.5 °C	Sep. 30, 2019
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.94	1.79	21.5 °C	Sep. 30, 2019
Body 2450	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	52.18	2.03	21.3 °C	Oct. 10, 2019
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.38	2.03	21.4 °C	Oct. 13, 2019
Body 2600	2600	52.51 (49.88~55.14)	2.16 (2.05~2.27)	52.59	2.22	21.2 °C	Oct. 13, 2019
Head 5200	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	35.66	4.67	21.5 °C	Oct. 10, 2019
Body 5200	5200	49.00 (46.55~51.45)	5.30 (5.04~5.57)	49.51	5.33	21.5 °C	Oct. 10, 2019
Head 5800	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.59	5.23	21.9 °C	Oct. 11, 2019
Body 5800	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	48.20	6.11	21.2 °C	Oct. 11, 2019

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

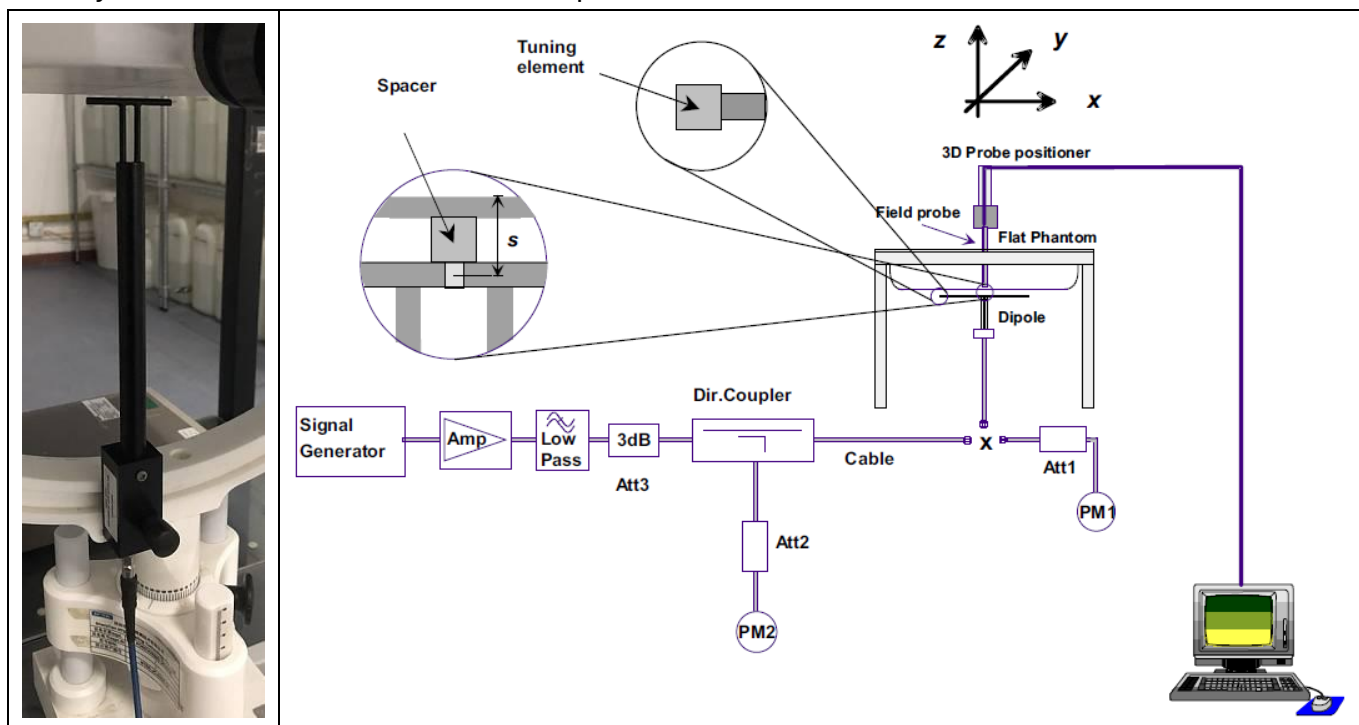

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) (±10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz Head	8.56 (7.70~9.42)	5.55 (5.00~6.11)	8.51	5.49	21.5 °C	Oct. 13, 2019
750MHz Body	8.85 (7.97~9.74)	5.91 (5.32~6.50)	8.81	5.88	21.5 °C	Oct. 14, 2019
835MHz Head	9.55 (8.60~10.51)	6.10 (5.49~6.71)	9.53	6.07	21.5 °C	Sep. 28, 2019
835MHz Body	9.83 (8.85~10.81)	6.45 (5.81~7.10)	9.82	6.41	21.5 °C	Sep. 28, 2019
1800MHz Head	38.11 (34.30~41.92)	20.05 (18.05~22.06)	38.09	20.01	21.7 °C	Sep. 29, 2019
1800MHz Body	38.13 (34.32~41.94)	20.65 (18.59~22.72)	38.06	20.59	21.5 °C	Sep. 29, 2019
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	38.86	20.04	21.5 °C	Sep. 30, 2019
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	38.99	20.52	21.5 °C	Sep. 30, 2019
2450MHz Head	53.76 (48.38~59.14)	24.12 (21.71~26.53)	53.74	23.98	21.5 °C	Sep. 30, 2019
2450MHz Body	52.90 (47.61~58.19)	24.09 (21.68~26.50)	52.78	24.05	21.3 °C	Oct. 10, 2019
2600MHz Head	55.60 (50.04~61.16)	24.60 (22.14~27.06)	55.66	24.69	21.4 °C	Oct. 13, 2019
2600MHz Body	52.49 (47.24~57.74)	23.74 (21.37~26.11)	52.40	23.76	21.2 °C	Oct. 13, 2019
5200MHz Head	160.94 (144.85~177.03)	55.97 (50.37~61.57)	149.99	55.87	21.5 °C	Oct. 10, 2019
5200MHz Body	156.85 (141.17~172.54)	55.20 (49.68~60.72)	156.74	55.10	21.5 °C	Oct. 10, 2019
5800MHz Head	184.13 (165.72~202.54)	62.74 (56.47~69.01)	184.00	62.58	21.9 °C	Oct. 11, 2019
5800MHz Body	169.30 (152.37~186.23)	58.49 (52.64~64.34)	169.14	58.45	21.2 °C	Oct. 11, 2019

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

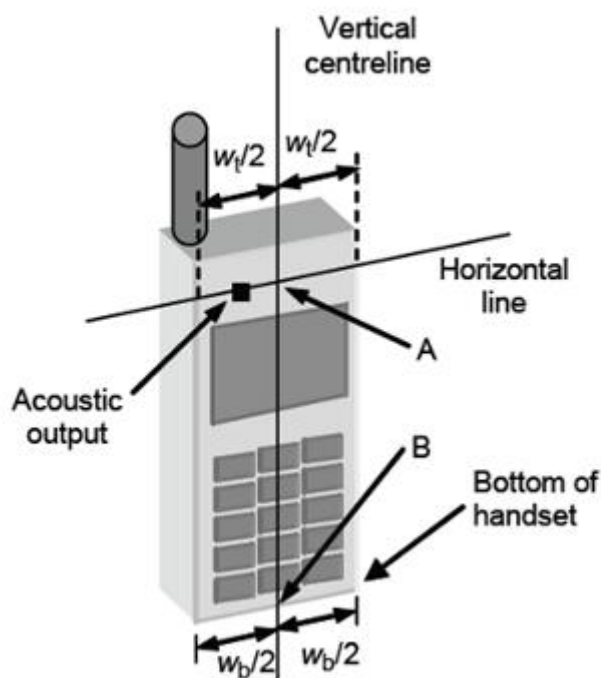


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

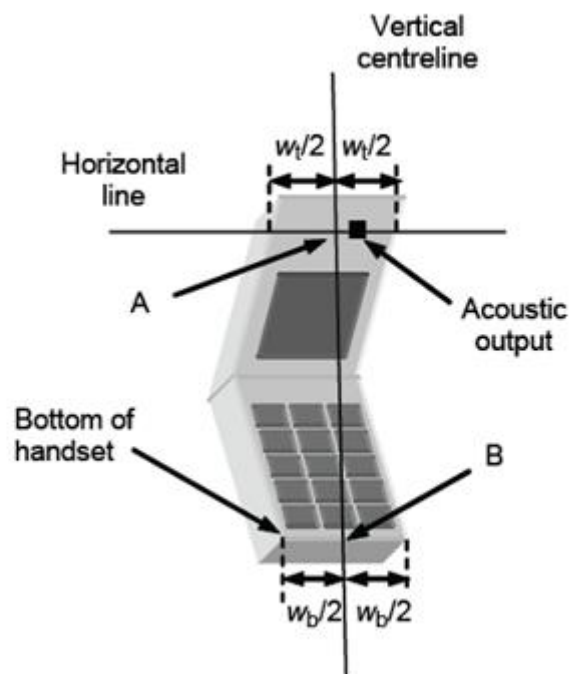


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

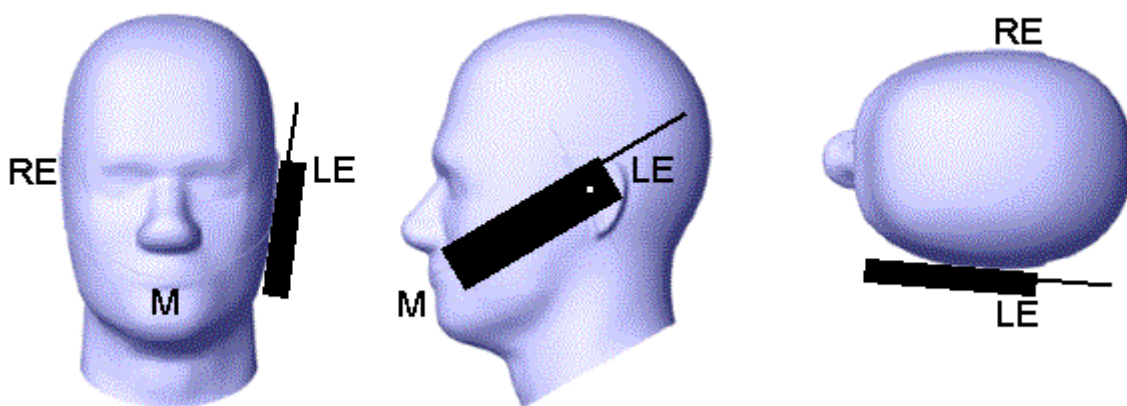


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

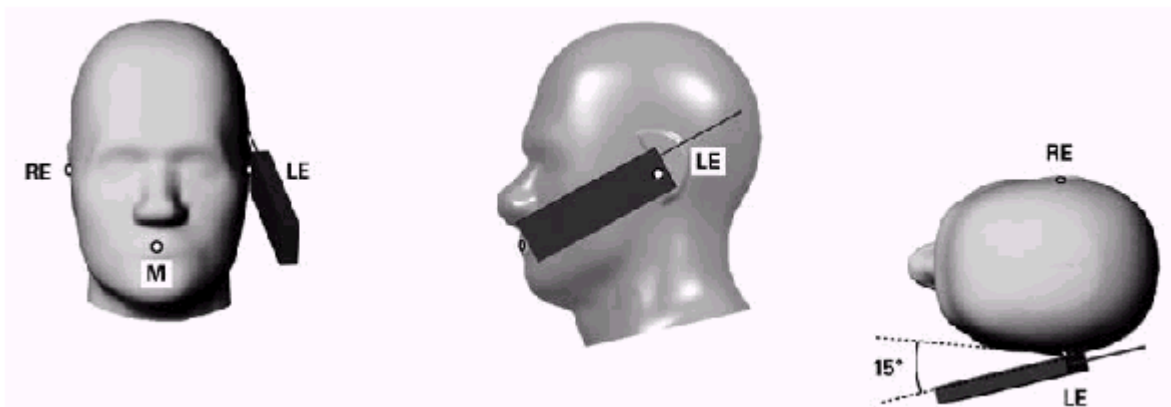


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

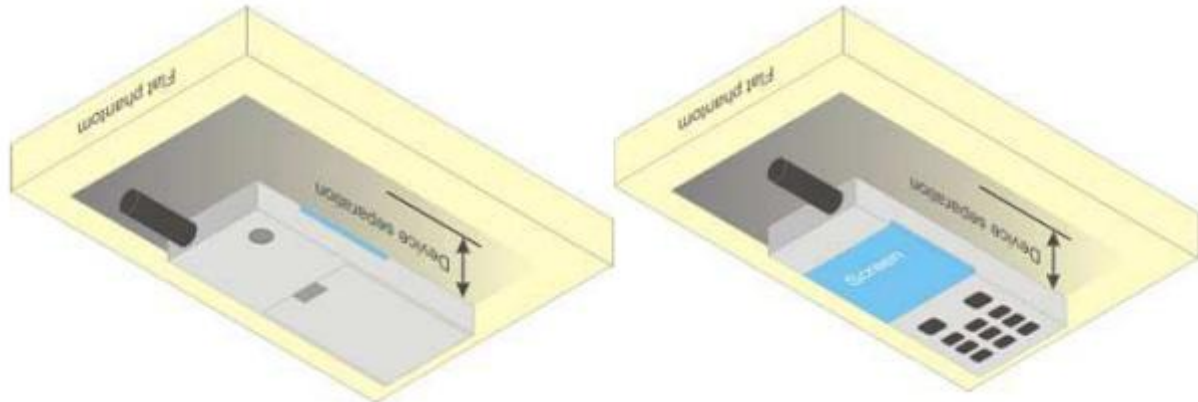


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	34.00	33.37	33.75	33.29	24.97	24.34	24.72	24.26
GPRS(GMSK, 1 TS)	34.00	33.15	33.51	33.07	24.97	24.12	24.48	24.04
GPRS(GMSK, 2 TS)	33.00	32.32	32.67	32.22	26.98	26.30	26.65	26.20
GPRS(GMSK, 3 TS)	31.00	30.41	30.79	30.34	26.74	26.15	26.53	26.08
GPRS(GMSK, 4 TS)	30.00	29.30	29.67	29.22	26.99	26.29	26.66	26.21
EDGE(8PSK, 1 TS)	28.00	27.02	26.88	27.67	18.97	17.99	17.85	18.64
EDGE(8PSK, 2 TS)	27.00	26.13	26.47	26.73	20.98	20.11	20.45	20.71
EDGE(8PSK, 3 TS)	25.00	24.28	24.14	24.38	20.74	20.02	19.88	20.12
EDGE(8PSK, 4 TS)	24.00	22.95	22.86	23.12	20.99	19.94	19.85	20.11
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	32.00	31.33	31.16	30.79	22.97	22.30	22.13	21.76
GPRS(GMSK, 1 TS)	32.00	31.15	30.97	30.61	22.97	22.12	21.94	21.58
GPRS(GMSK, 2 TS)	31.00	30.18	30.00	29.63	24.98	24.16	23.98	23.61
GPRS(GMSK, 3 TS)	29.00	28.07	27.88	27.53	24.74	23.81	23.62	23.27
GPRS(GMSK, 4 TS)	27.00	27.00	26.88	26.52	23.99	23.99	23.87	23.51
EDGE(8PSK, 1 TS)	26.00	25.72	25.97	26.00	16.97	16.69	16.94	16.97
EDGE(8PSK, 2 TS)	25.00	24.82	24.78	24.38	18.98	18.80	18.76	18.36
EDGE(8PSK, 3 TS)	23.00	22.54	22.19	22.18	18.74	18.28	17.93	17.92
EDGE(8PSK, 4 TS)	22.00	21.10	20.85	20.79	18.99	18.09	17.84	17.78

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	24.00	23.86	23.85	24.00
HSDPA Subtest-1	24.00	22.92	22.98	23.08
HSDPA Subtest-2	23.00	22.12	22.22	22.44
HSDPA Subtest-3	22.00	21.16	21.52	21.54
HSDPA Subtest-4	22.00	21.61	21.46	21.63
HSUPA Subtest-1	23.00	22.42	22.83	22.86
HSUPA Subtest-2	24.00	22.92	22.89	23.05
HSUPA Subtest-3	22.00	21.51	21.49	21.49
HSUPA Subtest-4	24.00	22.96	22.97	23.10
HSUPA Subtest-5	23.00	22.35	22.26	22.21
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	24.00	23.99	24.00	23.94
HSDPA Subtest-1	24.00	23.05	23.10	23.09
HSDPA Subtest-2	23.00	22.42	22.61	22.35
HSDPA Subtest-3	22.00	21.47	21.64	21.40
HSDPA Subtest-4	22.00	21.70	21.65	21.55
HSUPA Subtest-1	23.00	22.50	22.96	22.94
HSUPA Subtest-2	24.00	22.88	22.97	23.09
HSUPA Subtest-3	22.00	21.84	22.00	21.69
HSUPA Subtest-4	24.00	23.05	23.13	23.12
HSUPA Subtest-5	23.00	22.36	22.00	22.32

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	21.00	20.30	20.30	20.43
			1	2	21.00	20.41	20.45	20.62
			1	5	21.00	20.31	20.22	20.48
			3	0	21.00	20.37	20.41	20.52
			3	1	21.00	20.39	20.42	20.57
			3	2	21.00	20.39	20.45	20.48
			6	0	20.00	19.29	19.34	19.48
		16QAM	1	0	20.00	19.45	19.55	19.46
			1	2	20.00	19.65	19.69	19.53
			1	5	20.00	19.53	19.53	19.38
			3	0	20.00	19.57	19.64	19.71
			3	1	20.00	19.55	19.64	19.72
			3	2	20.00	19.56	19.69	19.76
			6	0	19.00	18.54	18.54	18.67
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	21.00	20.40	20.38	20.48
			1	7	21.00	20.59	20.65	20.82
			1	14	21.00	20.30	20.42	20.56
			8	0	20.00	19.32	19.38	19.51
			8	4	20.00	19.41	19.40	19.54
			8	7	20.00	19.35	19.37	19.52
			15	0	20.00	19.36	19.40	19.50
		16QAM	1	0	21.00	19.81	19.65	19.54
			1	7	21.00	20.21	19.86	19.85
			1	14	21.00	19.80	19.60	19.46
			8	0	19.00	18.39	18.39	18.52
			8	4	19.00	18.42	18.44	18.55
			8	7	19.00	18.41	18.39	18.51
			15	0	19.00	18.42	18.34	18.58
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	21.00	20.25	20.35	20.43
			1	12	21.00	20.71	20.71	20.91
			1	24	21.00	20.21	20.32	20.42
			12	0	20.00	19.35	19.34	19.53
			12	6	20.00	19.43	19.49	19.63
			12	11	20.00	19.40	19.49	19.57
			25	0	20.00	19.38	19.42	19.58
		16QAM	1	0	21.00	19.89	19.74	19.81
			1	12	21.00	20.31	20.13	20.20
			1	24	21.00	19.84	19.70	19.85
			12	0	19.00	18.34	18.33	18.59
			12	6	19.00	18.44	18.43	18.65
			12	11	19.00	18.44	18.35	18.58
			25	0	19.00	18.42	18.47	18.57
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	21.00	20.35	20.33	20.49
			1	24	21.00	20.47	20.53	20.67
			1	49	21.00	20.31	20.35	20.55
			25	0	20.00	19.31	19.45	19.64
			25	12	20.00	19.40	19.40	19.56
			25	24	20.00	19.45	19.51	19.67
			50	0	20.00	19.37	19.45	19.64
		16QAM	1	0	20.00	19.82	19.60	19.43
			1	24	20.00	19.95	19.75	19.61
			1	49	20.00	19.76	19.60	19.51
			25	0	19.00	18.37	18.46	18.69
			25	12	19.00	18.40	18.48	18.54
			25	24	19.00	18.48	18.53	18.64
			50	0	19.00	18.46	18.53	18.68
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band	15MHz	QPSK	1	0	21.00	20.30	20.24	20.51
			1	37	21.00	20.62	20.60	20.73

2			1	74	21.00	20.21	20.27	20.50
			36	0	20.00	19.40	19.45	19.68
			36	18	20.00	19.43	19.47	19.59
			36	37	20.00	19.38	19.41	19.56
			75	0	20.00	19.38	19.46	19.58
		16QAM	1	0	21.00	19.56	19.49	19.85
			1	37	21.00	19.92	19.84	20.25
			1	74	21.00	19.46	19.48	19.91
			36	0	19.00	18.44	18.38	18.67
			36	18	19.00	18.50	18.39	18.58
			36	37	19.00	18.46	18.43	18.63
			75	0	19.00	18.36	18.52	18.59
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	21.00	20.27	20.33	20.33
			1	49	21.00	20.45	20.55	20.61
			1	99	21.00	20.19	20.24	20.37
			50	0	20.00	19.25	19.38	19.56
			50	24	20.00	19.35	19.45	19.57
			50	49	20.00	19.32	19.42	19.45
			100	0	20.00	19.26	19.35	19.61
		16QAM	1	0	20.00	19.64	19.66	19.64
			1	49	20.00	19.86	19.88	19.91
			1	99	20.00	19.56	19.62	19.67
			50	0	19.00	18.33	18.36	18.62
			50	24	19.00	18.43	18.46	18.63
			50	49	19.00	18.38	18.42	18.51
			100	0	19.00	18.31	18.46	18.58

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	24.00	23.21	23.35	23.34
			1	2	24.00	23.35	23.44	23.46
			1	5	24.00	23.21	23.33	23.34
			3	0	24.00	23.25	23.35	23.41
			3	1	24.00	23.25	23.37	23.44

			3	2	24.00	23.25	23.37	23.43
			6	0	23.00	22.33	22.38	22.42
		16QAM	1	0	23.00	22.13	22.49	22.54
			1	2	23.00	22.29	22.63	22.68
			1	5	23.00	22.12	22.48	22.55
			3	0	23.00	22.39	22.55	22.61
			3	1	23.00	22.41	22.58	22.63
			3	2	23.00	22.45	22.53	22.63
			6	0	22.00	21.44	21.54	21.56
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	24.00	23.23	23.30	23.38
			1	7	24.00	23.37	23.59	23.54
			1	14	24.00	23.22	23.31	23.42
			8	0	23.00	22.30	22.42	22.44
			8	4	23.00	22.28	22.41	22.47
			8	7	23.00	22.31	22.40	22.45
			15	0	23.00	22.25	22.36	22.40
		16QAM	1	0	23.00	22.67	22.61	22.34
			1	7	23.00	22.87	22.87	22.52
			1	14	23.00	22.69	22.53	22.27
			8	0	22.00	21.29	21.40	21.39
			8	4	22.00	21.31	21.41	21.43
			8	7	22.00	21.28	21.39	21.44
			15	0	22.00	21.29	21.34	21.44
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	24.00	23.12	23.20	23.31
			1	12	24.00	23.54	23.74	23.73
			1	24	24.00	23.18	23.22	23.30
			12	0	23.00	22.28	22.42	22.44
			12	6	23.00	22.30	22.44	22.48
			12	11	23.00	22.36	22.40	22.42
			25	0	23.00	22.28	22.40	22.44
		16QAM	1	0	24.00	22.45	22.61	22.87
			1	12	24.00	22.91	23.07	23.21

			1	24	24.00	22.49	22.64	22.80
			12	0	22.00	21.18	21.39	21.41
			12	6	22.00	21.26	21.46	21.44
			12	11	22.00	21.26	21.44	21.40
			25	0	22.00	21.29	21.35	21.41
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	24.00	23.20	23.27	23.32
			1	24	24.00	23.35	23.44	23.45
			1	49	24.00	23.26	23.32	23.34
			25	0	23.00	22.24	22.37	22.51
			25	12	23.00	22.26	22.39	22.44
			25	24	23.00	22.33	22.44	22.45
			50	0	23.00	22.34	22.43	22.48
		16QAM	1	0	23.00	22.11	22.71	22.61
			1	24	23.00	22.20	22.84	22.72
			1	49	23.00	22.15	22.79	22.55
			25	0	22.00	21.24	21.40	21.47
			25	12	22.00	21.32	21.42	21.44
			25	24	22.00	21.32	21.45	21.45
			50	0	22.00	21.25	21.44	21.47
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	24.00	23.08	23.19	23.33
			1	37	24.00	23.47	23.43	23.66
			1	74	24.00	23.16	23.23	23.26
			36	0	23.00	22.34	22.41	22.47
			36	18	23.00	22.37	22.45	22.53
			36	37	23.00	22.37	22.46	22.48
			75	0	23.00	22.38	22.46	22.49
		16QAM	1	0	24.00	22.37	22.42	22.74
			1	37	24.00	22.65	22.65	23.08
			1	74	24.00	22.40	22.42	22.66
			36	0	22.00	21.32	21.35	21.50
			36	18	22.00	21.36	21.36	21.52
			36	37	22.00	21.35	21.37	21.47

			75	0	22.00	21.31	21.46	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	24.00	23.13	23.14	23.22
			1	49	24.00	23.39	23.44	23.54
			1	99	24.00	23.20	23.26	23.24
			50	0	23.00	22.24	22.40	22.40
			50	24	23.00	22.35	22.40	22.47
			50	49	23.00	22.30	22.40	22.44
			100	0	23.00	22.29	22.39	22.45
		16QAM	1	0	23.00	22.45	22.44	22.58
			1	49	23.00	22.71	22.71	22.84
			1	99	23.00	22.56	22.60	22.56
			50	0	22.00	21.30	21.36	21.45
			50	24	22.00	21.37	21.36	21.53
			50	49	22.00	21.34	21.38	21.47
			100	0	22.00	21.28	21.43	21.47

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.00	22.96	23.10	23.02
			1	2	24.00	23.10	23.19	23.21
			1	5	24.00	22.96	23.09	22.99
			3	0	24.00	23.10	23.19	23.10
			3	1	24.00	23.10	23.15	23.15
			3	2	24.00	23.08	23.14	23.11
			6	0	23.00	21.98	22.07	22.03
		16QAM	1	0	23.00	22.21	22.01	22.17
			1	2	23.00	22.32	22.11	22.30
			1	5	23.00	22.20	21.98	22.14
			3	0	23.00	22.32	22.30	22.27
			3	1	23.00	22.32	22.34	22.30
			3	2	23.00	22.36	22.36	22.25
			6	0	22.00	21.22	21.32	21.26
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	24.00	23.05	23.13	23.01
			1	7	24.00	23.35	23.42	23.49
			1	14	24.00	23.05	23.07	23.01
			8	0	23.00	22.00	22.07	22.04
			8	4	23.00	22.05	22.07	22.06
			8	7	23.00	22.02	22.13	22.02
			15	0	23.00	22.03	22.07	22.05
		16QAM	1	0	23.00	22.00	22.60	22.26
			1	7	23.00	22.27	22.87	22.55
			1	14	23.00	21.95	22.56	22.20
			8	0	22.00	21.04	21.15	21.08
			8	4	22.00	21.04	21.18	21.11
			8	7	22.00	21.05	21.16	21.04
			15	0	22.00	21.12	21.17	21.04
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.00	22.98	23.02	22.96
			1	12	24.00	23.37	23.46	23.41
			1	24	24.00	23.03	23.02	22.91
			12	0	23.00	21.97	22.13	22.08
			12	6	23.00	22.08	22.19	22.12
			12	11	23.00	22.03	22.10	22.05
			25	0	23.00	22.04	22.13	22.12
		16QAM	1	0	23.00	22.57	22.41	22.38
			1	12	23.00	22.93	22.76	22.71
			1	24	23.00	22.57	22.44	22.29
			12	0	22.00	21.02	21.12	21.13
			12	6	22.00	21.12	21.15	21.13
			12	11	22.00	21.05	21.08	21.15
			25	0	22.00	21.01	21.23	21.08
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band	10MHz	QPSK	1	0	24.00	23.04	23.11	23.06
			1	24	24.00	23.20	23.22	23.18

5			1	49	24.00	23.06	23.14	23.02
			25	0	23.00	22.02	22.23	22.18
			25	12	23.00	22.09	22.14	22.18
			25	24	23.00	22.07	22.13	22.14
			50	0	23.00	22.06	22.19	22.19
		16QAM	1	0	23.00	22.22	22.02	22.54
			1	24	23.00	22.42	22.14	22.67
			1	49	23.00	22.28	22.02	22.42
			25	0	22.00	21.06	21.25	21.24
			25	12	22.00	21.14	21.22	21.22
			25	24	22.00	21.10	21.17	21.17
			50	0	22.00	21.13	21.20	21.24

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	22.00	21.31	21.59	21.42
			1	12	22.00	21.68	21.91	21.76
			1	24	22.00	21.36	21.52	21.46
			12	0	21.00	20.41	20.60	20.53
			12	6	21.00	20.49	20.62	20.60
			12	11	21.00	20.46	20.59	20.51
			25	0	21.00	20.42	20.61	20.54
		16QAM	1	0	22.00	20.62	21.08	20.75
			1	12	22.00	21.05	21.26	21.24
			1	24	22.00	20.66	20.93	20.71
			12	0	20.00	19.45	19.66	19.52
			12	6	20.00	19.53	19.69	19.60
			12	11	20.00	19.51	19.60	19.48
			25	0	20.00	19.45	19.60	19.60
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	22.00	21.41	21.69	21.49
			1	24	22.00	21.71	21.78	21.59
			1	49	22.00	21.53	21.57	21.51
			25	0	21.00	20.45	20.72	20.64
			25	12	21.00	20.52	20.68	20.59

			25	24	21.00	20.58	20.66	20.60
			50	0	21.00	20.53	20.67	20.58
		16QAM	1	0	21.00	20.59	20.59	20.86
			1	24	21.00	20.75	20.61	21.00
			1	49	21.00	20.75	20.41	20.91
			25	0	20.00	19.52	19.74	19.69
			25	12	20.00	19.54	19.70	19.68
			25	24	20.00	19.60	19.69	19.65
			50	0	20.00	19.60	19.64	19.63
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	22.00	21.43	21.61	21.37
			1	37	22.00	21.80	21.92	21.71
			1	74	22.00	21.56	21.50	21.35
			36	0	21.00	20.53	20.75	20.53
			36	18	21.00	20.59	20.72	20.60
			36	37	21.00	20.69	20.68	20.41
			75	0	21.00	20.57	20.73	20.53
		16QAM	1	0	22.00	20.83	20.78	20.29
			1	37	22.00	21.20	20.92	20.72
			1	74	22.00	20.96	20.59	20.13
			36	0	20.00	19.55	19.85	19.56
			36	18	20.00	19.59	19.75	19.57
			36	37	20.00	19.62	19.72	19.32
			75	0	20.00	19.61	19.72	19.53
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	22.00	21.34	21.50	21.18
			1	49	22.00	21.65	21.77	21.45
			1	99	22.00	21.57	21.45	21.09
			50	0	21.00	20.44	20.68	20.28
			50	24	21.00	20.56	20.64	20.39
			50	49	21.00	20.59	20.56	20.18
			100	0	21.00	20.53	20.60	20.32
		16QAM	1	0	21.00	20.56	20.78	20.28
			1	49	21.00	20.94	20.85	20.49

			1	99	21.00	20.87	20.34	20.31
			50	0	20.00	19.43	19.72	19.26
			50	24	20.00	19.61	19.72	19.49
			50	49	20.00	19.64	19.60	19.09
			100	0	20.00	19.57	19.66	19.38

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	24.00	23.24	23.23	23.11
			1	2	24.00	23.36	23.36	23.25
			1	5	24.00	23.22	23.25	23.03
			3	0	24.00	23.28	23.28	23.20
			3	1	24.00	23.28	23.32	23.23
			3	2	24.00	23.26	23.30	23.22
			6	0	23.00	22.24	22.19	22.14
		16QAM	1	0	23.00	22.10	22.39	22.30
			1	2	23.00	22.22	22.50	22.48
			1	5	23.00	22.07	22.39	22.31
			3	0	23.00	22.41	22.41	22.40
			3	1	23.00	22.39	22.43	22.44
			3	2	23.00	22.49	22.43	22.40
			6	0	22.00	21.48	21.45	21.37
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	24.00	23.36	23.22	23.25
			1	7	24.00	23.53	23.55	23.54
			1	14	24.00	23.23	23.27	23.26
			8	0	23.00	22.24	22.26	22.25
			8	4	23.00	22.28	22.31	22.23
			8	7	23.00	22.28	22.25	22.18
			15	0	23.00	22.22	22.21	22.16
		16QAM	1	0	24.00	22.73	22.50	22.08
			1	7	24.00	23.08	22.80	22.37
			1	14	24.00	22.67	22.45	22.09
			8	0	22.00	21.38	21.33	21.27
			8	4	22.00	21.38	21.35	21.26

			8	7	22.00	21.39	21.35	21.23
			15	0	22.00	21.34	21.27	21.32
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	24.00	23.18	23.16	23.15
			1	12	24.00	23.55	23.63	23.51
			1	24	24.00	23.20	23.18	23.14
			12	0	23.00	22.26	22.27	22.23
			12	6	23.00	22.31	22.27	22.25
			12	11	23.00	22.27	22.29	22.14
			25	0	23.00	22.27	22.27	22.21
		16QAM	1	0	24.00	22.48	22.75	22.44
			1	12	24.00	22.80	23.10	22.89
			1	24	24.00	22.56	22.71	22.41
			12	0	22.00	21.30	21.37	21.29
			12	6	22.00	21.42	21.40	21.26
			12	11	22.00	21.35	21.30	21.19
			25	0	22.00	21.32	21.32	21.31
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	24.00	23.24	23.22	23.28
			1	24	24.00	23.39	23.37	23.36
			1	49	24.00	23.24	23.23	23.21
			25	0	23.00	22.31	22.29	22.27
			25	12	23.00	22.25	22.30	22.20
			25	24	23.00	22.31	22.26	22.19
			50	0	23.00	22.32	22.31	22.21
		16QAM	1	0	23.00	22.65	22.42	22.12
			1	24	23.00	22.82	22.59	22.22
			1	49	23.00	22.65	22.39	22.06
			25	0	22.00	21.37	21.41	21.37
			25	12	22.00	21.38	21.33	21.25
			25	24	22.00	21.38	21.36	21.24
			50	0	22.00	21.38	21.44	21.29

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23205/779.5	23230/782	23255/784.5
LTE Band 13	5MHz	QPSK	1	0	24.00	23.30	23.34	23.28
			1	12	24.00	23.79	23.68	23.67
			1	24	24.00	23.25	23.19	23.17
			12	0	23.00	22.36	22.35	22.22
			12	6	23.00	22.42	22.42	22.40
			12	11	23.00	22.39	22.46	22.27
			25	0	23.00	22.37	22.43	22.27
		16QAM	1	0	24.00	22.79	22.62	22.60
			1	12	24.00	23.11	22.93	22.81
			1	24	24.00	22.77	22.51	22.51
			12	0	22.00	21.34	21.26	21.22
			12	6	22.00	21.39	21.33	21.34
			12	11	22.00	21.36	21.36	21.26
			25	0	22.00	21.33	21.44	21.20
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23230/782		
LTE Band 13	10MHz	QPSK	1	0	24.00	23.33		
			1	24	24.00	23.44		
			1	49	24.00	23.26		
			25	0	23.00	22.36		
			25	12	23.00	22.37		
			25	24	23.00	22.42		
			50	0	23.00	22.41		
		16QAM	1	0	23.00	22.73		
			1	24	23.00	22.88		
			1	49	23.00	22.62		
			25	0	22.00	21.37		
			25	12	22.00	21.44		
			25	24	22.00	21.45		
			50	0	22.00	21.38		

Band	Band Width	Modulation	RB Configuration	Tune-up	Channel/Frequency(MHz)
------	------------	------------	------------------	---------	------------------------

			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	21.00	20.82	20.78	20.72
			1	12	21.00	20.95	20.83	20.73
			1	24	21.00	20.75	20.69	20.72
			12	0	20.00	19.90	19.79	19.81
			12	6	20.00	19.86	19.86	19.84
			12	11	20.00	19.88	19.78	19.71
			25	0	20.00	19.89	19.80	19.77
		16QAM	1	0	21.00	20.39	20.14	20.10
			1	12	21.00	20.76	20.56	20.46
			1	24	21.00	20.40	20.05	20.09
			12	0	19.00	18.85	18.73	18.85
			12	6	19.00	18.89	18.79	18.89
			12	11	19.00	18.94	18.74	18.72
			25	0	19.00	18.92	18.81	18.76
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	21.00	20.85	20.77	20.86
			1	24	21.00	20.93	20.91	20.92
			1	49	21.00	20.73	20.73	20.87
			25	0	20.00	19.85	19.78	19.82
			25	12	20.00	19.83	19.84	19.82
			25	24	20.00	19.82	19.75	19.70
			50	0	20.00	19.83	19.81	19.77
		16QAM	1	0	21.00	20.27	19.98	19.78
			1	24	21.00	20.37	20.11	19.82
			1	49	21.00	20.22	20.00	19.73
			25	0	19.00	18.94	18.82	18.82
			25	12	19.00	18.88	18.87	18.82
			25	24	19.00	18.89	18.77	18.69
			50	0	19.00	18.89	18.88	18.75

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE	1.4MHz	QPSK	1	0	24.00	23.23	23.40	23.55

Band 66			1	2	24.00	23.42	23.61	23.65
			1	5	24.00	23.25	23.42	23.51
			3	0	24.00	23.35	23.49	23.41
			3	1	24.00	23.37	23.47	23.42
			3	2	24.00	23.38	23.46	23.37
			6	0	23.00	22.37	22.54	22.56
		16QAM	1	0	23.00	22.55	22.40	22.43
			1	2	23.00	22.69	22.50	22.55
			1	5	23.00	22.55	22.38	22.43
			3	0	23.00	22.66	22.67	22.47
			3	1	23.00	22.68	22.65	22.48
			3	2	23.00	22.64	22.68	22.44
			6	0	22.00	21.56	21.72	21.58
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	24.00	23.35	23.46	23.46
			1	7	24.00	23.68	23.78	23.71
			1	14	24.00	23.36	23.46	23.39
			8	0	23.00	22.38	22.54	22.49
			8	4	23.00	22.40	22.52	22.50
			8	7	23.00	22.43	22.49	22.47
			15	0	23.00	22.40	22.49	22.40
		16QAM	1	0	23.00	22.62	22.46	22.68
			1	7	23.00	22.99	22.74	22.96
			1	14	23.00	22.61	22.43	22.69
			8	0	22.00	21.40	21.50	21.44
			8	4	22.00	21.44	21.55	21.48
			8	7	22.00	21.45	21.52	21.39
			15	0	22.00	21.42	21.58	21.38
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
LTE Band 66	5MHz	QPSK	1	0	24.00	23.26	23.33	23.33
			1	12	24.00	23.71	23.73	23.83
			1	24	24.00	23.29	23.33	23.37
			12	0	23.00	22.41	22.50	22.51
			12	6	23.00	22.45	22.57	22.49

			12	11	23.00	22.44	22.50	22.37
			25	0	23.00	22.44	22.54	22.42
		16QAM	1	0	24.00	22.68	22.76	22.76
			1	12	24.00	22.99	23.16	23.03
			1	24	24.00	22.62	22.78	22.70
			12	0	22.00	21.33	21.55	21.44
			12	6	22.00	21.43	21.60	21.44
			12	11	22.00	21.46	21.55	21.32
			25	0	22.00	21.49	21.53	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	24.00	23.32	23.46	23.41
			1	24	24.00	23.42	23.55	23.52
			1	49	24.00	23.38	23.46	23.43
			25	0	23.00	22.36	22.53	22.49
			25	12	23.00	22.37	22.52	22.45
			25	24	23.00	22.50	22.58	22.38
			50	0	23.00	22.42	22.58	22.44
		16QAM	1	0	24.00	22.32	22.91	22.60
			1	24	24.00	22.43	23.03	22.65
			1	49	24.00	22.40	22.95	22.51
			25	0	22.00	21.37	21.59	21.45
			25	12	22.00	21.45	21.56	21.40
			25	24	22.00	21.48	21.59	21.35
			50	0	22.00	21.44	21.57	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
LTE Band 66	15MHz	QPSK	1	0	24.00	23.26	23.33	23.42
			1	37	24.00	23.55	23.70	23.72
			1	74	24.00	23.35	23.38	23.35
			36	0	23.00	22.40	22.57	22.60
			36	18	23.00	22.45	22.58	22.59
			36	37	23.00	22.51	22.59	22.52
			75	0	23.00	22.46	22.58	22.54
		16QAM	1	0	23.00	22.53	22.60	22.84
			1	37	23.00	22.87	22.88	23.00

			1	74	23.00	22.60	22.61	22.60
			36	0	22.00	21.42	21.55	21.56
			36	18	22.00	21.51	21.52	21.53
			36	37	22.00	21.55	21.51	21.44
			75	0	22.00	21.42	21.58	21.50
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	24.00	23.24	23.34	23.41
			1	49	24.00	23.53	23.58	23.57
			1	99	24.00	23.28	23.30	23.34
			50	0	23.00	22.31	22.59	22.50
			50	24	23.00	22.37	22.53	22.48
			50	49	23.00	22.45	22.53	22.31
			100	0	23.00	22.39	22.58	22.38
		16QAM	1	0	23.00	22.58	22.63	22.76
			1	49	23.00	22.83	22.90	22.90
			1	99	23.00	22.66	22.69	22.55
			50	0	22.00	21.30	21.60	21.57
			50	24	22.00	21.44	21.63	21.51
			50	49	22.00	21.43	21.58	21.32
			100	0	22.00	21.44	21.60	21.42

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	11.50	11.20
	6	2437	15.50	15.39
	11	2462	15.50	14.96
802.11g	1	2412	13.50	13.28
	6	2437	13.50	13.11
	11	2462	13.50	12.37
802.11n HT20	1	2412	14.50	13.61
	6	2437	14.50	13.05
	11	2462	14.50	12.67
802.11n HT40	3	2422	13.50	13.09
	6	2437	13.50	12.46

	9	2452	13.50	12.24
--	---	------	-------	-------

NOTE: Power measurement results of WLAN 2.4G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	10.00	9.20
	40	5200	10.00	8.46
	48	5240	10.00	9.02
802.11n HT20	36	5180	10.00	9.24
	40	5200	10.00	8.50
	48	5240	10.00	9.07
802.11n HT40	38	5190	9.00	8.88
	46	5230	9.00	8.65
802.11ac VHT20	36	5180	7.00	6.84
	40	5200	7.00	6.40
	48	5240	7.00	6.84
802.11ac VHT40	38	5190	8.00	6.22
	46	5230	8.00	7.16
802.11ac VHT80	42	5210	10.00	9.74

NOTE: Power measurement results of WLAN 5.2G.

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	11.00	10.60
	157	5785	11.00	9.86
	165	5825	11.00	9.62
802.11n HT20	149	5745	11.00	10.61
	157	5785	11.00	9.92
	165	5825	11.00	9.69
802.11n HT40	151	5755	11.00	10.46
	159	5795	11.00	9.64
802.11ac VHT20	149	5745	9.00	8.42
	157	5785	9.00	7.76
	165	5825	9.00	7.90
802.11ac VHT40	151	5755	9.00	8.20
	159	5795	9.00	7.61
802.11ac VHT80	155	5775	10.00	9.85


NOTE: Power measurement results of WLAN 5.8G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	9.000	8.712	8.494	8.488
	39CH	7.000	6.289	6.060	6.013
	78CH	7.000	5.608	5.375	5.353

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	5.000	4.925
	19CH	3.000	2.324
	39CH	3.000	1.762

8. Antenna Location

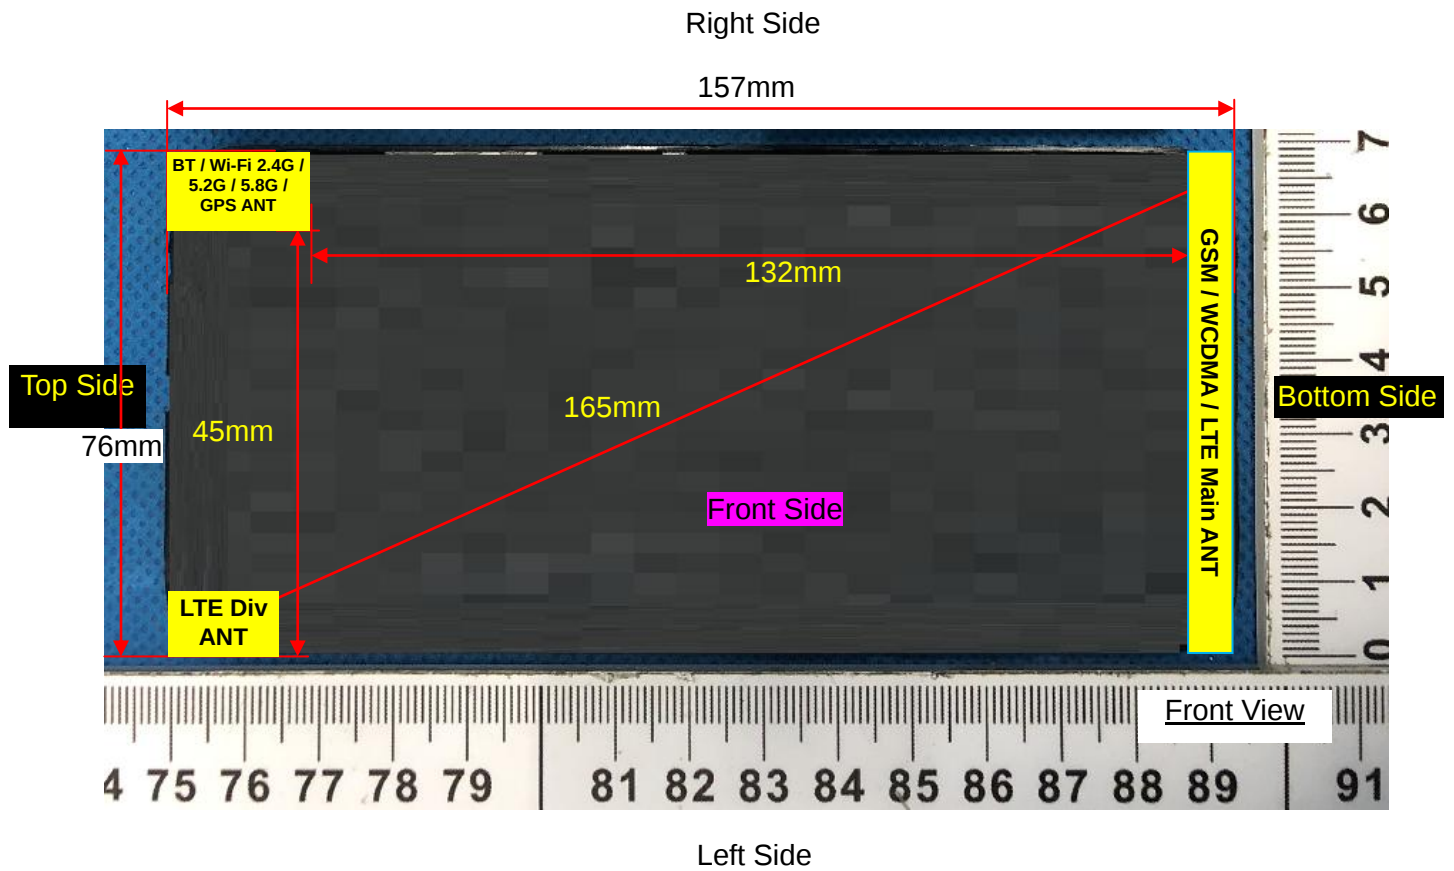

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	9.000	7.943	5	2.480	2.5	3.0	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}/x}] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	9.000	7.943	5	2.480	7.5	0.334
Bluetooth	Body	9.000	7.943	10	2.480	7.5	0.167
Bluetooth	Hotspot	9.000	7.943	10	2.480	7.5	0.167

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.255	0.188	-1.89	29.67	30.00	0.275
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.131	0.091	0.01	29.67	30.00	0.141
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.242	0.171	2.83	29.67	30.00	0.261
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.113	0.086	-4.73	29.67	30.00	0.122

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.289	0.164	-1.81	29.67	30.00	0.312
Back Side	189/836.4	GPRS(GMSK 4TS)	0.615	0.351	-5.06	29.67	30.00	0.664

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.289	0.164	-1.81	29.67	30.00	0.312
Back Side	189/836.4	GPRS(GMSK 4TS)	0.615	0.351	-5.06	29.67	30.00	0.664
Left Side	189/836.4	GPRS(GMSK 4TS)	0.321	0.188	3.44	29.67	30.00	0.346
Right Side	189/836.4	GPRS(GMSK 4TS)	0.308	0.175	1.96	29.67	30.00	0.332
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.318	0.184	-4.78	29.67	30.00	0.343

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	661/1880	GPRS(GMSK 2TS)	0.114	0.074	4.98	30.00	31.00	0.144

Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.057	0.037	3.87	30.00	31.00	0.072
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.093	0.063	1.63	30.00	31.00	0.117
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.045	0.022	0.16	30.00	31.00	0.057

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 2TS)	0.082	0.048	2.69	30.00	31.00	0.103
Back Side	661/1880	GPRS(GMSK 2TS)	0.098	0.057	0.61	30.00	31.00	0.123

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 2TS)	0.082	0.048	2.69	30.00	31.00	0.103
Back Side	661/1880	GPRS(GMSK 2TS)	0.098	0.057	0.61	30.00	31.00	0.123
Left Side	661/1880	GPRS(GMSK 2TS)	0.071	0.041	-0.66	30.00	31.00	0.089
Right Side	661/1880	GPRS(GMSK 2TS)	0.084	0.039	-2.99	30.00	31.00	0.106
Bottom Side	661/1880	GPRS(GMSK 2TS)	0.066	0.031	0.18	30.00	31.00	0.083

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	9400/1880	RMC12.2K	0.141	0.091	2.45	23.85	24.00	0.146
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.077	0.051	-3.89	23.85	24.00	0.080
Right Cheek	9400/1880	RMC12.2K	0.114	0.077	3.76	23.85	24.00	0.118
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.060	0.033	4.73	23.85	24.00	0.062

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.185	0.096	-1.47	23.85	24.00	0.192

Back Side	9400/1880	RMC12.2K	0.240	0.126	-2.14	23.85	24.00	0.248
-----------	-----------	----------	-------	-------	-------	-------	-------	-------

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.185	0.096	-1.47	23.85	24.00	0.192
Back Side	9400/1880	RMC12.2K	0.240	0.126	-2.14	23.85	24.00	0.248
Left Side	9400/1880	RMC12.2K	0.197	0.108	-2.01	23.85	24.00	0.204
Right Side	9400/1880	RMC12.2K	0.177	0.097	3.00	23.85	24.00	0.183
Bottom Side	9400/1880	RMC12.2K	0.219	0.119	0.58	23.85	24.00	0.227

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	4182/836.4	RMC12.2K	0.163	0.126	0.88	24.00	24.00	0.163
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.075	0.055	1.24	24.00	24.00	0.075
Right Cheek	4182/836.4	RMC12.2K	0.146	0.117	4.05	24.00	24.00	0.146
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.068	0.053	-1.62	24.00	24.00	0.068

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.158	0.093	0.39	24.00	24.00	0.158
Back Side	4182/836.4	RMC12.2K	0.385	0.227	-0.15	24.00	24.00	0.385

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.158	0.093	0.39	24.00	24.00	0.158
Back Side	4182/836.4	RMC12.2K	0.385	0.227	-0.15	24.00	24.00	0.385
Left Side	4182/836.4	RMC12.2K	0.148	0.083	1.38	24.00	24.00	0.148
Right Side	4182/836.4	RMC12.2K	0.135	0.078	0.23	24.00	24.00	0.135
Bottom Side	4182/836.4	RMC12.2K	0.138	0.084	3.38	24.00	24.00	0.138

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.5. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	18900/1880	20M QPSK(1,49)	0.126	0.082	-1.05	20.55	21.00	0.140
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.066	0.046	-1.31	20.55	21.00	0.073
Right Cheek	18900/1880	20M QPSK(1,49)	0.096	0.061	1.53	20.55	21.00	0.106
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.051	0.039	-2.43	20.55	21.00	0.057
50%RB								
Left Cheek	18900/1880	1.4M QPSK(3,1)	0.081	0.054	-0.06	20.42	21.00	0.093
Left Tilt 15 Degree	18900/1880	1.4M QPSK(3,1)	0.044	0.023	-3.55	20.42	21.00	0.050
Right Cheek	18900/1880	1.4M QPSK(3,1)	0.067	0.048	4.03	20.42	21.00	0.077
Right Tilt 15 Degree	18900/1880	1.4M QPSK(3,1)	0.037	0.025	-4.04	20.42	21.00	0.042

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Wor n with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	18900/1880	20M QPSK(1,49)	0.133	0.073	-4.31	20.55	21.00	0.148
Back Side	18900/1880	20M QPSK(1,49)	0.156	0.085	-1.77	20.55	21.00	0.173
50%RB								
Front Side	18900/1880	1.4M QPSK(3,1)	0.096	0.055	3.24	20.42	21.00	0.110
Back Side	18900/1880	1.4M QPSK(3,1)	0.128	0.067	1.11	20.42	21.00	0.146

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

1RB								
Front Side	18900/1880	20M QPSK(1,49)	0.133	0.073	-4.31	20.55	21.00	0.148
Back Side	18900/1880	20M QPSK(1,49)	0.156	0.085	-1.77	20.55	21.00	0.173
Left Side	18900/1880	20M QPSK(1,49)	0.128	0.067	-3.67	20.55	21.00	0.142
Right Side	18900/1880	20M QPSK(1,49)	0.138	0.072	3.59	20.55	21.00	0.153
Bottom Side	18900/1880	20M QPSK(1,49)	0.116	0.069	4.98	20.55	21.00	0.129
50%RB								
Front Side	18900/1880	1.4M QPSK(3,1)	0.096	0.055	3.24	20.42	21.00	0.110
Back Side	18900/1880	1.4M QPSK(3,1)	0.128	0.067	1.11	20.42	21.00	0.146
Left Side	18900/1880	1.4M QPSK(3,1)	0.110	0.051	-3.34	20.42	21.00	0.126
Right Side	18900/1880	1.4M QPSK(3,1)	0.095	0.057	-0.18	20.42	21.00	0.109
Bottom Side	18900/1880	1.4M QPSK(3,1)	0.077	0.049	2.69	20.42	21.00	0.088

NOTE: Hotspot SAR test results of LTE Band 2

10.1.6. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.109	0.075	1.00	23.44	24.00	0.124
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.058	0.037	1.26	23.44	24.00	0.066
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.088	0.063	-2.56	23.44	24.00	0.100
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.047	0.033	0.70	23.44	24.00	0.053
50%RB								
Left Cheek	20175/1732.5	1.4M QPSK(3,1)	0.066	0.048	-0.21	23.37	24.00	0.076
Left Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,1)	0.038	0.023	0.74	23.37	24.00	0.044

Right Cheek	20175/1732.5	1.4M QPSK(3,1)	0.057	0.031	0.67	23.37	24.00	0.066
Right Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,1)	0.030	0.020	3.28	23.37	24.00	0.035

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20175/1732.5	20M QPSK(1,49)	0.112	0.065	1.67	23.44	24.00	0.127
Back Side	20175/1732.5	20M QPSK(1,49)	0.135	0.082	-0.02	23.44	24.00	0.154
50%RB								
Front Side	20175/1732.5	1.4M QPSK(3,1)	0.105	0.065	4.23	23.37	24.00	0.121
Back Side	20175/1732.5	1.4M QPSK(3,1)	0.114	0.065	-4.31	23.37	24.00	0.132

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20175/1732.5	20M QPSK(1,49)	0.112	0.065	1.67	23.44	24.00	0.127
Back Side	20175/1732.5	20M QPSK(1,49)	0.135	0.082	-0.02	23.44	24.00	0.154
Left Side	20175/1732.5	20M QPSK(1,49)	0.107	0.067	-4.82	23.44	24.00	0.122
Right Side	20175/1732.5	20M QPSK(1,49)	0.119	0.071	-1.90	23.44	24.00	0.135
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.096	0.054	-0.42	23.44	24.00	0.109
50%RB								
Front Side	20175/1732.5	1.4M QPSK(3,1)	0.105	0.065	4.23	23.37	24.00	0.121

Back Side	20175/1732.5	1.4M QPSK(3,1)	0.114	0.065	-4.31	23.37	24.00	0.132
Left Side	20175/1732.5	1.4M QPSK(3,1)	0.091	0.053	3.86	23.37	24.00	0.105
Right Side	20175/1732.5	1.4M QPSK(3,1)	0.065	0.031	2.42	23.37	24.00	0.075
Bottom Side	20175/1732.5	1.4M QPSK(3,1)	0.081	0.049	3.88	23.37	24.00	0.094

NOTE: Hotspot SAR test results of LTE Band 4

10.1.7. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20525/836.5	10M QPSK(1,24)	0.118	0.092	1.02	23.22	24.00	0.141
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.067	0.056	-1.85	23.22	24.00	0.080
Right Cheek	20525/836.5	10M QPSK(1,24)	0.102	0.077	-4.39	23.22	24.00	0.122
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.058	0.041	-1.67	23.22	24.00	0.069
50%RB								
Left Cheek	20525/836.5	1.4M QPSK(3,0)	0.067	0.052	0.12	23.19	24.00	0.081
Left Tilt 15 Degree	20525/836.5	1.4M QPSK(3,0)	0.031	0.025	4.50	23.19	24.00	0.037
Right Cheek	20525/836.5	1.4M QPSK(3,0)	0.058	0.044	0.77	23.19	24.00	0.070
Right Tilt 15 Degree	20525/836.5	1.4M QPSK(3,0)	0.028	0.023	1.29	23.19	24.00	0.034

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.101	0.067	4.31	23.22	24.00	0.121
Back Side	20525/836.5	10M QPSK(1,24)	0.280	0.167	-0.42	23.22	24.00	0.335
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,0)	0.049	0.021	-1.62	23.19	24.00	0.059
Back Side	20525/836.5	1.4M QPSK(3,0)	0.105	0.063	-0.69	23.19	24.00	0.127

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.101	0.067	4.31	23.22	24.00	0.121
Back Side	20525/836.5	10M QPSK(1,24)	0.280	0.167	-0.42	23.22	24.00	0.335
Left Side	20525/836.5	10M QPSK(1,24)	0.099	0.051	-0.14	23.22	24.00	0.118
Right Side	20525/836.5	10M QPSK(1,24)	0.089	0.052	-4.65	23.22	24.00	0.107
Bottom Side	20525/836.5	10M QPSK(1,24)	0.082	0.045	0.06	23.22	24.00	0.098
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,0)	0.049	0.021	-1.62	23.19	24.00	0.059
Back Side	20525/836.5	1.4M QPSK(3,0)	0.105	0.063	-0.69	23.19	24.00	0.127
Left Side	20525/836.5	1.4M QPSK(3,0)	0.038	0.026	-1.55	23.19	24.00	0.046
Right Side	20525/836.5	1.4M QPSK(3,0)	0.027	0.018	-2.63	23.19	24.00	0.033
Bottom Side	20525/836.5	1.4M QPSK(3,0)	0.018	0.013	1.50	23.19	24.00	0.022

10.1.8. SAR measurement Result of LTE Band 7

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.068	0.038	-1.50	21.77	22.00	0.072
Back Side	21100/2535	20M QPSK(1,49)	0.182	0.101	-1.66	21.77	22.00	0.192
50%RB								

Front Side	21100/2535	20M QPSK(50,0)	0.028	0.017	-3.57	20.68	21.00	0.030
Back Side	21100/2535	20M QPSK(50,0)	0.081	0.046	3.69	20.68	21.00	0.087

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.068	0.038	-1.50	21.77	22.00	0.072
Back Side	21100/2535	20M QPSK(1,49)	0.182	0.101	-1.66	21.77	22.00	0.192
Left Side	21100/2535	20M QPSK(1,49)	0.078	0.046	4.50	21.77	22.00	0.082
Right Side	21100/2535	20M QPSK(1,49)	0.056	0.038	-3.19	21.77	22.00	0.059
Bottom Side	21100/2535	20M QPSK(1,49)	0.046	0.029	-1.15	21.77	22.00	0.049
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.028	0.017	-3.57	20.68	21.00	0.030
Back Side	21100/2535	20M QPSK(50,0)	0.081	0.046	3.69	20.68	21.00	0.087
Left Side	21100/2535	20M QPSK(50,0)	0.024	0.018	-1.43	20.68	21.00	0.026
Right Side	21100/2535	20M QPSK(50,0)	0.018	0.008	0.07	20.68	21.00	0.019
Bottom Side	21100/2535	20M QPSK(50,0)	0.012	0.006	1.81	20.68	21.00	0.013

NOTE: Hotspot SAR test results of LTE Band 7

10.1.9. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	23095/707.5	10M QPSK(1,24)	0.105	0.087	0.39	23.37	24.00	0.121
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.043	0.037	1.62	23.37	24.00	0.050

Right Cheek	23095/707.5	10M QPSK(1,24)	0.078	0.063	1.44	23.37	24.00	0.090
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,24)	0.016	0.011	-2.74	23.37	24.00	0.018
50%RB								
Left Cheek	23095/707.5	1.4M QPSK(3,1)	0.076	0.064	0.10	23.32	24.00	0.089
Left Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.019	0.012	-3.93	23.32	24.00	0.022
Right Cheek	23095/707.5	1.4M QPSK(3,1)	0.035	0.029	0.26	23.32	24.00	0.041
Right Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.027	0.023	2.42	23.32	24.00	0.032

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23095/707.5	10M QPSK(1,24)	0.109	0.066	0.32	23.37	24.00	0.126
Back Side	23095/707.5	10M QPSK(1,24)	0.228	0.140	0.09	23.37	24.00	0.264
50%RB								
Front Side	23095/707.5	1.4M QPSK(3,1)	0.063	0.032	-0.52	23.32	24.00	0.074
Back Side	23095/707.5	1.4M QPSK(3,1)	0.075	0.045	-2.86	23.32	24.00	0.088

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23095/707.5	10M QPSK(1,24)	0.109	0.066	0.32	23.37	24.00	0.126
Back Side	23095/707.5	10M QPSK(1,24)	0.228	0.140	0.09	23.37	24.00	0.264

Left Side	23095/707.5	10M QPSK(1,24)	0.076	0.044	0.03	23.37	24.00	0.088
Right Side	23095/707.5	10M QPSK(1,24)	0.088	0.053	-3.43	23.37	24.00	0.102
Bottom Side	23095/707.5	10M QPSK(1,24)	0.056	0.031	-1.18	23.37	24.00	0.065
50%RB								
Front Side	23095/707.5	1.4M QPSK(3,1)	0.063	0.032	-0.52	23.32	24.00	0.074
Back Side	23095/707.5	1.4M QPSK(3,1)	0.075	0.045	-2.86	23.32	24.00	0.088
Left Side	23095/707.5	1.4M QPSK(3,1)	0.046	0.024	-1.02	23.32	24.00	0.054
Right Side	23095/707.5	1.4M QPSK(3,1)	0.058	0.039	-0.86	23.32	24.00	0.068
Bottom Side	23095/707.5	1.4M QPSK(3,1)	0.066	0.043	3.98	23.32	24.00	0.077

NOTE: Hotspot SAR test results of LTE Band 12

10.1.10. SAR measurement Result of LTE Band 13

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	23230/782	10M QPSK(1,24)	0.071	0.057	0.71	23.44	24.00	0.081
Left Tilt 15 Degree	23230/782	10M QPSK(1,24)	0.035	0.024	-4.87	23.44	24.00	0.040
Right Cheek	23230/782	10M QPSK(1,24)	0.066	0.052	-2.23	23.44	24.00	0.075
Right Tilt 15 Degree	23230/782	10M QPSK(1,24)	0.028	0.023	2.22	23.44	24.00	0.032
50%RB								
Left Cheek	23230/782	10M QPSK(25,24)	0.056	0.045	4.33	22.42	23.00	0.064
Left Tilt 15 Degree	23230/782	10M QPSK(25,24)	0.023	0.018	1.31	22.42	23.00	0.026
Right	23230/782	10M QPSK(25,24)	0.019	0.019	-0.37	22.42	23.00	0.022

Cheek								
Right Tilt 15 Degree	23230/782	10M QPSK(25,24)	0.008	0.003	-1.23	22.42	23.00	0.009

NOTE: Head SAR test results of LTE Band 13

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23230/782	10M QPSK(1,24)	0.213	0.123	3.25	23.44	24.00	0.242
Back Side	23230/782	10M QPSK(1,24)	0.323	0.193	-0.64	23.44	24.00	0.367
50%RB								
Front Side	23230/782	10M QPSK(25,24)	0.102	0.063	-1.54	22.42	23.00	0.117
Back Side	23230/782	10M QPSK(25,24)	0.182	0.107	-4.86	22.42	23.00	0.208

NOTE: Body-Worn SAR test results of LTE Band 13

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23230/782	10M QPSK(1,24)	0.213	0.123	3.25	23.44	24.00	0.242
Back Side	23230/782	10M QPSK(1,24)	0.323	0.193	-0.64	23.44	24.00	0.367
Left Side	23230/782	10M QPSK(1,24)	0.228	0.137	4.29	23.44	24.00	0.259
Right Side	23230/782	10M QPSK(1,24)	0.198	0.117	2.38	23.44	24.00	0.225
Bottom Side	23230/782	10M QPSK(1,24)	0.185	0.119	2.34	23.44	24.00	0.210
50%RB								
Front Side	23230/782	10M QPSK(25,24)	0.102	0.063	-1.54	22.42	23.00	0.117
Back Side	23230/782	10M QPSK(25,24)	0.182	0.107	-4.86	22.42	23.00	0.208
Left	23230/782	10M QPSK(25,24)	0.098	0.057	-1.49	22.42	23.00	0.112

Side								
Right Side	23230/782	10M QPSK(25,24)	0.122	0.075	-4.92	22.42	23.00	0.139
Bottom Side	23230/782	10M QPSK(25,24)	0.111	0.068	-0.77	22.42	23.00	0.127

NOTE: Hotspot SAR test results of LTE Band 13

10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	23790/710	10M QPSK(1,24)	0.115	0.095	0.13	20.91	21.00	0.117
Left Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.050	0.047	-3.01	20.91	21.00	0.051
Right Cheek	23790/710	10M QPSK(1,24)	0.070	0.058	-1.24	20.91	21.00	0.071
Right Tilt 15 Degree	23790/710	10M QPSK(1,24)	0.032	0.029	-2.53	20.91	21.00	0.033
50%RB								
Left Cheek	23790/710	10M QPSK(25,0)	0.080	0.046	-1.22	19.78	20.00	0.084
Left Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.039	0.025	2.84	19.78	20.00	0.041
Right Cheek	23790/710	10M QPSK(25,0)	0.060	0.035	1.06	19.78	20.00	0.063
Right Tilt 15 Degree	23790/710	10M QPSK(25,0)	0.025	0.015	-1.54	19.78	20.00	0.026

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

1RB								
Front Side	23790/710	10M QPSK(1,24)	0.123	0.076	3.65	20.91	21.00	0.126
Back Side	23790/710	10M QPSK(1,24)	0.250	0.152	-0.28	20.91	21.00	0.255
50%RB								
Front Side	23790/710	10M QPSK(25,0)	0.089	0.056	0.87	19.78	20.00	0.094
Back Side	23790/710	10M QPSK(25,0)	0.156	0.095	-3.53	19.78	20.00	0.164

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23790/710	10M QPSK(1,24)	0.123	0.076	3.65	20.91	21.00	0.126
Back Side	23790/710	10M QPSK(1,24)	0.250	0.152	-0.28	20.91	21.00	0.255
Left Side	23790/710	10M QPSK(1,24)	0.156	0.097	4.07	20.91	21.00	0.159
Right Side	23790/710	10M QPSK(1,24)	0.141	0.083	-1.28	20.91	21.00	0.144
Bottom Side	23790/710	10M QPSK(1,24)	0.132	0.088	-0.84	20.91	21.00	0.135
50%RB								
Front Side	23790/710	10M QPSK(25,0)	0.089	0.056	0.87	19.78	20.00	0.094
Back Side	23790/710	10M QPSK(25,0)	0.156	0.095	-3.53	19.78	20.00	0.164
Left Side	23790/710	10M QPSK(25,0)	0.078	0.047	-0.26	19.78	20.00	0.082
Right Side	23790/710	10M QPSK(25,0)	0.088	0.053	-0.57	19.78	20.00	0.093
Bottom Side	23790/710	10M QPSK(25,0)	0.113	0.061	-2.56	19.78	20.00	0.119

NOTE: Hotspot SAR test results of LTE Band 17

10.1.12. SAR measurement Result of LTE Band 66

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g
			1g	10g				

								(W/Kg)
1RB								
Left Cheek	132322/1745	20M QPSK(1,49)	0.114	0.077	-0.11	23.58	24.00	0.126
Left Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.066	0.046	-3.67	23.58	24.00	0.073
Right Cheek	132322/1745	20M QPSK(1,49)	0.095	0.067	-4.48	23.58	24.00	0.105
Right Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.047	0.031	-2.86	23.58	24.00	0.052
50%RB								
Left Cheek	132322/1745	1.4M QPSK(3,0)	0.086	0.059	-0.19	23.49	24.00	0.097
Left Tilt 15 Degree	132322/1745	1.4M QPSK(3,0)	0.043	0.023	-0.68	23.49	24.00	0.048
Right Cheek	132322/1745	1.4M QPSK(3,0)	0.079	0.054	2.27	23.49	24.00	0.089
Right Tilt 15 Degree	132322/1745	1.4M QPSK(3,0)	0.041	0.025	3.08	23.49	24.00	0.046

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	132322/1745	20M QPSK(1,49)	0.113	0.063	-2.33	23.58	24.00	0.124
Back Side	132322/1745	20M QPSK(1,49)	0.139	0.083	0.57	23.58	24.00	0.153
50%RB								
Front Side	132322/1745	1.4M QPSK(3,0)	0.094	0.051	-3.51	23.49	24.00	0.106
Back Side	132322/1745	1.4M QPSK(3,0)	0.112	0.069	-2.96	23.49	24.00	0.126

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

with 10mm								
1RB								
Front Side	132322/1745	20M QPSK(1,49)	0.113	0.063	-2.33	23.58	24.00	0.124
Back Side	132322/1745	20M QPSK(1,49)	0.139	0.083	0.57	23.58	24.00	0.153
Left Side	132322/1745	20M QPSK(1,49)	0.117	0.067	-0.92	23.58	24.00	0.129
Right Side	132322/1745	20M QPSK(1,49)	0.109	0.063	0.75	23.58	24.00	0.120
Bottom Side	132322/1745	20M QPSK(1,49)	0.094	0.051	2.61	23.58	24.00	0.104
50%RB								
Front Side	132322/1745	1.4M QPSK(3,0)	0.094	0.051	-3.51	23.49	24.00	0.106
Back Side	132322/1745	1.4M QPSK(3,0)	0.112	0.069	-2.96	23.49	24.00	0.126
Left Side	132322/1745	1.4M QPSK(3,0)	0.104	0.064	4.01	23.49	24.00	0.117
Right Side	132322/1745	1.4M QPSK(3,0)	0.073	0.046	-3.17	23.49	24.00	0.082
Bottom Side	132322/1745	1.4M QPSK(3,0)	0.061	0.030	1.76	23.49	24.00	0.069

NOTE: Hotspot SAR test results of LTE Band 66

10.1.13. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	6/2437	802.11 b	0.479	0.215	1.01	15.39	15.50	0.491
Left Tilt 15 Degree	6/2437	802.11 b	0.216	0.094	-4.70	15.39	15.50	0.222
Right Cheek	6/2437	802.11 b	0.389	0.178	0.23	15.39	15.50	0.399
Right Tilt 15 Degree	6/2437	802.11 b	0.208	0.096	1.36	15.39	15.50	0.213

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

with 10mm								
Front Side	6/2437	802.11 b	0.112	0.051	4.80	15.39	15.50	0.115
Back Side	6/2437	802.11 b	0.206	0.108	-0.53	15.39	15.50	0.211

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.112	0.051	4.80	15.39	15.50	0.115
Back Side	6/2437	802.11 b	0.206	0.108	-0.53	15.39	15.50	0.211
Right Side	6/2437	802.11 b	0.107	0.053	-0.46	15.39	15.50	0.110
Top Side	6/2437	802.11 b	0.128	0.065	-2.90	15.39	15.50	0.131

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.14. SAR measurement Result of WLAN 5.2G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	42/5210	802.11ac VHT80	0.287	0.114	-4.57	9.74	10.00	0.305
Left Tilt 15 Degree	42/5210	802.11ac VHT80	0.134	0.053	0.23	9.74	10.00	0.142
Right Cheek	42/5210	802.11ac VHT80	0.313	0.130	2.40	9.74	10.00	0.332
Right Tilt 15 Degree	42/5210	802.11ac VHT80	0.153	0.067	1.46	9.74	10.00	0.162

NOTE: Head SAR test results of WLAN 5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	42/5210	802.11ac VHT80	0.326	0.128	-4.47	9.74	10.00	0.346
Back Side	42/5210	802.11ac VHT80	0.540	0.202	-4.79	9.74	10.00	0.573

NOTE: Body-Worn SAR test results of WLAN 5.2G

Test	Test	Test Mode	SAR Value	Power	Conducted	Tune-up	Scaled
------	------	-----------	-----------	-------	-----------	---------	--------

Position of Hotspot with 10mm	channel /Freq.		(W/kg)		Drift (±5%)	power (dBm)	power (dBm)	SAR 1g (W/Kg)
			1g	10g				
Front Side	42/5210	802.11ac VHT80	0.326	0.128	-4.47	9.74	10.00	0.346
Back Side	42/5210	802.11ac VHT80	0.540	0.202	-4.79	9.74	10.00	0.573
Right Side	42/5210	802.11ac VHT80	0.289	0.103	4.72	9.74	10.00	0.307
Top Side	42/5210	802.11ac VHT80	0.339	0.128	-1.72	9.74	10.00	0.360

NOTE: Hotspot SAR test results of WLAN 5.2G

10.1.15. SAR measurement Result of WLAN 5.8G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	157/5785	802.11a	0.047	0.035	-0.23	9.86	11.00	0.061
Left Tilt 15 Degree	157/5785	802.11a	0.026	0.012	3.51	9.86	11.00	0.034
Right Cheek	157/5785	802.11a	0.037	0.023	-1.71	9.86	11.00	0.048
Right Tilt 15 Degree	157/5785	802.11a	0.021	0.013	-1.51	9.86	11.00	0.027

NOTE: Head SAR test results of WLAN 5.8G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	157/5785	802.11a	0.128	0.053	-4.73	9.86	11.00	0.166
Back Side	157/5785	802.11a	0.236	0.106	4.91	9.86	11.00	0.307

NOTE: Body-Worn SAR test results of WLAN 5.8G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	157/5785	802.11a	0.128	0.053	-4.73	9.86	11.00	0.166
Back Side	157/5785	802.11a	0.236	0.106	4.91	9.86	11.00	0.307

Right Side	157/5785	802.11a	0.135	0.063	4.69	9.86	11.00	0.176
Top Side	157/5785	802.11a	0.109	0.046	-4.87	9.86	11.00	0.142

NOTE: Hotspot SAR test results of WLAN 5.2G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation $< 1.6\text{W/kg}$.
- $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Head	Left Cheek	0.275	0.491	0.766	N/A	N/A
	Left Tilt 15 Degree	0.141	0.222	0.363	N/A	N/A
	Right Cheek	0.261	0.399	0.660	N/A	N/A
	Right Tilt 15 Degree	0.122	0.213	0.335	N/A	N/A
Body-Worn	Front Side	0.312	0.115	0.427	N/A	N/A
	Back Side	0.664	0.211	0.875	N/A	N/A
Hotspot	Front Side	0.312	0.115	0.427	N/A	N/A
	Back Side	0.664	0.211	0.875	N/A	N/A
	Left Side	0.346	N/A	0.346	N/A	N/A
	Right Side	0.332	0.110	0.442	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.343	N/A	0.343	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 2.4G			
Head	Left Cheek	0.144	0.491	0.635	N/A	N/A
	Left Tilt 15 Degree	0.072	0.222	0.293	N/A	N/A
	Right Cheek	0.117	0.399	0.516	N/A	N/A
	Right Tilt 15 Degree	0.057	0.213	0.270	N/A	N/A
Body-Worn	Front Side	0.103	0.115	0.218	N/A	N/A
	Back Side	0.123	0.211	0.335	N/A	N/A
Hotspot	Front Side	0.103	0.115	0.218	N/A	N/A
	Back Side	0.123	0.211	0.335	N/A	N/A
	Left Side	0.089	N/A	0.089	N/A	N/A

	Right Side	0.106	0.110	0.215	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.083	N/A	0.083	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 2.4G			
Head	Left Cheek	0.146	0.491	0.637	N/A	N/A
	Left Tilt 15 Degree	0.080	0.222	0.301	N/A	N/A
	Right Cheek	0.118	0.399	0.517	N/A	N/A
	Right Tilt 15 Degree	0.062	0.213	0.275	N/A	N/A
Body-Worn	Front Side	0.192	0.115	0.306	N/A	N/A
	Back Side	0.248	0.211	0.460	N/A	N/A
Hotspot	Front Side	0.192	0.115	0.306	N/A	N/A
	Back Side	0.248	0.211	0.460	N/A	N/A
	Left Side	0.204	N/A	0.204	N/A	N/A
	Right Side	0.183	0.110	0.293	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.227	N/A	0.227	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 2.4G			
Head	Left Cheek	0.163	0.491	0.654	N/A	N/A
	Left Tilt 15 Degree	0.075	0.222	0.297	N/A	N/A
	Right Cheek	0.146	0.399	0.545	N/A	N/A
	Right Tilt 15 Degree	0.068	0.213	0.281	N/A	N/A
Body-Worn	Front Side	0.158	0.115	0.273	N/A	N/A
	Back Side	0.385	0.211	0.596	N/A	N/A
Hotspot	Front Side	0.158	0.115	0.273	N/A	N/A
	Back Side	0.385	0.211	0.596	N/A	N/A
	Left Side	0.148	N/A	0.148	N/A	N/A
	Right Side	0.135	0.110	0.245	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.138	N/A	0.138	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 2.4G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band 2	WLAN 2.4G	(W/Kg)		
Head	Left Cheek	0.140	0.491	0.631	N/A	N/A
	Left Tilt 15 Degree	0.073	0.222	0.295	N/A	N/A
	Right Cheek	0.106	0.399	0.505	N/A	N/A
	Right Tilt 15 Degree	0.057	0.213	0.270	N/A	N/A
Body-Worn	Front Side	0.148	0.115	0.262	N/A	N/A
	Back Side	0.173	0.211	0.384	N/A	N/A
Hotspot	Front Side	0.148	0.115	0.262	N/A	N/A
	Back Side	0.173	0.211	0.384	N/A	N/A
	Left Side	0.142	N/A	0.142	N/A	N/A
	Right Side	0.153	0.110	0.263	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.129	N/A	0.129	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	WLAN 2.4G			
Head	Left Cheek	0.124	0.491	0.615	N/A	N/A
	Left Tilt 15 Degree	0.066	0.222	0.288	N/A	N/A
	Right Cheek	0.100	0.399	0.499	N/A	N/A
	Right Tilt 15 Degree	0.053	0.213	0.267	N/A	N/A
Body-Worn	Front Side	0.127	0.115	0.242	N/A	N/A
	Back Side	0.154	0.211	0.365	N/A	N/A
Hotspot	Front Side	0.127	0.115	0.242	N/A	N/A
	Back Side	0.154	0.211	0.365	N/A	N/A
	Left Side	0.122	N/A	0.122	N/A	N/A
	Right Side	0.135	0.110	0.245	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.109	N/A	0.109	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	WLAN 2.4G			
Head	Left Cheek	0.141	0.491	0.633	N/A	N/A
	Left Tilt 15 Degree	0.080	0.222	0.302	N/A	N/A
	Right Cheek	0.122	0.399	0.521	N/A	N/A
	Right Tilt 15 Degree	0.069	0.213	0.283	N/A	N/A
Body-Worn	Front Side	0.121	0.115	0.236	N/A	N/A

	Back Side	0.335	0.211	0.546	N/A	N/A
Hotspot	Front Side	0.121	0.115	0.236	N/A	N/A
	Back Side	0.335	0.211	0.546	N/A	N/A
	Left Side	0.118	N/A	0.118	N/A	N/A
	Right Side	0.107	0.110	0.216	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.098	N/A	0.098	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	WLAN 2.4G			
Head	Left Cheek	0.153	0.491	0.644	N/A	N/A
	Left Tilt 15 Degree	0.072	0.222	0.293	N/A	N/A
	Right Cheek	0.135	0.399	0.534	N/A	N/A
	Right Tilt 15 Degree	0.059	0.213	0.272	N/A	N/A
Body-Worn	Front Side	0.072	0.115	0.187	N/A	N/A
	Back Side	0.192	0.211	0.403	N/A	N/A
Hotspot	Front Side	0.072	0.115	0.187	N/A	N/A
	Back Side	0.192	0.211	0.403	N/A	N/A
	Left Side	0.082	N/A	0.082	N/A	N/A
	Right Side	0.059	0.110	0.169	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.049	N/A	0.049	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	WLAN 2.4G			
Head	Left Cheek	0.121	0.491	0.613	N/A	N/A
	Left Tilt 15 Degree	0.050	0.222	0.271	N/A	N/A
	Right Cheek	0.090	0.399	0.489	N/A	N/A
	Right Tilt 15 Degree	0.032	0.213	0.245	N/A	N/A
Body-Worn	Front Side	0.126	0.115	0.241	N/A	N/A
	Back Side	0.264	0.211	0.475	N/A	N/A
Hotspot	Front Side	0.126	0.115	0.241	N/A	N/A
	Back Side	0.264	0.211	0.475	N/A	N/A
	Left Side	0.088	N/A	0.088	N/A	N/A
	Right Side	0.102	0.110	0.211	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A

	Bottom Side	0.077	N/A	0.077	N/A	N/A
--	-------------	-------	-----	-------	-----	-----

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 13	WLAN 2.4G			
Head	Left Cheek	0.081	0.491	0.572	N/A	N/A
	Left Tilt 15 Degree	0.040	0.222	0.261	N/A	N/A
	Right Cheek	0.075	0.399	0.474	N/A	N/A
	Right Tilt 15 Degree	0.032	0.213	0.245	N/A	N/A
Body-Worn	Front Side	0.242	0.115	0.357	N/A	N/A
	Back Side	0.367	0.211	0.579	N/A	N/A
Hotspot	Front Side	0.242	0.115	0.357	N/A	N/A
	Back Side	0.367	0.211	0.579	N/A	N/A
	Left Side	0.259	N/A	0.259	N/A	N/A
	Right Side	0.225	0.110	0.335	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.210	N/A	0.210	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 13 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	WLAN 2.4G			
Head	Left Cheek	0.117	0.491	0.609	N/A	N/A
	Left Tilt 15 Degree	0.051	0.222	0.273	N/A	N/A
	Right Cheek	0.071	0.399	0.470	N/A	N/A
	Right Tilt 15 Degree	0.033	0.213	0.246	N/A	N/A
Body-Worn	Front Side	0.126	0.115	0.240	N/A	N/A
	Back Side	0.255	0.211	0.467	N/A	N/A
Hotspot	Front Side	0.126	0.115	0.240	N/A	N/A
	Back Side	0.255	0.211	0.467	N/A	N/A
	Left Side	0.159	N/A	0.159	N/A	N/A
	Right Side	0.144	0.110	0.254	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.135	N/A	0.135	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band	WLAN 2.4G			

		66				
Head	Left Cheek	0.126	0.491	0.617	N/A	N/A
	Left Tilt 15 Degree	0.073	0.222	0.294	N/A	N/A
	Right Cheek	0.105	0.399	0.504	N/A	N/A
	Right Tilt 15 Degree	0.052	0.213	0.265	N/A	N/A
Body-Worn	Front Side	0.124	0.115	0.239	N/A	N/A
	Back Side	0.153	0.211	0.364	N/A	N/A
Hotspot	Front Side	0.124	0.115	0.239	N/A	N/A
	Back Side	0.153	0.211	0.364	N/A	N/A
	Left Side	0.129	N/A	0.129	N/A	N/A
	Right Side	0.120	0.110	0.230	N/A	N/A
	Top Side	N/A	0.131	0.131	N/A	N/A
	Bottom Side	0.104	N/A	0.104	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 66 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.2G			
Head	Left Cheek	0.275	0.305	0.580	N/A	N/A
	Left Tilt 15 Degree	0.141	0.142	0.284	N/A	N/A
	Right Cheek	0.261	0.332	0.593	N/A	N/A
	Right Tilt 15 Degree	0.122	0.162	0.284	N/A	N/A
Body-Worn	Front Side	0.312	0.346	0.658	N/A	N/A
	Back Side	0.664	0.573	1.237	N/A	N/A
Hotspot	Front Side	0.312	0.346	0.658	N/A	N/A
	Back Side	0.664	0.573	1.237	N/A	N/A
	Left Side	0.346	N/A	0.346	N/A	N/A
	Right Side	0.332	0.307	0.639	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.343	N/A	0.343	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.2G			
Head	Left Cheek	0.144	0.305	0.448	N/A	N/A
	Left Tilt 15 Degree	0.072	0.142	0.214	N/A	N/A
	Right Cheek	0.117	0.332	0.449	N/A	N/A
	Right Tilt 15 Degree	0.057	0.162	0.219	N/A	N/A
Body-Worn	Front Side	0.103	0.346	0.449	N/A	N/A
	Back Side	0.123	0.573	0.697	N/A	N/A

Hotspot	Front Side	0.103	0.346	0.449	N/A	N/A
	Back Side	0.123	0.573	0.697	N/A	N/A
	Left Side	0.089	N/A	0.089	N/A	N/A
	Right Side	0.106	0.307	0.413	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.083	N/A	0.083	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 5.2G			
Head	Left Cheek	0.146	0.305	0.451	N/A	N/A
	Left Tilt 15 Degree	0.080	0.142	0.222	N/A	N/A
	Right Cheek	0.118	0.332	0.450	N/A	N/A
	Right Tilt 15 Degree	0.062	0.162	0.225	N/A	N/A
Body-Worn	Front Side	0.192	0.346	0.538	N/A	N/A
	Back Side	0.248	0.573	0.822	N/A	N/A
Hotspot	Front Side	0.192	0.346	0.538	N/A	N/A
	Back Side	0.248	0.573	0.822	N/A	N/A
	Left Side	0.204	N/A	0.204	N/A	N/A
	Right Side	0.183	0.307	0.490	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.227	N/A	0.227	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 5.2G			
Head	Left Cheek	0.163	0.305	0.468	N/A	N/A
	Left Tilt 15 Degree	0.075	0.142	0.217	N/A	N/A
	Right Cheek	0.146	0.332	0.478	N/A	N/A
	Right Tilt 15 Degree	0.068	0.162	0.230	N/A	N/A
Body-Worn	Front Side	0.158	0.346	0.504	N/A	N/A
	Back Side	0.385	0.573	0.958	N/A	N/A
Hotspot	Front Side	0.158	0.346	0.504	N/A	N/A
	Back Side	0.385	0.573	0.958	N/A	N/A
	Left Side	0.148	N/A	0.148	N/A	N/A
	Right Side	0.135	0.307	0.442	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.138	N/A	0.138	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	WLAN 5.2G			
Head	Left Cheek	0.140	0.305	0.444	N/A	N/A
	Left Tilt 15 Degree	0.073	0.142	0.215	N/A	N/A
	Right Cheek	0.106	0.332	0.439	N/A	N/A
	Right Tilt 15 Degree	0.057	0.162	0.219	N/A	N/A
Body-Worn	Front Side	0.148	0.346	0.494	N/A	N/A
	Back Side	0.173	0.573	0.746	N/A	N/A
Hotspot	Front Side	0.148	0.346	0.494	N/A	N/A
	Back Side	0.173	0.573	0.746	N/A	N/A
	Left Side	0.142	N/A	0.142	N/A	N/A
	Right Side	0.153	0.307	0.460	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.129	N/A	0.129	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	WLAN 5.2G			
Head	Left Cheek	0.124	0.305	0.429	N/A	N/A
	Left Tilt 15 Degree	0.066	0.142	0.208	N/A	N/A
	Right Cheek	0.100	0.332	0.432	N/A	N/A
	Right Tilt 15 Degree	0.053	0.162	0.216	N/A	N/A
Body-Worn	Front Side	0.127	0.346	0.474	N/A	N/A
	Back Side	0.154	0.573	0.727	N/A	N/A
Hotspot	Front Side	0.127	0.346	0.474	N/A	N/A
	Back Side	0.154	0.573	0.727	N/A	N/A
	Left Side	0.122	N/A	0.122	N/A	N/A
	Right Side	0.135	0.307	0.442	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.109	N/A	0.109	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	WLAN 5.2G			
Head	Left Cheek	0.141	0.305	0.446	N/A	N/A
	Left Tilt 15 Degree	0.080	0.142	0.222	N/A	N/A

	Right Cheek	0.122	0.332	0.454	N/A	N/A
	Right Tilt 15 Degree	0.069	0.162	0.232	N/A	N/A
Body-Worn	Front Side	0.121	0.346	0.467	N/A	N/A
	Back Side	0.335	0.573	0.908	N/A	N/A
Hotspot	Front Side	0.121	0.346	0.467	N/A	N/A
	Back Side	0.335	0.573	0.908	N/A	N/A
	Left Side	0.118	N/A	0.118	N/A	N/A
	Right Side	0.107	0.307	0.413	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.098	N/A	0.098	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	WLAN 5.2G			
Head	Left Cheek	0.153	0.305	0.458	N/A	N/A
	Left Tilt 15 Degree	0.072	0.142	0.214	N/A	N/A
	Right Cheek	0.135	0.332	0.467	N/A	N/A
	Right Tilt 15 Degree	0.059	0.162	0.221	N/A	N/A
Body-Worn	Front Side	0.072	0.346	0.418	N/A	N/A
	Back Side	0.192	0.573	0.765	N/A	N/A
Hotspot	Front Side	0.072	0.346	0.418	N/A	N/A
	Back Side	0.192	0.573	0.765	N/A	N/A
	Left Side	0.082	N/A	0.082	N/A	N/A
	Right Side	0.059	0.307	0.366	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.049	N/A	0.049	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	WLAN 5.2G			
Head	Left Cheek	0.121	0.305	0.426	N/A	N/A
	Left Tilt 15 Degree	0.050	0.142	0.192	N/A	N/A
	Right Cheek	0.090	0.332	0.422	N/A	N/A
	Right Tilt 15 Degree	0.032	0.162	0.194	N/A	N/A
Body-Worn	Front Side	0.126	0.346	0.472	N/A	N/A
	Back Side	0.264	0.573	0.837	N/A	N/A
Hotspot	Front Side	0.126	0.346	0.472	N/A	N/A
	Back Side	0.264	0.573	0.837	N/A	N/A

	Left Side	0.088	N/A	0.088	N/A	N/A
	Right Side	0.102	0.307	0.409	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.077	N/A	0.077	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 13	WLAN 5.2G			
Head	Left Cheek	0.081	0.305	0.385	N/A	N/A
	Left Tilt 15 Degree	0.040	0.142	0.182	N/A	N/A
	Right Cheek	0.075	0.332	0.407	N/A	N/A
	Right Tilt 15 Degree	0.032	0.162	0.194	N/A	N/A
Body-Worn	Front Side	0.242	0.346	0.588	N/A	N/A
	Back Side	0.367	0.573	0.941	N/A	N/A
Hotspot	Front Side	0.242	0.346	0.588	N/A	N/A
	Back Side	0.367	0.573	0.941	N/A	N/A
	Left Side	0.259	N/A	0.259	N/A	N/A
	Right Side	0.225	0.307	0.532	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.210	N/A	0.210	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 13 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	WLAN 5.2G			
Head	Left Cheek	0.117	0.305	0.422	N/A	N/A
	Left Tilt 15 Degree	0.051	0.142	0.193	N/A	N/A
	Right Cheek	0.071	0.332	0.404	N/A	N/A
	Right Tilt 15 Degree	0.033	0.162	0.195	N/A	N/A
Body-Worn	Front Side	0.126	0.346	0.472	N/A	N/A
	Back Side	0.255	0.573	0.829	N/A	N/A
Hotspot	Front Side	0.126	0.346	0.472	N/A	N/A
	Back Side	0.255	0.573	0.829	N/A	N/A
	Left Side	0.159	N/A	0.159	N/A	N/A
	Right Side	0.144	0.307	0.451	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.135	N/A	0.135	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 66	WLAN 5.2G			
Head	Left Cheek	0.126	0.305	0.430	N/A	N/A
	Left Tilt 15 Degree	0.073	0.142	0.215	N/A	N/A
	Right Cheek	0.105	0.332	0.437	N/A	N/A
	Right Tilt 15 Degree	0.052	0.162	0.214	N/A	N/A
Body-Worn	Front Side	0.124	0.346	0.471	N/A	N/A
	Back Side	0.153	0.573	0.726	N/A	N/A
Hotspot	Front Side	0.124	0.346	0.471	N/A	N/A
	Back Side	0.153	0.573	0.726	N/A	N/A
	Left Side	0.129	N/A	0.129	N/A	N/A
	Right Side	0.120	0.307	0.427	N/A	N/A
	Top Side	N/A	0.360	0.360	N/A	N/A
	Bottom Side	0.104	N/A	0.104	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 66 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.8G			
Head	Left Cheek	0.275	0.061	0.336	N/A	N/A
	Left Tilt 15 Degree	0.141	0.034	0.175	N/A	N/A
	Right Cheek	0.261	0.048	0.309	N/A	N/A
	Right Tilt 15 Degree	0.122	0.027	0.149	N/A	N/A
Body-Worn	Front Side	0.312	0.166	0.478	N/A	N/A
	Back Side	0.664	0.307	0.970	N/A	N/A
Hotspot	Front Side	0.312	0.166	0.478	N/A	N/A
	Back Side	0.664	0.307	0.970	N/A	N/A
	Left Side	0.346	N/A	0.346	N/A	N/A
	Right Side	0.332	0.176	0.508	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.343	N/A	0.343	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.8G			
Head	Left Cheek	0.144	0.061	0.205	N/A	N/A
	Left Tilt 15 Degree	0.072	0.034	0.106	N/A	N/A
	Right Cheek	0.117	0.048	0.165	N/A	N/A

	Right Tilt 15 Degree	0.057	0.027	0.084	N/A	N/A
Body-Worn	Front Side	0.103	0.166	0.270	N/A	N/A
	Back Side	0.123	0.307	0.430	N/A	N/A
Hotspot	Front Side	0.103	0.166	0.270	N/A	N/A
	Back Side	0.123	0.307	0.430	N/A	N/A
	Left Side	0.089	N/A	0.089	N/A	N/A
	Right Side	0.106	0.176	0.281	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.083	N/A	0.083	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 5.8G			
Head	Left Cheek	0.146	0.061	0.207	N/A	N/A
	Left Tilt 15 Degree	0.080	0.034	0.114	N/A	N/A
	Right Cheek	0.118	0.048	0.166	N/A	N/A
	Right Tilt 15 Degree	0.062	0.027	0.089	N/A	N/A
Body-Worn	Front Side	0.192	0.166	0.358	N/A	N/A
	Back Side	0.248	0.307	0.555	N/A	N/A
Hotspot	Front Side	0.192	0.166	0.358	N/A	N/A
	Back Side	0.248	0.307	0.555	N/A	N/A
	Left Side	0.204	N/A	0.204	N/A	N/A
	Right Side	0.183	0.176	0.359	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.227	N/A	0.227	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 5.8G			
Head	Left Cheek	0.163	0.061	0.224	N/A	N/A
	Left Tilt 15 Degree	0.075	0.034	0.109	N/A	N/A
	Right Cheek	0.146	0.048	0.194	N/A	N/A
	Right Tilt 15 Degree	0.068	0.027	0.095	N/A	N/A
Body-Worn	Front Side	0.158	0.166	0.324	N/A	N/A
	Back Side	0.385	0.307	0.692	N/A	N/A
Hotspot	Front Side	0.158	0.166	0.324	N/A	N/A
	Back Side	0.385	0.307	0.692	N/A	N/A

	Left Side	0.148	N/A	0.148	N/A	N/A
	Right Side	0.135	0.176	0.311	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.138	N/A	0.138	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	WLAN 5.8G			
Head	Left Cheek	0.140	0.061	0.201	N/A	N/A
	Left Tilt 15 Degree	0.073	0.034	0.107	N/A	N/A
	Right Cheek	0.106	0.048	0.155	N/A	N/A
	Right Tilt 15 Degree	0.057	0.027	0.084	N/A	N/A
Body-Worn	Front Side	0.148	0.166	0.314	N/A	N/A
	Back Side	0.173	0.307	0.480	N/A	N/A
Hotspot	Front Side	0.148	0.166	0.314	N/A	N/A
	Back Side	0.173	0.307	0.480	N/A	N/A
	Left Side	0.142	N/A	0.142	N/A	N/A
	Right Side	0.153	0.176	0.329	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.129	N/A	0.129	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	WLAN 5.8G			
Head	Left Cheek	0.124	0.061	0.185	N/A	N/A
	Left Tilt 15 Degree	0.066	0.034	0.100	N/A	N/A
	Right Cheek	0.100	0.048	0.148	N/A	N/A
	Right Tilt 15 Degree	0.053	0.027	0.081	N/A	N/A
Body-Worn	Front Side	0.127	0.166	0.294	N/A	N/A
	Back Side	0.154	0.307	0.460	N/A	N/A
Hotspot	Front Side	0.127	0.166	0.294	N/A	N/A
	Back Side	0.154	0.307	0.460	N/A	N/A
	Left Side	0.122	N/A	0.122	N/A	N/A
	Right Side	0.135	0.176	0.311	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.109	N/A	0.109	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and WLAN 5.8G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band 5	WLAN 5.8G	(W/Kg)		
Head	Left Cheek	0.141	0.061	0.202	N/A	N/A
	Left Tilt 15 Degree	0.080	0.034	0.114	N/A	N/A
	Right Cheek	0.122	0.048	0.170	N/A	N/A
	Right Tilt 15 Degree	0.069	0.027	0.097	N/A	N/A
Body-Worn	Front Side	0.121	0.166	0.287	N/A	N/A
	Back Side	0.335	0.307	0.642	N/A	N/A
Hotspot	Front Side	0.121	0.166	0.287	N/A	N/A
	Back Side	0.335	0.307	0.642	N/A	N/A
	Left Side	0.118	N/A	0.118	N/A	N/A
	Right Side	0.107	0.176	0.282	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.098	N/A	0.098	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	WLAN 5.8G			
Head	Left Cheek	0.153	0.061	0.214	N/A	N/A
	Left Tilt 15 Degree	0.072	0.034	0.106	N/A	N/A
	Right Cheek	0.135	0.048	0.183	N/A	N/A
	Right Tilt 15 Degree	0.059	0.027	0.086	N/A	N/A
Body-Worn	Front Side	0.072	0.166	0.238	N/A	N/A
	Back Side	0.192	0.307	0.499	N/A	N/A
Hotspot	Front Side	0.072	0.166	0.238	N/A	N/A
	Back Side	0.192	0.307	0.499	N/A	N/A
	Left Side	0.082	N/A	0.082	N/A	N/A
	Right Side	0.059	0.176	0.235	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.049	N/A	0.049	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	WLAN 5.8G			
Head	Left Cheek	0.121	0.061	0.182	N/A	N/A
	Left Tilt 15 Degree	0.050	0.034	0.084	N/A	N/A
	Right Cheek	0.090	0.048	0.138	N/A	N/A
	Right Tilt 15 Degree	0.032	0.027	0.059	N/A	N/A

Body-Worn	Front Side	0.126	0.166	0.292	N/A	N/A
	Back Side	0.264	0.307	0.570	N/A	N/A
Hotspot	Front Side	0.126	0.166	0.292	N/A	N/A
	Back Side	0.264	0.307	0.570	N/A	N/A
	Left Side	0.088	N/A	0.088	N/A	N/A
	Right Side	0.102	0.176	0.277	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.077	N/A	0.077	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 13	WLAN 5.8G			
Head	Left Cheek	0.081	0.061	0.142	N/A	N/A
	Left Tilt 15 Degree	0.040	0.034	0.074	N/A	N/A
	Right Cheek	0.075	0.048	0.123	N/A	N/A
	Right Tilt 15 Degree	0.032	0.027	0.059	N/A	N/A
Body-Worn	Front Side	0.242	0.166	0.409	N/A	N/A
	Back Side	0.367	0.307	0.674	N/A	N/A
Hotspot	Front Side	0.242	0.166	0.409	N/A	N/A
	Back Side	0.367	0.307	0.674	N/A	N/A
	Left Side	0.259	N/A	0.259	N/A	N/A
	Right Side	0.225	0.176	0.401	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.210	N/A	0.210	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 13 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	WLAN 5.8G			
Head	Left Cheek	0.117	0.061	0.179	N/A	N/A
	Left Tilt 15 Degree	0.051	0.034	0.085	N/A	N/A
	Right Cheek	0.071	0.048	0.120	N/A	N/A
	Right Tilt 15 Degree	0.033	0.027	0.060	N/A	N/A
Body-Worn	Front Side	0.126	0.166	0.292	N/A	N/A
	Back Side	0.255	0.307	0.562	N/A	N/A
Hotspot	Front Side	0.126	0.166	0.292	N/A	N/A
	Back Side	0.255	0.307	0.562	N/A	N/A
	Left Side	0.159	N/A	0.159	N/A	N/A
	Right Side	0.144	0.176	0.319	N/A	N/A

	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.135	N/A	0.135	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 66	WLAN 5.8G			
Head	Left Cheek	0.126	0.061	0.187	N/A	N/A
	Left Tilt 15 Degree	0.073	0.034	0.107	N/A	N/A
	Right Cheek	0.105	0.048	0.153	N/A	N/A
	Right Tilt 15 Degree	0.052	0.027	0.079	N/A	N/A
Body-Worn	Front Side	0.124	0.166	0.291	N/A	N/A
	Back Side	0.153	0.307	0.460	N/A	N/A
Hotspot	Front Side	0.124	0.166	0.291	N/A	N/A
	Back Side	0.153	0.307	0.460	N/A	N/A
	Left Side	0.129	N/A	0.129	N/A	N/A
	Right Side	0.120	0.176	0.296	N/A	N/A
	Top Side	N/A	0.142	0.142	N/A	N/A
	Bottom Side	0.104	N/A	0.104	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 66 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Head	Left Cheek	0.275	0.334	0.609	N/A	N/A
	Left Tilt 15 Degree	0.141	0.334	0.475	N/A	N/A
	Right Cheek	0.261	0.334	0.595	N/A	N/A
	Right Tilt 15 Degree	0.122	0.334	0.455	N/A	N/A
Body-Worn	Front Side	0.312	0.167	0.479	N/A	N/A
	Back Side	0.664	0.167	0.830	N/A	N/A
Hotspot	Front Side	0.312	0.167	0.479	N/A	N/A
	Back Side	0.664	0.167	0.830	N/A	N/A
	Left Side	0.346	N/A	0.346	N/A	N/A
	Right Side	0.332	0.167	0.499	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.343	N/A	0.343	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	Bluetooth			
Head	Left Cheek	0.144	0.334	0.477	N/A	N/A

	Left Tilt 15 Degree	0.072	0.334	0.405	N/A	N/A
	Right Cheek	0.117	0.334	0.451	N/A	N/A
	Right Tilt 15 Degree	0.057	0.334	0.390	N/A	N/A
Body-Worn	Front Side	0.103	0.167	0.270	N/A	N/A
	Back Side	0.123	0.167	0.290	N/A	N/A
Hotspot	Front Side	0.103	0.167	0.270	N/A	N/A
	Back Side	0.123	0.167	0.290	N/A	N/A
	Left Side	0.089	N/A	0.089	N/A	N/A
	Right Side	0.106	0.167	0.273	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.083	N/A	0.083	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	Bluetooth			
Head	Left Cheek	0.146	0.334	0.480	N/A	N/A
	Left Tilt 15 Degree	0.080	0.334	0.413	N/A	N/A
	Right Cheek	0.118	0.334	0.452	N/A	N/A
	Right Tilt 15 Degree	0.062	0.334	0.396	N/A	N/A
Body-Worn	Front Side	0.192	0.167	0.358	N/A	N/A
	Back Side	0.248	0.167	0.415	N/A	N/A
Hotspot	Front Side	0.192	0.167	0.358	N/A	N/A
	Back Side	0.248	0.167	0.415	N/A	N/A
	Left Side	0.204	N/A	0.204	N/A	N/A
	Right Side	0.183	0.167	0.350	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.227	N/A	0.227	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	Bluetooth			
Head	Left Cheek	0.163	0.334	0.497	N/A	N/A
	Left Tilt 15 Degree	0.075	0.334	0.409	N/A	N/A
	Right Cheek	0.146	0.334	0.480	N/A	N/A
	Right Tilt 15 Degree	0.068	0.334	0.402	N/A	N/A
Body-Worn	Front Side	0.158	0.167	0.325	N/A	N/A
	Back Side	0.385	0.167	0.552	N/A	N/A

Hotspot	Front Side	0.158	0.167	0.325	N/A	N/A
	Back Side	0.385	0.167	0.552	N/A	N/A
	Left Side	0.148	N/A	0.148	N/A	N/A
	Right Side	0.135	0.167	0.302	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.138	N/A	0.138	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	Bluetooth			
Head	Left Cheek	0.140	0.334	0.473	N/A	N/A
	Left Tilt 15 Degree	0.073	0.334	0.407	N/A	N/A
	Right Cheek	0.106	0.334	0.440	N/A	N/A
	Right Tilt 15 Degree	0.057	0.334	0.390	N/A	N/A
Body-Worn	Front Side	0.148	0.167	0.314	N/A	N/A
	Back Side	0.173	0.167	0.340	N/A	N/A
Hotspot	Front Side	0.148	0.167	0.314	N/A	N/A
	Back Side	0.173	0.167	0.340	N/A	N/A
	Left Side	0.142	N/A	0.142	N/A	N/A
	Right Side	0.153	0.167	0.320	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.129	N/A	0.129	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	Bluetooth			
Head	Left Cheek	0.124	0.334	0.458	N/A	N/A
	Left Tilt 15 Degree	0.066	0.334	0.400	N/A	N/A
	Right Cheek	0.100	0.334	0.434	N/A	N/A
	Right Tilt 15 Degree	0.053	0.334	0.387	N/A	N/A
Body-Worn	Front Side	0.127	0.167	0.294	N/A	N/A
	Back Side	0.154	0.167	0.320	N/A	N/A
Hotspot	Front Side	0.127	0.167	0.294	N/A	N/A
	Back Side	0.154	0.167	0.320	N/A	N/A
	Left Side	0.122	N/A	0.122	N/A	N/A
	Right Side	0.135	0.167	0.302	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.109	N/A	0.109	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	Bluetooth			
Head	Left Cheek	0.141	0.334	0.475	N/A	N/A
	Left Tilt 15 Degree	0.080	0.334	0.414	N/A	N/A
	Right Cheek	0.122	0.334	0.456	N/A	N/A
	Right Tilt 15 Degree	0.069	0.334	0.403	N/A	N/A
Body-Worn	Front Side	0.121	0.167	0.288	N/A	N/A
	Back Side	0.335	0.167	0.502	N/A	N/A
Hotspot	Front Side	0.121	0.167	0.288	N/A	N/A
	Back Side	0.335	0.167	0.502	N/A	N/A
	Left Side	0.118	N/A	0.118	N/A	N/A
	Right Side	0.107	0.167	0.273	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.098	N/A	0.098	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	Bluetooth			
Head	Left Cheek	0.153	0.334	0.486	N/A	N/A
	Left Tilt 15 Degree	0.072	0.334	0.405	N/A	N/A
	Right Cheek	0.135	0.334	0.469	N/A	N/A
	Right Tilt 15 Degree	0.059	0.334	0.393	N/A	N/A
Body-Worn	Front Side	0.072	0.167	0.238	N/A	N/A
	Back Side	0.192	0.167	0.359	N/A	N/A
Hotspot	Front Side	0.072	0.167	0.238	N/A	N/A
	Back Side	0.192	0.167	0.359	N/A	N/A
	Left Side	0.082	N/A	0.082	N/A	N/A
	Right Side	0.059	0.167	0.226	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.049	N/A	0.049	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	Bluetooth			
Head	Left Cheek	0.121	0.334	0.455	N/A	N/A
	Left Tilt 15 Degree	0.050	0.334	0.383	N/A	N/A
	Right Cheek	0.090	0.334	0.424	N/A	N/A

	Right Tilt 15 Degree	0.032	0.334	0.365	N/A	N/A
Body-Worn	Front Side	0.126	0.167	0.293	N/A	N/A
	Back Side	0.264	0.167	0.430	N/A	N/A
Hotspot	Front Side	0.126	0.167	0.293	N/A	N/A
	Back Side	0.264	0.167	0.430	N/A	N/A
	Left Side	0.088	N/A	0.088	N/A	N/A
	Right Side	0.102	0.167	0.269	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.077	N/A	0.077	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 13	Bluetooth			
Head	Left Cheek	0.081	0.334	0.414	N/A	N/A
	Left Tilt 15 Degree	0.040	0.334	0.373	N/A	N/A
	Right Cheek	0.075	0.334	0.409	N/A	N/A
	Right Tilt 15 Degree	0.032	0.334	0.365	N/A	N/A
Body-Worn	Front Side	0.242	0.167	0.409	N/A	N/A
	Back Side	0.367	0.167	0.534	N/A	N/A
Hotspot	Front Side	0.242	0.167	0.409	N/A	N/A
	Back Side	0.367	0.167	0.534	N/A	N/A
	Left Side	0.259	N/A	0.259	N/A	N/A
	Right Side	0.225	0.167	0.392	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.210	N/A	0.210	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 13 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	Bluetooth			
Head	Left Cheek	0.117	0.334	0.451	N/A	N/A
	Left Tilt 15 Degree	0.051	0.334	0.385	N/A	N/A
	Right Cheek	0.071	0.334	0.405	N/A	N/A
	Right Tilt 15 Degree	0.033	0.334	0.366	N/A	N/A
Body-Worn	Front Side	0.126	0.167	0.292	N/A	N/A
	Back Side	0.255	0.167	0.422	N/A	N/A
Hotspot	Front Side	0.126	0.167	0.292	N/A	N/A
	Back Side	0.255	0.167	0.422	N/A	N/A

	Left Side	0.159	N/A	0.159	N/A	N/A
	Right Side	0.144	0.167	0.311	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.135	N/A	0.135	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 66	Bluetooth			
Head	Left Cheek	0.126	0.334	0.459	N/A	N/A
	Left Tilt 15 Degree	0.073	0.334	0.406	N/A	N/A
	Right Cheek	0.105	0.334	0.438	N/A	N/A
	Right Tilt 15 Degree	0.052	0.334	0.385	N/A	N/A
Body-Worn	Front Side	0.124	0.167	0.291	N/A	N/A
	Back Side	0.153	0.167	0.320	N/A	N/A
Hotspot	Front Side	0.124	0.167	0.291	N/A	N/A
	Back Side	0.153	0.167	0.320	N/A	N/A
	Left Side	0.129	N/A	0.129	N/A	N/A
	Right Side	0.120	0.167	0.287	N/A	N/A
	Top Side	N/A	0.167	0.167	N/A	N/A
	Bottom Side	0.104	N/A	0.104	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 66 and Bluetooth.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID750 - Head
MEASUREMENT 2 System Performance Check - SID750 - Body
MEASUREMENT 3 System Performance Check - SID835 - Head
MEASUREMENT 4 System Performance Check - SID835 - Body
MEASUREMENT 5 System Performance Check - SID1800 - Head
MEASUREMENT 6 System Performance Check - SID1800 - Body
MEASUREMENT 7 System Performance Check - SID1900 - Head
MEASUREMENT 8 System Performance Check - SID1900 - Body
MEASUREMENT 9 System Performance Check - SID2450 - Head
MEASUREMENT 10 System Performance Check - SID2450 - Body
MEASUREMENT 11 System Performance Check - SID2600 - Head
MEASUREMENT 12 System Performance Check - SID2600 - Body
MEASUREMENT 13 System Performance Check - SID5200 - Head
MEASUREMENT 14 System Performance Check - SID5200 - Body
MEASUREMENT 15 System Performance Check - SID5800 - Head
MEASUREMENT 16 System Performance Check - SID5800 - Body

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.171620
Relative permittivity (imaginary part)	22.311263
Conductivity (S/m)	0.923162
Variation (%)	-1.910000

SURFACE SAR

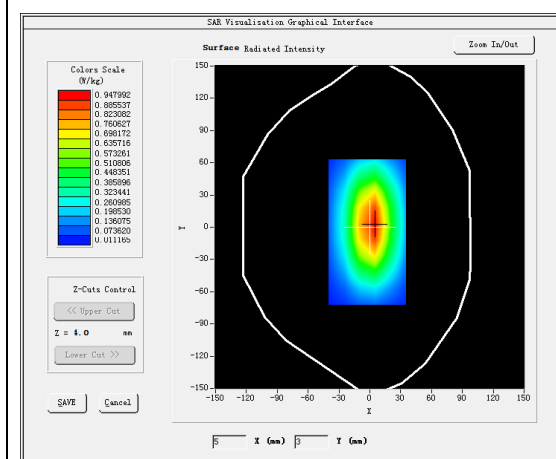



VOLUME SAR

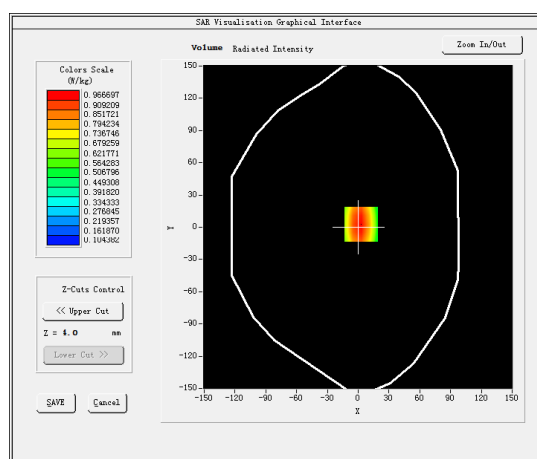

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.549238
SAR 1g (W/Kg)	0.851162

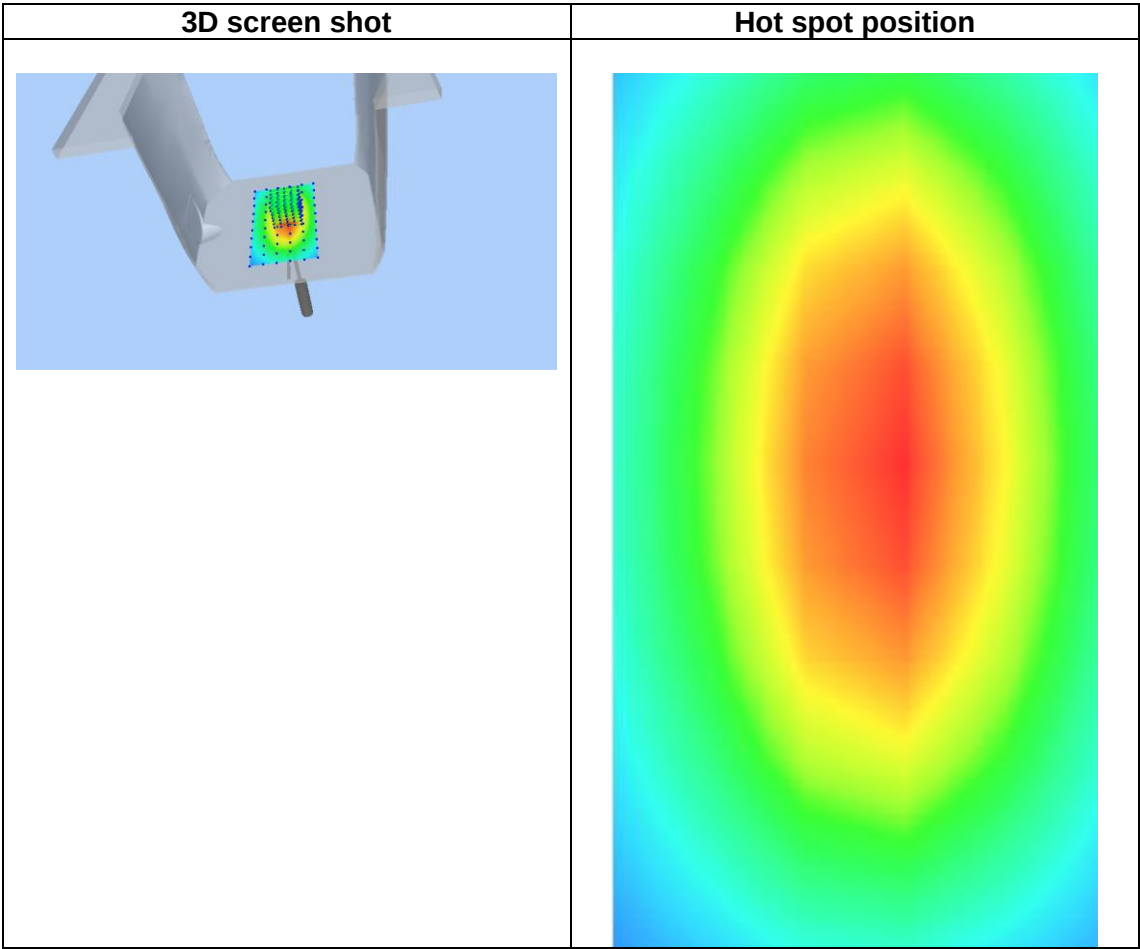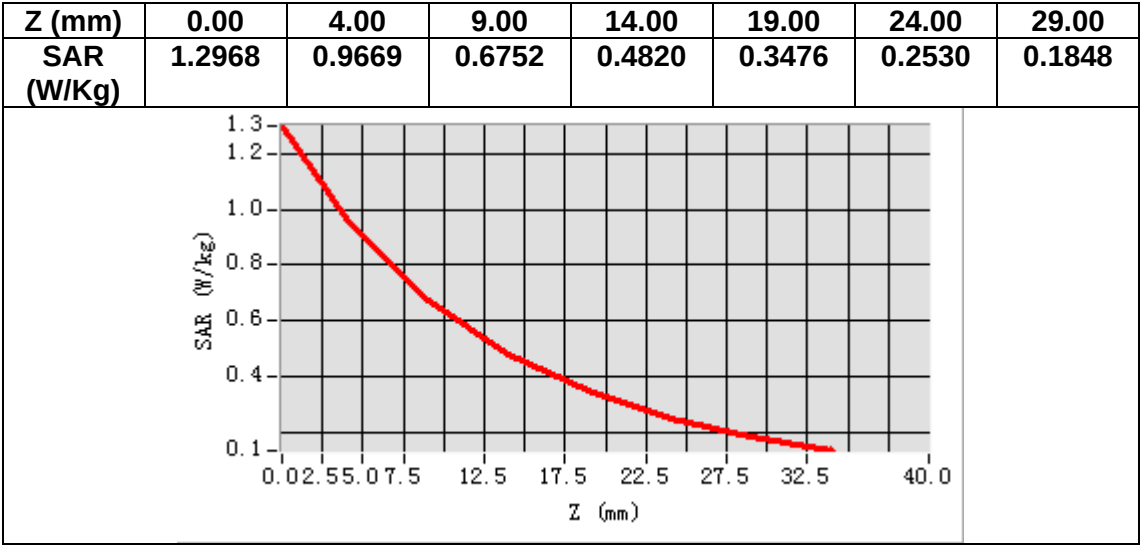

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	55.310248
Relative permittivity (imaginary part)	23.273842
Conductivity (S/m)	0.972518
Variation (%)	1.280000

SURFACE SAR

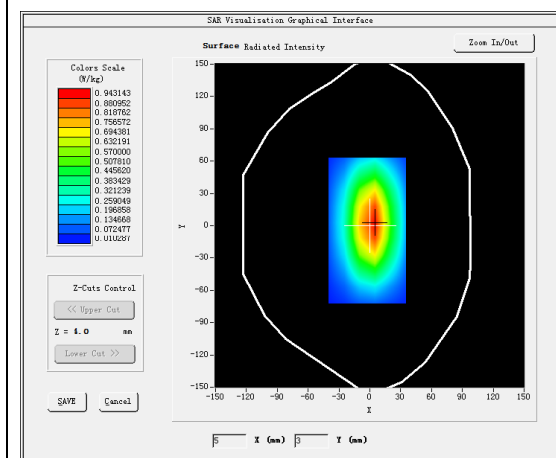

VOLUME SAR

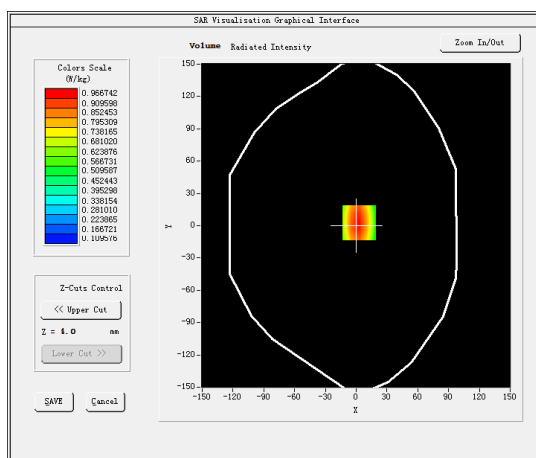

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.588281
SAR 1g (W/Kg)	0.881463

MEASUREMENT 3


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.361241
Relative permittivity (imaginary part)	20.050512
Conductivity (S/m)	0.931642
Variation (%)	1.120000

SURFACE SAR

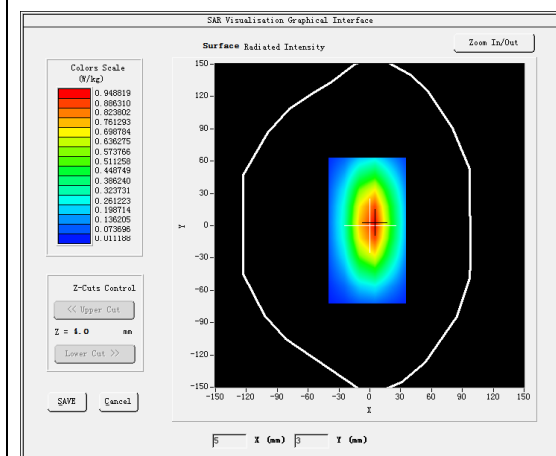



VOLUME SAR

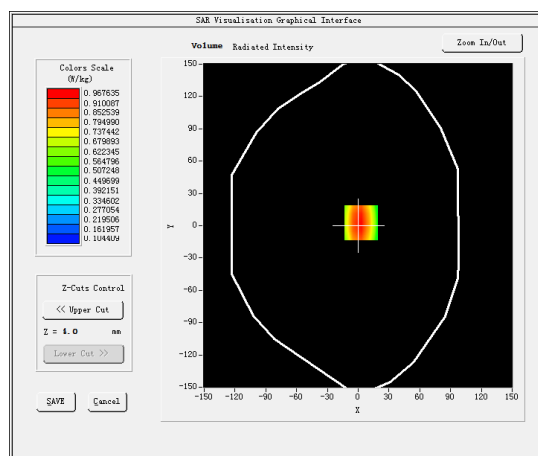

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.607376
SAR 1g (W/Kg)	0.953438

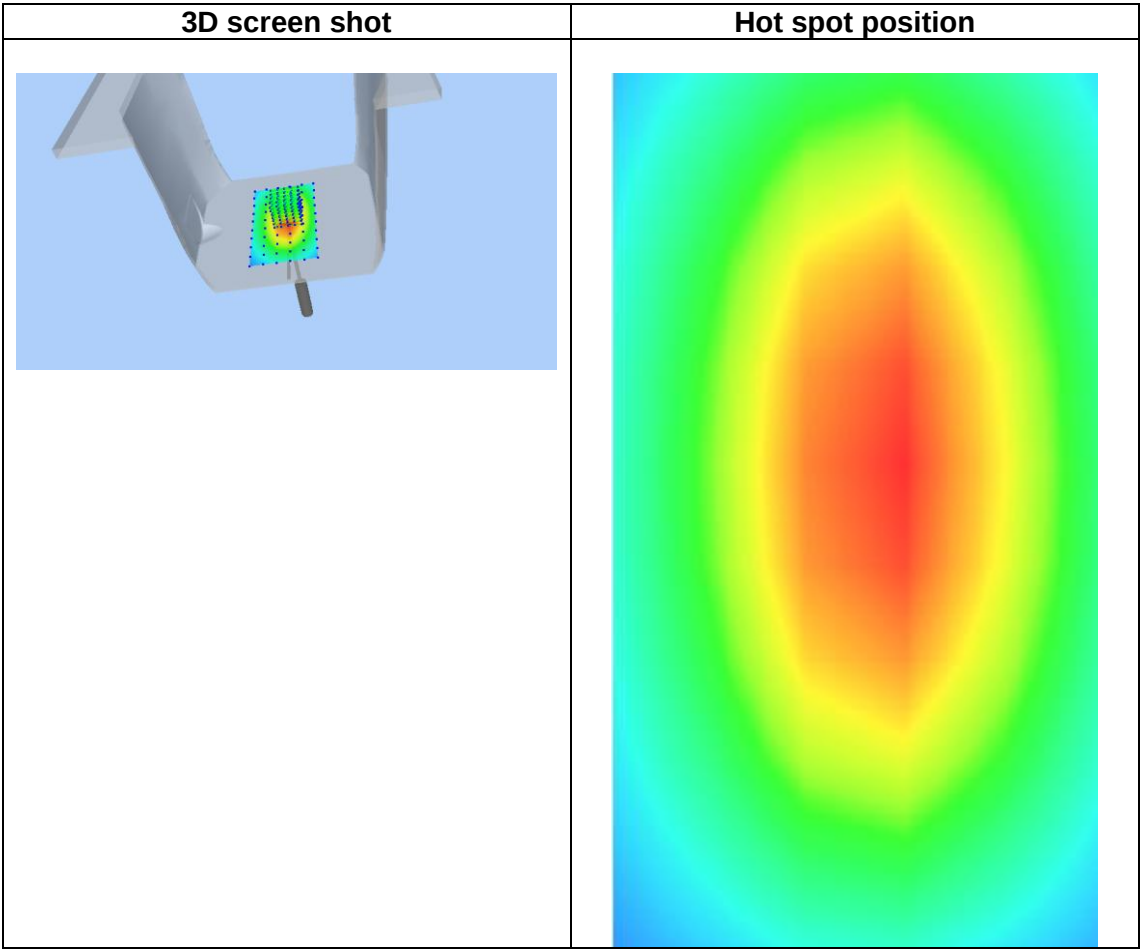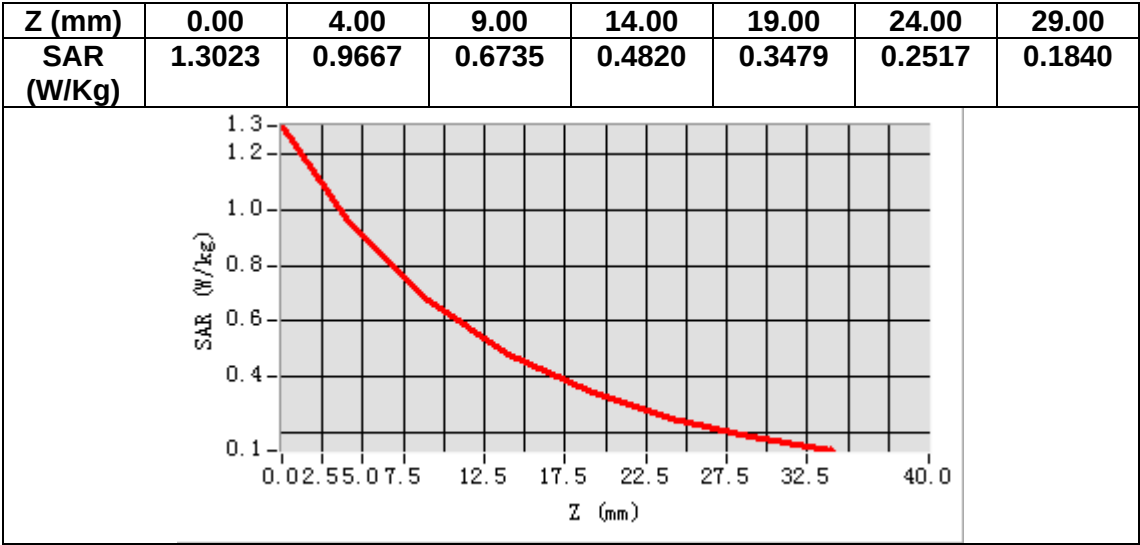

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.362222
Relative permittivity (imaginary part)	21.733419
Conductivity (S/m)	1.011056
Variation (%)	-4.330000

SURFACE SAR

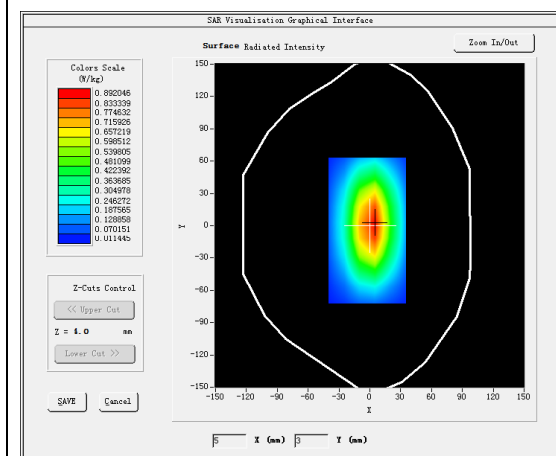



VOLUME SAR

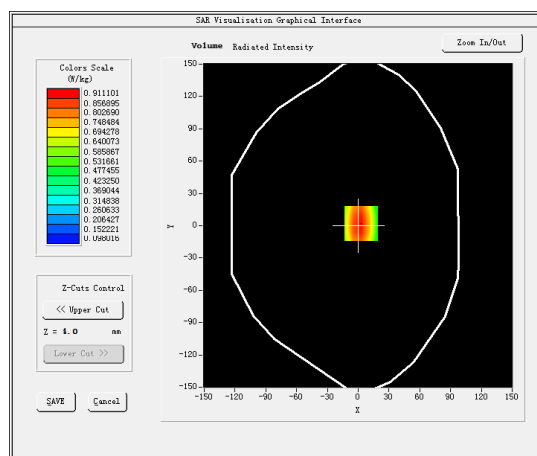

Maximum location: X=3.00, Y=2.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.641102
SAR 1g (W/Kg)	0.982609

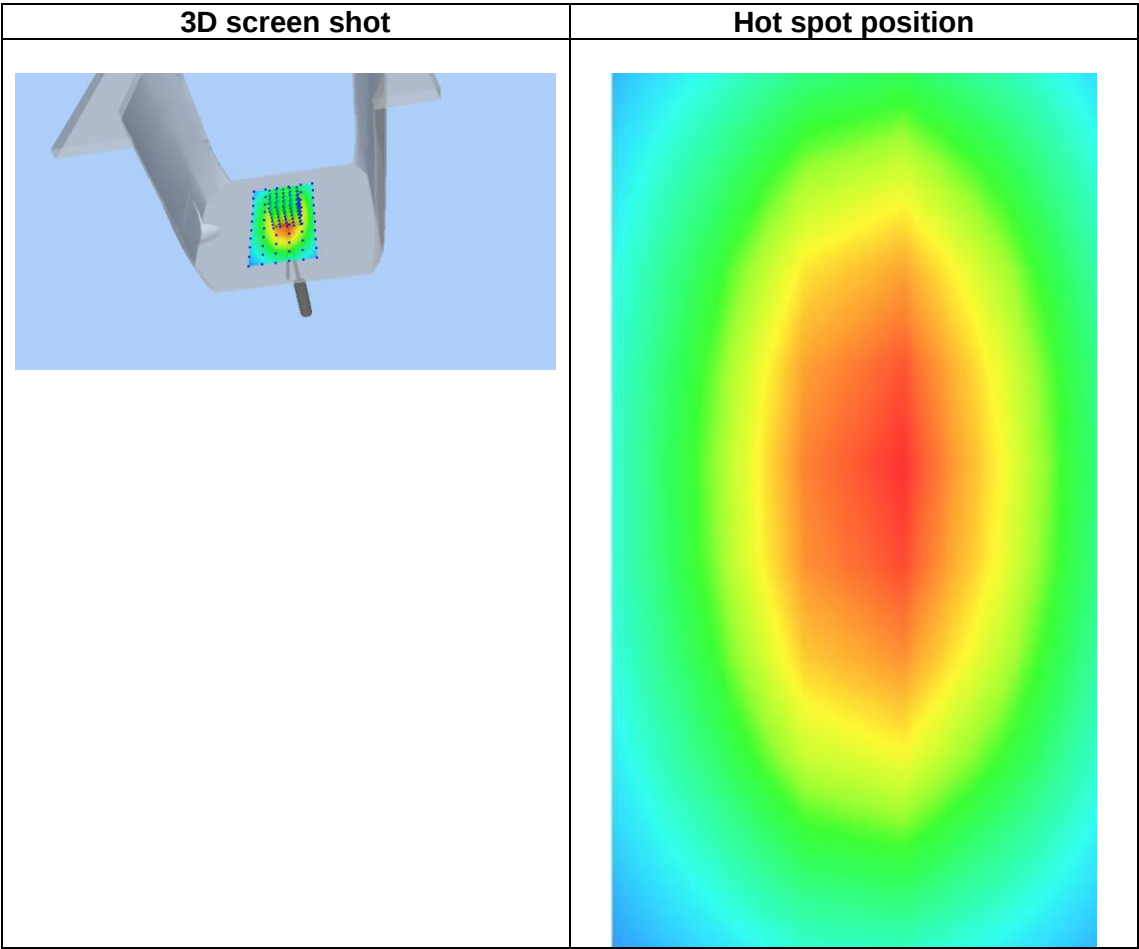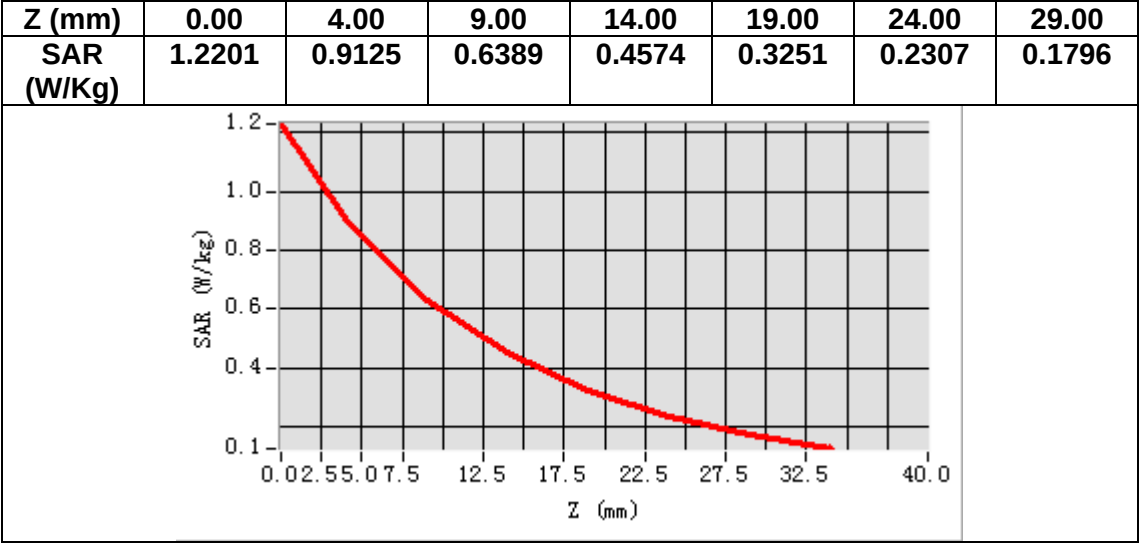

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.471117
Relative permittivity (imaginary part)	14.132429
Conductivity (S/m)	1.412367
Variation (%)	-0.17000

SURFACE SAR

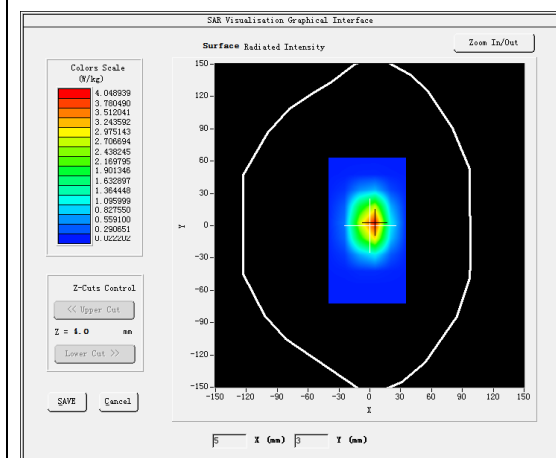



VOLUME SAR

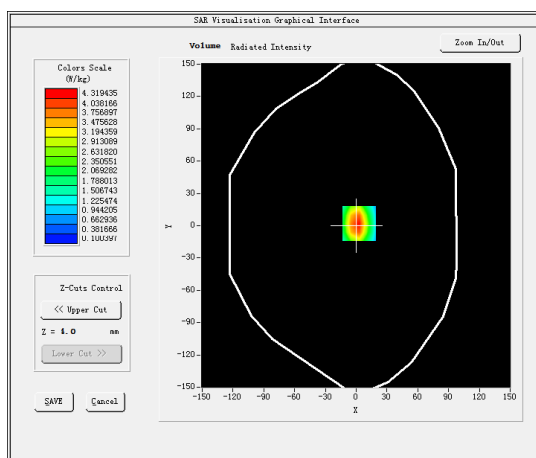

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.001367
SAR 1g (W/Kg)	3.809451

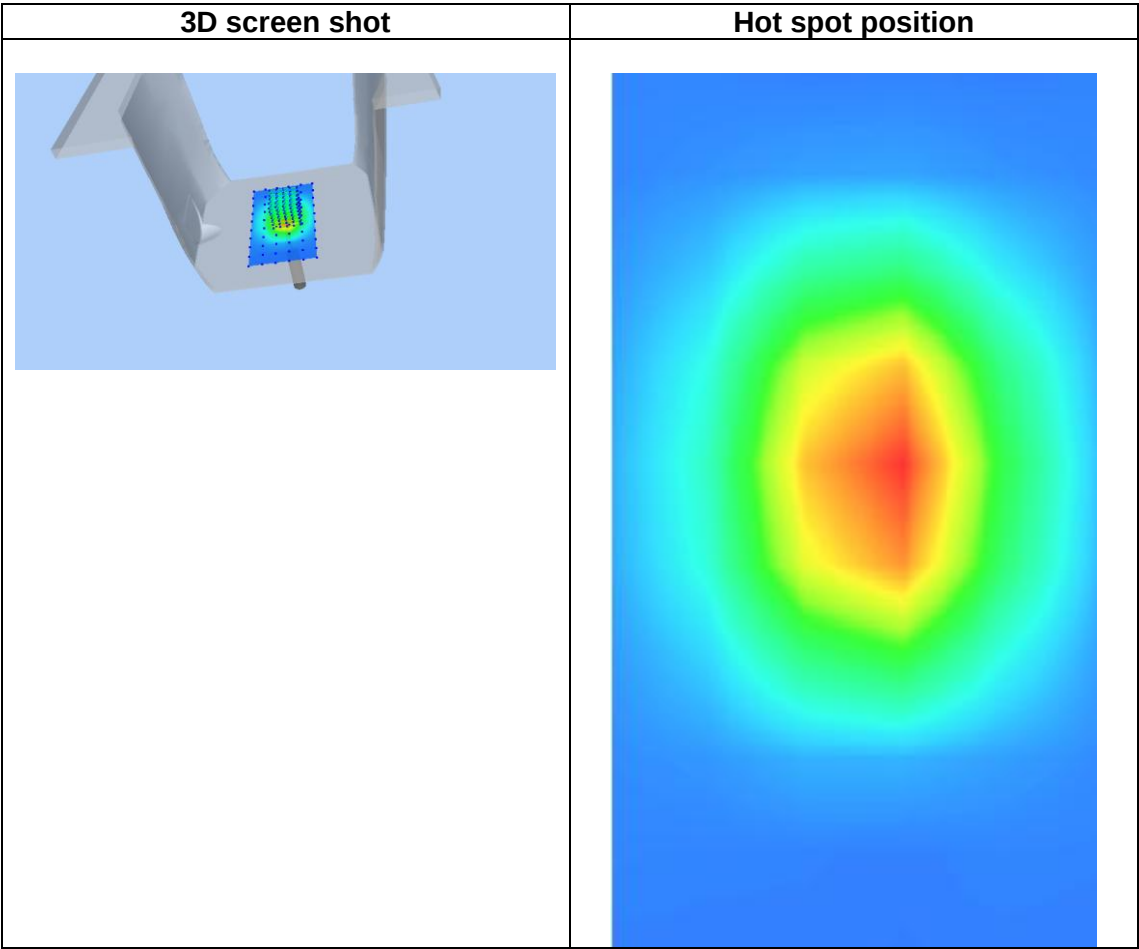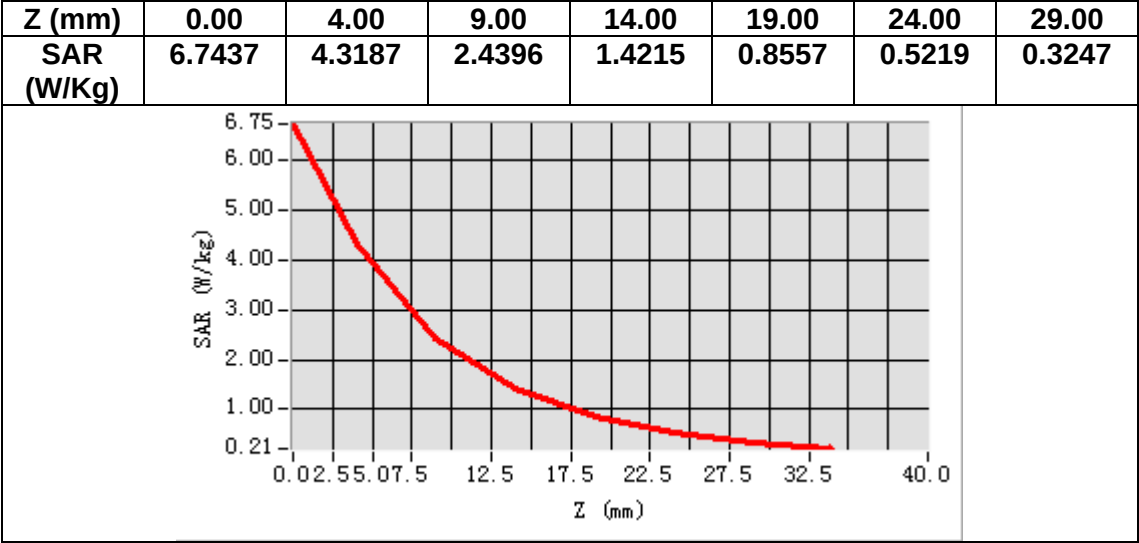

MEASUREMENT 6


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	53.152310
Relative permittivity (imaginary part)	15.670013
Conductivity (S/m)	1.573096
Variation (%)	1.240000

SURFACE SAR

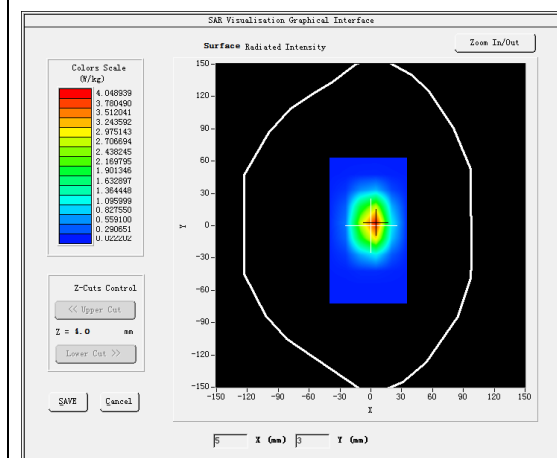



VOLUME SAR

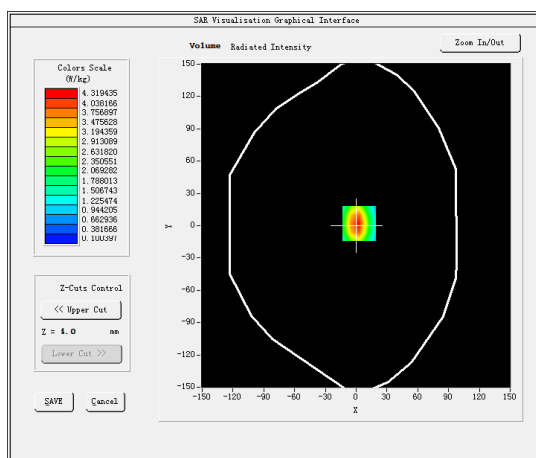

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.059079
SAR 1g (W/Kg)	3.806468

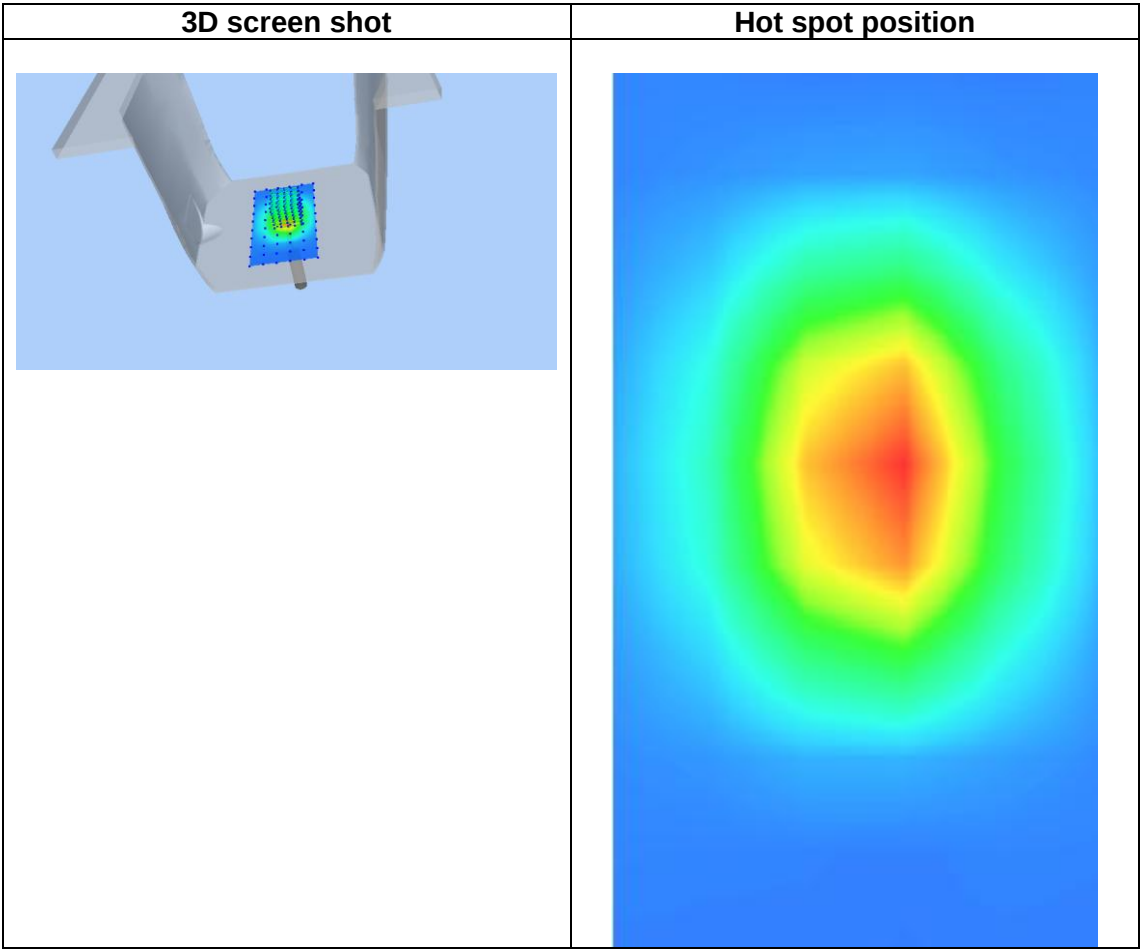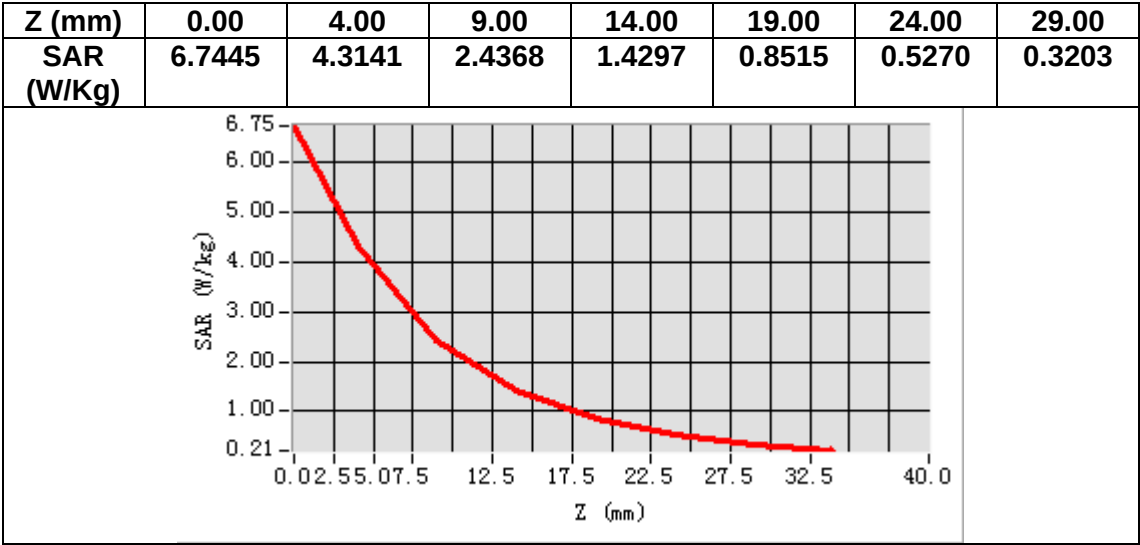

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.893087
Relative permittivity (imaginary part)	13.839000
Conductivity (S/m)	1.462036
Variation (%)	-0.430000

SURFACE SAR

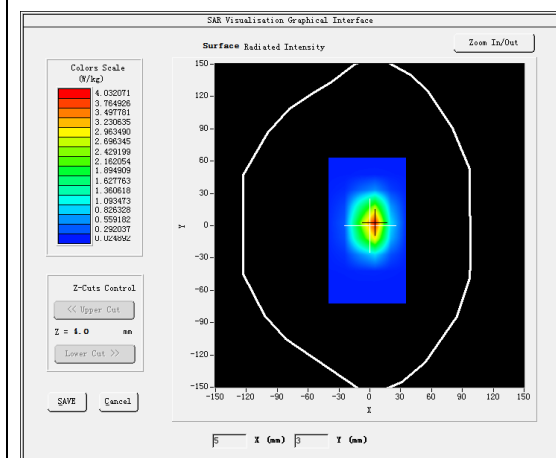

VOLUME SAR

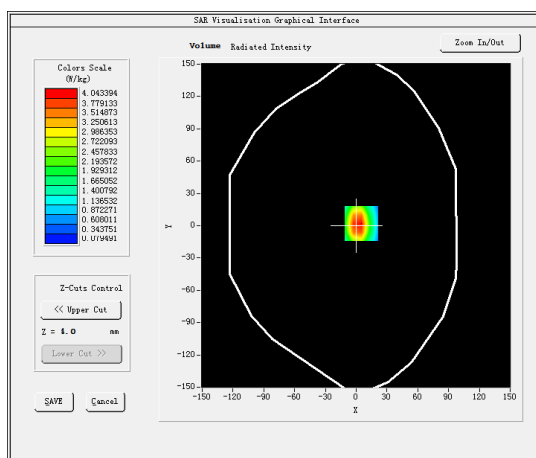


Maximum location: X=5.00, Y=2.00


SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.004456
SAR 1g (W/Kg)	3.886165


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.3288	4.0413	2.2625	1.3010	0.7608	0.4597	0.2715

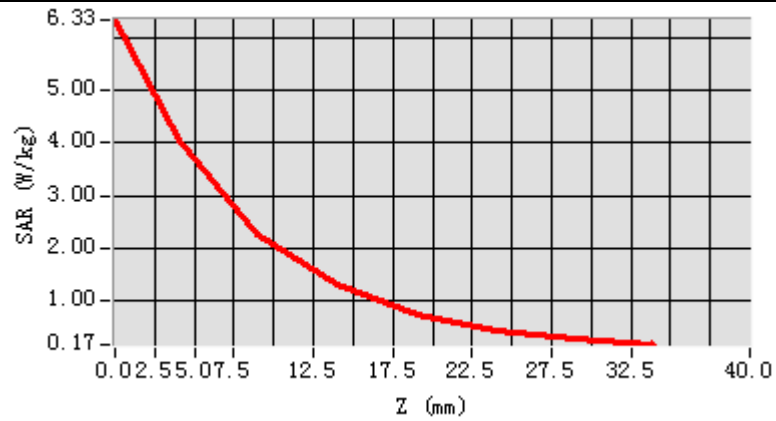

3D screen shot

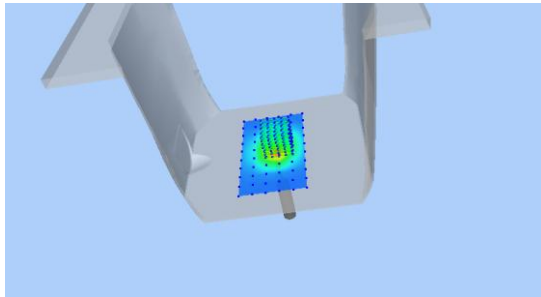

Hot spot position

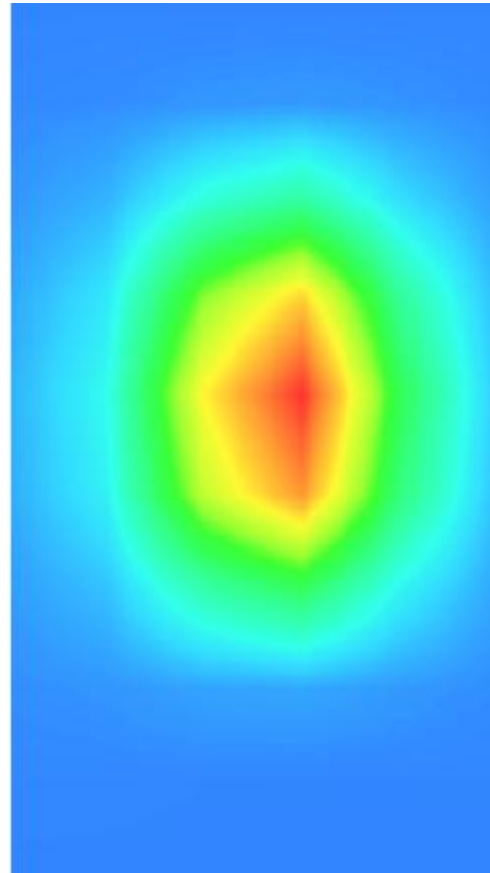

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.483435
Relative permittivity (imaginary part)	14.941103
Conductivity (S/m)	1.580066
Variation (%)	4.660000

SURFACE SAR

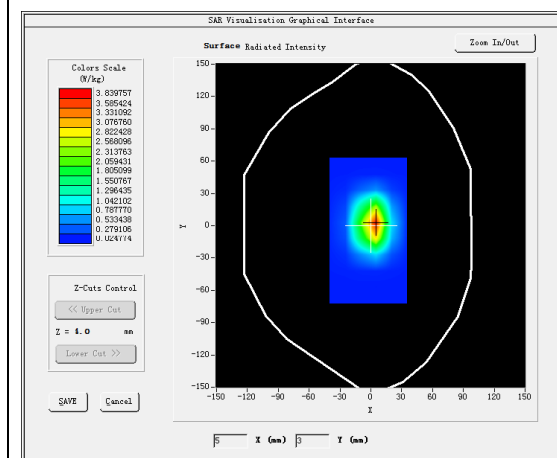




VOLUME SAR

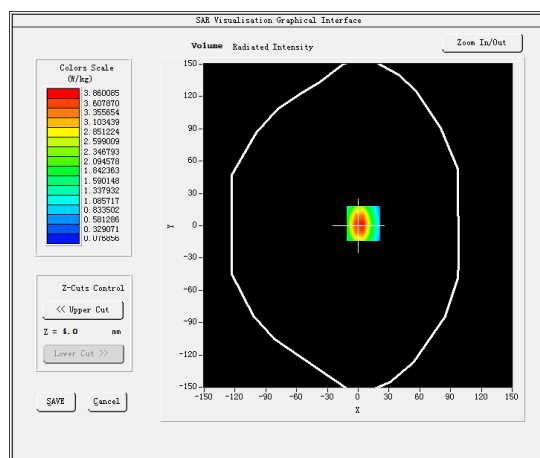

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	2.052019
SAR 1g (W/Kg)	3.899402

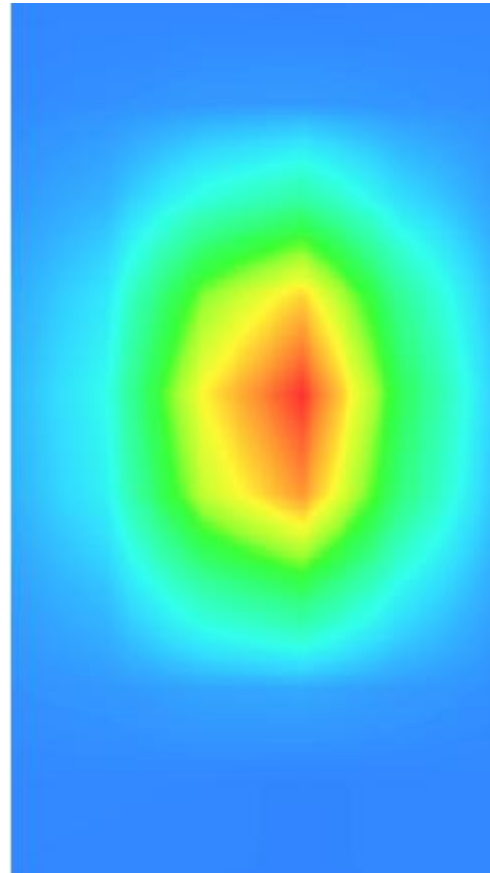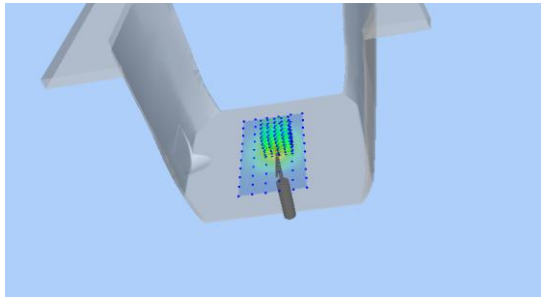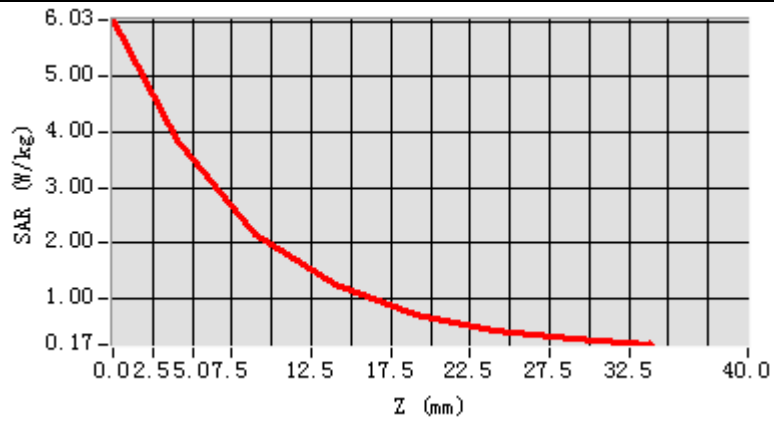

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.941421
Relative permittivity (imaginary part)	13.432631
Conductivity (S/m)	1.792063
Variation (%)	-0.310000

SURFACE SAR

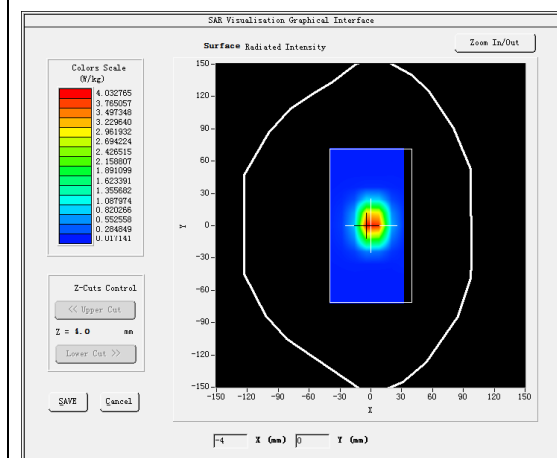

VOLUME SAR

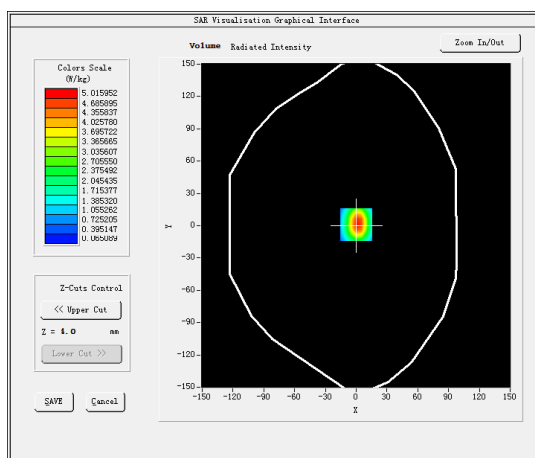


Maximum location: X=0.00, Y=1.00


SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.398275
SAR 1g (W/Kg)	5.374415


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	8.0375	5.0115	2.6968	1.4810	0.8358	0.4678	0.2685

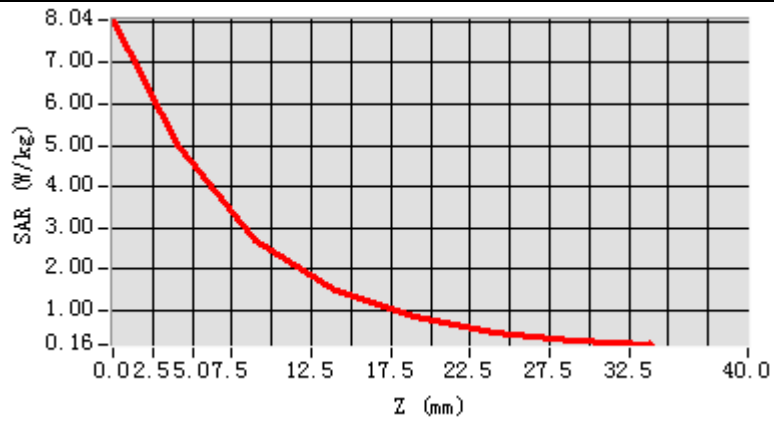

3D screen shot

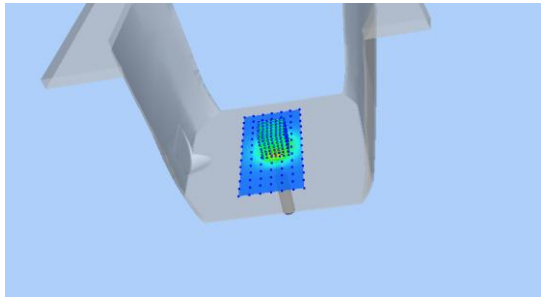

Hot spot position

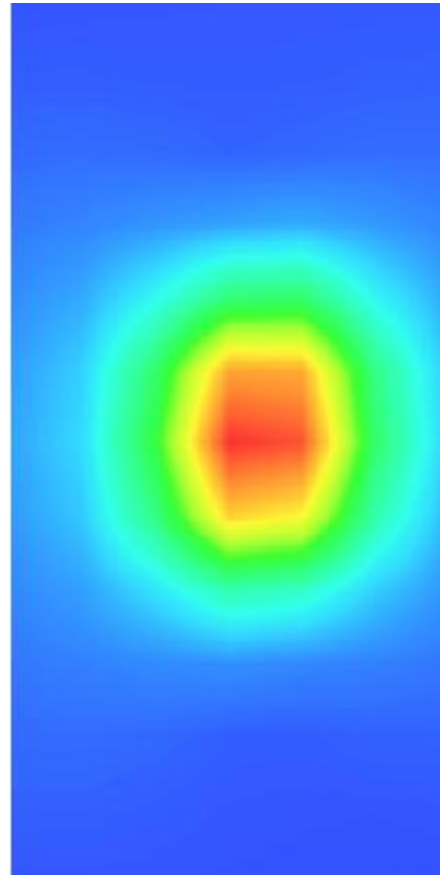

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.183497
Relative permittivity (imaginary part)	14.924266
Conductivity (S/m)	2.031316
Variation (%)	3.020000

SURFACE SAR

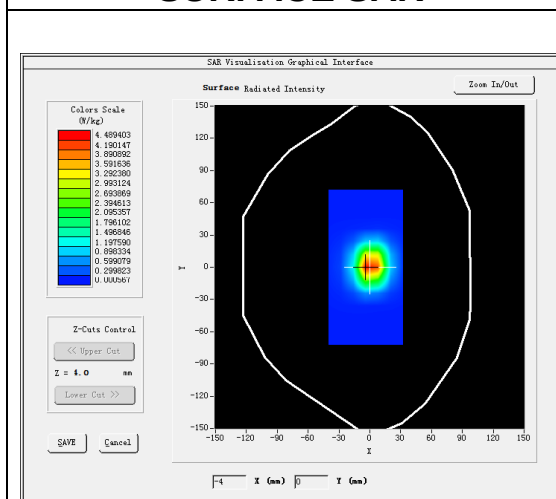



VOLUME SAR

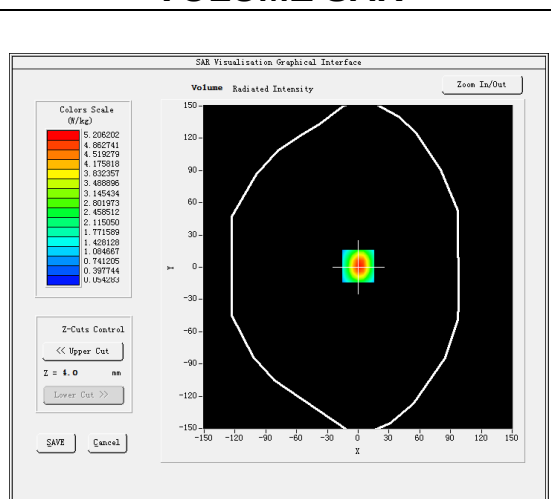

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.46 W/kg

SAR 10g (W/Kg)	2.405285
SAR 1g (W/Kg)	5.278270

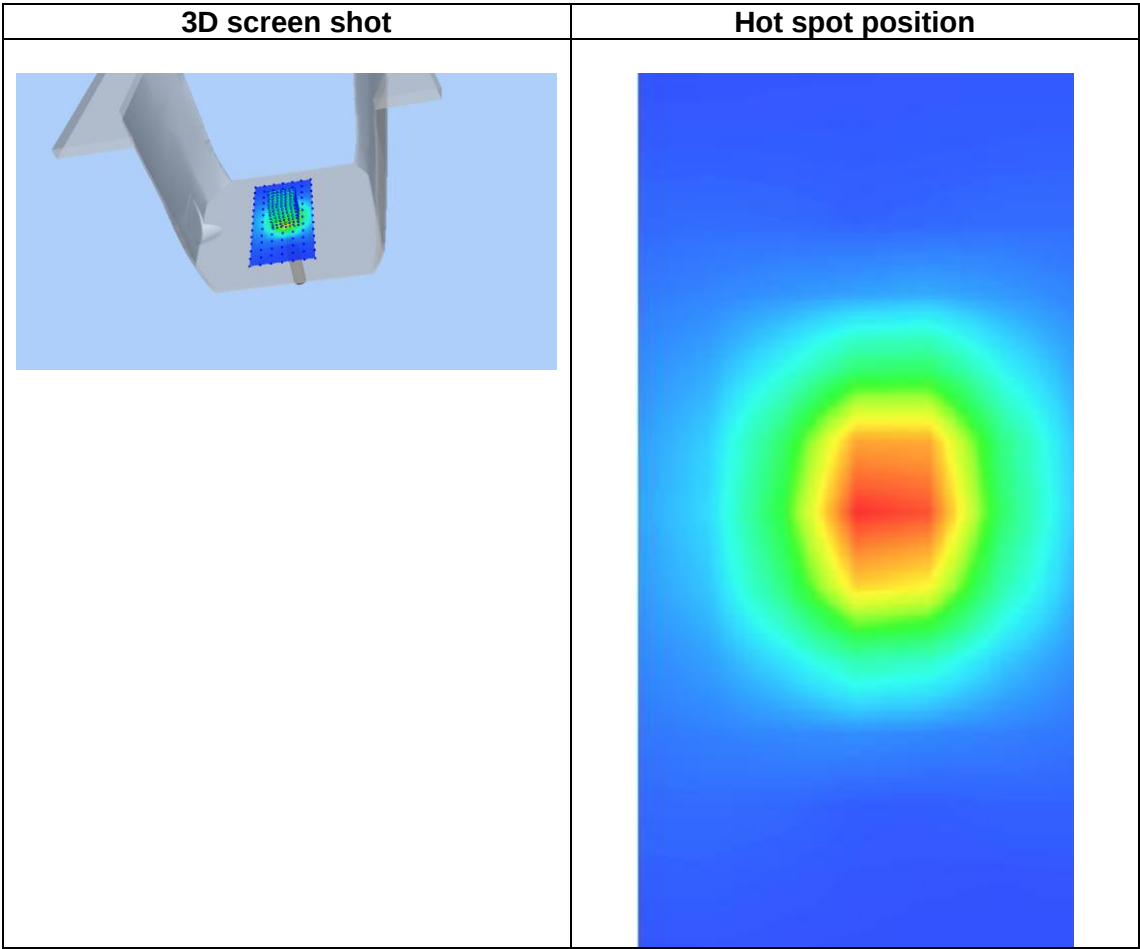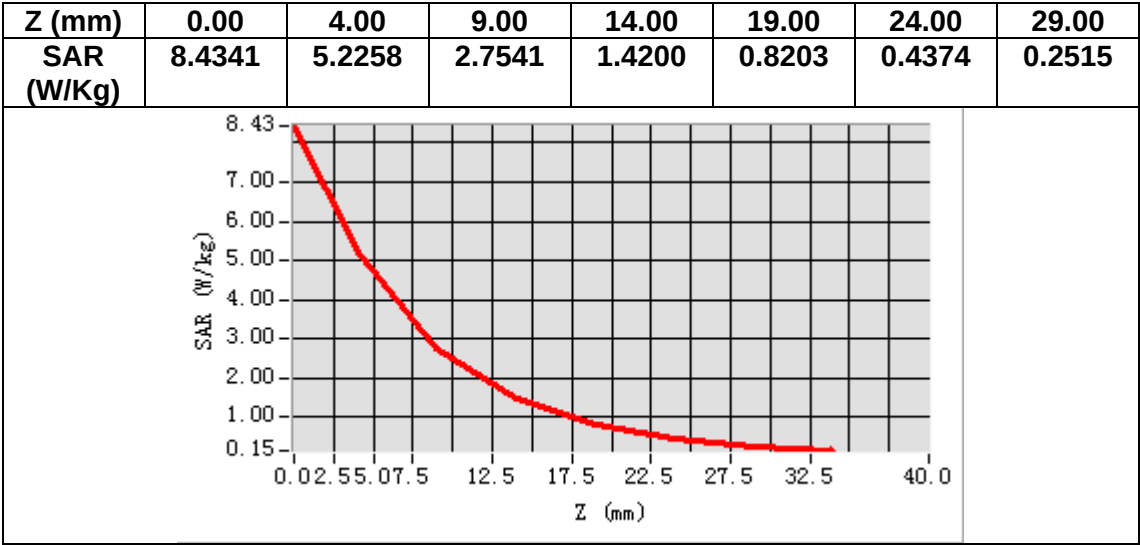

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.382685
Relative permittivity (imaginary part)	14.041997
Conductivity (S/m)	2.029171
Variation (%)	-4.240000

SURFACE SAR

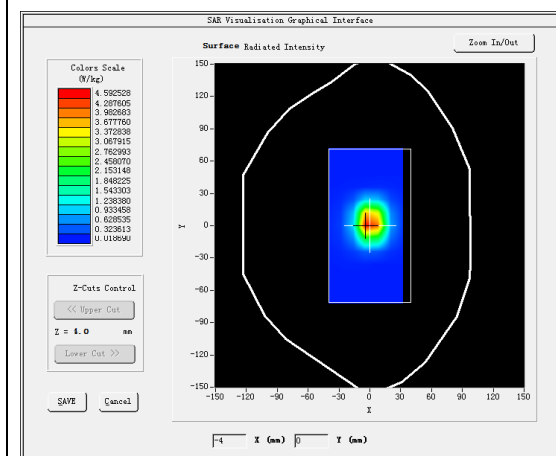



VOLUME SAR

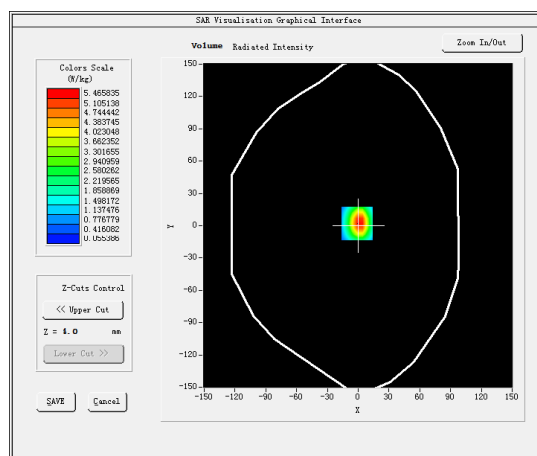

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.469205
SAR 1g (W/Kg)	5.566467

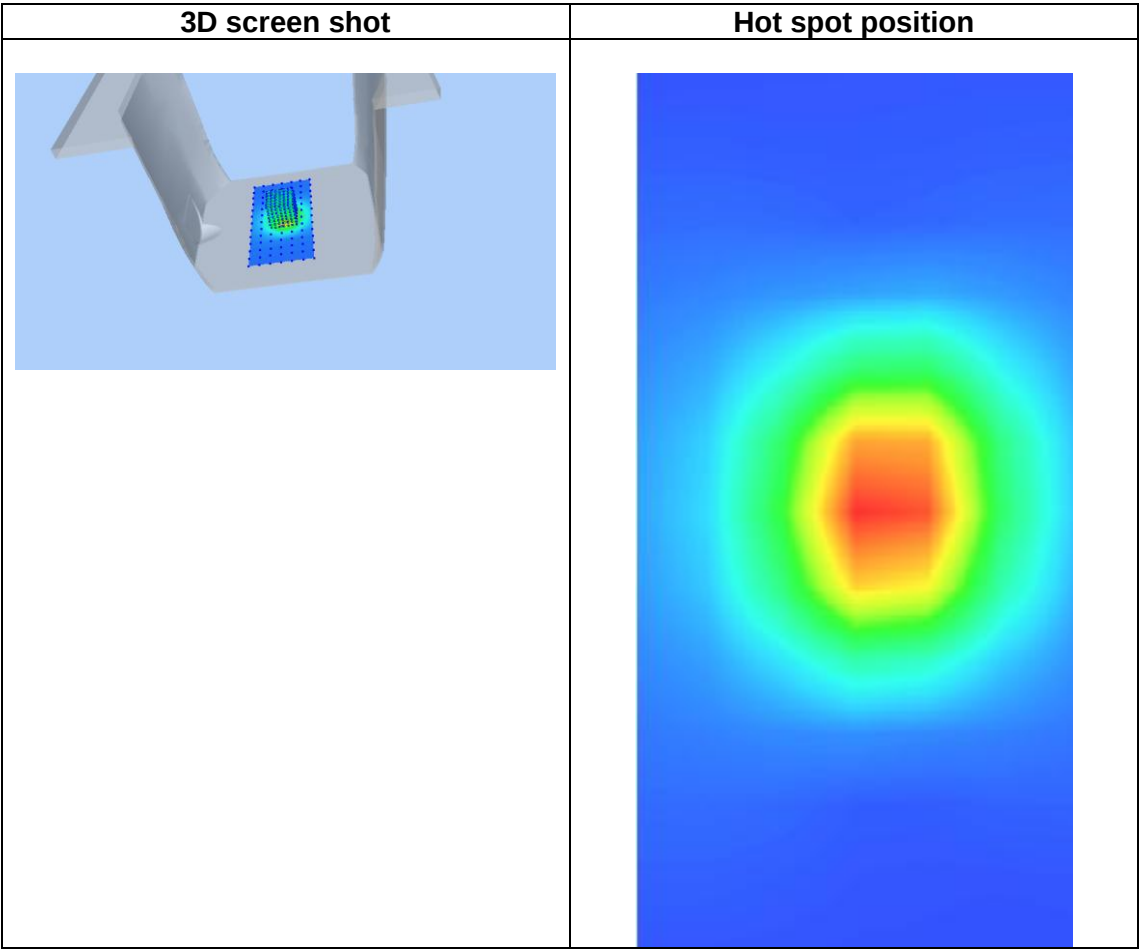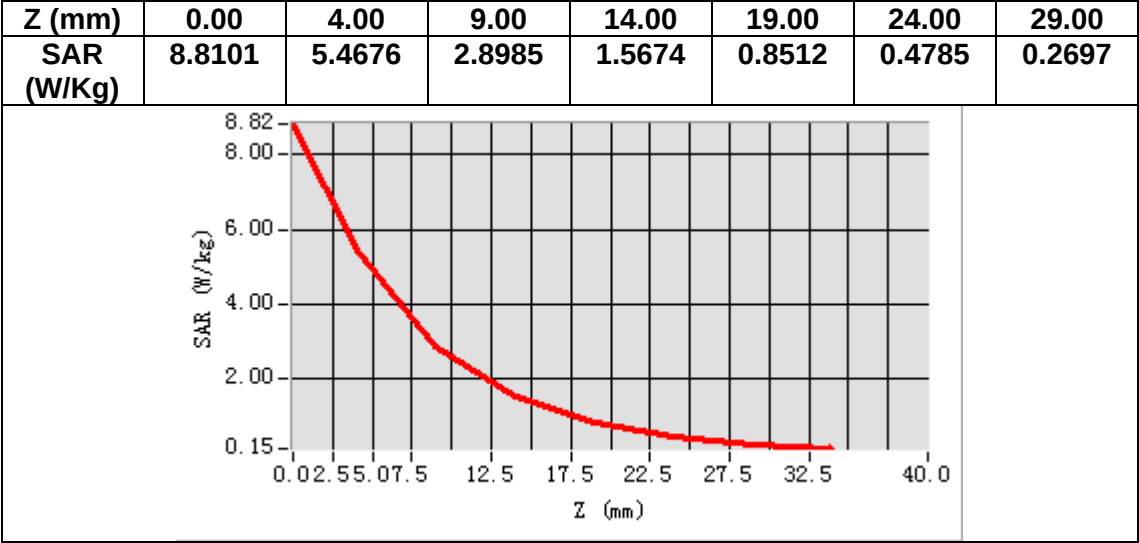

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	52.592766
Relative permittivity (imaginary part)	15.404301
Conductivity (S/m)	2.220475
Variation (%)	-1.330000

SURFACE SAR

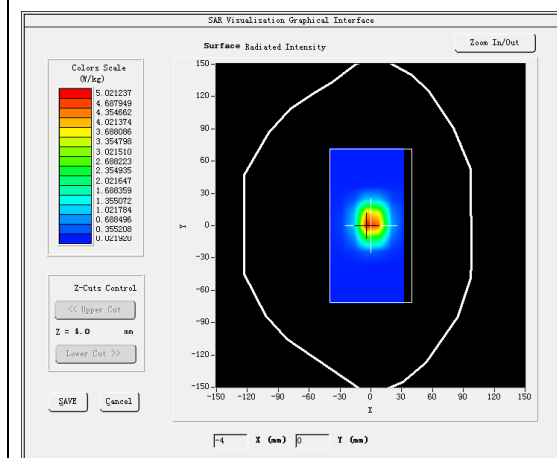



VOLUME SAR

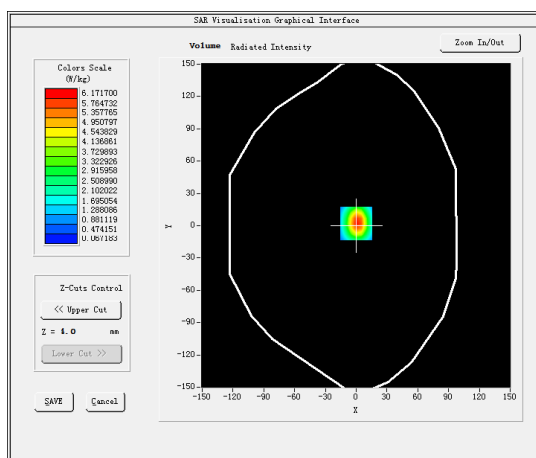

Maximum location: X=0.00, Y=2.00

SAR Peak: 9.99 W/kg

SAR 10g (W/Kg)	2.376314
SAR 1g (W/Kg)	5.240167

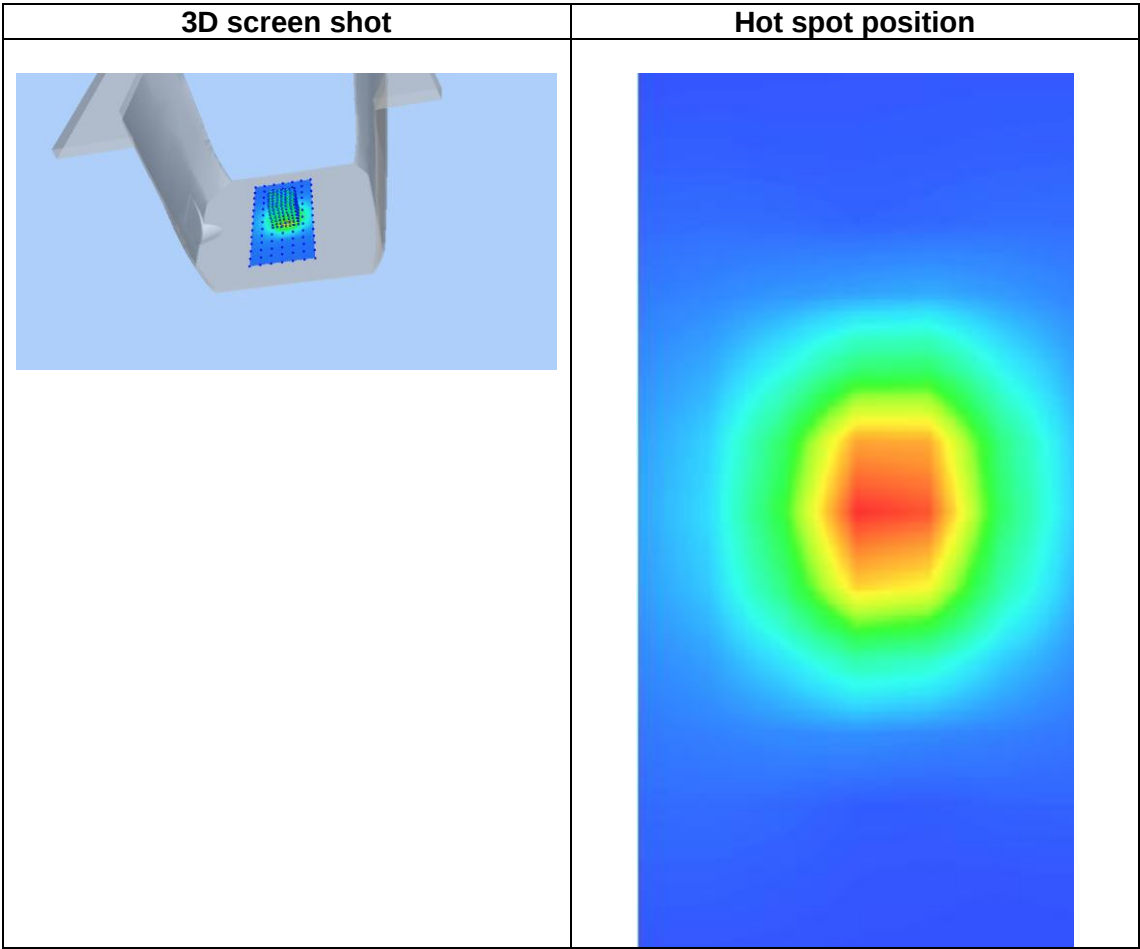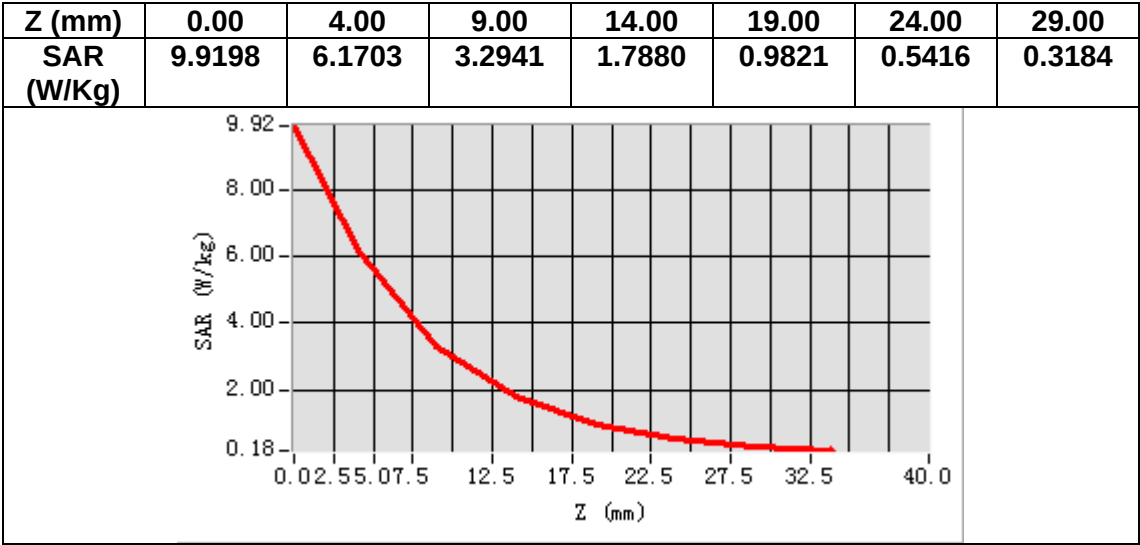

MEASUREMENT 13


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.662314
Relative permittivity (imaginary part)	16.184642
Conductivity (S/m)	4.673321
Variation (%)	4.160000

SURFACE SAR

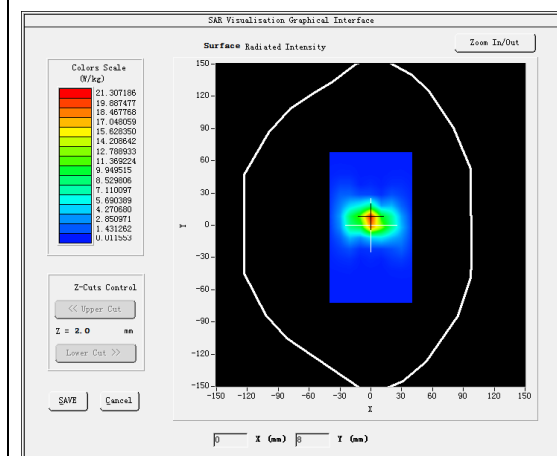

VOLUME SAR

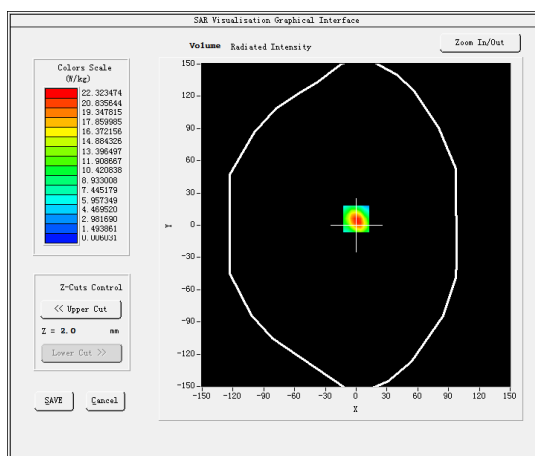


Maximum location: X=0.00, Y=6.00



SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.587495
SAR 1g (W/Kg)	14.999221

Z (mm)	SAR (W/kg)
0	37.84
2	22.00
4	11.00
6	5.00
8	2.50
10	1.00
12	0.50
14	0.25
16	0.10
18	0.05
20	0.03
22	0.02
24	0.02

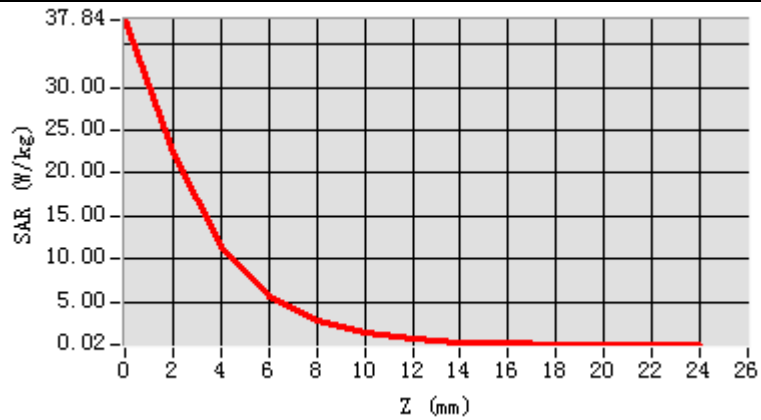

Hot spot position

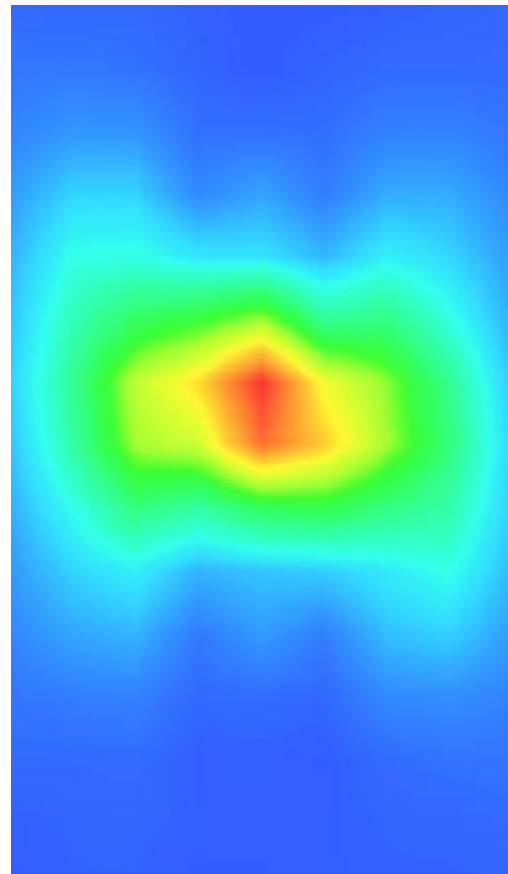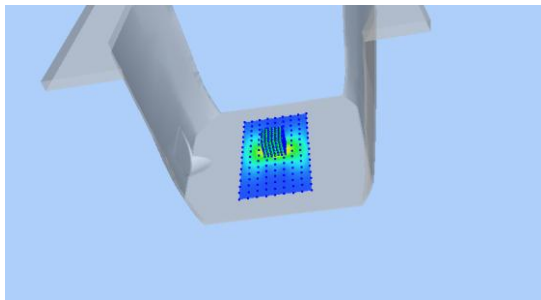

MEASUREMENT 14


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.513284
Relative permittivity (imaginary part)	18.452341
Conductivity (S/m)	5.333842
Variation (%)	1.880000

SURFACE SAR

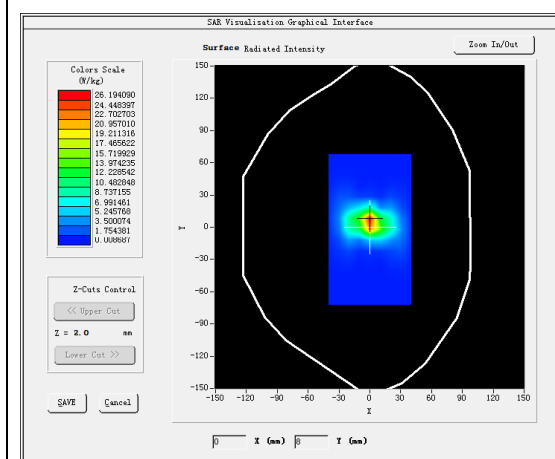

VOLUME SAR


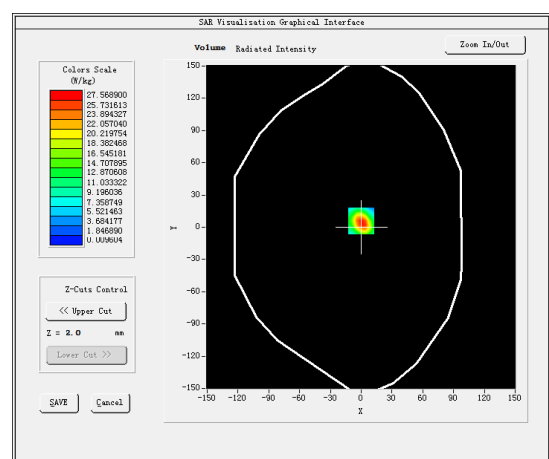


Maximum location: X=0.00, Y=6.00

SAR Peak: 49.61 W/kg

SAR 10g (W/Kg)	5.510484
SAR 1g (W/Kg)	15.674386

Figure 10 is a line graph showing the SAR (W/kg) as a function of Z (mm) for the 100 MHz case. The y-axis represents SAR (W/kg) and ranges from 0.0 to 46.6. The x-axis represents Z (mm) and ranges from 0 to 26. The SAR starts at approximately 46.6 W/kg at Z=0 and decreases rapidly, reaching near zero by Z=12 mm.

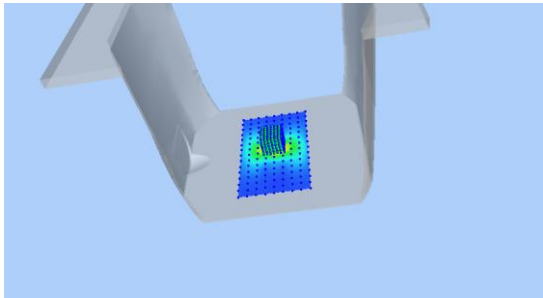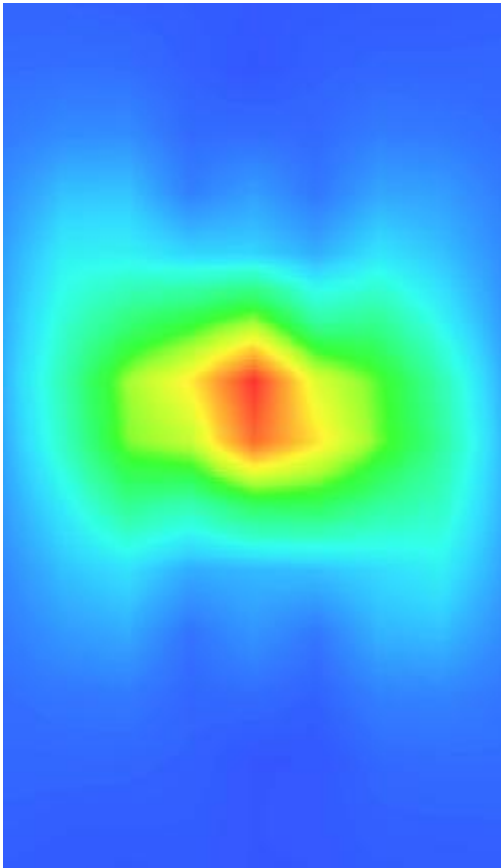3D screen shot	Hot spot position
 A 3D perspective view of a white robotic arm. The gripper at the end of the arm is holding a small, square, blue object. A hot spot visualization is overlaid on the gripper, showing a central red area that transitions through yellow and green to a blue outer edge, indicating a concentration of heat or energy.	 A 2D heatmap visualization of the hot spot position. The image shows a central red area, which is the hottest, surrounded by concentric rings of yellow, green, and blue, indicating decreasing temperature or energy density as the distance from the center increases. The background is a solid blue color.

MEASUREMENT 15


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.590512
Relative permittivity (imaginary part)	16.233152
Conductivity (S/m)	5.230681
Variation (%)	1.210000

SURFACE SAR

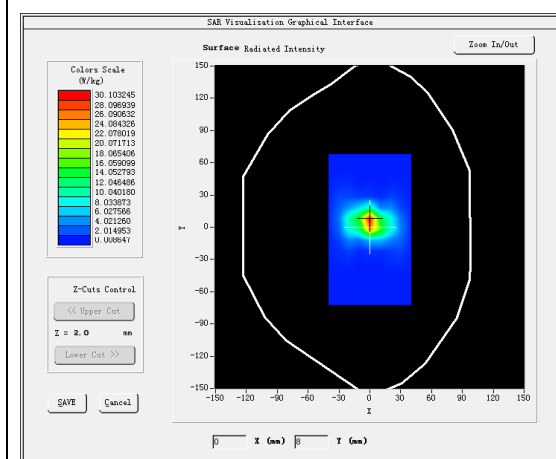



VOLUME SAR

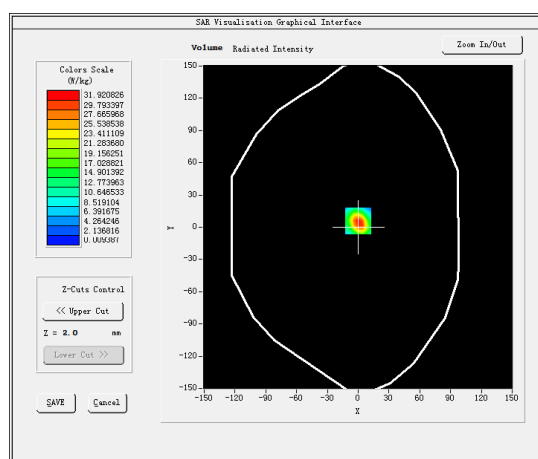

Maximum location: X=0.00, Y=6.00

SAR Peak: 57.37 W/kg

SAR 10g (W/Kg)	6.258495
SAR 1g (W/Kg)	18.400863

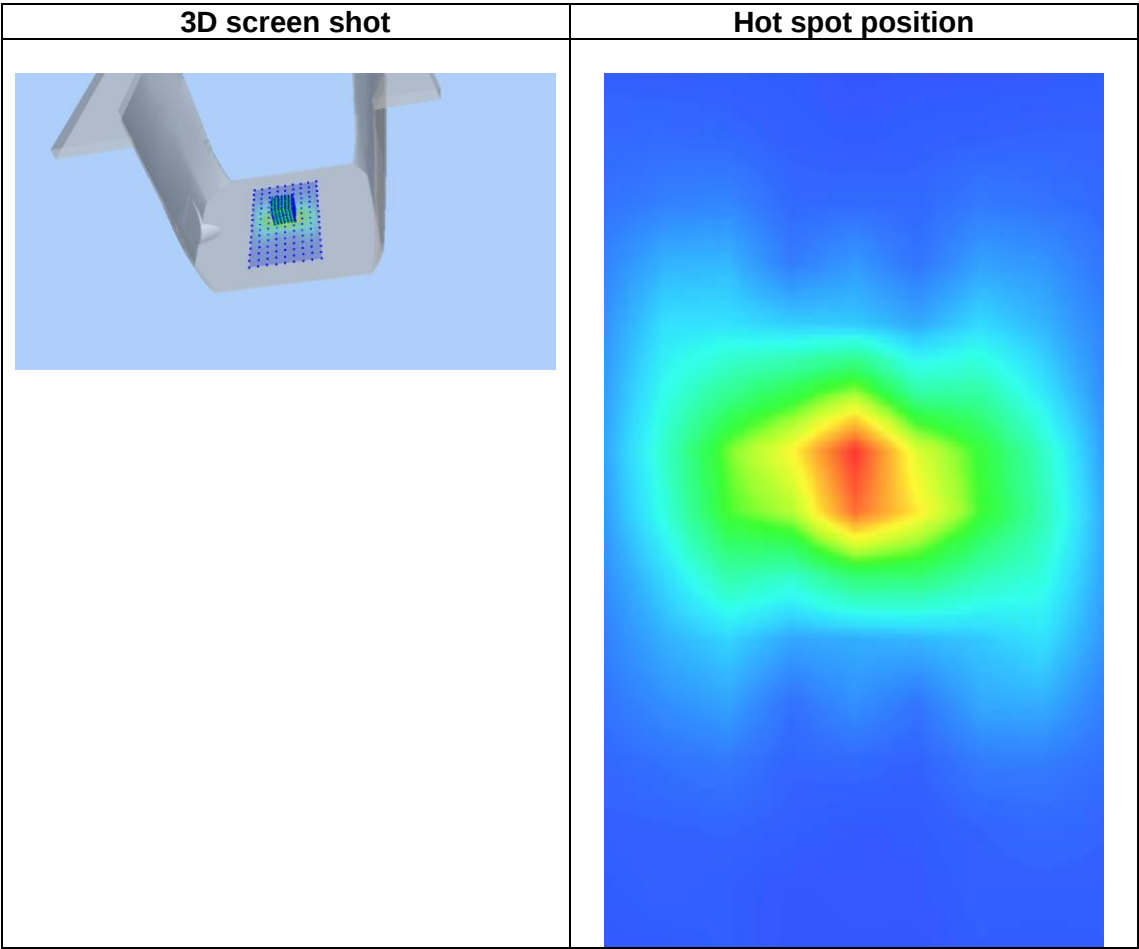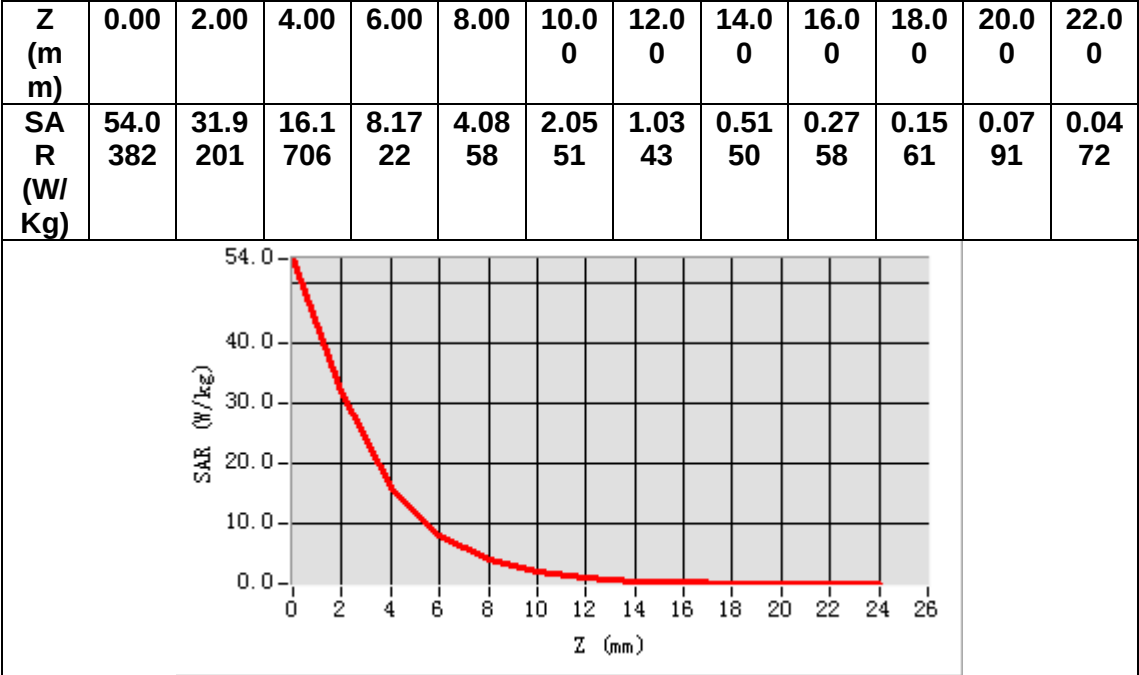

MEASUREMENT 16


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.201323
Relative permittivity (imaginary part)	18.972243
Conductivity (S/m)	6.111524
Variation (%)	-3.140000

SURFACE SAR

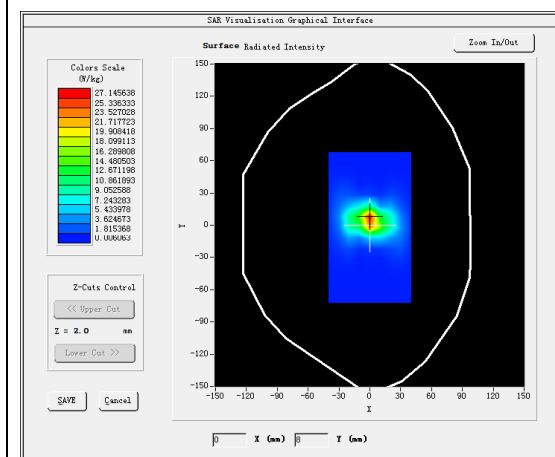

VOLUME SAR

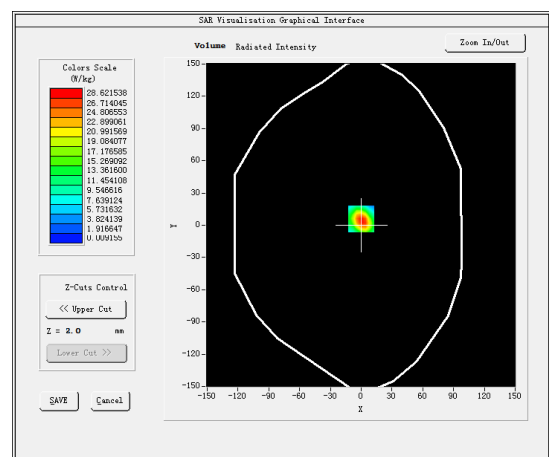

Maximum location: X=0.00, Y=6.00

SAR Peak: 51.30 W/kg

SAR 10g (W/Kg)	5.845384
SAR 1g (W/Kg)	16.914052

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 5 Head
MEASUREMENT 8 WCDMA Band 5 Body
MEASUREMENT 9 WLAN 5.2G Head
MEASUREMENT 10 WLAN 5.8G Head
MEASUREMENT 11 WLAN 5.2G Body
MEASUREMENT 12 WLAN 5.8G Body
MEASUREMENT 13 WLAN 2.4G Head
MEASUREMENT 14 WLAN 2.4G Body
MEASUREMENT 15 LTE Band 2 Head
MEASUREMENT 16 LTE Band 2 Body
MEASUREMENT 17 LTE Band 4 Head
MEASUREMENT 18 LTE Band 4 Body
MEASUREMENT 19 LTE Band 5 Head
MEASUREMENT 20 LTE Band 5 Body
MEASUREMENT 21 LTE Band 7 Head
MEASUREMENT 22 LTE Band 7 Body
MEASUREMENT 23 LTE Band 12 Head
MEASUREMENT 24 LTE Band 12 Body
MEASUREMENT 25 LTE Band 13 Head
MEASUREMENT 26 LTE Band 13 Body
MEASUREMENT 27 LTE Band 17 Head
MEASUREMENT 28 LTE Band 17 Body
MEASUREMENT 29 LTE Band 66 Head
MEASUREMENT 30 LTE Band 66 Body

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.540958
Relative permittivity (imaginary part)	20.071541
Conductivity (S/m)	0.932658
Variation (%)	-1.890000

SURFACE SAR

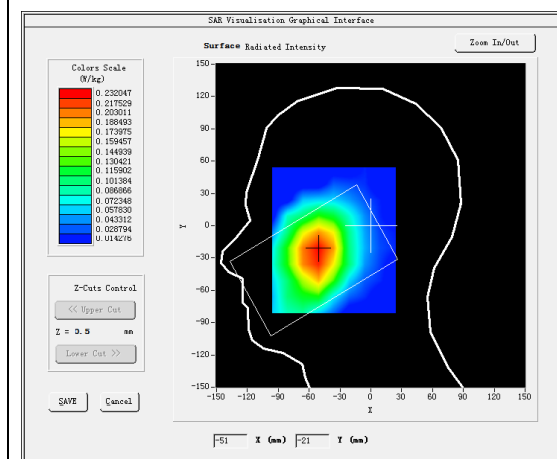



VOLUME SAR

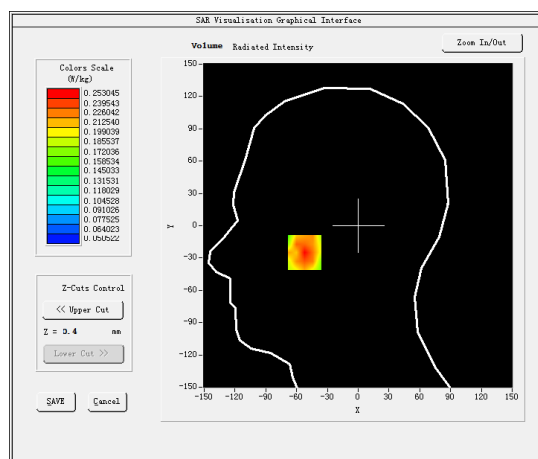

Maximum location: X=-52.00, Y=-25.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.187507
SAR 1g (W/Kg)	0.254845

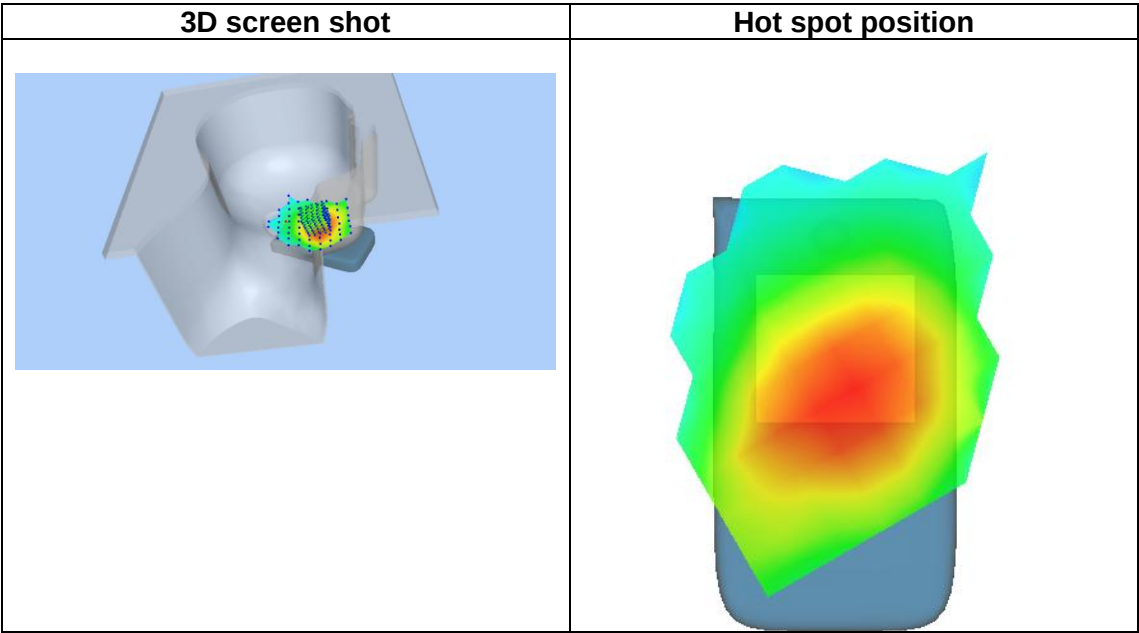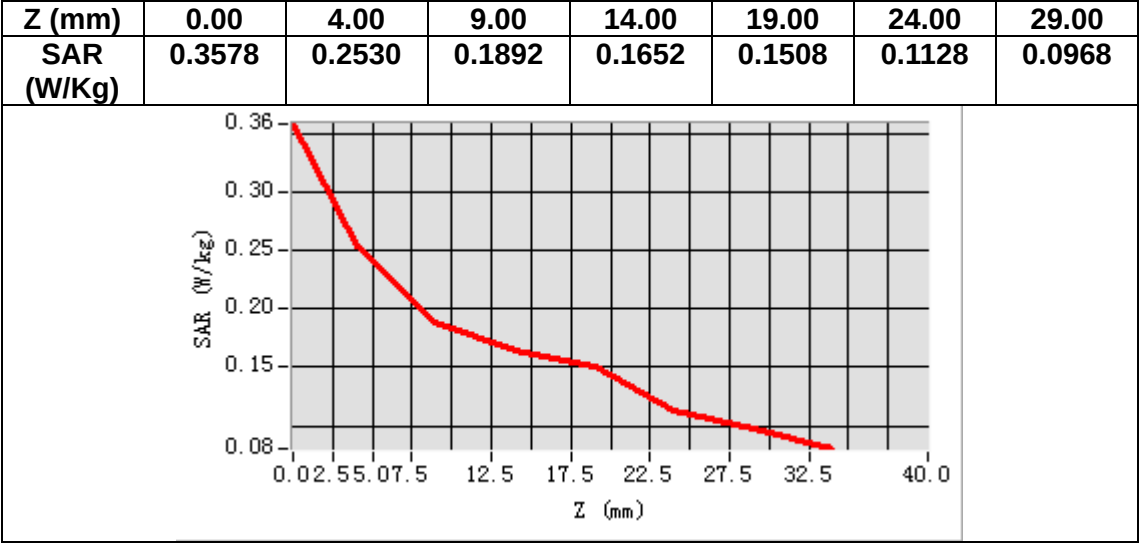

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.369579
Relative permittivity (imaginary part)	21.712740
Conductivity (S/m)	1.008919
Variation (%)	-5.060000

SURFACE SAR

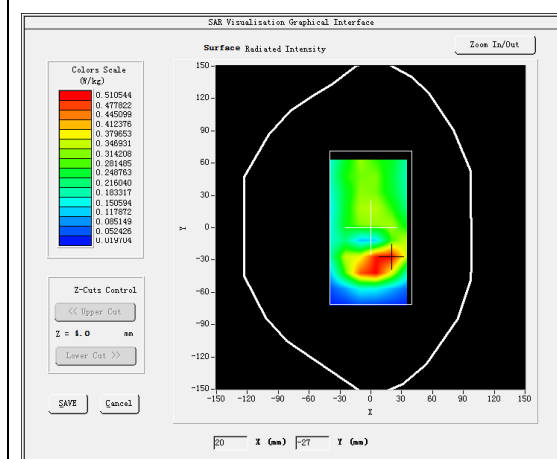


VOLUME SAR


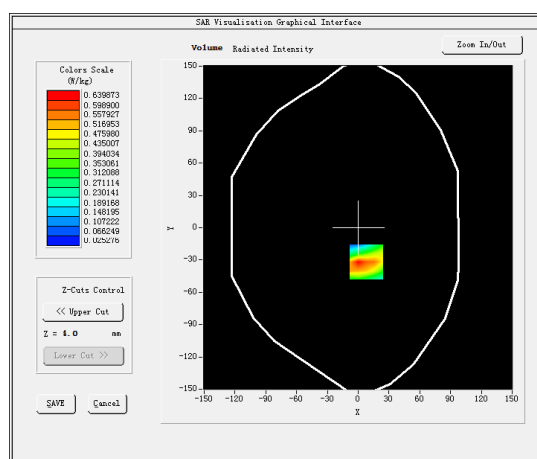


Maximum location: X=8.00, Y=-32.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.351281
SAR 1g (W/Kg)	0.614597

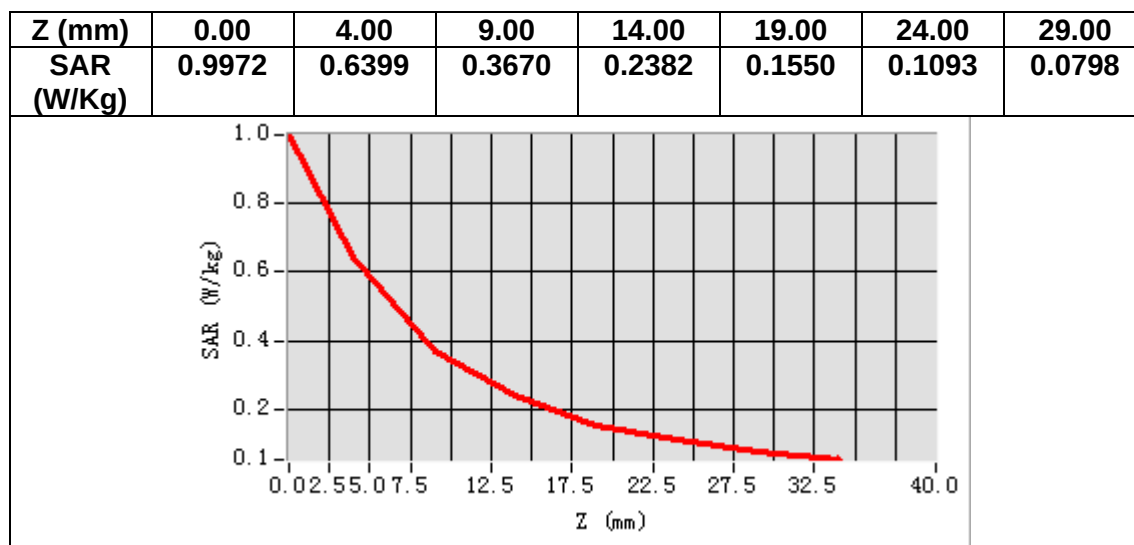

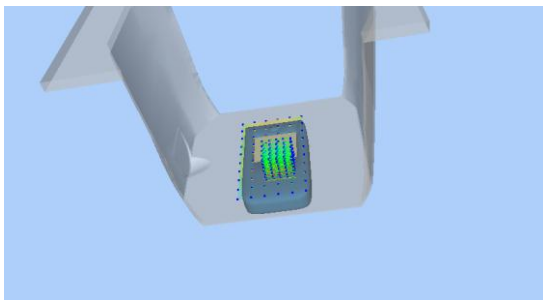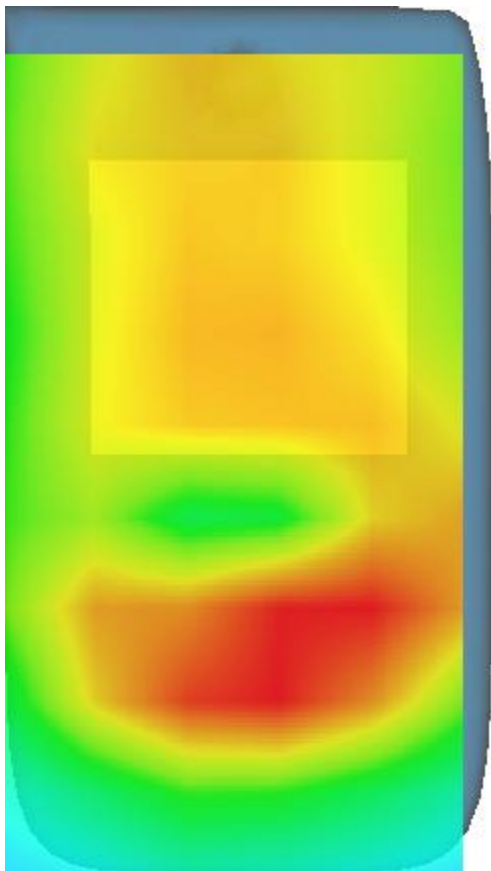3D screen shot	Hot spot position
 A 3D perspective view of a robotic arm holding a screen. The screen displays a grid of green and blue dots, representing the hot spot positions. The background is a solid light blue.	 A heatmap visualization of the hot spot positions. The color scale ranges from blue (low intensity) to red (high intensity). A large, bright yellow/orange rectangular area is visible in the upper-middle section, indicating a high concentration of hot spots. A smaller, bright red area is visible in the lower-middle section, also indicating a high concentration of hot spots. The rest of the screen is mostly green and blue, indicating lower intensity.

MEASUREMENT 3


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.928200
Relative permittivity (imaginary part)	13.784300
Conductivity (S/m)	1.439694
Variation (%)	4.980000

SURFACE SAR

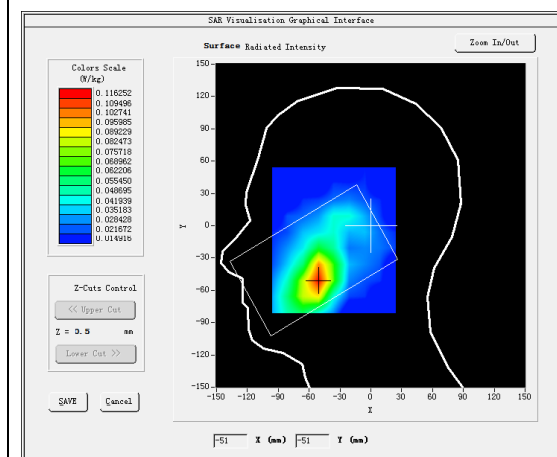



VOLUME SAR

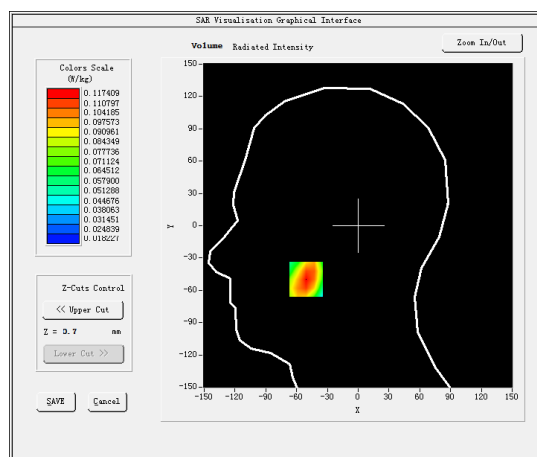

Maximum location: X=-51.00, Y=-50.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.074156
SAR 1g (W/Kg)	0.113557

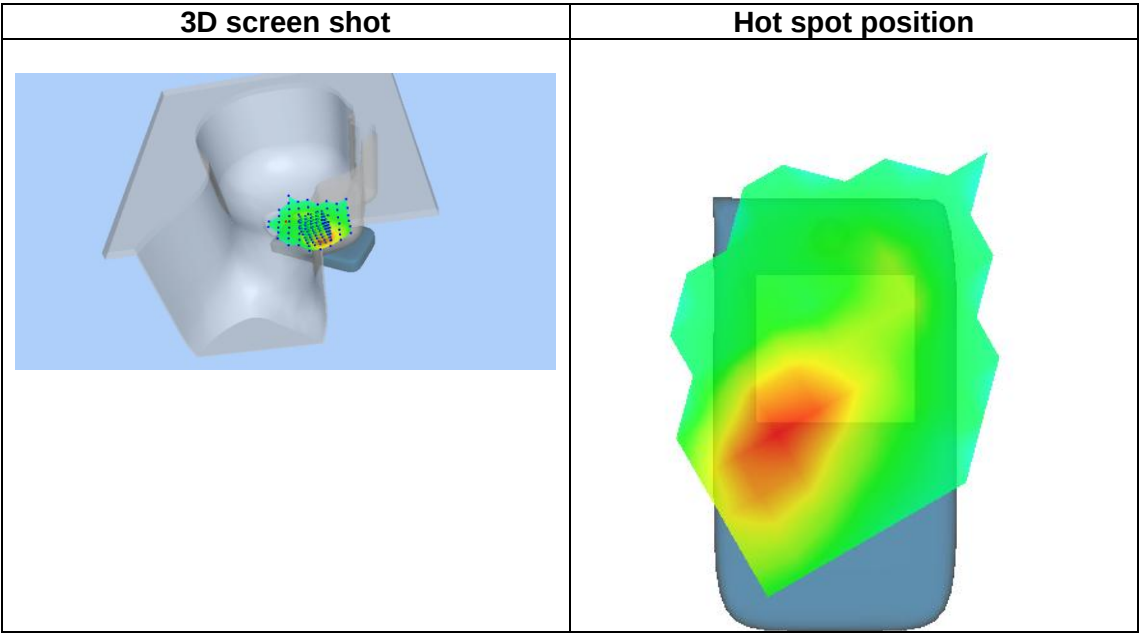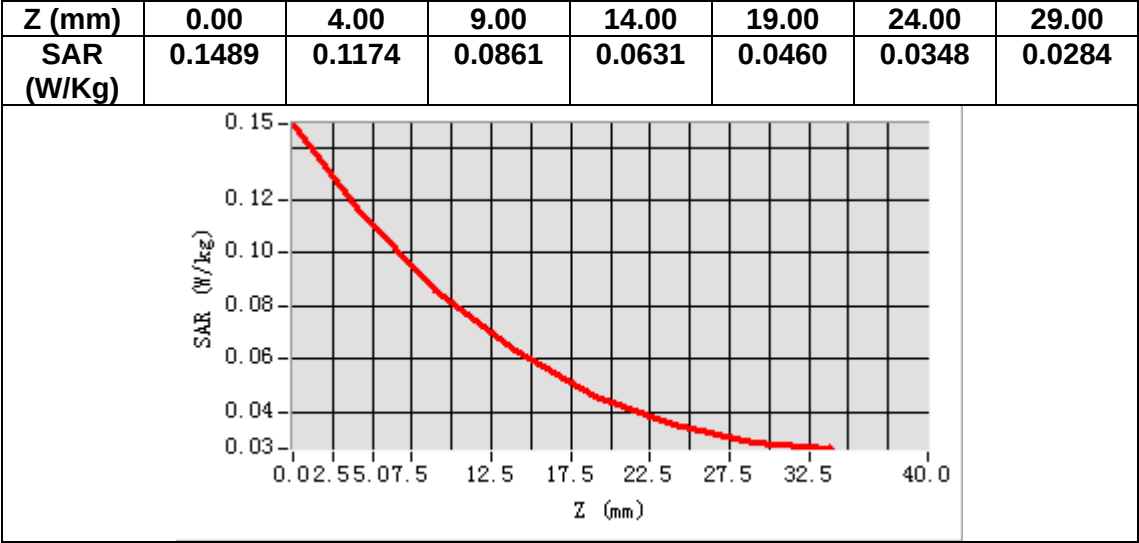

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.558899
Relative permittivity (imaginary part)	15.027700
Conductivity (S/m)	1.569560
Variation (%)	0.610000

SURFACE SAR

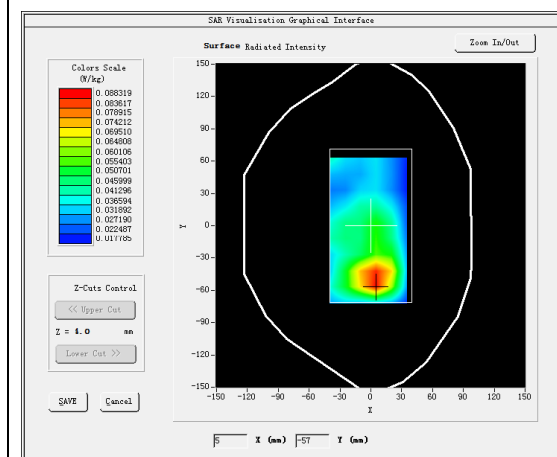



VOLUME SAR

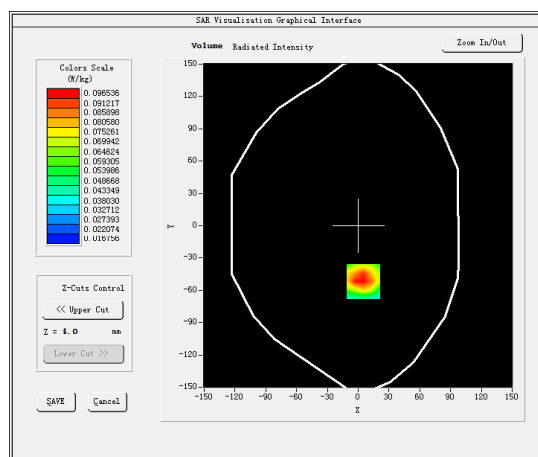

Maximum location: X=5.00, Y=-52.00

SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.057131
SAR 1g (W/Kg)	0.097709

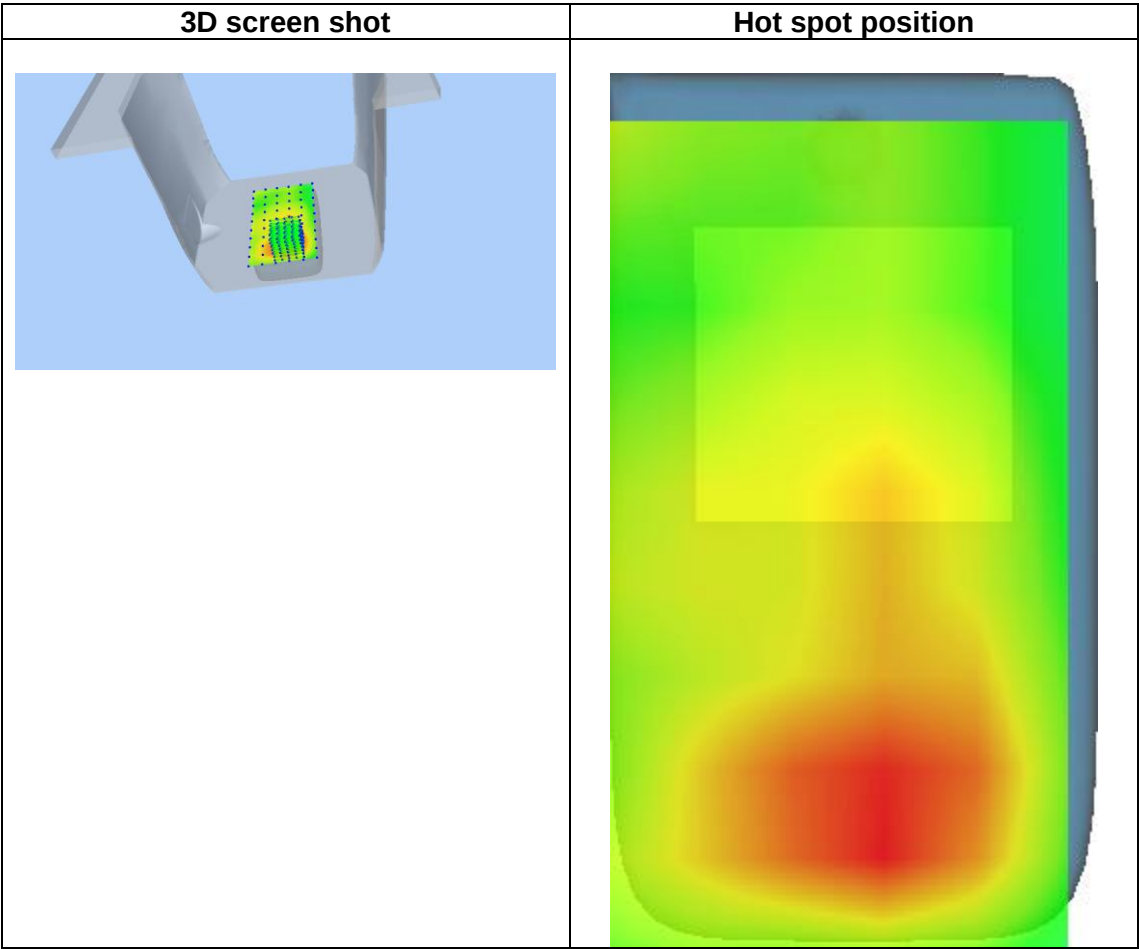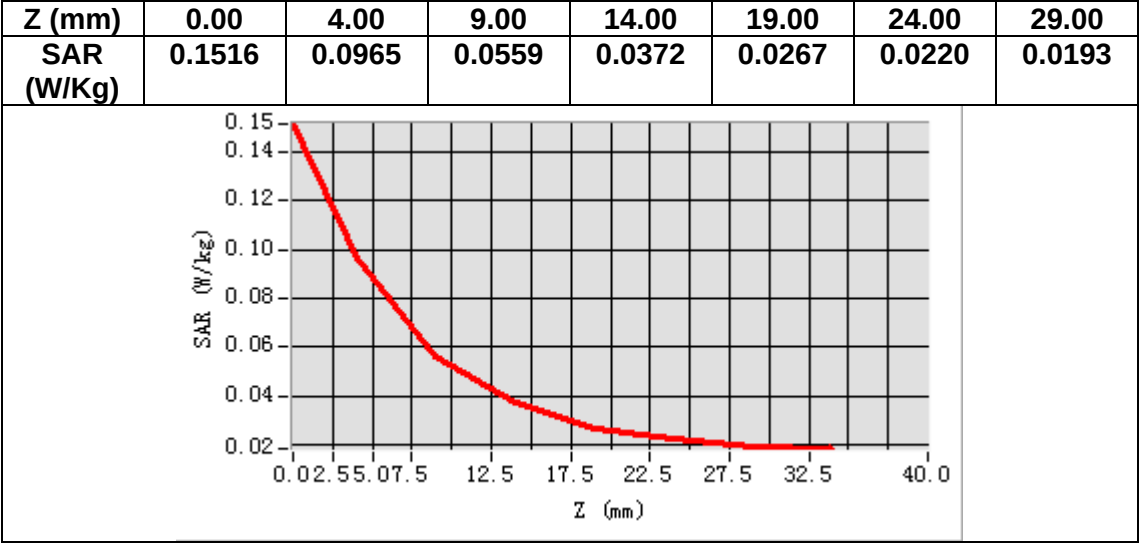

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.928200
Relative permittivity (imaginary part)	13.784300
Conductivity (S/m)	1.439694
Variation (%)	2.450000

SURFACE SAR

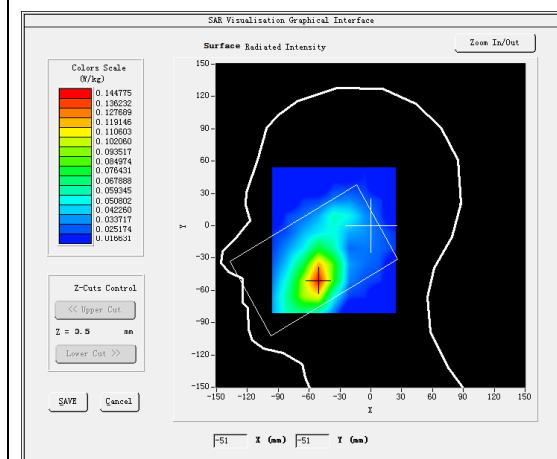



VOLUME SAR

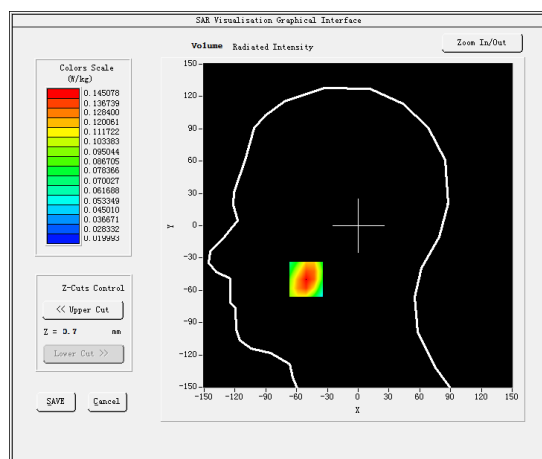

Maximum location: X=-51.00, Y=-50.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.090967
SAR 1g (W/Kg)	0.141171

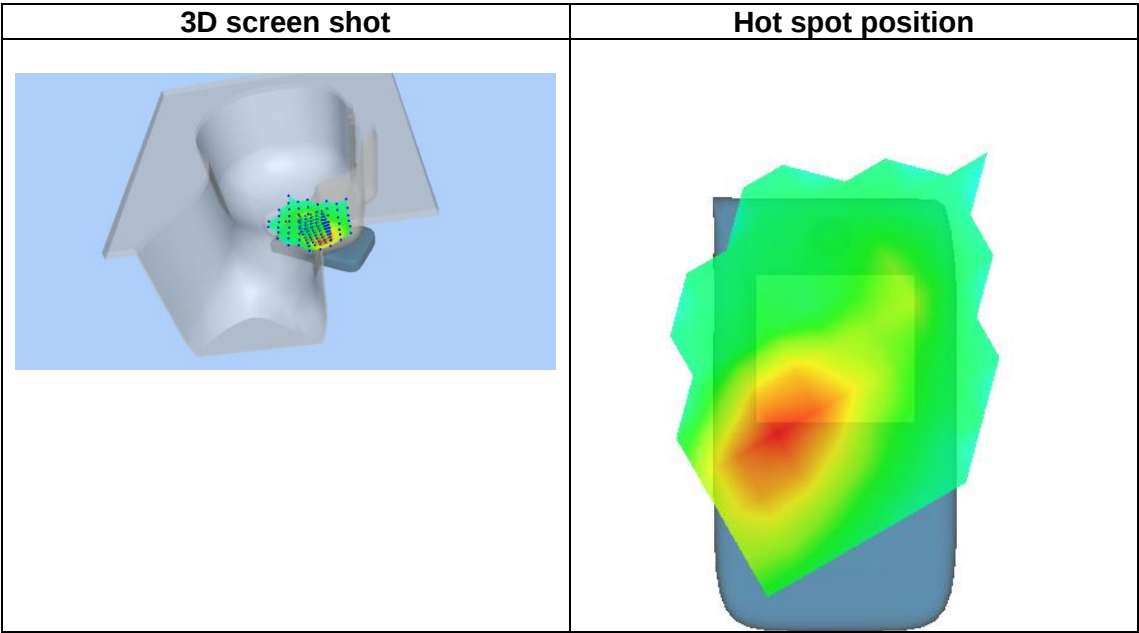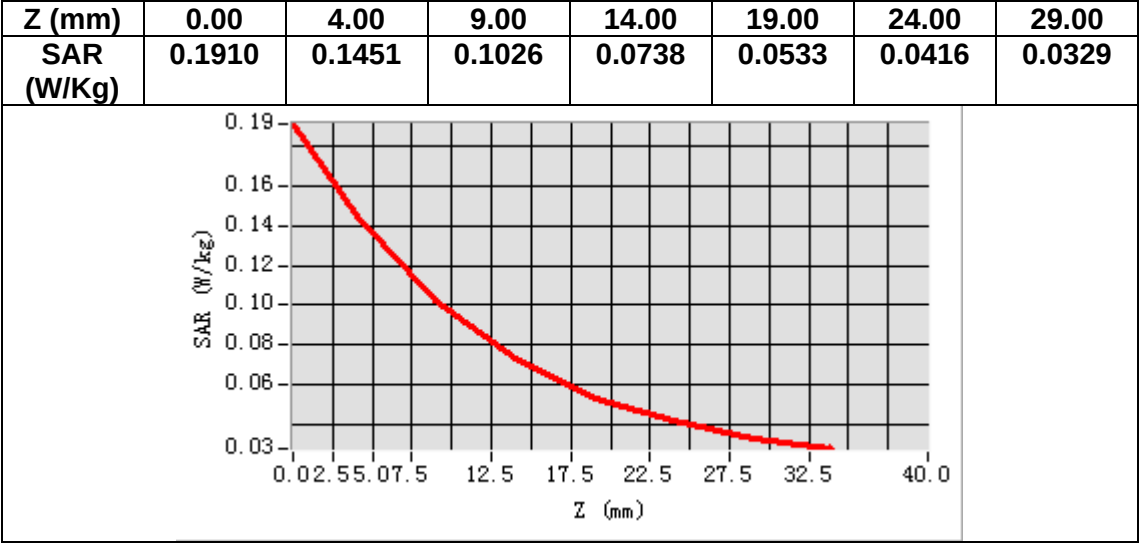

MEASUREMENT 6


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.558899
Relative permittivity (imaginary part)	15.027700
Conductivity (S/m)	1.569560
Variation (%)	-2.140000

SURFACE SAR

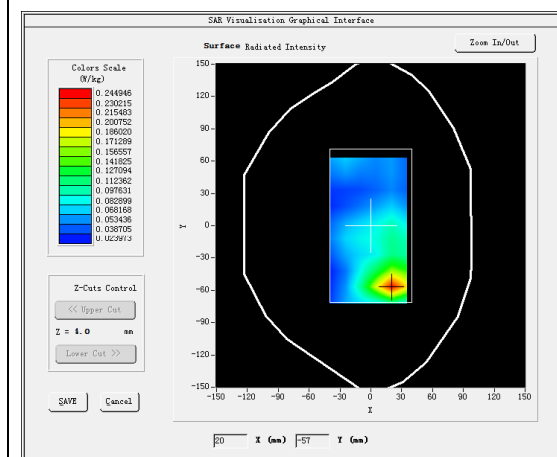



VOLUME SAR

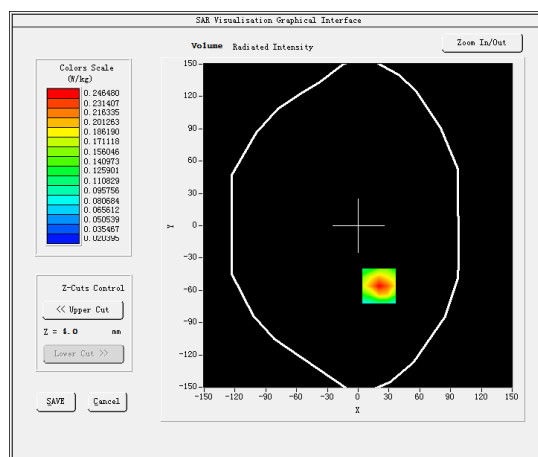

Maximum location: X=20.00, Y=-56.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.126032
SAR 1g (W/Kg)	0.240391

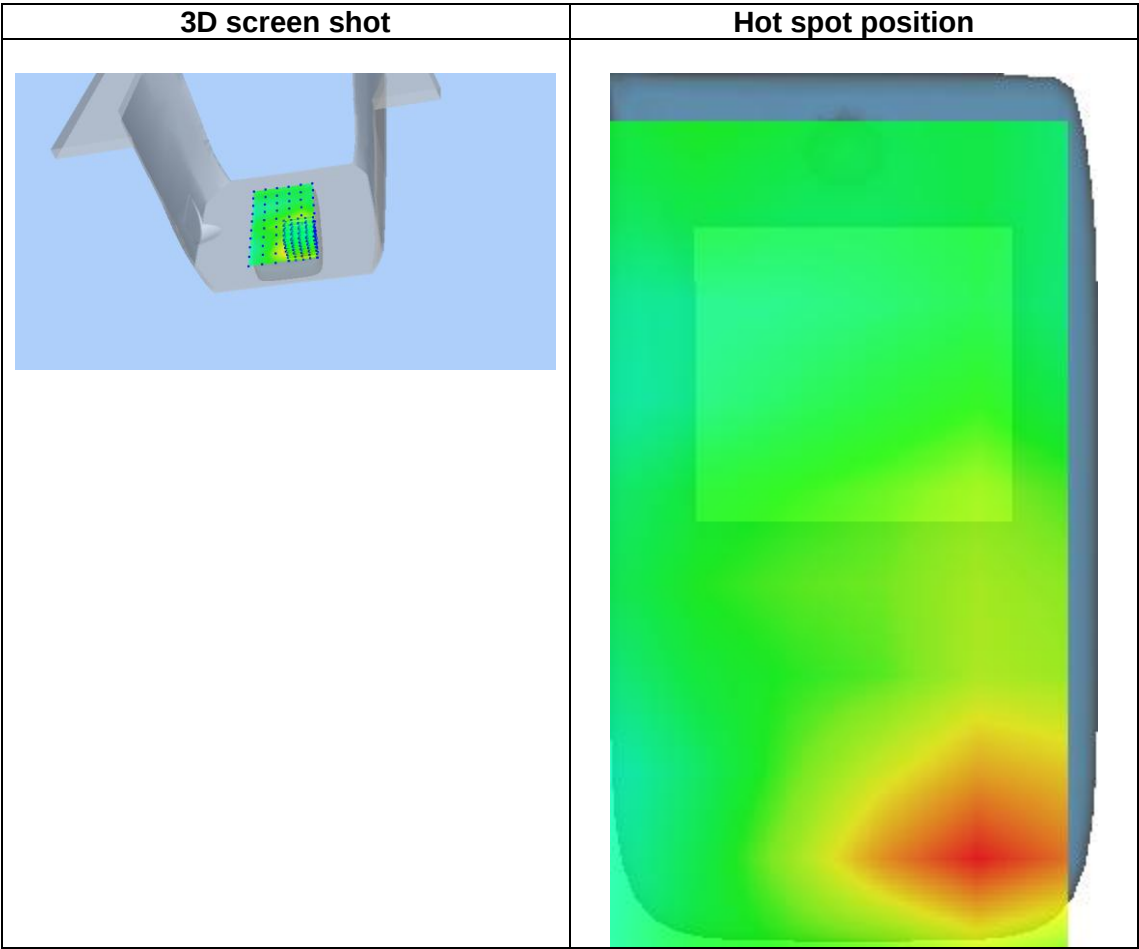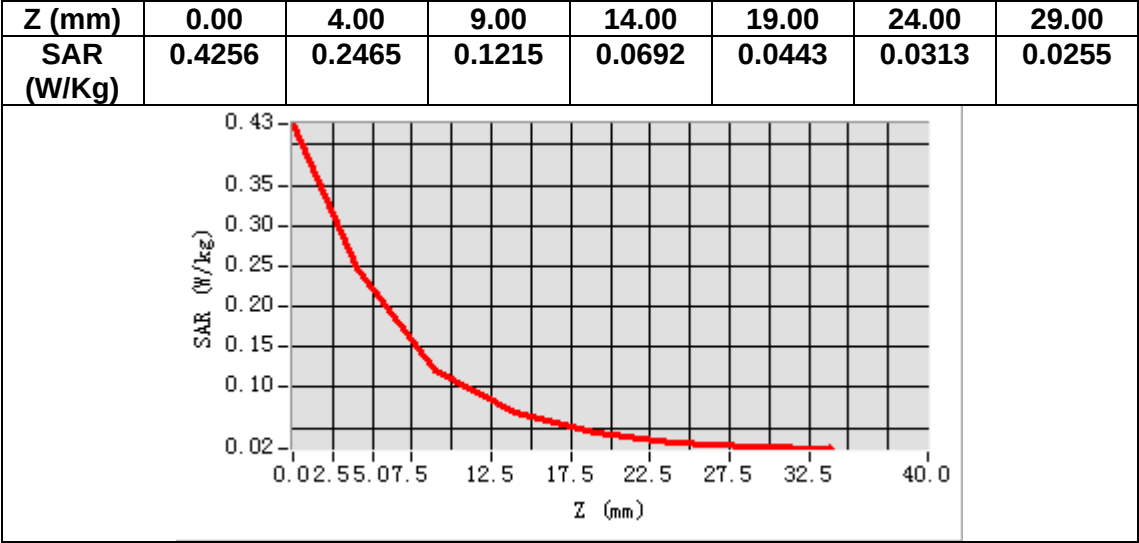

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.540958
Relative permittivity (imaginary part)	20.071541
Conductivity (S/m)	0.932658
Variation (%)	0.880000

SURFACE SAR

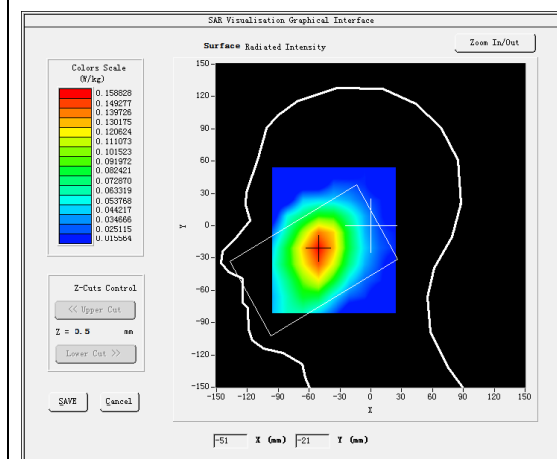

VOLUME SAR

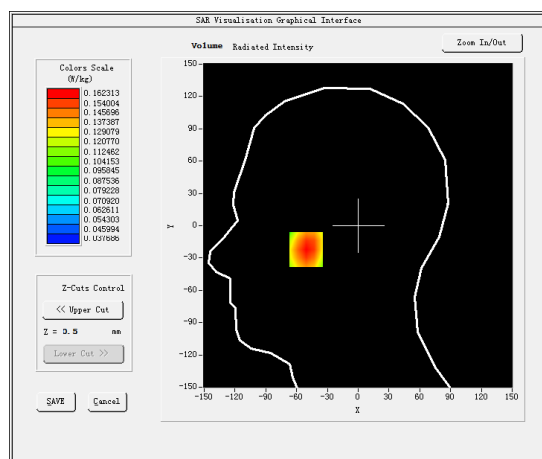

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.126188
SAR 1g (W/Kg)	0.162733

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.369579
Relative permittivity (imaginary part)	21.712740
Conductivity (S/m)	1.008919
Variation (%)	-0.150000

SURFACE SAR

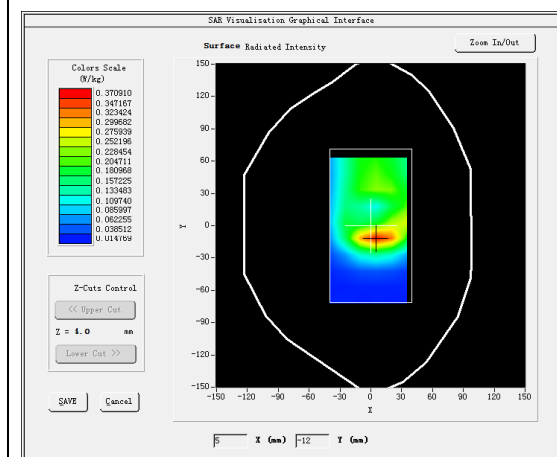



VOLUME SAR

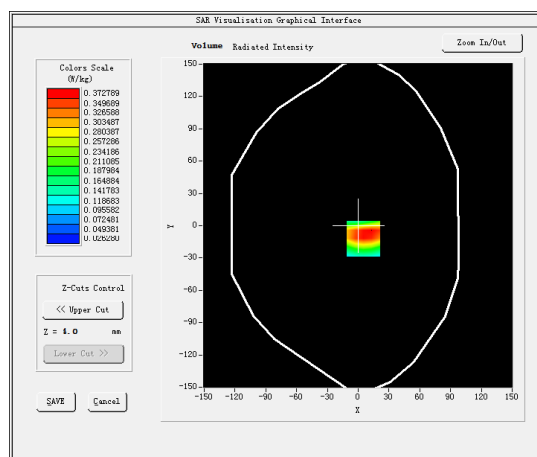

Maximum location: X=5.00, Y=-12.00

SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.226616
SAR 1g (W/Kg)	0.384890

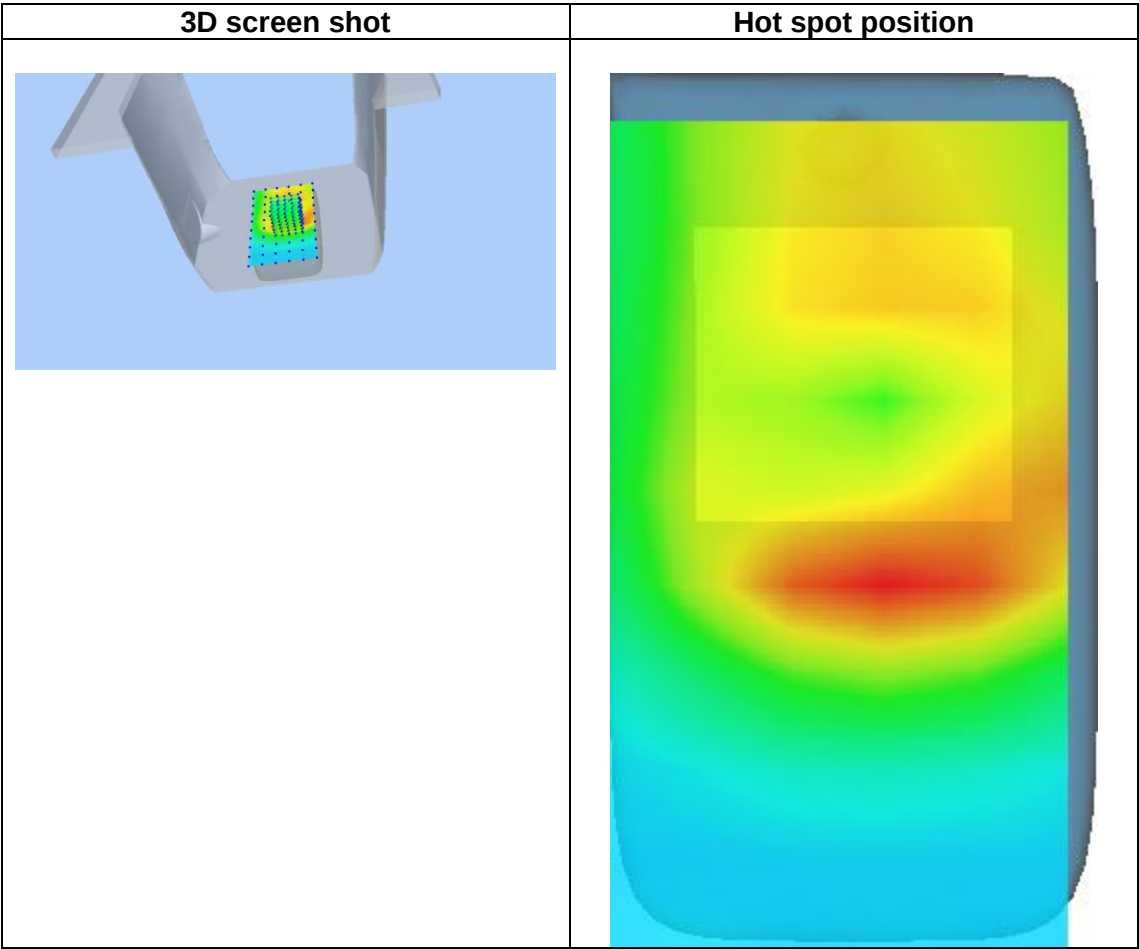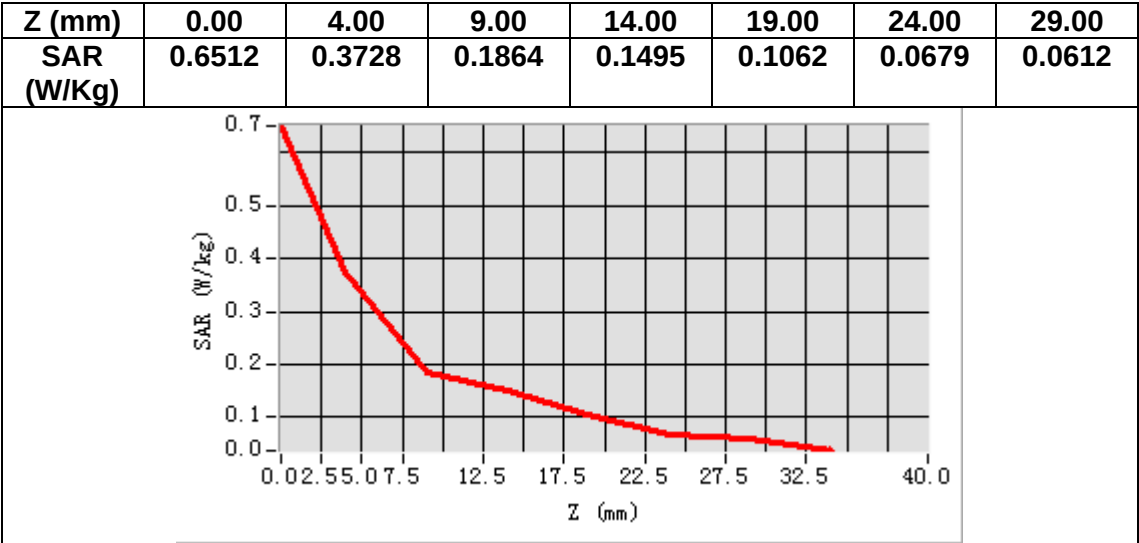

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Right head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5210.000000
Relative permittivity (real part)	35.662981
Relative permittivity (imaginary part)	16.181619
Conductivity (S/m)	4.683683
Variation (%)	2.400000

SURFACE SAR

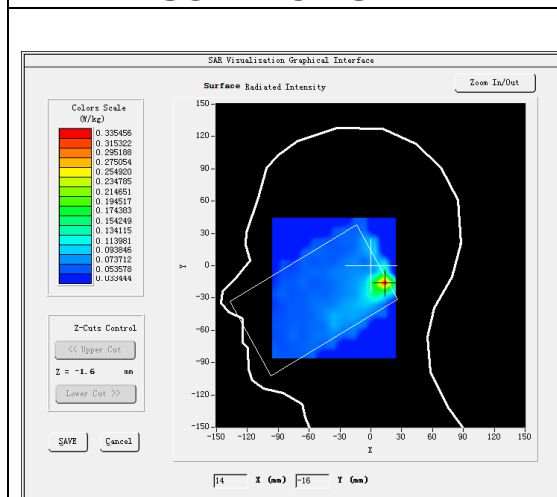


VOLUME SAR


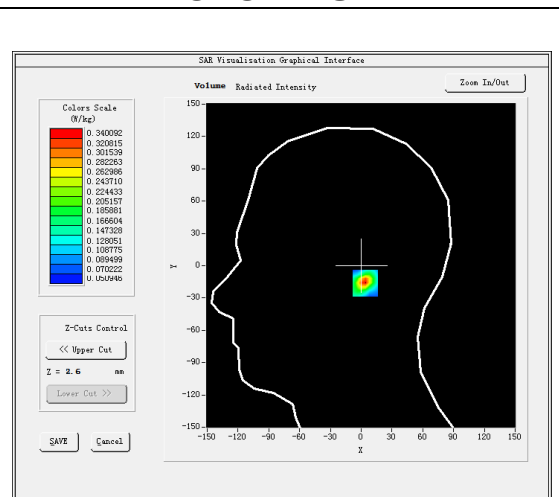


Maximum location: X=14.00, Y=-16.00

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.129853
SAR 1g (W/Kg)	0.313057

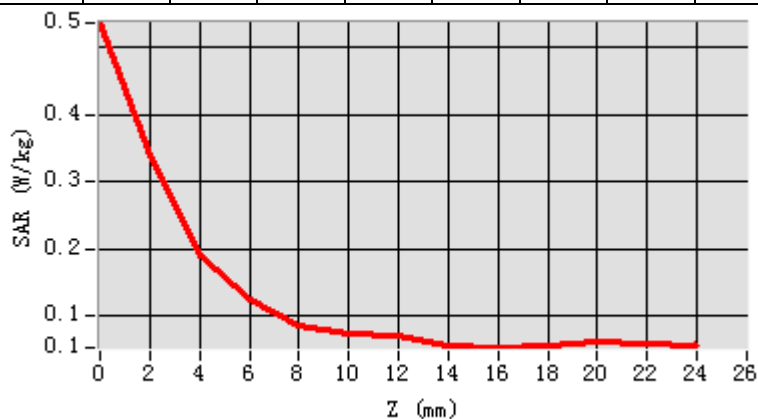

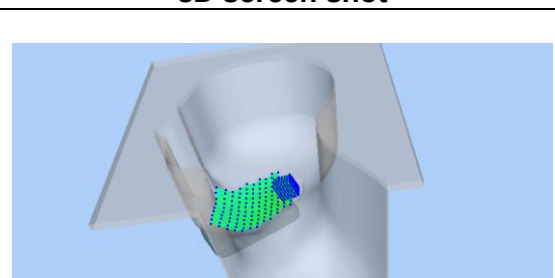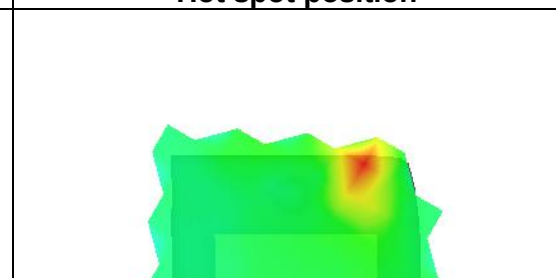3D screen shot	Hot spot position
 A 3D CAD model of a mechanical part, possibly a mold or a container, shown in a light blue color. A green mesh is overlaid on a curved surface of the part, indicating a specific area of interest or a simulation result. The mesh is composed of small, interconnected elements, with a denser area in the center of the curve.	 A 3D model of the same mechanical part, rendered in a green color. A red and yellow hot spot is visible on the curved surface, indicating a high-temperature or high-stress area. The hot spot is located near the top edge of the curve, where the mesh was located in the 3D screen shot.

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	34.664787
Relative permittivity (imaginary part)	16.105267
Conductivity (S/m)	5.176054
Variation (%)	-0.230000

SURFACE SAR

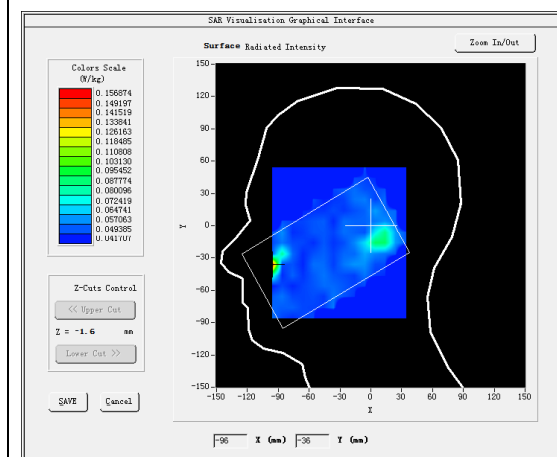


VOLUME SAR


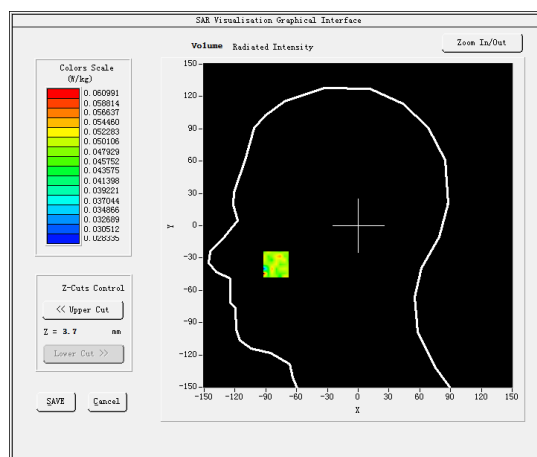


Maximum location: X=-80.00, Y=-36.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.034868
SAR 1g (W/Kg)	0.047178

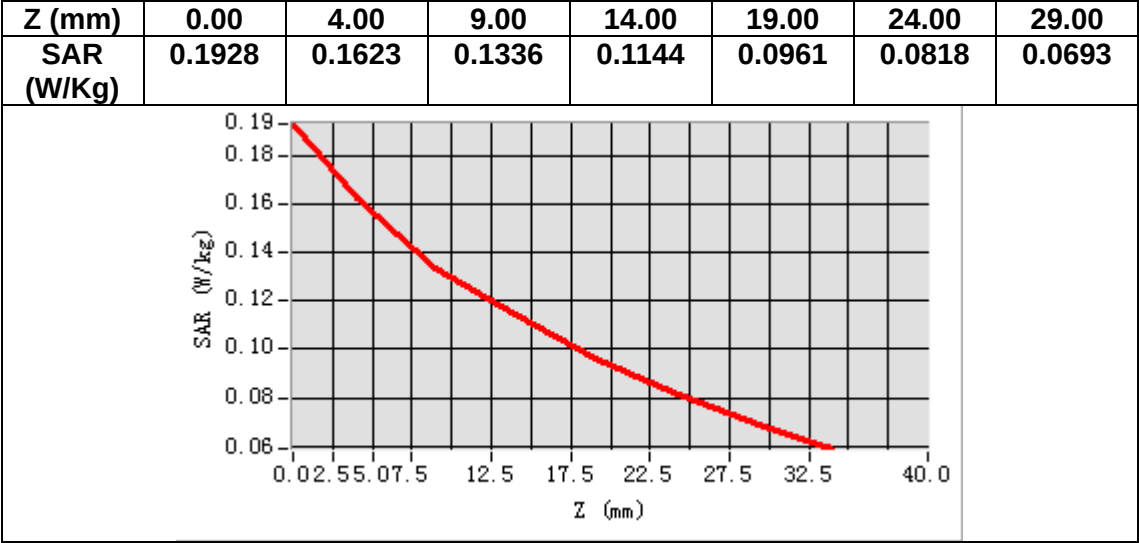

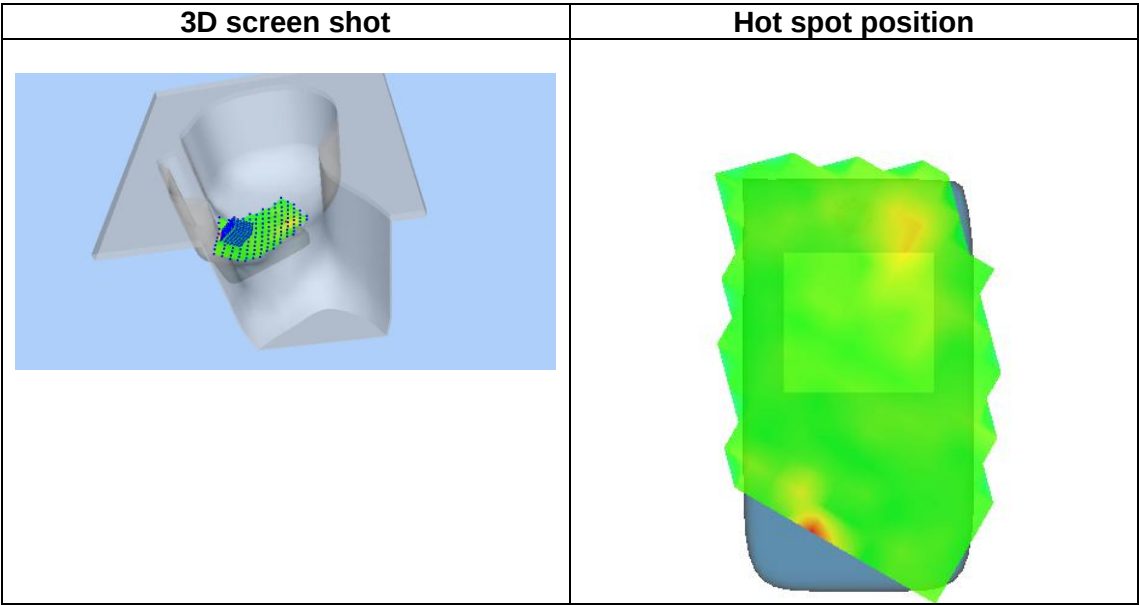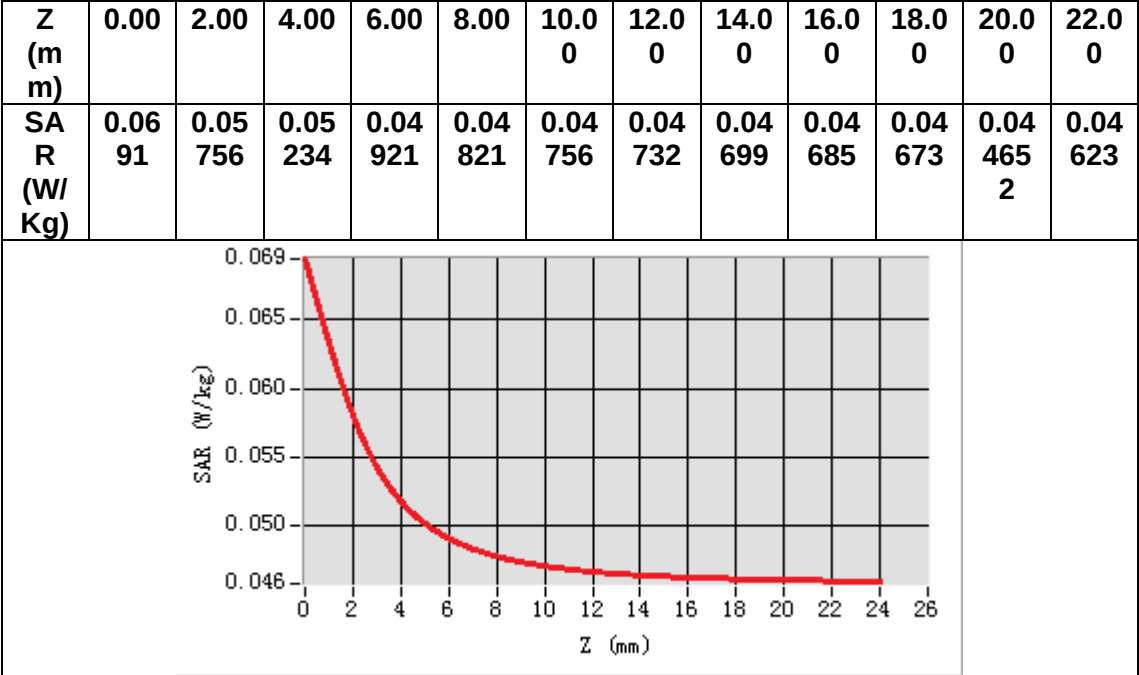

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5210.000000
Relative permittivity (real part)	49.437442
Relative permittivity (imaginary part)	18.425867
Conductivity (S/m)	5.333265
Variation (%)	-4.790000

SURFACE SAR

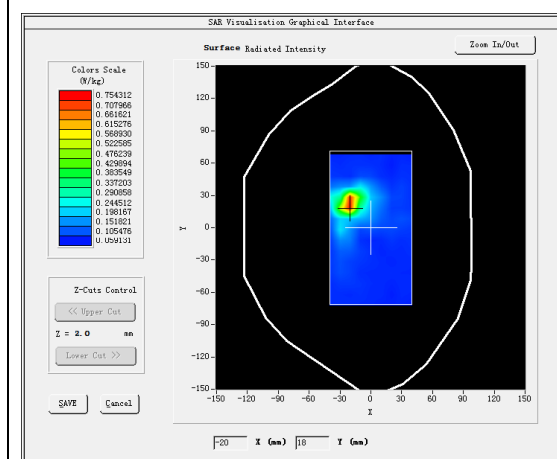



VOLUME SAR

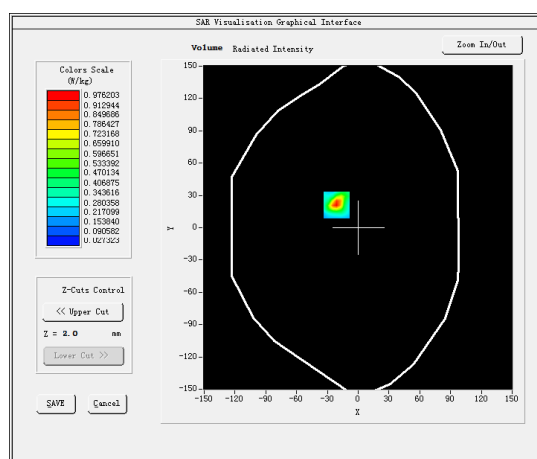

Maximum location: X=-21.00, Y=21.00

SAR Peak: 1.74 W/kg

SAR 10g (W/Kg)	0.202036
SAR 1g (W/Kg)	0.539757

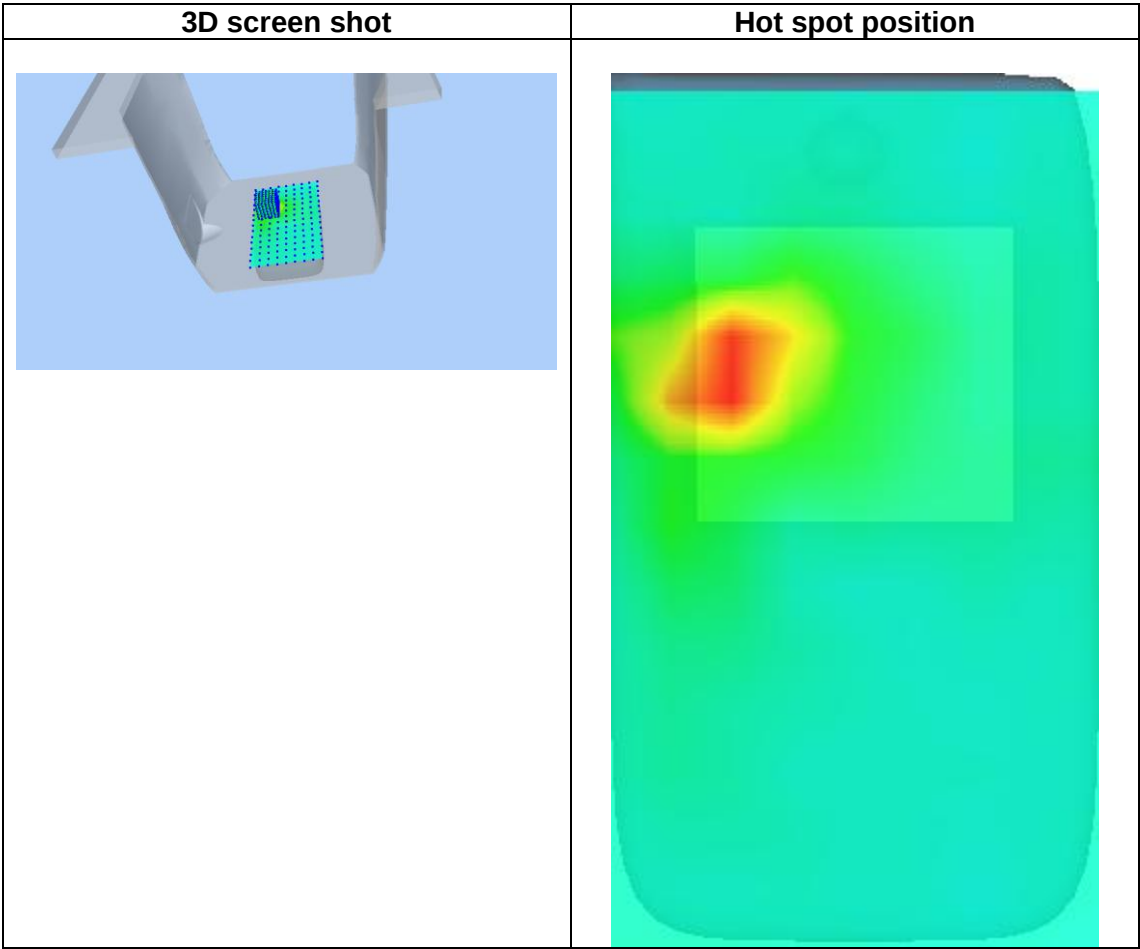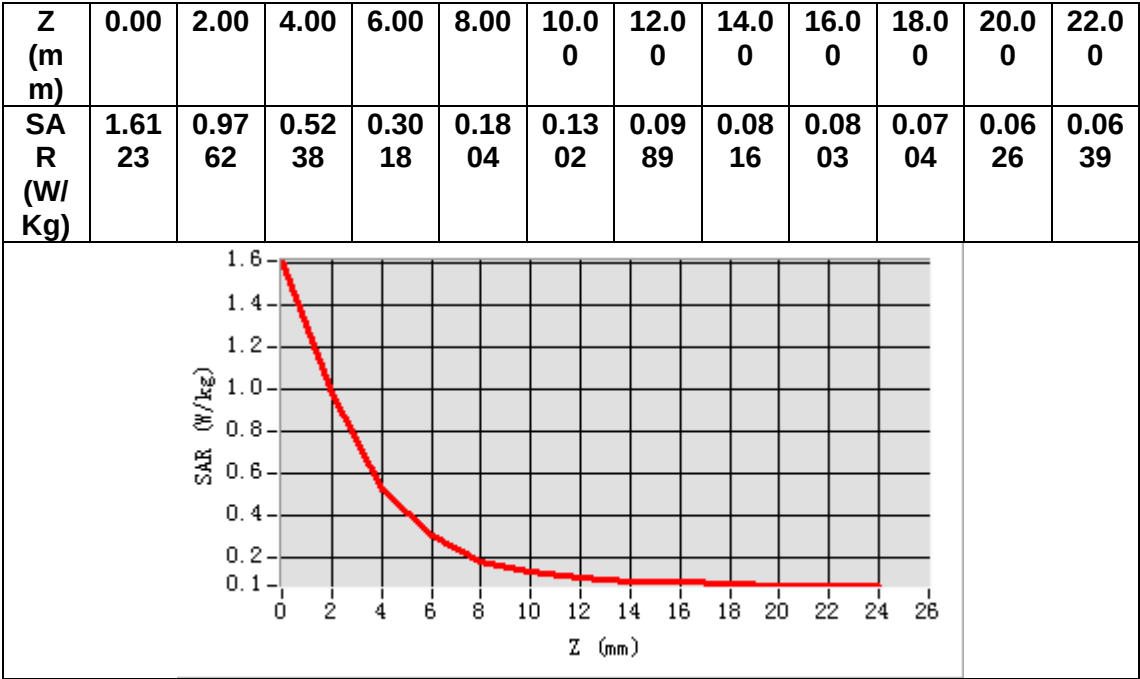

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5785.000000
Relative permittivity (real part)	48.278702
Relative permittivity (imaginary part)	18.846766
Conductivity (S/m)	6.057141
Variation (%)	4.910000

SURFACE SAR

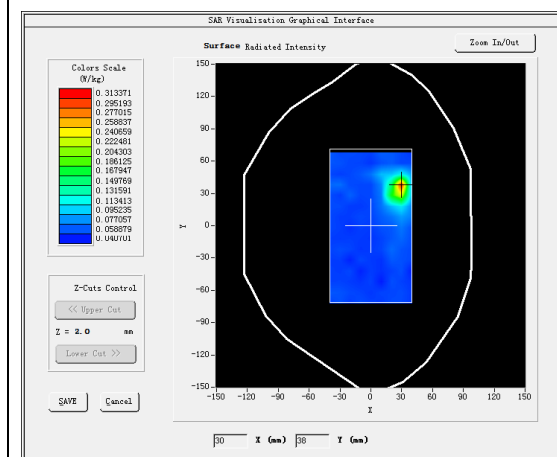

VOLUME SAR

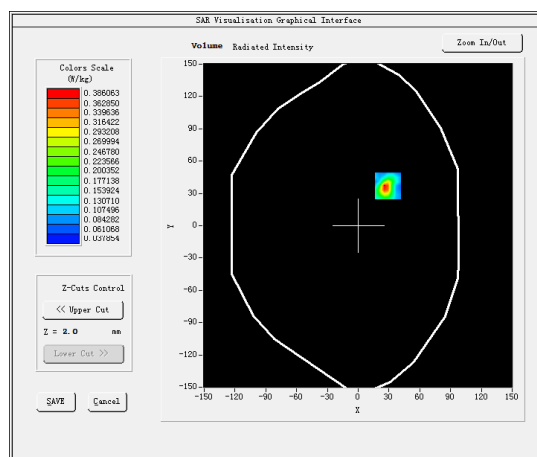


Maximum location: X=29.00, Y=37.00


SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.106051
SAR 1g (W/Kg)	0.236442


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	0.67 10	0.38 61	0.11 85	0.11 37	0.07 08	0.06 57	0.05 57	0.05 40	0.05 31	0.05 42	0.05 35	0.05 12

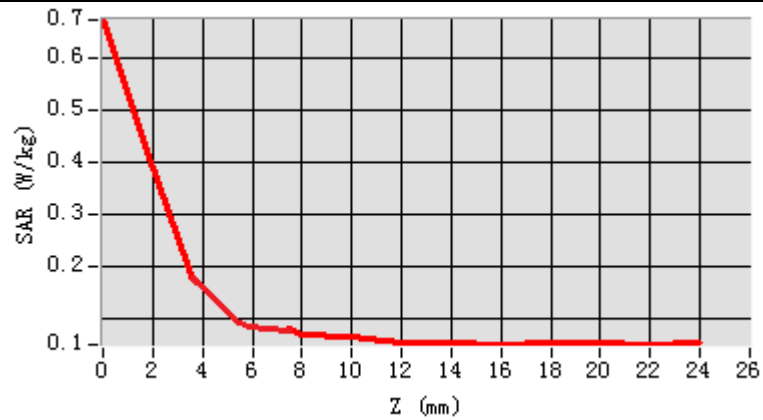

3D screen shot

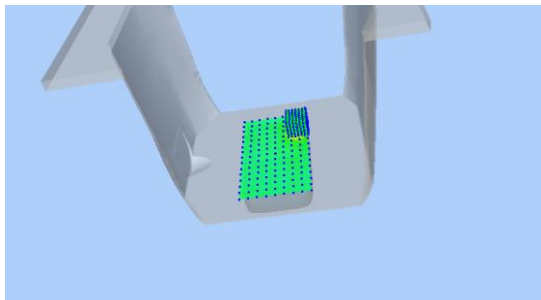

Hot spot position

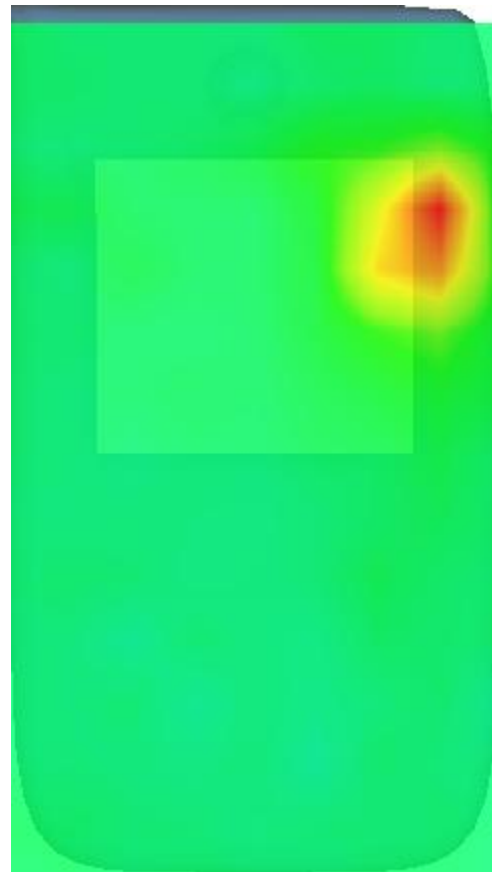

MEASUREMENT 13


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.921001
Relative permittivity (imaginary part)	13.460300
Conductivity (S/m)	1.822375
Variation (%)	1.010000

SURFACE SAR

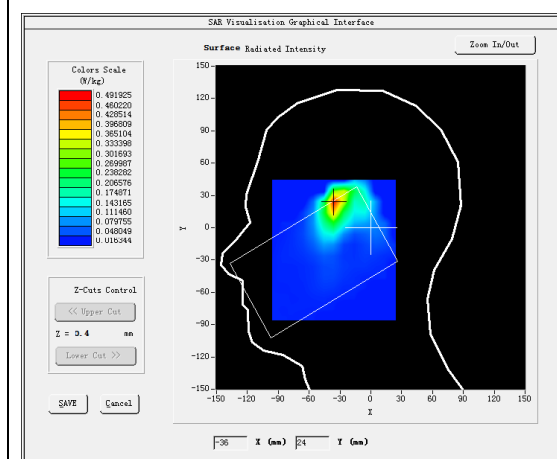

VOLUME SAR

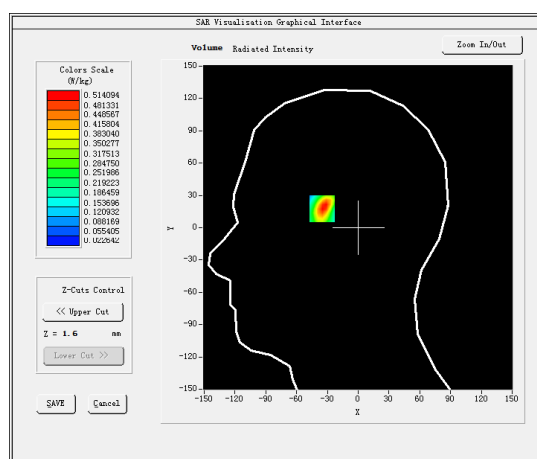

Maximum location: X=-35.00, Y=23.00

SAR Peak: 0.99 W/kg

SAR 10g (W/Kg)	0.214881
SAR 1g (W/Kg)	0.478605