



FCC Part 15E Test Report

FCC ID: 2AUZB-RM2500

Product Name:	Wireless Router
Trademark:	HNK
Model Name :	RM2500
Prepared For :	SHENZHEN ZK TECHNOLOGY CO., LTD
Address :	SHENZHEN CITY LONGGANG DISTRICT STREETS QINGLIN ROAD SHENZHEN CITY STUDENTS (LONGGANG) BUSINESS PA... China 518172 □
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Oct. 25, 2019 – Dec. 11, 2019
Date of Report :	Dec. 11, 2019
Report No.:	BCTC-LH191001468E



TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN ZK TECHNOLOGY CO., LTD
Address : SHENZHEN CITY LONGGANG DISTRICT STREETS QINGLIN
ROAD SHENZHEN CITY STUDENTS (LONGGANG) BUSINESS
PA... China 518172 □
Manufacture's Name..... : Huizhou MTN WEIYE Technology Development Co., Ltd
Address : No.2 Huitai Road, Huinan High-tech Industrial Park, Huiao
Avenue, Huizhou City, Guangdong Province, China.
Product description
Product name : Wireless Router
Trademark : HNK
Model and/or type reference : RM2500
Standards : FCC Part15 15.407
ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Willem Wang

Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou

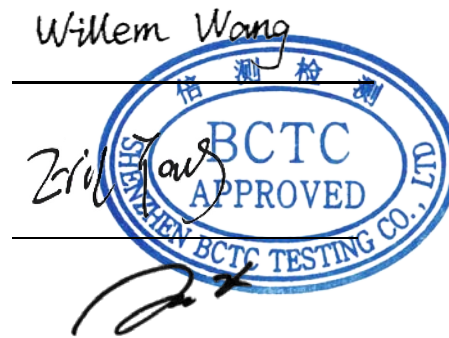




Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	15
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 APPLICABLE STANDARD	20
3.2.2 CONFORMANCE LIMIT	20
3.2.3 MEASURING INSTRUMENTS	20
3.2.4 TEST CONFIGURATION	21
3.2.5 TEST PROCEDURE	22
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (1GHZ-40GHZ)	28
4 . POWER SPECTRAL DENSITY TEST	40
4.1 APPLIED PROCEDURES / LIMIT	40
4.2 TEST PROCEDURE	41
4.3 DEVIATION FROM STANDARD	41
4.4 TEST SETUP	41
4.5 EUT OPERATION CONDITIONS	41
4.6 TEST RESULTS	42
5 . 26DB & 6DB & 99% EMISSION BANDWIDTH	50
5.1 APPLIED PROCEDURES / LIMIT	50



Table of Contents

	Page
5.2 TEST PROCEDURE	50
5.3 EUT OPERATION CONDITIONS	51
5.4 TEST RESULTS	52
6 . MAXIMUM CONDUCTED OUTPUT POWER	70
6.1 PPLIED PROCEDURES / LIMIT	70
6.2 TEST PROCEDURE	70
6.3 DEVIATION FROM STANDARD	72
6.4 TEST SETUP	72
6.5 EUT OPERATION CONDITIONS	72
6.6 TEST RESULTS	73
7 . OUT OF BAND EMISSIONS	75
7.1 APPLICABLE STANDARD	75
7.2 TEST PROCEDURE	75
7.3 DEVIATION FROM STANDARD	75
7.4 TEST SETUP	75
7.5 EUT OPERATION CONDITIONS	76
7.6 TEST RESULTS	77
8.SPURIOUS RF CONDUCTED EMISSIONS	94
8.1CONFORMANCE LIMIT	94
8.2MEASURING INSTRUMENTS	94
8.3TEST SETUP	94
8.4TEST PROCEDURE	94
8.5TEST RESULTS	94
9. FREQUENCY STABILITY MEASUREMENT	109
9.1 LIMIT	109
9.2 TEST PROCEDURES	109
9.3 TEST SETUP LAYOUT	109
9.4 EUT OPERATION DURING TEST	109
9.5 TEST RESULTS	110
10. ANTENNA REQUIREMENT	116
10.1 STANDARD REQUIREMENT	116
10.2 EUT ANTENNA	116
11. EUT TEST PHOTO	117
12. EUT PHOTO	120



Revision History

Report No.	Version	Description	Issued Date
BCTC-LH191001468E	Rev.01	Initial issue of report	Dec. 11, 2019



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.207	Conducted Emission	PASS	
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59 °C



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Router	
Trade Name	HNK	
Model Name	RM2500	
Model Difference	N/A	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac(20MHz channel bandwidth) ☒ 802.11n/ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS8
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	Internal antenna
	Antenna Gain	Antenna A:3dBi, Antenna B: 3dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Type of device	Indoor AP	
Power Supply	Adapter 1: Model No.: LPL-U012120100ZH Input: AC 100-240V 50/60Hz 0.35A MAX Output: DC 12V 1A Adapter 2: Model No.: RA004-1201000US Input: AC 100-240V 50/60Hz 0.35A MAX Output: DC 12V 1A	
hardware version	H1.0	
Software version	S1.0	



Connecting I/O Port(s)

Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

Antenna A gain: 3dBi, Antenna B gain: 3dBi,

For MIMO mode for 802.11n / ac, Directional gain=[10log(GA+ G B)] dbi =6.01dbi

Tx Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	Internal antenna	3	
B	N/A	N/A	Internal antenna	3	



2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

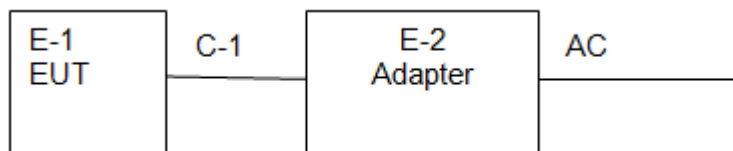

Radiated Spurious Emission

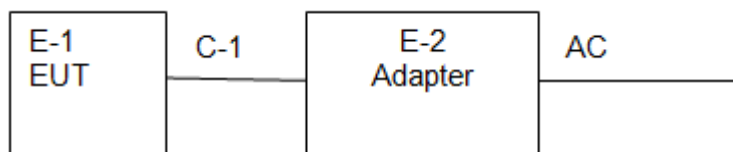

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Router	HNK	RM2500	N/A	EUT
E-2	Adapter	N/A	LPL-U012120100ZH	N/A	EUT
E-2	Adapter	N/A	RA004-1201000US	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.5M	DC cableunshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Metter	Keysight	E4419B	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Aglient	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\



Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
2	LISN	SCHWARZBECK	NSLK8127	8127739	Jun. 13, 2019	Jun. 12, 2020
3	LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	56.00	46.00	FCC/ RSS-247
5.0 -30.0	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

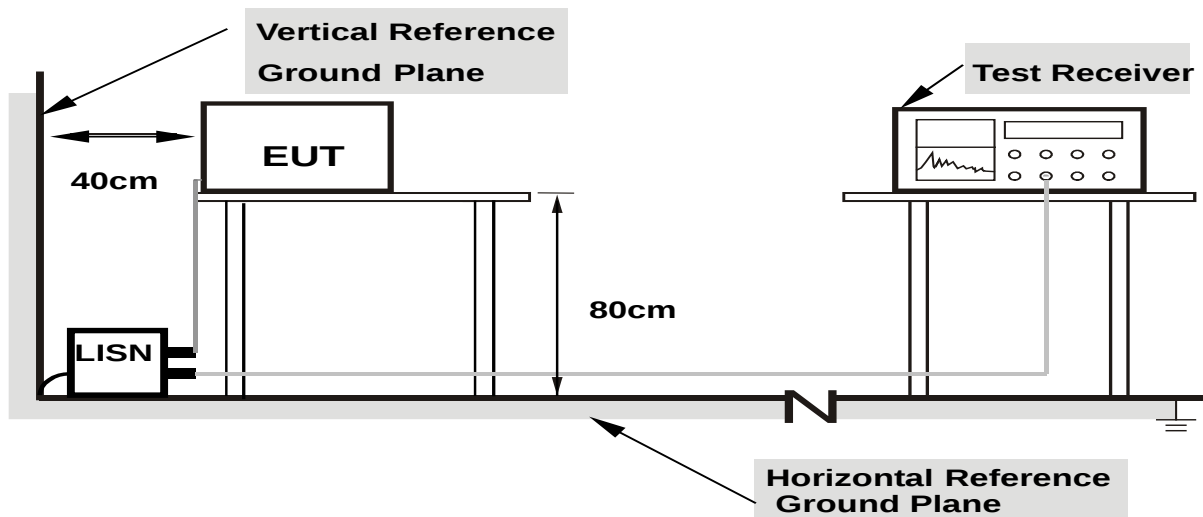

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

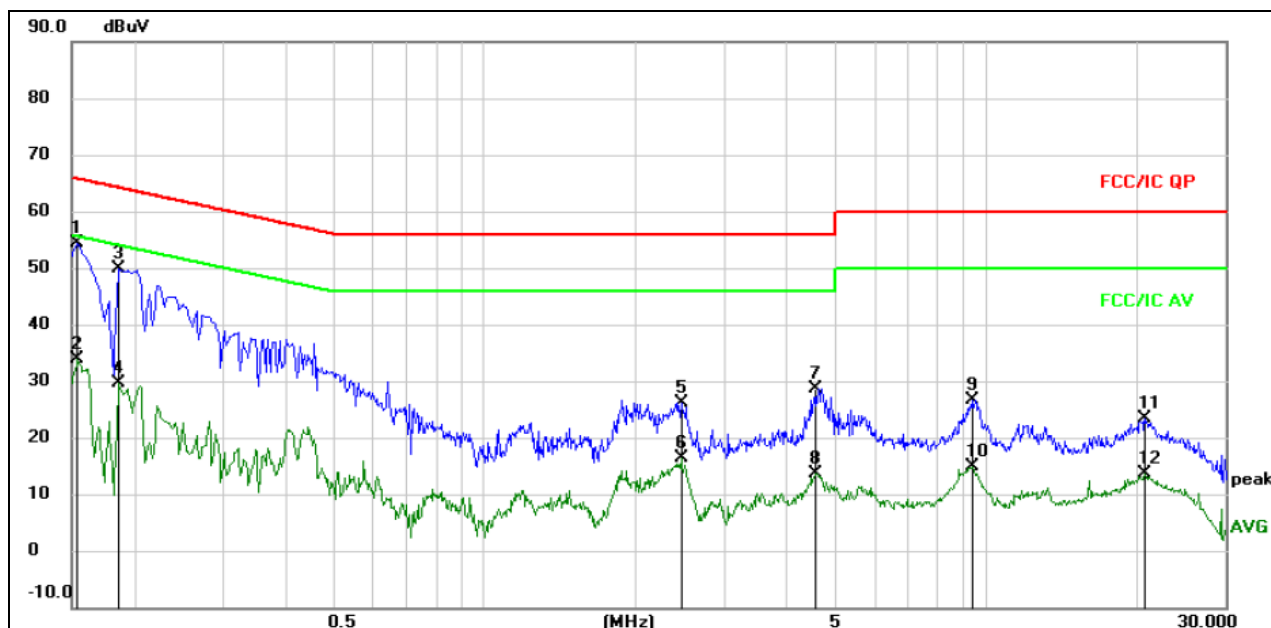

Remark:


1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV		dBuV	dBuV	dB		
1	*	0.1539	44.97	9.52	54.49	65.79	-11.30	QP	
2		0.1539	24.31	9.52	33.83	55.79	-21.96	AVG	
3		0.1860	40.40	9.48	49.88	64.21	-14.33	QP	
4		0.1860	20.13	9.48	29.61	54.21	-24.60	AVG	
5		2.4660	16.59	9.62	26.21	56.00	-29.79	QP	
6		2.4660	6.83	9.62	16.45	46.00	-29.55	AVG	
7		4.5860	18.82	9.77	28.59	56.00	-27.41	QP	
8		4.5860	3.81	9.77	13.58	46.00	-32.42	AVG	
9		9.3940	17.05	9.70	26.75	60.00	-33.25	QP	
10		9.3940	5.18	9.70	14.88	50.00	-35.12	AVG	
11		20.7700	13.50	9.78	23.28	60.00	-36.72	QP	
12		20.7700	3.97	9.78	13.75	50.00	-36.25	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

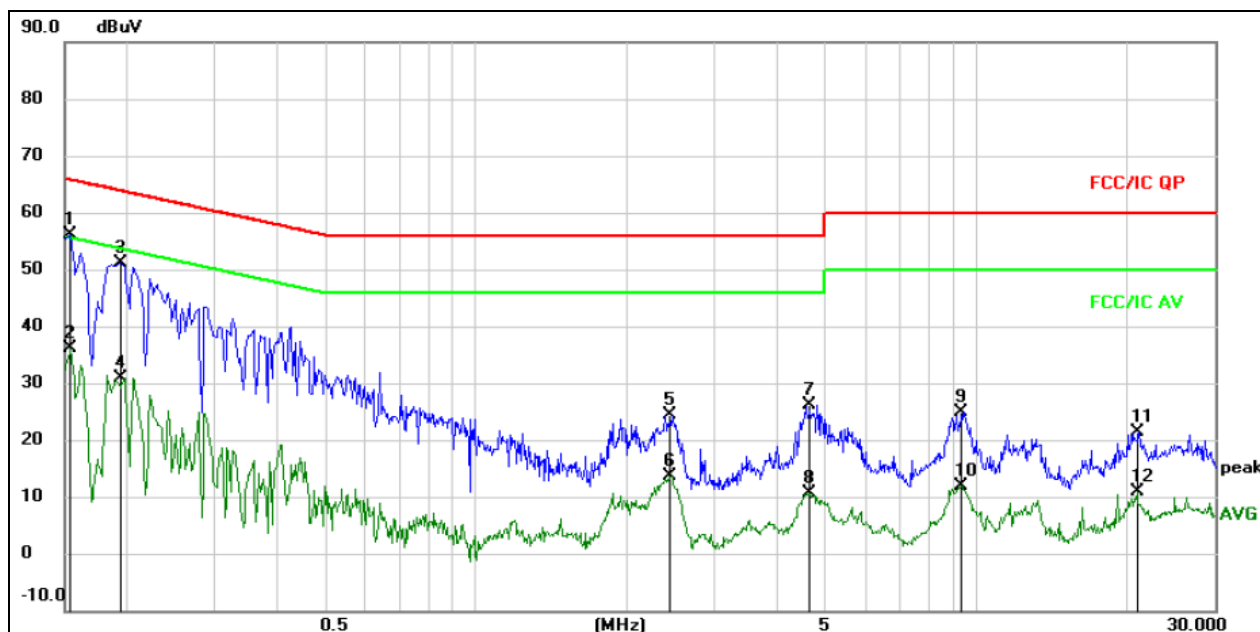


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV	dBuV	dB	Detector	Comment
1	*	0.1539	46.52	9.52	56.04	65.79	-9.75	QP	
2		0.1539	26.65	9.52	36.17	55.79	-19.62	AVG	
3		0.1940	41.77	9.47	51.24	63.86	-12.62	QP	
4		0.1940	21.52	9.47	30.99	53.86	-22.87	AVG	
5		2.4539	14.79	9.62	24.41	56.00	-31.59	QP	
6		2.4539	3.95	9.62	13.57	46.00	-32.43	AVG	
7		4.6340	16.41	9.77	26.18	56.00	-29.82	QP	
8		4.6340	0.84	9.77	10.61	46.00	-35.39	AVG	
9		9.3180	15.09	9.70	24.79	60.00	-35.21	QP	
10		9.3180	2.19	9.70	11.89	50.00	-38.11	AVG	
11		20.9700	11.51	9.78	21.29	60.00	-38.71	QP	
12		20.9700	0.99	9.78	10.77	50.00	-39.23	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

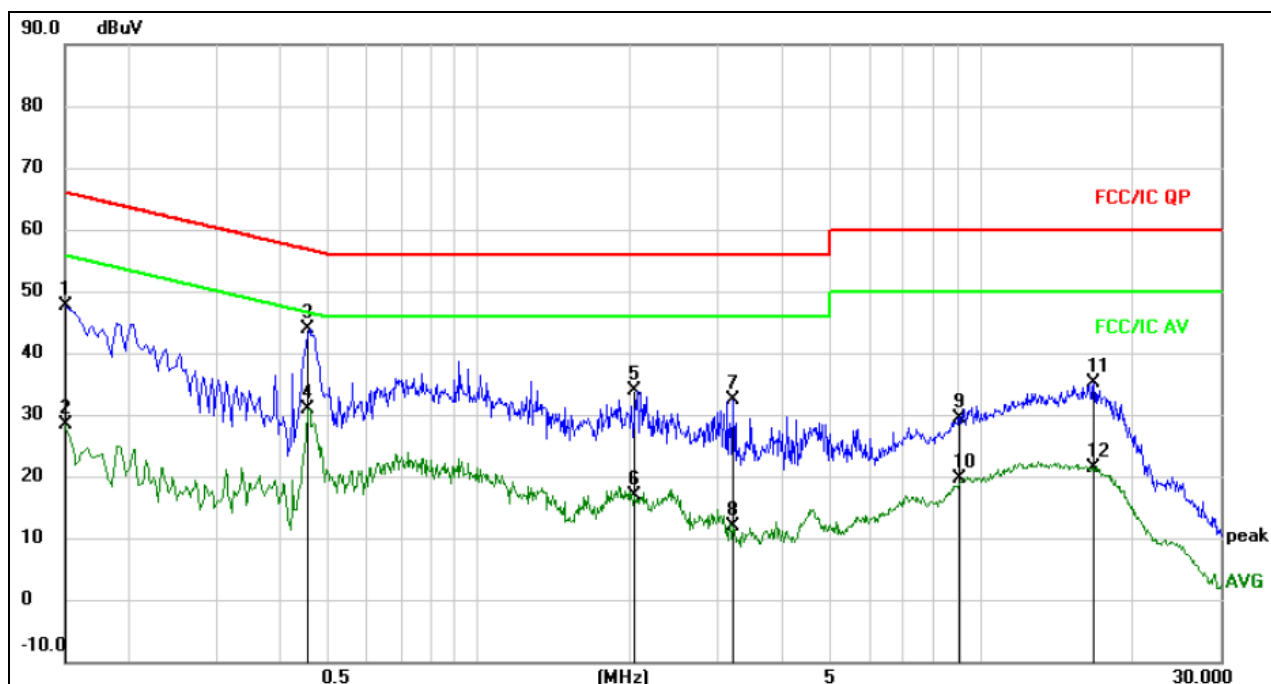


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV	dBuV	dB	Detector	Comment
1		0.1500	38.18	9.52	47.70	66.00	-18.30	QP	
2		0.1500	18.86	9.52	28.38	56.00	-27.62	AVG	
3	*	0.4580	34.29	9.55	43.84	56.73	-12.89	QP	
4		0.4580	21.31	9.55	30.86	46.73	-15.87	AVG	
5		2.0500	24.26	9.59	33.85	56.00	-22.15	QP	
6		2.0500	7.37	9.59	16.96	46.00	-29.04	AVG	
7		3.2180	22.76	9.68	32.44	56.00	-23.56	QP	
8		3.2180	2.08	9.68	11.76	46.00	-34.24	AVG	
9		9.0460	19.75	9.70	29.45	60.00	-30.55	QP	
10		9.0460	9.83	9.70	19.53	50.00	-30.47	AVG	
11		16.7700	25.41	9.73	35.14	60.00	-24.86	QP	
12		16.7700	11.67	9.73	21.40	50.00	-28.60	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

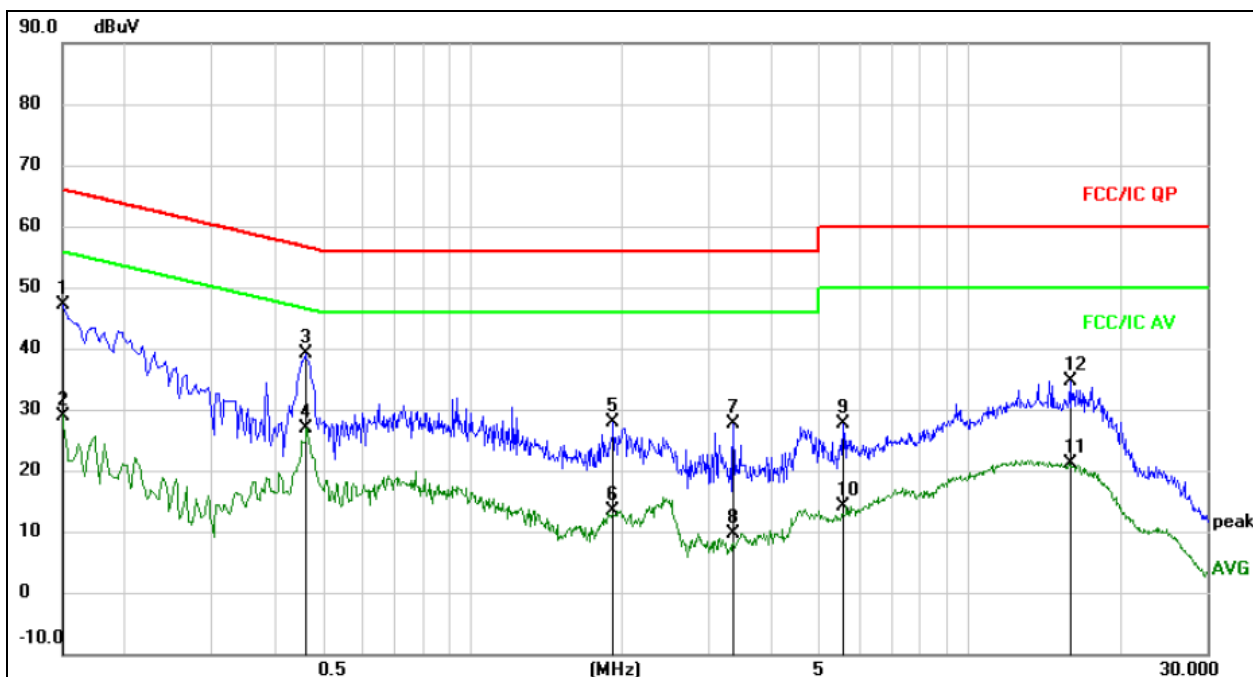

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV		dBuV	dBuV	dB		
1		0.1500	37.69	9.52	47.21	66.00	-18.79	QP	
2		0.1500	19.48	9.52	29.00	56.00	-27.00	AVG	
3	*	0.4620	29.64	9.56	39.20	56.66	-17.46	QP	
4		0.4620	17.36	9.56	26.92	46.66	-19.74	AVG	
5		1.9220	18.25	9.59	27.84	56.00	-28.16	QP	
6		1.9220	3.90	9.59	13.49	46.00	-32.51	AVG	
7		3.3500	17.96	9.68	27.64	56.00	-28.36	QP	
8		3.3500	0.04	9.68	9.72	46.00	-36.28	AVG	
9		5.5780	17.74	9.78	27.52	60.00	-32.48	QP	
10		5.5780	4.40	9.78	14.18	50.00	-35.82	AVG	
11		15.8540	11.36	9.72	21.08	50.00	-28.92	AVG	
12		15.8940	24.80	9.72	34.52	60.00	-25.48	QP	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

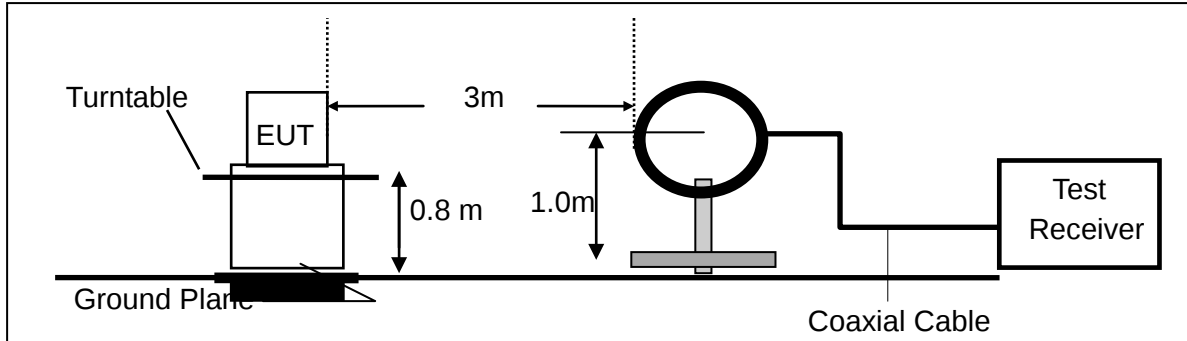

(b) For radiated emissions from 30MHz to 1000MHz

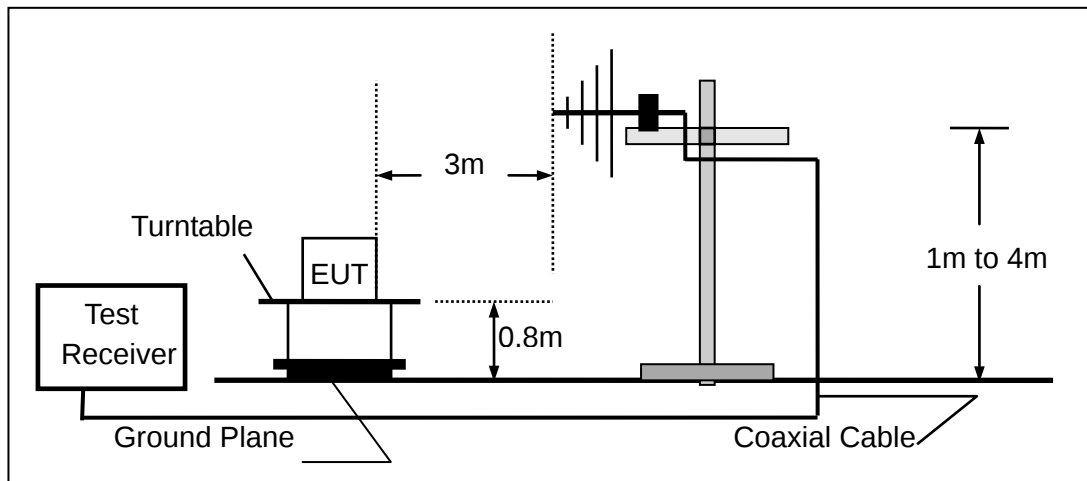

(c) For radiated emissions above 1000MHz

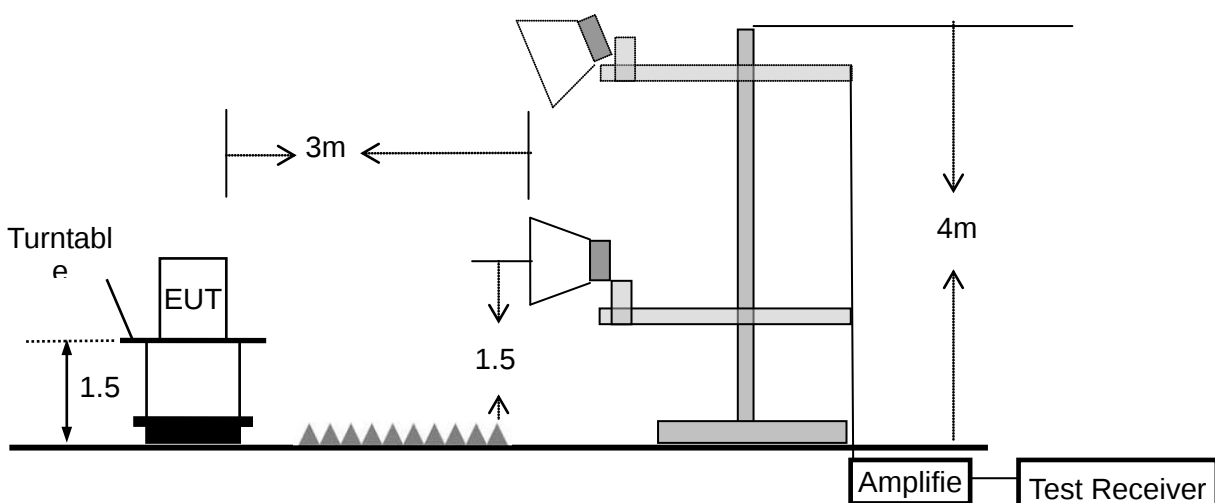



3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.



3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



3.2.7 TEST RESULTS (30MHZ – 1GHZ)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

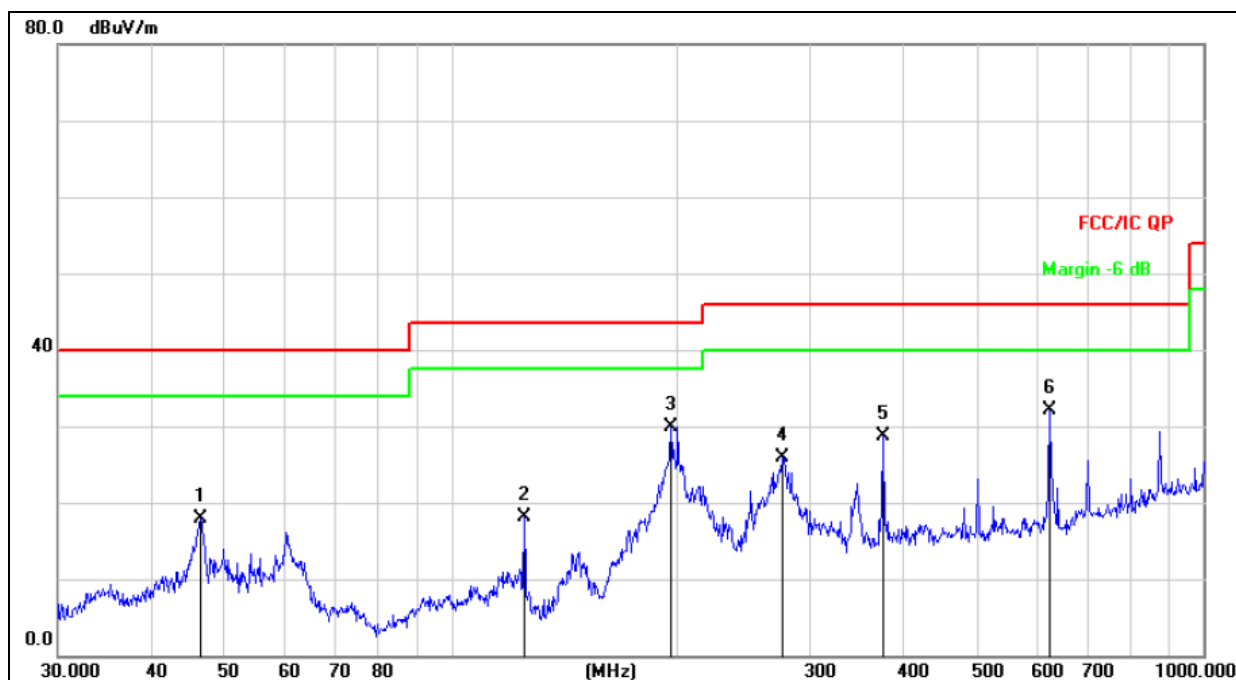


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.5030	32.99	-15.05	17.94	40.00	-22.06	QP
2		125.0066	36.00	-17.89	18.11	43.50	-25.39	QP
3	*	195.8220	46.48	-16.57	29.91	43.50	-13.59	QP
4		275.1570	40.31	-14.37	25.94	46.00	-20.06	QP
5		375.9385	40.28	-11.64	28.64	46.00	-17.36	QP
6		625.0780	38.69	-6.67	32.02	46.00	-13.98	QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

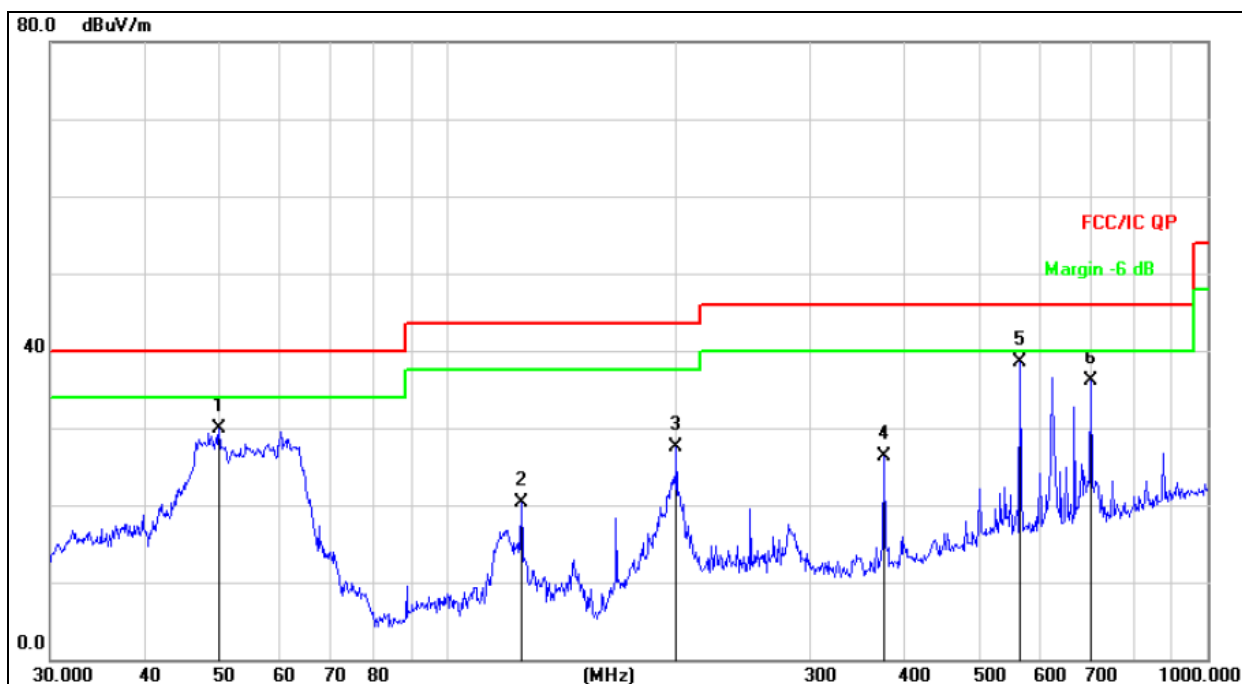


Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.0566	44.85	-14.86	29.99	40.00	-10.01	QP
2		125.0066	38.22	-17.89	20.33	43.50	-23.17	QP
3		199.9856	43.79	-16.30	27.49	43.50	-16.01	QP
4		375.9385	37.98	-11.64	26.34	46.00	-19.66	QP
5	*	566.6223	45.75	-7.29	38.46	46.00	-7.54	QP
6		701.7609	41.30	-5.11	36.19	46.00	-9.81	QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

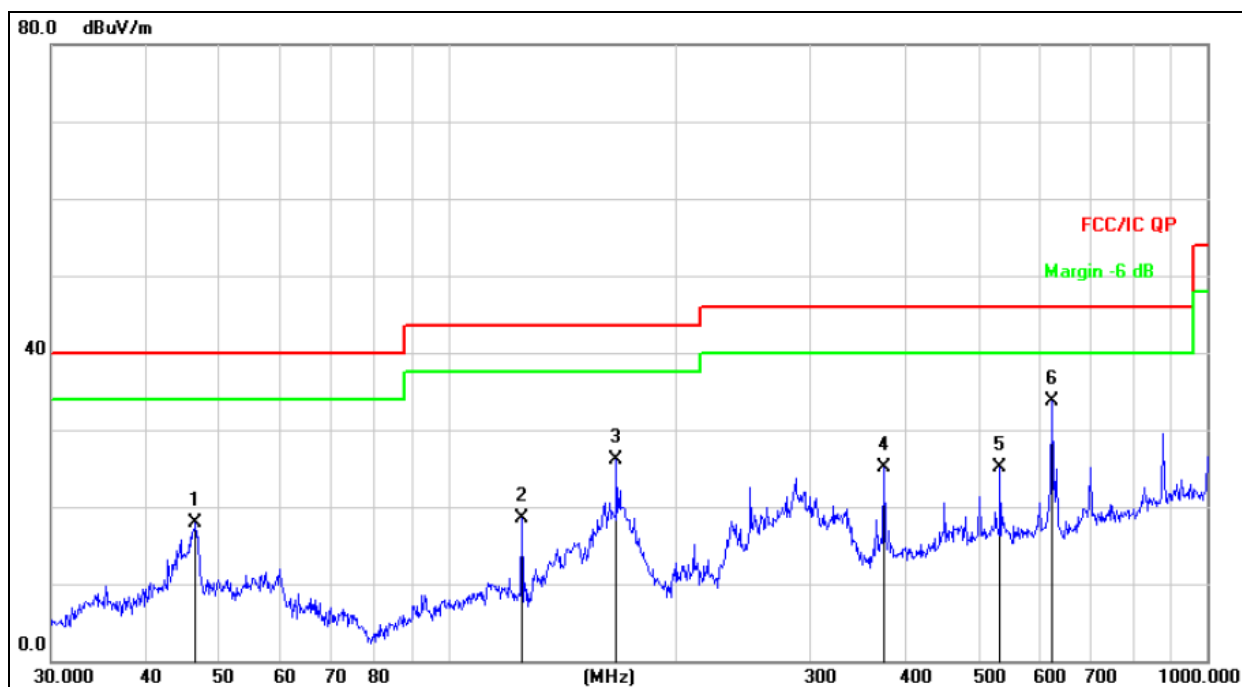


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB Detector
1		46.5030	32.87	-15.05	17.82	40.00	-22.18 QP
2		125.0066	36.40	-17.89	18.51	43.50	-24.99 QP
3		166.6514	44.59	-18.43	26.16	43.50	-17.34 QP
4		374.6225	36.80	-11.67	25.13	46.00	-20.87 QP
5		533.8321	33.27	-8.09	25.18	46.00	-20.82 QP
6	*	625.0780	40.39	-6.67	33.72	46.00	-12.28 QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

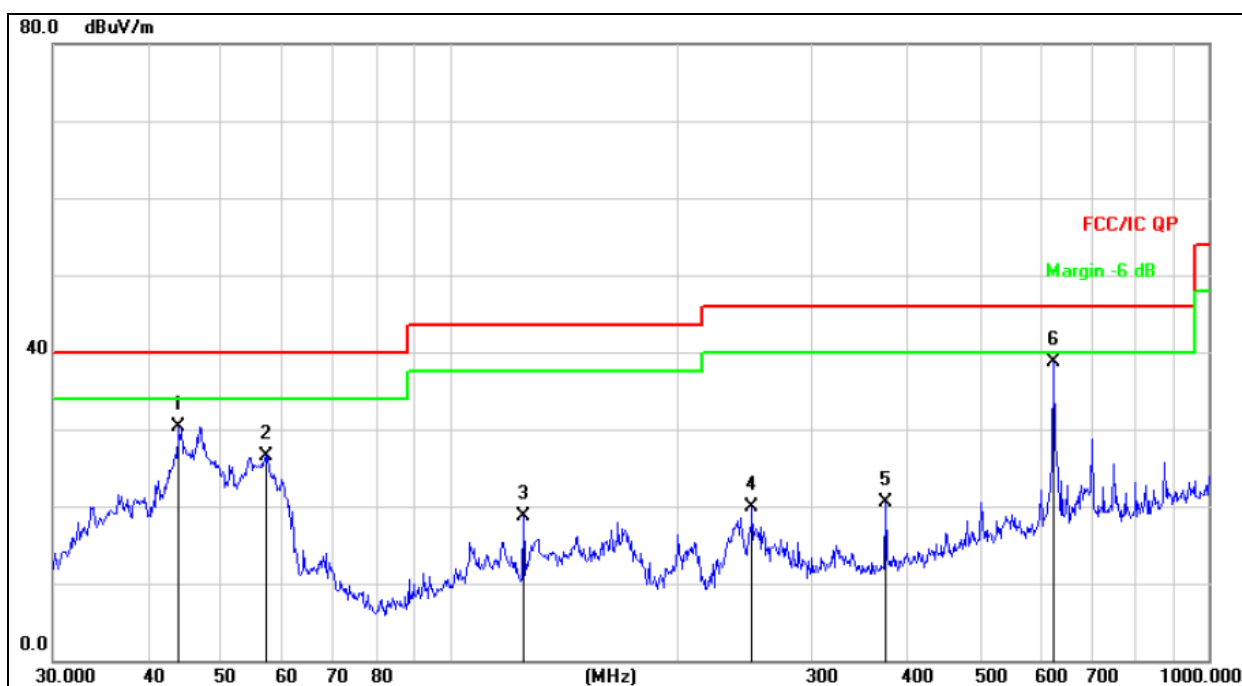

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.9658	45.58	-15.19	30.39	40.00	-9.61	QP
2		57.1914	42.13	-15.61	26.52	40.00	-13.48	QP
3		125.0066	36.59	-17.89	18.70	43.50	-24.80	QP
4		250.3011	35.00	-15.14	19.86	46.00	-26.14	QP
5		375.9385	32.09	-11.64	20.45	46.00	-25.55	QP
6	*	625.0780	45.34	-6.67	38.67	46.00	-7.33	QP



3.2.8 TEST RESULTS (1GHz-40GHz)

Test Mode :	TX(5.2G) - 802.11a
-------------	--------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.24	5.94	35.40	44.00	59.58	74.00	-14.42	Pk
Vertical	4434.157	46.56	5.94	35.40	44.00	43.9	54.00	-10.1	AV
Vertical	10360.362	60.44	8.46	39.75	44.50	64.15	74.00	-9.85	Pk
Vertical	10360.362	42.92	8.46	39.75	44.50	46.63	54.00	-7.37	AV
Vertical	15540.196	61.48	10.12	38.80	44.10	66.3	74.00	-7.7	Pk
Vertical	15540.196	37.55	10.12	38.80	42.70	43.77	54.00	-10.23	AV
Horizontal	4434.521	66.54	5.94	35.18	44.00	63.66	74.00	-10.34	Pk
Horizontal	4434.521	44.19	5.94	35.18	44.00	41.31	54.00	-12.69	AV
Horizontal	10360.623	58.93	8.46	38.71	44.50	61.6	74.00	-12.4	Pk
Horizontal	10360.623	41.05	8.46	38.71	44.50	43.72	54.00	-10.28	AV
Horizontal	10540.865	56.92	10.12	38.38	44.10	61.32	74.00	-12.68	Pk
Horizontal	10540.865	38.84	10.12	38.38	44.10	43.24	54.00	-10.76	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.093	60.22	6.48	36.35	44.05	59	74.00	-15	Pk
Vertical	4592.093	41.95	6.48	36.35	44.05	40.73	54.00	-13.27	AV
Vertical	10400.424	59.66	8.47	37.88	44.51	61.5	74.00	-12.5	Pk
Vertical	10400.424	42.72	8.47	37.88	44.51	44.56	54.00	-9.44	AV
Vertical	15600.218	56.54	10.12	38.8	44.10	61.36	74.00	-12.64	Pk
Vertical	15600.218	36.67	10.12	38.8	42.70	42.89	54.00	-11.11	AV
Horizontal	4592.691	59.83	6.48	36.37	44.05	58.63	74.00	-15.37	Pk
Horizontal	4592.691	43.18	6.48	36.37	44.05	41.98	54.00	-12.02	AV
Horizontal	10400.114	58.85	8.47	38.64	44.50	61.46	74.00	-12.54	Pk
Horizontal	10400.114	42.23	8.47	38.64	44.50	44.84	54.00	-9.16	AV
Horizontal	15600.187	59.82	10.12	38.38	44.10	64.22	74.00	-9.78	Pk
Horizontal	15600.187	38.74	10.12	38.38	44.10	43.14	54.00	-10.86	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.246	61.22	7.10	37.24	43.50	62.06	74.00	-11.94	Pk
Vertical	4739.246	44.44	7.10	37.24	43.50	45.28	54.00	-8.72	AV
Vertical	10480.371	60.56	8.46	37.68	44.50	62.2	74.00	-11.8	Pk
Vertical	10480.371	40.32	8.46	37.68	44.50	41.96	54.00	-12.04	AV
Vertical	15720.359	61.77	10.12	38.8	44.10	66.59	74.00	-7.41	Pk
Vertical	15720.359	39.62	10.12	38.8	42.70	45.84	54.00	-8.16	AV
Horizontal	4739.352	62.24	7.10	37.24	43.50	63.08	74.00	-10.92	Pk
Horizontal	4739.352	43.22	7.10	37.24	43.50	44.06	54.00	-9.94	AV
Horizontal	10480.111	62.58	8.46	38.57	44.50	65.11	74.00	-8.89	Pk
Horizontal	10480.111	43.32	8.46	38.57	44.50	45.85	54.00	-8.15	AV
Horizontal	15720.357	60.79	10.12	38.38	44.10	65.19	74.00	-8.81	Pk
Horizontal	15720.357	42.24	10.12	38.38	44.10	46.64	54.00	-7.36	AV

Note:"

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode :	TX(5.2G) - 802.11n-HT20
-------------	-------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.24	5.94	35.40	44.00	59.58	74.00	-14.42	Pk
Vertical	4434.157	46.56	5.94	35.40	44.00	43.9	54.00	-10.1	AV
Vertical	10360.362	60.44	8.46	39.75	44.50	64.15	74.00	-9.85	Pk
Vertical	10360.362	42.96	8.46	39.75	44.50	46.67	54.00	-7.33	AV
Vertical	15540.196	61.44	10.12	38.80	44.10	66.26	74.00	-7.74	Pk
Vertical	15540.196	37.55	10.12	38.80	42.70	43.77	54.00	-10.23	AV
Horizontal	4434.521	66.53	5.94	35.18	44.00	63.65	74.00	-10.35	Pk
Horizontal	4434.521	44.15	5.94	35.18	44.00	41.27	54.00	-12.73	AV
Horizontal	10360.623	58.97	8.46	38.71	44.50	61.64	74.00	-12.36	Pk
Horizontal	10360.623	41.02	8.46	38.71	44.50	43.69	54.00	-10.31	AV
Horizontal	15540.865	56.95	10.12	38.38	44.10	61.35	74.00	-12.65	Pk
Horizontal	15540.865	38.85	10.12	38.38	44.10	43.25	54.00	-10.75	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.093	60.28	6.48	36.35	44.05	59.06	74.00	-14.94	Pk
Vertical	4592.093	41.99	6.48	36.35	44.05	40.77	54.00	-13.23	AV
Vertical	10400.424	59.66	8.47	37.88	44.51	61.5	74.00	-12.5	Pk
Vertical	10400.424	42.74	8.47	37.88	44.51	44.58	54.00	-9.42	AV
Vertical	15600.218	56.56	10.12	38.8	44.10	61.38	74.00	-12.62	Pk
Vertical	15600.218	36.63	10.12	38.8	42.70	42.85	54.00	-11.15	AV
Horizontal	4592.691	59.85	6.48	36.37	44.05	58.65	74.00	-15.35	Pk
Horizontal	4592.691	43.13	6.48	36.37	44.05	41.93	54.00	-12.07	AV
Horizontal	10400.114	58.87	8.47	38.64	44.50	61.48	74.00	-12.52	Pk
Horizontal	10400.114	42.23	8.47	38.64	44.50	44.84	54.00	-9.16	AV
Horizontal	15600.187	59.85	10.12	38.38	44.10	64.25	74.00	-9.75	Pk
Horizontal	15600.187	38.77	10.12	38.38	44.10	43.17	54.00	-10.83	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.246	61.28	7.10	37.24	43.50	62.12	74.00	-11.88	Pk
Vertical	4739.246	44.45	7.10	37.24	43.50	45.29	54.00	-8.71	AV
Vertical	10480.371	60.54	8.46	37.68	44.50	62.18	74.00	-11.82	Pk
Vertical	10480.371	40.37	8.46	37.68	44.50	42.01	54.00	-11.99	AV
Vertical	15720.359	61.73	10.12	38.8	44.10	66.55	74.00	-7.45	Pk
Vertical	15720.359	39.66	10.12	38.8	42.70	45.88	54.00	-8.12	AV
Horizontal	4739.352	62.24	7.10	37.24	43.50	63.08	74.00	-10.92	Pk
Horizontal	4739.352	43.26	7.10	37.24	43.50	44.1	54.00	-9.9	AV
Horizontal	10480.111	62.63	8.46	38.57	44.50	65.16	74.00	-8.84	Pk
Horizontal	10480.111	43.37	8.46	38.57	44.50	45.9	54.00	-8.1	AV
Horizontal	15720.357	60.73	10.12	38.38	44.10	65.13	74.00	-8.87	Pk
Horizontal	15720.357	42.37	10.12	38.38	44.10	46.77	54.00	-7.23	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode :	TX(5.2G) - 802.11n-HT40
-------------	-------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G									
Vertical	4434.157	62.24	5.94	35.40	44.00	59.58	74.00	-14.42	Pk
Vertical	4434.157	46.58	5.94	35.40	44.00	43.92	54.00	-10.08	AV
Vertical	10380.362	60.47	8.46	39.75	44.50	64.18	74.00	-9.82	Pk
Vertical	10380.362	42.94	8.46	39.75	44.50	46.65	54.00	-7.35	AV
Vertical	15570.196	61.46	10.12	38.80	44.10	66.28	74.00	-7.72	Pk
Vertical	15570.196	37.53	10.12	38.80	42.70	43.75	54.00	-10.25	AV
Horizontal	4434.521	66.52	5.94	35.18	44.00	63.64	74.00	-10.36	Pk
Horizontal	4434.521	44.28	5.94	35.18	44.00	41.4	54.00	-12.6	AV
Horizontal	10380.623	58.83	8.46	38.71	44.50	61.5	74.00	-12.5	Pk
Horizontal	10380.623	41.06	8.46	38.71	44.50	43.73	54.00	-10.27	AV
Horizontal	15570.865	56.93	10.12	38.38	44.10	61.33	74.00	-12.67	Pk
Horizontal	15570.865	38.86	10.12	38.38	44.10	43.26	54.00	-10.74	AV
High Channel (5230 MHz)-Above 1G									
Vertical	4739.246	61.34	7.10	37.24	43.50	62.18	74.00	-11.82	Pk
Vertical	4739.246	44.47	7.10	37.24	43.50	45.31	54.00	-8.69	AV
Vertical	10460.371	60.22	8.46	37.68	44.50	61.86	74.00	-12.14	Pk
Vertical	10460.371	40.43	8.46	37.68	44.50	42.07	54.00	-11.93	AV
Vertical	15690.359	61.67	10.12	38.8	44.10	66.49	74.00	-7.51	Pk
Vertical	15690.359	39.67	10.12	38.8	42.70	45.89	54.00	-8.11	AV
Horizontal	4739.352	62.24	7.10	37.24	43.50	63.08	74.00	-10.92	Pk
Horizontal	4739.352	43.17	7.10	37.24	43.50	44.01	54.00	-9.99	AV
Horizontal	10460.111	62.23	8.46	38.57	44.50	64.76	74.00	-9.24	Pk
Horizontal	10460.111	43.37	8.46	38.57	44.50	45.9	54.00	-8.1	AV
Horizontal	15690.357	60.72	10.12	38.38	44.10	65.12	74.00	-8.88	Pk
Horizontal	15690.357	42.23	10.12	38.38	44.10	46.63	54.00	-7.37	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX(5.2G) - 802.11ac-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.29	5.94	35.40	44.00	59.63	74.00	-14.37	Pk
Vertical	4434.157	46.52	5.94	35.40	44.00	43.86	54.00	-10.14	AV
Vertical	10360.367	60.46	8.46	39.75	44.50	64.17	74.00	-9.83	Pk
Vertical	10360.367	42.95	8.46	39.75	44.50	46.66	54.00	-7.34	AV
Vertical	15540.195	61.49	10.12	38.80	44.10	66.31	74.00	-7.69	Pk
Vertical	15540.195	37.52	10.12	38.80	42.70	43.74	54.00	-10.26	AV
Horizontal	4434.524	66.59	5.94	35.18	44.00	63.71	74.00	-10.29	Pk
Horizontal	4434.524	44.12	5.94	35.18	44.00	41.24	54.00	-12.76	AV
Horizontal	10360.627	58.99	8.46	38.71	44.50	61.66	74.00	-12.34	Pk
Horizontal	10360.627	41.03	8.46	38.71	44.50	43.7	54.00	-10.3	AV
Horizontal	15540.865	56.98	10.12	38.38	44.10	61.38	74.00	-12.62	Pk
Horizontal	15540.865	38.82	10.12	38.38	44.10	43.22	54.00	-10.78	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.098	60.31	6.48	36.35	44.05	59.09	74.00	-14.91	Pk
Vertical	4592.098	41.83	6.48	36.35	44.05	40.61	54.00	-13.39	AV
Vertical	10400.428	59.54	8.47	37.88	44.51	61.38	74.00	-12.62	Pk
Vertical	10400.428	42.72	8.47	37.88	44.51	44.56	54.00	-9.44	AV
Vertical	15600.214	56.52	10.12	38.8	44.10	61.34	74.00	-12.66	Pk
Vertical	15600.214	36.68	10.12	38.8	42.70	42.9	54.00	-11.1	AV
Horizontal	4592.699	59.84	6.48	36.37	44.05	58.64	74.00	-15.36	Pk
Horizontal	4592.699	43.18	6.48	36.37	44.05	41.98	54.00	-12.02	AV
Horizontal	10400.113	58.82	8.47	38.64	44.50	61.43	74.00	-12.57	Pk
Horizontal	10400.113	42.28	8.47	38.64	44.50	44.89	54.00	-9.11	AV
Horizontal	15600.187	59.83	10.12	38.38	44.10	64.23	74.00	-9.77	Pk
Horizontal	15600.187	38.78	10.12	38.38	44.10	43.18	54.00	-10.82	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.249	61.23	7.10	37.24	43.50	62.07	74.00	-11.93	Pk
Vertical	4739.249	44.48	7.10	37.24	43.50	45.32	54.00	-8.68	AV
Vertical	10480.375	60.53	8.46	37.68	44.50	62.17	74.00	-11.83	Pk
Vertical	10480.375	40.39	8.46	37.68	44.50	42.03	54.00	-11.97	AV
Vertical	15720.358	61.74	10.12	38.8	44.10	66.56	74.00	-7.44	Pk
Vertical	15720.358	39.53	10.12	38.8	42.70	45.75	54.00	-8.25	AV
Horizontal	4739.354	62.28	7.10	37.24	43.50	63.12	74.00	-10.88	Pk
Horizontal	4739.354	43.35	7.10	37.24	43.50	44.19	54.00	-9.81	AV
Horizontal	10480.111	62.68	8.46	38.57	44.50	65.21	74.00	-8.79	Pk
Horizontal	10480.111	43.38	8.46	38.57	44.50	45.91	54.00	-8.09	AV
Horizontal	15720.356	60.65	10.12	38.38	44.10	65.05	74.00	-8.95	Pk
Horizontal	15720.353	42.39	10.12	38.38	44.10	46.79	54.00	-7.21	AV



Test Mode : TX(5.2G) - 802.11ac-HT40

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G									
Vertical	4434.155	62.34	5.94	35.40	44.00	59.68	74.00	-14.32	Pk
Vertical	4434.155	46.52	5.94	35.40	44.00	43.86	54.00	-10.14	AV
Vertical	10380.367	60.48	8.46	39.75	44.50	64.19	74.00	-9.81	Pk
Vertical	10380.367	42.88	8.46	39.75	44.50	46.59	54.00	-7.41	AV
Vertical	15570.193	61.49	10.12	38.80	44.10	66.31	74.00	-7.69	Pk
Vertical	15570.193	37.54	10.12	38.80	42.70	43.76	54.00	-10.24	AV
Horizontal	4434.528	66.59	5.94	35.18	44.00	63.71	74.00	-10.29	Pk
Horizontal	4434.528	44.33	5.94	35.18	44.00	41.45	54.00	-12.55	AV
Horizontal	10380.623	58.89	8.46	38.71	44.50	61.56	74.00	-12.44	Pk
Horizontal	10380.623	41.04	8.46	38.71	44.50	43.71	54.00	-10.29	AV
Horizontal	15570.869	56.68	10.12	38.38	44.10	61.08	74.00	-12.92	Pk
Horizontal	15570.869	38.89	10.12	38.38	44.10	43.29	54.00	-10.71	AV
High Channel (5230 MHz)-Above 1G									
Vertical	4739.244	61.34	7.10	37.24	43.50	62.18	74.00	-11.82	Pk
Vertical	4739.244	44.48	7.10	37.24	43.50	45.32	54.00	-8.68	AV
Vertical	10460.377	60.23	8.46	37.68	44.50	61.87	74.00	-12.13	Pk
Vertical	10460.377	40.49	8.46	37.68	44.50	42.13	54.00	-11.87	AV
Vertical	15690.352	61.63	10.12	38.8	44.10	66.45	74.00	-7.55	Pk
Vertical	15690.356	39.64	10.12	38.8	42.70	45.86	54.00	-8.14	AV
Horizontal	4739.352	62.29	7.10	37.24	43.50	63.13	74.00	-10.87	Pk
Horizontal	4739.352	43.11	7.10	37.24	43.50	43.95	54.00	-10.05	AV
Horizontal	10460.115	62.28	8.46	38.57	44.50	64.81	74.00	-9.19	Pk
Horizontal	10460.115	43.26	8.46	38.57	44.50	45.79	54.00	-8.21	AV
Horizontal	15690.353	60.78	10.12	38.38	44.10	65.18	74.00	-8.82	Pk
Horizontal	15690.353	42.22	10.12	38.38	44.10	46.62	54.00	-7.38	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX(5.2G) - 802.11ac-HT80

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G									
Vertical	4434.157	62.24	5.94	35.40	44.00	59.58	74.00	-14.42	Pk
Vertical	4434.157	46.58	5.94	35.40	44.00	43.92	54.00	-10.08	AV
Vertical	10420.361	60.46	8.46	39.75	44.50	64.17	74.00	-9.83	Pk
Vertical	10420.361	42.97	8.46	39.75	44.50	46.68	54.00	-7.32	AV
Vertical	15630.193	61.44	10.12	38.80	44.10	66.26	74.00	-7.74	Pk
Vertical	15630.193	37.57	10.12	38.80	42.70	43.79	54.00	-10.21	AV
Horizontal	4434.157	66.54	5.94	35.18	44.00	63.66	74.00	-10.34	Pk
Horizontal	4434.157	44.26	5.94	35.18	44.00	41.38	54.00	-12.62	AV
Horizontal	10420.366	58.87	8.46	38.71	44.50	61.54	74.00	-12.46	Pk
Horizontal	10420.366	41.06	8.46	38.71	44.50	43.73	54.00	-10.27	AV
Horizontal	15630.194	56.94	10.12	38.38	44.10	61.34	74.00	-12.66	Pk
Horizontal	15630.194	38.84	10.12	38.38	44.10	43.24	54.00	-10.76	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode :	TX (5.8G) -- 802.11a
-------------	----------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.195	59.94	5.94	35.40	44.00	57.28	74.00	-16.72	Pk
Vertical	4679.195	39.66	5.94	35.40	44.00	37	54.00	-17	AV
Vertical	11490.364	59.53	8.46	39.75	44.50	63.24	74.00	-10.76	Pk
Vertical	11490.364	42.15	8.46	39.75	44.50	45.86	54.00	-8.14	AV
Vertical	17235.101	55.53	10.12	38.80	44.10	60.35	74.00	-13.65	Pk
Vertical	17235.101	38.66	10.12	38.80	42.70	44.88	54.00	-9.12	AV
Horizontal	4679.332	57.93	5.94	35.18	44.00	55.05	74.00	-18.95	Pk
Horizontal	4679.332	44.55	5.94	35.18	44.00	41.67	54.00	-12.33	AV
Horizontal	11490.164	56.63	8.46	38.71	44.50	59.3	74.00	-14.7	Pk
Horizontal	11490.164	40.16	8.46	38.71	44.50	42.83	54.00	-11.17	AV
Horizontal	17235.196	58.63	10.12	38.38	44.10	63.03	74.00	-10.97	Pk
Horizontal	17235.196	42.27	10.12	38.38	44.10	46.67	54.00	-7.33	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.228	59.87	6.48	36.35	44.05	58.65	74.00	-15.35	Pk
Vertical	4592.228	43.35	6.48	36.35	44.05	42.13	54.00	-11.87	AV
Vertical	11570.203	61.18	8.47	37.88	44.51	63.02	74.00	-10.98	Pk
Vertical	11570.203	43.25	8.47	37.88	44.51	45.09	54.00	-8.91	AV
Vertical	17355.147	59.57	10.12	38.8	44.10	64.39	74.00	-9.61	Pk
Vertical	17355.147	42.25	10.12	38.8	42.70	48.47	54.00	-5.53	AV
Horizontal	4592.526	58.68	6.48	36.37	44.05	57.48	74.00	-16.52	Pk
Horizontal	4592.526	43.35	6.48	36.37	44.05	42.15	54.00	-11.85	AV
Horizontal	11570.123	60.06	8.47	38.64	44.50	62.67	74.00	-11.33	Pk
Horizontal	11570.123	42.25	8.47	38.64	44.50	44.86	54.00	-9.14	AV
Horizontal	17355.269	57.58	10.12	38.38	44.10	61.98	74.00	-12.02	Pk
Horizontal	17355.269	42.26	10.12	38.38	44.10	46.66	54.00	-7.34	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	57.68	7.10	37.24	43.50	58.52	74.00	-15.48	Pk
Vertical	6039.199	42.25	7.10	37.24	43.50	43.09	54.00	-10.91	AV
Vertical	11650.562	58.97	8.46	37.68	44.50	60.61	74.00	-13.39	Pk
Vertical	11650.562	41.15	8.46	37.68	44.50	42.79	54.00	-11.21	AV
Vertical	17475.128	58.56	10.12	38.8	44.10	63.38	74.00	-10.62	Pk
Vertical	17475.128	40.35	10.12	38.8	42.70	46.57	54.00	-7.43	AV
Horizontal	6039.232	59.94	7.10	37.24	43.50	60.78	74.00	-13.22	Pk
Horizontal	6039.232	43.38	7.10	37.24	43.50	44.22	54.00	-9.78	AV
Horizontal	11650.319	52.25	8.46	38.57	44.50	54.78	74.00	-19.22	Pk
Horizontal	11650.319	40.18	8.46	38.57	44.50	42.71	54.00	-11.29	AV
Horizontal	17475.062	57.74	10.12	38.38	44.10	62.14	74.00	-11.86	Pk
Horizontal	17475.062	40.35	10.12	38.38	44.10	44.75	54.00	-9.25	AV

Note:".

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX (5.8G) --802.11n-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.195	59.75	5.94	35.40	44.00	57.09	74.00	-16.91	Pk
Vertical	4679.195	39.57	5.94	35.40	44.00	36.91	54.00	-17.09	AV
Vertical	11490.364	59.55	8.46	39.75	44.50	63.26	74.00	-10.74	Pk
Vertical	11490.364	42.27	8.46	39.75	44.50	45.98	54.00	-8.02	AV
Vertical	17235.101	55.64	10.12	38.80	44.10	60.46	74.00	-13.54	Pk
Vertical	17235.101	38.87	10.12	38.80	42.70	45.09	54.00	-8.91	AV
Horizontal	4679.332	57.83	5.94	35.18	44.00	54.95	74.00	-19.05	Pk
Horizontal	4679.332	44.56	5.94	35.18	44.00	41.68	54.00	-12.32	AV
Horizontal	11490.164	56.47	8.46	38.71	44.50	59.14	74.00	-14.86	Pk
Horizontal	11490.164	40.14	8.46	38.71	44.50	42.81	54.00	-11.19	AV
Horizontal	17235.196	58.27	10.12	38.38	44.10	62.67	74.00	-11.33	Pk
Horizontal	17235.196	42.13	10.12	38.38	44.10	46.53	54.00	-7.47	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.228	59.87	6.48	36.35	44.05	58.65	74.00	-15.35	Pk
Vertical	4592.228	43.65	6.48	36.35	44.05	42.43	54.00	-11.57	AV
Vertical	11570.203	61.78	8.47	37.88	44.51	63.62	74.00	-10.38	Pk
Vertical	11570.203	43.25	8.47	37.88	44.51	45.09	54.00	-8.91	AV
Vertical	17355.147	61.48	10.12	38.8	44.10	66.3	74.00	-7.7	Pk
Vertical	17355.147	44.25	10.12	38.8	42.70	50.47	54.00	-3.53	AV
Horizontal	4592.526	52.57	6.48	36.37	44.05	51.37	74.00	-22.63	Pk
Horizontal	4592.526	46.25	6.48	36.37	44.05	45.05	54.00	-8.95	AV
Horizontal	11570.123	64.16	8.47	38.64	44.50	66.77	74.00	-7.23	Pk
Horizontal	11570.123	45.26	8.47	38.64	44.50	47.87	54.00	-6.13	AV
Horizontal	17355.269	53.54	10.12	38.38	44.10	57.94	74.00	-16.06	Pk
Horizontal	17355.269	41.27	10.12	38.38	44.10	45.67	54.00	-8.33	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	55.64	7.10	37.24	43.50	56.48	74.00	-17.52	Pk
Vertical	6039.199	43.36	7.10	37.24	43.50	44.2	54.00	-9.8	AV
Vertical	11650.562	52.85	8.46	37.68	44.50	54.49	74.00	-19.51	Pk
Vertical	11650.562	43.14	8.46	37.68	44.50	44.78	54.00	-9.22	AV
Vertical	17475.128	54.57	10.12	38.8	44.10	59.39	74.00	-14.61	Pk
Vertical	17475.128	45.34	10.12	38.8	42.70	51.56	54.00	-2.44	AV
Horizontal	6039.232	55.97	7.10	37.24	43.50	56.81	74.00	-17.19	Pk
Horizontal	6039.232	43.44	7.10	37.24	43.50	44.28	54.00	-9.72	AV
Horizontal	11650.319	52.36	8.46	38.57	44.50	54.89	74.00	-19.11	Pk
Horizontal	11650.319	40.15	8.46	38.57	44.50	42.68	54.00	-11.32	AV
Horizontal	17475.062	57.77	10.12	38.38	44.10	62.17	74.00	-11.83	Pk
Horizontal	17475.062	40.33	10.12	38.38	44.10	44.73	54.00	-9.27	AV



Test Mode :	TX (5.8G) -- 802.11n-HT40
-------------	---------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	4679.195	59.83	5.94	35.40	44.00	57.17	74.00	-16.83	Pk
Vertical	4679.195	39.65	5.94	35.40	44.00	36.99	54.00	-17.01	AV
Vertical	11510.364	59.53	8.46	39.75	44.50	63.24	74.00	-10.76	Pk
Vertical	11510.364	42.27	8.46	39.75	44.50	45.98	54.00	-8.02	AV
Vertical	17265.101	55.54	10.12	38.80	44.10	60.36	74.00	-13.64	Pk
Vertical	17265.101	38.47	10.12	38.80	42.70	44.69	54.00	-9.31	AV
Horizontal	4679.332	57.65	5.94	35.18	44.00	54.77	74.00	-19.23	Pk
Horizontal	4679.332	44.58	5.94	35.18	44.00	41.7	54.00	-12.3	AV
Horizontal	11510.164	56.65	8.46	38.71	44.50	59.32	74.00	-14.68	Pk
Horizontal	11510.164	40.18	8.46	38.71	44.50	42.85	54.00	-11.15	AV
Horizontal	17265.196	58.64	10.12	38.38	44.10	63.04	74.00	-10.96	Pk
Horizontal	17265.196	42.27	10.12	38.38	44.10	46.67	54.00	-7.33	AV
High Channel (5795 MHz)-Above 1G									
Vertical	6039.199	55.28	7.10	37.24	43.50	56.12	74.00	-17.88	Pk
Vertical	6039.199	43.24	7.10	37.24	43.50	44.08	54.00	-9.92	AV
Vertical	11590.562	52.86	8.46	37.68	44.50	54.5	74.00	-19.5	Pk
Vertical	11590.562	43.17	8.46	37.68	44.50	44.81	54.00	-9.19	AV
Vertical	17385.128	54.56	10.12	38.8	44.10	59.38	74.00	-14.62	Pk
Vertical	17385.128	45.34	10.12	38.8	42.70	51.56	54.00	-2.44	AV
Horizontal	6039.232	55.88	7.10	37.24	43.50	56.72	74.00	-17.28	Pk
Horizontal	6039.232	43.35	7.10	37.24	43.50	44.19	54.00	-9.81	AV
Horizontal	11590.319	52.27	8.46	38.57	44.50	54.8	74.00	-19.2	Pk
Horizontal	11590.319	40.15	8.46	38.57	44.50	42.68	54.00	-11.32	AV
Horizontal	17385.062	57.77	10.12	38.38	44.10	62.17	74.00	-11.83	Pk
Horizontal	17385.062	40.34	10.12	38.38	44.10	44.74	54.00	-9.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX (5.8G) --802.11ac-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.198	59.64	5.94	35.40	44.00	56.98	74.00	-17.02	Pk
Vertical	4679.198	39.37	5.94	35.40	44.00	36.71	54.00	-17.29	AV
Vertical	11490.364	59.83	8.46	39.75	44.50	63.54	74.00	-10.46	Pk
Vertical	11490.364	42.25	8.46	39.75	44.50	45.96	54.00	-8.04	AV
Vertical	17235.105	55.67	10.12	38.80	44.10	60.49	74.00	-13.51	Pk
Vertical	17235.105	38.88	10.12	38.80	42.70	45.1	54.00	-8.9	AV
Horizontal	4679.332	57.45	5.94	35.18	44.00	54.57	74.00	-19.43	Pk
Horizontal	4679.332	44.48	5.94	35.18	44.00	41.6	54.00	-12.4	AV
Horizontal	11490.169	56.84	8.46	38.71	44.50	59.51	74.00	-14.49	Pk
Horizontal	11490.169	40.35	8.46	38.71	44.50	43.02	54.00	-10.98	AV
Horizontal	17235.196	58.28	10.12	38.38	44.10	62.68	74.00	-11.32	Pk
Horizontal	17235.196	42.12	10.12	38.38	44.10	46.52	54.00	-7.48	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.225	59.75	6.48	36.35	44.05	58.53	74.00	-15.47	Pk
Vertical	4592.225	43.84	6.48	36.35	44.05	42.62	54.00	-11.38	AV
Vertical	11570.208	61.45	8.47	37.88	44.51	63.29	74.00	-10.71	Pk
Vertical	11570.208	43.73	8.47	37.88	44.51	45.57	54.00	-8.43	AV
Vertical	17355.147	61.47	10.12	38.8	44.10	66.29	74.00	-7.71	Pk
Vertical	17355.147	44.68	10.12	38.8	42.70	50.9	54.00	-3.1	AV
Horizontal	4592.525	52.53	6.48	36.37	44.05	51.33	74.00	-22.67	Pk
Horizontal	4592.525	46.35	6.48	36.37	44.05	45.15	54.00	-8.85	AV
Horizontal	11570.123	64.16	8.47	38.64	44.50	66.77	74.00	-7.23	Pk
Horizontal	11570.123	45.27	8.47	38.64	44.50	47.88	54.00	-6.12	AV
Horizontal	17355.261	53.34	10.12	38.38	44.10	57.74	74.00	-16.26	Pk
Horizontal	17355.261	41.26	10.12	38.38	44.10	45.66	54.00	-8.34	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	55.67	7.10	37.24	43.50	56.51	74.00	-17.49	Pk
Vertical	6039.199	43.43	7.10	37.24	43.50	44.27	54.00	-9.73	AV
Vertical	11650.562	52.87	8.46	37.68	44.50	54.51	74.00	-19.49	Pk
Vertical	11650.562	43.45	8.46	37.68	44.50	45.09	54.00	-8.91	AV
Vertical	17475.128	54.53	10.12	38.8	44.10	59.35	74.00	-14.65	Pk
Vertical	17475.128	45.37	10.12	38.8	42.70	51.59	54.00	-2.41	AV
Horizontal	6039.232	55.96	7.10	37.24	43.50	56.8	74.00	-17.2	Pk
Horizontal	6039.232	43.65	7.10	37.24	43.50	44.49	54.00	-9.51	AV
Horizontal	11650.319	52.36	8.46	38.57	44.50	54.89	74.00	-19.11	Pk
Horizontal	11650.319	40.74	8.46	38.57	44.50	43.27	54.00	-10.73	AV
Horizontal	17475.062	57.73	10.12	38.38	44.10	62.13	74.00	-11.87	Pk
Horizontal	17475.062	40.34	10.12	38.38	44.10	44.74	54.00	-9.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	4679.194	59.83	5.94	35.40	44.00	57.17	74.00	-16.83	Pk
Vertical	4679.194	39.66	5.94	35.40	44.00	37	54.00	-17	AV
Vertical	11510.364	59.44	8.46	39.75	44.50	63.15	74.00	-10.85	Pk
Vertical	11510.364	42.26	8.46	39.75	44.50	45.97	54.00	-8.03	AV
Vertical	17265.105	55.37	10.12	38.80	44.10	60.19	74.00	-13.81	Pk
Vertical	17265.105	38.44	10.12	38.80	42.70	44.66	54.00	-9.34	AV
Horizontal	4679.332	57.57	5.94	35.18	44.00	54.69	74.00	-19.31	Pk
Horizontal	4679.332	44.45	5.94	35.18	44.00	41.57	54.00	-12.43	AV
Horizontal	11510.162	56.58	8.46	38.71	44.50	59.25	74.00	-14.75	Pk
Horizontal	11510.162	40.14	8.46	38.71	44.50	42.81	54.00	-11.19	AV
Horizontal	17265.196	58.64	10.12	38.38	44.10	63.04	74.00	-10.96	Pk
Horizontal	17265.196	42.22	10.12	38.38	44.10	46.62	54.00	-7.38	AV
High Channel (5795 MHz)-Above 1G									
Vertical	6039.195	55.23	7.10	37.24	43.50	56.07	74.00	-17.93	Pk
Vertical	6039.195	43.25	7.10	37.24	43.50	44.09	54.00	-9.91	AV
Vertical	11590.562	52.87	8.46	37.68	44.50	54.51	74.00	-19.49	Pk
Vertical	11590.562	43.13	8.46	37.68	44.50	44.77	54.00	-9.23	AV
Vertical	17385.123	54.56	10.12	38.8	44.10	59.38	74.00	-14.62	Pk
Vertical	17385.123	45.47	10.12	38.8	42.70	51.69	54.00	-2.31	AV
Horizontal	6039.232	55.58	7.10	37.24	43.50	56.42	74.00	-17.58	Pk
Horizontal	6039.232	43.36	7.10	37.24	43.50	44.2	54.00	-9.8	AV
Horizontal	11590.314	52.28	8.46	38.57	44.50	54.81	74.00	-19.19	Pk
Horizontal	11590.314	40.14	8.46	38.57	44.50	42.67	54.00	-11.33	AV
Horizontal	17385.068	57.75	10.12	38.38	44.10	62.15	74.00	-11.85	Pk
Horizontal	17385.065	40.37	10.12	38.38	44.10	44.77	54.00	-9.23	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode : TX(5.8G) - 802.11ac-HT80

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5775 MHz)-Above 1G									
Vertical	4434.157	62.34	5.94	35.40	44.00	59.68	74.00	-14.32	Pk
Vertical	4434.157	46.52	5.94	35.40	44.00	43.86	54.00	-10.14	AV
Vertical	11550.361	60.47	8.46	39.75	44.50	64.18	74.00	-9.82	Pk
Vertical	11550.361	42.94	8.46	39.75	44.50	46.65	54.00	-7.35	AV
Vertical	17325.193	61.46	10.12	38.80	44.10	66.28	74.00	-7.72	Pk
Vertical	17325.193	37.53	10.12	38.80	42.70	43.75	54.00	-10.25	AV
Horizontal	4434.157	66.28	5.94	35.18	44.00	63.4	74.00	-10.6	Pk
Horizontal	4434.157	44.25	5.94	35.18	44.00	41.37	54.00	-12.63	AV
Horizontal	11550.365	58.38	8.46	38.71	44.50	61.05	74.00	-12.95	Pk
Horizontal	11550.365	41.19	8.46	38.71	44.50	43.86	54.00	-10.14	AV
Horizontal	17325.191	56.94	10.12	38.38	44.10	61.34	74.00	-12.66	Pk
Horizontal	17325.191	38.86	10.12	38.38	44.10	43.26	54.00	-10.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,



4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

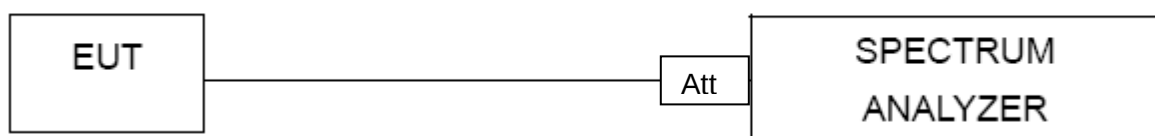

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



4.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

Note: Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain = $[10\log(GA + GB)]$ dbi = 6.01dbi, limit = $17 - (6.01 - 6) = 16.99$


Mode	Frequency	Measured Power Density (dBm/MHz)			Limit (dBm)	Result
		ANT A	ANT B	Total		
802.11 a	5180 MHz	2.004	1.985	/	17	PASS
	5200 MHz	2.724	2.597	/	17	PASS
	5240 MHz	1.965	0.791	/	17	PASS
802.11 n20	5180 MHz	1.960	1.823	4.902	16.99	PASS
	5200 MHz	1.991	1.523	4.774	16.99	PASS
	5240 MHz	1.037	0.686	3.875	16.99	PASS
802.11 n40	5190 MHz	5.423	5.150	8.299	16.99	PASS
	5230 MHz	3.487	3.691	6.600	16.99	PASS
802.11 AC20	5180 MHz	2.186	2.096	5.152	16.99	PASS
	5200 MHz	2.058	1.784	4.933	16.99	PASS
	5240 MHz	1.416	1.030	4.238	16.99	PASS
802.11 AC40	5190 MHz	4.537	4.603	7.580	16.99	PASS
	5230 MHz	3.501	3.745	6.635	16.99	PASS
802.11 AC80	5210 MHz	2.391	2.248	5.330	16.99	PASS




(802.11a) PSD plot on channel 36

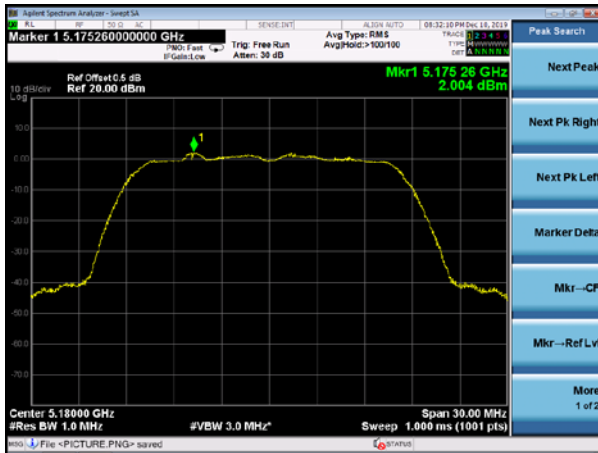


(802.11n20) PSD plot on channel 36

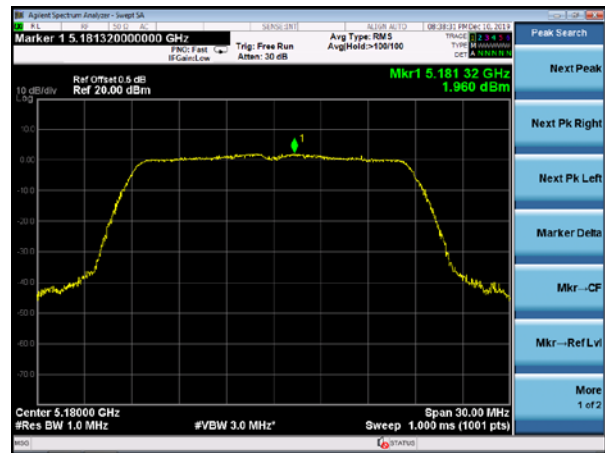


(802.11a) PSD plot on channel 40

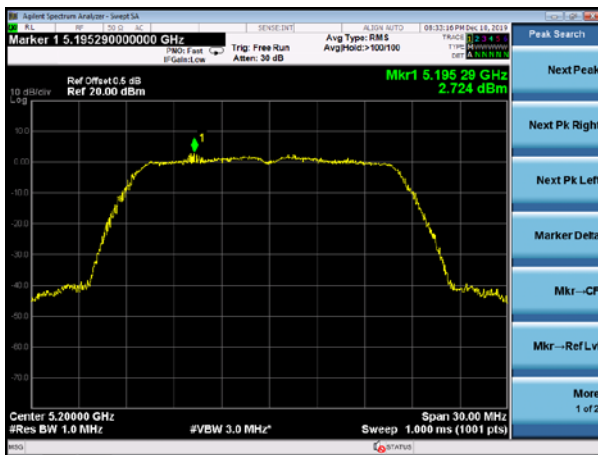


(802.11n20) PSD plot on channel 40

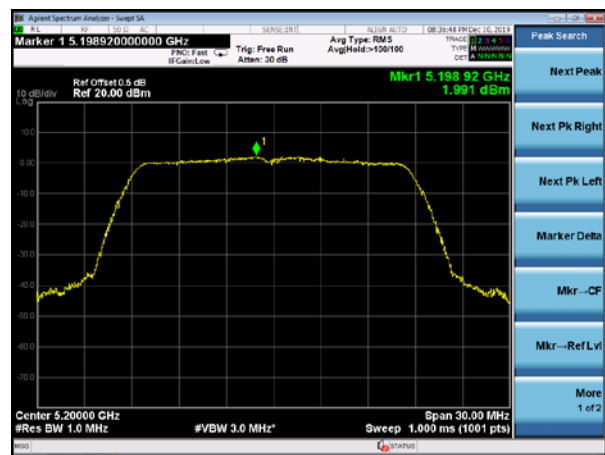

(802.11a) PSD plot on channel 48

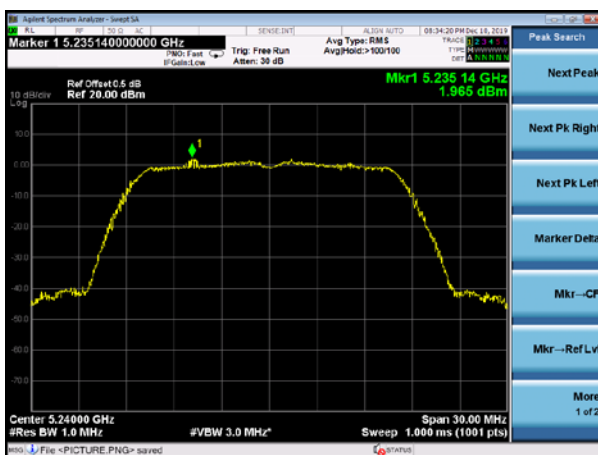


(802.11n20) PSD plot on channel 48

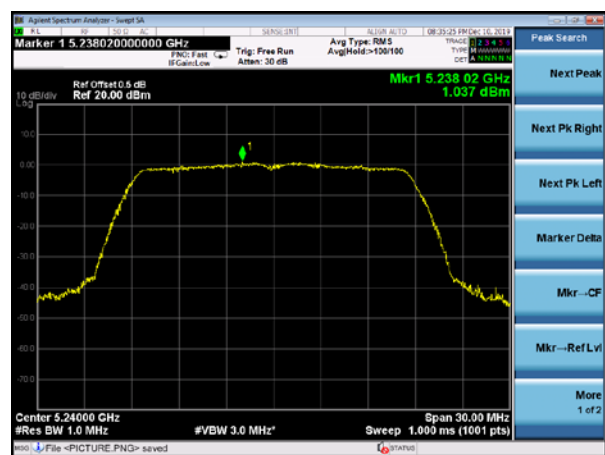





(802.11n40) PSD plot on channel 38

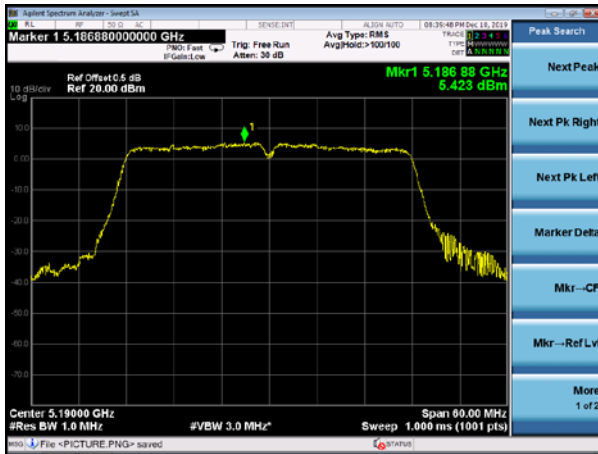


(802.11ac20) PSD plot on channel 36

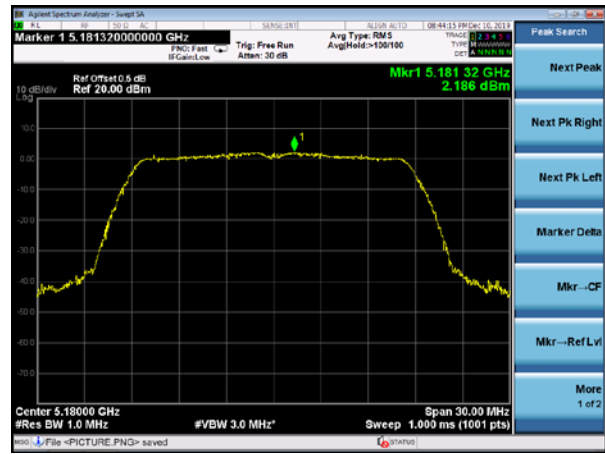


(802.11n40) PSD plot on channel 46

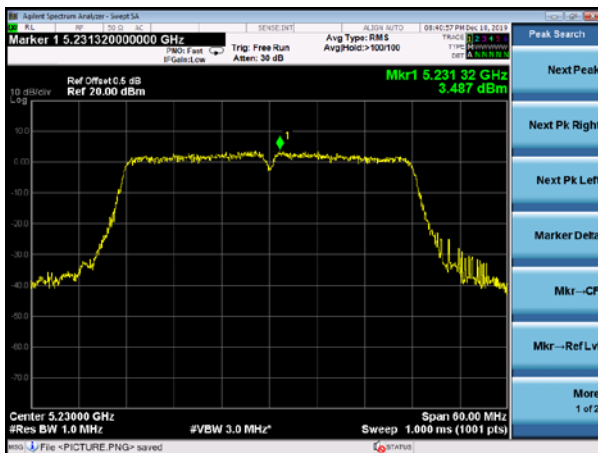

(802.11ac20) PSD plot on channel 40

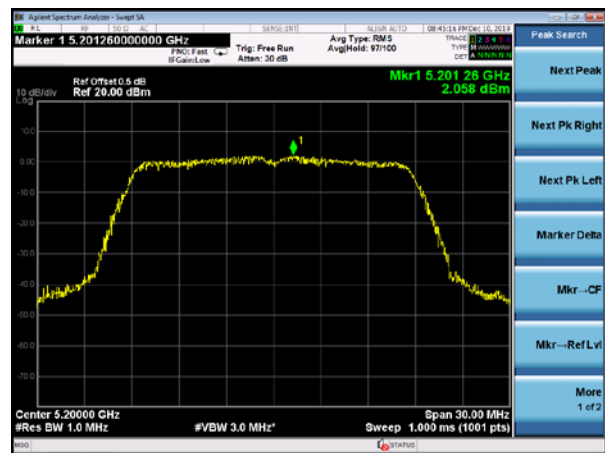


(802.11ac20) PSD plot on channel 48

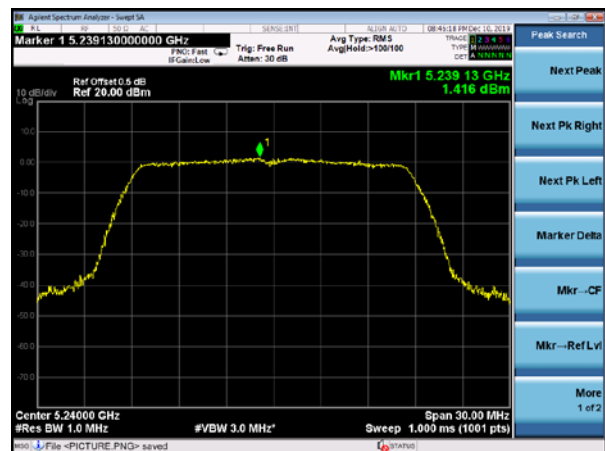





(802.11ac40) PSD plot on channel 38

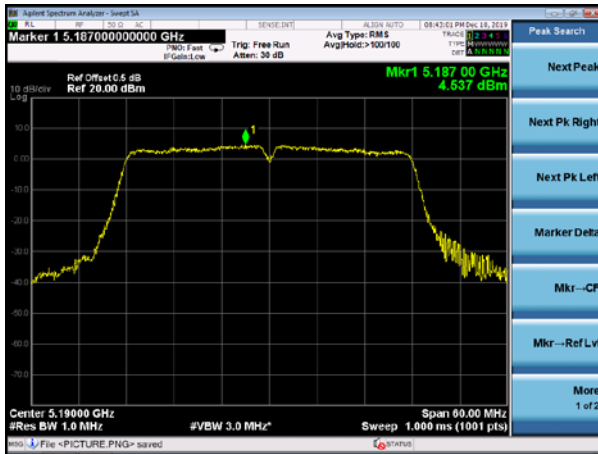

(802.11ac80) PSD plot on channel 42

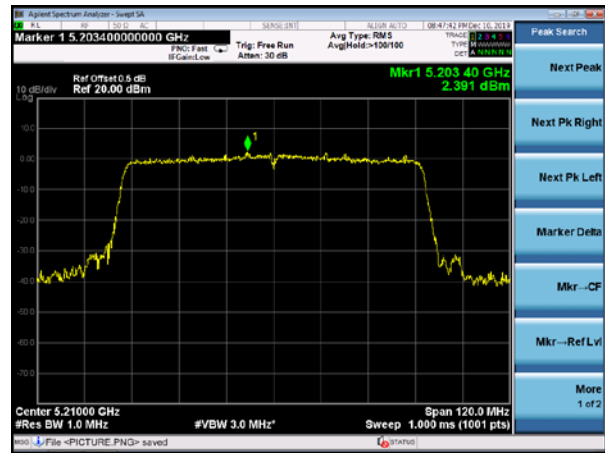

(802.11ac40) PSD plot on channel 46

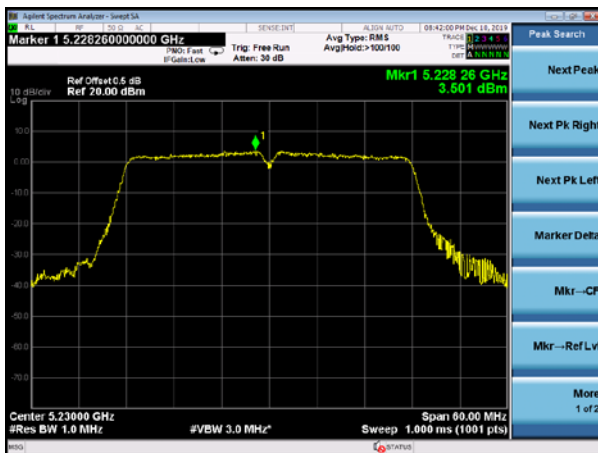



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3 (5745-5825MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

Note:Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain=[10log(GA+ G B)] dbi =6.01dbi, limit=30-(6.01-6)=29.99

Mode	Frequency	Measured Power Density (dBm/500KHz)			Limit (dBm)	Result
		ANT A	ANT B	Total		
802.11 a	5745 MHz	6.784	7.571	/	30	PASS
	5785 MHz	6.204	5.507	/	30	PASS
	5825 MHz	6.435	6.973	/	30	PASS
802.11 n20	5745 MHz	6.763	6.726	9.755	29.99	PASS
	5785 MHz	5.611	5.865	8.750	29.99	PASS
	5825 MHz	5.951	6.198	9.087	29.99	PASS
802.11 n40	5755 MHz	3.629	3.347	6.501	29.99	PASS
	5795 MHz	3.480	4.222	6.877	29.99	PASS
802.11 AC20	5745 MHz	6.729	6.585	9.668	29.99	PASS
	5785 MHz	7.161	7.034	10.108	29.99	PASS
	5825 MHz	6.694	6.119	9.426	29.99	PASS
802.11 AC40	5755 MHz	5.983	6.474	9.246	29.99	PASS
	5795 MHz	6.750	6.823	9.797	29.99	PASS
802.11 AC80	5775 MHz	4.437	5.400	7.955	29.99	PASS




(802.11a) PSD plot on channel 149

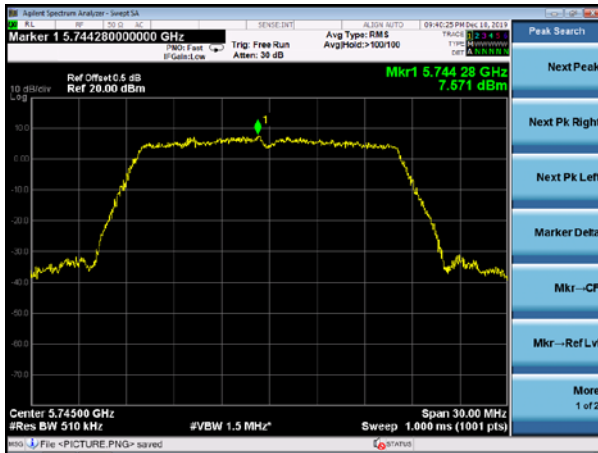


(802.11n20) PSD plot on channel 149




(802.11a) PSD plot on channel 157

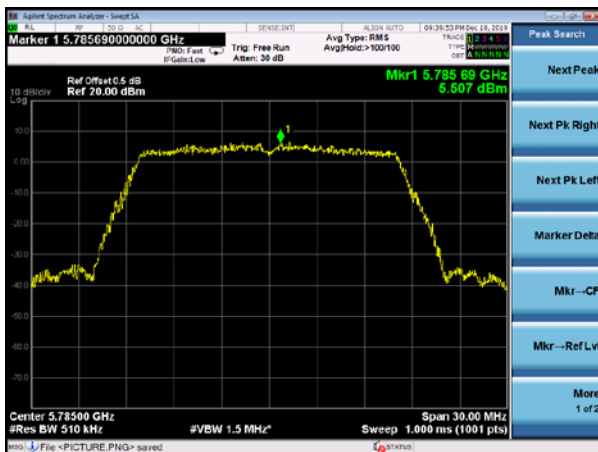


(802.11n20) PSD plot on channel 157

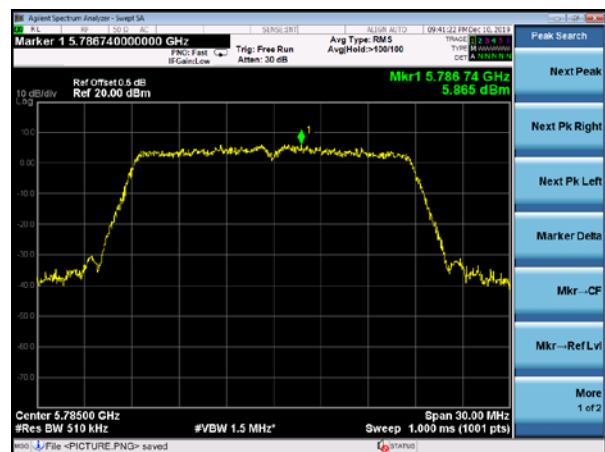

(802.11a) PSD plot on channel 165

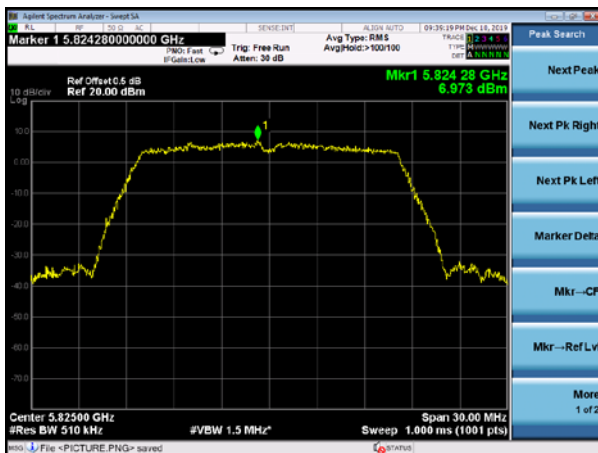


(802.11n20) PSD plot on channel 165

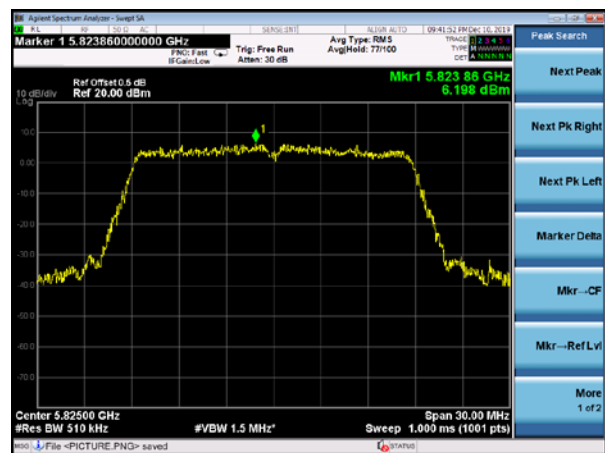





(802.11n40) PSD plot on channel 151

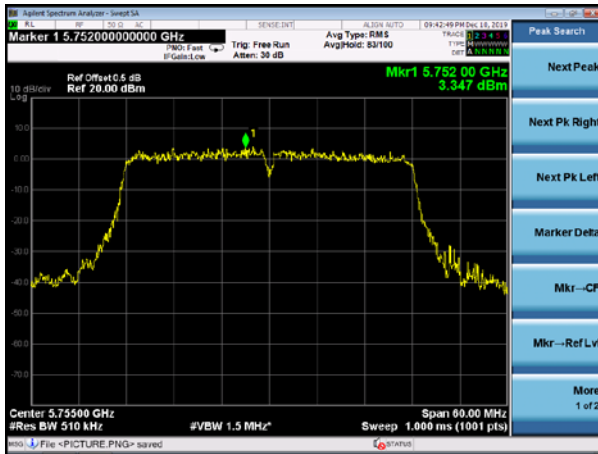

(802.11ac20) PSD plot on channel 149

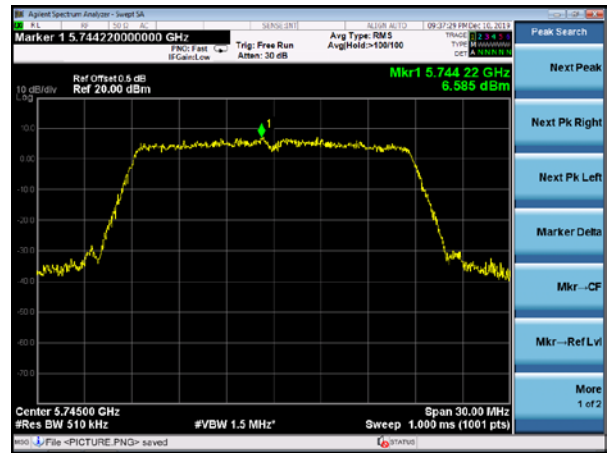


(802.11n40) PSD plot on channel 159

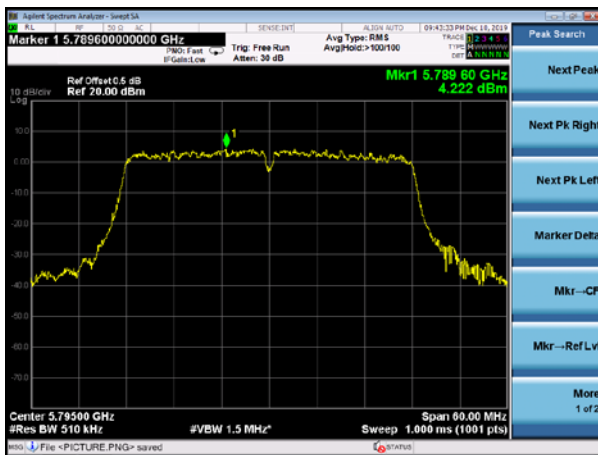

(802.11ac20) PSD plot on channel 157



(802.11ac20) PSD plot on channel 165

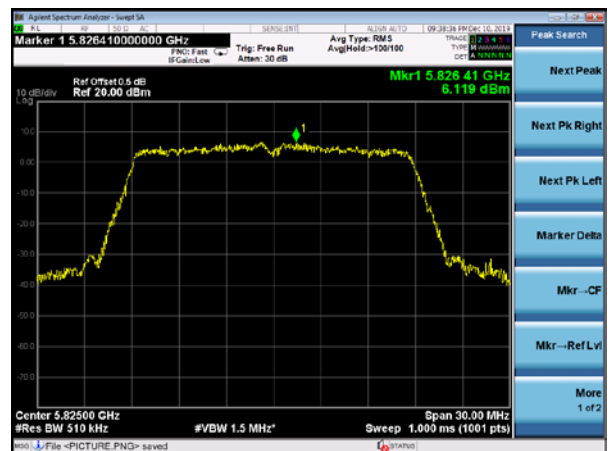



(802.11ac40) PSD plot on channel 151



(802.11ac80) PSD plot on channel 155



(802.11ac40) PSD plot on channel 159





5. 26DB & 6DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.


5.2 TEST PROCEDURE



- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \cdot$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

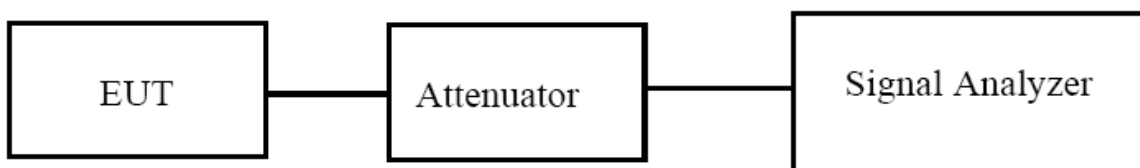

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



5.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH36	5180	16.683	20.56	N/A	Pass
	CH40	5200	16.676	20.62	N/A	Pass
	CH48	5240	16.674	20.59	N/A	Pass
802.11 n20	CH36	5180	17.687	20.93	N/A	Pass
	CH40	5200	17.765	21.32	N/A	Pass
	CH48	5240	17.730	21.08	N/A	Pass
802.11 n40	CH 38	5190	36.755	43.90	N/A	Pass
	CH 46	5230	36.738	43.09	N/A	Pass
802.11 AC20	CH36	5180	17.713	21.56	N/A	Pass
	CH40	5200	17.732	21.64	N/A	Pass
	CH48	5240	17.729	21.49	N/A	Pass
802.11 AC40	CH 38	5190	36.703	43.69	N/A	Pass
	CH 46	5230	36.832	43.75	N/A	Pass
802.11 AC80	CH 42	5210	75.916	82.59	N/A	Pass




Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH36	5180	16.691	20.57	N/A	Pass
	CH40	5200	16.687	20.29	N/A	Pass
	CH48	5240	16.677	20.53	N/A	Pass
802.11 n20	CH36	5180	17.736	21.30	N/A	Pass
	CH40	5200	17.752	21.49	N/A	Pass
	CH48	5240	17.750	21.42	N/A	Pass
802.11 n40	CH 38	5190	36.959	43.95	N/A	Pass
	CH 46	5230	36.898	43.69	N/A	Pass
802.11 AC20	CH36	5180	17.759	21.49	N/A	Pass
	CH40	5200	17.728	21.56	N/A	Pass
	CH48	5240	17.760	21.56	N/A	Pass
802.11 AC40	CH 38	5190	36.893	43.69	N/A	Pass
	CH 46	5230	36.869	43.66	N/A	Pass
802.11 AC80	CH 42	5210	75.945	82.72	N/A	Pass




Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

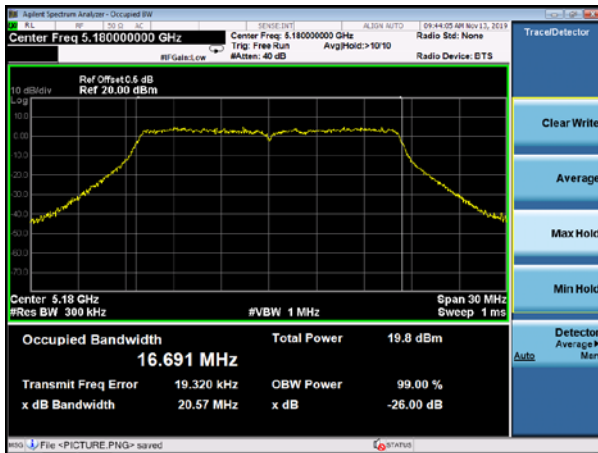


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

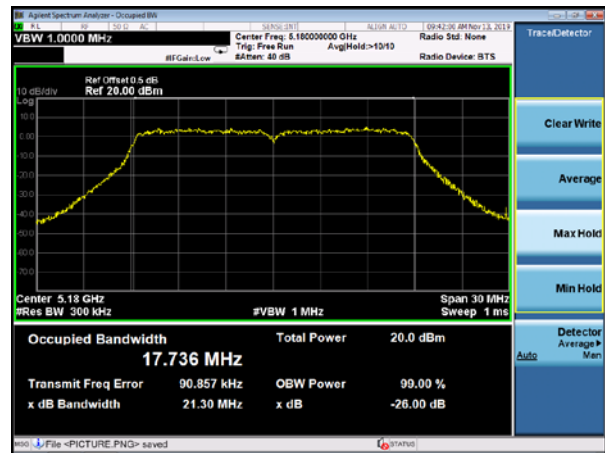


(802.11a) 26dB&99%Bandwidth plot on channel 40

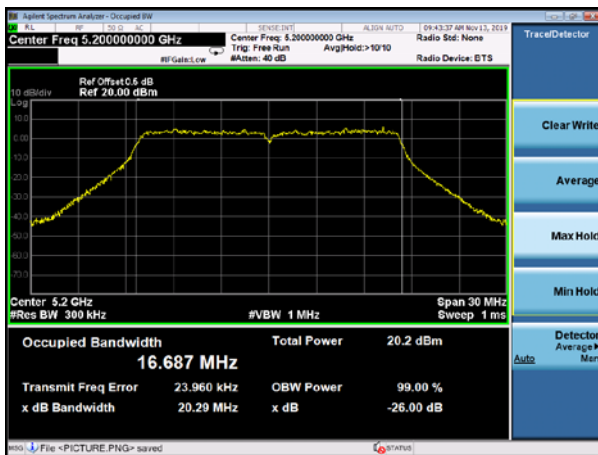


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

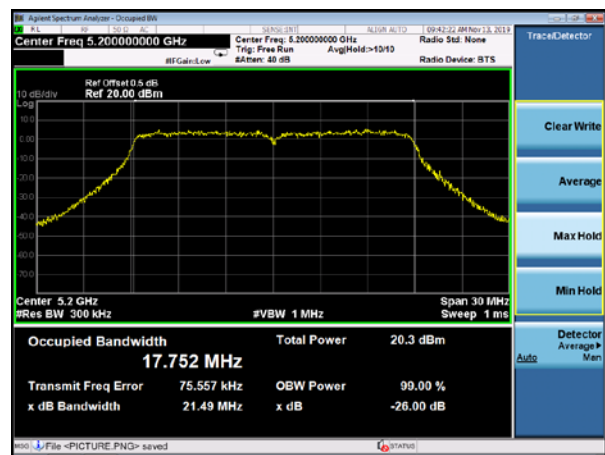

(802.11a) 26dB&99%Bandwidth plot on channel 48

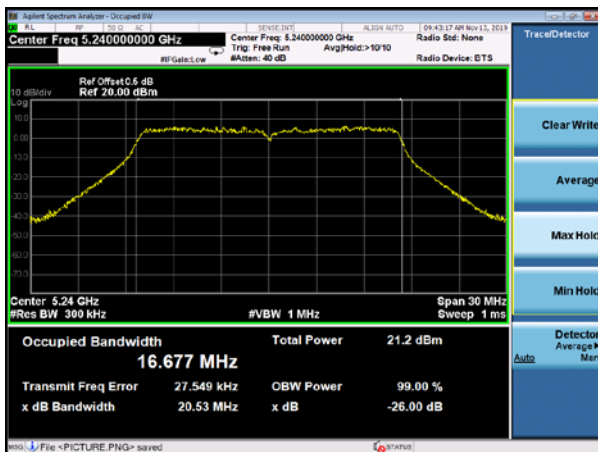

(802.11 n20) 26dB&99%Bandwidth plot on channel 48

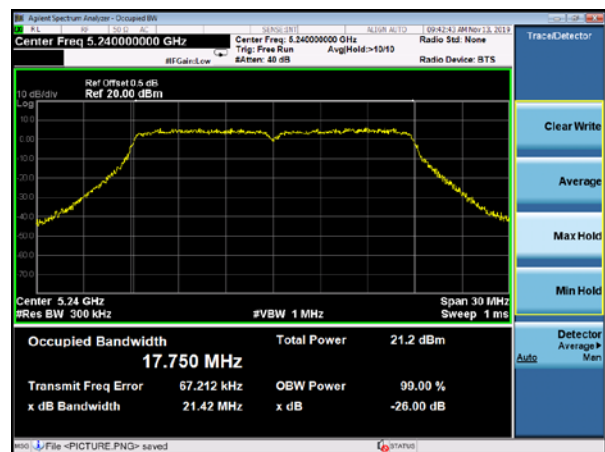




Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel

38

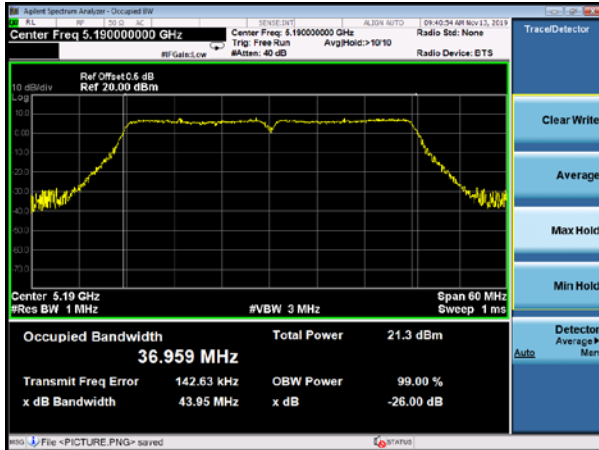


(802.11 AC20) 26dB&99%Bandwidth plot on

channel 36

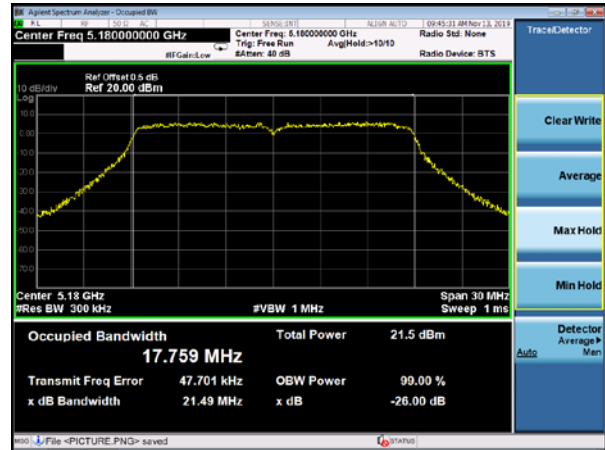


(802.11 n40) 26dB&99%Bandwidth plot on channel

46

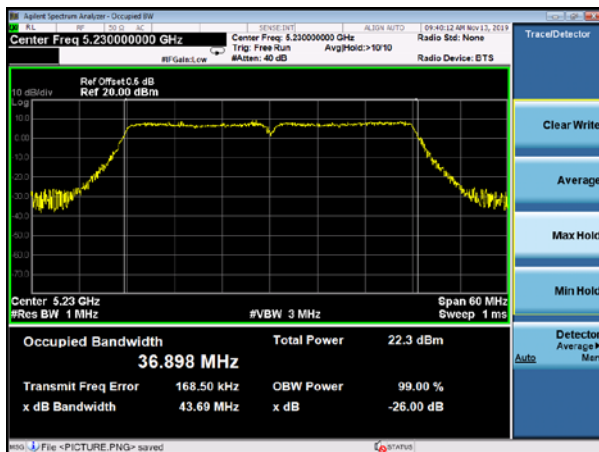


(802.11 AC20) 26dB&99%Bandwidth plot on

channel 40

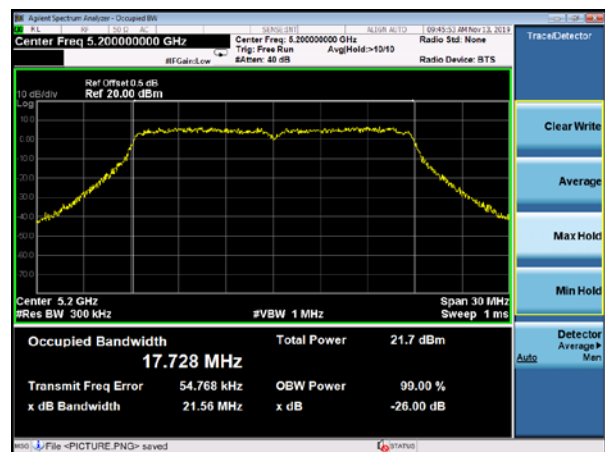

(802.11 AC20) 26dB&99%Bandwidth plot on


channel 48

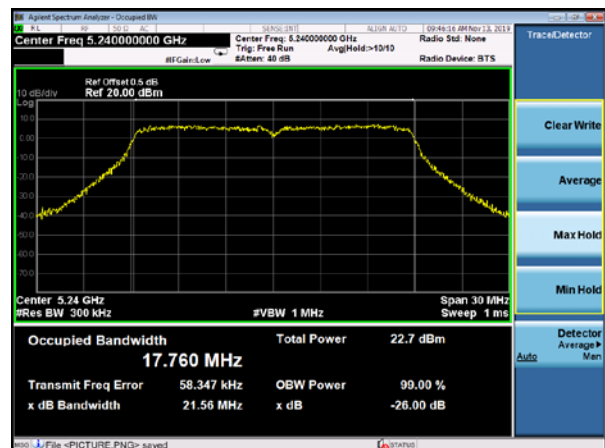




Test plot


(802.11 AC40) 26dB&99%Bandwidth plot on
channel 38

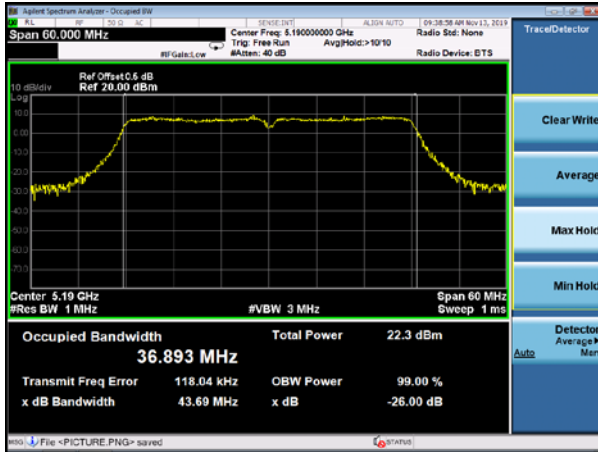

(802.11 AC80) 26dB&99%Bandwidth plot on
channel 42

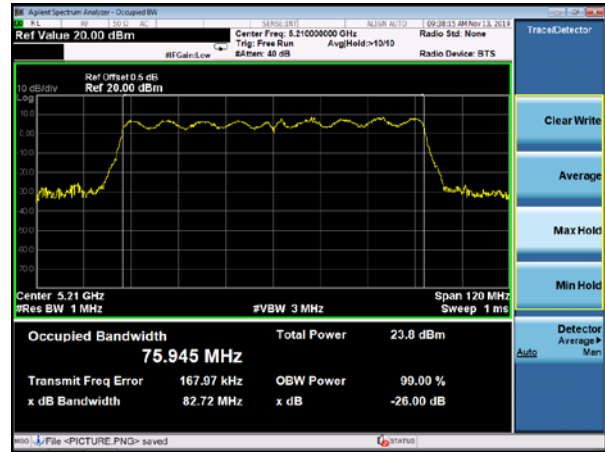

(802.11 AC40) 26dB&99%Bandwidth plot on
channel 46

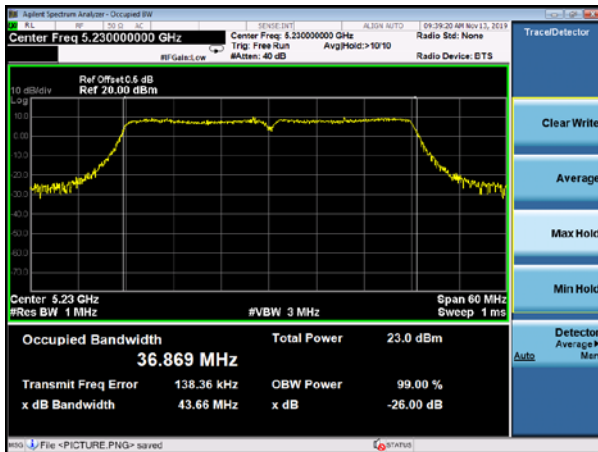



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH149	5745	16.680	16.36	≥ 500	Pass
	CH157	5785	16.690	16.33	≥ 500	Pass
	CH165	5825	16.689	16.32	≥ 500	Pass
802.11 n20	CH149	5745	17.742	17.29	≥ 500	Pass
	CH157	5785	17.742	17.25	≥ 500	Pass
	CH165	5825	17.746	17.27	≥ 500	Pass
802.11 n40	CH151	5755	36.976	36.37	≥ 500	Pass
	CH159	5795	36.891	36.34	≥ 500	≥ 500
802.11 AC20	CH149	5745	17.777	17.00	≥ 500	≥ 500
	CH157	5785	17.729	17.29	≥ 500	≥ 500
	CH165	5825	17.785	17.17	≥ 500	≥ 500
802.11 AC40	CH151	5755	36.841	36.38	≥ 500	≥ 500
	CH159	5795	38.843	36.34	≥ 500	≥ 500
802.11 AC80	CH155	5775	75.917	75.73	≥ 500	≥ 500



Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH149	5745	16.698	16.37	≥ 500	Pass
	CH157	5785	16.719	16.34	≥ 500	Pass
	CH165	5825	16.721	16.32	≥ 500	Pass
802.11 n20	CH149	5745	17.675	17.27	≥ 500	Pass
	CH157	5785	17.688	16.99	≥ 500	Pass
	CH165	5825	17.661	17.27	≥ 500	Pass
802.11 n40	CH151	5755	36.305	36.34	≥ 500	Pass
	CH159	5795	36.333	36.34	≥ 500	Pass
802.11 AC20	CH149	5745	17.676	17.56	≥ 500	Pass
	CH157	5785	17.687	17.55	≥ 500	Pass
	CH165	5825	17.672	16.67	≥ 500	Pass
802.11 AC40	CH151	5755	36.314	36.37	≥ 500	Pass
	CH159	5795	36.320	36.33	≥ 500	Pass
802.11 AC80	CH155	5775	75.012	75.73	≥ 500	Pass




Antenna A: 5725-5850MHz


Mode: 802.11a	
5745MHz 6dB bandwidth	
5745MHz 99% bandwidth	
5785MHz 6dB bandwidth	




5785MHz
99% bandwidth

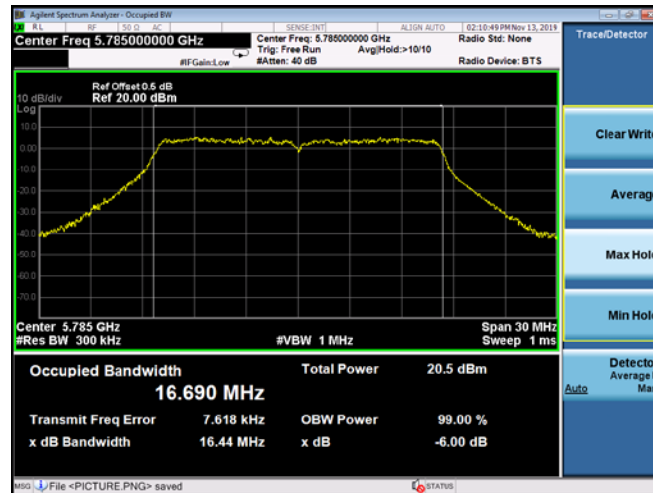




5825MHz
6dB bandwidth

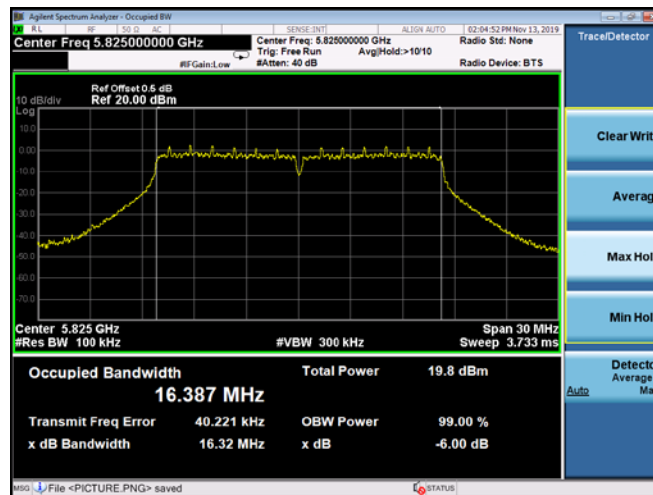

5825MHz
99% bandwidth

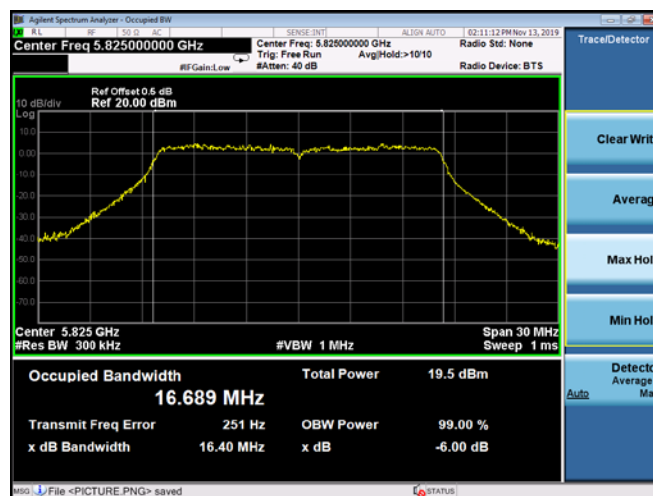


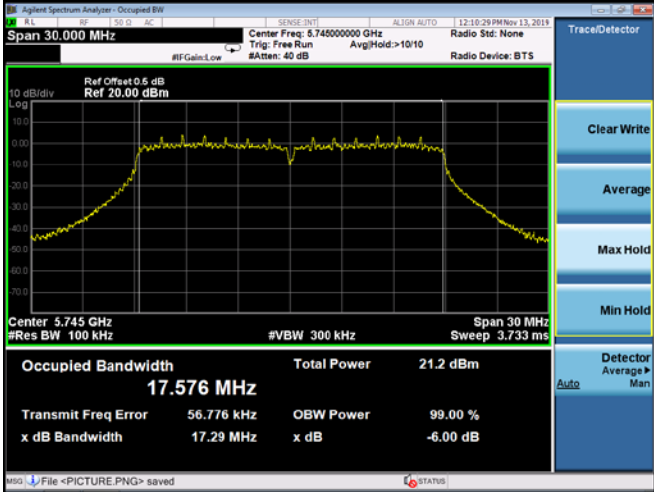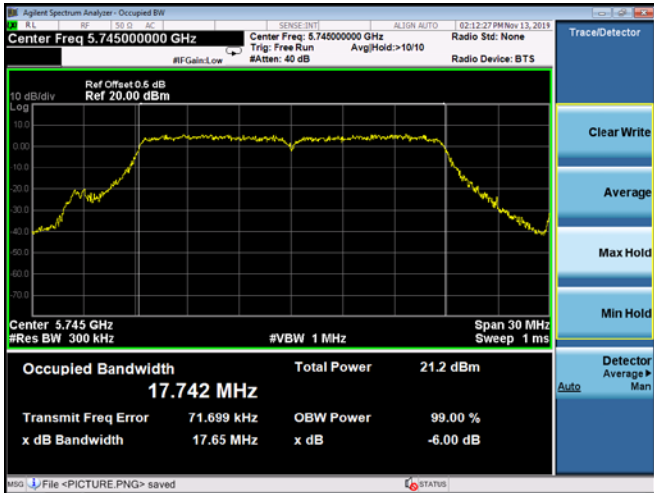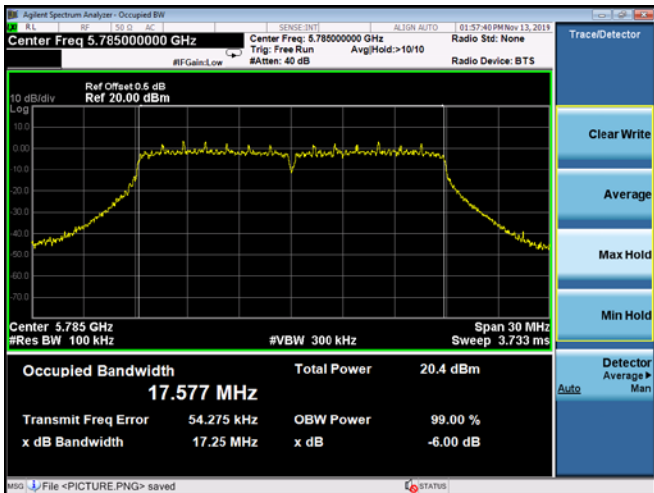


Mode:		802.11n-HT20
5745MHz 6dB bandwidth		
5745MHz 99% bandwidth		
5785MHz 6dB bandwidth		




5785MHz
99% bandwidth

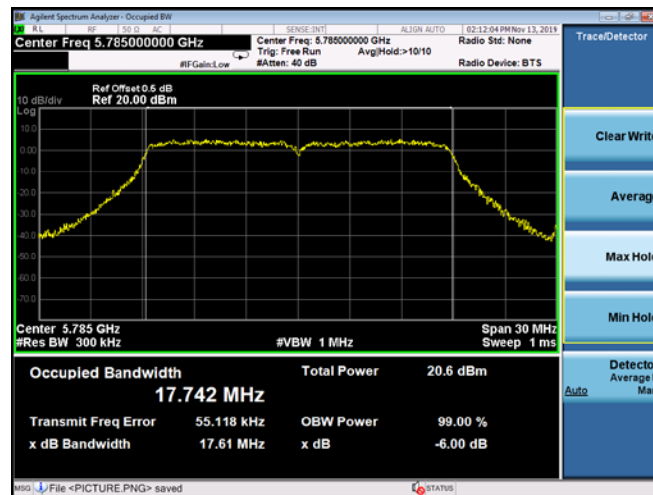




5825MHz
6dB bandwidth

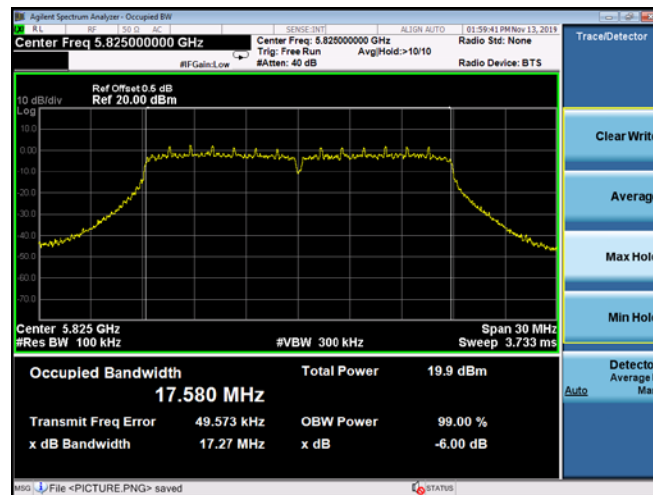

5825MHz
99% bandwidth

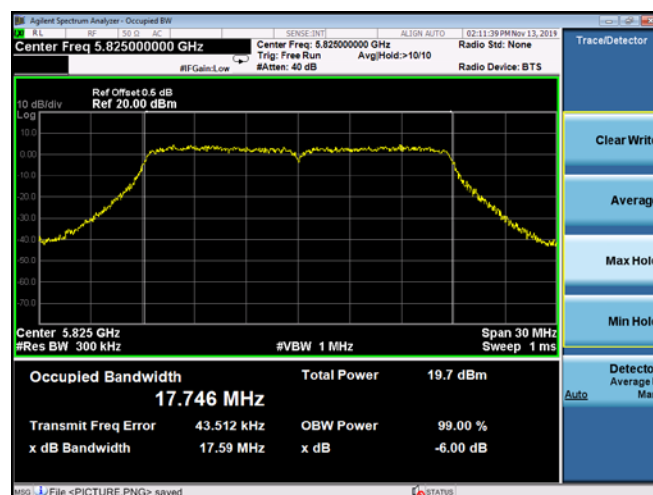

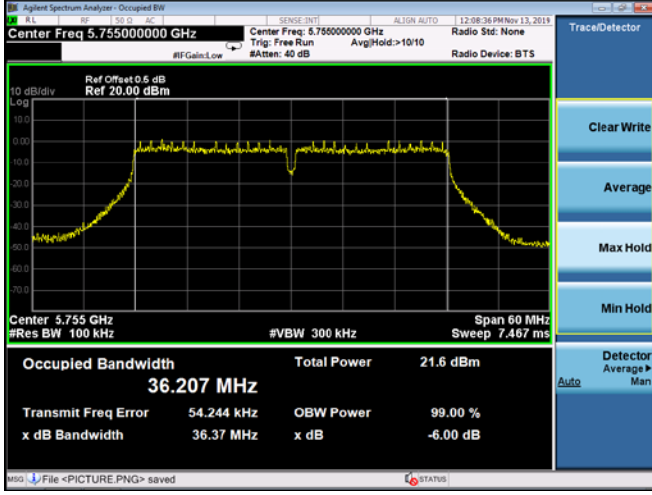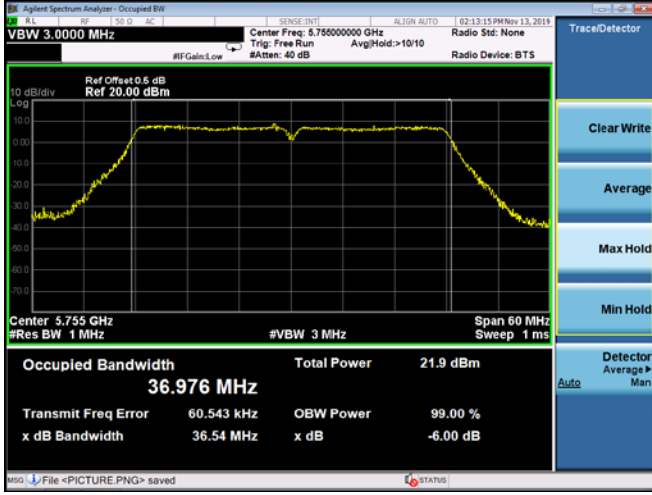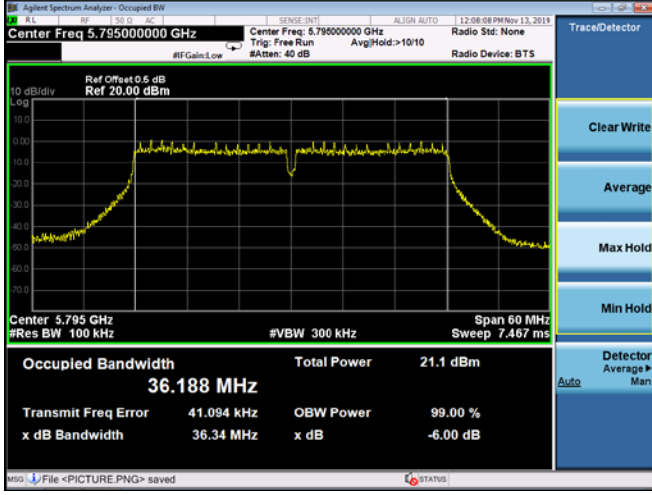

Mode:	802.11n-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Occupied Bandwidth 36.207 MHz Total Power 21.6 dBm Transmit Freq Error 54.244 kHz OBW Power 99.00 % x dB Bandwidth 36.37 MHz x dB -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Occupied Bandwidth 36.976 MHz Total Power 21.9 dBm Transmit Freq Error 60.543 kHz OBW Power 99.00 % x dB Bandwidth 36.54 MHz x dB -6.00 dB
5795 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.795000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Occupied Bandwidth 36.188 MHz Total Power 21.1 dBm Transmit Freq Error 41.094 kHz OBW Power 99.00 % x dB Bandwidth 36.34 MHz x dB -6.00 dB



5795 MHz
99% bandwidth

