



**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 1 of 31  
Date : Nov. 13, 2020

Product Name: Card Reader  
Model No.: CMS505  
Applicant: Top Vending Machine Electronics Co.,Ltd.  
No.11, Anzhong St., Luzhu Dist., Taoyuan City 33868, Taiwan (R.O.C.)  
Date of Receipt: Oct. 06, 2020  
Finished date of Test: Oct. 20, 2020  
Applicable Standards: 47 CFR Part 15, Subpart C, 15.231(a)  
ANSI C63.10: 2013

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : Richard Lin , Date: 11/13/2020  
(Richard Lin)

Approved By : Johnson Ho , Date: 11/13/2020  
( Johnson Ho, Director )



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 2 of 31  
Date : Nov. 13, 2020

## Revisions History

Report No.	Issue Date	Revisions
FCCA20071703-01	Nov. 13, 2020	Initial issue



## Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT .....	4
1.1	DOCUMENT POLICY .....	4
1.2	TEST STATEMENT .....	4
1.3	EUT MODIFICATION .....	4
2.	DESCRIPTION OF EUT AND TEST MODE .....	5
2.1	GENERAL DESCRIPTION OF EUT .....	5
2.2	DESCRIPTION OF EUT INTERNAL DEVICE .....	5
2.3	DESCRIPTION OF TEST MODE .....	5
2.4	EUT OPERATING CONDITION .....	5
2.5	DESCRIPTION OF SUPPORT UNIT .....	6
2.6	CHANNEL AND FREQUENCY TABLE .....	6
3.	DESCRIPTION OF APPLIED STANDARDS .....	7
3.1	SUMMARY OF TEST RESULTS .....	7
4.	TECHNICAL CHARACTERISTICS TEST .....	8
4.1	CONDUCTED EMISSION TEST .....	8
4.1.1	LIMIT .....	8
4.1.2	TEST EQUIPMENT .....	8
4.1.3	TEST SETUP .....	9
4.1.4	TEST PROCEDURE .....	9
4.1.5	TEST RESULT .....	9
4.2	RADIATED EMISSION TEST .....	10
4.2.1	LIMIT .....	10
4.2.2	TESR PROCEDURE .....	10
4.2.3	TEST EQUIPMENT .....	11
4.2.4	TEST SET-UP .....	12
4.2.5	TEST RESULT .....	13
4.3	20DB BANDWIDTH .....	22
4.3.1	LIMIT .....	22
4.3.2	TEST EQUIPMENT .....	22
4.3.3	TEST SET-UP .....	22
4.3.4	TEST PROCEDURE .....	22
4.3.5	EUT OPERATING CONDITION .....	22
4.3.6	TEST RESULT .....	23
4.4	RELEASE OR OPERATING TIME .....	25
4.4.1	LIMIT .....	25
4.4.2	TEST EQUIPMENT .....	25
4.4.3	TEST SET-UP .....	25
4.4.4	EUT OPERATING CONDITION .....	25
4.4.5	TEST RESULT .....	26
5.	ANTENNA APPLICATION .....	30
5.1	ANTENNA REQUIREMENT .....	30
5.2	RESULT .....	30
6.	TERMS OF ABBREVIATION .....	31



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 4 of 31  
Date : Nov. 13, 2020

## 1. DOCUMENT POLICY AND TEST STATEMENT

### 1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- FCC Registered Test Site Number : TW1016

### 1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, DC 12V from battery, was used during the test.

### 1.3 EUT MODIFICATION

- No modification in SRT Lab.

**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 5 of 31  
Date : Nov. 13, 2020

**2. DESCRIPTION OF EUT AND TEST MODE****2.1 GENERAL DESCRIPTION OF EUT**

<b>PRODUCT</b>	Card Reader
<b>MODEL NO.</b>	CMS505
<b>POWER SUPPLY</b>	DC power source, DC 12V from battery
<b>CABLE</b>	NA
<b>OPERATING FREQUENCY</b>	410 MHz ~ 441 MHz
<b>NUMBER OF CHANNEL</b>	32 CH
<b>RATED RF OUTPUT POWER</b>	79.88 dBuV/m at 3m
<b>MODULATION TYPE</b>	FSK
<b>MODE OF OPERATION</b>	Half duplex
<b>ANTENNA TYPE</b>	Printed Antenna
<b>ANTENNA GAIN</b>	3.0 dBi

**NOTE:**

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.

**2.2 DESCRIPTION OF EUT INTERNAL DEVICE**

<b>DEVICE</b>	<b>BRAND / MAKER</b>	<b>MODEL #</b>	<b>FCC ID / DOC</b>	<b>REMARK</b>
N/A				

**2.3 DESCRIPTION OF TEST MODE**

There are test modes for each test configuration as below:

<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	
01	TX1	CH00	410
02	TX2	CH16	426
03	TX3	CH31	441

**NOTE:**

1. Below 1 GHz were pre-tested in chamber and chosen the worst case for conducted and radiated emission test.
2. Above 1 GHz were tested individually.
3. The axis X,Y and Z we evaluate in chamber, the X axis is worst case.

**2.4 EUT OPERATING CONDITION**

1. For use customer provided continuous transmission EUT.
2. Turn on the power of all equipment and EUT.
3. Set the EUT under continuous transmission condition.



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 6 of 31  
Date : Nov. 13, 2020

## 2.5 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.10:2013. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	NOTE
1	Charge Battery	HITACHI	55D23R-MF	DoC	12V

**NOTE:** For the actual test configuration, please refer to the photos of testing.

## 2.6 CHANNEL AND FREQUENCY TABLE

Channel	Frequency	Channel	Frequency
CH00	410 MHz	CH16	426 MHz
CH01	411 MHz	CH17	427 MHz
CH02	412 MHz	CH18	428 MHz
CH03	413 MHz	CH19	429 MHz
CH04	414 MHz	CH20	430 MHz
CH05	415 MHz	CH21	431 MHz
CH06	416 MHz	CH22	432 MHz
CH07	417 MHz	CH23	433 MHz
CH08	418 MHz	CH24	434 MHz
CH09	419 MHz	CH25	435 MHz
CH10	420 MHz	CH26	436 MHz
CH11	421 MHz	CH27	437 MHz
CH12	422 MHz	CH28	438 MHz
CH13	423 MHz	CH29	439 MHz
CH14	424 MHz	CH30	440 MHz
CH15	425 MHz	CH31	441 MHz



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 7 of 31  
Date : Nov. 13, 2020

### 3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a wireless product. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C, 15.231(a)

ANSI C63.10: 2013

All tests have been performed and recorded as the above standards.

#### 3.1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT RESULTS	RESULT
15.207	Conducted Emission	N/A
15.231(a)(3) 15.231(b)	Radiated Emission	PASS
15.231(c)	20dB Bandwidth Limit: $0.25\% \times \text{Center Frequency}$	PASS
15.231(a)	RELEASE OR OPERATING TIME Limit: max. 5 seconds	PASS
15.203	Antenna requirement	PASS

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 8 of 31  
Date : Nov. 13, 2020**4. TECHNICAL CHARACTERISTICS TEST****4.1 CONDUCTED EMISSION TEST****4.1.1 LIMIT**

Frequency (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

**4.1.2 TEST EQUIPMENT**

The following test equipment was used for the test:

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz ~ 2.75 GHz	ROHDE & SCHWARZ	ESCS30 / 100376	JAN. 06, 2021 ETC
EMI TEST RECEIVER	9 kHz ~ 30 MHz	ROHDE & SCHWARZ	ESHS30 / 826003/008	JAN. 13, 2021 ETC
LISN	50 $\mu$ H, 50 ohm	SOLAR	9252-50-R-24-BNC/9 51315	JAN. 20, 2021 ETC
LISN	50 $\mu$ H, 50 ohm	SCHWARZBECK	NSLK 8127/ 8127-808	DEC. 10, 2020 ETC
50 $\Omega$ BNC TYPE TERMINATOR	50 ohm	N/A	11593A/ L1TEQU005	NOV. 06, 2020 ETC
50 $\Omega$ BNC TYPE TERMINATOR	50 ohm	N/A	B00-CD-357/ L1TEQU009	MAY. 25, 2021 ETC
COAXIAL CABLE	5 m	HUBER+SUHNER	RG214/U / L1TCAB013(#5m)	MAY. 25, 2021 ETC
FILTER	2 LINE, 30 A	FIL.COIL	FC-943 / 771	NCR
GROUND PLANE	2 m (H) x 3 m (W)	SRT	N/A	NCR
GROUND PLANE	2.5 m (H) x 3 m (W)	SRT	N/A	NCR
PULSE LIMITER	9 kHz ~ 30 MHz Insertion Loss= 10dB $\pm$ 0.3dB	ROHDE & SCHWARZ	ESH3Z2/ L1TTES009	DEC. 19, 2020 ETC
THERMO-HYGR O	15 – 40 $^{\circ}$ C, 0- 100% RH	TES	TES-1161/ 180704762	MAR. 06, 2021 ETC


**NOTE:**

The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.





## 4.1.3 TEST SETUP

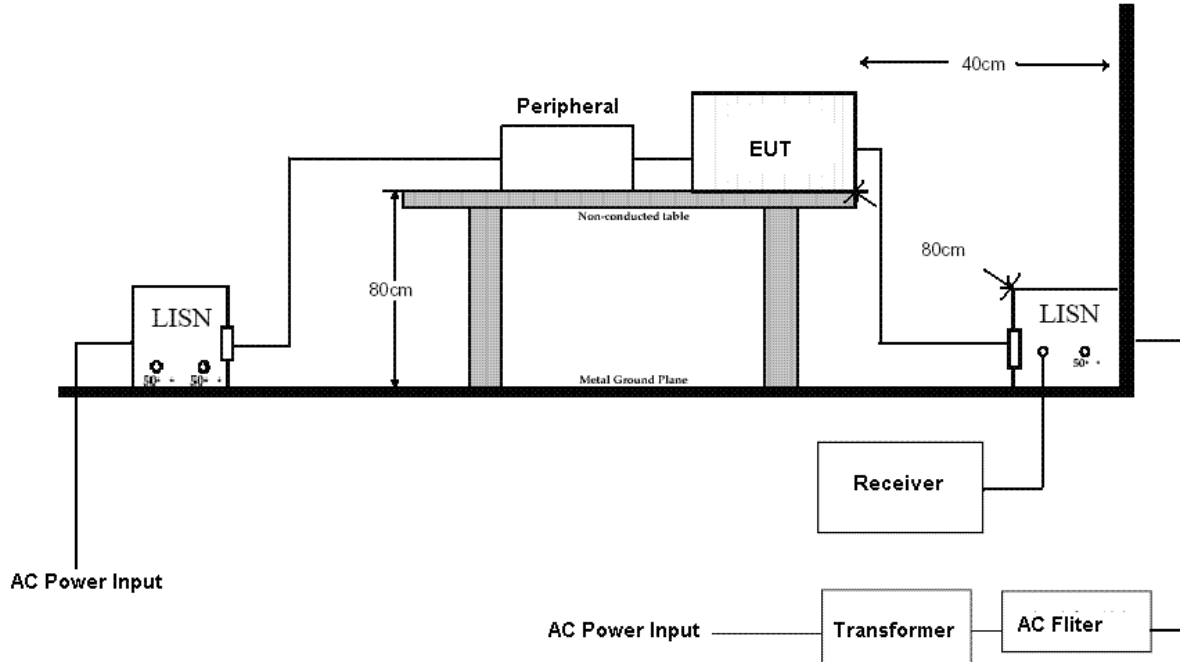

### NOTE :

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.

## 4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.10:2013 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 $\mu$ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

## 4.1.5 TEST RESULT

N/A



## 4.2 RADIATED EMISSION TEST

### 4.2.1 LIMIT

FCC Part15, Subpart C Section 15.231(b), In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	<sup>1</sup> 1,250 to 3,750	<sup>1</sup> 125 to 375
174-260	3,750	375
260-470	<sup>1</sup> 3,750 to 12,500	<sup>1</sup> 375 to 1,250
Above 470	12,500	1,250

<sup>1</sup>Linear interpolations.

### 4.2.2 TESR PROCEDURE

The EUT was tested according to the requirement of ANSI C63.10:2013 and CISPR 22:2003. When the frequency spectrum measured started from 30 MHz to 1 GHz, then use antenna is a BICONICAL ANTENNA & LOG PERIODIC ANTENNA. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz to 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 11 of 31  
Date : Nov. 13, 2020**4.2.3 TEST EQUIPMENT**

Below 1 GHz The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER	FINAL TEST BE USED
EMI TEST RECEIVER	9 kHz ~ 2.75 GHz	ROHDE & SCHWARZ	ESCS30 / 100376	JAN. 06, 2021 ETC	■
LOOP ANTENNA	9 kHz ~ 30 MHz	ROHDE & SCHWARZ	HFH2-Z2/ 860605/002	MAY 21, 2021 ETC	□
BICONICAL ANTENNA	30 MHz ~ 200 MHz	EMCO	3108/ 2334	NOV. 14, 2020 ETC	■
LOG PERIODIC ANTENNA	200 MHz ~ 1 GHz	EMCO	3146/ 9002-2686	MAR. 01, 2021 ETC	■
OPEN AREA TEST SITE	3 – 10 M MEASUREMENT	SRT	A02 / SRT002	MAR. 06, 2021 SRT	■
COAXIAL CABLE	30 M	TIMES	LMR-400 / #30M(L1TCAB014)	JUN. 08, 2021 ETC	■
COAXIAL CABLE	9k - 1GHz	TIMES	LMR-400(#2m) / L1TCAB012	JAN. 05, 2021 ETC	■
FILTER	2 LINE, 30 A	FIL.COIL	FC-943/869	NCR	■
PRE-AMPLIFIER	0.1 MHz ~ 1.3 GHz	HP	8447D / 2944A06746	DEC. 08, 2020 ETC	■
THERMO-HYGRO	15 – 40°C, 0- 100% RH	TOP	20-A / 6644	DEC. 08, 2020 ETC	■


Above 1 GHz The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER	FINAL TEST BE USED
SPECTRUM ANALYZER	9 kHz ~ 40GHz	ROHDE & SCHWARZ	FSP40 / 100093	JAN.06, 2021 ETC	■
PRE-AMPLIFIER	1 GHz ~ 26.5 GHz	AGILENT	8449B/ 3008A01995	JAN.05, 2021 ETC	■
HORN ANTENNA	1 GHz ~ 18 GHz	EMCO	3115/9602-4681	NOV.13, 2020 ETC	■
HORN ANTENNA	18 ~ 40 GHZ	ETS-LINDGREN	3116/00032255	JAN. 14, 2021 ETC	■
ANECHOIC CHAMBER	3 M MEASUREMENT	SRT	A01/SRT001	DEC. 13, 2020 SRT	■
RF CABLE	UP TO 18 GHz 1.5 m	JYEBAO	A30A30-L 142 / EQF-0035(001)	NOV. 24, 2020 ETC	■
RF CABLE	UP TO 26.5 GHz 3.5 m	EMCI	EMC104-SM-SM-3 500 / 150601	NOV. 18, 2020 ETC	■
K-TYPE CABLE	UP TO 40 GHz 3 m	HUBER+SUHNER	SF102-46/2*11SK2 52 /MY2611/2	MAR. 15, 2021 ETC	■
K-TYPE CABLE	UP TO 40 GHz, 1 m	HUBER+SUHNER	SF102/2*11SK252 /MY3331/2	DEC. 16, 2020 ETC	■
FILTER	2 LINE, 30 A	FIL.COIL	FC-943/869	NCR	■
THERMO-HYGRO	15 – 40 °C, 0- 100% RH	TOP	20-A / 6644	DEC. 08, 2020 ETC	■




## 4.2.4 TEST SET-UP

### 30 MHz ~ 1 GHz

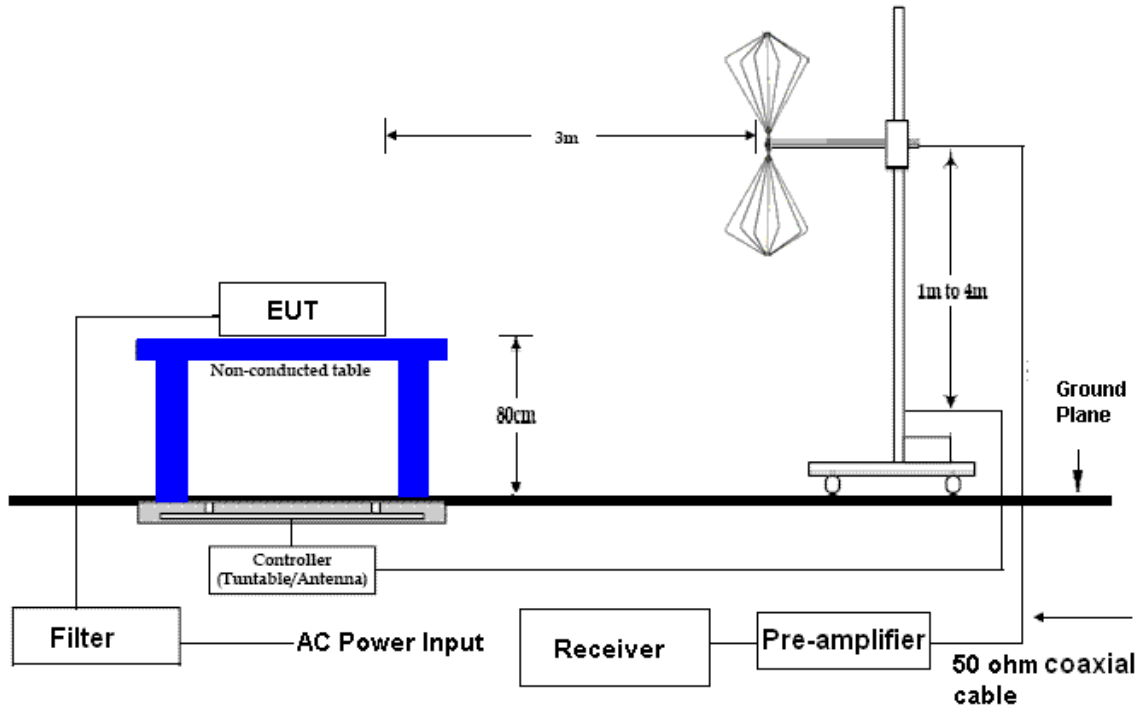

### Above 1 GHz

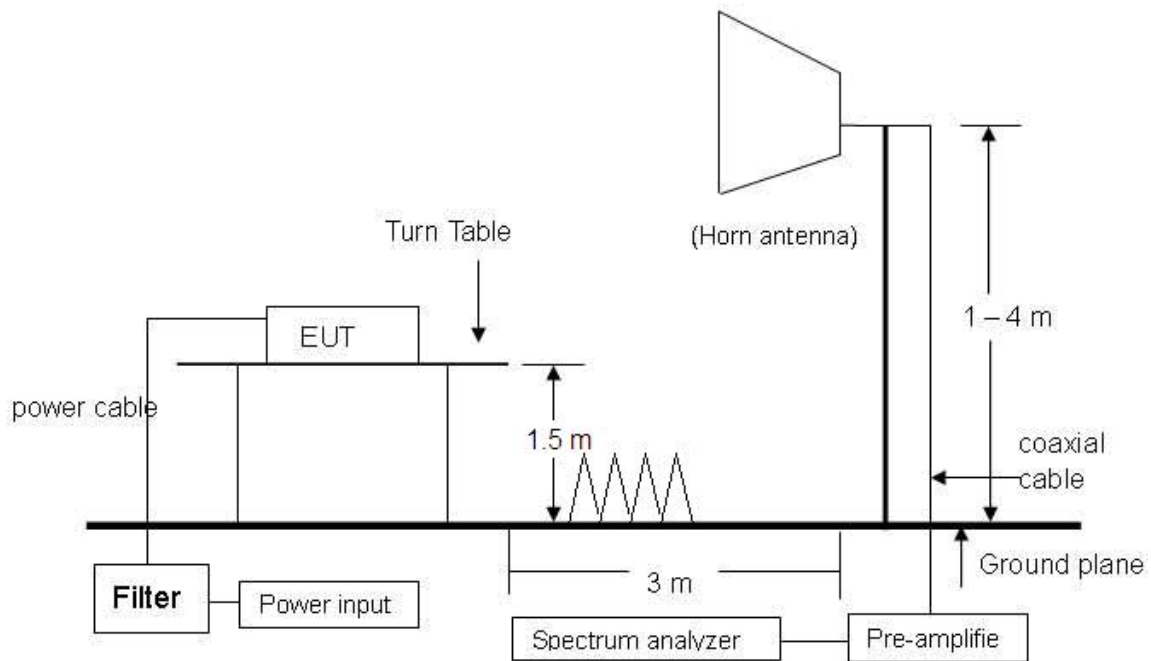

**NOTE:** The EUT system was put on a wooden table with 1.5m heights above a ground plane. For the actual test configuration, please refer to the photos of testing.

**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 13 of 31  
Date : Nov. 13, 2020**4.2.5 TEST RESULT**

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX1 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
410.00(F)	4.96	16.60	28.09	85.69	79.17	100.00	-20.83	73	2.34
820.00	7.74	22.60	28.11	24.74	26.97	61.90	-34.93	155	1.35

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
410.00(F)	4.96	16.60	28.09	79.36	72.84	100.00	-27.16	69	2.21
820.00	7.74	22.60	28.11	34.16	36.39	61.90	-25.51	128	3.29

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 14 of 31  
Date : Nov. 13, 2020

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX1
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.91	2.53	12.00	28.00	48.44	34.97	41.90	-6.93	256	3.54
215.03	3.24	11.70	27.55	48.76	36.15	51.50	-15.35	34	3.29
242.84	3.51	12.24	27.49	50.38	38.64	51.50	-12.86	299	3.11
269.55	3.76	13.20	27.42	49.85	39.39	52.13	-12.74	149	3.04
320.26	4.22	15.00	27.48	44.98	36.72	55.16	-18.44	67	2.76
622.19	6.44	19.90	28.54	40.35	38.15	61.90	-23.75	202	1.84

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
31.46	1.73	14.40	28.30	45.90	33.74	40.00	-6.27	57	1.06
126.35	2.53	12.00	28.00	48.42	34.95	41.90	-6.95	122	1.34
269.98	3.76	13.20	27.42	46.76	36.30	52.16	-15.86	348	1.77
610.14	6.36	19.60	28.56	38.80	36.20	61.90	-25.71	200	2.35
622.37	6.44	19.90	28.54	42.68	40.48	61.90	-21.42	137	2.69
649.05	6.63	20.28	28.50	36.63	35.04	61.90	-26.86	263	2.97

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 15 of 31  
Date : Nov. 13, 2020

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX2 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
426.00(F)	5.08	16.82	28.16	85.89	79.63	100.56	-20.93	58	2.38
852.00	7.98	23.00	27.97	24.03	27.04	61.90	-34.86	157	1.29

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
426.00(F)	5.08	16.82	28.16	86.14	79.88	100.56	-20.68	74	2.19
852.00	7.98	23.00	27.97	30.72	33.73	61.90	-28.17	149	3.35

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 16 of 31  
Date : Nov. 13, 2020

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX2
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.70	2.53	12.00	28.00	48.55	35.08	41.90	-6.82	318	3.55
215.93	3.24	11.70	27.55	48.68	36.07	51.50	-15.43	55	3.41
242.02	3.51	12.24	27.49	49.95	38.21	51.50	-13.29	247	3.29
269.45	3.76	13.20	27.42	50.15	39.69	52.13	-12.44	109	3.11
320.81	4.22	15.00	27.48	44.69	36.43	55.19	-18.76	293	2.88
622.22	6.44	19.90	28.54	39.74	37.54	61.90	-24.36	145	2.03

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
31.80	1.73	14.40	28.30	46.00	33.84	40.00	-6.17	334	1.13
126.37	2.53	12.00	28.00	47.83	34.36	41.90	-7.54	20	1.35
269.14	3.76	13.20	27.42	46.71	36.25	52.11	-15.86	182	1.75
610.25	6.36	19.60	28.56	39.30	36.70	61.90	-25.21	335	2.47
622.98	6.44	19.90	28.54	42.24	40.04	61.90	-21.86	64	2.66
649.57	6.63	20.28	28.50	36.04	34.45	61.90	-27.45	211	2.79

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 17 of 31  
Date : Nov. 13, 2020

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX3 (Fundamental and Harmonics)
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
441.00(F)	5.19	16.96	28.24	85.33	79.25	101.06	-21.81	66	2.44
882.00	8.26	23.24	27.85	23.00	26.66	61.90	-35.24	148	1.31

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
441.00(F)	5.19	16.96	28.24	84.45	78.37	101.06	-22.69	61	2.08
882.00	8.26	23.24	27.85	24.96	28.62	61.90	-33.28	153	3.16

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 18 of 31  
Date : Nov. 13, 2020

Temperature:	21 °C	Humidity:	69 %RH
Frequency Range:	30 M – 1 GHz	Tested Mode:	TX3
Detector Type:	Quasi-peak	IF Bandwidth:	120 kHz
Tested By:	Richard	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
126.41	2.53	12.00	28.00	48.06	34.59	41.90	-7.31	256	3.51
242.09	3.51	12.24	27.49	51.11	39.37	51.50	-12.13	138	3.38
269.25	3.76	13.20	27.42	51.78	41.32	52.11	-10.79	49	3.24
320.13	4.22	15.00	27.48	44.82	36.56	55.15	-18.59	270	3.06
336.82	4.37	15.20	27.59	42.53	34.51	56.05	-21.54	115	2.71
622.67	6.44	19.90	28.54	39.60	37.40	61.90	-24.50	318	1.89

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pre-Amp (dB)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
32.23	1.75	14.00	28.30	44.87	32.32	40.00	-7.68	31	1.24
126.01	2.53	12.00	28.00	47.44	33.97	41.90	-7.93	177	1.35
269.87	3.76	13.20	27.42	48.17	37.71	52.15	-14.44	289	1.78
610.09	6.36	19.60	28.56	38.71	36.11	61.90	-25.80	100	2.36
622.95	6.44	19.90	28.54	42.18	39.98	61.90	-21.92	339	2.89
649.48	6.63	20.28	28.50	35.92	34.33	61.90	-27.57	45	2.95

**NOTE :**

1. Measurement uncertainty is 4.20 dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss – Pre-Amplifier.
4. The field strength of other emission frequencies were very low against the limit.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 19 of 31  
Date : Nov. 13, 2020

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX1
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3308.07	-30.70	31.10	42.96	32.44	43.36	32.84	74	54	-30.64	-21.16	149	2.36
3834.98	-30.13	32.34	42.67	32.17	44.88	34.38	74	54	-29.12	-19.62	321	2.23
4041.65	-29.94	32.25	43.12	32.68	45.43	34.99	74	54	-28.57	-19.01	182	2.12
4587.37	-29.32	32.37	43.35	32.80	46.41	35.86	74	54	-27.59	-18.14	256	1.98
4892.82	-28.89	33.08	42.30	31.85	46.49	36.04	74	54	-27.51	-17.96	214	1.73
5594.23	-28.69	33.80	41.51	31.02	46.62	36.13	74	54	-27.38	-17.87	128	1.41

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3389.80	-30.59	31.02	42.51	32.01	42.94	32.44	74	54	-31.06	-21.56	340	1.49
3886.34	-30.08	32.40	41.75	31.29	44.07	33.61	74	54	-29.93	-20.39	110	1.83
4621.92	-29.27	32.44	41.95	31.42	45.12	34.59	74	54	-28.88	-19.41	60	2.03
4998.16	-28.74	33.49	39.10	28.66	43.85	33.41	74	54	-30.15	-20.59	79	2.26
5142.43	-28.73	33.50	42.01	31.53	46.78	36.30	74	54	-27.22	-17.70	158	2.39
5550.21	-28.69	33.80	41.50	31.09	46.61	36.20	74	54	-27.39	-17.80	214	2.44

**NOTE:**

1. Measurement uncertainty is 4.04 dB.
2. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 20 of 31  
Date : Nov. 13, 2020

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX2
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3212.67	-30.84	30.90	42.98	32.43	43.04	32.49	74	54	-30.96	-21.51	145	2.36
3754.98	-30.20	32.02	42.85	32.37	44.66	34.18	74	54	-29.34	-19.82	236	2.21
4038.15	-29.94	32.23	43.40	32.96	45.69	35.25	74	54	-28.31	-18.75	192	2.07
4551.03	-29.37	32.30	42.79	32.21	45.72	35.14	74	54	-28.28	-18.86	41	1.93
4999.70	-28.74	33.50	39.13	28.69	43.88	33.44	74	54	-30.12	-20.56	188	1.74
5662.29	-28.68	33.72	41.68	31.14	46.73	36.19	74	54	-27.27	-17.81	293	1.52

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3799.08	-30.16	32.20	42.25	31.79	44.29	33.83	74	54	-29.71	-20.17	70	1.67
4142.42	-29.83	32.20	43.06	32.58	45.43	34.95	74	54	-28.57	-19.05	86	1.98
4423.19	-29.52	32.20	42.43	31.99	45.11	34.67	74	54	-28.89	-19.33	257	2.04
4598.65	-29.30	32.40	42.41	31.91	45.50	35.00	74	54	-28.50	-19.00	13	2.13
4996.59	-28.75	33.48	39.81	29.34	44.55	34.08	74	54	-29.45	-19.92	76	2.25
5517.34	-28.70	33.87	41.08	30.55	46.25	35.72	74	54	-27.75	-18.28	309	2.39

**NOTE:**

1. Measurement uncertainty is 4.04 dB.
2. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCM505  
Page : 21 of 31  
Date : Nov. 13, 2020

Temperature:	22 °C	Humidity:	73 %RH
Frequency Range:	1 GHz – 25 GHz	Tested Mode:	TX3
Detector Type:	PK. and AV.	IF Bandwidth:	1 MHz
Tested By:	Richard Lin	Tested Date:	Oct. 06, 2020

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3038.04	-31.09	30.45	43.12	32.65	42.49	32.02	74	54	-31.51	-21.98	188	2.43
3621.51	-30.32	31.38	43.00	32.57	44.06	33.63	74	54	-29.94	-20.37	241	2.25
4172.27	-29.79	32.16	42.49	31.96	44.85	34.32	74	54	-29.15	-19.68	35	2.17
4587.83	-29.32	32.37	42.41	31.94	45.47	35.00	74	54	-28.53	-19.00	76	2.04
4997.15	-28.74	33.49	41.08	30.52	45.82	35.26	74	54	-28.18	-18.74	207	1.68
5386.92	-28.71	33.83	40.90	30.41	46.02	35.53	74	54	-27.98	-18.47	132	1.52

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB $\mu$ V)		Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
3271.61	-30.76	30.98	42.85	32.39	43.08	32.62	74	54	-30.92	-21.38	59	1.44
3742.84	-30.21	31.97	41.98	31.48	43.74	33.24	74	54	-30.26	-20.76	199	1.79
4153.98	-29.81	32.19	42.29	31.77	44.67	34.15	74	54	-29.33	-19.85	42	1.96
4638.13	-29.25	32.48	41.86	31.35	45.09	34.58	74	54	-28.91	-19.42	300	2.07
4996.35	-28.75	33.48	38.49	28.02	43.23	32.76	74	54	-30.77	-21.24	118	2.23
5551.82	-28.69	33.80	41.14	30.63	46.25	35.74	74	54	-27.75	-18.26	216	2.38

**NOTE:**

1. Measurement uncertainty is 4.04 dB.
2. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
3. The field strength of other emission frequencies were very low against the limit.
4. (F):The field strength of fundamental frequency.

**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

**TEST REPORT**Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 22 of 31  
Date : Nov. 13, 2020**4.3 20dB Bandwidth****4.3.1 LIMIT**

FCC Part15, Subpart C Section 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

FREQUENCY (MHz)	BANDWIDTH LIMIT(kHz)
Above 70-900	0.25% × Center Frequency(MHz)
Above 900	0.5% × Center Frequency(MHz)


**NOTE:** Bandwidth is determined at the points 20dB down from the modulated carrier.

**4.3.2 TEST EQUIPMENT**

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER (INCLUDE SPECTRUM ANALYZER)	9 KHz ~ 6 GHz	ROHDE & SCHWARZ	ESL /100176	JUL. 30, 2021 ETC

**NOTE:** The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

**4.3.3 TEST SET-UP**

The EUT was connected to a spectrum through a 50Ω RF cable.

**4.3.4 TEST PROCEDURE**

Please refer to FCC Part15C 15.231.

**4.3.5 EUT OPERATING CONDITION**

The EUT was operated in continually transmitting mode.



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 23 of 31  
Date : Nov. 13, 2020


### 4.3.6 TEST RESULT

Temperature:	25 °C	Humidity:	64 %RH
Spectrum Detector:	PK	Tested by:	Richard Lin
Test Result:	PASS	Tested Date:	Oct. 20, 2020

Channel Number	Channel Frequency (MHz)	20dB Down Bandwidth (kHz)	Maximum Limit (kHz)	Pass/Fail
CH00	410	714.6	1025	Pass
CH16	426	718.6	1065	Pass
CH31	441	706.6	1102.5	Pass

註：410MHz x 0.25% = 1.025 MHz, 426MHz x 0.25% = 1.065 MHz, 441MHz x 0.25% = 1.1025 MHz

CH00 :

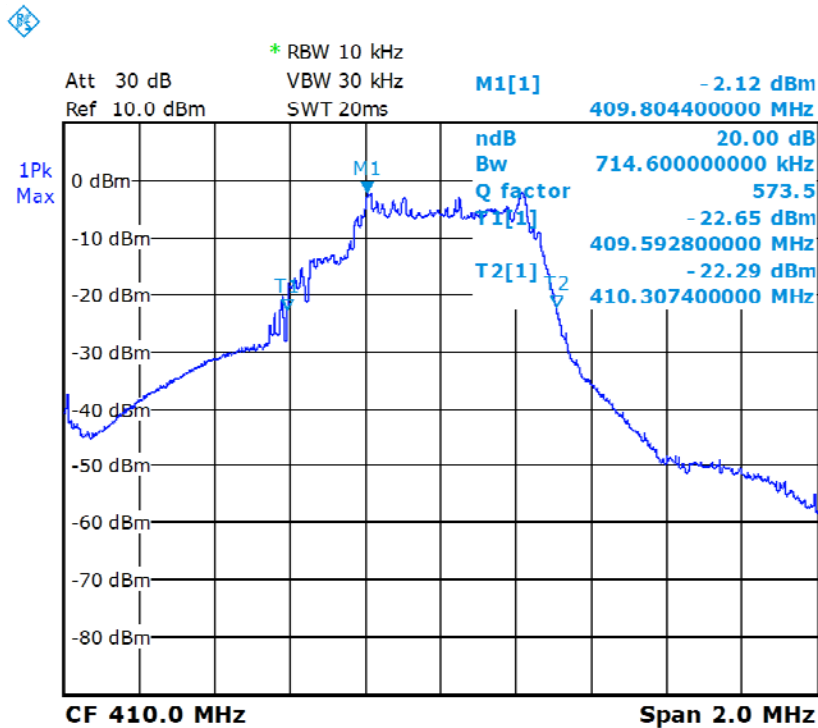




**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)


# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 24 of 31  
Date : Nov. 13, 2020

CH16 :

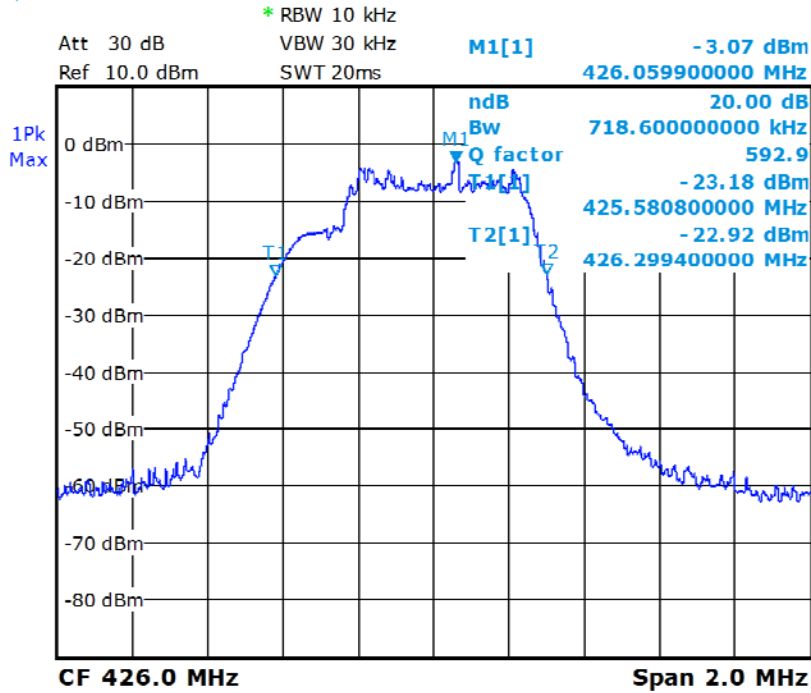

CH31 :

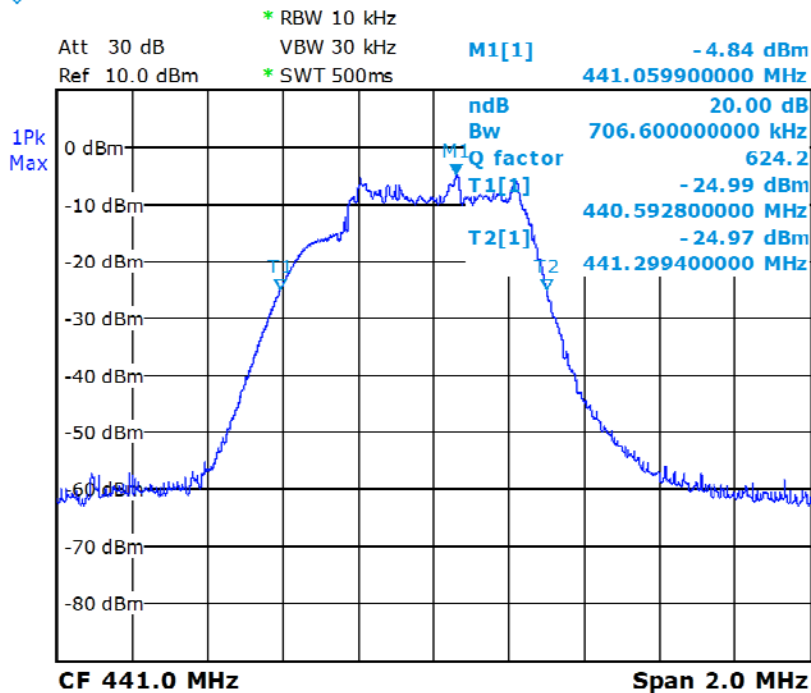





**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 25 of 31  
Date : Nov. 13, 2020

## 4.4 RELEASE OR OPERATING TIME

### 4.4.1 LIMIT

FCC Part15, Subpart C Section 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


### 4.4.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER (INCLUDE SPECTRUM ANALYZER)	9 KHz ~ 6 GHz	ROHDE & SCHWARZ	ESL /100176	JUL. 30, 2021 ETC

**NOTE:** The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.4.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

### 4.4.4 EUT OPERATING CONDITION

The EUT was operated in Normal Link mode.

Activation EUT's release time and measurement.



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 26 of 31  
Date : Nov. 13, 2020

## 4.4.5 TEST RESULT

Temperature:	<u>25 °C</u>	Humidity:	<u>64 %RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Richard Lin</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Oct. 20, 2020</u>

Total release time(ms)	Limit of release time<(s)	Pass/Fail
0.14	5	Pass





**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 27 of 31  
Date : Nov. 13, 2020

CH00 :

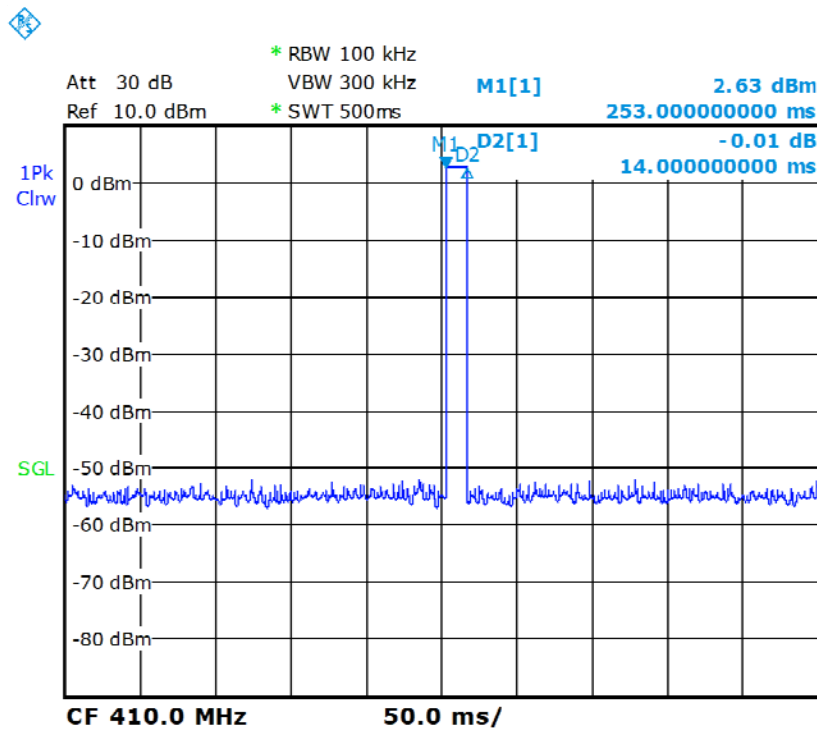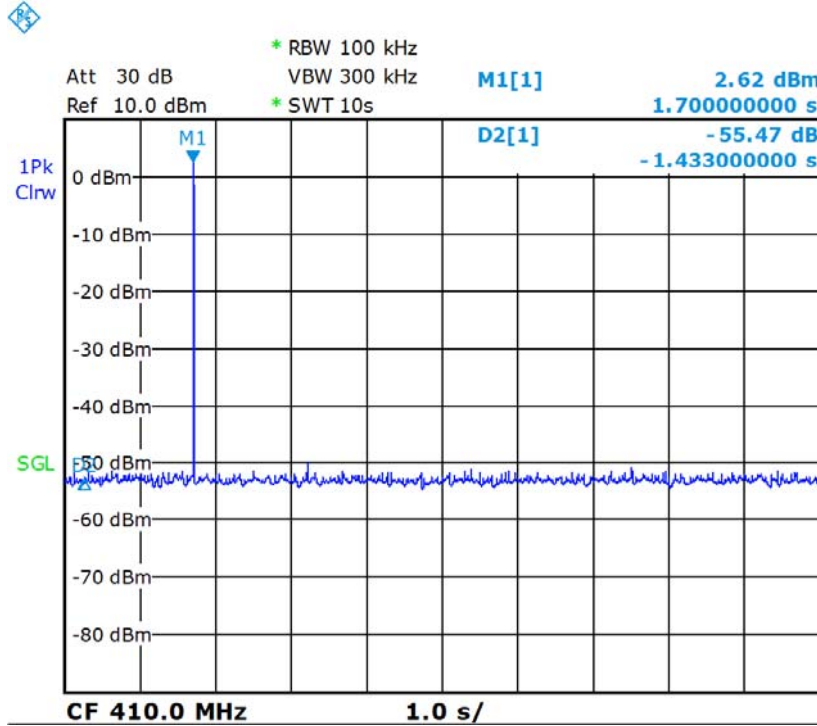





**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 28 of 31  
Date : Nov. 13, 2020

CH16 :

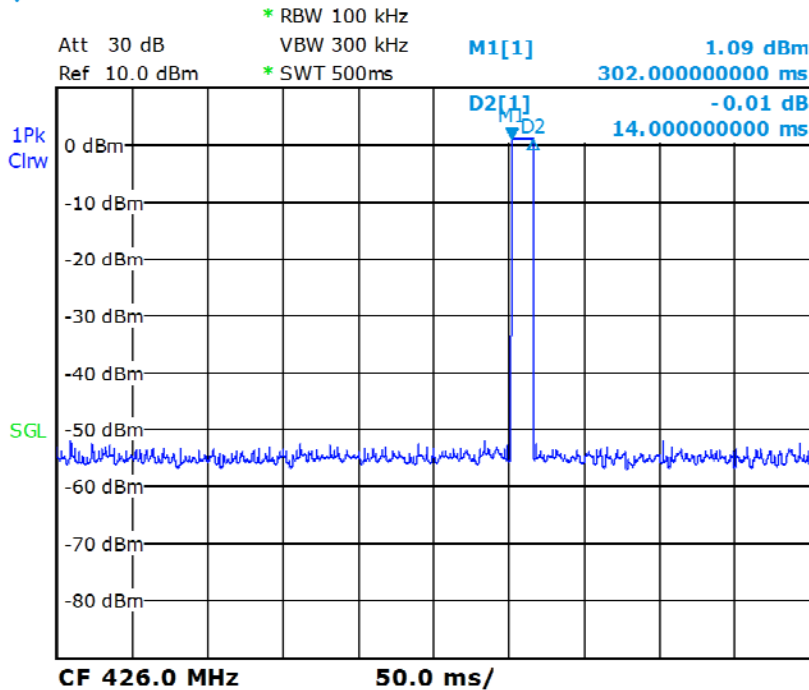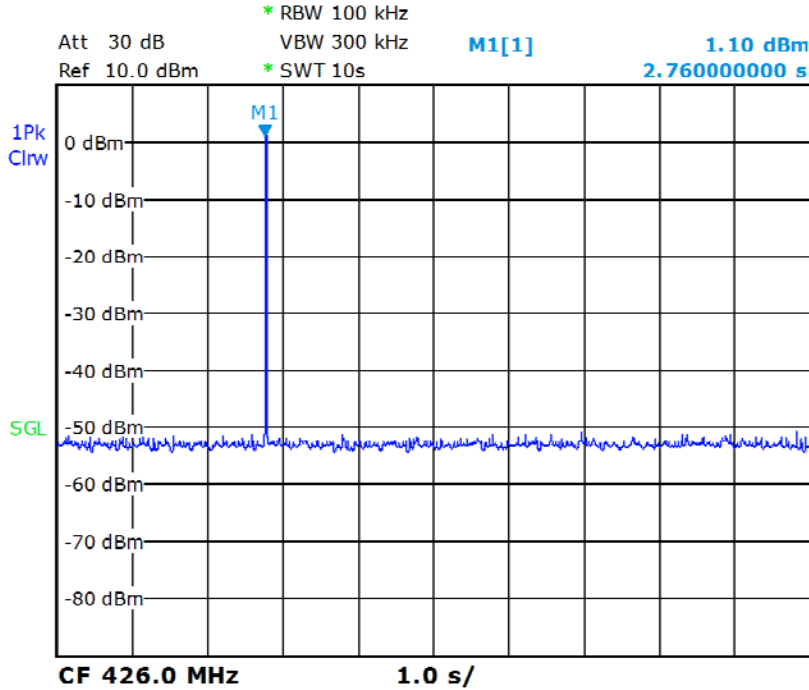





**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 29 of 31  
Date : Nov. 13, 2020

CH31 :

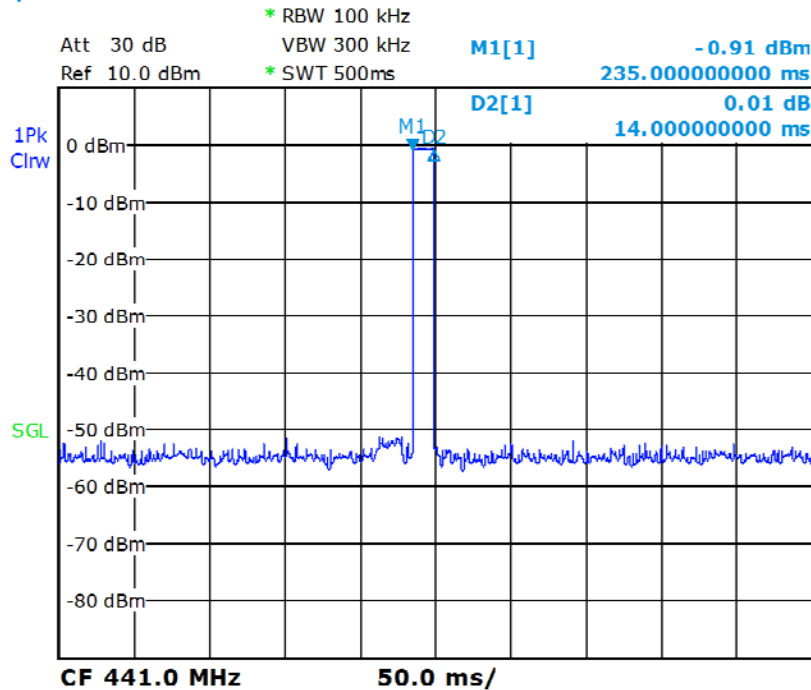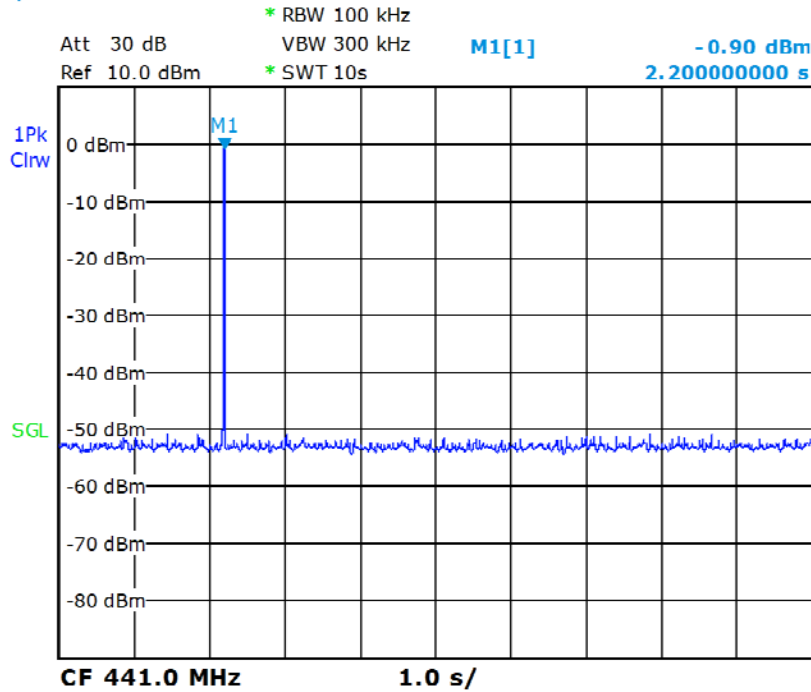



**Spectrum Research & Testing Lab., Inc.**

No.167, Ln. 780, Shan-Tong Rd., Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 30 of 31  
Date : Nov. 13, 2020

## 5. Antenna application

### 5.1 Antenna requirement

The EUT's antenna is met the requirement of FCC Part 15C section 15.203.

### 5.2 Result

The EUT's antenna used a Printed Antenna. Gain of 3.0 dBi that meet the requirement.



**Spectrum Research & Testing Lab., Inc.**

No.167,Ln. 780, Shan-Tong Rd.,Ling 8, Shan-Tong Li, Chung-Li Dist., Taoyuan City 320, Taiwan (R.O.C.)

# TEST REPORT

Reference No. : A20071703  
Report No. : FCCA20071703-01  
FCC ID : 2AUZVCMS505  
Page : 31 of 31  
Date : Nov. 13, 2020

## 6. TERMS OF ABBREVIATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction