


Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5200	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 10:55:43

Test Graph

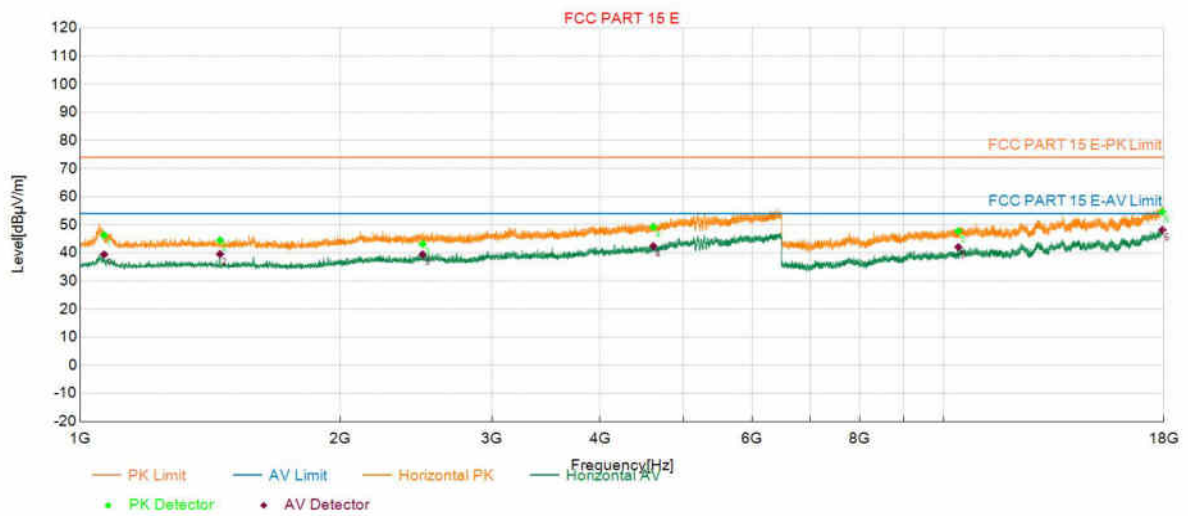

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1066.0066	46.30	74.00	27.70	39.44	54.00	14.56	150	358	Horizontal
2	1452.1452	44.46	74.00	29.54	39.55	54.00	14.45	150	194	Horizontal
3	2492.8493	43.13	74.00	30.87	39.47	54.00	14.53	150	336	Horizontal
4	4611.6612	49.19	74.00	24.81	42.39	54.00	11.61	150	233	Horizontal
5	10400.0400	47.75	74.00	26.25	42.07	54.00	11.93	150	65	Horizontal
6	17922.9423	54.57	74.00	19.43	48.17	54.00	5.83	150	319	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5200	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 10:56:59

Test Graph

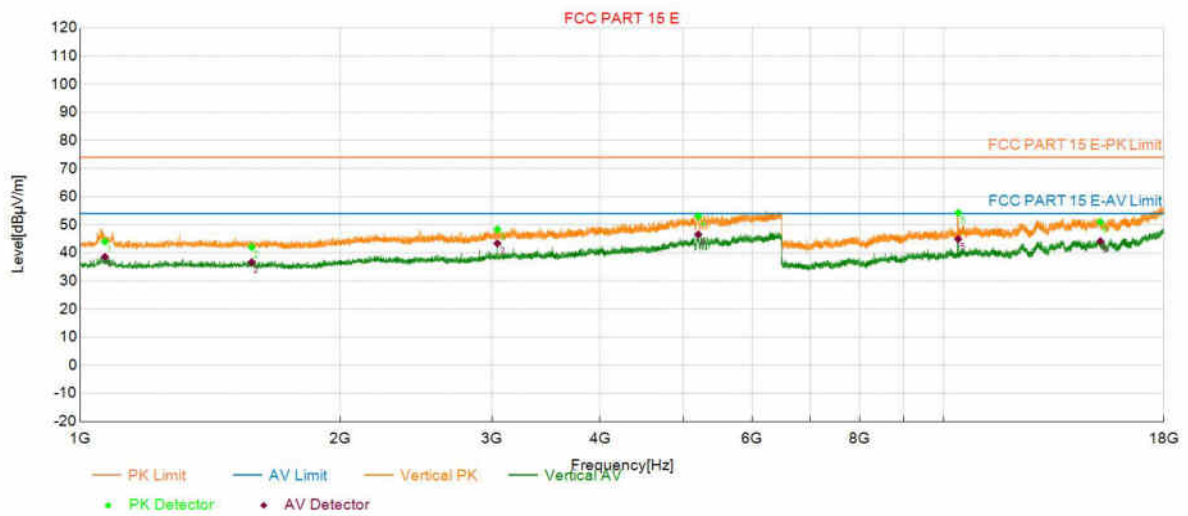

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1068.2068	43.95	74.00	30.05	38.56	54.00	15.44	150	305	Vertical
2	1580.3080	42.03	74.00	31.97	36.68	54.00	17.32	150	0	Vertical
3	3042.9043	48.36	74.00	25.64	43.36	54.00	10.64	150	348	Vertical
4	5197.4697	53.07	74.00	20.93	46.54	54.00	7.46	150	2	Vertical
5	10398.8899	54.24	74.00	19.76	44.85	54.00	9.15	150	186	Vertical
6	15192.5693	50.94	74.00	23.06	44.12	54.00	9.88	150	222	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5240	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:13:36

Test Graph

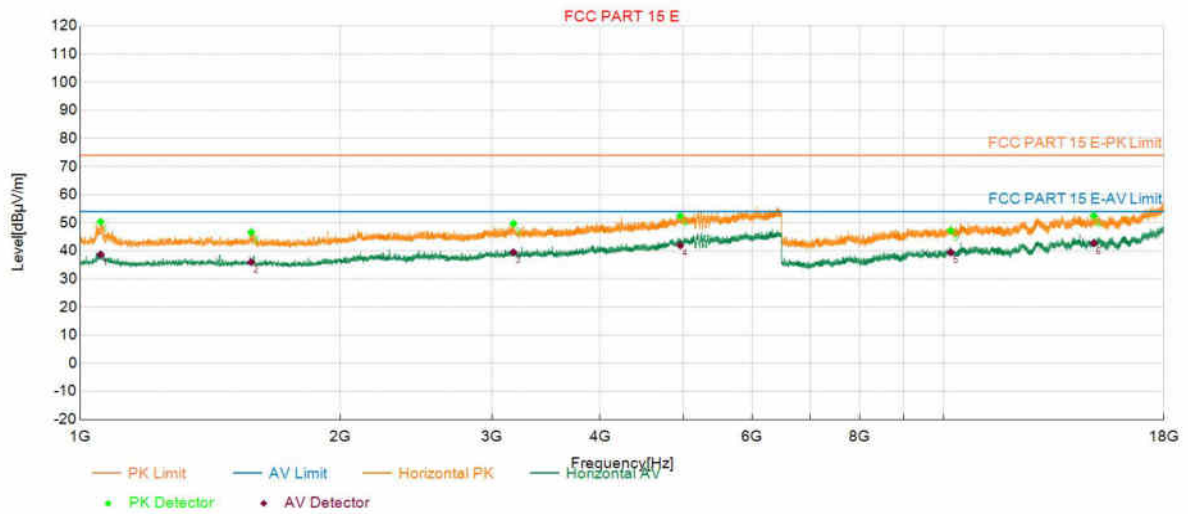

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1056.1056	50.33	74.00	23.67	38.71	54.00	15.29	150	4	Horizontal
2	1578.1078	46.63	74.00	27.37	36.00	54.00	18.00	150	356	Horizontal
3	3176.0176	49.66	74.00	24.34	39.49	54.00	14.51	150	207	Horizontal
4	4954.8955	52.39	74.00	21.61	41.93	54.00	12.07	150	146	Horizontal
5	10195.3195	47.22	74.00	26.78	39.40	54.00	14.60	150	83	Horizontal
6	14926.8927	52.45	74.00	21.55	42.69	54.00	11.31	150	2	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5240	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:14:55

Test Graph

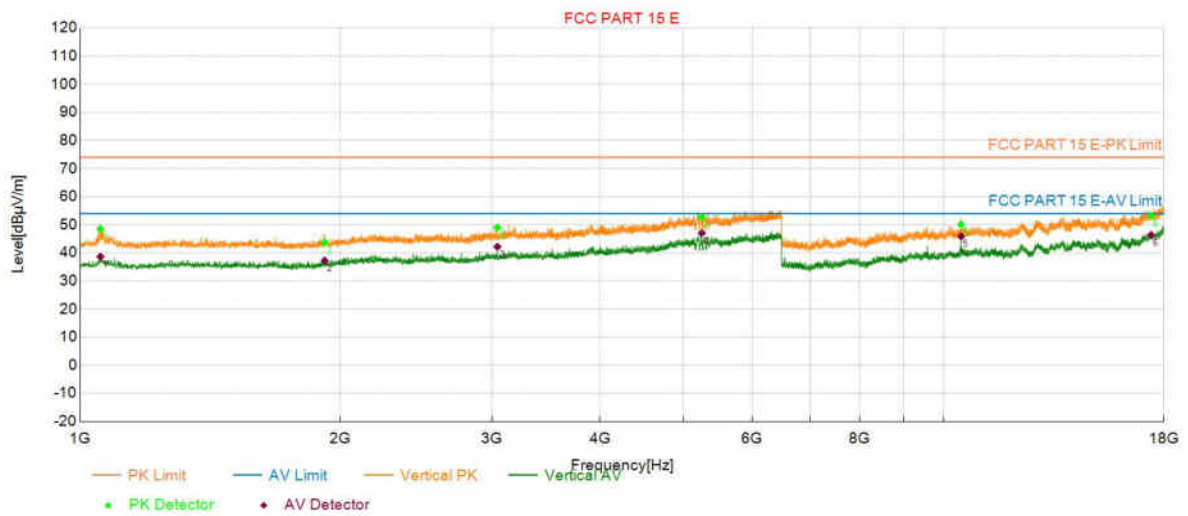

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1055.5556	48.51	74.00	25.49	38.62	54.00	15.38	150	309	Vertical
2	1919.6920	43.73	74.00	30.27	37.22	54.00	16.78	150	349	Vertical
3	3042.9043	49.03	74.00	24.97	42.19	54.00	11.81	150	344	Vertical
4	5246.4246	52.72	74.00	21.28	47.04	54.00	6.96	150	116	Vertical
5	10478.2478	50.08	74.00	23.92	45.83	54.00	8.17	150	185	Vertical
6	17390.4390	53.20	74.00	20.80	46.35	54.00	7.65	150	214	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5260	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:16:48

Test Graph

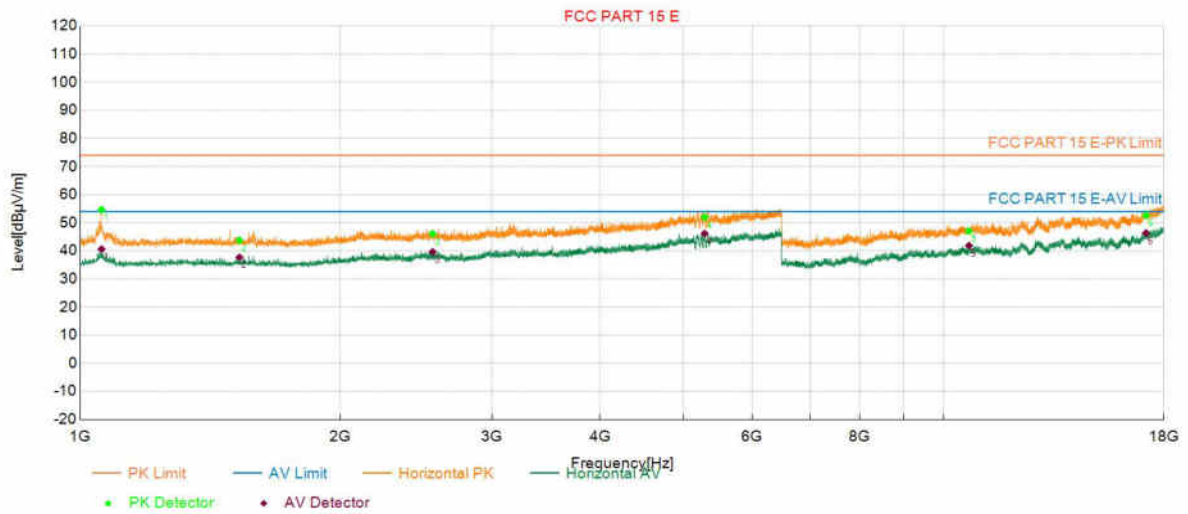

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1058.8559	54.62	74.00	19.38	40.60	54.00	13.40	150	12	Horizontal
2	1529.1529	43.80	74.00	30.20	37.69	54.00	16.31	150	309	Horizontal
3	2559.9560	46.09	74.00	27.91	39.59	54.00	14.41	150	63	Horizontal
4	5287.6788	51.97	74.00	22.03	46.14	54.00	7.86	150	5	Horizontal
5	10700.2200	47.06	74.00	26.94	41.86	54.00	12.14	150	168	Horizontal
6	17154.6655	52.55	74.00	21.45	46.31	54.00	7.69	150	64	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5260	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:18:05

Test Graph

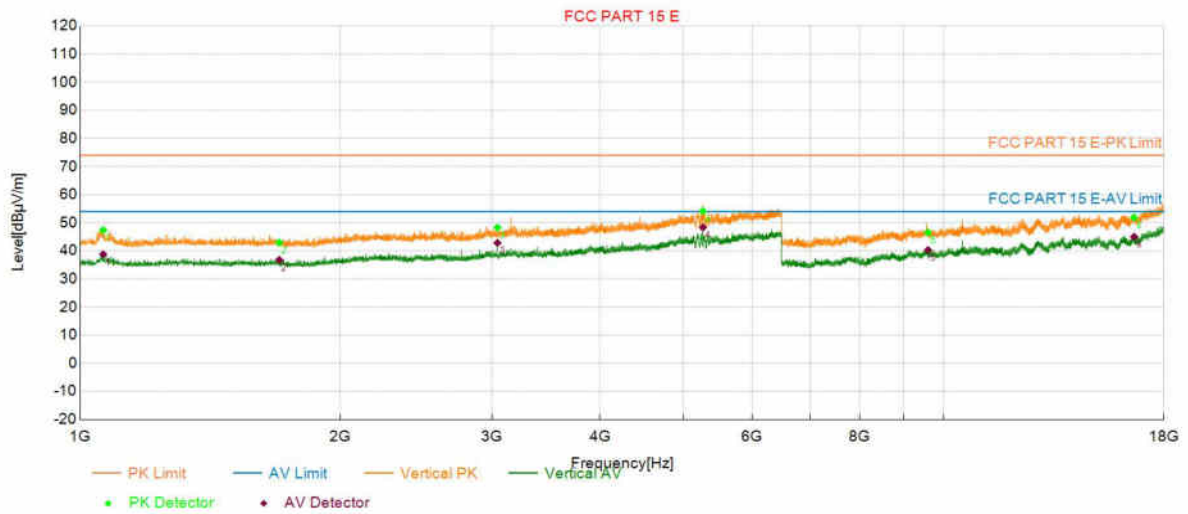

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1063.2563	47.37	74.00	26.63	38.79	54.00	15.21	150	348	Vertical
2	1700.2200	42.93	74.00	31.07	36.80	54.00	17.20	150	133	Vertical
3	3042.9043	48.31	74.00	25.69	42.84	54.00	11.16	150	348	Vertical
4	5264.0264	54.11	74.00	19.89	48.35	54.00	5.65	150	112	Vertical
5	9593.8094	46.50	74.00	27.50	40.30	54.00	13.70	150	120	Vertical
6	16619.8620	51.87	74.00	22.13	45.03	54.00	8.97	150	257	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5280	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:20:19

Test Graph

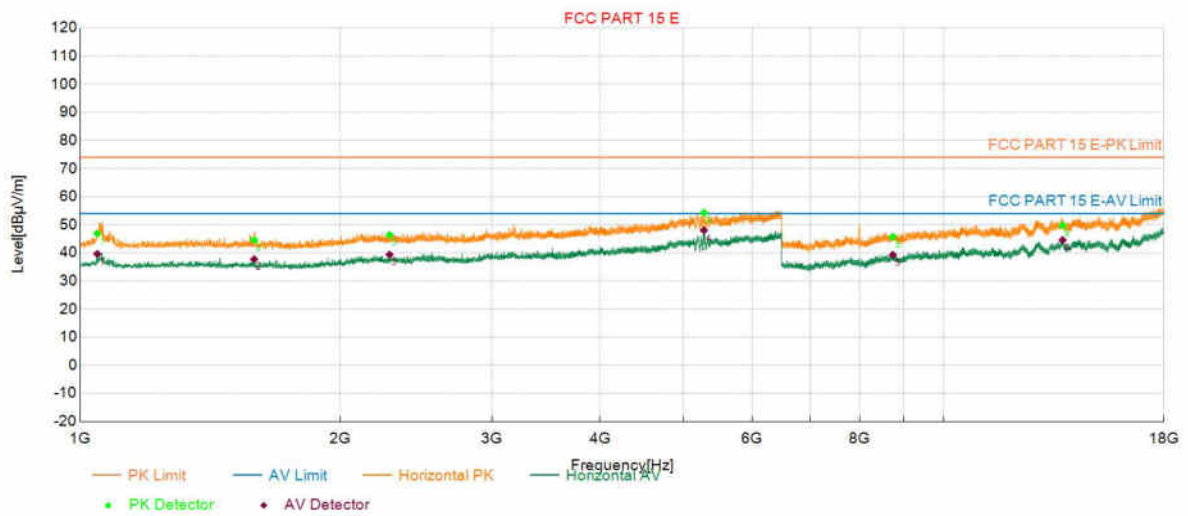

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1046.7547	46.90	74.00	27.10	39.63	54.00	14.37	150	12	Horizontal
2	1590.2090	44.58	74.00	29.42	37.73	54.00	16.27	150	353	Horizontal
3	2282.1782	46.40	74.00	27.60	39.39	54.00	14.61	150	240	Horizontal
4	5277.2277	54.25	74.00	19.75	48.01	54.00	5.99	150	226	Horizontal
5	8732.3732	45.71	74.00	28.29	39.29	54.00	14.71	150	4	Horizontal
6	13734.2234	49.74	74.00	24.26	44.54	54.00	9.46	150	357	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5280	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:21:36

Test Graph

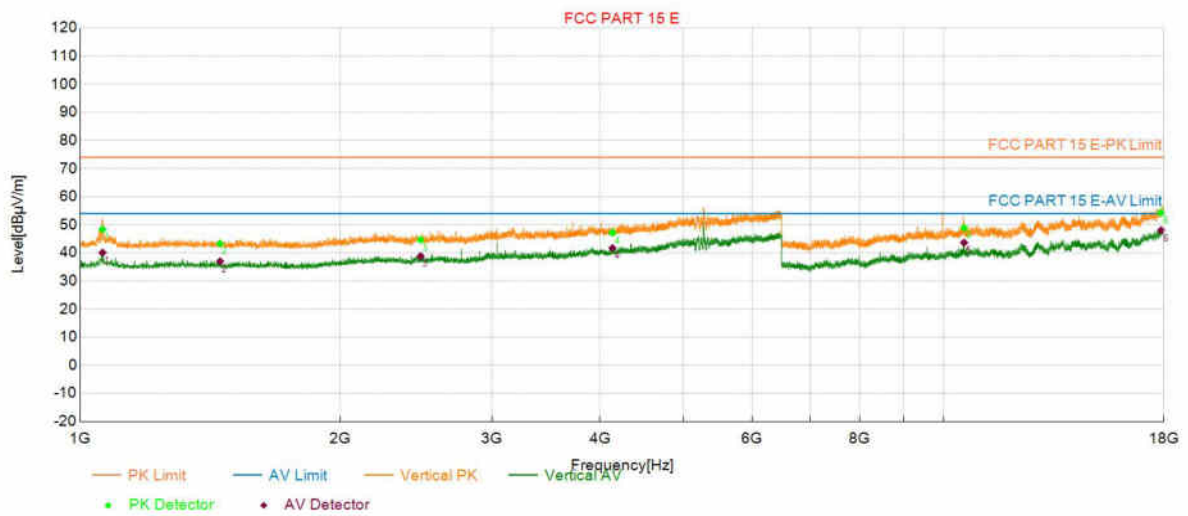

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1061.6062	48.35	74.00	25.65	40.07	54.00	13.93	150	294	Vertical
2	1452.1452	43.29	74.00	30.71	36.97	54.00	17.03	150	144	Vertical
3	2479.0979	44.62	74.00	29.38	38.82	54.00	15.18	150	237	Vertical
4	4135.3135	47.19	74.00	26.81	41.68	54.00	12.32	150	252	Vertical
5	10561.0561	48.90	74.00	25.10	43.61	54.00	10.39	150	186	Vertical
6	17858.5359	54.28	74.00	19.72	48.01	54.00	5.99	150	270	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:25:11

Test Graph

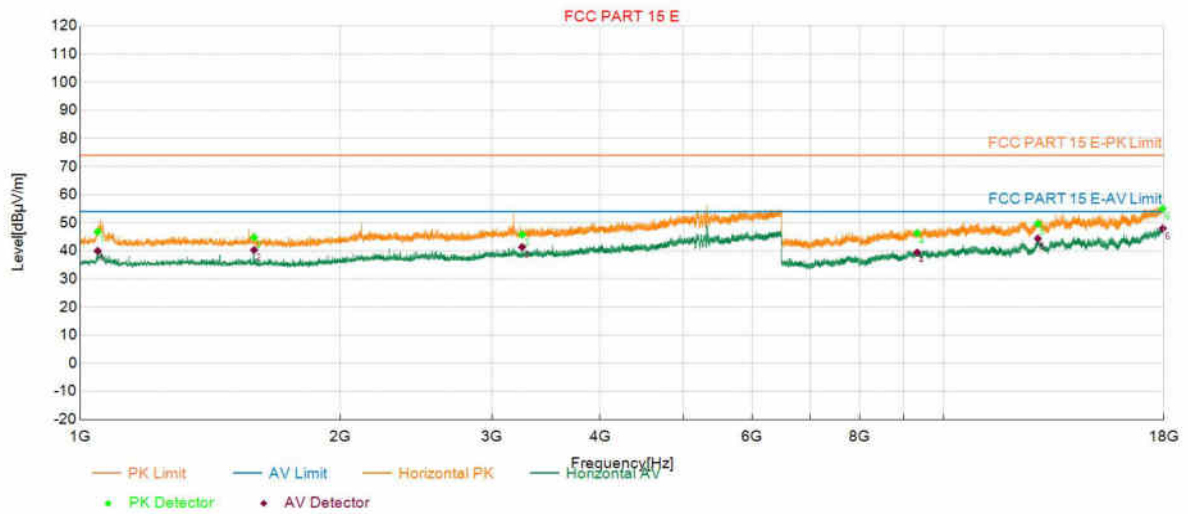

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1047.8548	46.74	74.00	27.26	39.99	54.00	14.01	150	9	Horizontal
2	1590.2090	44.76	74.00	29.24	40.32	54.00	13.68	150	349	Horizontal
3	3250.2750	45.79	74.00	28.21	41.35	54.00	12.65	150	225	Horizontal
4	9318.9319	46.28	74.00	27.72	39.43	54.00	14.57	150	322	Horizontal
5	12857.8358	49.57	74.00	24.43	44.37	54.00	9.63	150	194	Horizontal
6	17940.1940	54.99	74.00	19.01	47.98	54.00	6.02	150	343	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:26:28

Test Graph

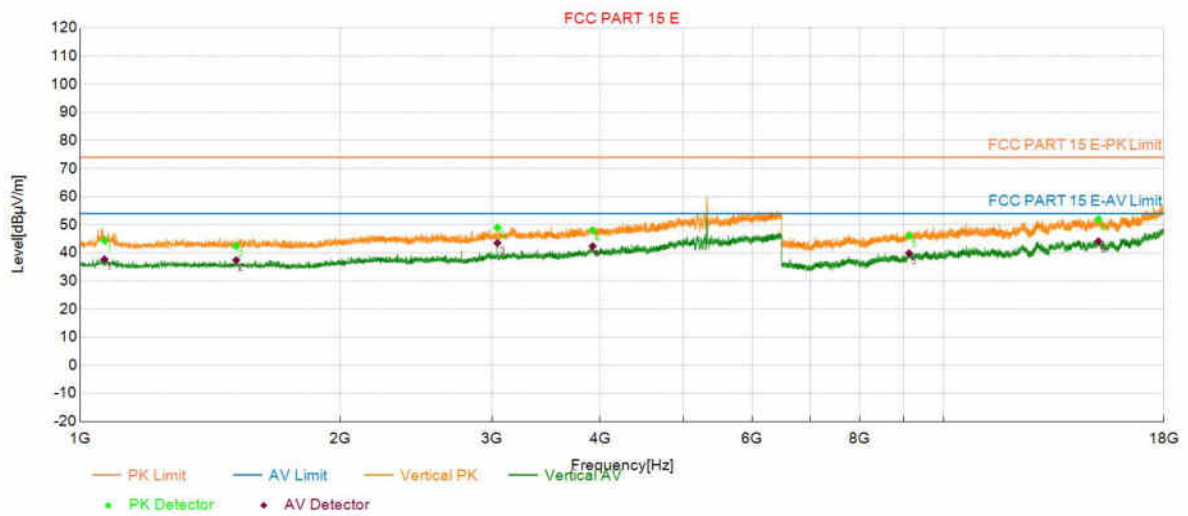

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1067.1067	44.35	74.00	29.65	37.69	54.00	16.31	150	327	Vertical
2	1515.9516	42.40	74.00	31.60	37.39	54.00	16.61	150	108	Vertical
3	3042.9043	48.99	74.00	25.01	43.51	54.00	10.49	150	351	Vertical
4	3921.8922	47.92	74.00	26.08	42.36	54.00	11.64	150	356	Vertical
5	9121.1121	46.04	74.00	27.96	39.84	54.00	14.16	150	360	Vertical
6	15109.7610	51.95	74.00	22.05	44.09	54.00	9.91	150	264	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:30:31

Test Graph

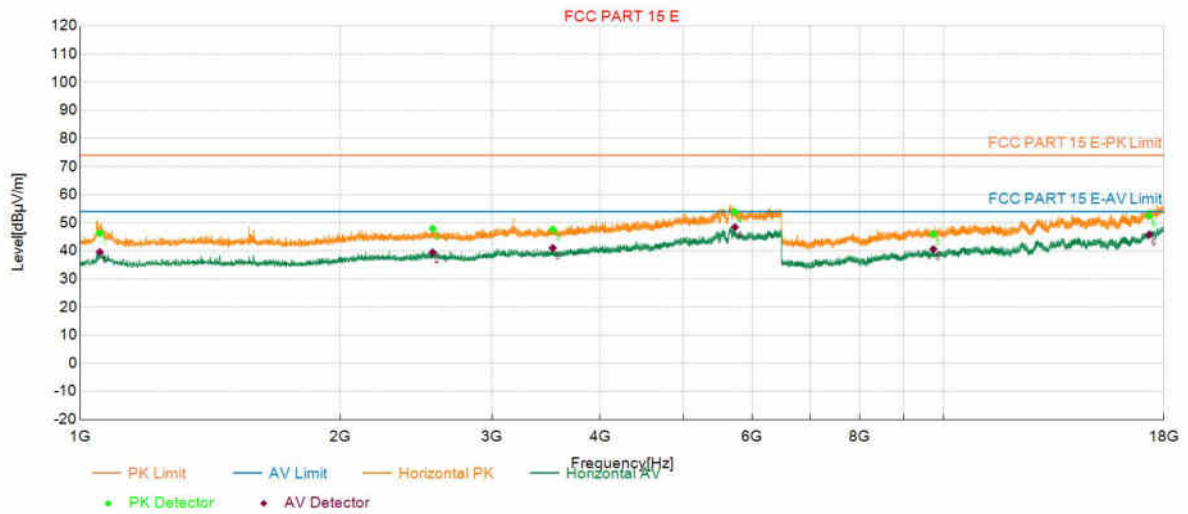

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1053.9054	46.26	74.00	27.74	39.57	54.00	14.43	150	6	Horizontal
2	2559.9560	47.89	74.00	26.11	39.45	54.00	14.55	150	74	Horizontal
3	3526.9527	47.62	74.00	26.38	41.00	54.00	13.00	150	46	Horizontal
4	5732.1232	53.90	74.00	20.10	48.38	54.00	5.62	150	342	Horizontal
5	9729.5230	45.97	74.00	28.03	40.61	54.00	13.39	150	159	Horizontal
6	17298.4298	52.45	74.00	21.55	45.74	54.00	8.26	150	208	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:31:51

Test Graph

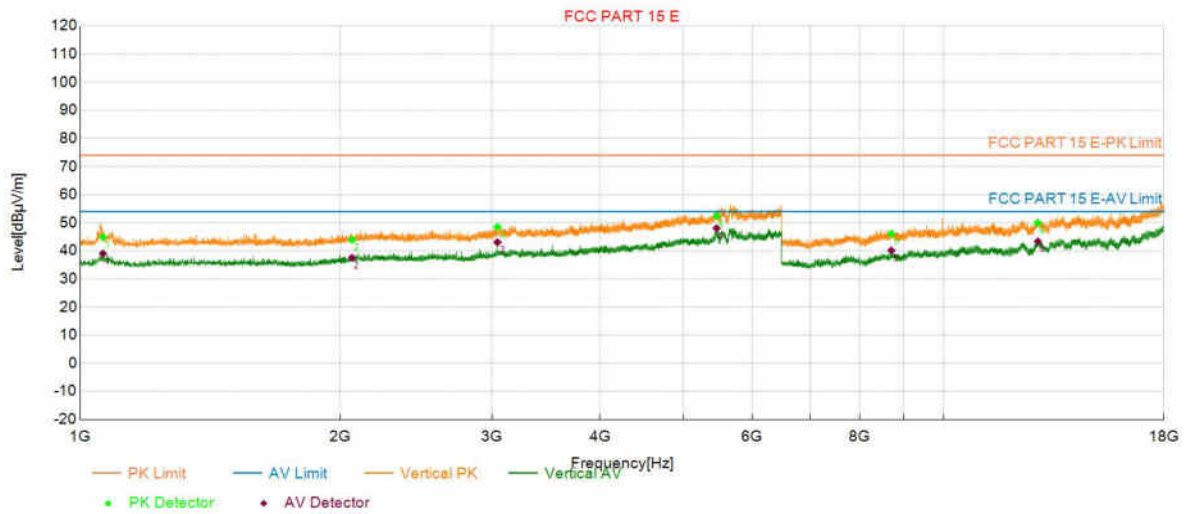

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1062.7063	44.92	74.00	29.08	39.02	54.00	14.98	150	342	Vertical
2	2064.9065	43.98	74.00	30.02	37.52	54.00	16.48	150	55	Vertical
3	3042.9043	48.53	74.00	25.47	43.04	54.00	10.96	150	270	Vertical
4	5458.7459	52.35	74.00	21.65	48.02	54.00	5.98	150	1	Vertical
5	8699.0199	46.07	74.00	27.93	40.15	54.00	13.85	150	75	Vertical
6	12857.8358	49.90	74.00	24.10	43.38	54.00	10.62	150	39	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5580	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:34:46

Test Graph

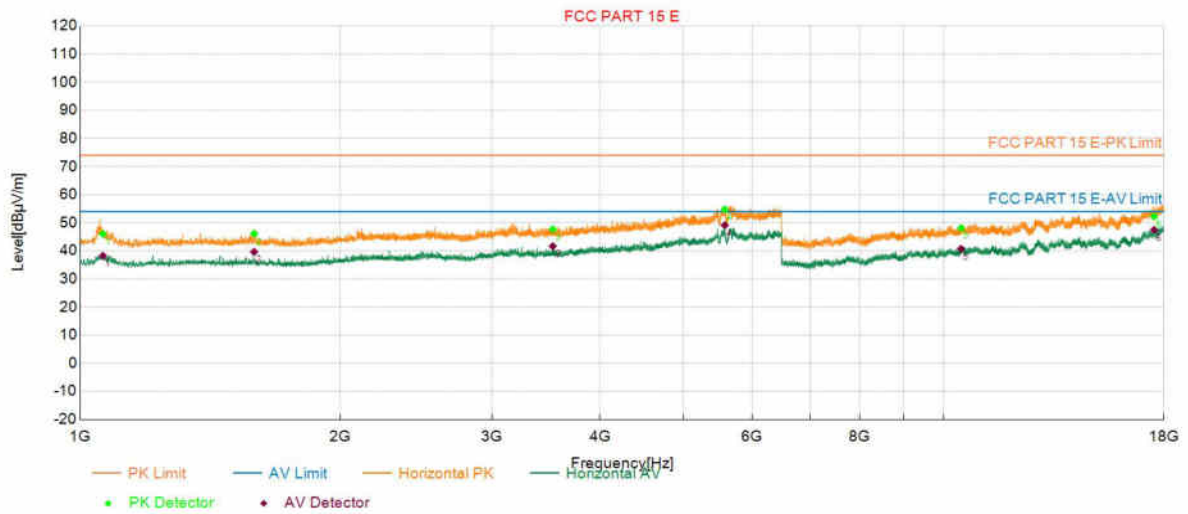

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1062.7063	46.02	74.00	27.98	38.23	54.00	15.77	150	342	Horizontal
2	1590.2090	46.09	74.00	27.91	39.66	54.00	14.34	150	358	Horizontal
3	3526.9527	47.69	74.00	26.31	41.67	54.00	12.33	150	38	Horizontal
4	5579.2079	54.75	74.00	19.25	49.10	54.00	4.90	150	294	Horizontal
5	10475.9476	48.10	74.00	25.90	40.74	54.00	13.26	150	24	Horizontal
6	17531.9032	52.22	74.00	21.78	47.47	54.00	6.53	150	201	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5580	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:36:03

Test Graph

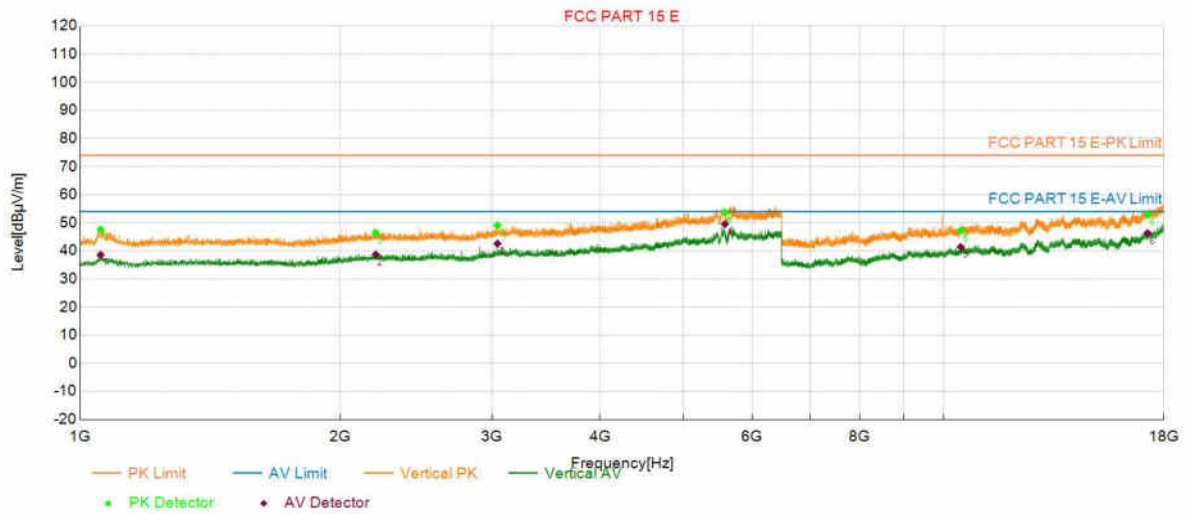

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1056.1056	47.60	74.00	26.40	38.56	54.00	15.44	150	4	Vertical
2	2199.6700	46.43	74.00	27.57	38.70	54.00	15.30	150	122	Vertical
3	3042.9043	49.14	74.00	24.86	42.56	54.00	11.44	150	352	Vertical
4	5580.8581	53.72	74.00	20.28	49.55	54.00	4.45	150	75	Vertical
5	10467.8968	47.16	74.00	26.84	41.37	54.00	12.63	150	195	Vertical
6	17230.5731	52.95	74.00	21.05	46.27	54.00	7.73	150	124	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:39:44

Test Graph

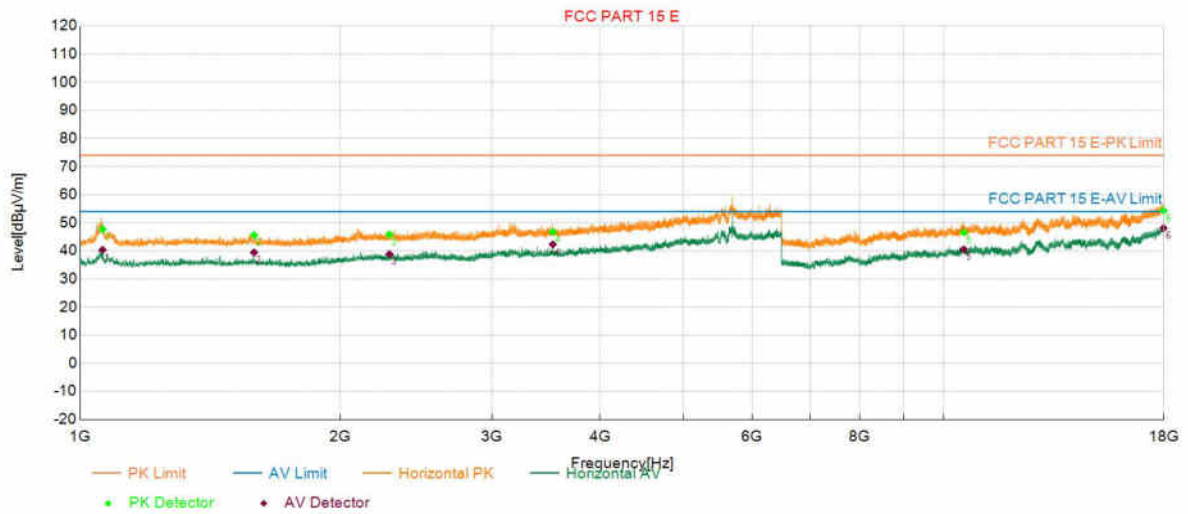

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1061.6062	47.69	74.00	26.31	40.35	54.00	13.65	150	0	Horizontal
2	1590.2090	45.60	74.00	28.40	39.45	54.00	14.55	150	328	Horizontal
3	2281.6282	45.78	74.00	28.22	38.81	54.00	15.19	150	37	Horizontal
4	3526.9527	46.70	74.00	27.30	42.30	54.00	11.70	150	243	Horizontal
5	10556.4556	46.52	74.00	27.48	40.52	54.00	13.48	150	360	Horizontal
6	17979.2979	54.33	74.00	19.67	48.10	54.00	5.90	150	189	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:41:01

Test Graph

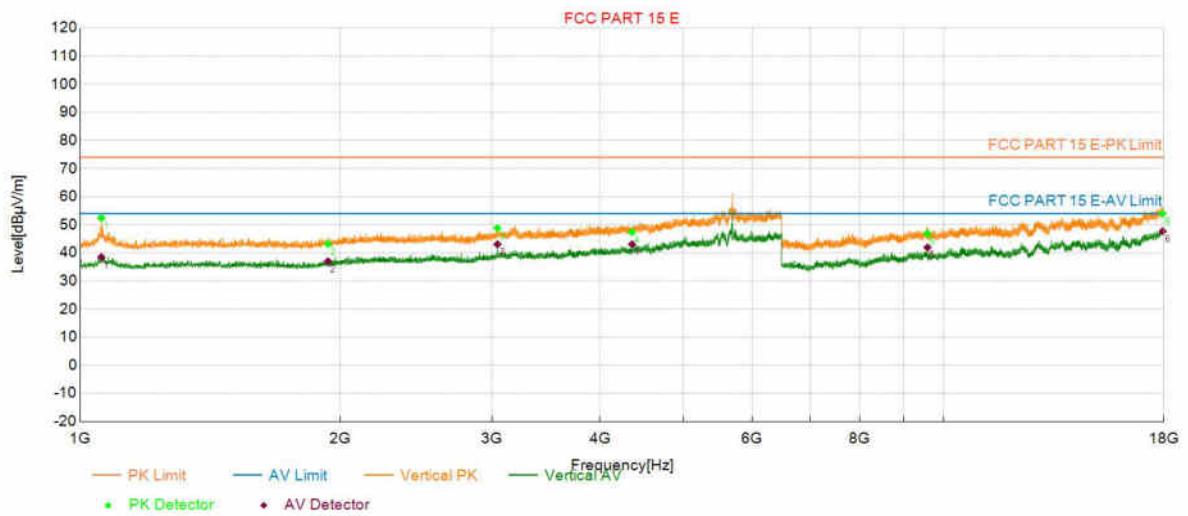

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1058.3058	52.38	74.00	21.62	38.49	54.00	15.51	150	315	Vertical
2	1936.1936	43.16	74.00	30.84	36.98	54.00	17.02	150	71	Vertical
3	3042.9043	48.84	74.00	25.16	43.04	54.00	10.96	150	1	Vertical
4	4356.9857	47.38	74.00	26.62	43.07	54.00	10.93	150	329	Vertical
5	9578.8579	46.87	74.00	27.13	41.92	54.00	12.08	150	106	Vertical
6	17936.7437	53.92	74.00	20.08	47.69	54.00	6.31	150	100	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5745	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:44:00

Test Graph

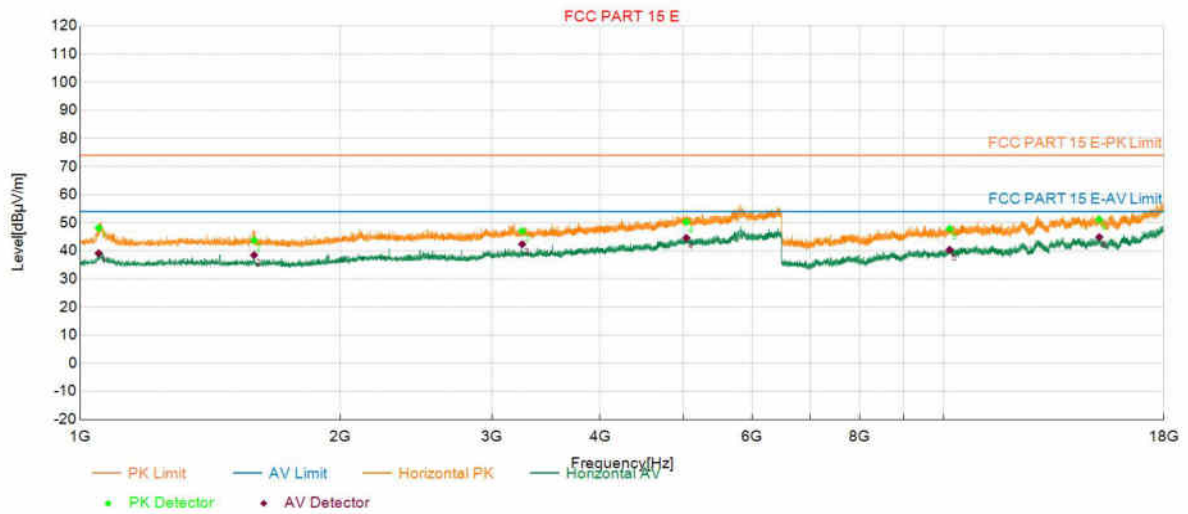

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1050.6051	48.13	74.00	25.87	39.12	54.00	14.88	150	358	Horizontal
2	1590.2090	43.77	74.00	30.23	38.50	54.00	15.50	150	352	Horizontal
3	3250.2750	47.06	74.00	26.94	42.38	54.00	11.62	150	231	Horizontal
4	5035.7536	50.27	74.00	23.73	44.59	54.00	9.41	150	347	Horizontal
5	10160.8161	47.87	74.00	26.13	40.38	54.00	13.62	150	348	Horizontal
6	15146.5647	51.15	74.00	22.85	44.86	54.00	9.14	150	17	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5745	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:45:19

Test Graph

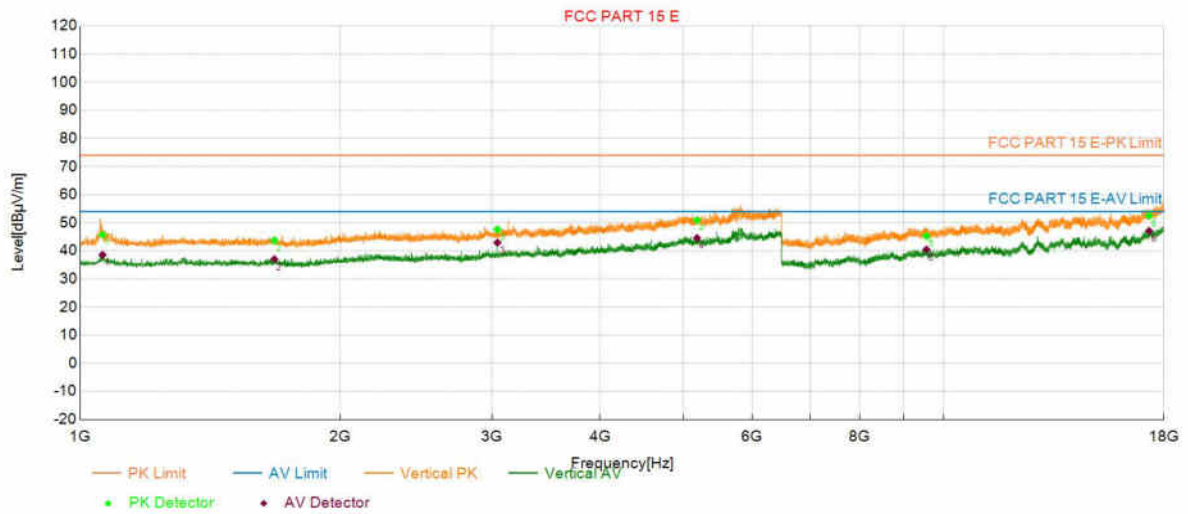

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1061.6062	45.73	74.00	28.27	38.59	54.00	15.41	150	288	Vertical
2	1678.7679	43.75	74.00	30.25	37.06	54.00	16.94	150	132	Vertical
3	3042.9043	47.66	74.00	26.34	42.93	54.00	11.07	150	1	Vertical
4	5180.4180	50.93	74.00	23.07	44.54	54.00	9.46	150	288	Vertical
5	9552.4052	45.28	74.00	28.72	40.46	54.00	13.54	150	59	Vertical
6	17297.2797	52.43	74.00	21.57	47.09	54.00	6.91	150	333	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5785	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:47:51

Test Graph

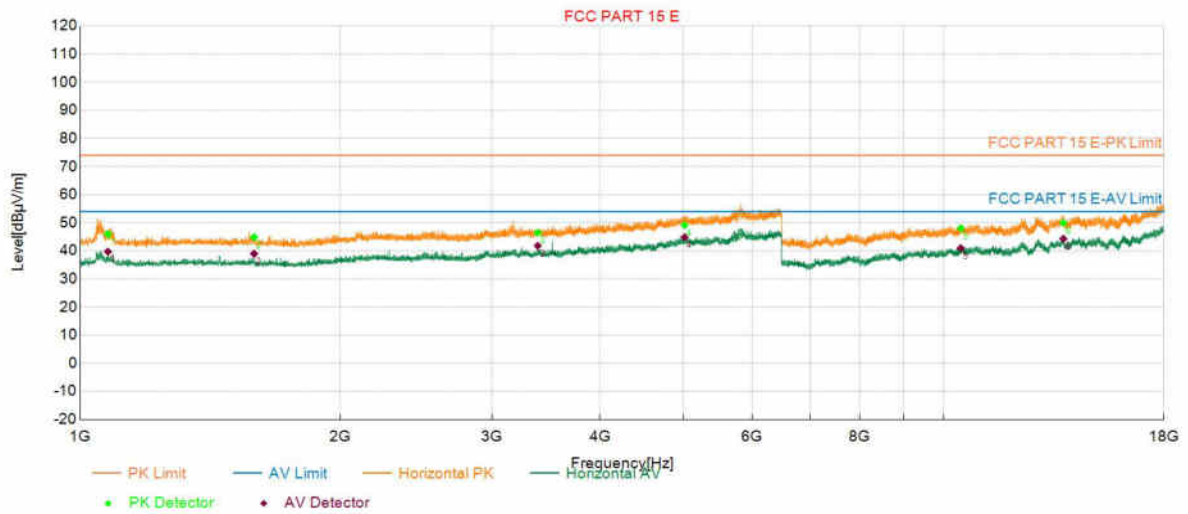

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1077.0077	45.98	74.00	28.02	39.70	54.00	14.30	150	34	Horizontal
2	1590.2090	44.86	74.00	29.14	38.96	54.00	15.04	150	356	Horizontal
3	3388.3388	46.50	74.00	27.50	41.80	54.00	12.20	150	301	Horizontal
4	5012.1012	49.15	74.00	24.85	44.87	54.00	9.13	150	34	Horizontal
5	10469.0469	48.00	74.00	26.00	40.97	54.00	13.03	150	164	Horizontal
6	13764.1264	49.93	74.00	24.07	44.30	54.00	9.70	150	241	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5785	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:49:07

Test Graph

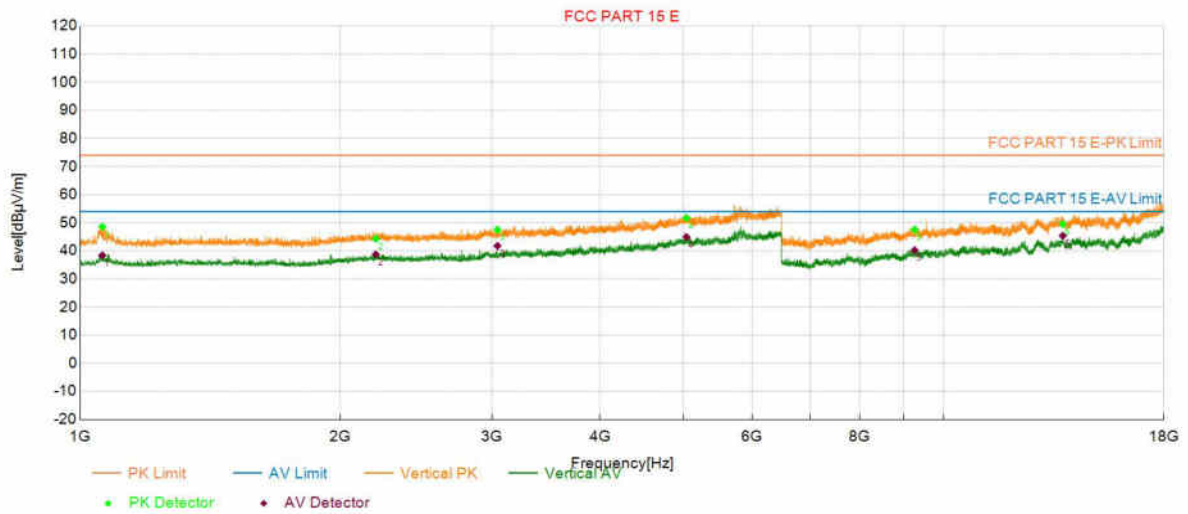

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1061.0561	48.56	74.00	25.44	38.39	54.00	15.61	150	348	Vertical
2	2200.2200	44.30	74.00	29.70	38.73	54.00	15.27	150	348	Vertical
3	3042.9043	47.50	74.00	26.50	41.79	54.00	12.21	150	358	Vertical
4	5036.3036	51.66	74.00	22.34	44.95	54.00	9.05	150	0	Vertical
5	9255.6756	47.55	74.00	26.45	40.23	54.00	13.77	150	18	Vertical
6	13739.9740	49.51	74.00	24.49	45.38	54.00	8.62	150	360	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5825	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:51:20

Test Graph

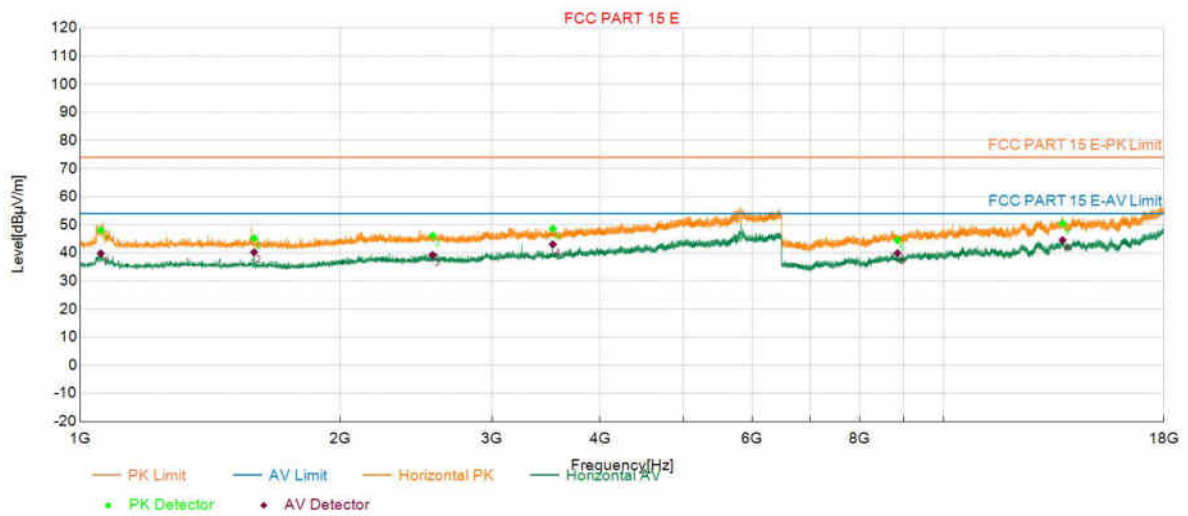

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1056.6557	48.04	74.00	25.96	39.81	54.00	14.19	150	0	Horizontal
2	1590.2090	45.18	74.00	28.82	40.20	54.00	13.80	150	314	Horizontal
3	2559.9560	46.14	74.00	27.86	39.27	54.00	14.73	150	71	Horizontal
4	3526.9527	48.59	74.00	25.41	42.99	54.00	11.01	150	49	Horizontal
5	8840.4840	44.47	74.00	29.53	39.88	54.00	14.12	150	350	Horizontal
6	13733.0733	50.47	74.00	23.53	44.52	54.00	9.48	150	226	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5825	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC PART 15 E			

Start of Test:2025-01-22 11:52:36

Test Graph

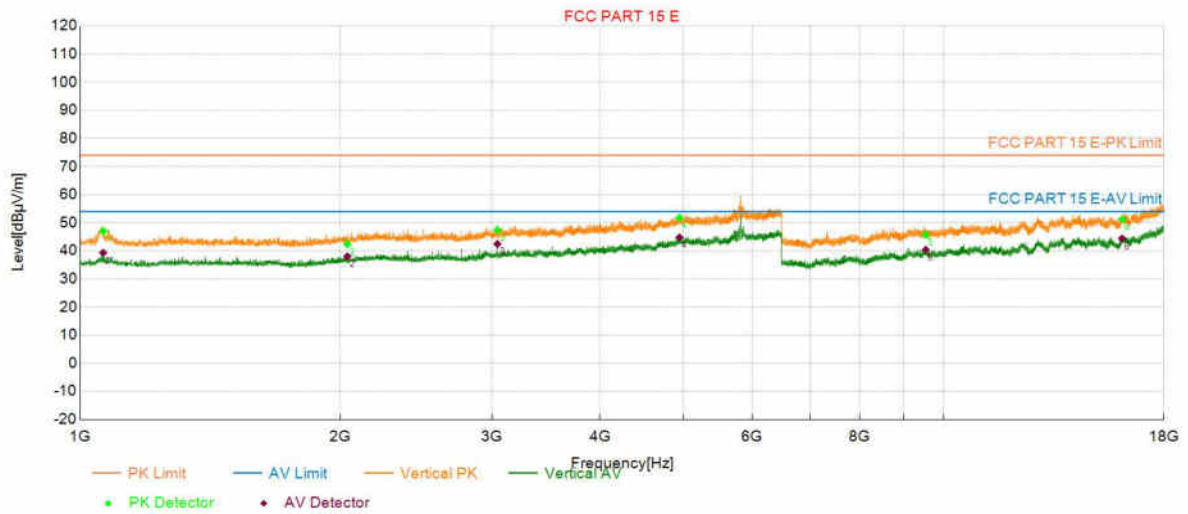

PK Final Data List


NO.	Frequency (MHz)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1063.2563	47.05	74.00	26.95	39.33	54.00	14.67	150	322	Vertical
2	2039.0539	42.41	74.00	31.59	38.03	54.00	15.97	150	131	Vertical
3	3042.9043	47.38	74.00	26.62	42.45	54.00	11.55	150	352	Vertical
4	4943.8944	51.76	74.00	22.24	44.75	54.00	9.25	150	203	Vertical
5	9534.0034	45.73	74.00	28.27	40.39	54.00	13.61	150	286	Vertical
6	16096.5597	51.25	74.00	22.75	44.39	54.00	9.61	150	115	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5180	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:21:24

Test Graph

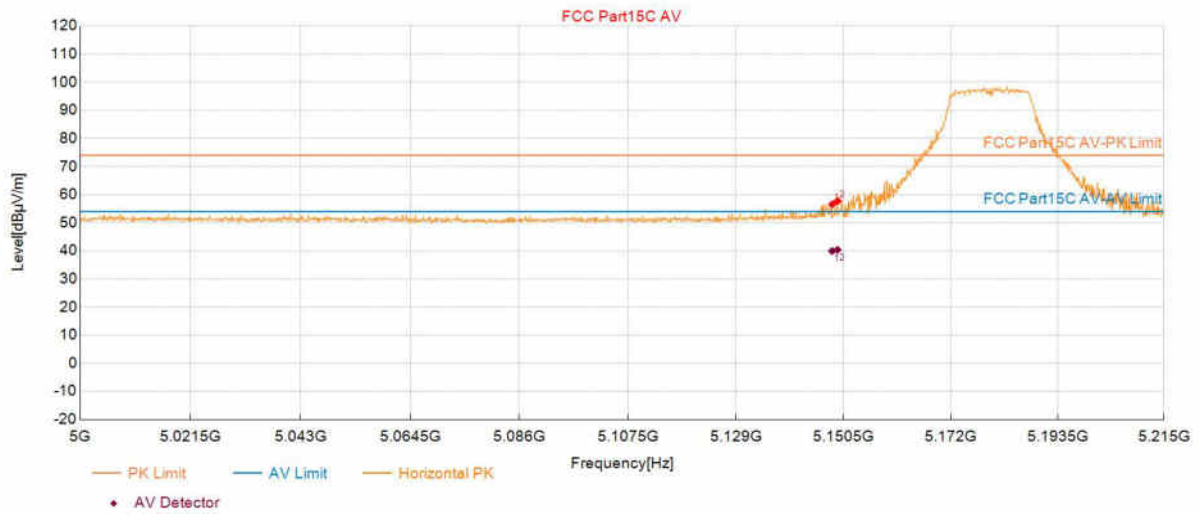

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.2091	56.54	17.80	74.00	17.46	150	296	Horizontal
2	5149.2846	57.74	17.80	74.00	16.26	150	241	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5148.2091	39.93	54.00	14.07	150	296	Horizontal
2	5149.2846	40.38	54.00	13.62	150	241	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5180	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:22:06

Test Graph

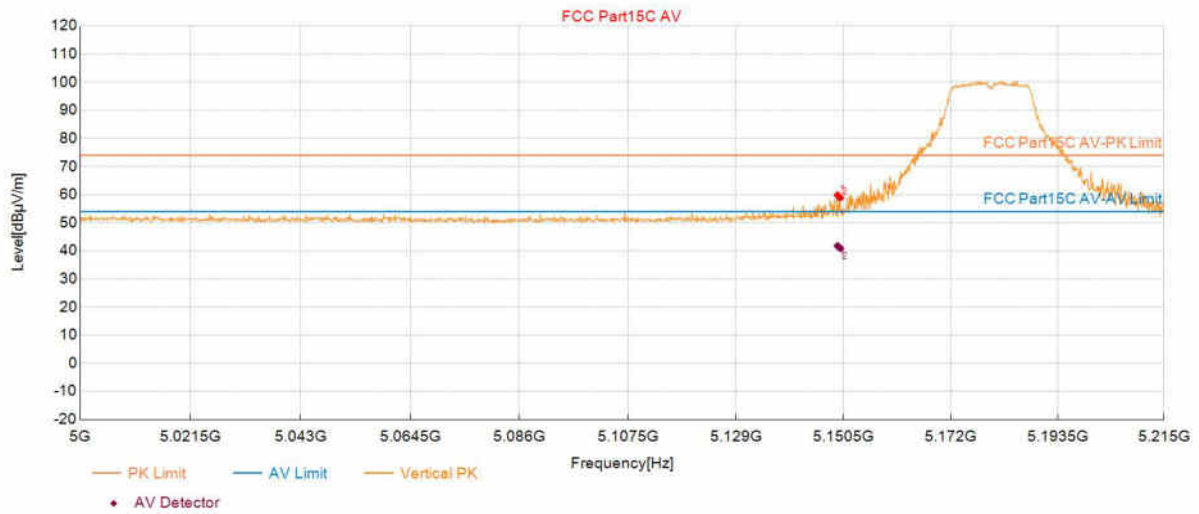

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.2846	59.84	17.80	74.00	14.16	150	288	Vertical
2	5149.8224	58.84	17.80	74.00	15.16	150	58	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.2846	41.78	54.00	12.22	150	288	Vertical
2	5149.8224	40.94	54.00	13.06	150	58	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:30:41

Test Graph

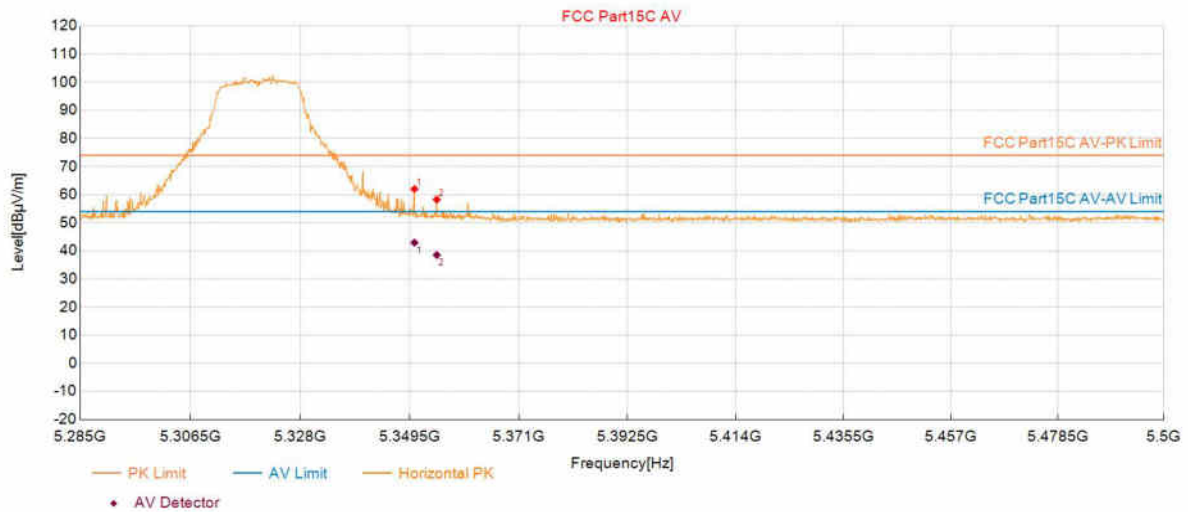

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.3927	62.01	18.34	74.00	11.99	150	100	Horizontal
2	5354.8024	58.25	18.36	74.00	15.75	150	85	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.3927	42.93	54.00	11.07	150	100	Horizontal
2	5354.8024	38.53	54.00	15.47	150	85	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:31:23

Test Graph

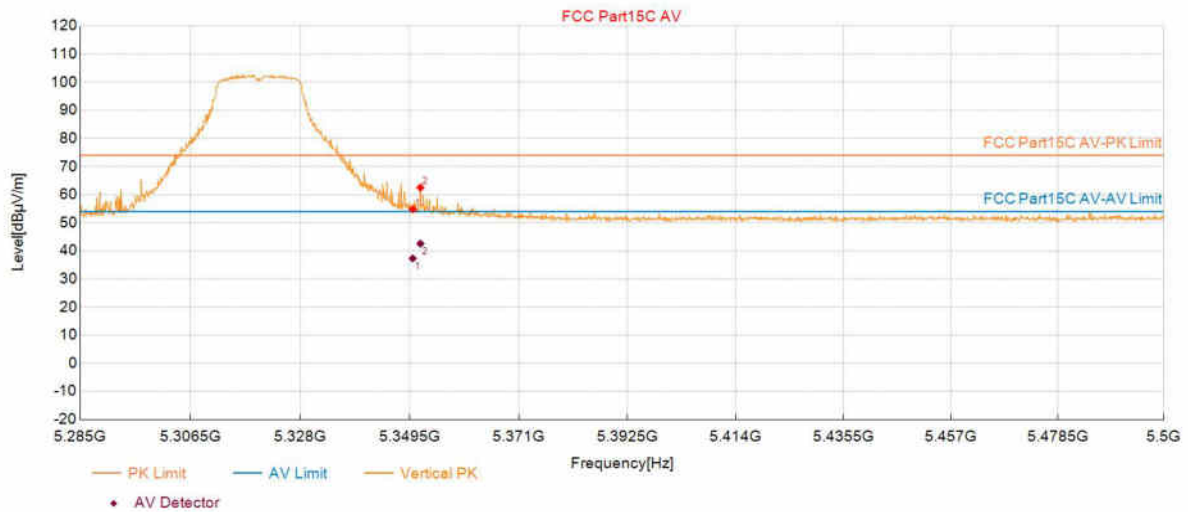

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	54.79	18.34	74.00	19.21	150	359	Vertical
2	5351.5758	62.51	18.34	74.00	11.49	150	4	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	37.30	54.00	16.70	150	359	Vertical
2	5351.5758	42.55	54.00	11.45	150	4	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:57:58

Test Graph

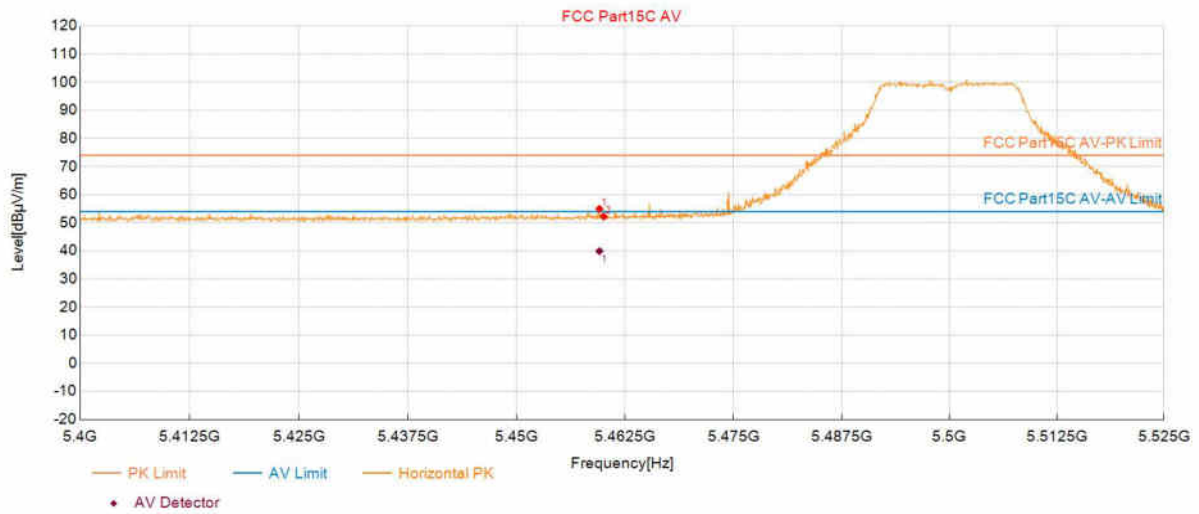

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.5298	54.94	18.72	74.00	19.06	150	305	Horizontal
2	5460.0300	52.21	18.72	74.00	21.79	150	305	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5459.5298	39.90	54.00	14.10	150	305	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 10:58:40

Test Graph

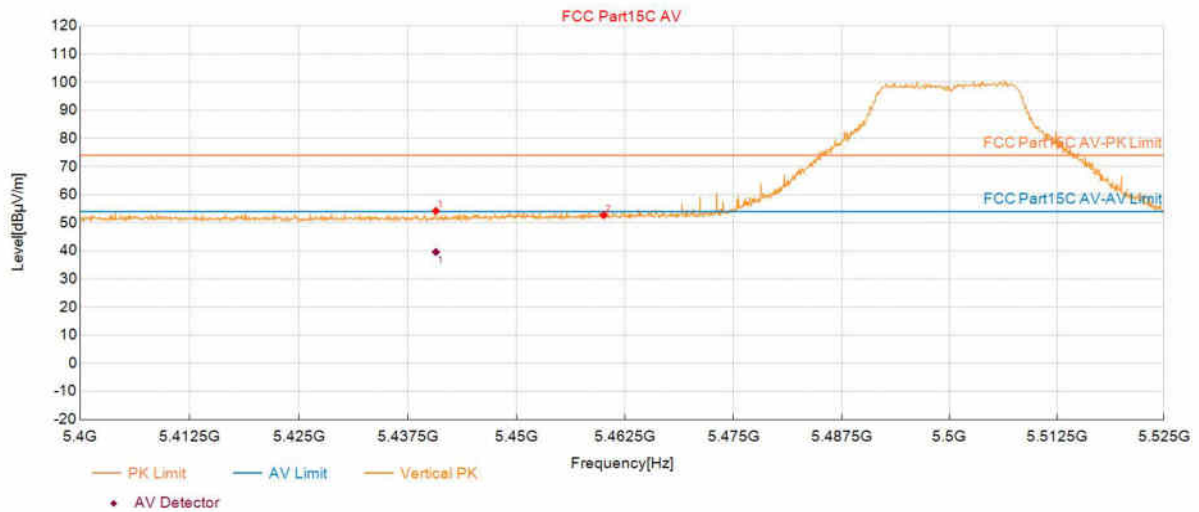

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.7079	54.19	18.69	74.00	19.81	150	109	Vertical
2	5460.0300	52.70	18.72	74.00	21.30	150	124	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5440.7079	39.58	54.00	14.42	150	109	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:03:31

Test Graph

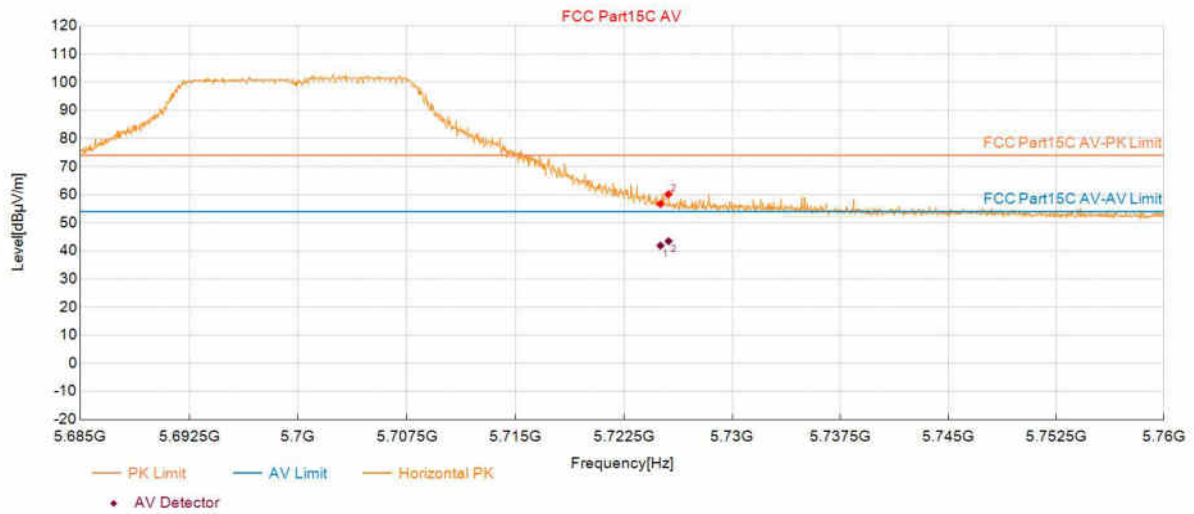

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	56.67	19.93	74.00	17.33	150	105	Horizontal
2	5725.5953	60.17	19.93	74.00	13.83	150	80	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	41.87	54.00	12.13	150	105	Horizontal
2	5725.5953	43.43	54.00	10.57	150	80	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11A_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 0 4 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:04:14

Test Graph

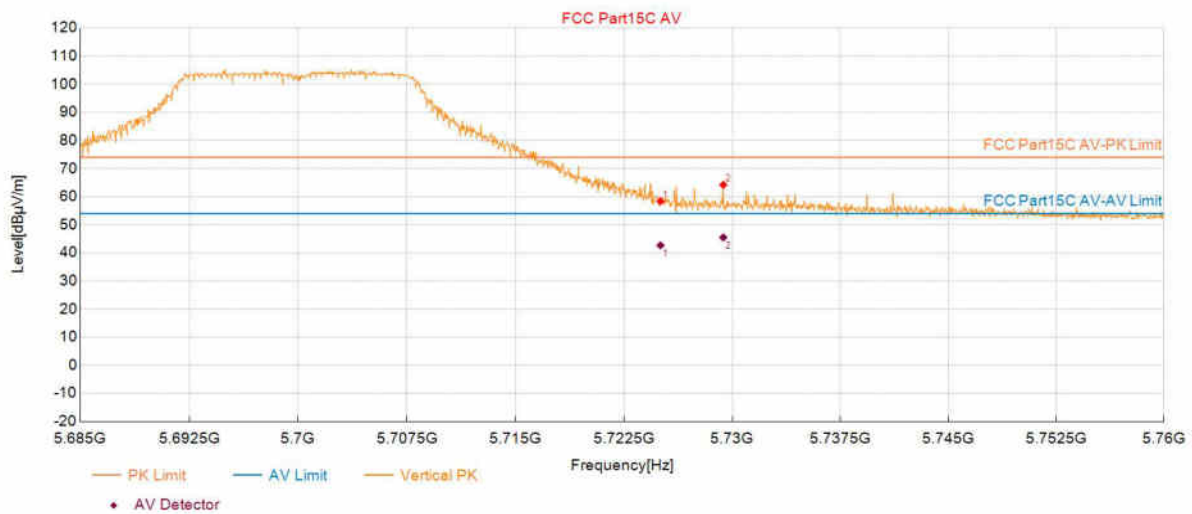

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	58.38	19.93	74.00	15.62	150	101	Vertical
2	5729.3847	64.22	19.95	74.00	9.78	150	116	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	42.67	54.00	11.33	150	101	Vertical
2	5729.3847	45.49	54.00	8.51	150	116	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5180	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:12:28

Test Graph

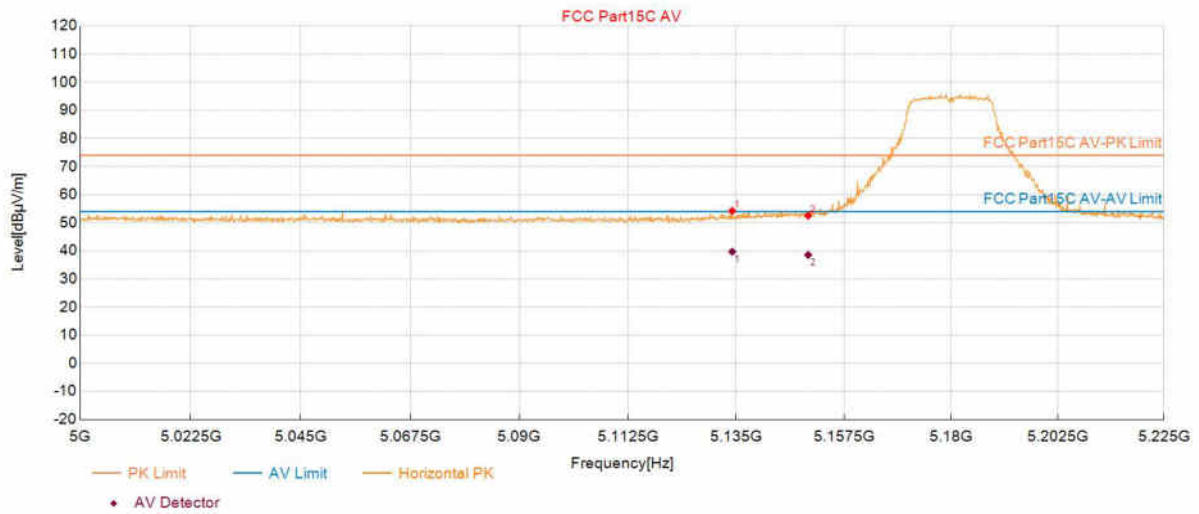

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5134.1671	54.19	17.81	74.00	19.81	150	22	Horizontal
2	5150.0375	52.51	17.79	74.00	21.49	150	301	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5134.1671	39.71	54.00	14.29	150	22	Horizontal
2	5150.0375	38.55	54.00	15.45	150	301	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5180	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:13:10

Test Graph

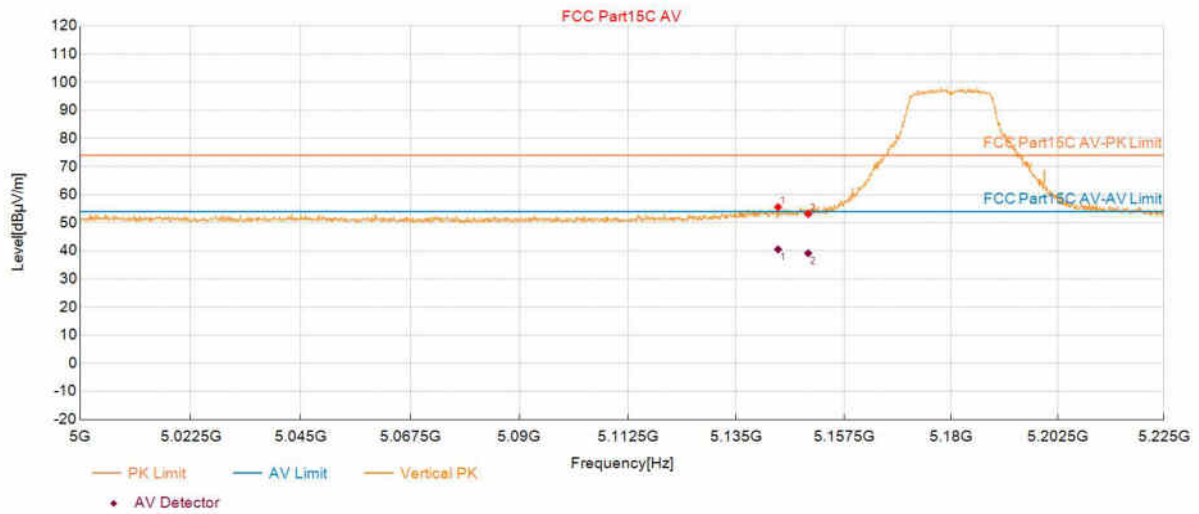

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.7344	55.55	17.79	74.00	18.45	150	276	Vertical
2	5150.0375	53.11	17.79	74.00	20.89	150	50	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.7344	40.53	54.00	13.47	150	276	Vertical
2	5150.0375	39.15	54.00	14.85	150	50	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:18:11

Test Graph

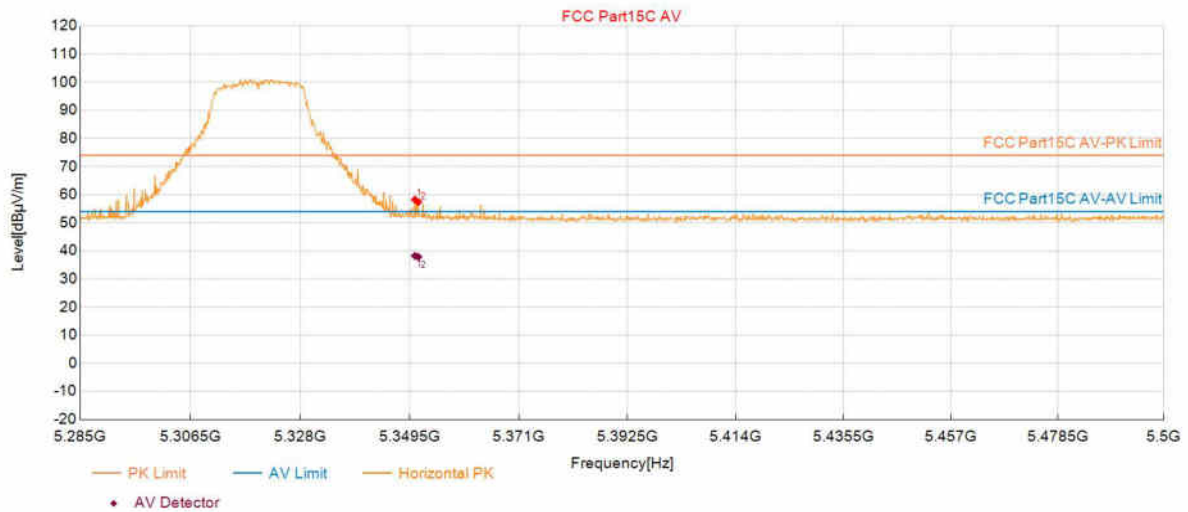

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.5003	58.22	18.34	74.00	15.78	150	82	Horizontal
2	5351.1456	57.37	18.34	74.00	16.63	150	218	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.5003	38.22	54.00	15.78	150	82	Horizontal
2	5351.1456	37.87	54.00	16.13	150	218	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5320	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:18:53

Test Graph

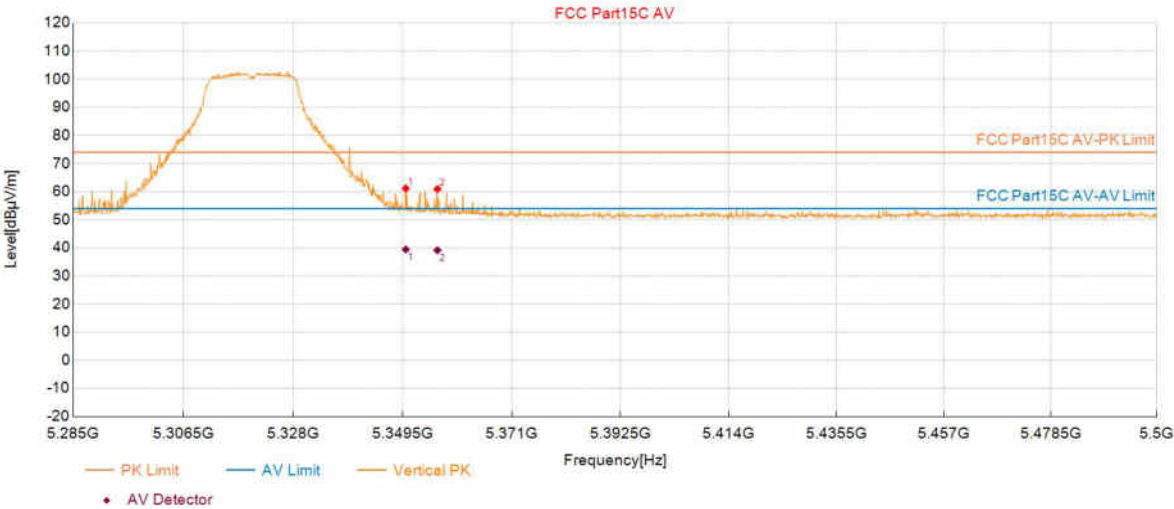

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	61.14	18.34	74.00	12.86	150	281	Vertical
2	5356.3082	60.93	18.37	74.00	13.07	150	8	Vertical


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	39.43	54.00	14.57	150	281	Vertical
2	5356.3082	39.12	54.00	14.88	150	8	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:23:56

Test Graph

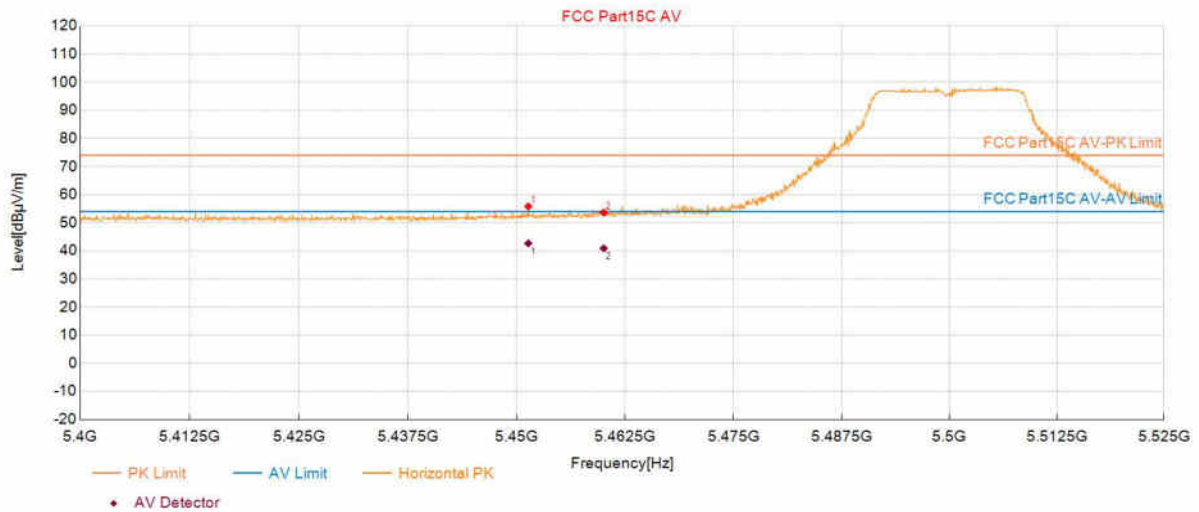

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5451.3382	55.81	18.71	74.00	18.19	150	302	Horizontal
2	5460.0300	53.59	18.72	74.00	20.41	150	306	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5451.3382	42.65	54.00	11.35	150	302	Horizontal
2	5460.0300	40.89	54.00	13.11	150	306	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5500	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:24:39

Test Graph

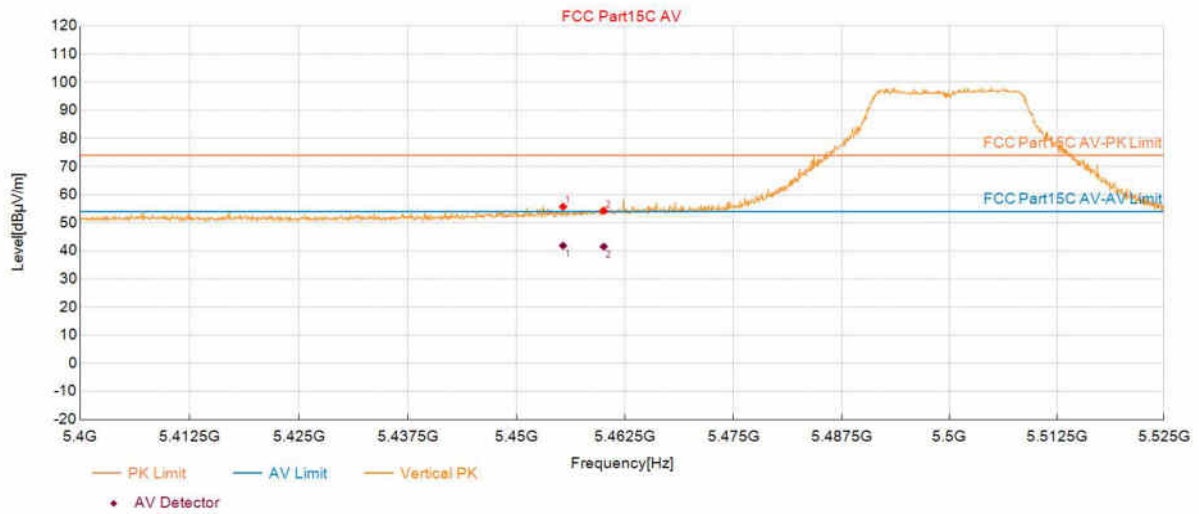

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.3402	55.70	18.72	74.00	18.30	150	117	Vertical
2	5460.0300	54.22	18.72	74.00	19.78	150	72	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.3402	41.83	54.00	12.17	150	117	Vertical
2	5460.0300	41.51	54.00	12.49	150	72	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:29:19

Test Graph

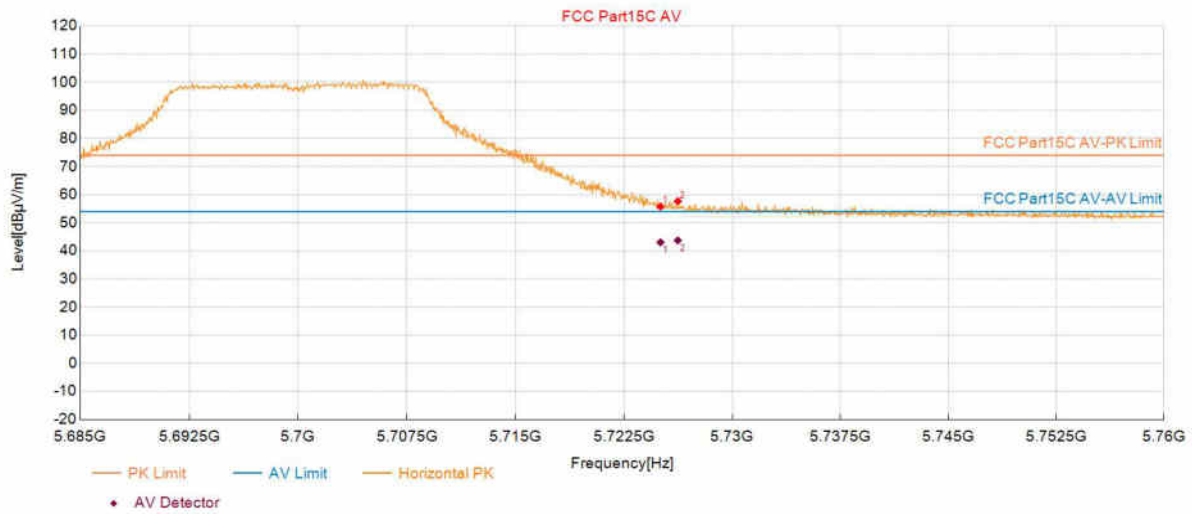

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	55.75	19.93	74.00	18.25	150	102	Horizontal
2	5726.2331	57.65	19.93	74.00	16.35	150	88	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	43.02	54.00	10.98	150	102	Horizontal
2	5726.2331	43.72	54.00	10.28	150	88	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N20_5700	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 11		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:30:02

Test Graph

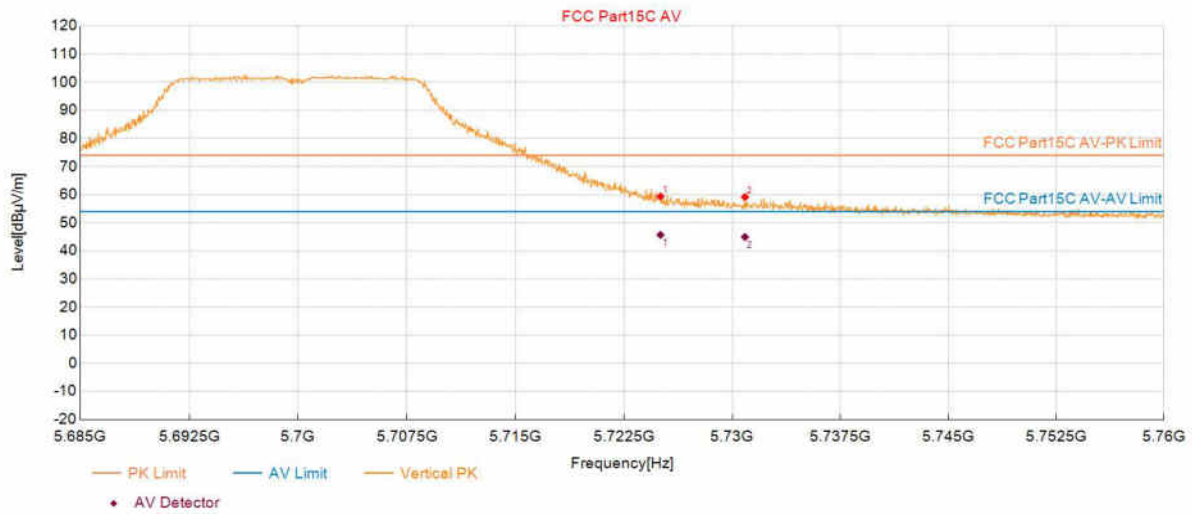

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	59.35	19.93	74.00	14.65	150	109	Vertical
2	5730.8854	59.12	19.95	74.00	14.88	150	116	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	45.67	54.00	8.33	150	109	Vertical
2	5730.8854	44.94	54.00	9.06	150	116	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5190	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 12		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:34:50

Test Graph

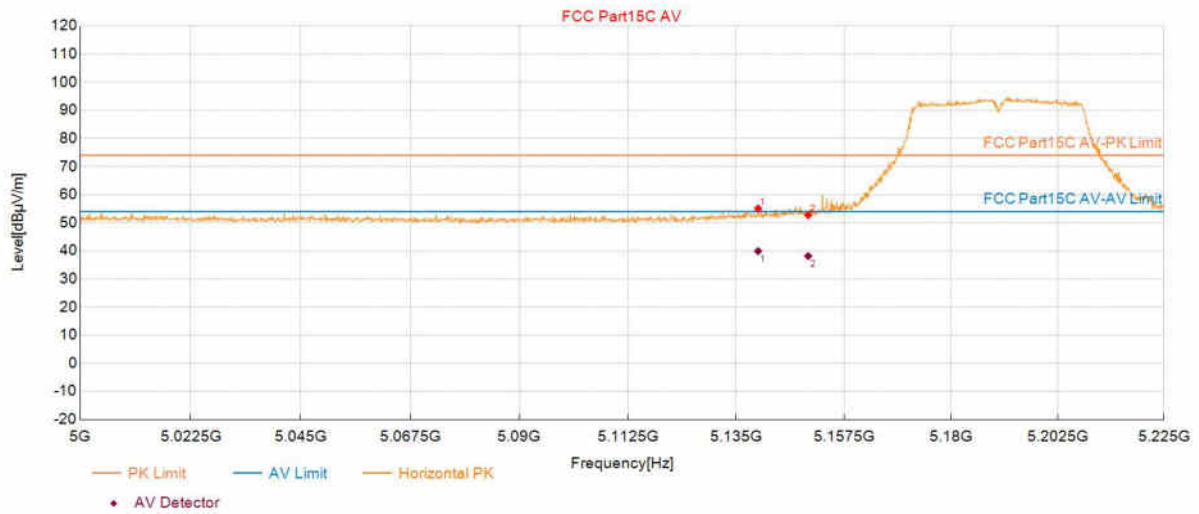

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5139.5698	55.08	17.80	74.00	18.92	150	19	Horizontal
2	5150.0375	52.70	17.79	74.00	21.30	150	237	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5139.5698	39.90	54.00	14.10	150	19	Horizontal
2	5150.0375	38.15	54.00	15.85	150	237	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5190	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 12		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:35:32

Test Graph

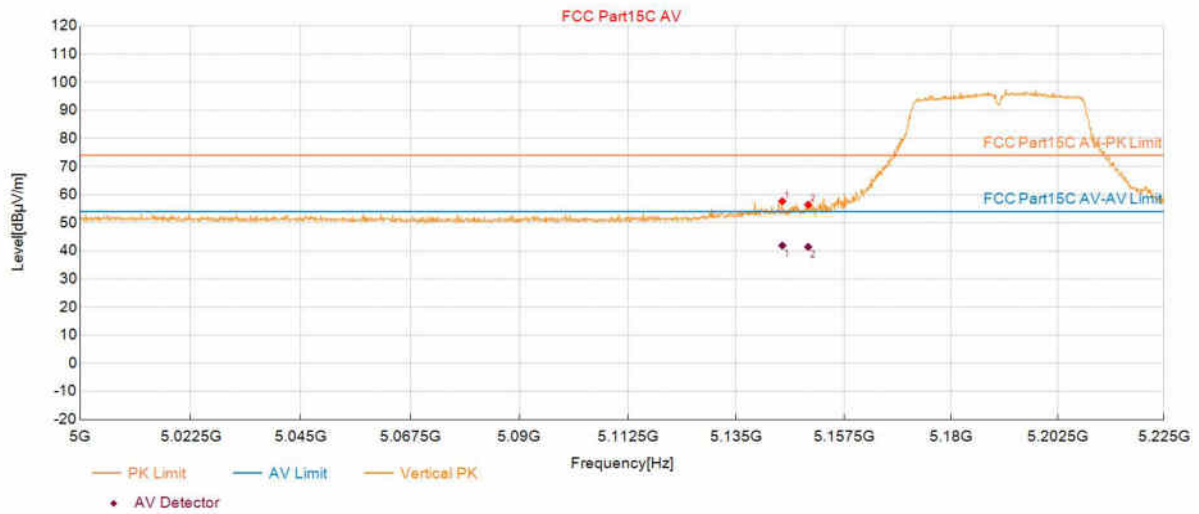

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.6348	57.62	17.80	74.00	16.38	150	0	Vertical
2	5150.0375	56.40	17.79	74.00	17.60	150	1	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.6348	41.86	54.00	12.14	150	0	Vertical
2	5150.0375	41.38	54.00	12.62	150	1	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5310	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:39:41

Test Graph

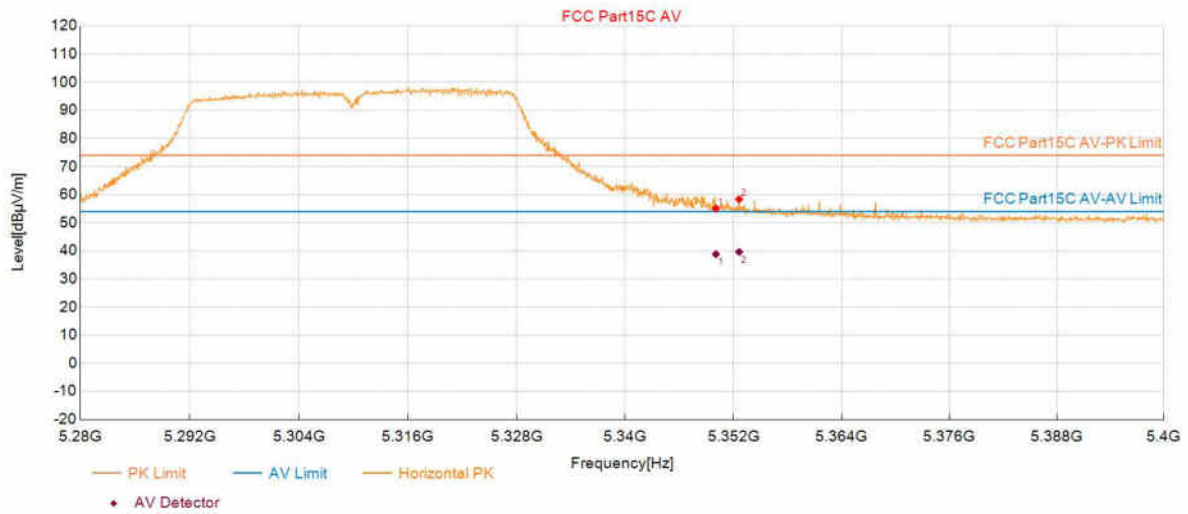

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	55.03	18.34	74.00	18.97	150	102	Horizontal
2	5352.6363	58.37	18.35	74.00	15.63	150	223	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	38.80	54.00	15.20	150	102	Horizontal
2	5352.6363	39.61	54.00	14.39	150	223	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5310	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 13		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:40:23

Test Graph

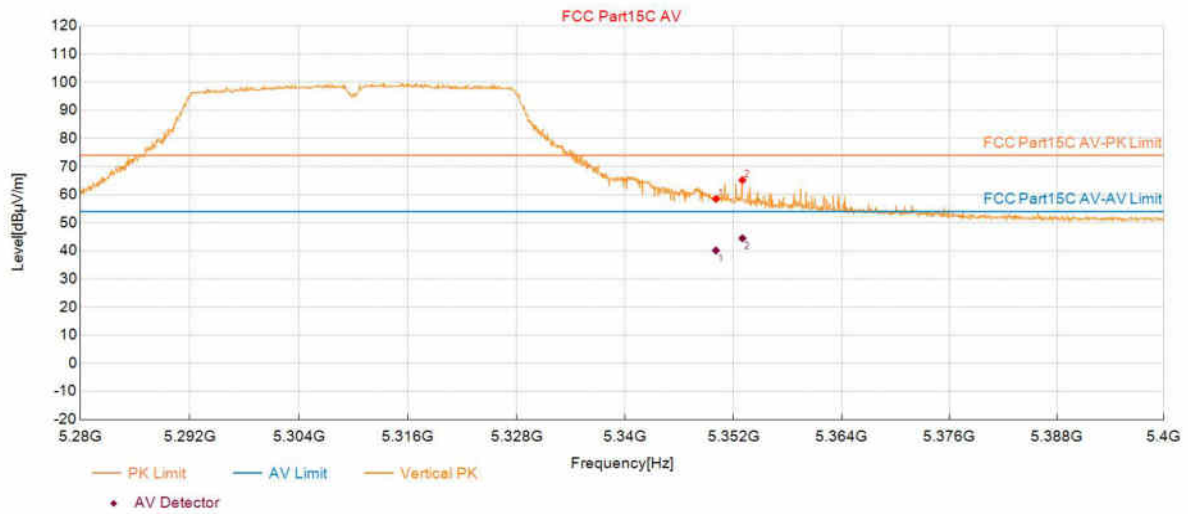

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	58.48	18.34	74.00	15.52	150	357	Vertical
2	5352.9965	65.15	18.35	74.00	8.85	150	11	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	40.14	54.00	13.86	150	357	Vertical
2	5352.9965	44.47	54.00	9.53	150	11	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5510	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 12		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:46:44

Test Graph

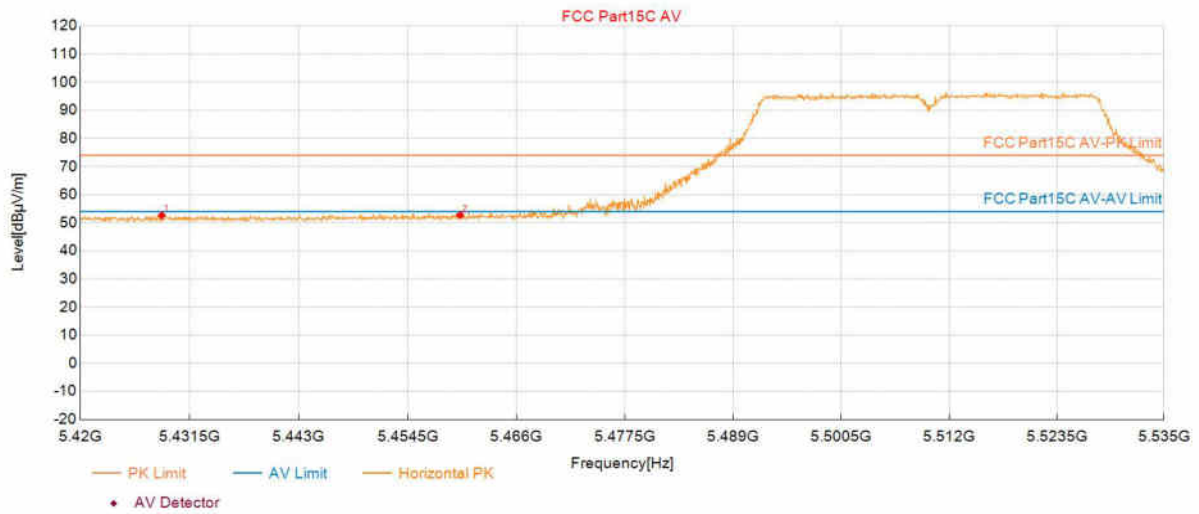

Suspected Data List


NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5428.5718	52.65	18.67	74.00	21.35	150	43	Horizontal
2	5460.0400	52.71	18.72	74.00	21.29	150	87	Horizontal

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5510	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 12		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:47:26

Test Graph

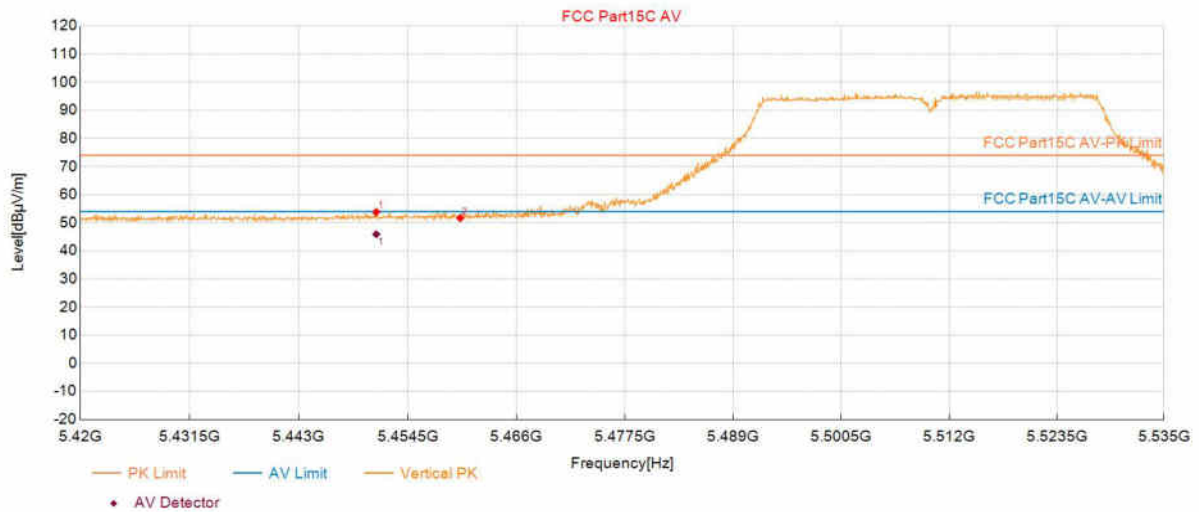

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5451.1806	53.80	18.71	74.00	20.20	150	0	Vertical
2	5460.0400	51.68	18.72	74.00	22.32	150	357	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5451.1806	45.90	54.00	8.10	150	0	Vertical

Test Report

Project Information			
Customer:			
EUT:	Smart Projector		
Model:	N2mini	SN:	
Mode:	11N40_5670	Voltage:	AC120V/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 12		
Test Standard: FCC Part15C AV			

Start of Test:2025-01-23 11:50:58

Test Graph

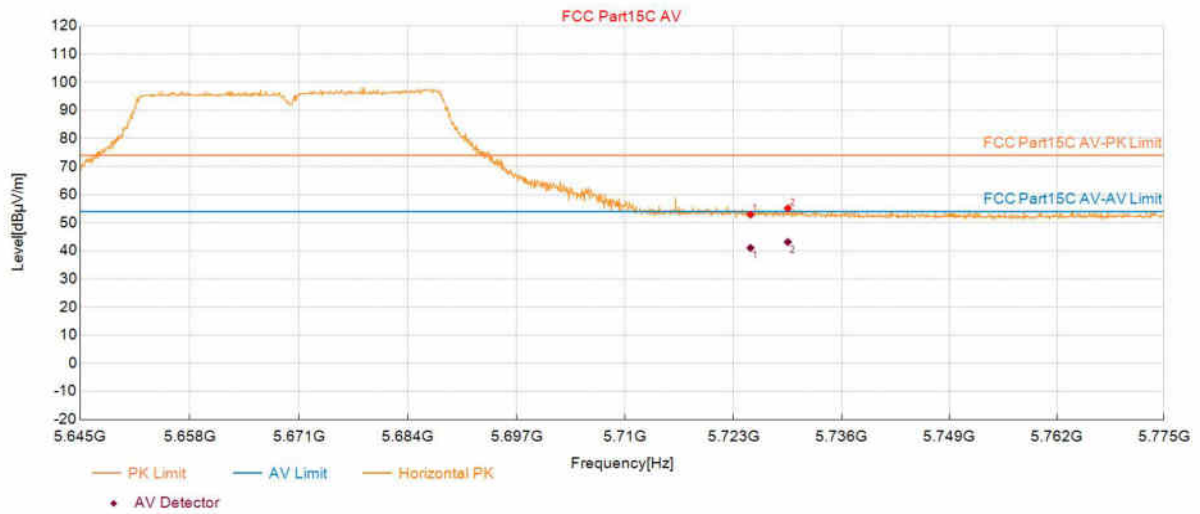

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	52.89	19.93	74.00	21.11	150	83	Horizontal
2	5729.5423	55.13	19.95	74.00	18.87	150	107	Horizontal

PK Final Data List

NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	41.04	54.00	12.96	150	83	Horizontal
2	5729.5423	43.13	54.00	10.87	150	107	Horizontal