

Test Report

Verified code: 018676

Report No.: E202212085403-02-1

Customer: Fiberhome Telecommunication Technologies Co., Ltd.

Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

Sample Name: Wireless Router

Sample Model: SR1021F

Receive Sample Date: Dec.10,2022

Test Date: Feb.16,2023 ~ Mar.15,2023

Reference Document: CFR 47, FCC Part 15 Subpart C
RADIO FREQUENCY DEVICES: Subpart C—Intentional Radiators

Test Result: Pass

Prepared by:

Lu Wei

Reviewed by:

Jiang Tao

Approved by:

Zhao Zetian



GRG METROLOGY & TEST GROUP CO., LTD.

Issued Date: 2023-03-21

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

----- The following blanks -----

Table of Contents

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT.....	7
2.1.	APPLICANT	7
2.2.	MANUFACTURER.....	7
2.3.	FACTORY	7
2.4.	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	7
2.5.	CHANNEL LIST	8
2.6.	TEST OPERATION MODE	8
2.7.	LOCAL SUPPORTIVE INSTRUMENTS.....	8
2.8.	CONFIGURATION OF SYSTEM UNDER TEST	9
2.9.	DUTY CYCLE.....	11
3.	LABORATORY AND ACCREDITATIONS AND MEASUREMENT UNCERTAINTY	13
3.1.	LABORATORY	13
3.2.	ACCREDITATIONS	13
3.3.	MEASUREMENT UNCERTAINTY	14
4.	LIST OF USED TEST EQUIPMENT AT GRGT	15
5.	CONDUCTED EMISSION MEASUREMENT	16
5.1.	LIMITS.....	16
5.2.	TEST PROCEDURES	16
5.3.	TEST SETUP	17
5.4.	DATA SAMPLE	17
5.5.	TEST RESULTS	18
6.	RADIATED SPURIOUS EMISSIONS	22
6.1.	LIMITS.....	22
6.2.	TEST PROCEDURES	22
6.3.	TEST SETUP	26
6.4.	DATA SAMPLE	27
6.5.	TEST RESULTS	28
7.	6DB BANDWIDTH.....	47
7.1.	LIMITS.....	47
7.2.	TEST PROCEDURES	47
7.3.	TEST SETUP	47
7.4.	TEST RESULTS	48
8.	MAXIMUM PEAK OUTPUT POWER	67
8.1.	LIMITS.....	67
8.2.	TEST PROCEDURES	67
8.3.	TEST SETUP	67
8.4.	TEST RESULT	68
9.	POWER SPECTRAL DENSITY	70
9.1.	LIMITS.....	70
9.2.	TEST PROCEDURES	70

9.3.	TEST SETUP	70
9.4.	TEST RESULTS	71
10.	CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS	91
10.1.	LIMITS.....	91
10.2.	TEST PROCEDURES	91
10.3.	TEST SETUP	91
10.4.	TEST RESULTS	92
11.	RESTRICTED BANDS OF OPERATION.....	136
11.1.	LIMITS.....	136
11.2.	TEST PROCEDURES	137
11.3.	TEST SETUP	137
11.4.	TEST RESULTS	138
APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM		162

----- The following blanks -----

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E202212085403-02-1	Original Issue	2023/03/21

----- The following blanks -----

1. TEST RESULT SUMMARY

Standard	Item	Limit / Severity	Result
CFR 47, FCC Part 15 Subpart C (§15.247)	Antenna Requirement	§15.203	PASS
	Conducted Emissions	§15.207 (a)	PASS
	Radiated Spurious Emission	§15.247(d) §15.205 §15.209	PASS
	6 dB Bandwidth	§15.247 (a)(2)	PASS
	Maximum Peak Output Power	§15.247(b)(3)	PASS
	Power Spectral Density	§15.247(e)	PASS
	Conducted band edges and Spurious Emission	§15.247(d)	PASS
	Restricted bands of operation	§15.205 §15.209 §15.247(d)	PASS

The EUT have two antennas. The antenna is internal antenna.

The max gain of antenna is 3.14dBi, which accordance 15.203 is considered sufficient to comply with the provisions of this section.

----- The following blanks -----

2. GENERAL DESCRIPTION OF EUT

2.1. APPLICANT

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

2.2. MANUFACTURER

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.88 Youkeyuan Road, Hongshan District, Wuhan,Hubei, China

2.3. FACTORY

Name: Fiberhome Telecommunication Technologies Co., Ltd.
Address: No.67,Chuangye Street,East Lake High-tech Development Zone,Wuhan City,Hubei Province,P.R.China

2.4. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Product Name: Wireless Router
Product Model: SR1021F
Adding Model: /
Trade Name: FiberHome
FCC ID: 2AV2N-SR1021F
Power Supply: DC12.0V power supplied by adapter
Adapter
Specification: Adapter1: KL-WA120100-D
Input:100-240V~50/60Hz 0.5A Max
Output:12V  1.0A
Adapter2: RD1201000-C55-35MGD
Input:100-240V~50/60Hz 0.6A Max
Output:12V  1A
Frequency Band: 2412MHz-2462MHz for 802.11b/g/n HT20/ax HE20
2422MHz-2452MHz: 802.11n HT40/ax HE40
Modulation Type: DSSS for 802.11b mode;
OFDM for 802.11g/n mode
OFDM , OFDMA for 802.11ax mode
Antenna
Specification: PCB Antenna 1 with 3.14dBi gain (Max)
PCB Antenna 2 with 3.14dBi gain (Max)
Temperature Range: -5℃~45℃
Hardware Version: /
Software Version: V1.0
Sample submitting way: ☒ Provided by customer ☐ Sampling
Sample No: E202212085403-02-0014,E202212085403-02-0015
Note: /

2.5. CHANNEL LIST

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n HT20, IEEE 802.11ax HE20							
CH03 – CH09 for IEEE 802.11n HT40, IEEE 802.11ax HE40,							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		


2.6. TEST OPERATION MODE

Mode No.	Description of the modes
1	2.4G Wi-Fi TX mode

2.7. LOCAL SUPPORTIVE INSTRUMENTS

ID	Name of Equipment	Manufacturer	Model	Serial Number	Note
A	Notebook	LENOVO	ZHAOYANG K4e-IML	LRX00A41	Provided by Lab
1	RJ45 LAN Cable	/	/	/	UnShielded,1.93m(for conducted test),accessory of EUT
2	RJ45 LAN Cable	/	/	/	UnShielded,10.0m(for radiated test),provided by Lab

----- The following blanks -----

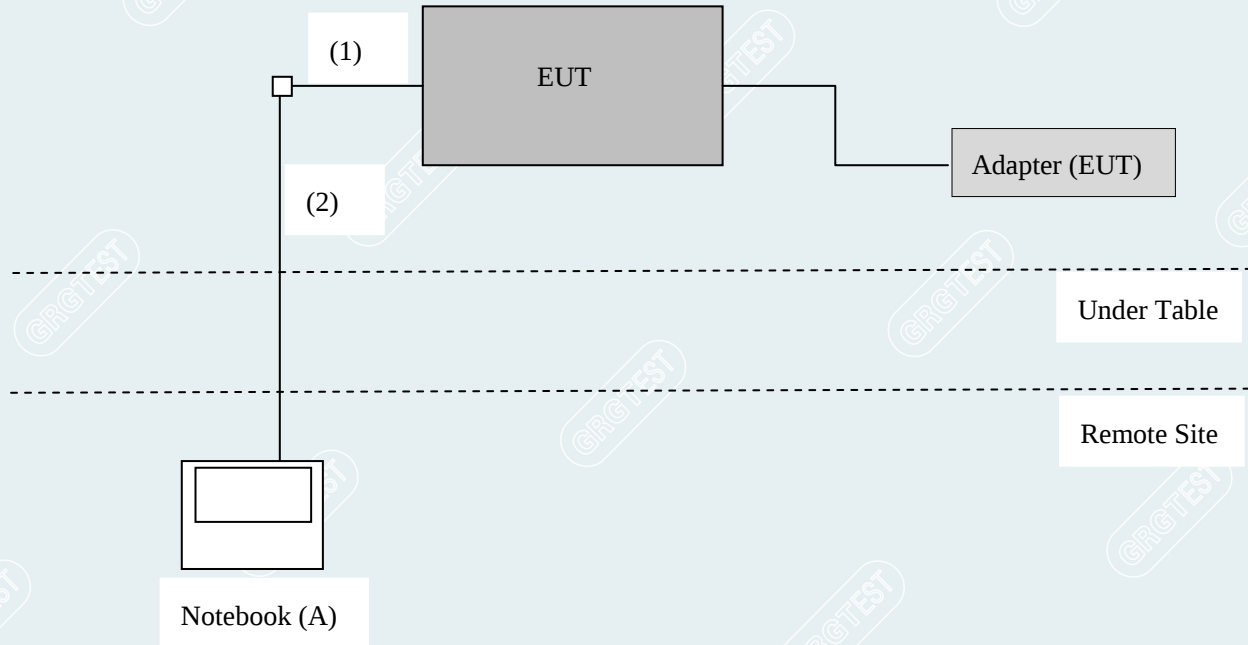2.8. CONFIGURATION OF SYSTEM UNDER TEST**Test software:**

Software version
QA Tool V0.0.6.00

----- The following blanks -----

Power Setting:

Mode	Date Rate	Frequency (MHz)	Power Setting
802.11b(SISO ant1 /ant2)	1M	2412	15
		2437	15
		2462	15
802.11g(SISO ant1 /ant2)	6M	2412	11
		2437	11
		2462	11
802.11n HT20(MIMO ant1&ant2)	MCS0	2412	7
		2437	7
		2462	7
802.11n HT40(MIMO ant1&ant2)	MCS0	2422	7
		2437	7
		2452	7
802.11ax HE20(MIMO ant1&ant2)	MCS0	2412	7
		2437	7
		2462	7
802.11ax HE40(MIMO ant1&ant2)	MCS0	2422	7
		2437	7
		2452	7

----- The following blanks -----


2.9. DUTY CYCLE

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	19.8℃/50%RH/101.1kPa	Test Voltage	AC120V/60Hz
Tested By	Yang Zhaoyun	Tested Date	2023/02/27

Test Mode	Antenna	Frequency (MHz)	Duty Cycle [%]	Correction Factor (dB)	1/T (kHz)
802.11b	Ant1	2437	99.34	0	0.12
802.11g	Ant1	2437	96.14	0.17	0.72
802.11n HT20	Ant1	2437	95.9	0.18	0.76
802.11n HT40	Ant1	2437	92.05	0.36	1.54
802.11ax HE20	Ant1	2437	84.78	0.72	3.21
802.11ax HE40	Ant1	2437	84.86	0.71	3.18

802.11b_Ant1_2437MHz


802.11g_Ant1_2437MHz

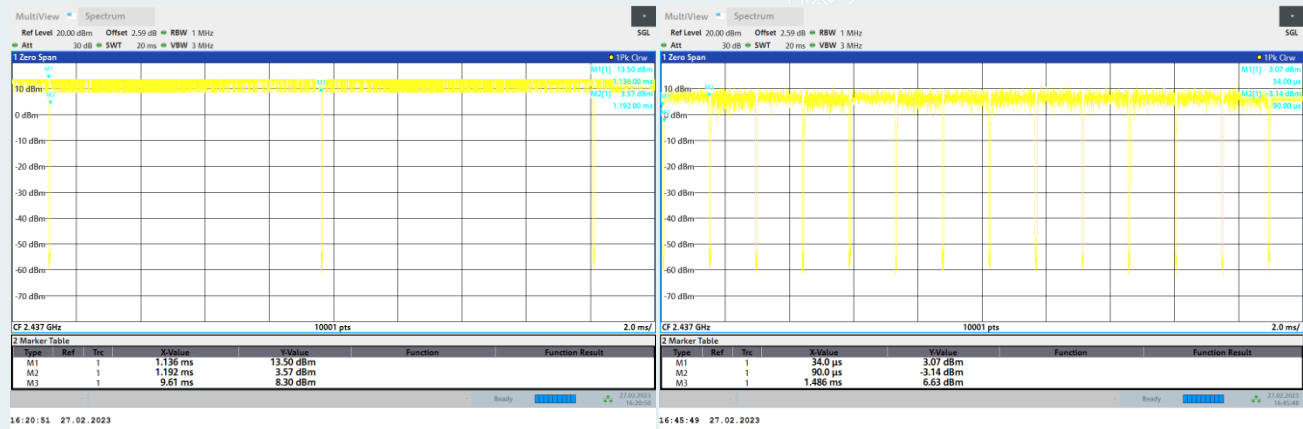

----- The following blanks -----


802.11n HT20_Ant1_2437MHz

802.11n HT40_Ant1_2437MHz

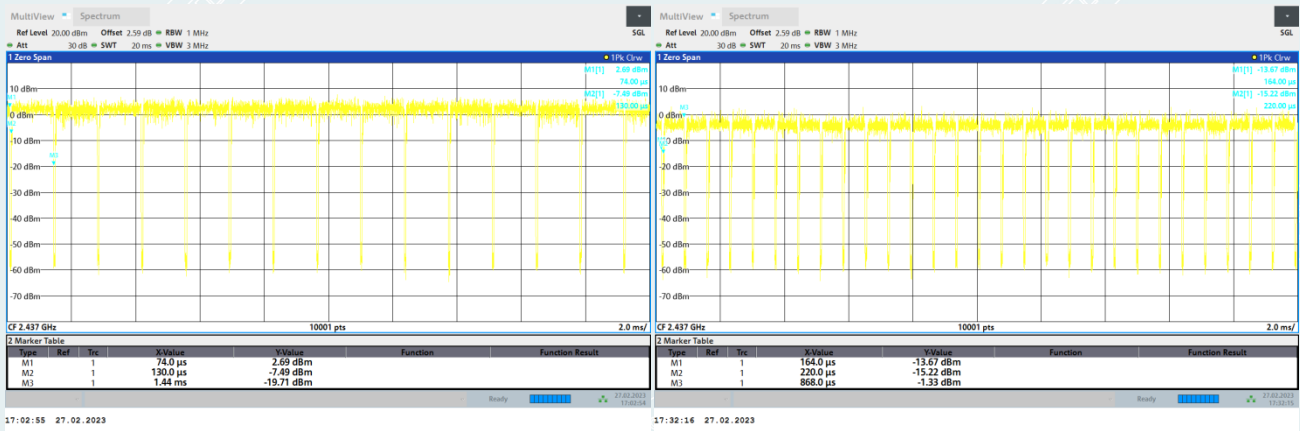

802.11ax HE20_Ant1_2437MHz

802.11ax HE40_Ant1_2437MHz

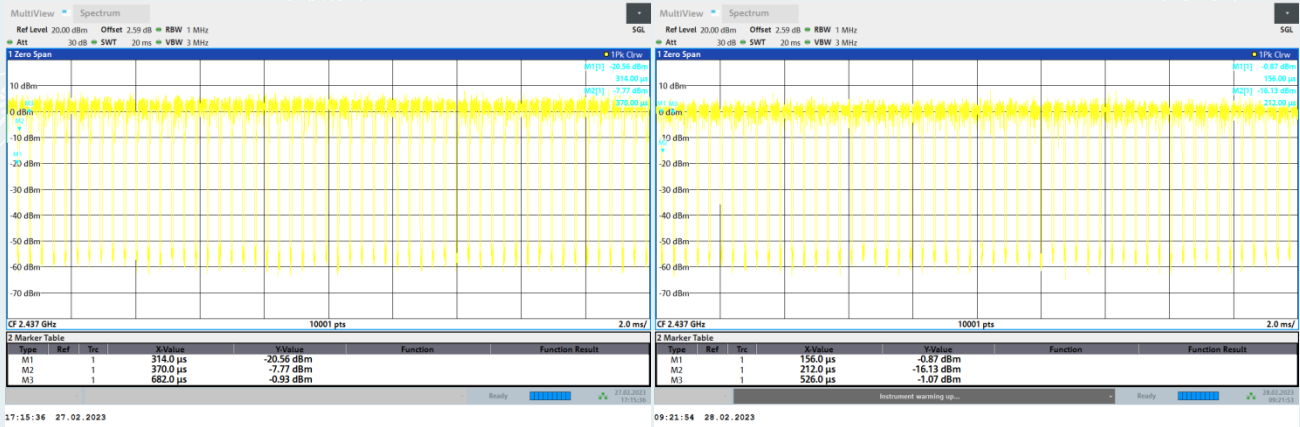

----- The following blanks -----

3. LABORATORY AND ACCREDITATIONS AND MEASUREMENT UNCERTAINTY

3.1. LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of GRG METROLOGY & TEST GROUP CO., LTD.

Add : No.1301 Guangang Road Xinlan Community, Guanlan Street, Longhua District
Shenzhen, 518110, People's Republic of China

P.C. : 518110

Tel : 0755-61180008

Fax : 0755-61180008

3.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.
USA A2LA(Certificate#:2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

----- The following blanks -----

3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	9kHz~30MHz	4.46dB
		30MHz~1000MHz	4.30dB
		1GHz~18GHz	5.60dB
		18GHz~26.5GHz	3.65dB
	Vertical	9kHz~30MHz	4.46dB
		30MHz~1000MHz	4.30dB
		1GHz~18GHz	5.60dB
		18GHz~26.5GHz	3.65dB
Conduction Emission		9 kHz ~ 150kHz	2.80dB
		150kHz ~ 10MHz	2.80dB
		10MHz ~ 30MHz	2.20dB

Measurement	Uncertainty
RF frequency	6.0×10^{-6}
RF power conducted	0.78 dB
Occupied channel bandwidth	0.4 dB
Unwanted emission, conducted	0.68 dB
Humidity	6 %
Temperature	2 °C

This uncertainty represents an expanded uncertainty factor of k=2.

----- The following blanks -----

4. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Conducted Emissions				
EMI Receiver	R&S	ESCI	100783	2023-08-28
LISN(EUT)	R&S	ENV216	101543	2023-09-13
Radiated Spurious Emission& Restricted bands of operation				
Test Receiver	R&S	ESR7	102444	2023-09-02
Preamplifier	EMEC	EM330	I00426	2024-02-06
Bi-log Antenna	Schwarzbeck	VULB9160	VULB9160-3401	2023-12-26
LoopAntenna	Schwarzbeck	FMZB 1513-60	1513-60-56	2023-08-06
Spectrum Analyzer	KEYSIGHT	N9010A	MY52221469	2023-06-29
Horn Antenna	Schwarzbeck	BBHA 9120D	02143	2023-10-15
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2023-10-14
Amplifier	Tonscend	TAP01018048	AP20E8060075	2023-05-05
Amplifier	Tonscend	TAP184050	AP20E806071	2023-05-05
Test S/W	Tonscend	JS36-RE/2.5.1.5		
6dB Bandwidth &Conducted band edges and Spurious Emission & Power Spectral Density				
Spectrum Analyzer	R&S	FSW43	102072	2023-09-02
Output Power				
Pulse power sensor	Agilent	MA2411B	1126150	2024-02-12
Power meter	Anritsu	ML2495A	1204003	2024-02-12

Note: The calibration interval of the above test instruments is 12 months.

5. CONDUCTED EMISSION MEASUREMENT

5.1. LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz ~ 0.5MHz	66~56	56~46
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150 kHz to 0.5MHz.

5.2. TEST PROCEDURES

Procedure of Preliminary Test

Test procedures follow ANSI C63.10:2013.

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). A EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

– Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:

- 1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or
- 2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;

– All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;

– The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;

– Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.

– I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.


– Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.

The test mode(s) described in Item 2.6 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.6 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.3. TEST SETUP

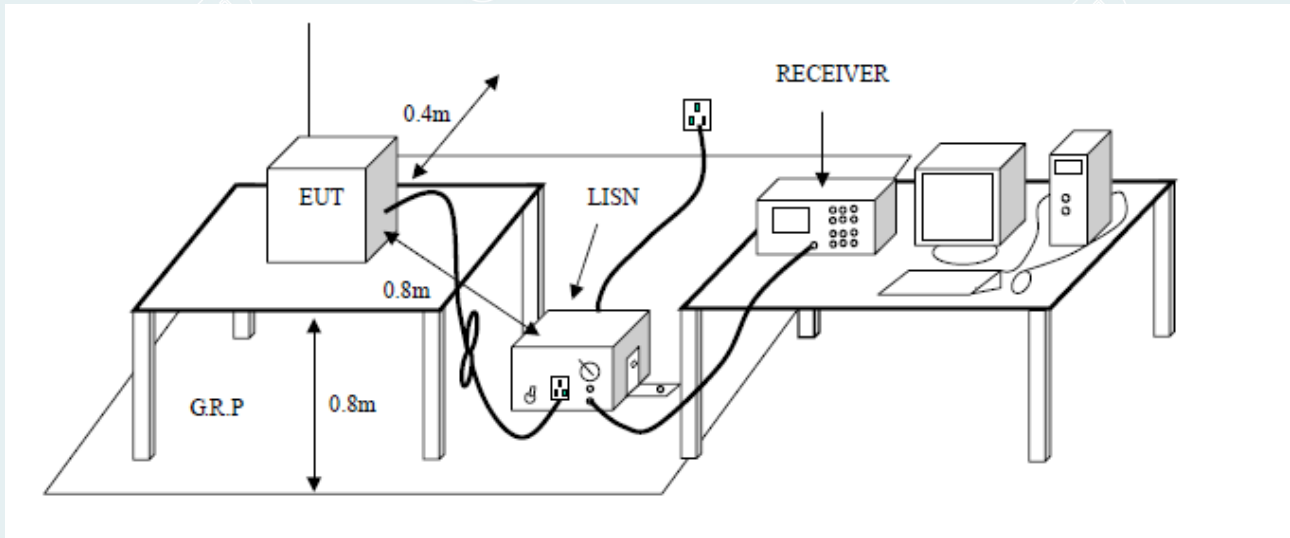

5.4. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass


- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)

----- The following blanks -----

5.5. TEST RESULTS


All models were pretested and only the worst modes and channels were recorded in this report. (IEEE 802.11b 2412MHz ant1)

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	23.9°C/47%RH/101.1kPa	Test Mode	Mode 1
Tested By	Wang Xinyuan	Line	L
Tested Date	2023/2/16	Test Voltage	AC120V/60Hz
Remark	Adapter1: KL-WA120100-D		

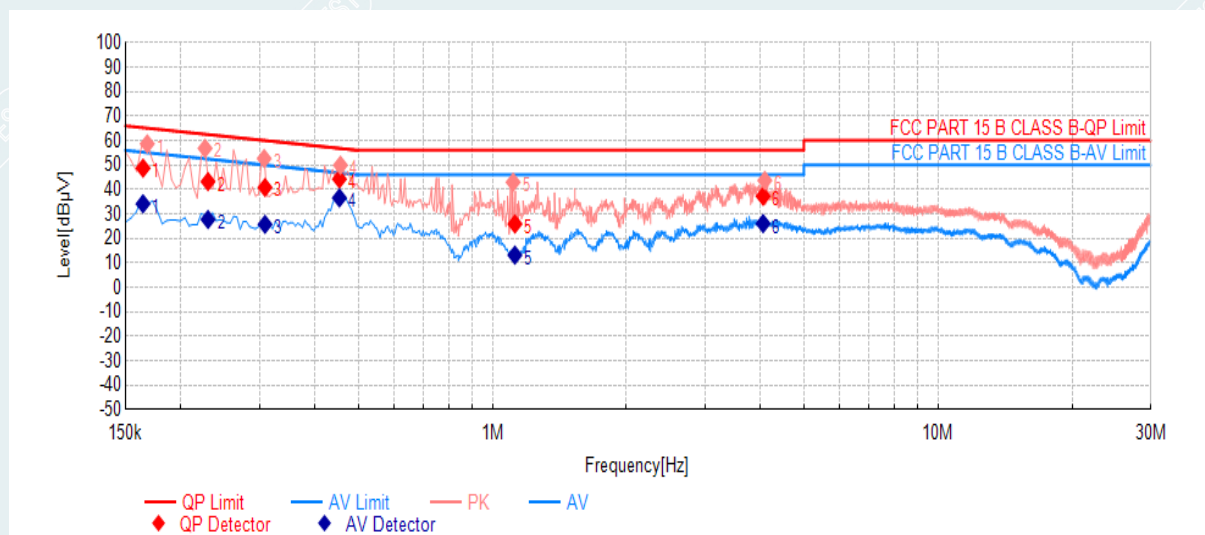


No.	Frequency	QP result	QP limit	QP margin	AV result	AV limit	AV margin	Remark
	[MHz]	[dBμV]	[dBμV]	[dB]	[dBμV]	[dBμV]	[dB]	
1	0.1644	48.72	65.24	16.52	34.15	55.24	21.09	PASS
2	0.2300	43.23	62.45	19.22	27.72	52.45	24.73	PASS
3	0.3088	40.82	60.00	19.18	25.73	50.00	24.27	PASS
4	0.4537	44.26	56.81	12.55	36.55	46.81	10.26	PASS
5	1.1236	25.90	56.00	30.10	13.19	46.00	32.81	PASS
6	4.0518	37.22	56.00	18.78	26.07	46.00	19.93	PASS

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	23.9℃/47%RH /101.1kPa	Test Mode	Mode 1
Tested By	Wang Xinyuan	Line	N
Tested Date	2023/2/16	Test Voltage	AC120V/60Hz
Remark	Adapter1: KL-WA120100-D		

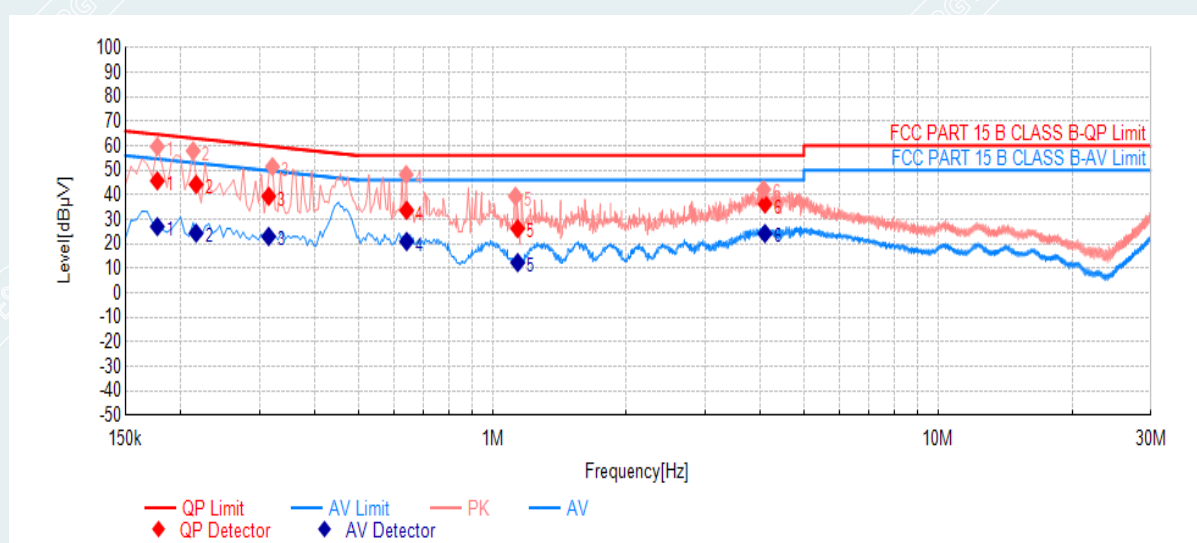


No.	Frequency	QP result	QP limit	QP margin	AV result	AV limit	AV margin	Remark
	[MHz]	[dBμV]	[dBμV]	[dB]	[dBμV]	[dBμV]	[dB]	
1	0.1770	45.70	64.63	18.93	27.03	54.63	27.60	PASS
2	0.2163	44.25	62.96	18.71	24.36	52.96	28.60	PASS
3	0.3148	39.42	59.84	20.42	23.00	49.84	26.84	PASS
4	0.6421	33.64	56.00	22.36	20.96	46.00	25.04	PASS
5	1.1397	26.18	56.00	29.82	12.36	46.00	33.64	PASS
6	4.0910	36.21	56.00	19.79	24.22	46.00	21.78	PASS

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	23.9℃/47%RH /101.1kPa	Test Mode	Mode 1
Tested By	Wang Xinyuan	Line	L
Tested Date	2023/2/16	Test Voltage	AC120V/60Hz
Remark	Adapter2: RD1201000-C55-35MGD		

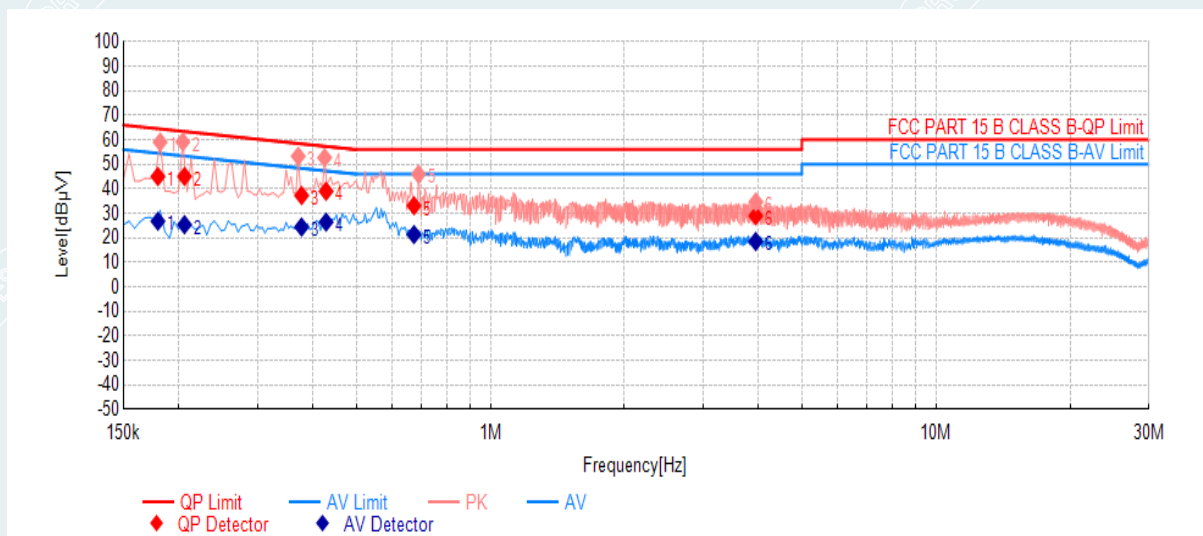

No.	Frequency	QP result	QP limit	QP margin	AV result	AV limit	AV margin	Remark
	[MHz]	[dBμV]	[dBμV]	[dB]	[dBμV]	[dBμV]	[dB]	
1	0.1794	45.01	64.51	19.50	26.79	54.51	27.72	PASS
2	0.2058	45.08	63.37	18.29	25.36	53.37	28.01	PASS
3	0.3769	37.27	58.35	21.08	24.41	48.35	23.94	PASS
4	0.4278	38.99	57.30	18.31	26.44	47.30	20.86	PASS
5	0.6738	33.11	56.00	22.89	21.35	46.00	24.65	PASS
6	3.9399	28.99	56.00	27.01	18.52	46.00	27.48	PASS

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	23.9℃/47%RH /101.1kPa	Test Mode	Mode 1
Tested By	Wang Xinyuan	Line	N
Tested Date	2023/2/16	Test Voltage	AC120V/60Hz
Remark	Adapter2: RD1201000-C55-35MGD		

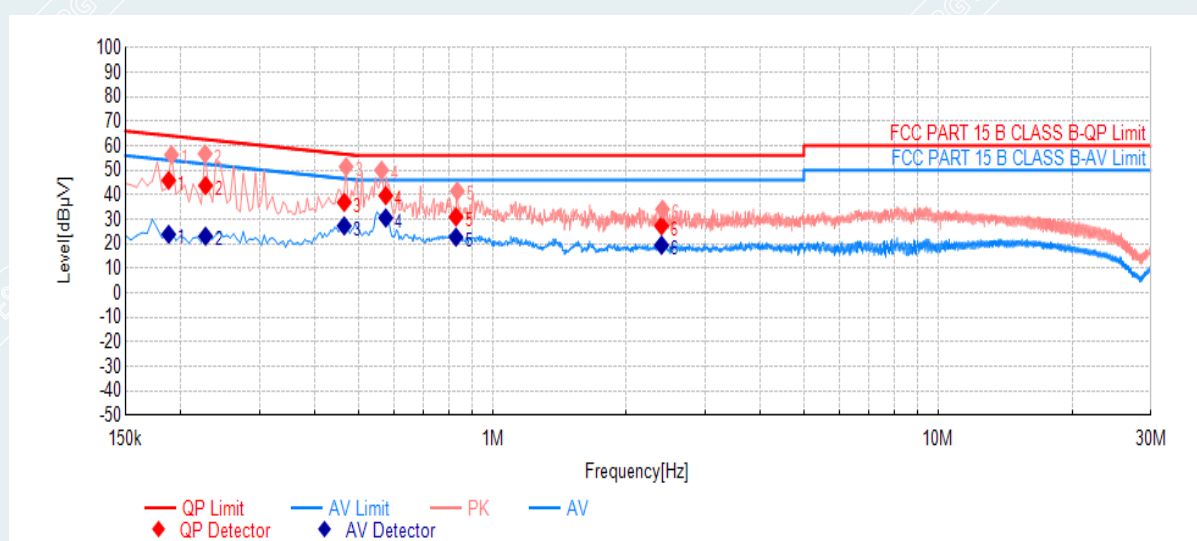

No.	Frequency	QP result	QP limit	QP margin	AV result	AV limit	AV margin	Remark
	[MHz]	[dBμV]	[dBμV]	[dB]	[dBμV]	[dBμV]	[dB]	
1	0.1877	45.88	64.14	18.26	23.89	54.14	30.25	PASS
2	0.2271	43.77	62.55	18.78	23.11	52.55	29.44	PASS
3	0.4650	36.92	56.60	19.68	27.33	46.60	19.27	PASS
4	0.5764	39.69	56.00	16.31	30.56	46.00	15.44	PASS
5	0.8285	30.96	56.00	25.04	22.73	46.00	23.27	PASS
6	2.3969	27.33	56.00	28.67	19.46	46.00	26.54	PASS

6. RADIATED SPURIOUS EMISSIONS

6.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak(dB $\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30 ~ 88	100	3	40
88~216	150	3	43.5
216 ~ 960	200	3	46
Above 960	500	3	54

NOTE:

- (1) The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.
- (2) The lower limit shall apply at the transition frequencies.
- (3) Above 18GHz test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dB $\mu\text{V/m}$).
The Avg Limit=54+20*log(3/1)=63.54 (dB $\mu\text{V/m}$).

6.2. TEST PROCEDURES

1) Sequence of testing 9kHz to 30MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 °to 360 °.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30MHz to 1GHz**Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.

--- The EUT is placed on a desktop position in the center of the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0 ° to 360 °.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 4 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of pre-measurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre-measurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1GHz to 18GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 °to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable rotates from 0 °to 360 °and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the pre-measurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre-measurement and the limit will be stored.

NOTE:

(a).The frequency from 9KHz to 150KHz, Set RBW=300Hz(for Peak&AVG), VBW=300Hz(for Peak&AVG).
the frequency from 150KHz to 30MHz, Set RBW=9KHz, VBW=9KHz, (for QP Detector).

(b).The frequency from 30MHz to 1GHz, Set RBW=120KHz, VBW=300KHz, (for QP Detector).

(c). The frequency above 1000MHz, set the RBW=1MHz, VBW=3MHz for PK Detector.

(d). The frequency above 1000MHz, The AVG value measurement is based on duty cycle. If the EUT is configured to transmit with duty cycle $\geq 98\%$, set RBW=1MHz, $VBW \leq RBW/100$ (i.e., 10kHz) but not less than 10 Hz; If the EUT duty cycle is $< 98\%$, set RBW=1MHz, $VBW \geq 1/T$, Where T is defined in section 2.9.

----- The following blanks -----

6.3. TEST SETUP

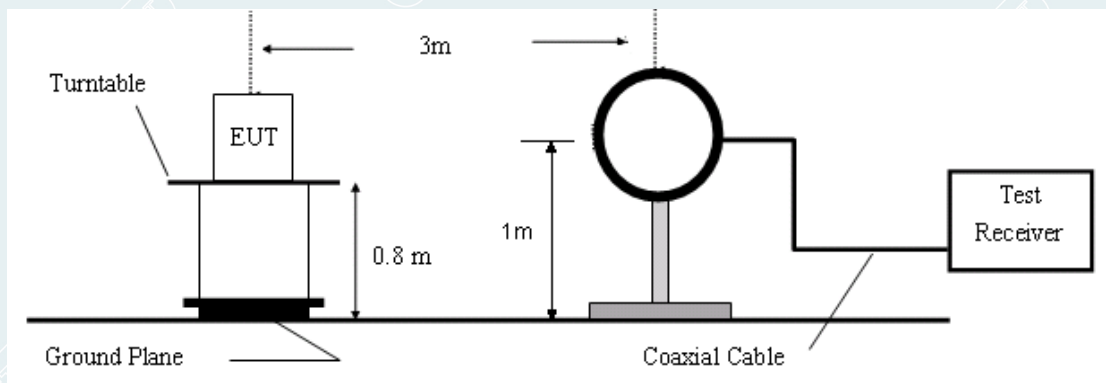


Figure 1. 9 kHz to 30MHz radiated emissions test configuration

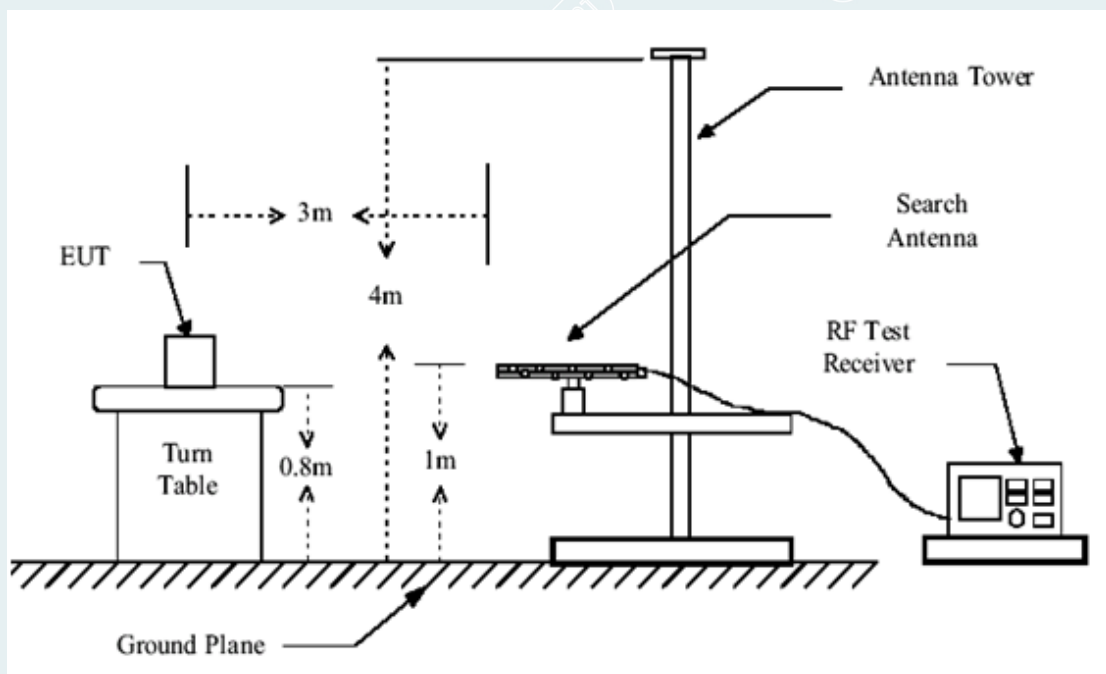


Figure 2. 30MHz to 1GHz radiated emissions test configuration

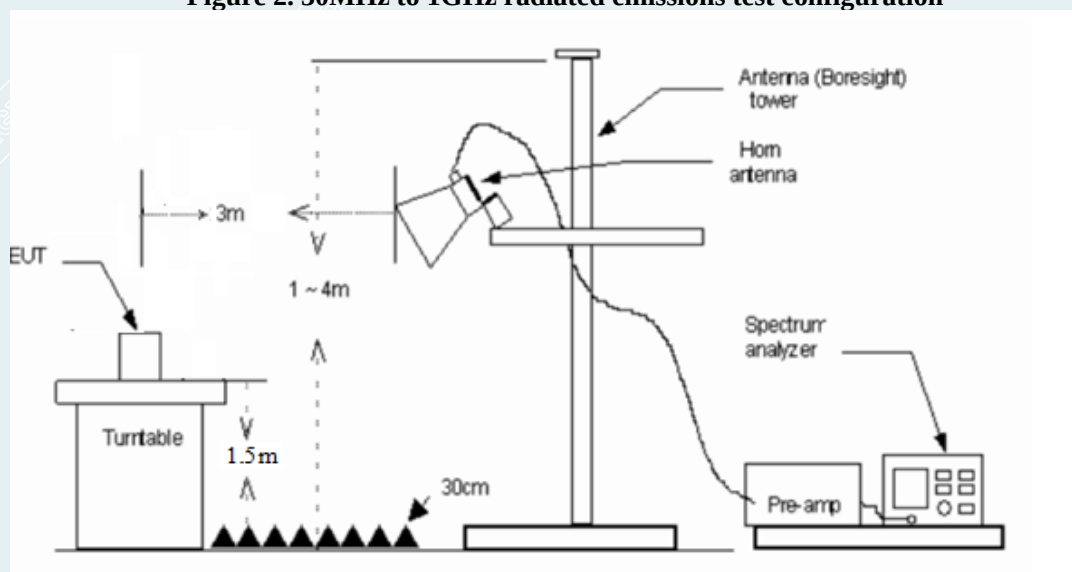


Figure 3. 1GH to 18GHz radiated emissions test configuration

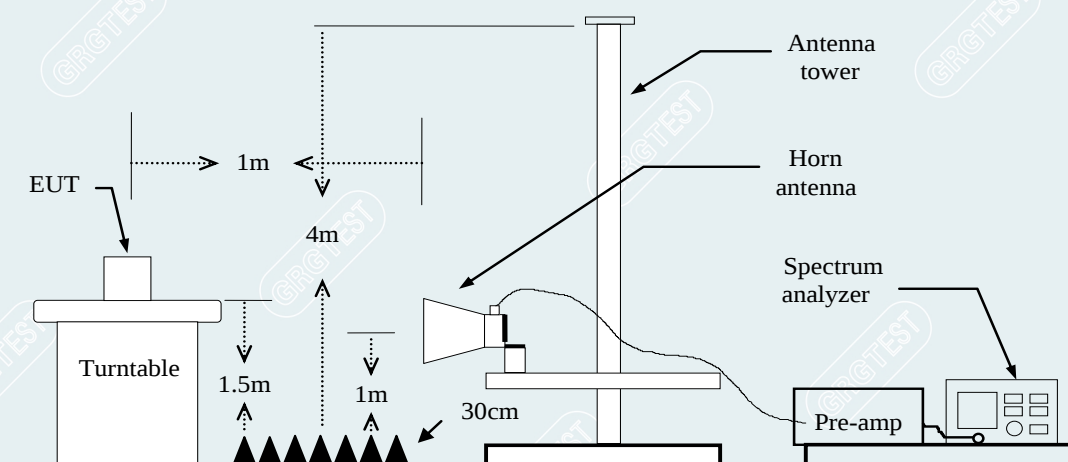


Figure 4. 18GHz to 26.5GHz radiated emissions test configuration

6.4. DATA SAMPLE

30MHz to 1GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

Above 1GHz-18GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Above 18GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	68.86	57.66	-11.20	83.54	25.88	peak	Vertical
xxx	xxx	68.89	-11.20	57.69	63.54	5.85	AVG	Vertical

Frequency (MHz) = Emission frequency in MHz

Ant.Pol. (H/V) = Antenna polarization

Reading (dBuV) = Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Remark Result (dBuV/m) – Limit (dBuV/m)

Peak = Peak Reading

QP = Quasi-peak Reading


AVG = Average Reading

6.5. TEST RESULTS

Below 1GHz


All models were pretested and only the worst modes and channels were recorded in this report. (IEEE 802.11b 2412MHz ant1)

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	18.5°C/45%RH/101.1kPa	Test Voltage	AC120V/60Hz
Test Mode	IEEE 802.11b ant 1 (2412MHz)	Polarity	Vertical
Tested By	Zhang Zishan	Tested Date	2023-02-16
Note	Adapter1: KL-WA120100-D		

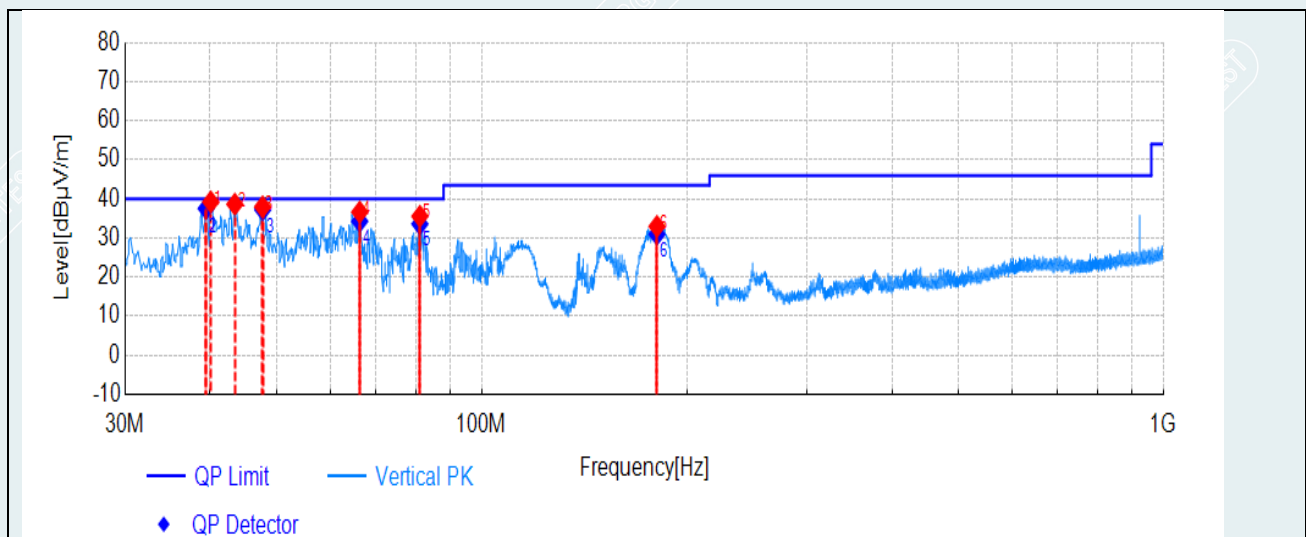


NO.	Freq. [MHz]	QP Reading[dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	39.466	23.39	14.15	37.54	40.00	2.46	Vertical
2	39.489	22.50	14.65	37.15	40.00	2.85	Vertical
3	47.78	21.97	15.29	37.26	40.00	2.74	Vertical
4	66.278	21.25	13.04	34.29	40.00	5.71	Vertical
5	81.216	22.73	10.85	33.58	40.00	6.42	Vertical
6	180.835	17.65	13.33	30.98	43.50	12.52	Vertical

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	18.5°C/45%RH/101.1kPa	Test Voltage	AC120V/60Hz
Test Mode	IEEE 802.11b ant 1(2412MHz)	Polarity	Horizontal
Tested By	Zhang Zishan	Tested Date	2023-02-16
Note	Adapter1: KL-WA120100-D		

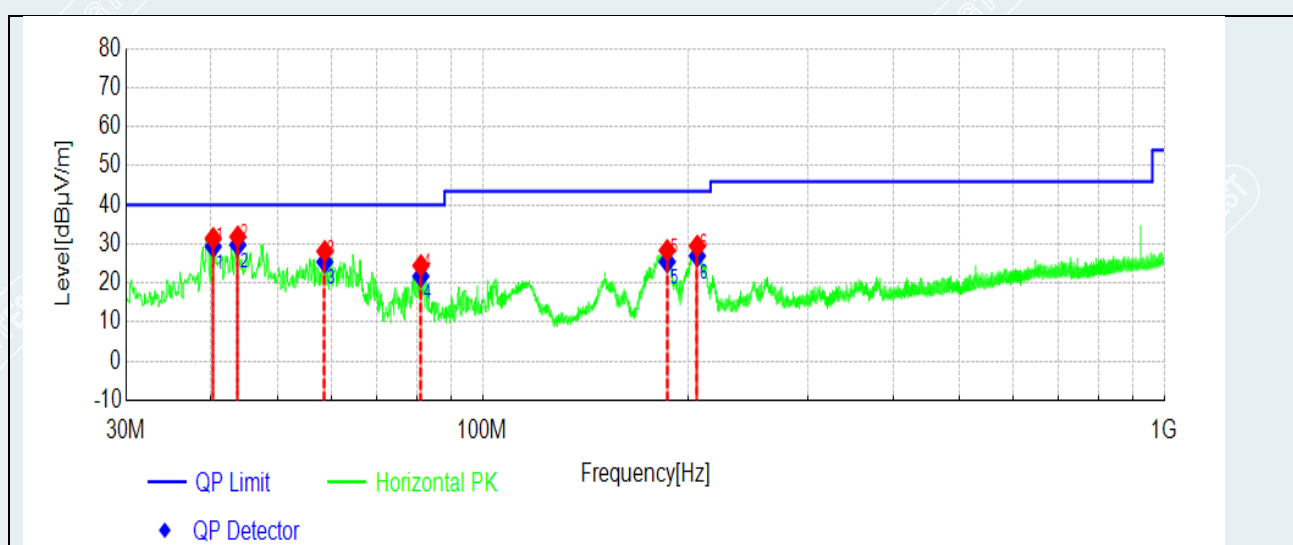


NO.	Freq. [MHz]	QP Reading[dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	40.282	15.18	14.18	29.36	40.00	10.64	Horizontal
2	43.774	15.1	14.69	29.79	40.00	10.21	Horizontal
3	58.712	9.49	15.92	25.41	40.00	14.59	Horizontal
4	81.216	10.9	10.85	21.75	40.00	18.25	Horizontal
5	186.558	12	13.46	25.46	43.50	18.04	Horizontal
6	206.54	13.09	13.86	26.95	43.50	16.55	Horizontal

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	18.5°C/45%RH/101.1kPa	Test Voltage	AC120V/60Hz
Test Mode	IEEE 802.11b ant 1 (2412MHz)	Polarity	Vertical
Tested By	Zhang Zishan	Tested Date	2023-02-16
Note	Adapter2: RD1201000-C55-35MGD		

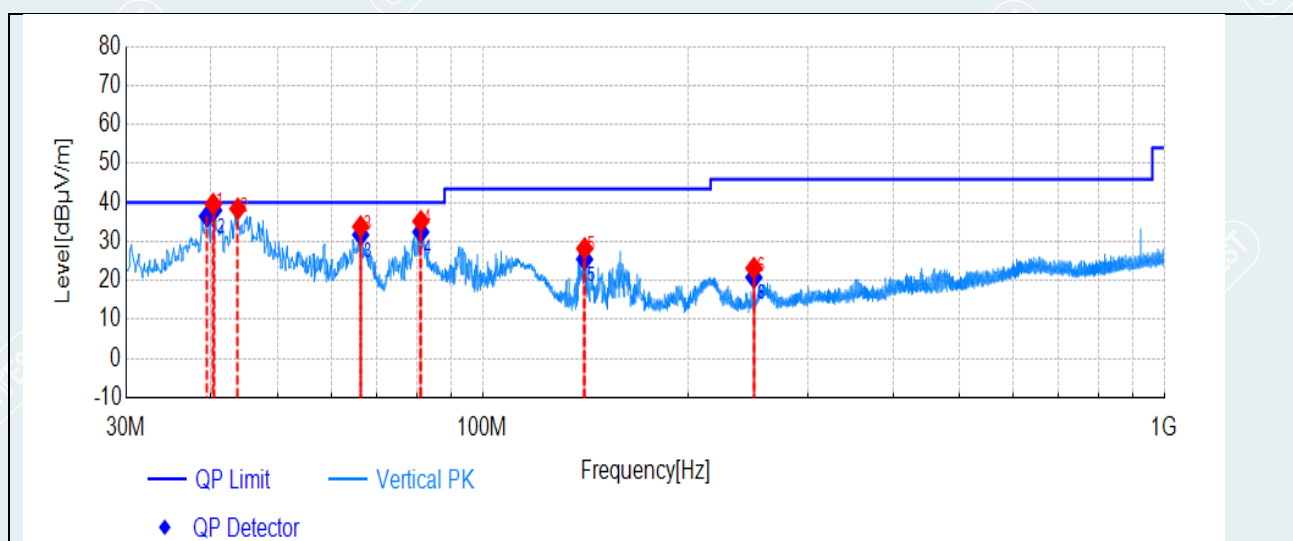

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	39.486	22.33	14.18	36.51	40.00	3.49	Vertical
2	40.344	23.31	14.69	38.00	40.00	2.00	Vertical
3	66.278	18.68	13.04	31.72	40.00	8.28	Vertical
4	81.216	21.6	10.85	32.45	40.00	7.55	Vertical
5	141.162	12.85	12.61	25.46	43.50	18.04	Vertical
6	249.996	5.68	15.11	20.79	46.00	25.21	Vertical

EUT Name	Wireless Router	Model	SR1021F
Environmental Conditions	18.5°C/45%RH/101.1kPa	Test Voltage	AC120V/60Hz
Test Mode	IEEE 802.11b ant 1(2412MHz)	Polarity	Horizontal
Tested By	Zhang Zishan	Tested Date	2023-02-16
Note	Adapter2: RD1201000-C55-35MGD		

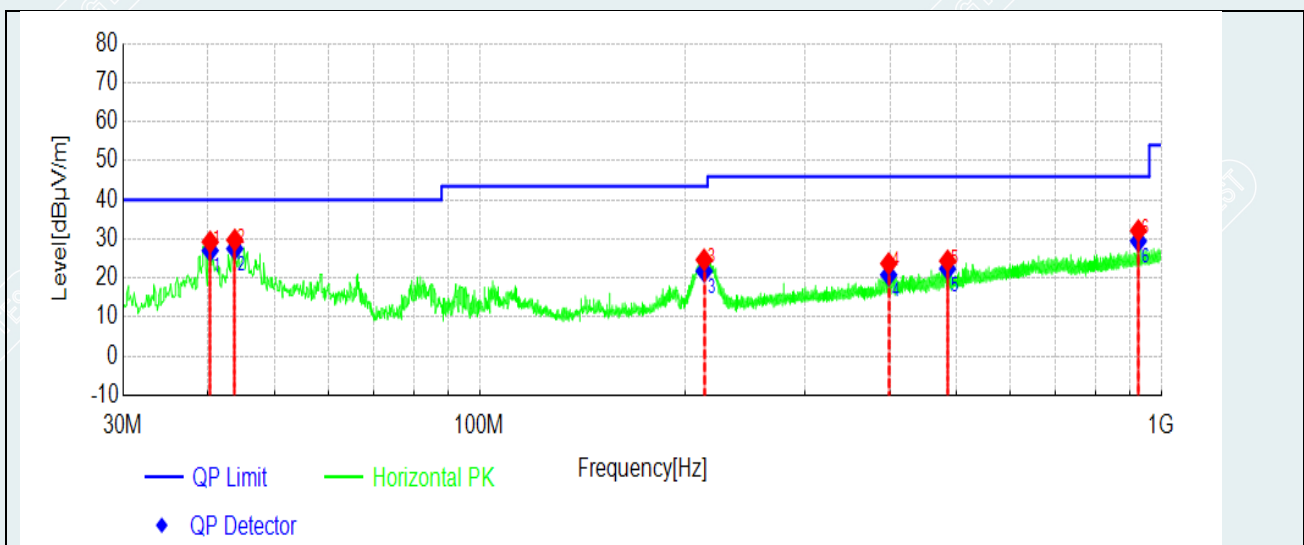

NO.	Freq. [MHz]	QP Reading[dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	40.282	12.83	14.18	27.01	40.00	12.99	Horizontal
2	43.774	12.81	14.69	27.50	40.00	12.50	Horizontal
3	213.524	7.72	14.06	21.78	43.50	21.72	Horizontal
4	398.115	2.91	17.91	20.82	46.00	25.18	Horizontal
5	485.803	2.79	19.57	22.36	46.00	23.64	Horizontal
6	925.019	3.68	25.79	29.47	46.00	16.53	Horizontal

Remark:

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

1GHz-18GHz:

Mode: IEEE 802.11b ant1worse

Lowest Frequency (2412MHz)

Environment: 18.9°C/47%RH /101.1kPa

Tested By: Zhang Zishan

Date: 2023-02-17

Voltage: AC120V/60Hz

/

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1500	58.66	-19.50	39.16	74.00	34.84	Horizontal
2	2102	60.58	-20.25	40.33	74.00	33.67	Horizontal
3	3082.5	58.92	-15.28	43.64	74.00	30.36	Horizontal
4	4192.5	58.89	-12.36	46.53	74.00	27.47	Horizontal
5	7237.5	59.12	-2.94	56.18	74.00	17.82	Horizontal
6	14550	55.42	7.83	63.25	74.00	10.75	Horizontal

AV Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1512	47.50	-19.47	28.03	54.00	25.97	Horizontal
2	2098	48.91	-20.26	28.65	54.00	25.35	Horizontal
3	3127.5	46.92	-15.23	31.69	54.00	22.31	Horizontal
4	4237.5	47.22	-12.22	35.00	54.00	19.00	Horizontal
5	7237.5	50.66	-2.94	47.72	54.00	6.28	Horizontal
6	14550	44.39	7.83	52.22	54.00	1.78	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1580	59.06	-19.29	39.77	74.00	34.23	Vertical
2	2124	60.13	-20.19	39.94	74.00	34.06	Vertical
3	3015	59.18	-15.34	43.84	74.00	30.16	Vertical
4	5595	57.27	-7.51	49.76	74.00	24.24	Vertical
5	8055	56.09	-0.59	55.50	74.00	18.50	Vertical
6	13125	53.64	5.55	59.19	74.00	14.81	Vertical

AV Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1568	47.72	-19.32	28.40	54.00	25.60	Vertical
2	2096	49.02	-20.29	28.73	54.00	25.27	Vertical
3	3015	47.13	-15.34	31.79	54.00	22.21	Vertical
4	5550	46.89	-7.51	39.38	54.00	14.62	Vertical
5	8010	45.98	-0.49	45.49	54.00	8.51	Vertical
6	13042.5	44.26	5.74	50.00	54.00	4.00	Vertical

Mode: IEEE 802.11b ant1 worse
 Highest Frequency (2462MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-16
 Voltage: AC120V/60Hz
 /

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1392	58.90	-19.57	39.33	74.00	34.67	Horizontal
2	3022.5	59.11	-15.34	43.77	74.00	30.23	Horizontal
3	5700	57.82	-7.52	50.30	74.00	23.70	Horizontal
4	9157.5	54.82	0.18	55.00	74.00	19.00	Horizontal
5	12787.5	54.94	4.96	59.90	74.00	14.10	Horizontal
6	15000	53.07	8.01	61.08	74.00	12.92	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1406	47.41	-19.53	27.88	54.00	26.12	Horizontal
2	3030	47.05	-15.33	31.72	54.00	22.28	Horizontal
3	5715	47.13	-7.52	39.61	54.00	14.39	Horizontal
4	9277.5	45.69	0.45	46.14	54.00	7.86	Horizontal
5	12855	44.82	5.24	50.06	54.00	3.94	Horizontal
6	15022.5	43.32	7.93	51.25	54.00	2.75	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1644	59.04	-19.61	39.43	74.00	34.57	Vertical
2	2926	59.70	-17.23	42.47	74.00	31.53	Vertical
3	5280	57.20	-7.75	49.45	74.00	24.55	Vertical
4	6450	56.00	-5.28	50.72	74.00	23.28	Vertical
5	8385	54.76	-1.36	53.40	74.00	20.60	Vertical
6	14055	54.46	7.36	61.82	74.00	12.18	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1664	47.52	-19.78	27.74	54.00	26.26	Vertical
2	2952	47.70	-17.13	30.57	54.00	23.43	Vertical
3	5280	47.07	-7.75	39.32	54.00	14.68	Vertical
4	6487.5	45.65	-5.09	40.56	54.00	13.44	Vertical
5	8310	46.15	-1.19	44.96	54.00	9.04	Vertical
6	14047.5	44.88	7.36	52.24	54.00	1.76	Vertical

Mode: IEEE 802.11g ant1 worse
 Lowest Frequency (2412MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz
 /

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1548	60.00	-19.37	40.63	74.00	33.37	Horizontal
2	3060	59.90	-15.30	44.60	74.00	29.40	Horizontal
3	5377.5	55.76	-7.64	48.12	74.00	25.88	Horizontal
4	7552.5	55.82	-2.22	53.60	74.00	20.40	Horizontal
5	10492.5	54.19	3.47	57.66	74.00	16.34	Horizontal
6	14310	53.70	7.62	61.32	74.00	12.68	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1530	47.56	-19.42	28.14	54.00	25.86	Horizontal
2	3127.5	46.84	-15.23	31.61	54.00	22.39	Horizontal
3	5460	46.49	-7.55	38.94	54.00	15.06	Horizontal
4	7597.5	45.51	-2.04	43.47	54.00	10.53	Horizontal
5	10552.5	44.96	3.53	48.49	54.00	5.51	Horizontal
6	14550	44.38	7.83	52.21	54.00	1.79	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1348	58.40	-19.75	38.65	74.00	35.35	Vertical
2	3007.5	59.15	-15.36	43.79	74.00	30.21	Vertical
3	5400	56.60	-7.61	48.99	74.00	25.01	Vertical
4	7230	56.08	-2.96	53.12	74.00	20.88	Vertical
5	9390	56.14	0.69	56.83	74.00	17.17	Vertical
6	12840	54.60	5.18	59.78	74.00	14.22	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1350	47.38	-19.74	27.64	54.00	26.36	Vertical
2	3022.5	47.17	-15.34	31.83	54.00	22.17	Vertical
3	5460	46.29	-7.55	38.74	54.00	15.26	Vertical
4	7215	45.19	-2.99	42.20	54.00	11.80	Vertical
5	9375	45.18	0.66	45.84	54.00	8.16	Vertical
6	12855	44.79	5.24	50.03	54.00	3.97	Vertical

Mode: IEEE 802.11g ant1 worse
 Highest Frequency (2462MHz)
 Environment: 18.9°C /47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1530	59.65	-19.42	40.23	74.00	33.77	Horizontal
2	2878	59.05	-17.40	41.65	74.00	32.35	Horizontal
3	5452.5	55.81	-7.56	48.25	74.00	25.75	Horizontal
4	7612.5	56.33	-1.98	54.35	74.00	19.65	Horizontal
5	9675	55.12	1.11	56.23	74.00	17.77	Horizontal
6	12337.5	54.67	3.93	58.60	74.00	15.40	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1548	47.43	-19.37	28.06	54.00	25.94	Horizontal
2	2914	47.35	-17.27	30.08	54.00	23.92	Horizontal
3	5370	46.67	-7.65	39.02	54.00	14.98	Horizontal
4	7672.5	45.66	-1.75	43.91	54.00	10.09	Horizontal
5	9742.5	45.54	1.17	46.71	54.00	7.29	Horizontal
6	12345	45.10	3.93	49.03	54.00	4.97	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1466	58.27	-19.51	38.76	74.00	35.24	Vertical
2	3285	58.46	-15.07	43.39	74.00	30.61	Vertical
3	4860	61.23	-9.00	52.23	74.00	21.77	Vertical
4	6517.5	55.92	-4.97	50.95	74.00	23.05	Vertical
5	8010	55.76	-0.49	55.27	74.00	18.73	Vertical
6	14565	53.92	7.83	61.75	74.00	12.25	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1492	47.39	-19.50	27.89	54.00	26.11	Vertical
2	3345	46.65	-15.00	31.65	54.00	22.35	Vertical
3	4860	49.56	-9.00	40.56	54.00	13.44	Vertical
4	6525	45.86	-4.95	40.91	54.00	13.09	Vertical
5	8017.5	45.76	-0.50	45.26	54.00	8.74	Vertical
6	14550	44.42	7.83	52.25	54.00	1.75	Vertical

Mode: IEEE 802.11n HT20

Lowest Frequency (2412MHz)

Environment: 18.9°C/47%RH /101.1kPa

Tested By: Zhang Zishan

Date: 2023-02-17

Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1456	58.92	-19.51	39.41	74.00	34.59	Horizontal
2	2800	58.95	-17.68	41.27	74.00	32.73	Horizontal
3	4687.5	57.13	-10.14	46.99	74.00	27.01	Horizontal
4	7605	55.15	-2.01	53.14	74.00	20.86	Horizontal
5	9690	54.82	1.12	55.94	74.00	18.06	Horizontal
6	14790	54.01	7.92	61.93	74.00	12.07	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1468	47.42	-19.51	27.91	54.00	26.09	Horizontal
2	2806	47.55	-17.66	29.89	54.00	24.11	Horizontal
3	4665	47.64	-10.29	37.35	54.00	16.65	Horizontal
4	7672.5	45.48	-1.75	43.73	54.00	10.27	Horizontal
5	9735	44.83	1.17	46.00	54.00	8.00	Horizontal
6	14527.5	44.34	7.82	52.16	54.00	1.84	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1608	59.30	-19.31	39.99	74.00	34.01	Vertical
2	3720	57.93	-14.02	43.91	74.00	30.09	Vertical
3	4860	59.70	-9.00	50.70	74.00	23.30	Vertical
4	7965	57.81	-0.60	57.21	74.00	16.79	Vertical
5	11617.5	55.83	4.59	60.42	74.00	13.58	Vertical
6	14047.5	54.41	7.36	61.77	74.00	12.23	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1600	47.34	-19.24	28.10	54.00	25.90	Vertical
2	3652.5	47.98	-14.28	33.70	54.00	20.30	Vertical
3	4860	48.99	-9.00	39.99	54.00	14.01	Vertical
4	8010	45.64	-0.49	45.15	54.00	8.85	Vertical
5	11610	44.91	4.59	49.50	54.00	4.50	Vertical
6	14055	44.62	7.36	51.98	54.00	2.02	Vertical

Mode: IEEE 802.11n HT20
 Highest Frequency (2462MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1636	58.92	-19.54	39.38	74.00	34.62	Horizontal
2	3007.5	59.54	-15.36	44.18	74.00	29.82	Horizontal
3	4672.5	57.89	-10.24	47.65	74.00	26.35	Horizontal
4	6682.5	55.36	-4.44	50.92	74.00	23.08	Horizontal
5	10987.5	54.21	3.84	58.05	74.00	15.95	Horizontal
6	14662.5	53.15	7.88	61.03	74.00	12.97	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1646	47.36	-19.62	27.74	54.00	26.26	Horizontal
2	3022.5	47.02	-15.34	31.68	54.00	22.32	Horizontal
3	4687.5	47.52	-10.14	37.38	54.00	16.62	Horizontal
4	6697.5	45.53	-4.39	41.14	54.00	12.86	Horizontal
5	11152.5	44.78	4.11	48.89	54.00	5.11	Horizontal
6	14782.5	44.77	7.92	52.69	54.00	1.31	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1474	59.30	-19.50	39.80	74.00	34.20	Vertical
2	3187.5	58.59	-15.16	43.43	74.00	30.57	Vertical
3	4687.5	58.15	-10.14	48.01	74.00	25.99	Vertical
4	6390	56.42	-5.59	50.83	74.00	23.17	Vertical
5	8010	55.12	-0.49	54.63	74.00	19.37	Vertical
6	14295	53.74	7.61	61.35	74.00	12.65	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1492	47.43	-19.50	27.93	54.00	26.07	Vertical
2	3262.5	46.67	-15.08	31.59	54.00	22.41	Vertical
3	4620	47.99	-10.58	37.41	54.00	16.59	Vertical
4	6315	46.32	-5.96	40.36	54.00	13.64	Vertical
5	8002.5	45.57	-0.46	45.11	54.00	8.89	Vertical
6	14490	44.08	7.80	51.88	54.00	2.12	Vertical

Mode: IEEE 802.11n HT40
 Lowest Frequency (2422MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz
 /

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1518	58.76	-19.45	39.31	74.00	34.69	Horizontal
2	2964	59.79	-17.09	42.70	74.00	31.30	Horizontal
3	4672.5	57.43	-10.24	47.19	74.00	26.81	Horizontal
4	8002.5	56.22	-0.46	55.76	74.00	18.24	Horizontal
5	11715	53.83	4.51	58.34	74.00	15.66	Horizontal
6	14422.5	54.58	7.73	62.31	74.00	11.69	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1520	47.29	-19.45	27.84	54.00	26.16	Horizontal
2	2980	47.53	-17.03	30.50	54.00	23.50	Horizontal
3	4680	47.20	-10.19	37.01	54.00	16.99	Horizontal
4	7995	45.91	-0.48	45.43	54.00	8.57	Horizontal
5	11985	44.38	4.25	48.63	54.00	5.37	Horizontal
6	14550	44.49	7.83	52.32	54.00	1.68	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1436	58.58	-19.52	39.06	74.00	34.94	Vertical
2	3157.5	58.53	-15.20	43.33	74.00	30.67	Vertical
3	4860	60.31	-9.00	51.31	74.00	22.69	Vertical
4	8092.5	55.89	-0.68	55.21	74.00	18.79	Vertical
5	12427.5	54.17	3.84	58.01	74.00	15.99	Vertical
6	14782.5	53.91	7.92	61.83	74.00	12.17	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1412	47.29	-19.52	27.77	54.00	26.23	Vertical
2	3150	46.87	-15.20	31.67	54.00	22.33	Vertical
3	4860	48.92	-9.00	39.92	54.00	14.08	Vertical
4	8025	45.96	-0.51	45.45	54.00	8.55	Vertical
5	12667.5	44.38	4.47	48.85	54.00	5.15	Vertical
6	14542.5	44.30	7.83	52.13	54.00	1.87	Vertical

Mode: IEEE 802.11n HT40
 Highest Frequency (2452MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz
 /

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1434	59.41	-19.52	39.89	74.00	34.11	Horizontal
2	3000	58.99	-15.36	43.63	74.00	30.37	Horizontal
3	4860	61.10	-9.00	52.10	74.00	21.90	Horizontal
4	6495	56.10	-5.05	51.05	74.00	22.95	Horizontal
5	9907.5	54.77	1.34	56.11	74.00	17.89	Horizontal
6	14527.5	54.78	7.82	62.60	74.00	11.40	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1448	47.46	-19.52	27.94	54.00	26.06	Horizontal
2	3022.5	47.12	-15.34	31.78	54.00	22.22	Horizontal
3	4972.5	46.86	-8.25	38.61	54.00	15.39	Horizontal
4	6517.5	45.74	-4.97	40.77	54.00	13.23	Horizontal
5	9735	44.94	1.17	46.11	54.00	7.89	Horizontal
6	14782.5	44.30	7.92	52.22	54.00	1.78	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1356	60.19	-19.71	40.48	74.00	33.52	Vertical
2	3390	58.64	-14.95	43.69	74.00	30.31	Vertical
3	4860	61.19	-9.00	52.19	74.00	21.81	Vertical
4	6487.5	55.33	-5.09	50.24	74.00	23.76	Vertical
5	9832.5	56.12	1.26	57.38	74.00	16.62	Vertical
6	14550	54.53	7.83	62.36	74.00	11.64	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1360	47.56	-19.70	27.86	54.00	26.14	Vertical
2	3442.5	46.69	-14.90	31.79	54.00	22.21	Vertical
3	4822.5	47.95	-9.25	38.70	54.00	15.30	Vertical
4	6532.5	46.22	-4.92	41.30	54.00	12.70	Vertical
5	9727.5	45.50	1.16	46.66	54.00	7.34	Vertical
6	14550	44.61	7.83	52.44	54.00	1.56	Vertical

Mode: IEEE 802.11ax HE20
 Lowest Frequency (2412MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1358	60.85	-19.70	41.15	74.00	32.85	Horizontal
2	3345	58.56	-15.00	43.56	74.00	30.44	Horizontal
3	4860	61.08	-9.00	52.08	74.00	21.92	Horizontal
4	7717.5	56.59	-1.57	55.02	74.00	18.98	Horizontal
5	11145	55.49	4.09	59.58	74.00	14.42	Horizontal
6	14070	54.91	7.38	62.29	74.00	11.71	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1392	47.36	-19.57	27.79	54.00	26.21	Horizontal
2	3315	46.52	-15.03	31.49	54.00	22.51	Horizontal
3	4830	48.83	-9.20	39.63	54.00	14.37	Horizontal
4	7672.5	46.03	-1.75	44.28	54.00	9.72	Horizontal
5	11152.5	44.99	4.11	49.10	54.00	4.90	Horizontal
6	14047.5	44.17	7.36	51.53	54.00	2.47	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1454	58.28	-19.51	38.77	74.00	35.23	Vertical
2	3337.5	58.66	-15.00	43.66	74.00	30.34	Vertical
3	4860	61.03	-9.00	52.03	74.00	21.97	Vertical
4	7762.5	57.19	-1.39	55.80	74.00	18.20	Vertical
5	12000	54.47	4.24	58.71	74.00	15.29	Vertical
6	14535	53.87	7.83	61.70	74.00	12.30	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1440	47.38	-19.52	27.86	54.00	26.14	Vertical
2	3352.5	46.53	-14.99	31.54	54.00	22.46	Vertical
3	4860	47.92	-9.00	38.92	54.00	15.08	Vertical
4	7920	45.16	-0.78	44.38	54.00	9.62	Vertical
5	12000	44.82	4.24	49.06	54.00	4.94	Vertical
6	14557.5	44.14	7.83	51.97	54.00	2.03	Vertical

Mode: IEEE 802.11ax HE20
 Highest Frequency (2462MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1612	60.14	-19.34	40.80	74.00	33.20	Horizontal
2	3082.5	59.80	-15.28	44.52	74.00	29.48	Horizontal
3	4927.5	57.98	-8.55	49.43	74.00	24.57	Horizontal
4	7837.5	55.21	-1.10	54.11	74.00	19.89	Horizontal
5	10507.5	53.97	3.51	57.48	74.00	16.52	Horizontal
6	14550	54.40	7.83	62.23	74.00	11.77	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1600	47.47	-19.24	28.23	54.00	25.77	Horizontal
2	3120	46.79	-15.23	31.56	54.00	22.44	Horizontal
3	5040	46.62	-8.02	38.60	54.00	15.40	Horizontal
4	7927.5	45.67	-0.74	44.93	54.00	9.07	Horizontal
5	10515	44.50	3.51	48.01	54.00	5.99	Horizontal
6	14535	44.46	7.83	52.29	54.00	1.71	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1440	60.04	-19.52	40.52	74.00	33.48	Vertical
2	3757.5	57.76	-13.88	43.88	74.00	30.12	Vertical
3	4860	60.77	-9.00	51.77	74.00	22.23	Vertical
4	8010	56.32	-0.49	55.83	74.00	18.17	Vertical
5	11152.5	54.18	4.11	58.29	74.00	15.71	Vertical
6	14362.5	53.84	7.68	61.52	74.00	12.48	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1440	47.41	-19.52	27.89	54.00	26.11	Vertical
2	3765	47.75	-13.86	33.89	54.00	20.11	Vertical
3	4860	48.28	-9.00	39.28	54.00	14.72	Vertical
4	8002.5	45.76	-0.46	45.30	54.00	8.70	Vertical
5	11205	45.22	4.20	49.42	54.00	4.58	Vertical
6	14550	44.48	7.83	52.31	54.00	1.69	Vertical

Mode: IEEE 802.11ax HE40
 Lowest Frequency (2422MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz
 /

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1486	59.21	-19.51	39.70	74.00	34.30	Horizontal
2	3982.5	57.16	-13.05	44.11	74.00	29.89	Horizontal
3	4860	61.09	-9.00	52.09	74.00	21.91	Horizontal
4	8482.5	55.41	-1.59	53.82	74.00	20.18	Horizontal
5	12817.5	55.25	5.09	60.34	74.00	13.66	Horizontal
6	14422.5	55.02	7.73	62.75	74.00	11.25	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1520	47.37	-19.45	27.92	54.00	26.08	Horizontal
2	3982.5	47.75	-13.05	34.70	54.00	19.30	Horizontal
3	4860	48.53	-9.00	39.53	54.00	14.47	Horizontal
4	8610	45.64	-1.31	44.33	54.00	9.67	Horizontal
5	12840	45.29	5.18	50.47	54.00	3.53	Horizontal
6	14550	44.06	7.83	51.89	54.00	2.11	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1430	59.07	-19.53	39.54	74.00	34.46	Vertical
2	3502.5	58.74	-14.83	43.91	74.00	30.09	Vertical
3	4860	59.65	-9.00	50.65	74.00	23.35	Vertical
4	7395	55.55	-2.63	52.92	74.00	21.08	Vertical
5	10342.5	54.01	2.85	56.86	74.00	17.14	Vertical
6	14962.5	53.57	8.00	61.57	74.00	12.43	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1440	47.40	-19.52	27.88	54.00	26.12	Vertical
2	3570	46.75	-14.58	32.17	54.00	21.83	Vertical
3	4860	47.74	-9.00	38.74	54.00	15.26	Vertical
4	7395	45.36	-2.63	42.73	54.00	11.27	Vertical
5	10335	44.23	2.82	47.05	54.00	6.95	Vertical
6	14790	44.01	7.92	51.93	54.00	2.07	Vertical

Mode: IEEE 802.11ax HE40
 Highest Frequency (2452MHz)
 Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-17
 Voltage: AC120V/60Hz

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1376	59.44	-19.64	39.80	74.00	34.20	Horizontal
2	3022.5	59.15	-15.34	43.81	74.00	30.19	Horizontal
3	4995	57.21	-8.11	49.10	74.00	24.90	Horizontal
4	8737.5	56.11	-0.93	55.18	74.00	18.82	Horizontal
5	13200	54.62	5.38	60.00	74.00	14.00	Horizontal
6	15420	52.14	6.35	58.49	74.00	15.51	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1394	47.63	-19.56	28.07	54.00	25.93	Horizontal
2	3022.5	47.22	-15.34	31.88	54.00	22.12	Horizontal
3	5077.5	46.50	-7.98	38.52	54.00	15.48	Horizontal
4	8752.5	45.89	-0.88	45.01	54.00	8.99	Horizontal
5	13267.5	44.44	5.22	49.66	54.00	4.34	Horizontal
6	15307.5	42.75	6.79	49.54	54.00	4.46	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1424	58.98	-19.52	39.46	74.00	34.54	Vertical
2	3127.5	59.33	-15.23	44.10	74.00	29.90	Vertical
3	4860	59.83	-9.00	50.83	74.00	23.17	Vertical
4	7830	55.11	-1.12	53.99	74.00	20.01	Vertical
5	10215	55.06	2.32	57.38	74.00	16.62	Vertical
6	13732.5	55.24	5.90	61.14	74.00	12.86	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Level [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1438	47.53	-19.52	28.01	54.00	25.99	Vertical
2	3127.5	46.80	-15.23	31.57	54.00	22.43	Vertical
3	4860	48.80	-9.00	39.80	54.00	14.20	Vertical
4	7920	45.57	-0.78	44.79	54.00	9.21	Vertical
5	10087.5	44.83	1.80	46.63	54.00	7.37	Vertical
6	13732.5	44.78	5.90	50.68	54.00	3.32	Vertical

Above 18GHz:

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b)
The peak test results is less than the average limits, so the average test results had not reported.

Mode: IEEE 802.11b Ant 1

Lowest Frequency (2412MHz)

Environment: 18.9°C/47%RH /101.1kPa

Tested By: Zhang Zishan

Date: 2023-02-16

Voltage: AC120V/60Hz

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18978.4785	50.80	-6.65	44.15	83.54	39.39	Horizontal
2	20475.976	49.24	-6.97	42.27	83.54	41.27	Horizontal
3	21539.5395	52.98	-6.91	46.07	83.54	37.47	Horizontal
4	23147.6476	50.56	-5.32	45.24	83.54	38.3	Horizontal
5	24466.4665	48.63	-5.36	43.27	83.54	40.27	Horizontal
6	25521.5215	49.58	-4.79	44.79	83.54	38.75	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18952.953	49.98	-6.66	43.32	83.54	40.22	Vertical
2	20050.5506	47.45	-7.18	40.27	83.54	43.27	Vertical
3	21658.6587	53.21	-6.95	46.26	83.54	37.28	Vertical
4	22943.4434	48.91	-5.33	43.58	83.54	39.96	Vertical
5	23947.4474	46.82	-5.84	40.98	83.54	42.56	Vertical
6	25028.028	49.69	-4.78	44.91	83.54	38.63	Vertical

Note:

Above 18G test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dBμV/m).

----- The following blanks -----

Mode: IEEE 802.11b Ant 1
Middle Frequency (2437MHz)
Environment: 18.9°C/47%RH /101.1kPa
Tested By: Zhang Zishan

Date: 2023-02-16
Voltage: AC120V/60Hz
/

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19148.6486	51.51	-6.72	44.79	83.54	38.75	Horizontal
2	21505.5055	53.28	-6.90	46.38	83.54	37.16	Horizontal
3	22569.0691	50.18	-6.03	44.15	83.54	39.39	Horizontal
4	23641.1411	49.86	-5.64	44.22	83.54	39.32	Horizontal
5	24721.7217	49.40	-5.08	44.32	83.54	39.22	Horizontal
6	25495.996	49.97	-4.79	45.18	83.54	38.36	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19097.5976	50.59	-6.69	43.90	83.54	39.64	Vertical
2	20382.3824	48.21	-7.01	41.20	83.54	42.34	Vertical
3	21522.5225	53.49	-6.90	46.59	83.54	36.95	Vertical
4	23385.8859	48.24	-5.48	42.76	83.54	40.78	Vertical
5	24577.0771	48.54	-5.24	43.30	83.54	40.24	Vertical
6	25785.2853	48.03	-4.80	43.23	83.54	40.31	Vertical

Note:

Above 18G test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dBμV/m).

----- The following blanks -----

Mode: IEEE 802.11b Ant1
 Highest Frequency (2462MHz)
 Environment: 18.9°C /47%RH /101.1kPa
 Tested By: Zhang Zishan

Date: 2023-02-16
 Voltage: AC120V/60Hz
 /

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18961.4615	50.98	-6.66	44.32	83.54	39.22	Horizontal
2	20773.7738	49.33	-6.82	42.51	83.54	41.03	Horizontal
3	21650.1502	53.32	-6.95	46.37	83.54	37.17	Horizontal
4	23173.1732	49.81	-5.34	44.47	83.54	39.07	Horizontal
5	24330.3303	49.92	-5.51	44.41	83.54	39.13	Horizontal
6	25963.964	49.27	-4.80	44.47	83.54	39.07	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19072.0721	51.03	-6.68	44.35	83.54	39.19	Vertical
2	20892.8929	49.42	-6.76	42.66	83.54	40.88	Vertical
3	22092.5926	51.62	-6.91	44.71	83.54	38.83	Vertical
4	23828.3283	48.86	-5.76	43.10	83.54	40.44	Vertical
5	24942.9429	50.74	-4.84	45.90	83.54	37.64	Vertical
6	25904.4044	48.47	-4.80	43.67	83.54	39.87	Vertical

Note:

Above 18G test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dBμV/m).

----- The following blanks -----

7. 6DB BANDWIDTH


7.1. LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.

7.3. TEST SETUP

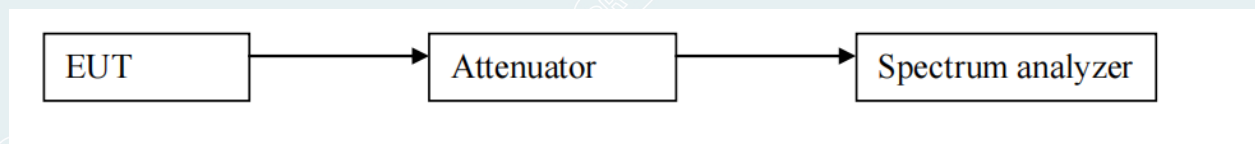


----- The following blanks -----


7.4. TEST RESULTS


Environment: 18.9℃/47%RH /101.1kPa
 Tested By: Yang zhaiyun



Voltage: AC120V/60Hz
 Date: 2023-02-27 to 2023-03-15



TestMode	Antenna	Frequency[MHz]	DTS BW[MHz]	Limit[MHz]	Verdict
802.11b	Ant1	2412	7.566	≥0.5	PASS
	Ant2	2412	7.086	≥0.5	PASS
	Ant1	2437	8.001	≥0.5	PASS
	Ant2	2437	8.037	≥0.5	PASS
	Ant1	2462	8.52	≥0.5	PASS
	Ant2	2462	8.025	≥0.5	PASS
802.11g	Ant1	2412	15.693	≥0.5	PASS
	Ant2	2412	16.278	≥0.5	PASS
	Ant1	2437	15.3	≥0.5	PASS
	Ant2	2437	15.903	≥0.5	PASS
	Ant1	2462	15.678	≥0.5	PASS
	Ant2	2462	15.315	≥0.5	PASS
802.11n HT20	Ant1	2412	16.029	≥0.5	PASS
	Ant2	2412	15.018	≥0.5	PASS
	Ant1	2437	16.26	≥0.5	PASS
	Ant2	2437	15.933	≥0.5	PASS
	Ant1	2462	16.635	≥0.5	PASS
	Ant2	2462	15.945	≥0.5	PASS
802.11n HT40	Ant1	2422	35.07	≥0.5	PASS
	Ant2	2422	35.076	≥0.5	PASS
	Ant1	2437	35.076	≥0.5	PASS
	Ant2	2437	35.088	≥0.5	PASS
	Ant1	2452	35.1	≥0.5	PASS
	Ant2	2452	35.046	≥0.5	PASS
802.11ax HE20	Ant1	2412	18.456	≥0.5	PASS
	Ant2	2412	18.669	≥0.5	PASS
	Ant1	2437	17.538	≥0.5	PASS
	Ant2	2437	17.208	≥0.5	PASS
	Ant1	2462	17.175	≥0.5	PASS
	Ant2	2462	18.426	≥0.5	PASS
802.11ax HE40	Ant1	2422	35.952	≥0.5	PASS
	Ant2	2422	35.088	≥0.5	PASS
	Ant1	2437	35.304	≥0.5	PASS
	Ant2	2437	35.07	≥0.5	PASS
	Ant1	2452	35.16	≥0.5	PASS
	Ant2	2452	35.07	≥0.5	PASS

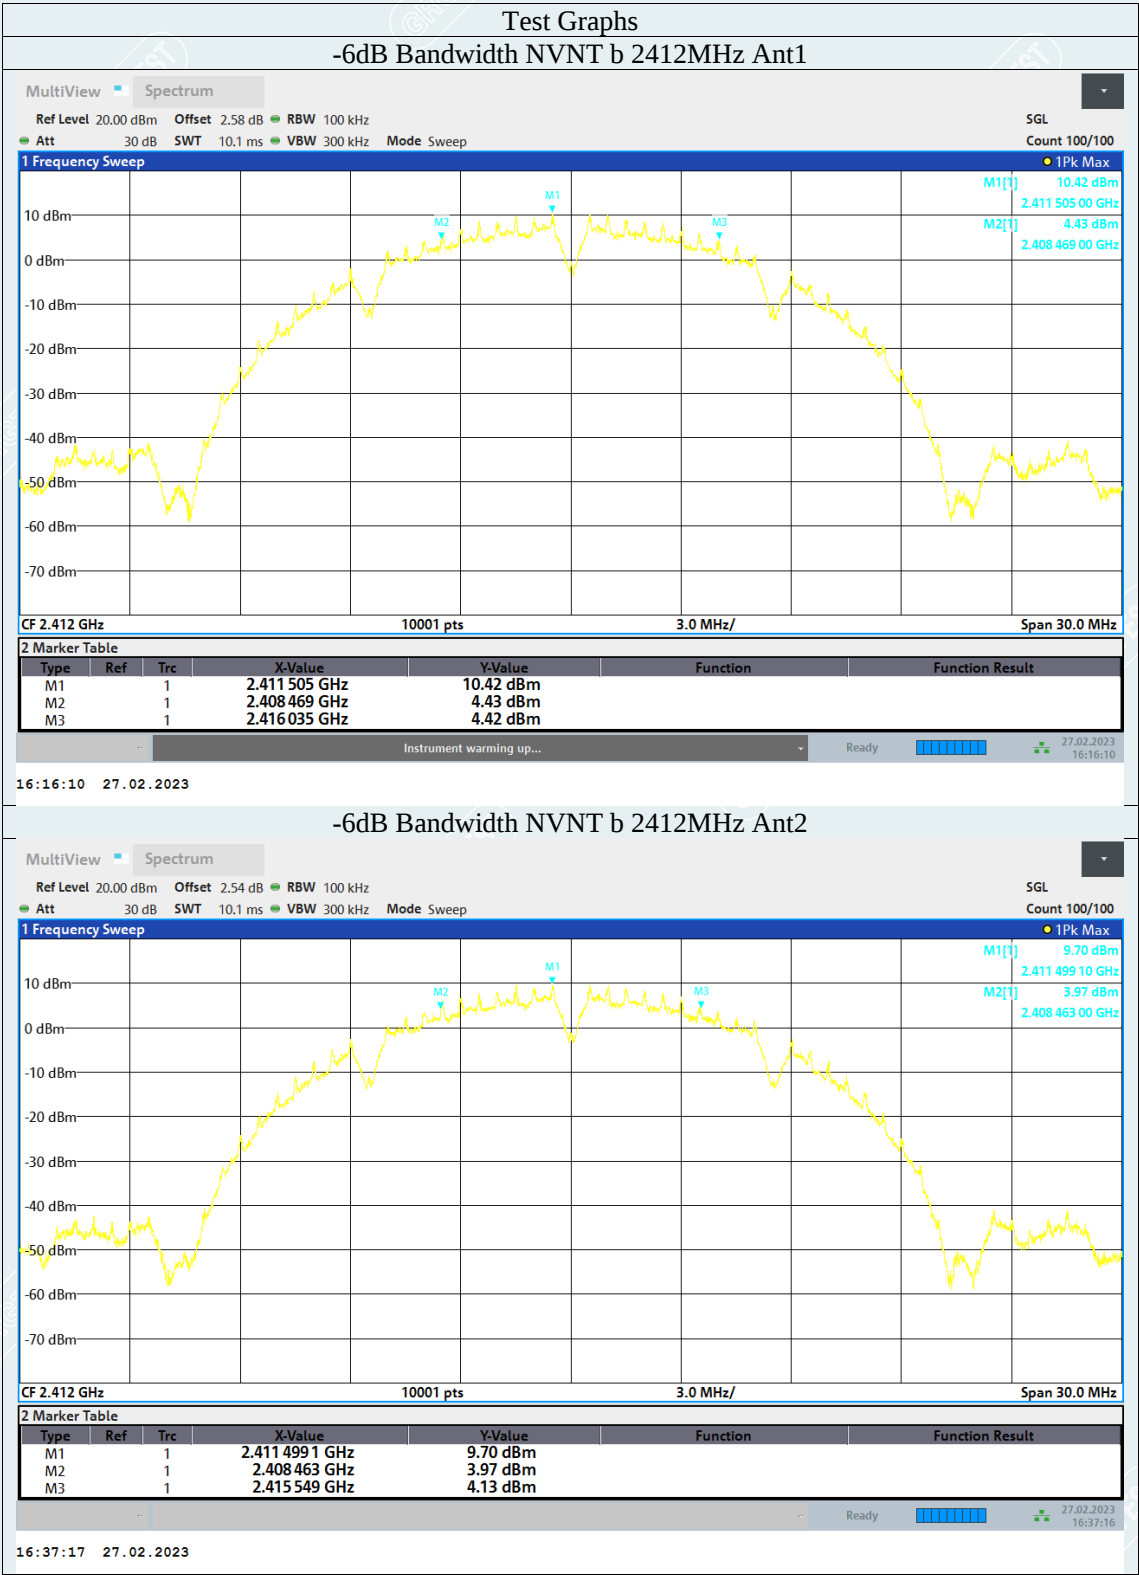


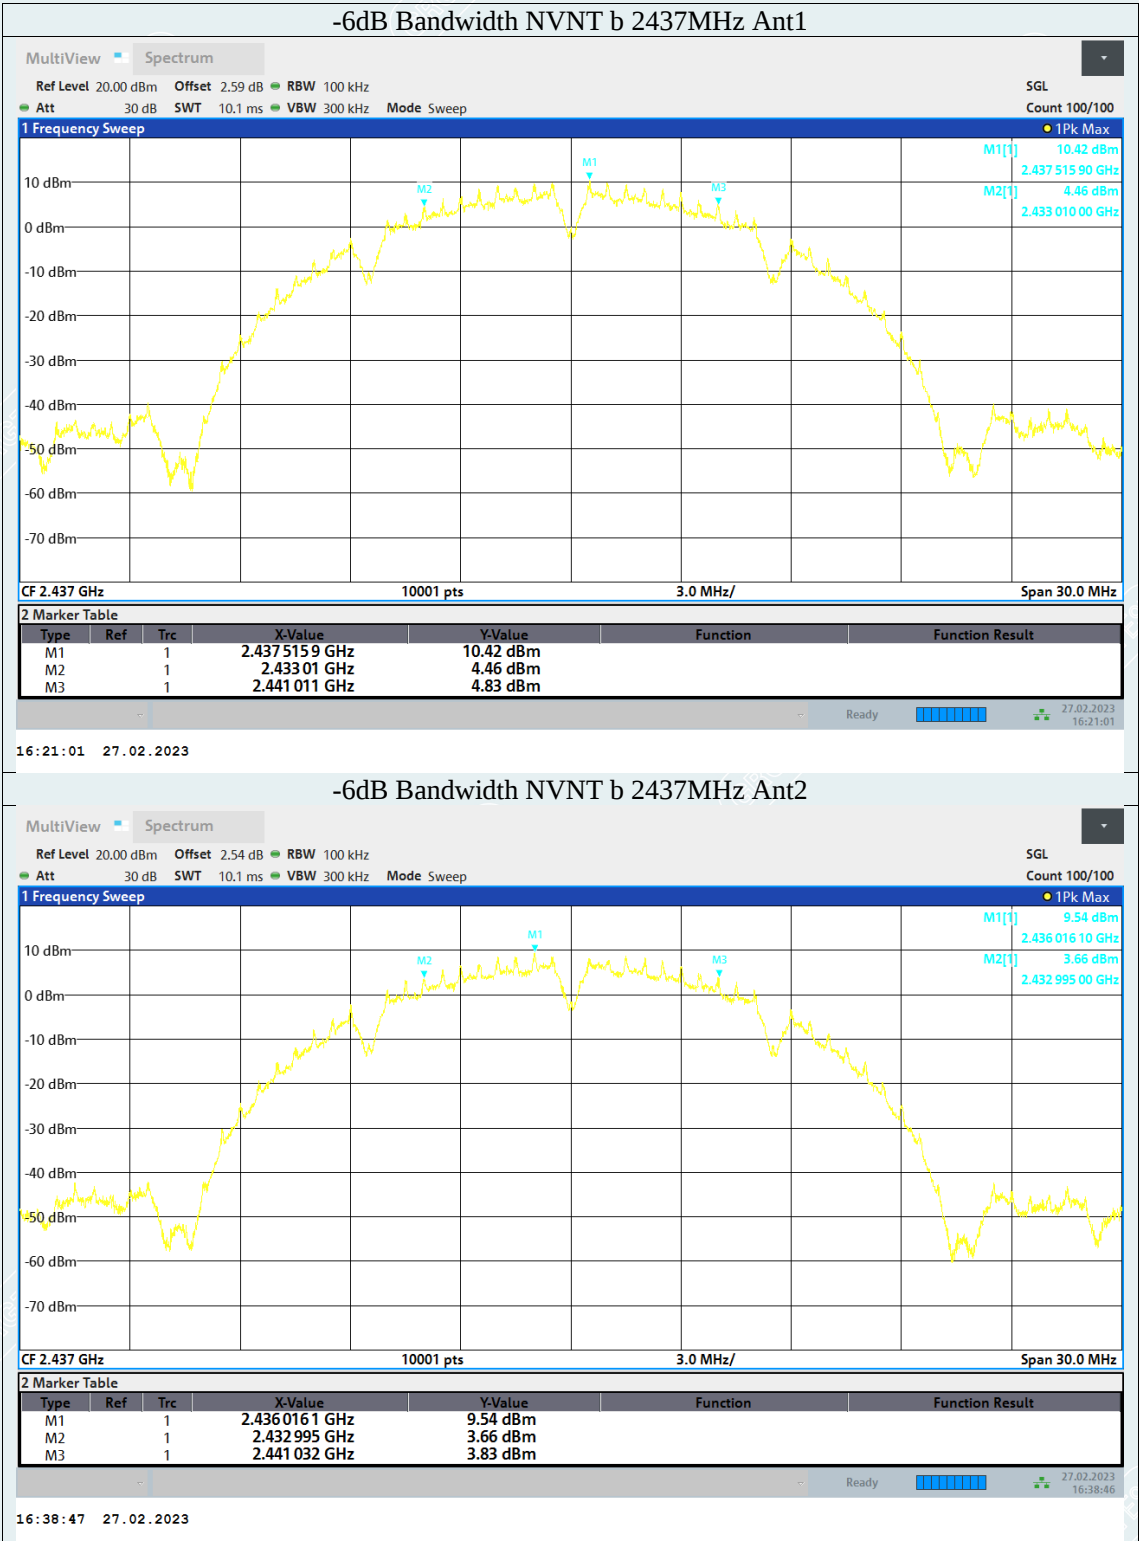


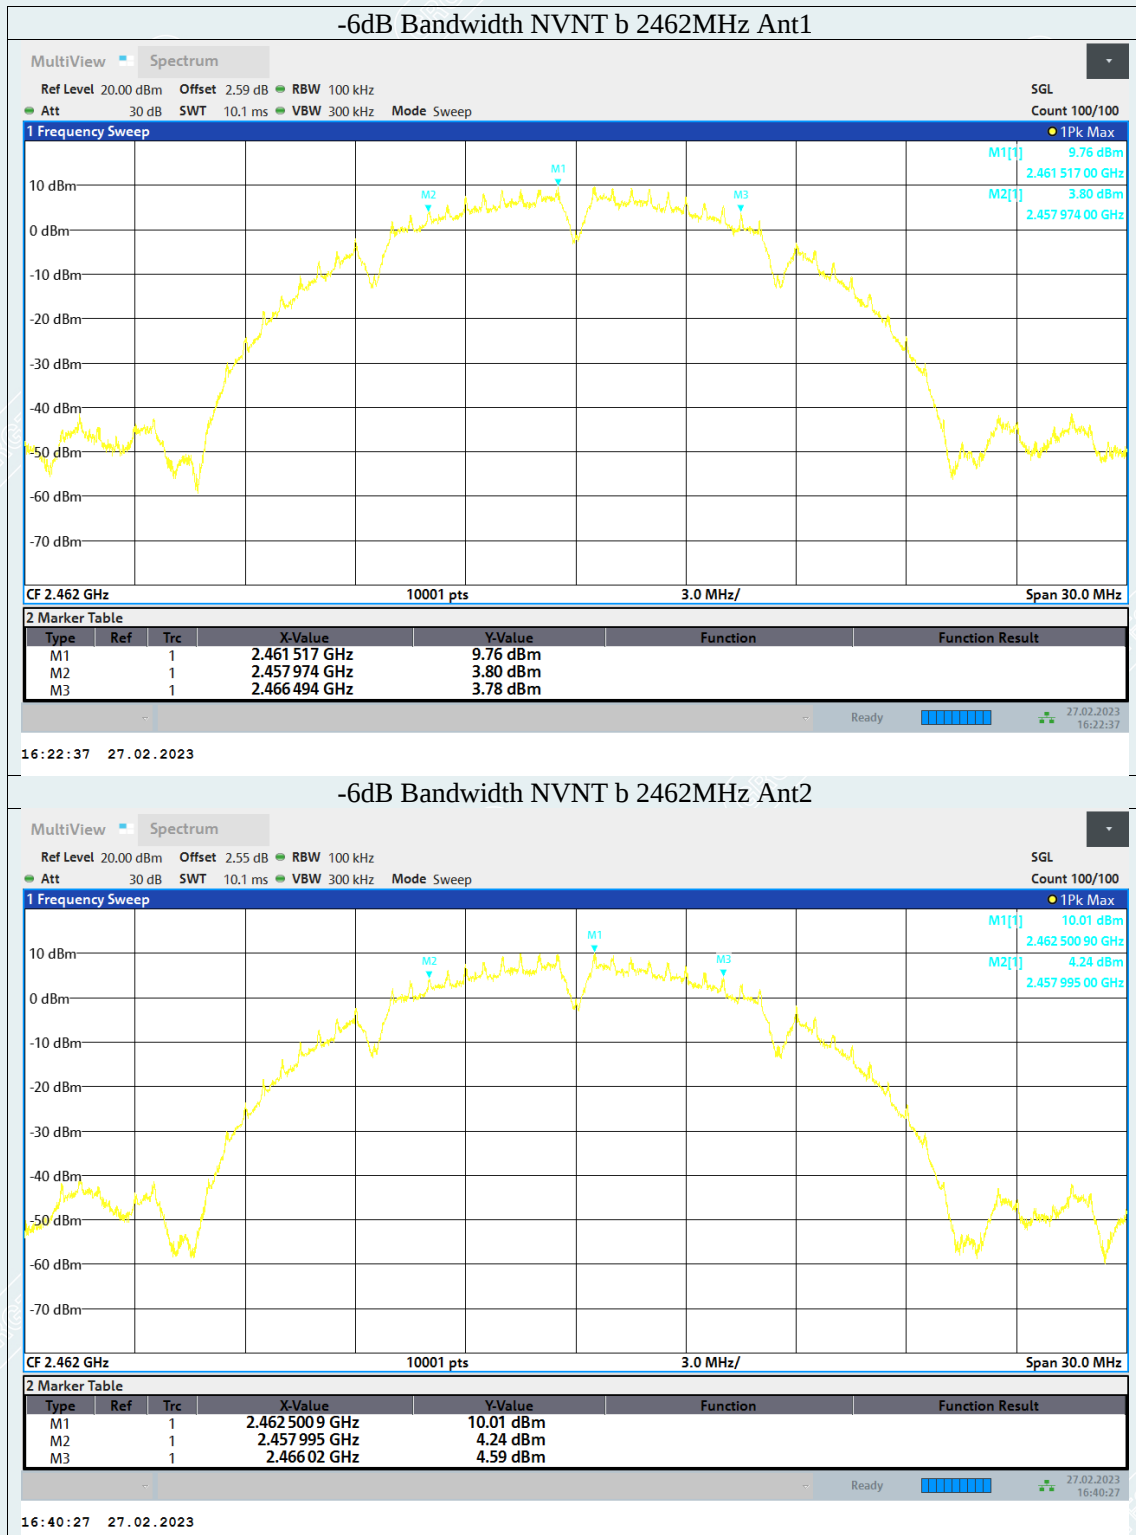





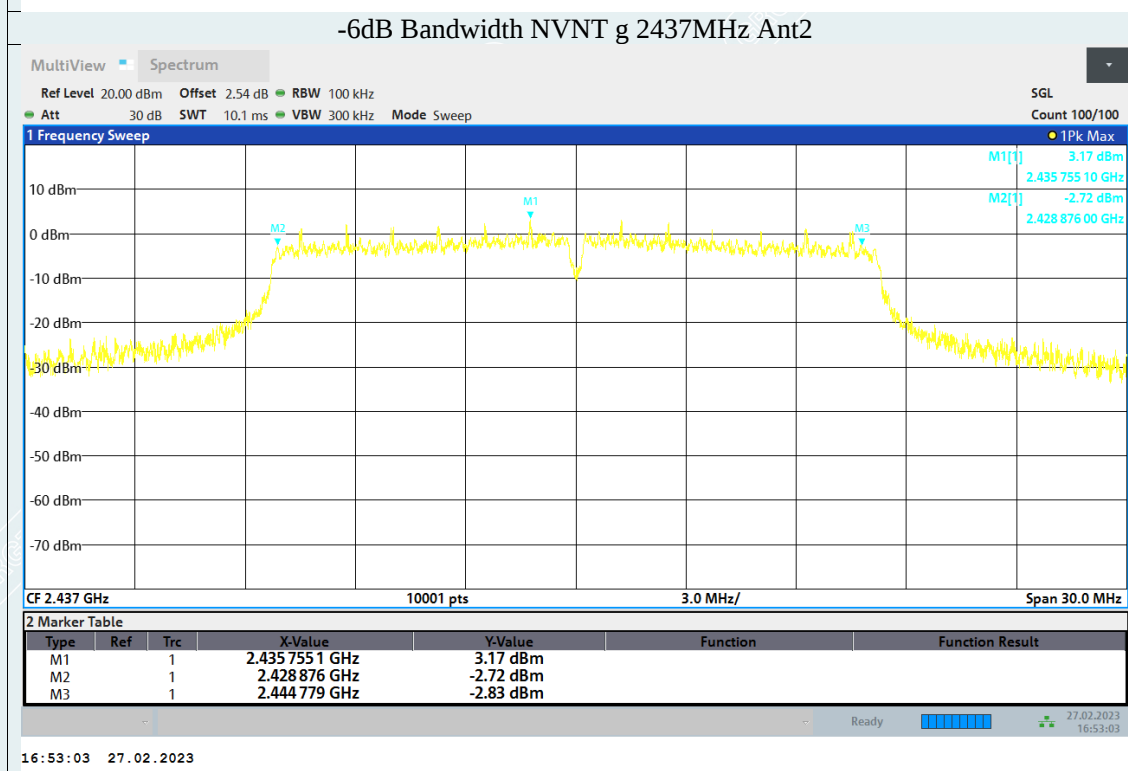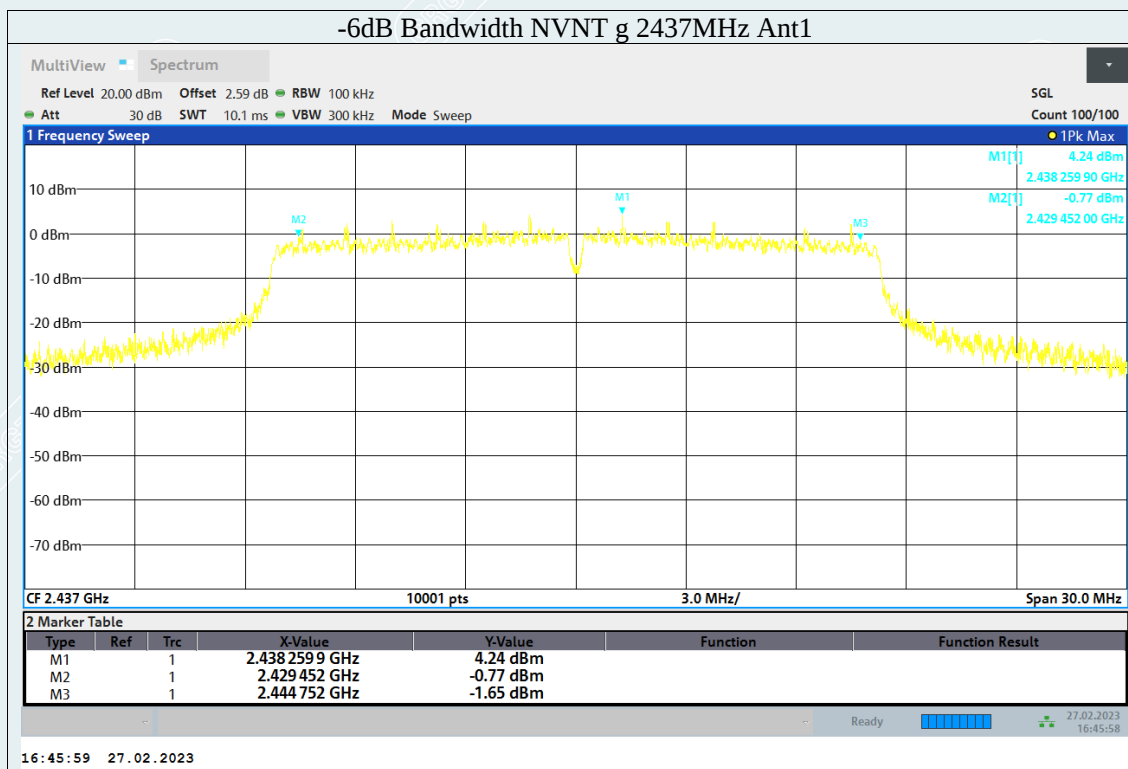


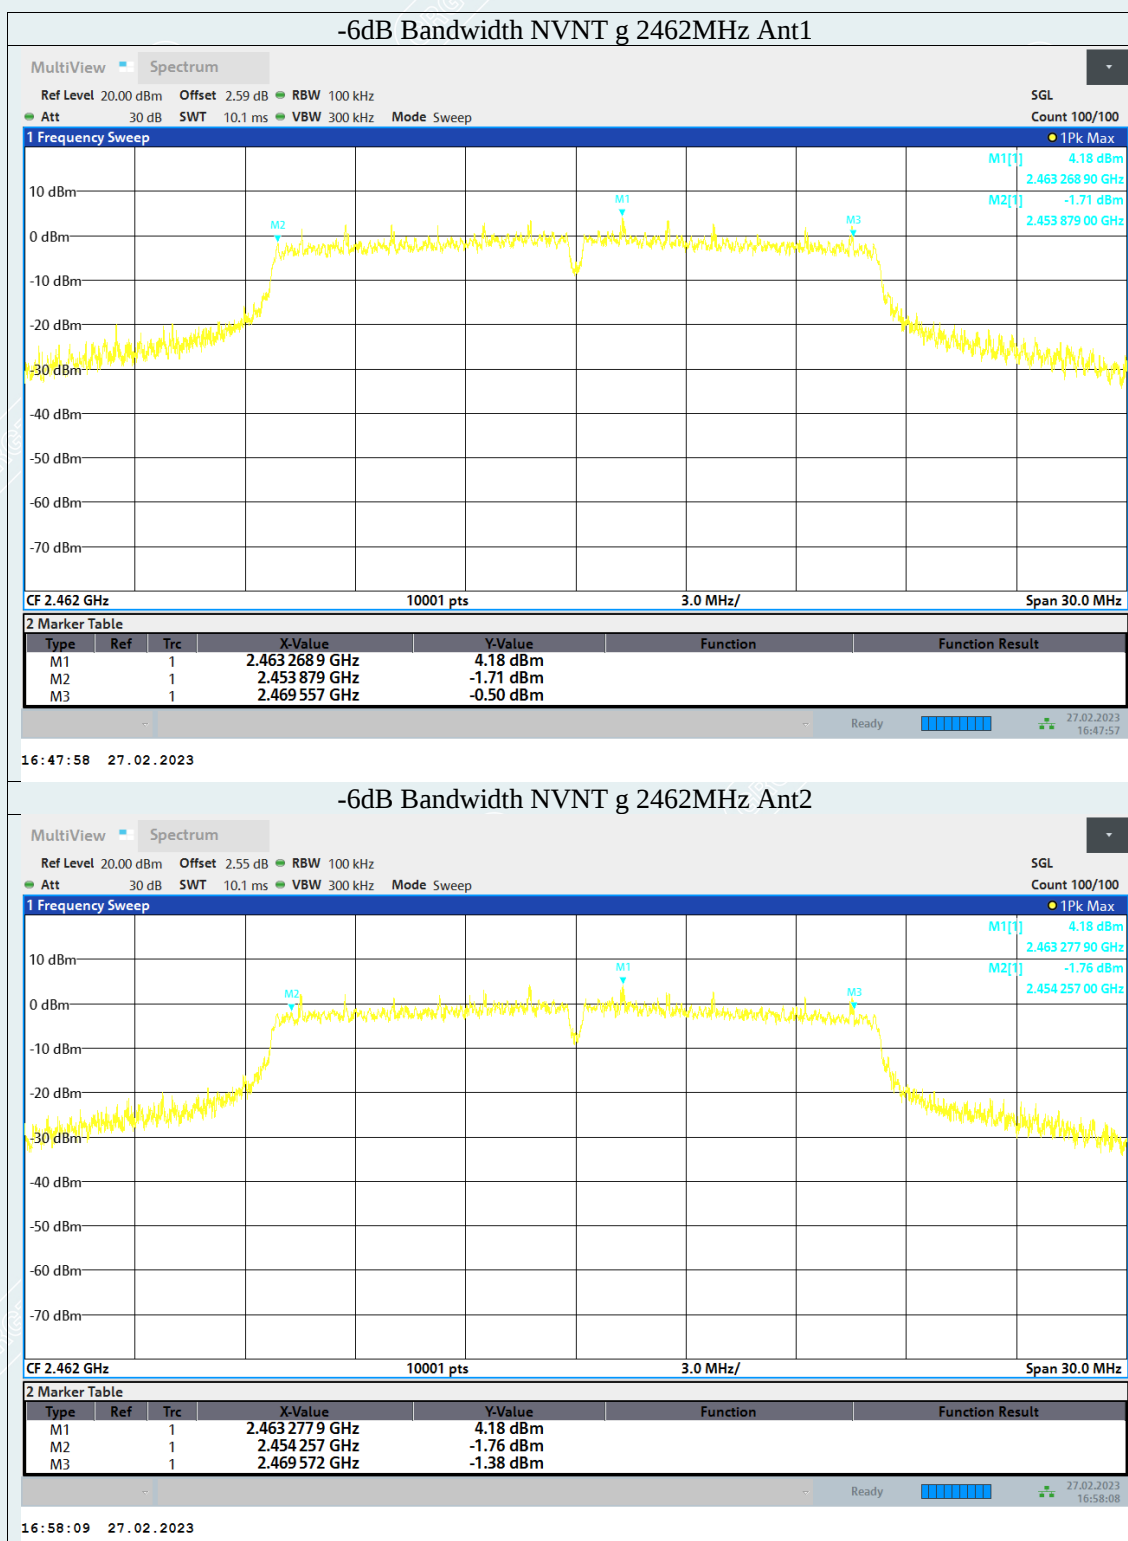


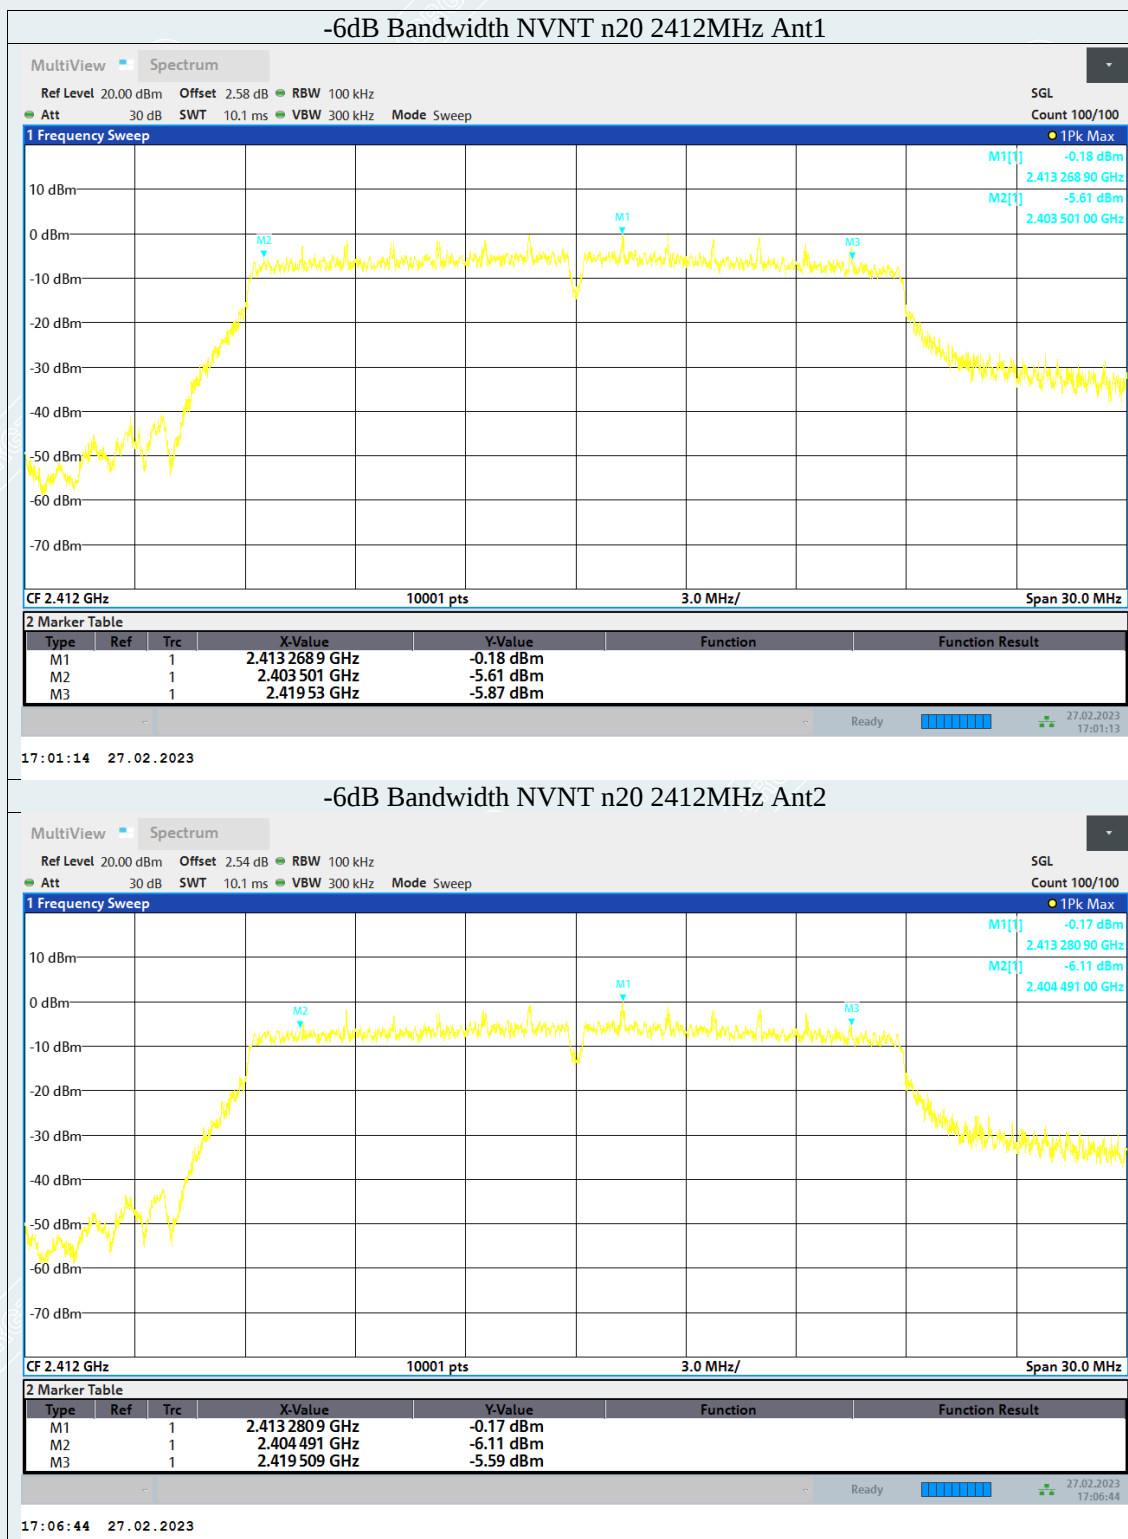



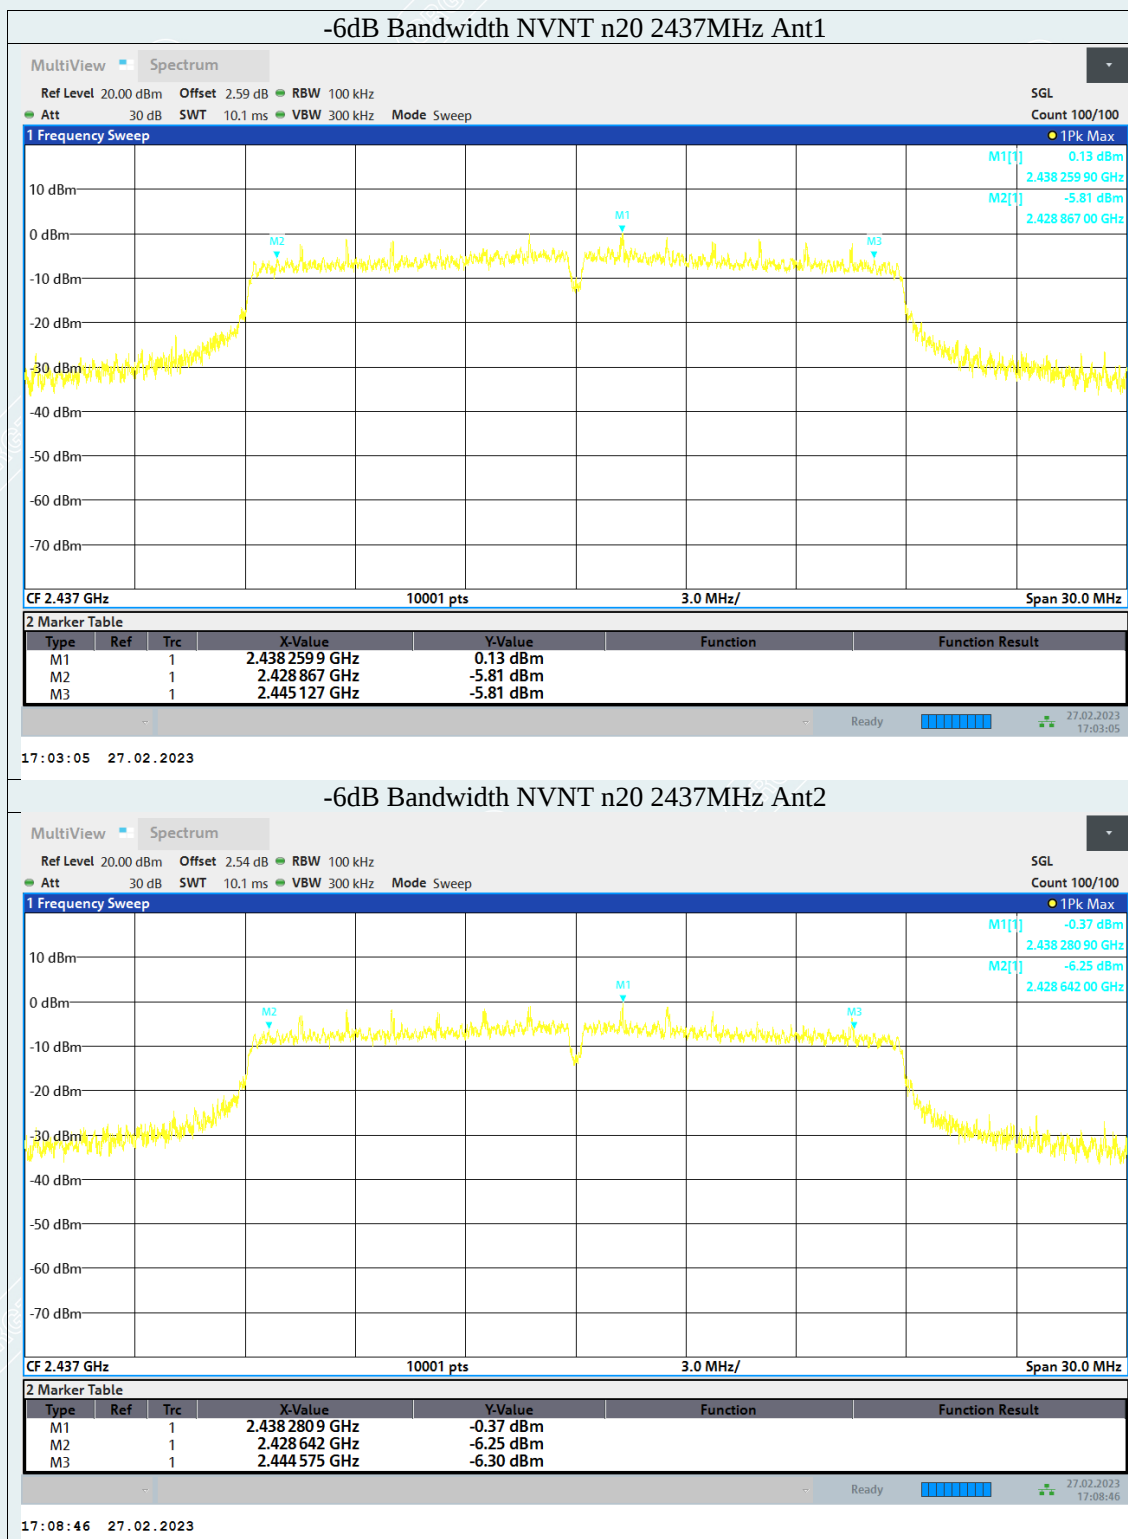


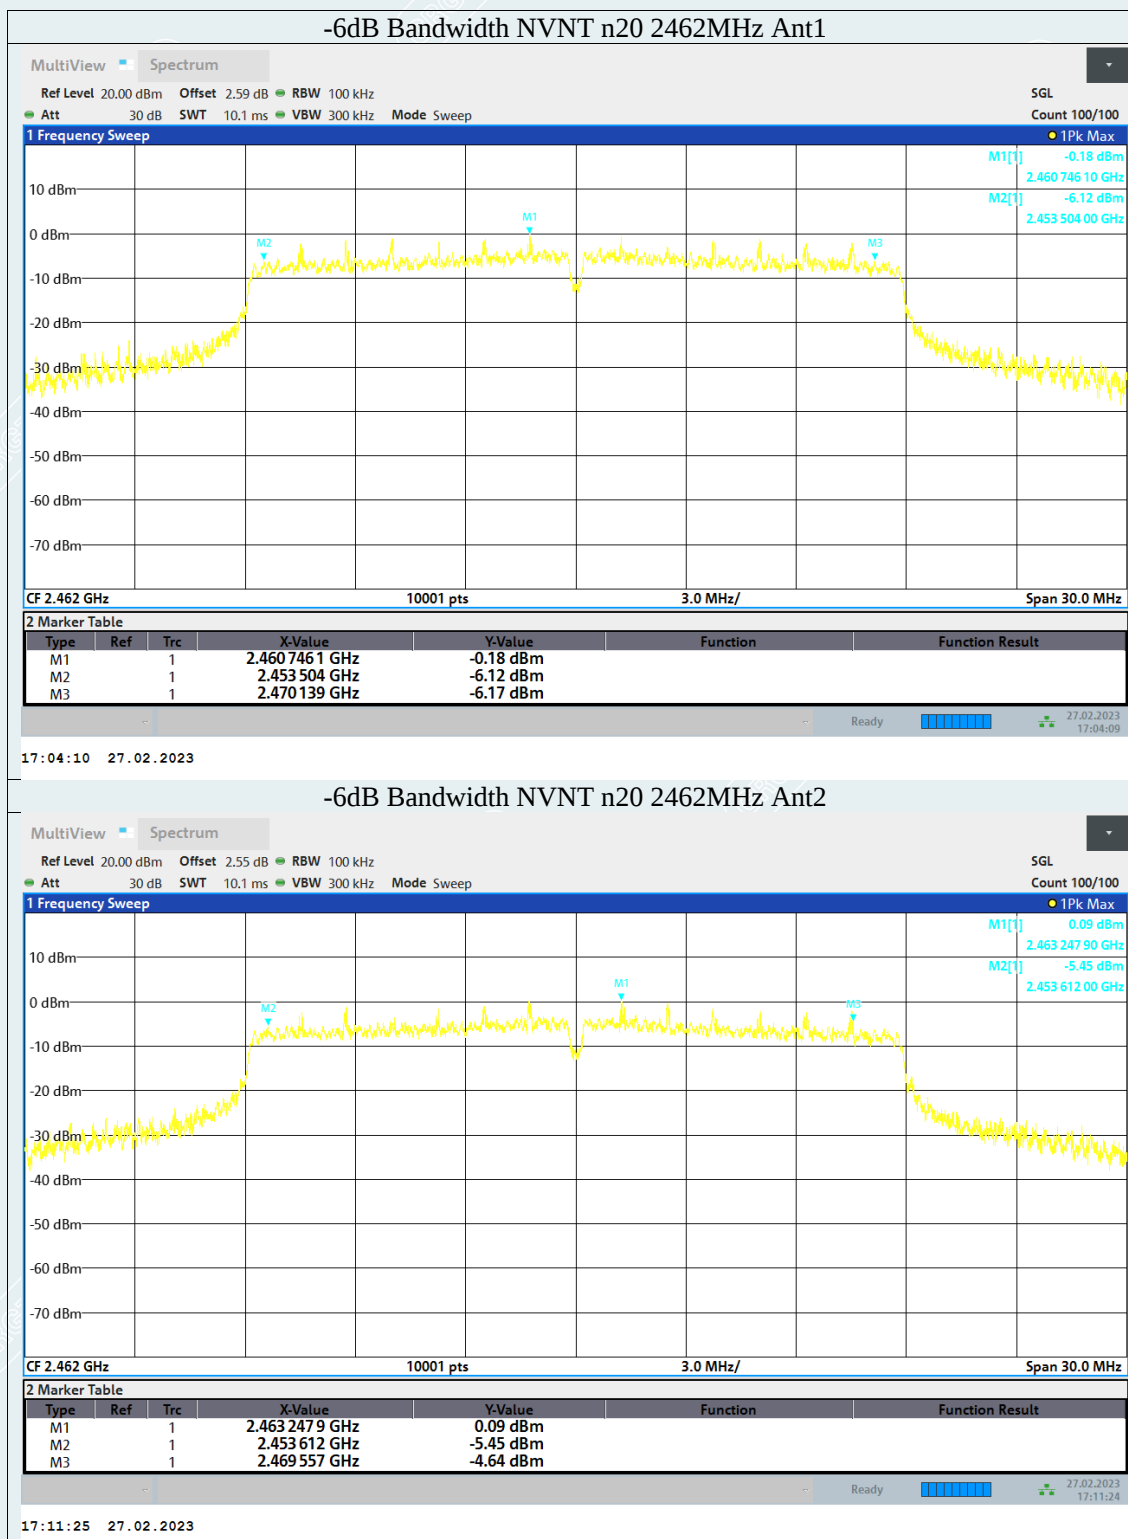



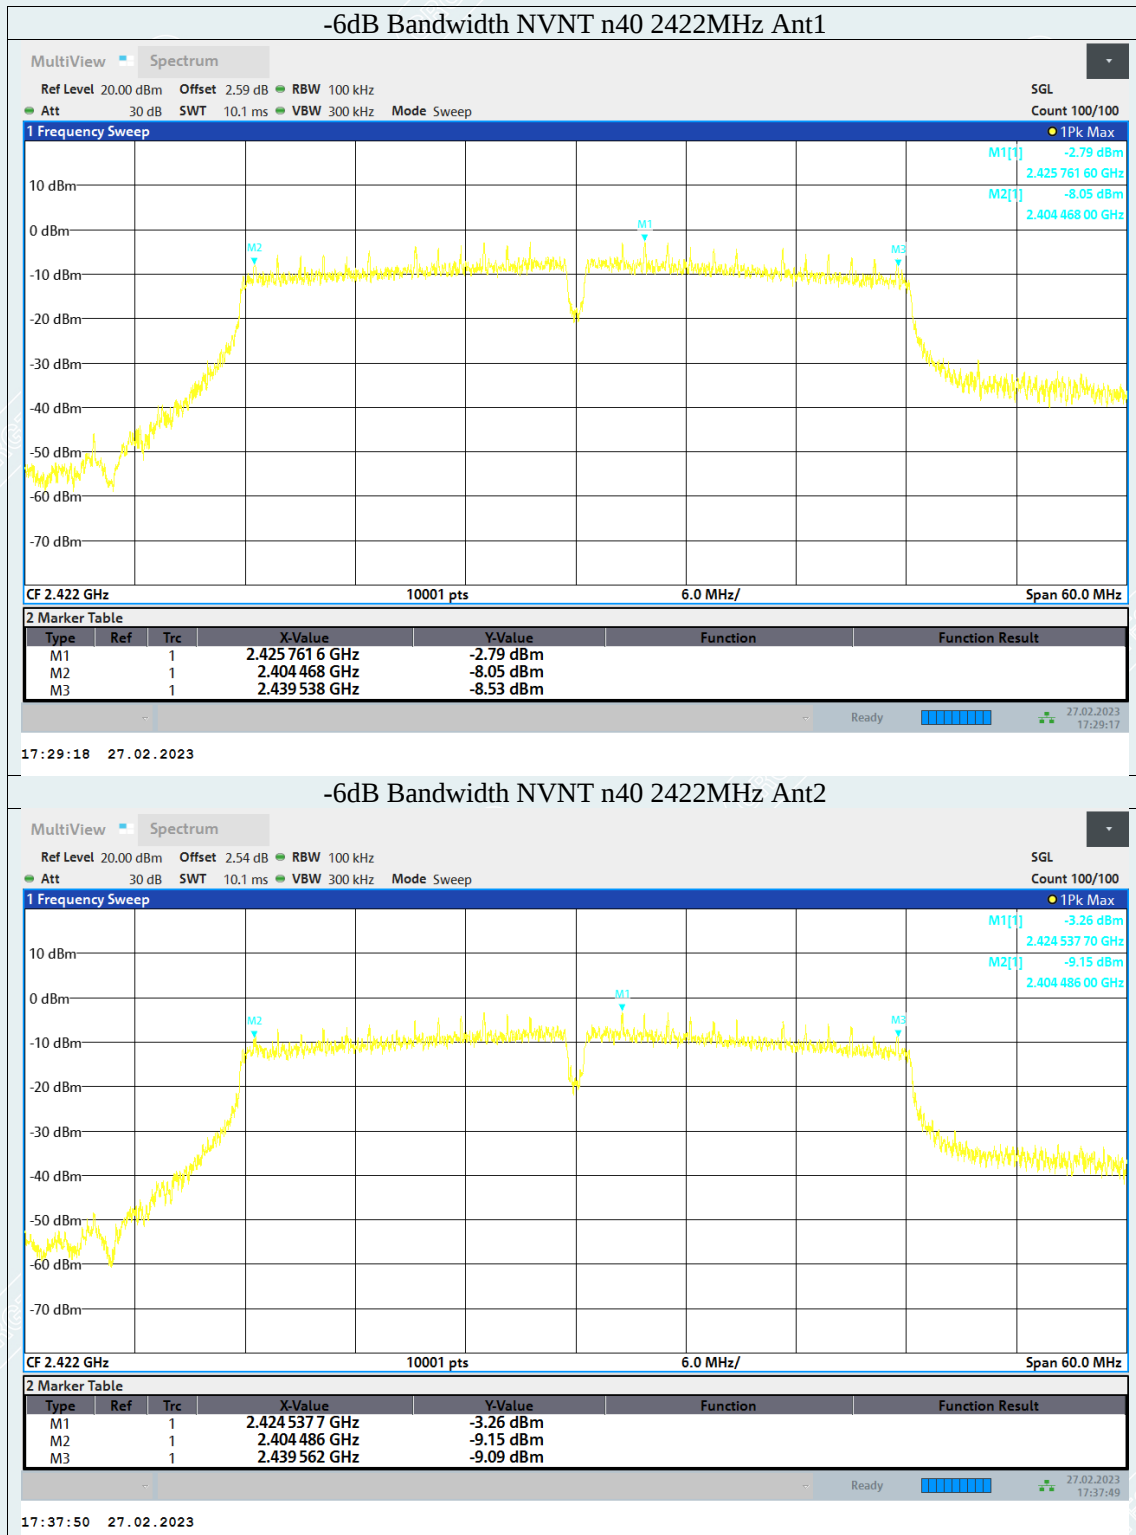


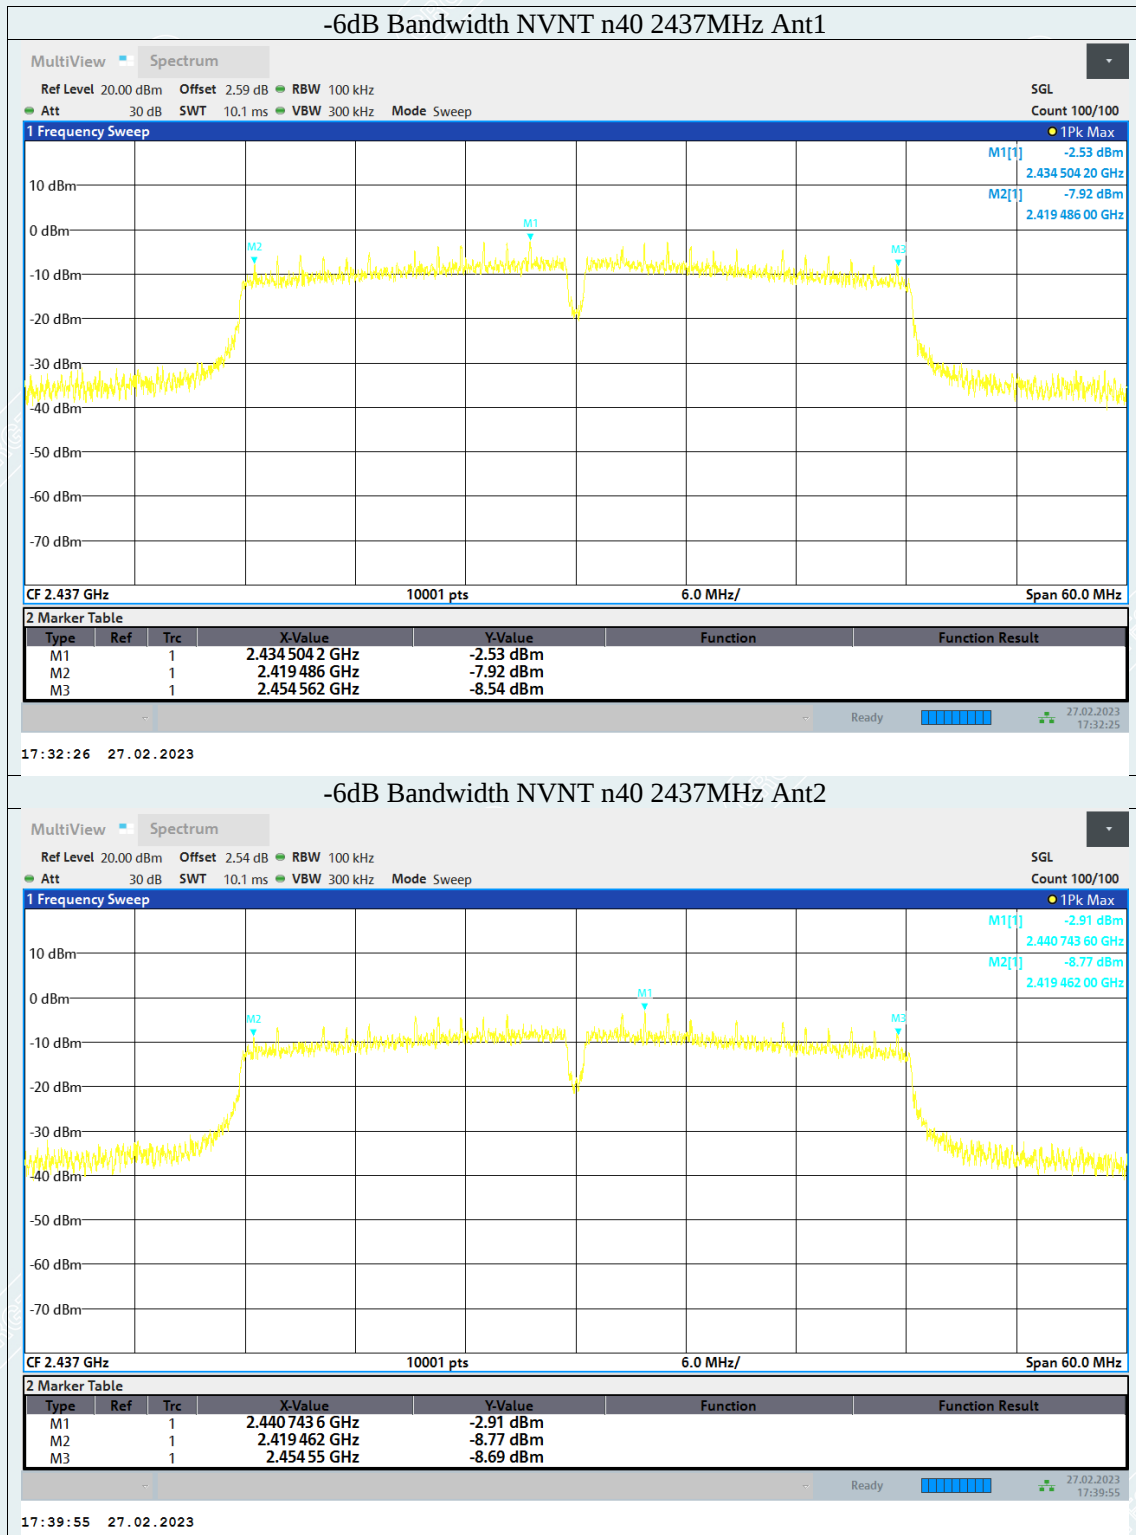


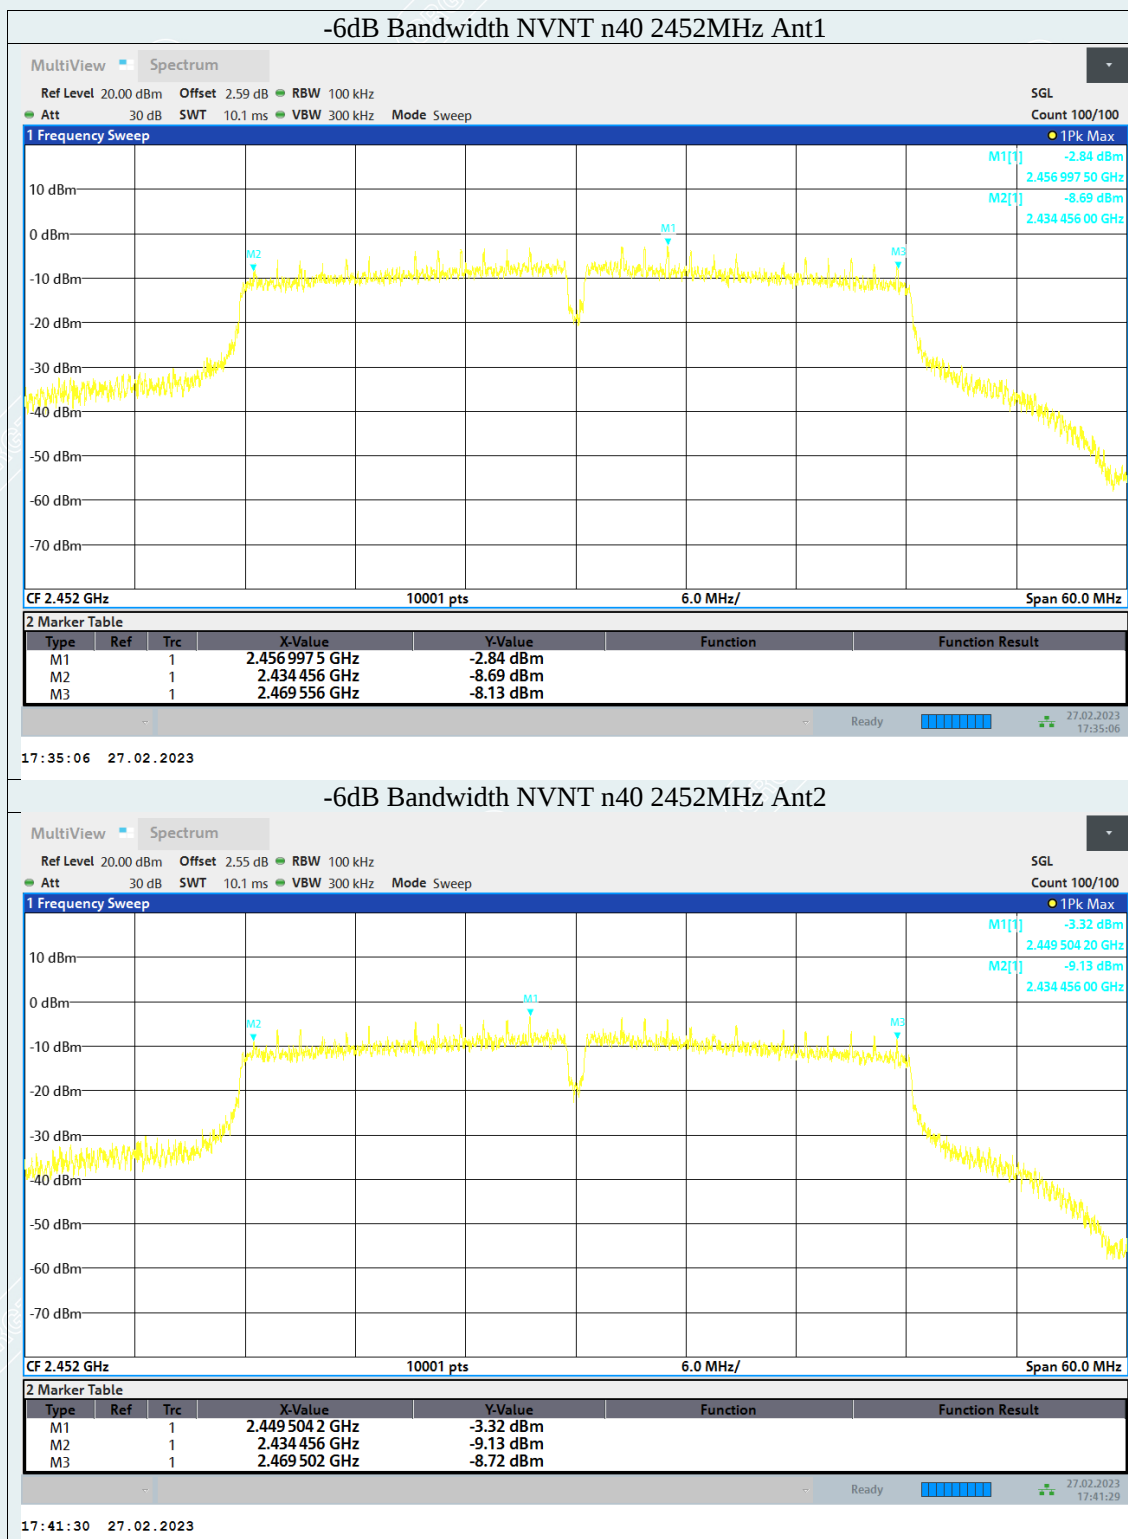


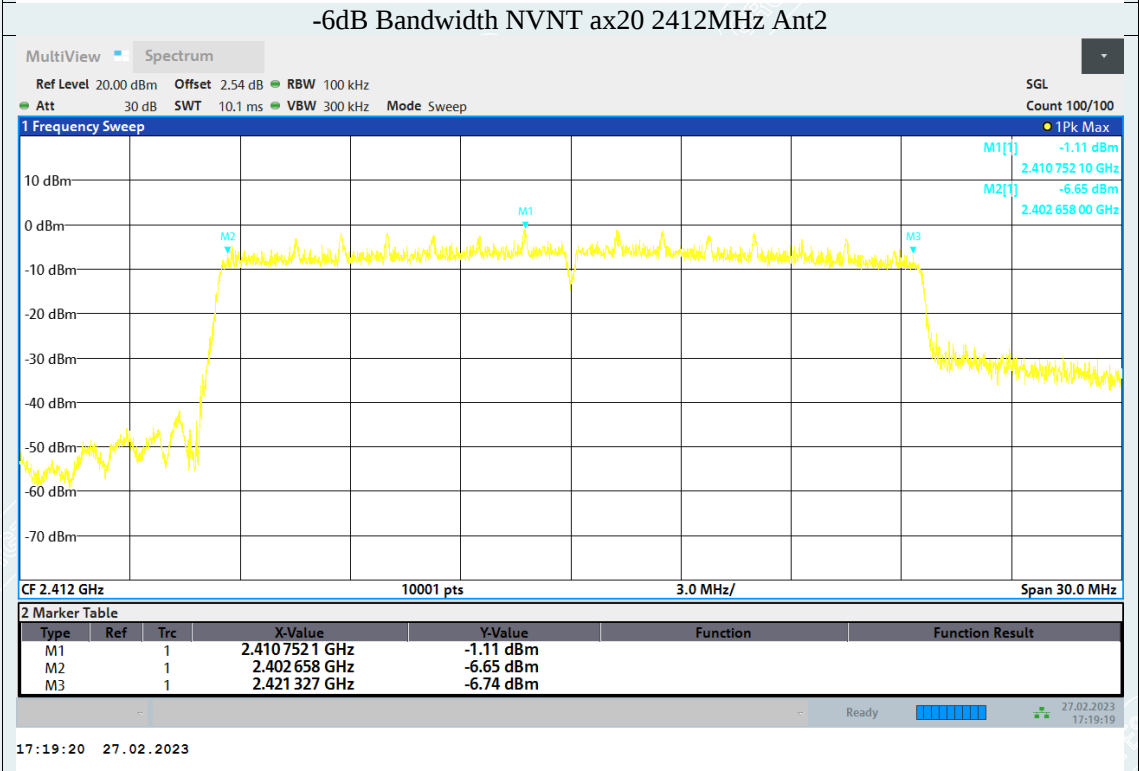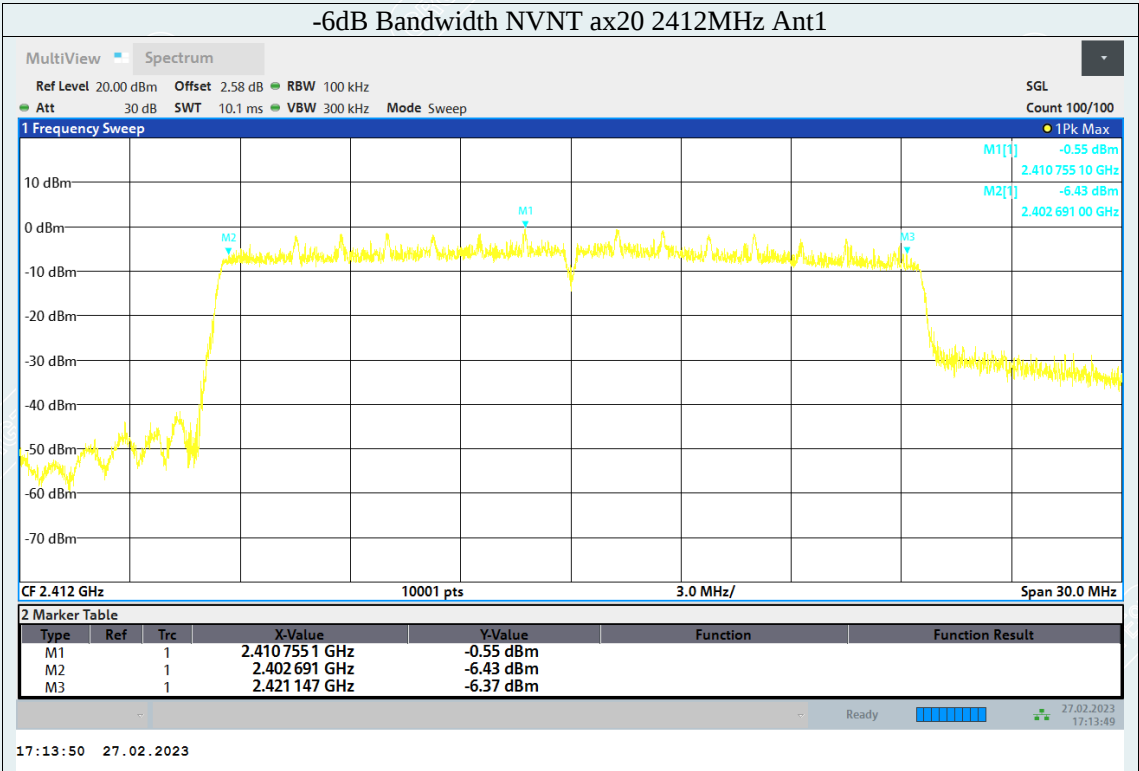


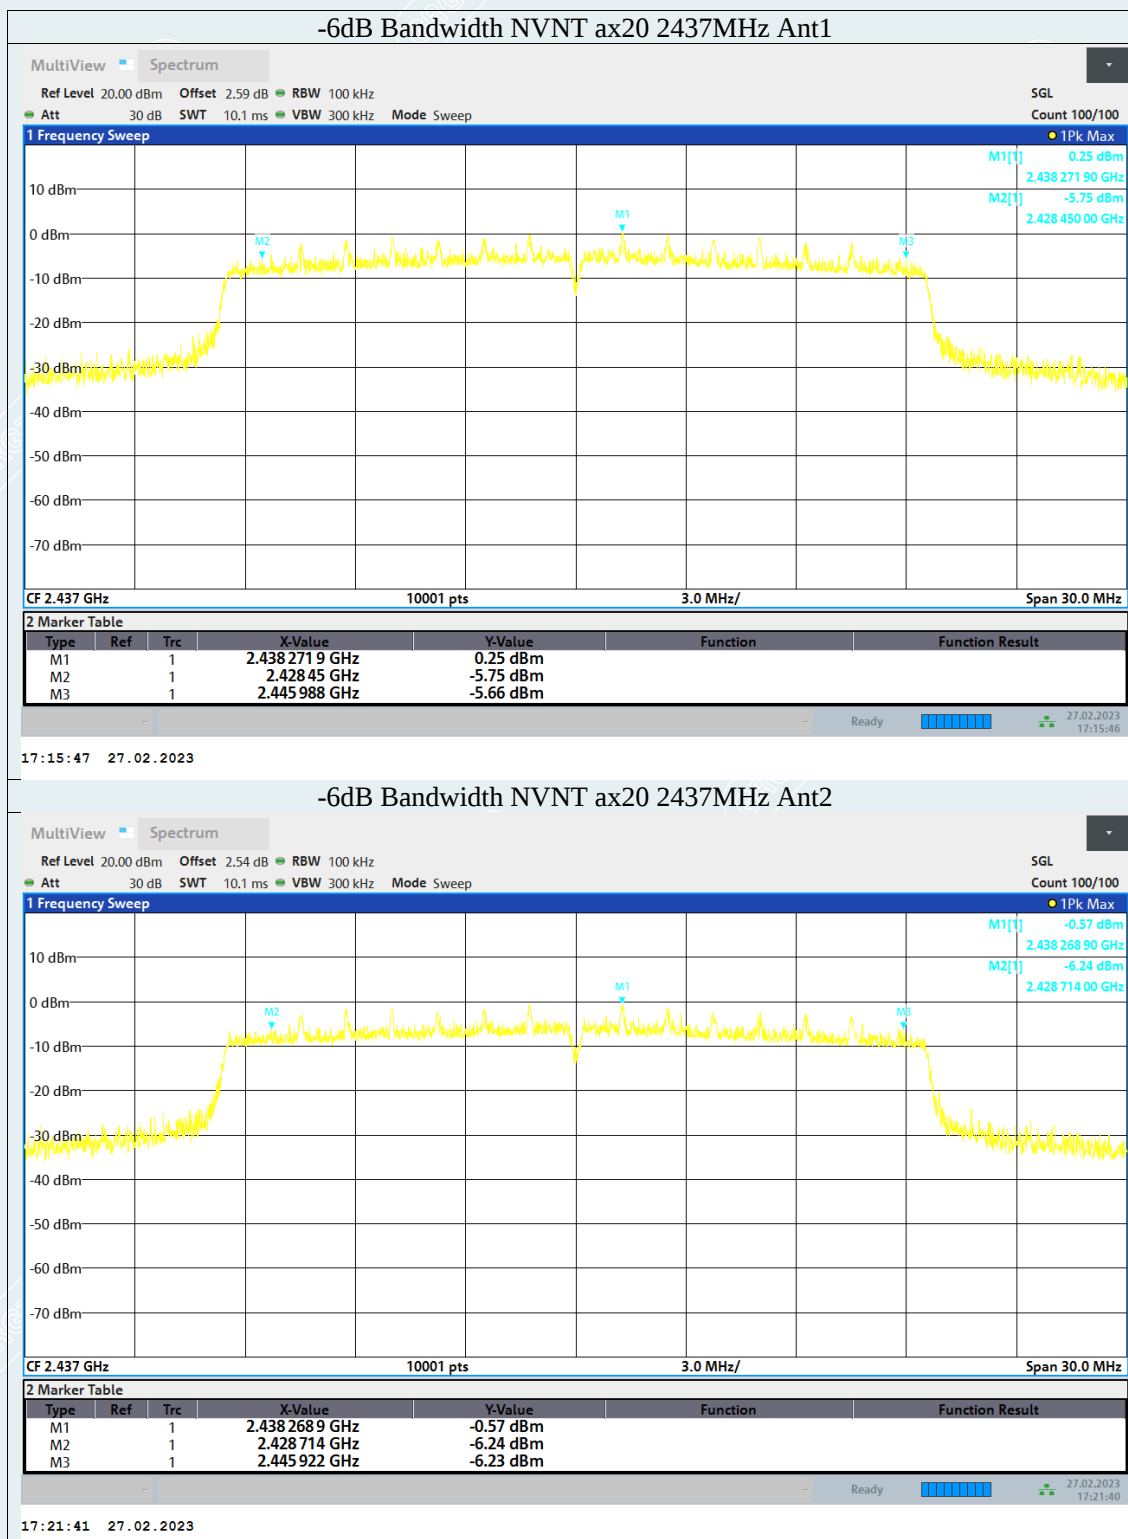

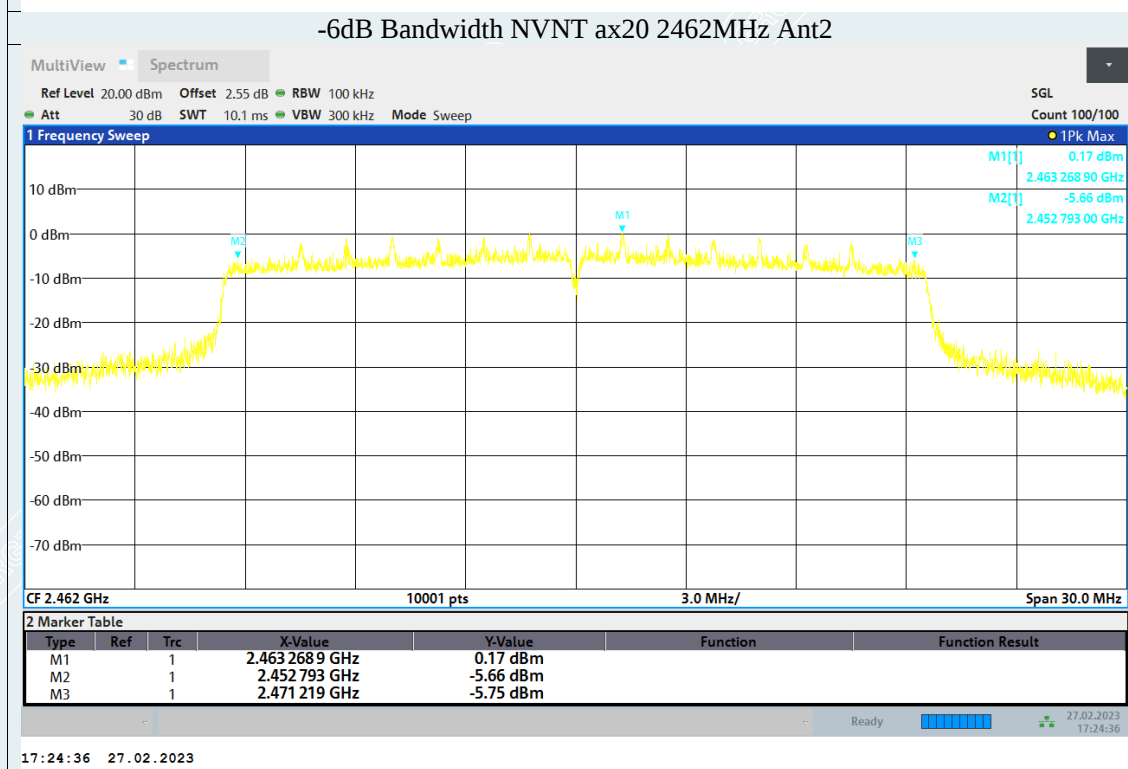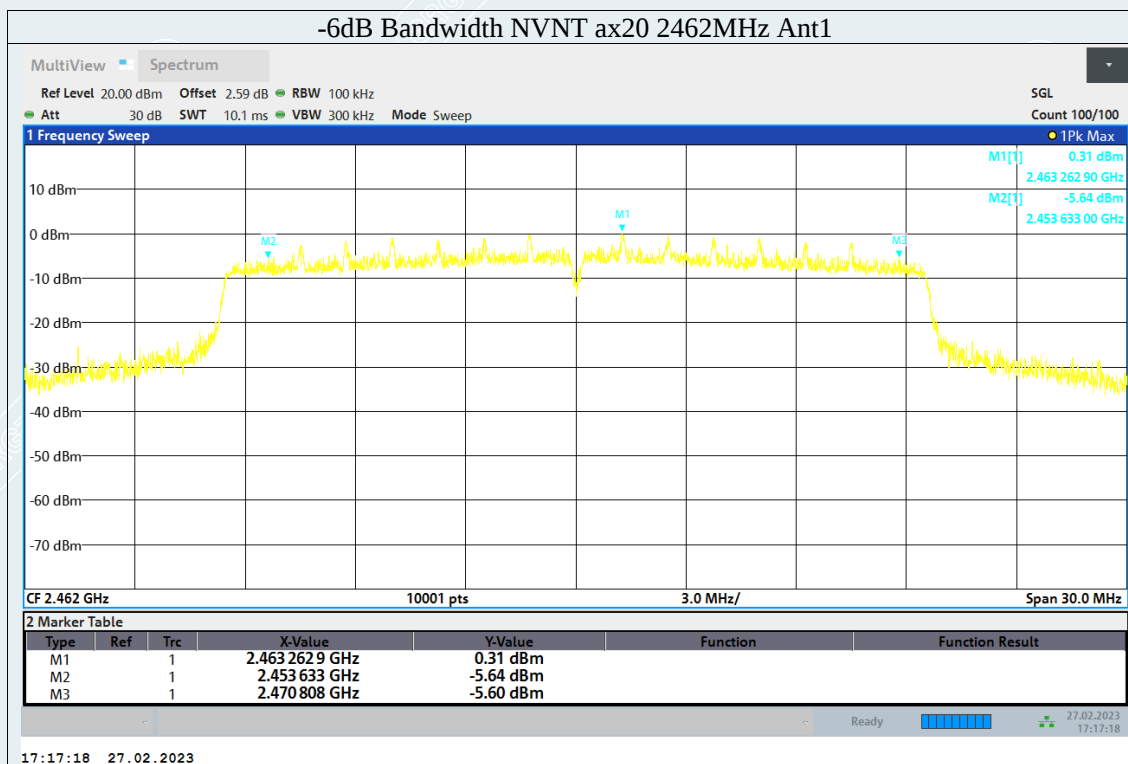

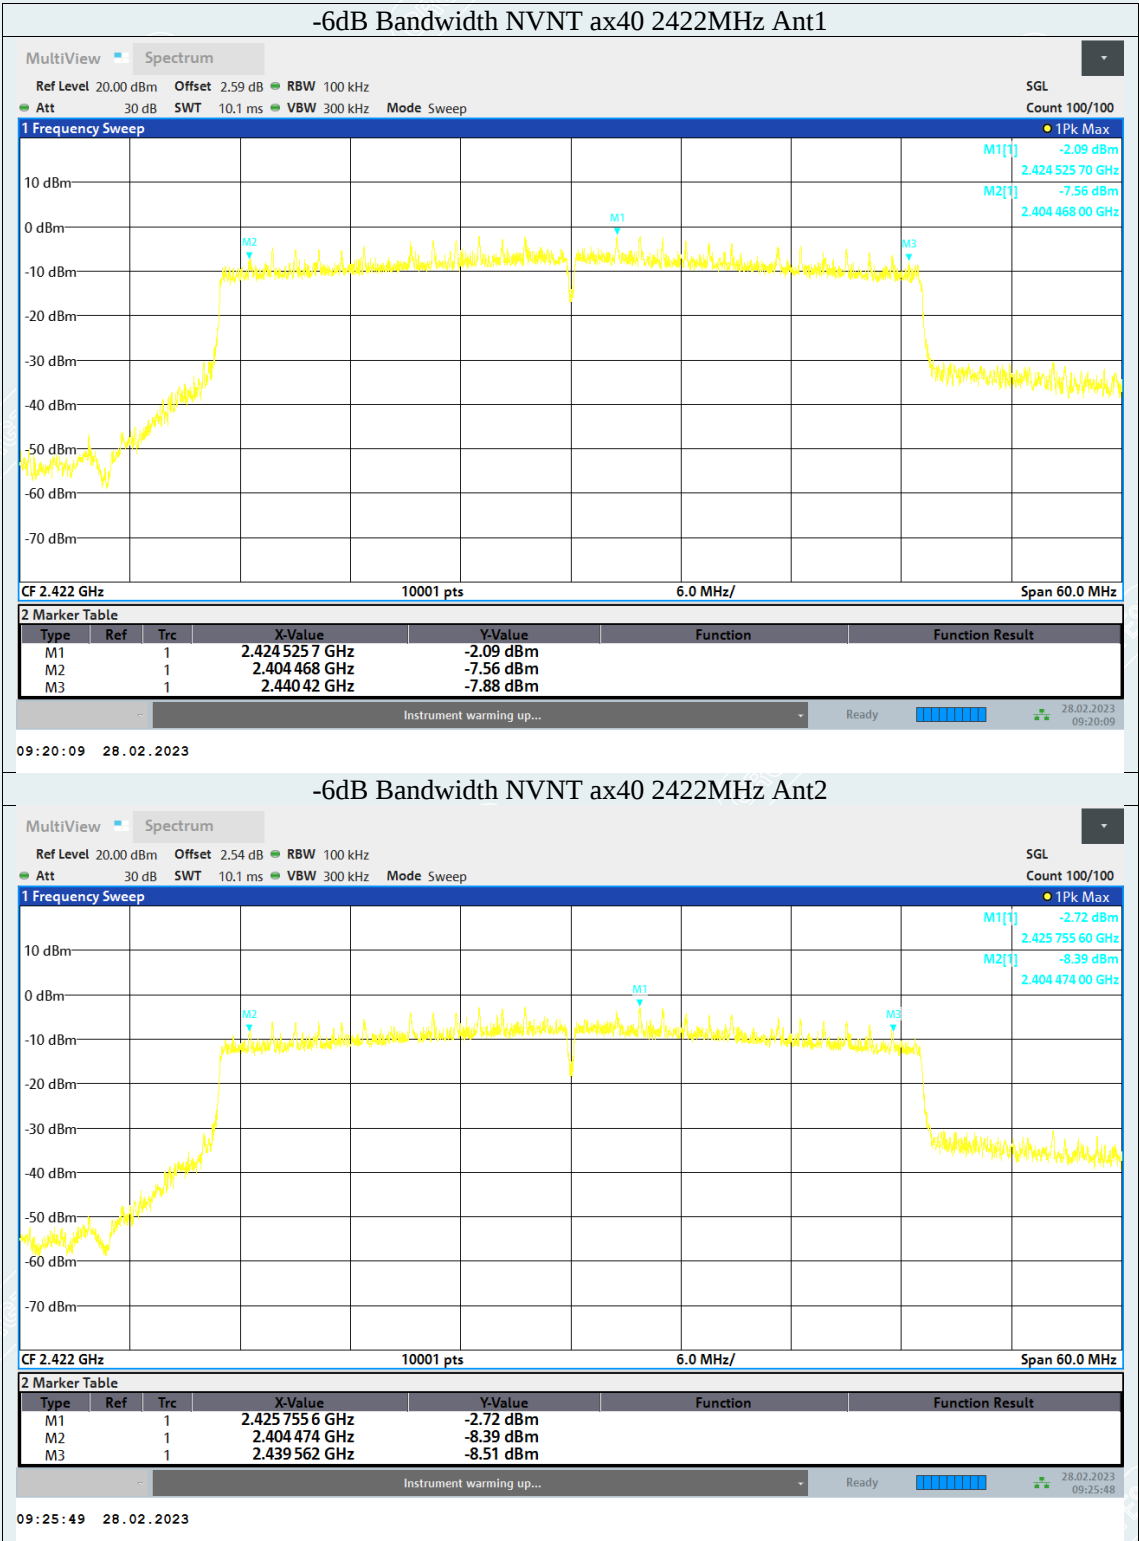

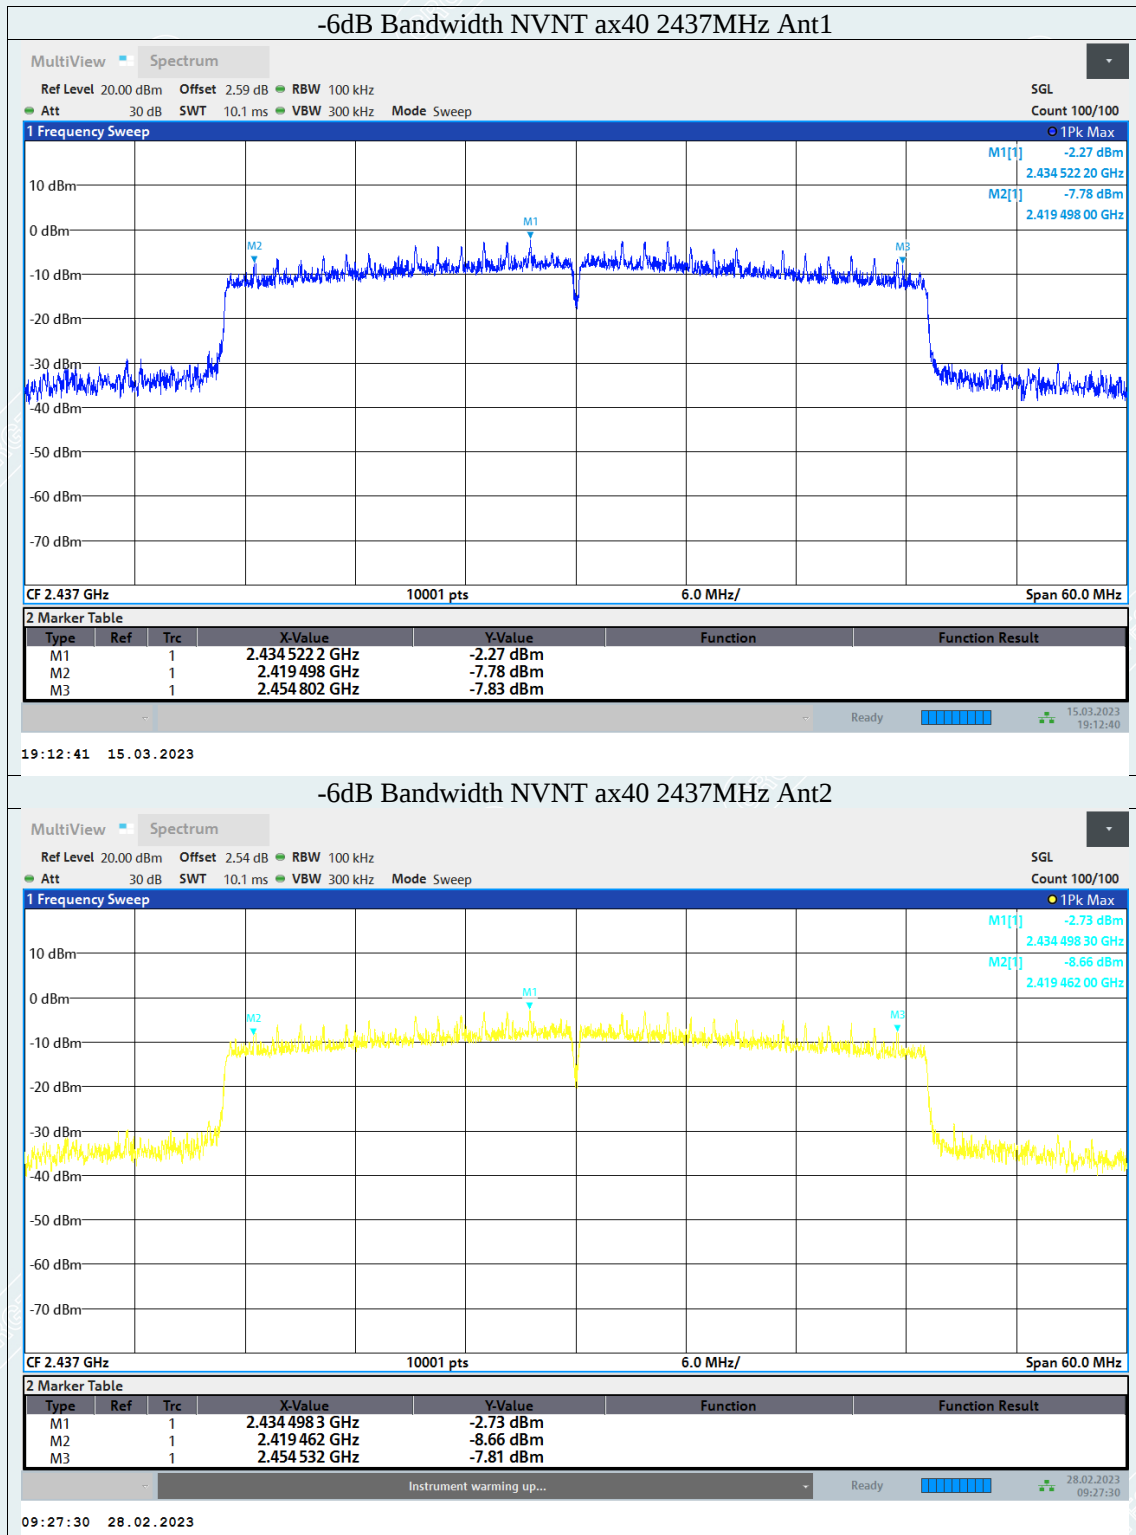

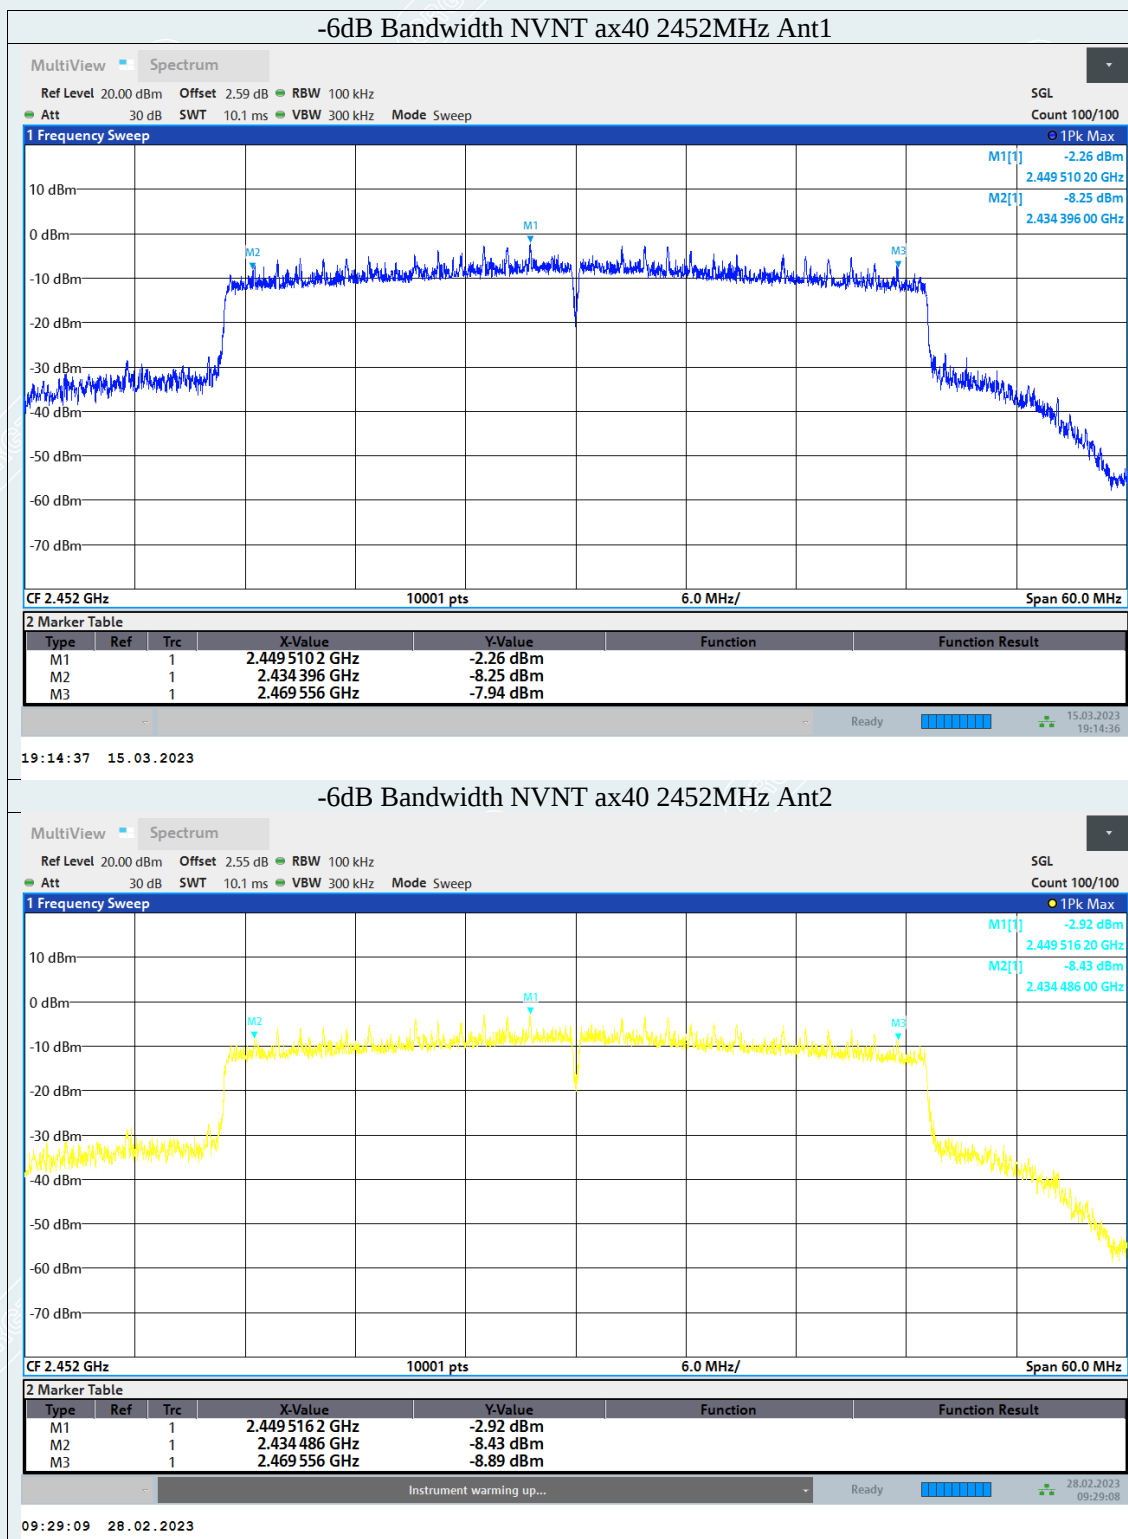

8. MAXIMUM PEAK OUTPUT POWER


8.1. LIMITS

The maximum Peak output power measurement is 1W

8.2. TEST PROCEDURES

- 1) RF output of EUT was connected to the broadband peak RF power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2) Set to the maximum power setting and enable the EUT transmit continuously.
- 3) Measure the conducted output power and record the results in the test report.

8.3. TEST SETUP

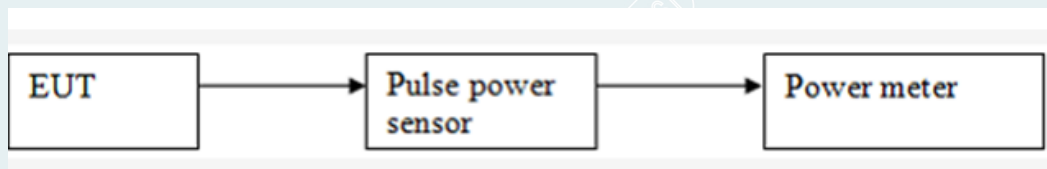

----- The following blanks -----

8.4. TEST RESULT

Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Yang zhaiyun

Voltage: AC120V/60Hz
 Date: 2023-02-27

802.11b Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	21.47	Peak	30dBm	Pass
6	2437	21.73			Pass
11	2462	21.65			Pass

802.11b Mode (antenna 2):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	21.16	Peak	30dBm	Pass
6	2437	20.78			Pass
11	2462	21.56			Pass

802.11g Mode (antenna 1):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	21.76	Peak	30dBm	Pass
6	2437	21.81			Pass
11	2462	21.84			Pass

802.11g Mode (antenna 2):

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	21.31	Peak	30dBm	Pass
6	2437	21.04			Pass
11	2462	21.87			Pass

802.11n HT20 Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/ AVG	Limit	Result
		antenna 1	antenna 2	total			
1	2412	17.66	17.13	20.41	Peak	30dBm	Pass
6	2437	17.68	17.03	20.38			Pass
11	2462	17.7	17.77	20.75			Pass

802.11n HT40 Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/ AVG	Limit	Result
		antenna 1	antenna 2	total			
3	2422	17.9	17.33	20.63	Peak	30dBm	Pass
6	2437	17.84	17.14	20.51			Pass
9	2452	17.77	16.97	20.4			Pass

802.11ax HE20 Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/ AVG	Limit	Result
		antenna 1	antenna 2	total			
1	2412	18.38	17.77	21.1	Peak	30dBm	Pass
6	2437	18.21	17.51	20.88			Pass
11	2462	18.24	18.3	21.28			Pass

802.11ax HE40 Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)			Peak/ AVG	Limit	Result
		antenna 1	antenna 2	total			
3	2422	19.24	18.29	21.8	Peak	30dBm	Pass
6	2437	18.59	18.17	21.4			Pass
9	2452	18.53	18.06	21.31			Pass

Note: 1. This EUT supports MIMO 2X2, any transmit signals are correlated with each other,
For power measurements on IEEE 802.11 devices, $\text{Array Gain} = 0 \text{ dB}$ (i.e., no array gain) for $N_{\text{ANT}} \leq 4$.

----- The following blanks -----

9. POWER SPECTRAL DENSITY


9.1. LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2. TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- 4) Repeat above procedures until all frequencies measured were complete.

9.3. TEST SETUP

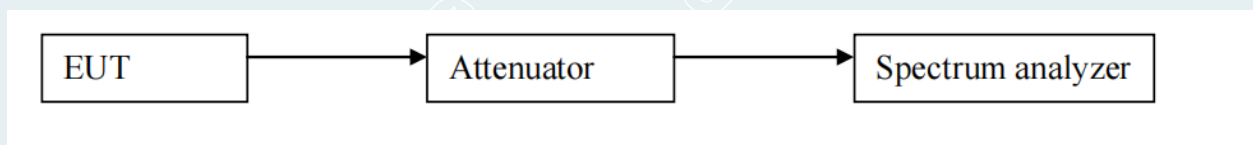

----- The following blanks -----

9.4. TEST RESULTS

Environment: 18.9°C/47%RH /101.1kPa
 Tested By: Yang zhaiyun

Voltage: AC120V/60Hz
 Date: 2023-02-27 to 2023-03-15

802.11b Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)		Limit (dBm/3kHz)	Result
		antenna 1	antenna 2		
1	2412	-2.77	-3.19	8.00	Pass
6	2437	-2.68	-4.27	8.00	Pass
11	2462	-2.62	-2.67	8.00	Pass

802.11g Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)		Limit (dBm/3kHz)	Result
		antenna 1	antenna 2		
1	2412	-9.13	-9.88	8.00	Pass
6	2437	-9.56	-9.82	8.00	Pass
11	2462	-9.46	-9.68	8.00	Pass

802.11n HT20 Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		antenna 1	antenna 2	total		
1	2412	-13.76	-14.65	-11.17	7.85	Pass
6	2437	-13.56	-13.88	-10.71	7.85	Pass
11	2462	-14.27	-14.66	-11.45	7.85	Pass

802.11n HT40 Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		antenna 1	antenna 2	total		
3	2422	-16.17	-16.86	-13.49	7.85	Pass
6	2437	-14.49	-16.71	-12.45	7.85	Pass
9	2452	-15.97	-16.94	-13.42	7.85	Pass

802.11ax HE20 Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		antenna 1	antenna 2	total		
1	2412	-14.23	-15.53	-11.82	7.85	Pass
6	2437	-14.76	-15.07	-11.9	7.85	Pass
11	2462	-13.95	-14.47	-11.19	7.85	Pass

802.11ax HE40 Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)	Result
		antenna 1	antenna 2	total		
3	2422	-16.7	-17.46	-14.05	7.85	Pass
6	2437	-16.09	-17.52	-13.74	7.85	Pass
9	2452	-17.34	-16.49	-13.88	7.85	Pass

Note1: This EUT supports MIMO 2X2, any transmit signals are correlated with each other,
So Directional gain = $3.14 + 10\log(2)$ dBi, HT20, HT40, HE20, HE40 mode: Directional gain (dBi) = 6.15.
Note2: Antenna gain is greater than 6, HT20, HT40, HE20, HE40 mode: PSD limit = $8 - (6.15 - 6) = 7.85$ dBm.

----- The following blanks -----

