

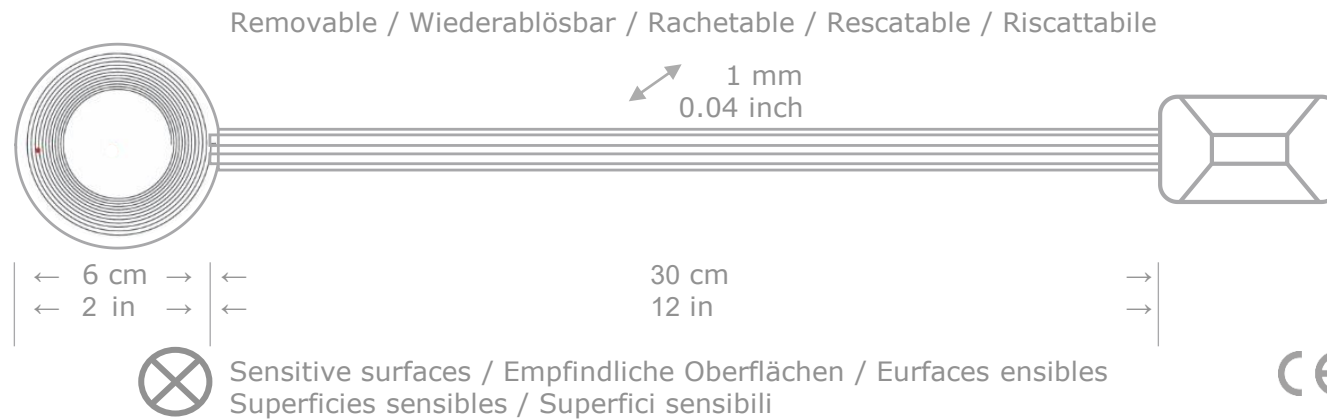
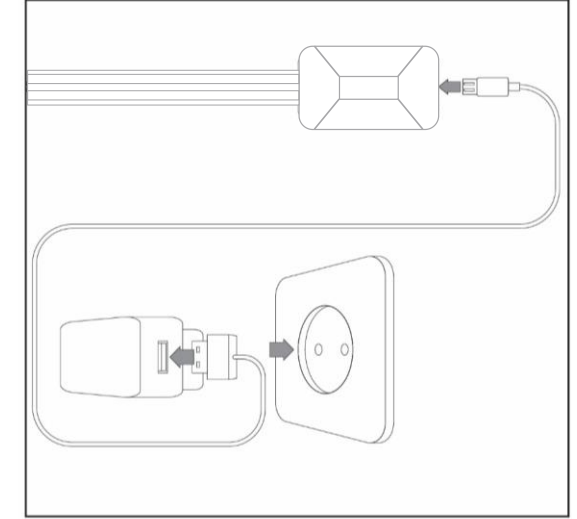
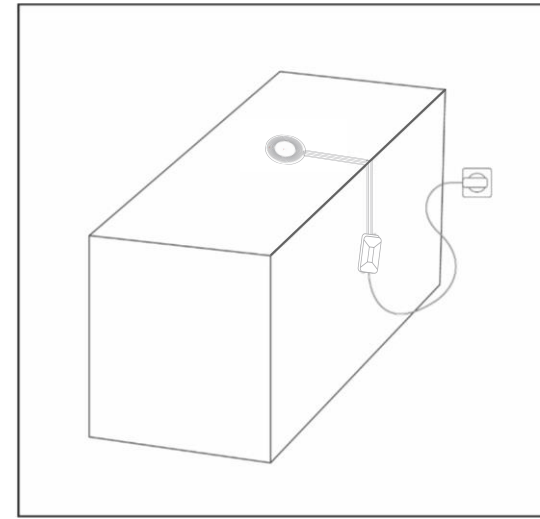


## V-Juice Model 1.0

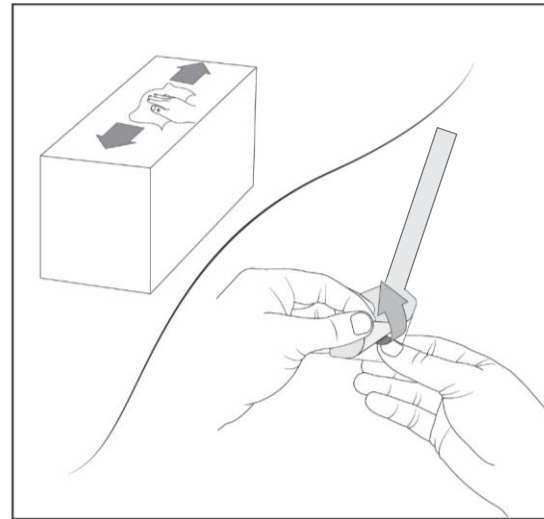

FCC ID: 2AV30-V-JUICE1

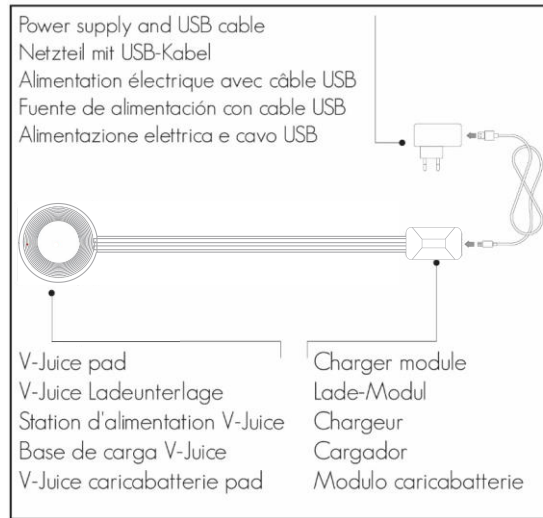

### Input:

- Micro-USB
- 5 Volt
- min. 0.8 A

### Output:

- 5 Volt
- $\leq 1A$

Patent pending  
Design patents pending

ROHS compliant

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.  
During operation, a distance of at least 20 cm must be maintained between the charging coil and the operator / bystander.

## V-Juice Model 1.0

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

The LED indicate different working modes and functions. On power-up with no Qi device placed on the charger, the green and red indicators blink three times. Once a charging device, like a phone is placed on the pad, a blinking green indicates the ongoing charging process. Once the charging is completed, the green indicator stays on. A blinking red indicator might show an error or the charging device is not correctly or centered placed on the charging pad/coil.