

# FCC REPORT

**Applicant:** Dongguan KAKA Electronic Technology Co., Ltd.

**Address of Applicant:** No.395, Huansi East Road, Shitanpu, Tangxia Town, Dongguan, Guangdong, China.

## Equipment Under Test (EUT)

**Product Name:** TOOTHBRUSH

**Model No.:** GF-7

**FCC ID:** 2AV4E-GF-7

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.209

**Date of sample receipt:** 11 Dec., 2019

**Date of Test:** 12 Dec., to 07 Jan., 2020

**Date of report issue:** 08 Jan., 2020

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

**2 Version**

Version No.	Date	Description
00	08 Jan., 2020	<i>Original</i>

**Tested By:**Mike.Ou**Test Engineer****Date:** 08 Jan., 2020**Reviewed By:**Winner Zhang**Project Engineer****Date:** 08 Jan., 2020

### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	1
<b>2 VERSION</b> .....	2
<b>3 CONTENTS</b> .....	3
<b>4 TEST SUMMARY</b> .....	4
<b>5 GENERAL INFORMATION</b> .....	5
5.1    CLIENT INFORMATION.....	5
5.2    GENERAL DESCRIPTION OF E.U.T.....	5
5.3    TEST MODE .....	5
5.4    DESCRIPTION OF SUPPORT UNITS.....	5
5.5    MEASUREMENT UNCERTAINTY.....	5
5.6    ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	6
5.7    LABORATORY FACILITY.....	6
5.8    LABORATORY LOCATION .....	6
5.9    TEST INSTRUMENTS LIST.....	6
<b>6 TEST RESULTS AND MEASUREMENT DATA</b> .....	7
6.1    ANTENNA REQUIREMENT.....	7
6.2    RADIATED EMISSION .....	8
6.3    CONDUCTED EMISSION .....	19
6.4    20dB BANDWIDTH.....	24
<b>7 TEST SETUP PHOTOS</b> .....	27
<b>8 EUT CONSTRUCTIONAL PHOTOS</b> .....	31

## 4 Test Summary

Test Item	Section in CFR 47	Result
Spurious emissions	15.209	Pass
20dB Bandwidth	15.215(c)	Pass
Conducted Emission	15.207	Pass
<b>Remark:</b>		
1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).		
<b>Test Method:</b>	ANSI C63.4-2014 ANSI C63.10-2013	

## 5 General Information

### 5.1 Client Information

Applicant:	Dongguan KAKA Electronic Technology Co., Ltd.
Address:	No.395, Huansi East Road, Shitanpu, Tangxia Town, Dongguan, Guangdong, China.
Manufacturer/Factory:	Dongguan KAKA Electronic Technology Co., Ltd.
Address:	No.395, Huansi East Road, Shitanpu, Tangxia Town, Dongguan, Guangdong, China

### 5.2 General Description of E.U.T.

Product Name:	TOOTHBRUSH
Model No.:	GF-7
Operation Frequency:	451.15 kHz~466.55 kHz
Modulation type:	ASK
Antenna Type:	Coil Antenna
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Power supply:	Rechargeable Li-ion polymer Battery DC3.7V/320mAh
Wireless charger:	Wall hanging: Input: 5V, 0.5A Output: 5V, 0.5A Charging box: Input: 5V, 0.5A Output: 5V, 0.5A

### 5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation
--------------------	---

### 5.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Xiaomi Inc.	Adapter	MDY-03-EB	N/A	N/A

### 5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB
Radiated Emission (18GHz ~ 26.5GHz)	±3.36 dB

## 5.6 Additions to, deviations, or exclusions from the method

No

## 5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366  
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


## 5.9 Test Instrumentslist

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Loop Antenna	SCHWARZBECK	FMZB 1519 B	00044	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Simulated Station	Anritsu	MT8820C	6201026545	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2021
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	6.110919b	N/A	N/A


## 6 Test results and Measurement Data

### 6.1 Antenna requirement

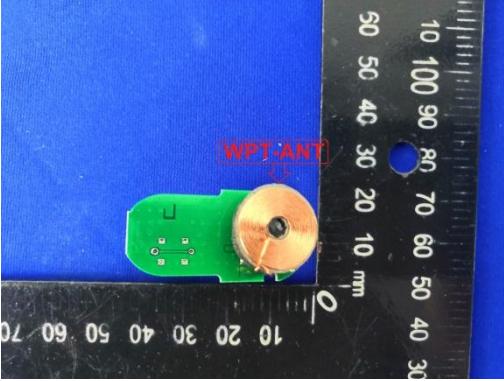Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	
	
(Wall hanging)	(Charging box)
	
(Toothbrush)	

## 6.2 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209						
Test Frequency Range:	9kHz to 1000MHz						
Test site:	Measurement Distance: 3m(Semi-Anechoic Chamber)						
Receiver setup:	Frequency	Detector	RBW	VBW	Remark		
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak Value		
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value		
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value		
	Above 1GHz	Peak	1MHz	3MHz	Peak Value		
Limit:	Frequency (MHz)	Limit (uV/m @3m)		Distance (m)			
	0.009-0.490	2400/F(kHz)		300			
	0.490-1.705	24000/F(kHz)		30			
	1.705-30	30		30			
	30-88	100		3			
	88-216	150		3			
	216-960	200		3			
Test Procedure:	Above 1GHz	500		3			
	a.	The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.					
	b.	The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.					
	c.	The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.					
	d.	For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.					
	e.	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.					
	f.	If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Test setup:	<p>9kHz-30MHz</p> <p>30MHz-1GHz</p>						

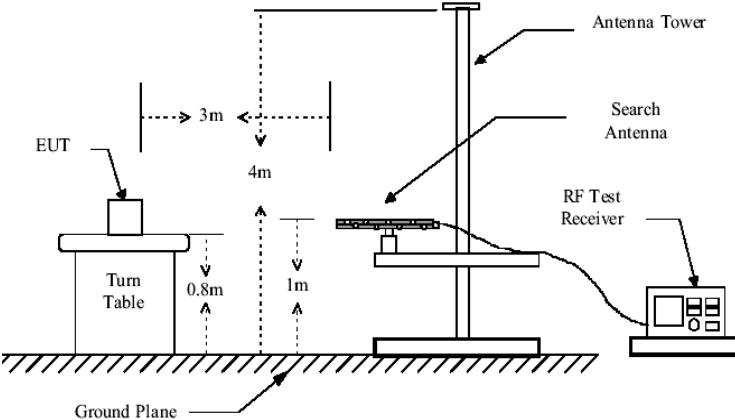	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass
Remark:	The emission levels of above 1 GHz are very lower than the limit and not show in test report.

**Measurement Data:****a) Fundamental field strength****Wall hanging:**

<b>Peak value</b>				
Test Polarization	Frequency (kHz)	H-field@3m (dB $\mu$ V)	Limit@3m (dB $\mu$ V)	Result
Horizontal	458.85	48.39	114.37	Pass
Vertical	458.85	36.40	114.37	Pass
<b>Average value</b>				
Test Polarization	Frequency (kHz)	H-field@3m (dB $\mu$ V)	Limit@3m (dB $\mu$ V)	Result
Horizontal	458.85	32.43	94.37	Pass
Vertical	458.85	28.96	94.37	Pass

**Charging box:**


<b>Peak value</b>				
Test Polarization	Frequency (kHz)	H-field@3m (dB $\mu$ V)	Limit@3m (dB $\mu$ V)	Result
Horizontal	458.85	55.74	114.37	Pass
Vertical	458.85	50.47	114.37	Pass
<b>Average value</b>				
Test Polarization	Frequency (kHz)	H-field@3m (dB $\mu$ V)	Limit@3m (dB $\mu$ V)	Result
Horizontal	458.85	49.86	94.37	Pass
Vertical	458.85	43.65	94.37	Pass

## b) Radiated spurious:

Wall hanging:

Below 1GHz:

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	9kHz~30MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

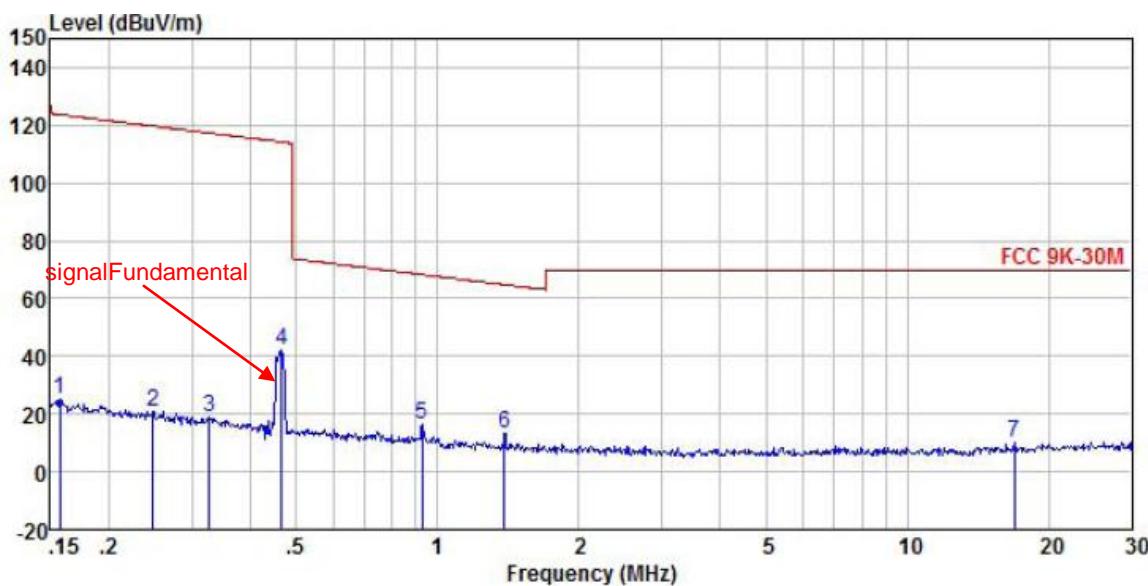


Freq MHz	ReadAntenna Level Factor		Cable Preamp Loss Factor		Limit Level dBuV/m	Over Line Limit dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB				
1	0.157	-0.69	-26.17	0.28	0.00	24.92	123.69	-98.77 Peak
2	0.248	-4.61	-26.22	0.34	0.00	21.01	119.72	-98.71 Peak
3	0.327	-7.02	-26.25	0.36	0.00	18.59	117.32	-98.73 Peak
4	0.466	16.54	-26.29	0.43	0.00	42.18	114.23	-72.05 Peak
5	0.928	-9.65	-26.30	0.60	0.00	16.15	68.27	-52.12 Peak
6	1.388	-12.42	-26.39	0.63	0.00	13.32	64.78	-51.46 Peak
7	16.928	-15.76	-26.46	0.68	0.00	9.96	69.50	-59.54 Peak

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of 9KHz~150KHz are lower than the limit 20dB and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	9kHz~30MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

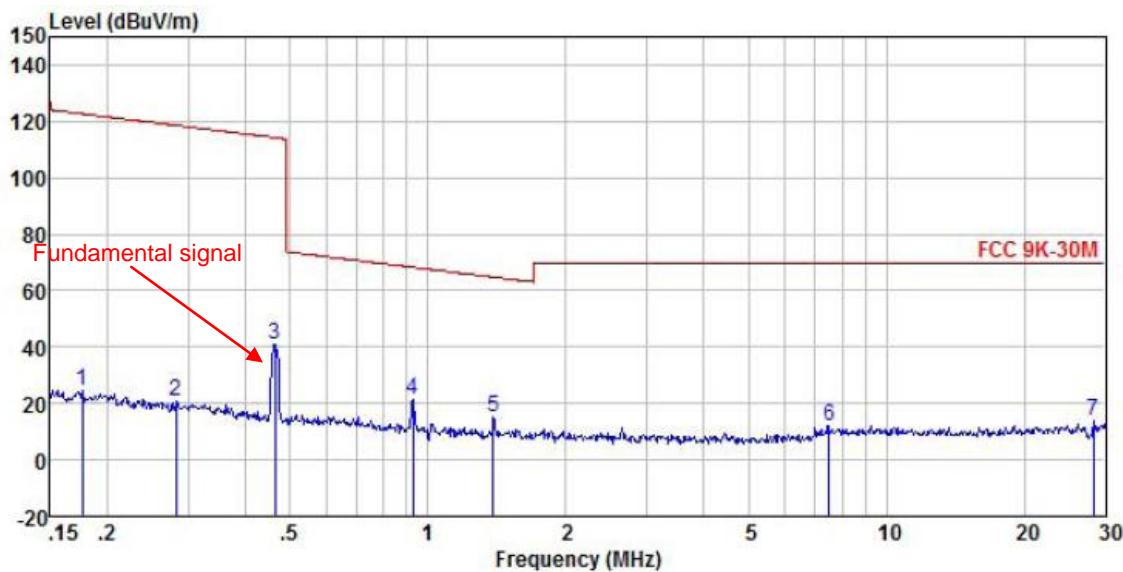


Freq MHz	ReadAntenna Level Factor		Cable Preamp Loss Factor		Limit Level dBuV/m	Over Line Limit dB	Over Limit Remark
	MHz	dBuV	dB/m	dB			
1	0.176	-0.84	-26.18	0.30	0.00	24.78	122.72 -97.94 Peak
2	0.282	-4.68	-26.24	0.35	0.00	20.93	118.61 -97.68 Peak
3	0.464	15.53	-26.29	0.42	0.00	41.16	114.28 -73.12 Peak
4	0.928	-4.21	-26.30	0.60	0.00	21.59	68.27 -46.68 Peak
5	1.388	-10.91	-26.39	0.63	0.00	14.83	64.78 -49.95 Peak
6	7.486	-13.55	-26.48	0.50	0.00	11.97	69.50 -57.53 Peak
7	28.302	-13.13	-24.98	0.74	0.00	14.13	69.50 -55.37 Peak

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of 9KHz~150KHz are lower than the limit 20dB and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

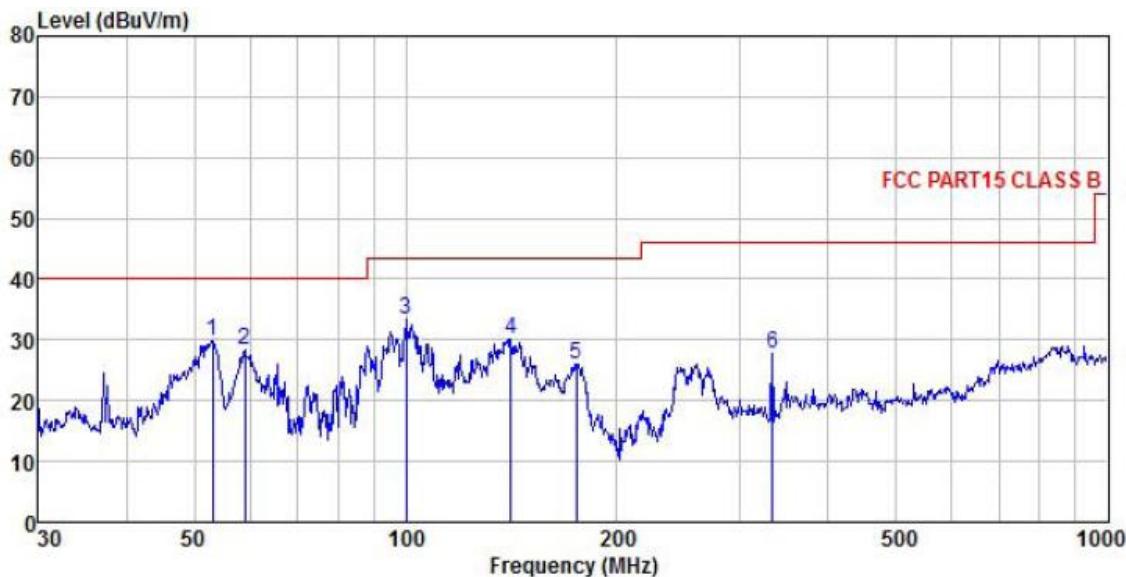


Freq MHz	Read	Antenna Level	Cable Loss	Preamp Factor	Limit Line	Over Limit	Over Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 53.131	46.62	11.78	1.32	29.81	29.91	40.00	-10.09 QP
2 59.025	45.38	11.44	1.38	29.78	28.42	40.00	-11.58 QP
3 100.229	48.55	12.50	1.94	29.53	33.46	43.50	-10.04 QP
4 141.330	47.61	9.42	2.42	29.27	30.18	43.50	-13.32 QP
5 175.037	42.58	9.81	2.69	29.01	26.07	43.50	-17.43 QP
6 332.519	38.89	14.28	3.04	28.52	27.69	46.00	-18.31 QP

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

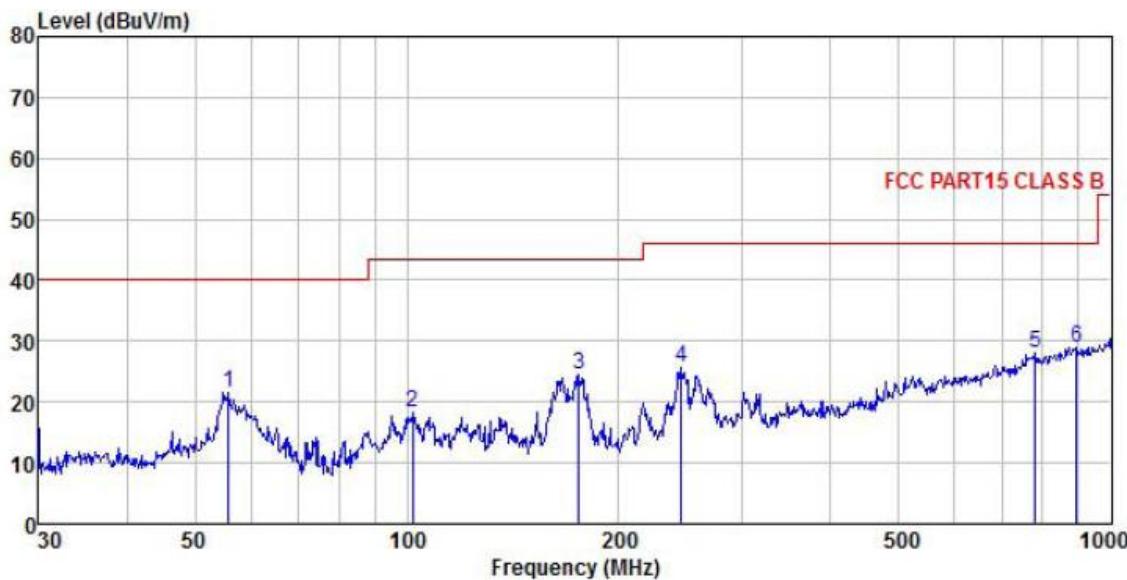

Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss Factor dB	Preamp Level dB	Line Limit dBuV/m	Over Line Limit dB	Over Limit Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1 55.805	38.50	11.56	1.36	29.80	21.62	40.00	-18.38 QP
2 102.001	33.55	12.35	1.96	29.51	18.35	43.50	-25.15 QP
3 175.652	40.92	9.84	2.70	29.01	24.45	43.50	-19.05 QP
4 245.090	38.87	12.50	2.82	28.57	25.62	46.00	-20.38 QP
5 779.607	30.96	21.16	4.35	28.31	28.16	46.00	-17.84 QP
6 893.857	30.54	22.51	3.77	27.89	28.93	46.00	-17.07 QP


## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

## Charging box:

Below 1GHz:

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	9kHz~30MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

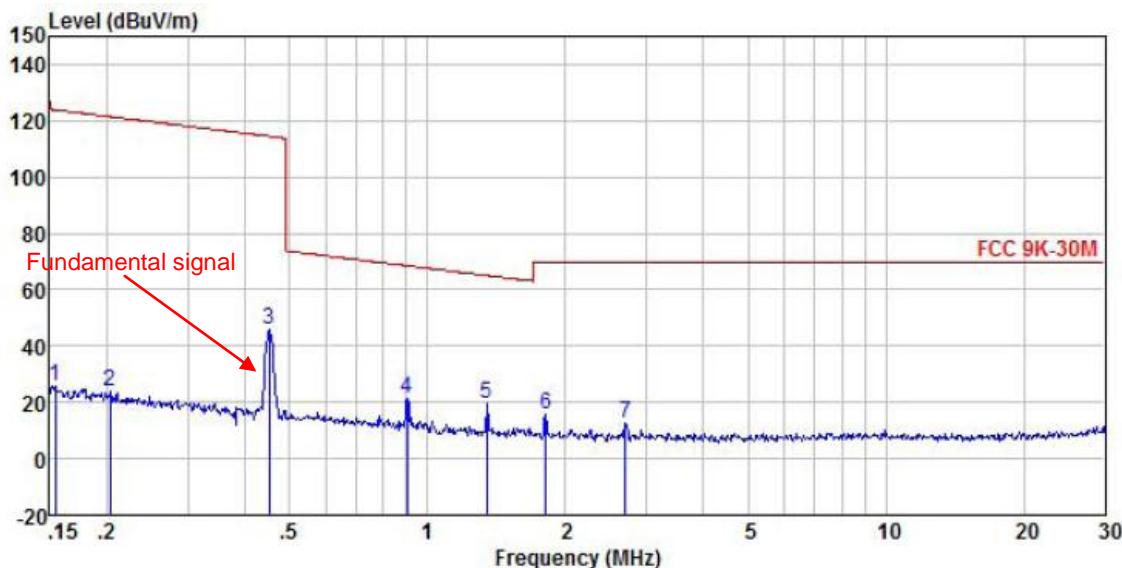


Freq MHz	ReadAntenna		Cable		Preamp Level	Limit dBuV/m	Over Line	Over Limit	Remark
	Freq MHz	Level dBuV	Antenna Factor	Cable Loss dB					
1	0.154	-0.11	-26.16	0.27	0.00	25.50	123.87	-98.37	Peak
2	0.203	-1.86	-26.20	0.33	0.00	23.77	121.47	-97.70	Peak
3	0.452	20.00	-26.29	0.41	0.00	45.62	114.51	-68.89	Peak
4	0.904	-4.34	-26.30	0.60	0.00	21.46	68.50	-47.04	Peak
5	1.345	-6.38	-26.38	0.63	0.00	19.37	65.05	-45.68	Peak
6	1.810	-10.04	-26.47	0.64	0.00	15.63	69.50	-53.87	Peak
7	2.707	-13.19	-26.53	0.65	0.00	12.43	69.50	-57.07	Peak

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of 9KHz~150KHz are lower than the limit 20dB and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	9kHz~30MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

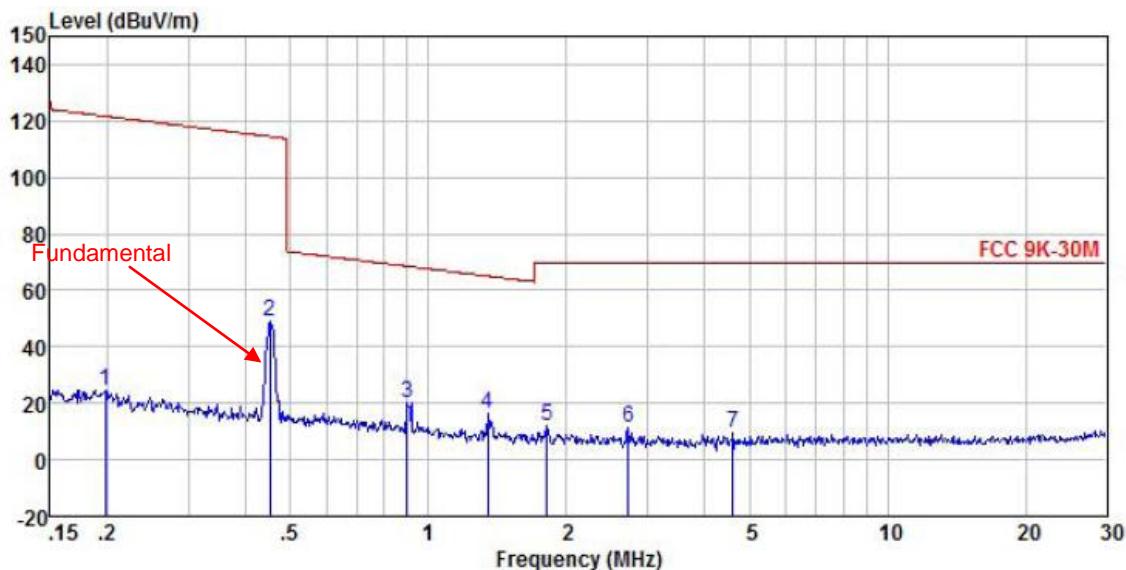


Freq	Read	Antenna	Cable	Preamp	Limit	Over	Over	
	Freq	Level	Factor	Loss				Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	0.198	-0.84	-26.20	0.33	0.00	24.79	121.70	-96.91 Peak
2	0.452	23.42	-26.29	0.41	0.00	49.04	114.51	-65.47 Peak
3	0.899	-5.45	-26.30	0.60	0.00	20.35	68.54	-48.19 Peak
4	1.345	-9.39	-26.38	0.63	0.00	16.36	65.05	-48.69 Peak
5	1.810	-13.82	-26.47	0.64	0.00	11.85	69.50	-57.65 Peak
6	2.721	-14.48	-26.53	0.65	0.00	11.14	69.50	-58.36 Peak
7	4.598	-16.04	-26.59	0.61	0.00	9.48	69.50	-60.02 Peak

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of 9KHz~150KHz are lower than the limit 20dB and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

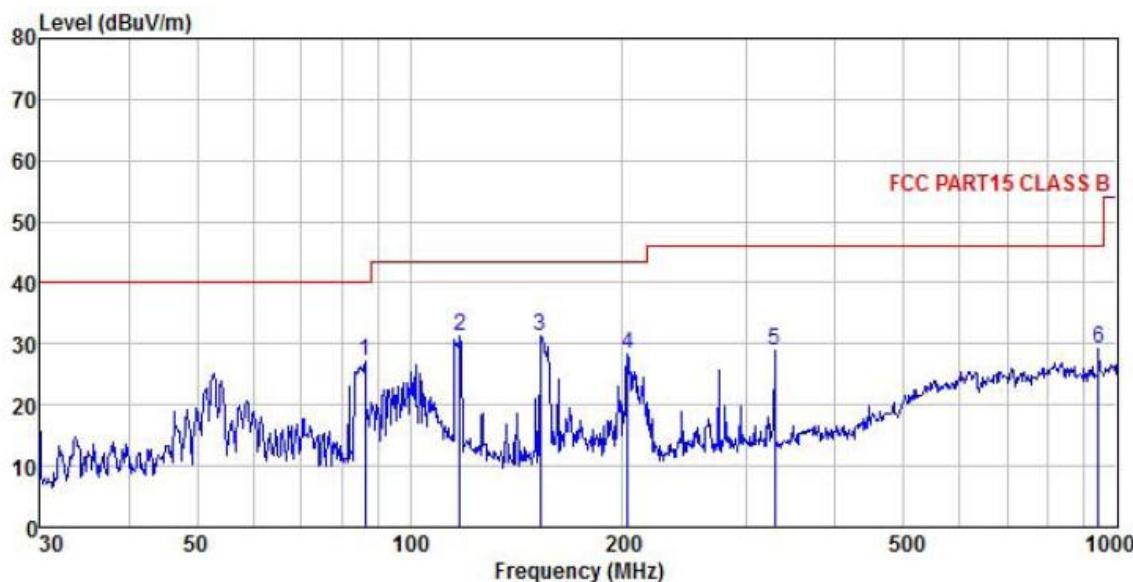


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Preamp Level dBuV/m	Line Limit dBuV/m	Over Line Limit dB	Over Limit Remark
1 86.503	45.70	9.07	1.91	29.59	27.09	40.00	-12.91	QP
2 117.773	47.47	11.04	2.14	29.40	31.25	43.50	-12.25	QP
3 152.664	48.86	9.00	2.53	29.20	31.19	43.50	-12.31	QP
4 203.523	43.47	10.76	2.87	28.81	28.29	43.50	-15.21	QP
5 327.887	40.13	14.17	3.03	28.51	28.82	46.00	-17.18	QP
6 942.131	30.17	22.67	4.13	27.75	29.22	46.00	-16.78	QP

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	TOOTHBRUSH	Product Model:	GF-7
Test By:	Mike	Test mode:	Transmitting mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

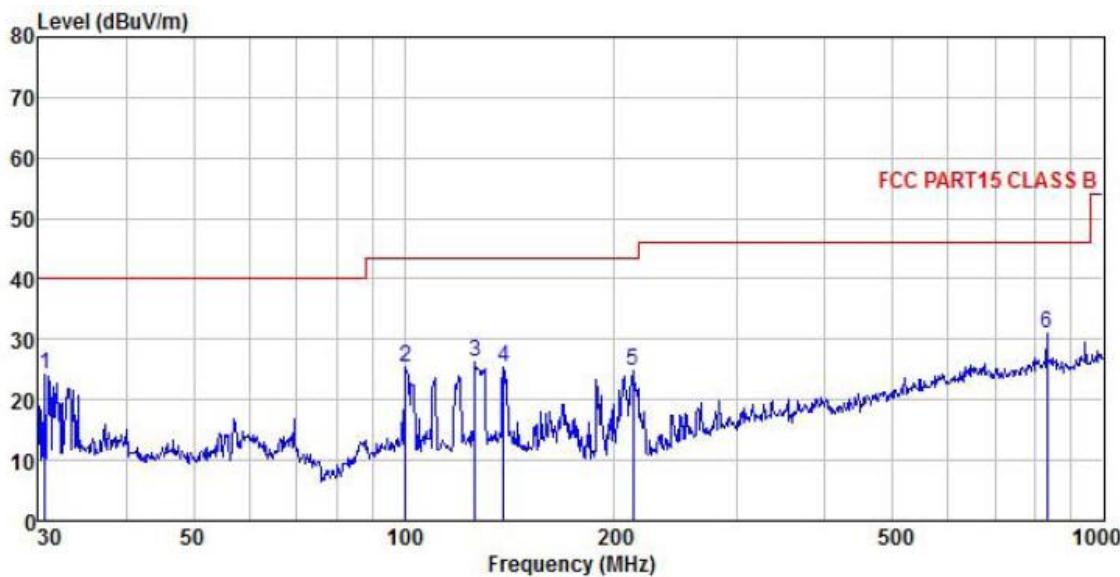


Freq MHz	Read Antenna Level Factor		Cable Preamp Loss Factor		Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB				
1 30.638	42.74	10.68	0.78	29.98	24.22	40.00	-15.78	QP
2 100.581	40.52	12.46	1.94	29.52	25.40	43.50	-18.10	QP
3 126.329	42.84	10.44	2.24	29.35	26.17	43.50	-17.33	QP
4 138.874	42.85	9.57	2.38	29.28	25.52	43.50	-17.98	QP
5 212.270	39.43	11.15	2.86	28.75	24.69	43.50	-18.81	QP
6 830.400	32.59	22.21	4.25	28.08	30.97	46.00	-15.03	QP

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


### 6.3 Conducted Emission

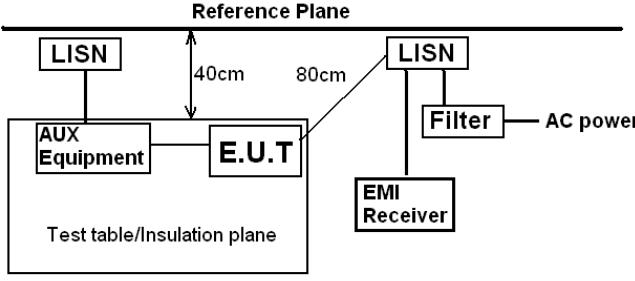Test Requirement:	FCC Part 15 B Section 15.207						
Test Frequency Range:	150kHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9kHz, VBW=30kHz						
Limit:	Frequency range (MHz)		Limit (dB $\mu$ V)				
			Quasi-peak	Average			
	0.15-0.5		66 to 56*	56 to 46*			
	0.5-5		56	46			
	0.5-30		60	50			
* Decreases with the logarithm of the frequency.							
Test setup:	 <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>						
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). They provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.</li> </ol>						
Test environment:	Temp.:	23 °C	Humid.:	56%	Press.:	101kPa	
Test Instruments:	Refer to section 5.9 for details						
Test mode:	Refer to section 5.3 for details						
Test results:	Pass						

## Measurement data:

## Wall hanging:

Product name:	TOOTHBRUSH	Product Model:	GF-7
Test by:	Mike	Test mode:	Transmitting mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

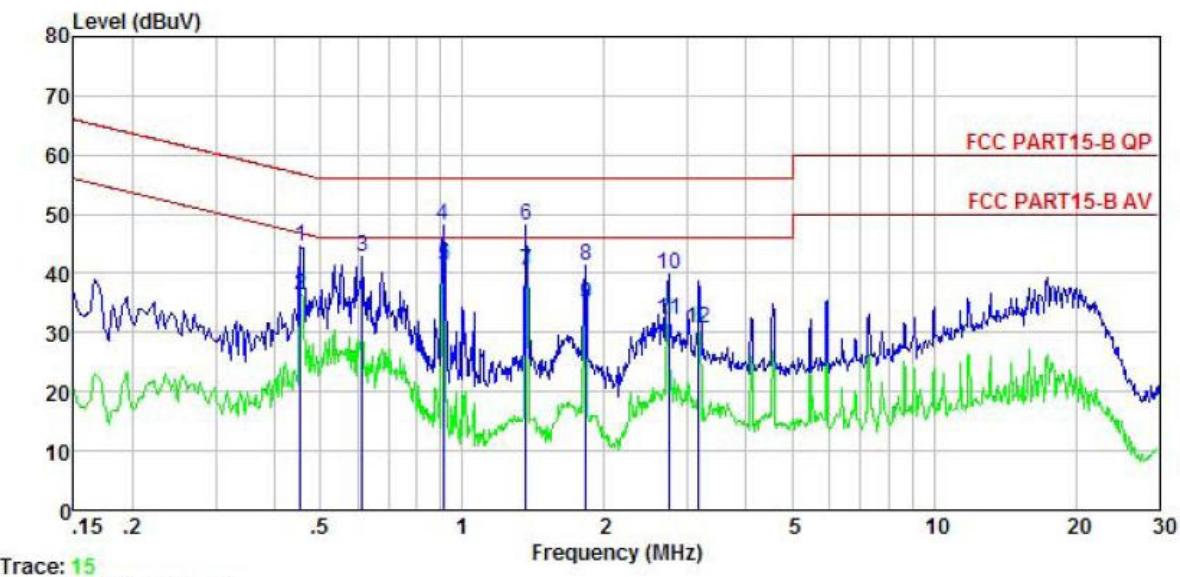


Trace: 15

Freq	Read	LISN	Aux	Cable	Limit	Over	Over	Over
	Level	Factor	Factor	Loss				
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.454	34.13	-0.38	-0.01	10.74	44.48	56.80	-12.32 QP
2	0.454	26.03	-0.38	-0.01	10.74	36.38	46.80	-10.42 Average
3	0.614	32.88	-0.38	-0.38	10.77	42.89	56.00	-13.11 QP
4	0.909	37.35	-0.38	0.23	10.84	48.04	56.00	-7.96 QP
5	0.914	30.62	-0.38	0.24	10.84	41.32	46.00	-4.68 Average
6	1.367	37.36	-0.39	0.11	10.91	47.99	56.00	-8.01 QP
7	1.367	29.78	-0.39	0.11	10.91	40.41	46.00	-5.59 Average
8	1.829	30.95	-0.41	-0.22	10.95	41.27	56.00	-14.73 QP
9	1.829	24.53	-0.41	-0.22	10.95	34.85	46.00	-11.15 Average
10	2.736	29.63	-0.43	-0.23	10.93	39.90	56.00	-16.10 QP
11	2.736	21.82	-0.43	-0.23	10.93	32.09	46.00	-13.91 Average
12	3.173	20.51	-0.44	-0.18	10.91	30.80	46.00	-15.20 Average

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	TOOTHBRUSH	Product Model:	GF-7
Test by:	Mike	Test mode:	Transmitting mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

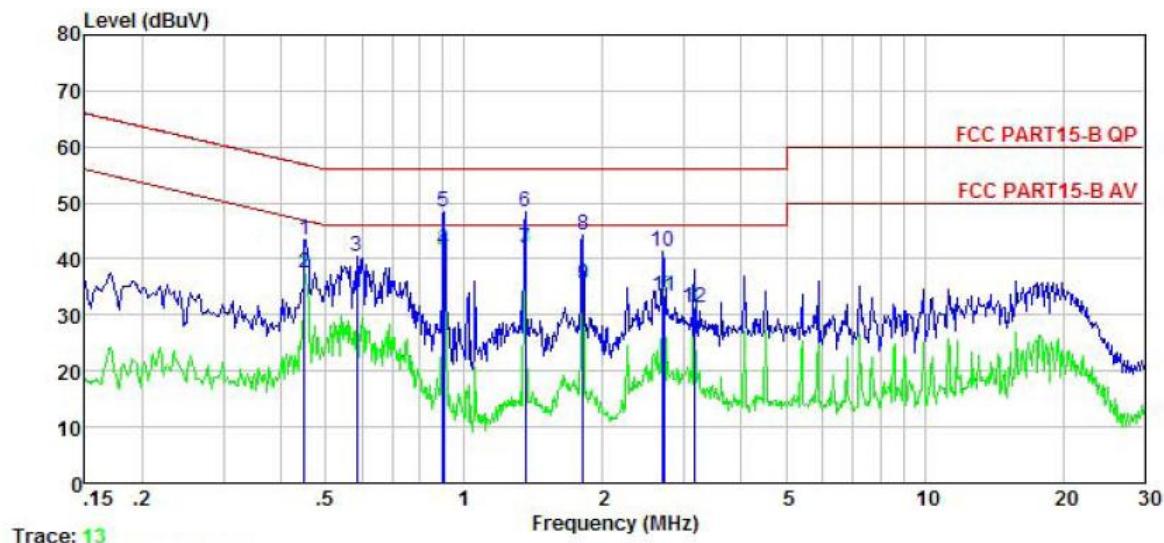


Freq	Read	LISN	Aux	Cable	Level	Limit	Over	Remark
	Freq	Level	Factor	Factor		Line	Line	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.449	33.45	-0.65	-0.01	10.74	43.53	56.89	-13.36 QP
2	0.449	27.32	-0.65	-0.01	10.74	37.40	46.89	-9.49 Average
3	0.585	30.19	-0.65	0.03	10.76	40.33	56.00	-15.67 QP
4	0.899	31.21	-0.63	0.07	10.84	41.49	46.00	-4.51 Average
5	0.904	38.13	-0.63	0.07	10.84	48.41	56.00	-7.59 QP
6	1.359	38.18	-0.65	0.12	10.91	48.56	56.00	-7.44 QP
7	1.359	31.50	-0.65	0.12	10.91	41.88	46.00	-4.12 Average
8	1.810	33.96	-0.66	0.16	10.95	44.41	56.00	-11.59 QP
9	1.810	25.02	-0.66	0.16	10.95	35.47	46.00	-10.53 Average
10	2.707	30.77	-0.67	0.27	10.93	41.30	56.00	-14.70 QP
11	2.721	22.84	-0.67	0.28	10.93	33.38	46.00	-12.62 Average
12	3.156	20.60	-0.67	0.34	10.91	31.18	46.00	-14.82 Average

## Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level =Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

## Charging box:

Product name:	TOOTHBRUSH	Product Model:	GF-7
Test by:	Mike	Test mode:	Transmitting mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

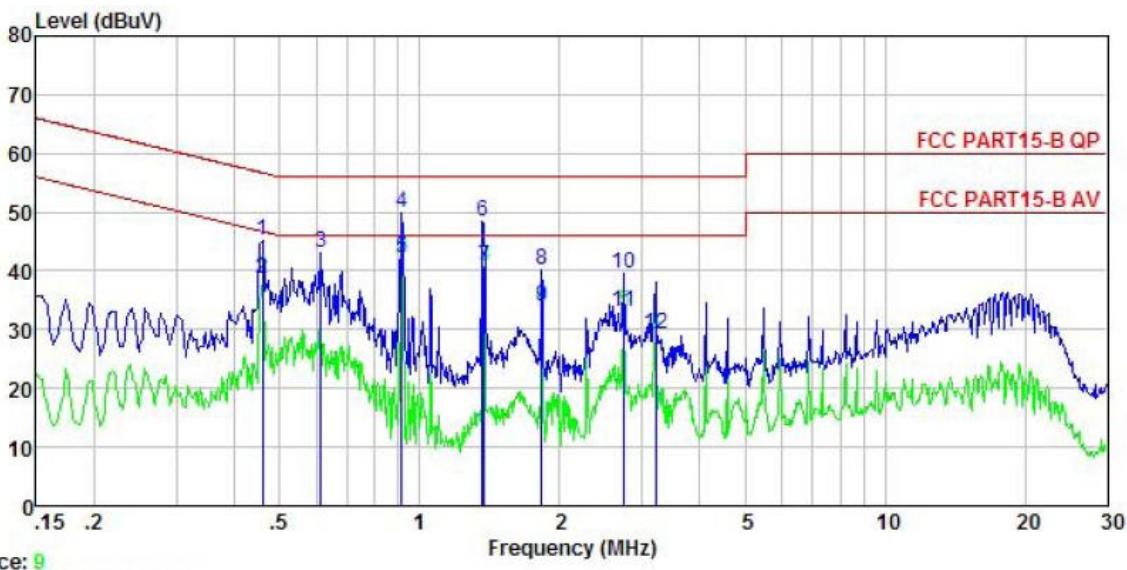


Freq	Read	LISN	Aux	Cable	Limit	Over	Remark
	Level	Factor	Factor	Loss			
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB
1	0.459	34.89	-0.38	-0.06	10.74	45.19	56.71 -11.52 QP
2	0.459	28.25	-0.38	-0.06	10.74	38.55	46.71 -8.16 Average
3	0.614	33.00	-0.38	-0.38	10.77	43.01	56.00 -12.99 QP
4	0.914	39.24	-0.38	0.24	10.84	49.94	56.00 -6.06 QP
5	0.914	31.57	-0.38	0.24	10.84	42.27	46.00 -3.73 Average
6	1.367	37.64	-0.39	0.11	10.91	48.27	56.00 -7.73 QP
7	1.374	30.21	-0.39	0.10	10.91	40.83	46.00 -5.17 Average
8	1.829	29.73	-0.41	-0.22	10.95	40.05	56.00 -15.95 QP
9	1.829	23.68	-0.41	-0.22	10.95	34.00	46.00 -12.00 Average
10	2.750	29.28	-0.43	-0.23	10.93	39.55	56.00 -16.45 QP
11	2.750	22.88	-0.43	-0.23	10.93	33.15	46.00 -12.85 Average
12	3.207	19.01	-0.45	-0.17	10.91	29.30	46.00 -16.70 Average

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	TOOTHBRUSH	Product Model:	GF-7
Test by:	Mike	Test mode:	Transmitting mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

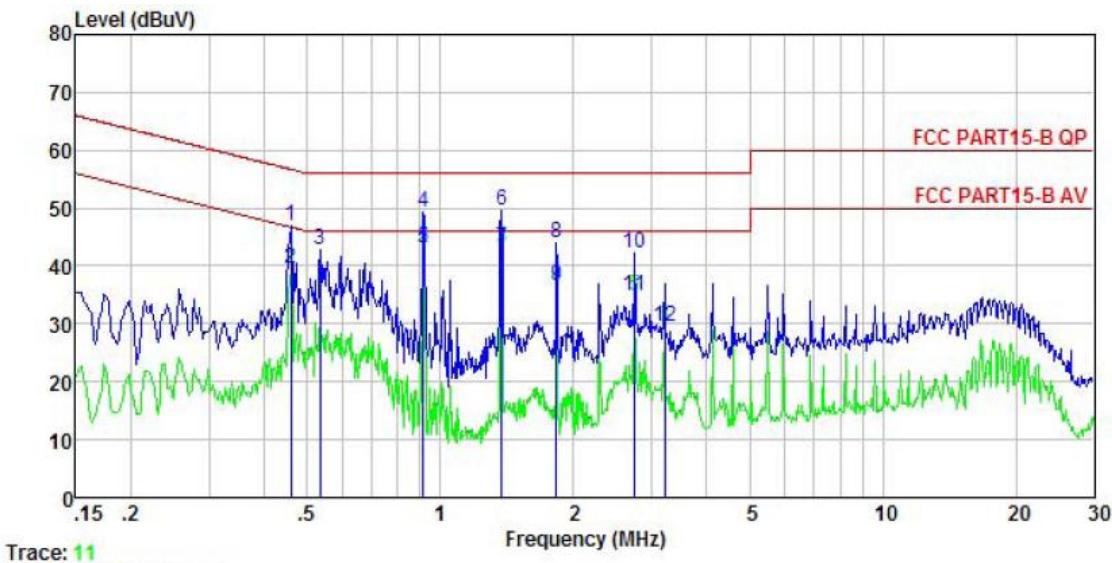


Freq	Read	LISN	Aux	Cable	Limit	Over	Remark
	Level	Factor	Factor	Loss			
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB
1	0.459	36.80	-0.65	0.00	10.74	46.89	56.71
2	0.459	29.60	-0.65	0.00	10.74	39.69	46.71
3	0.535	32.53	-0.65	0.03	10.76	42.67	56.00
4	0.914	39.08	-0.63	0.07	10.84	49.36	56.00
5	0.914	32.89	-0.63	0.07	10.84	43.17	46.00
6	1.374	39.07	-0.65	0.12	10.91	49.45	56.00
7	1.374	32.79	-0.65	0.12	10.91	43.17	46.00
8	1.829	33.68	-0.66	0.16	10.95	44.13	56.00
9	1.829	26.07	-0.66	0.16	10.95	36.52	46.00
10	2.750	31.53	-0.67	0.28	10.93	42.07	56.00
11	2.750	24.33	-0.67	0.28	10.93	34.87	46.00
12	3.207	18.78	-0.68	0.36	10.91	29.37	46.00

## Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

## 6.4 20dB Bandwidth

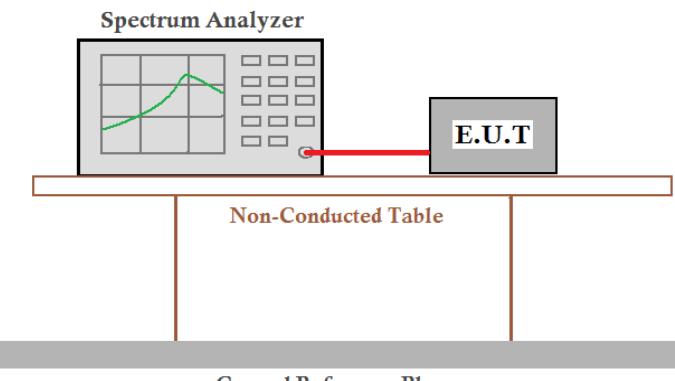Test Requirement:	FCC Part15 C Section 15.215 (c)
Receiver setup:	RBW=1 kHz, VBW=3 kHz, detector: Peak
Limit:	The fundamental emission be kept within atleast the central 80% of the permitted band
Test Procedure:	<ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set the EUT to proper test channel.</li> <li>3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points.</li> <li>4. Read 20dB bandwidth.</li> </ol>
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data

#### Wall hanging:

20dB bandwidth (kHz)	Limits
2.66	
2.74	N/A

*Remark: For report purpose only.*


#### Charging box:

20dB bandwidth (kHz)	Limits
2.74	
2.72	N/A

*Remark: For report purpose only.*

Test plot as follows:

Wall hanging:

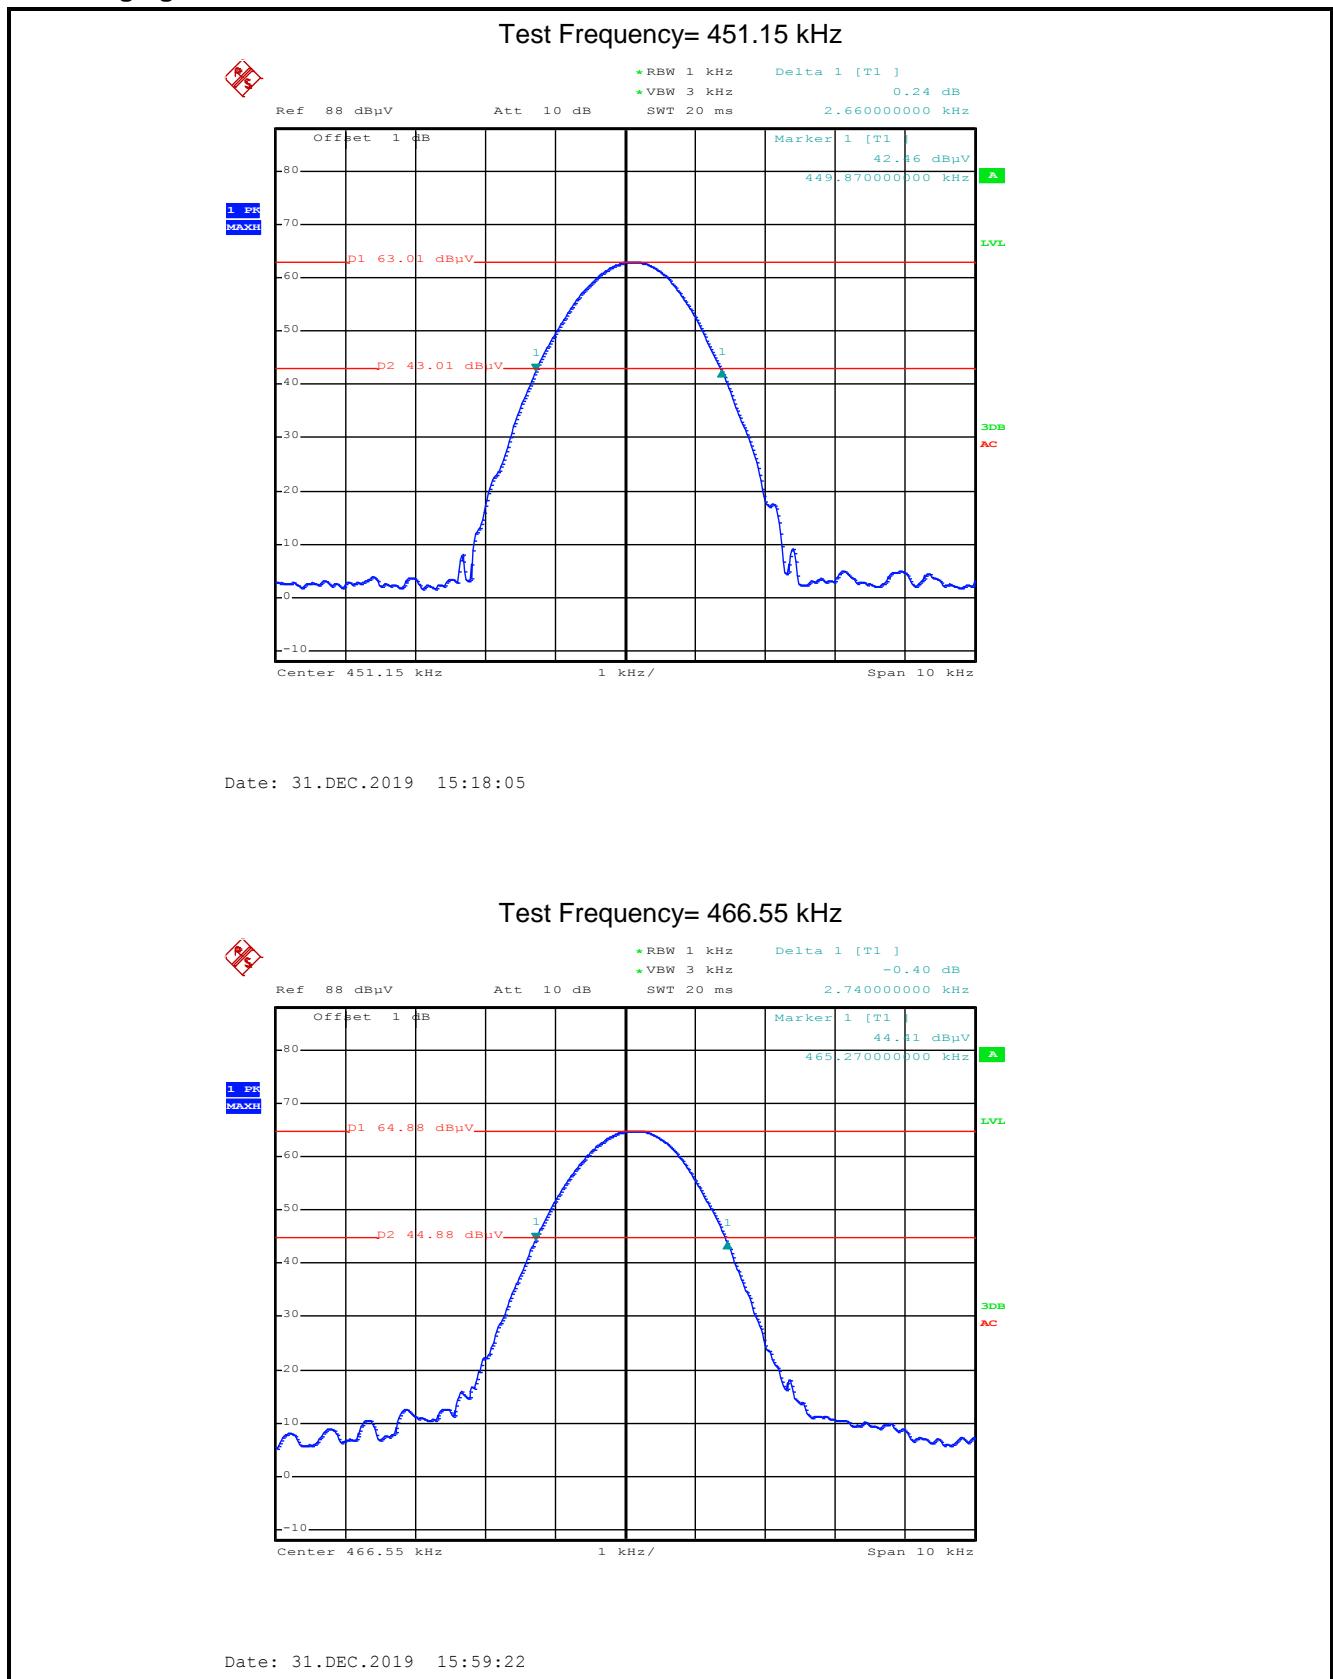

## Charging box:

