

REVISIONS					
ECO	REV.	DESCRIPTION	DATE	REVISED BY	APPROVED BY
-	P1	PRELIMINARY RELEASE	11/5/2021	-	S. KARIMI
945	A1	INITIAL RELEASE TO PRODUCTION	12/1/2021	Z.OLEJARZ	S.KARIMI

COLOR NAME: INNOVATION BLUE
PANTONE COLOR CODE: 300 C

SOLID WHITE. MUST BE SOLID AND NOT TRANSPARENT
COLOR NAME: WHITE
HEX COLOR CODE: #FFFFFF

GPS, POWER, AND SIGNAL LOGO MUST ALL BE SOLID WHITE
COLOR NAME: WHITE
HEX COLOR CODE: #FFFFFF

COLOR NAME: GEOTAB BLUE
PANTONE COLOR CODE: 541 C

COLOR NAME: GEOTAB BLUE
PANTONE COLOR CODE: 541 C

3X CIRCULAR AREA SHOWN AS PINK BUT SHOULD HAVE NO COLOR. SHOULD BE CLEAR WINDOWS. SEE NEXT SHEET FOR DIMENSIONS

SOLID WHITE. MUST BE SOLID AND NOT TRANSPARENT
COLOR NAME: WHITE
HEX COLOR CODE: #FFFFFF



- NOTES:
1. MATERIAL: PC + 3M9448HK. FINISH: GLOSSY
 2. ADHESIVE: 3M 7533
 3. HATCHED AREA SHOULD HAVE NO COLOR, SHOULD BE CLEAR/TRANSPARENT WINDOWS
 4. DIE TRACE OUTER DIMENSION DECAL PROFILE AT 0.2MM OFFSET FROM RECESS
 5. UNDIMENSIONED FEATURES HAVE GENERAL TOLERANCE SHOWN IN TABLE BELOW

LINEAR: APPLY AS SHOWN BELOW.						ANGULAR: ±0.5°
DIM[mm]	D<10	10≤D<40	40≤D<80	80≤D<120	120≤D<200	200≤D<300
TOLERANCE	±0.05	±0.07	±0.10	±0.15	±0.20	±0.30
PER ADDITIONAL 100 ± 0.1						




6. REFER TO CAD DATA FOR UNDIMENSIONED FEATURES
7. LEGEND:

FUNCTIONAL

CRITICAL

ASSEMBLY

Tolerance: Stripping lengths (-0 +0.5)mm Cable Cutting lengths (<1000: -0 +2)mm, (>1000: -0 +5) mm Sleeving, Heatshrink, Corrugated Sleeving (-1 +1)mm			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	Rev: A1		
			ALL DIMENSIONS ARE IN MM	GEOTAB			
DRAWN	NAME Z.OLEJARZ	DATE 11/5/2021	TITLE: GO9B DECAL				
REVIEWED	T. MISTRY	11/9/2021					
CHECKED	A.YU	11/9/2021					
APP'VD	M.CHRISTELIS	11/9/2021					
			ALL DIMENSIONS ARE IN MM	DWG NO. LBL-GO9B	A2		
			WEIGHT:	SHEET 1 OF 2			

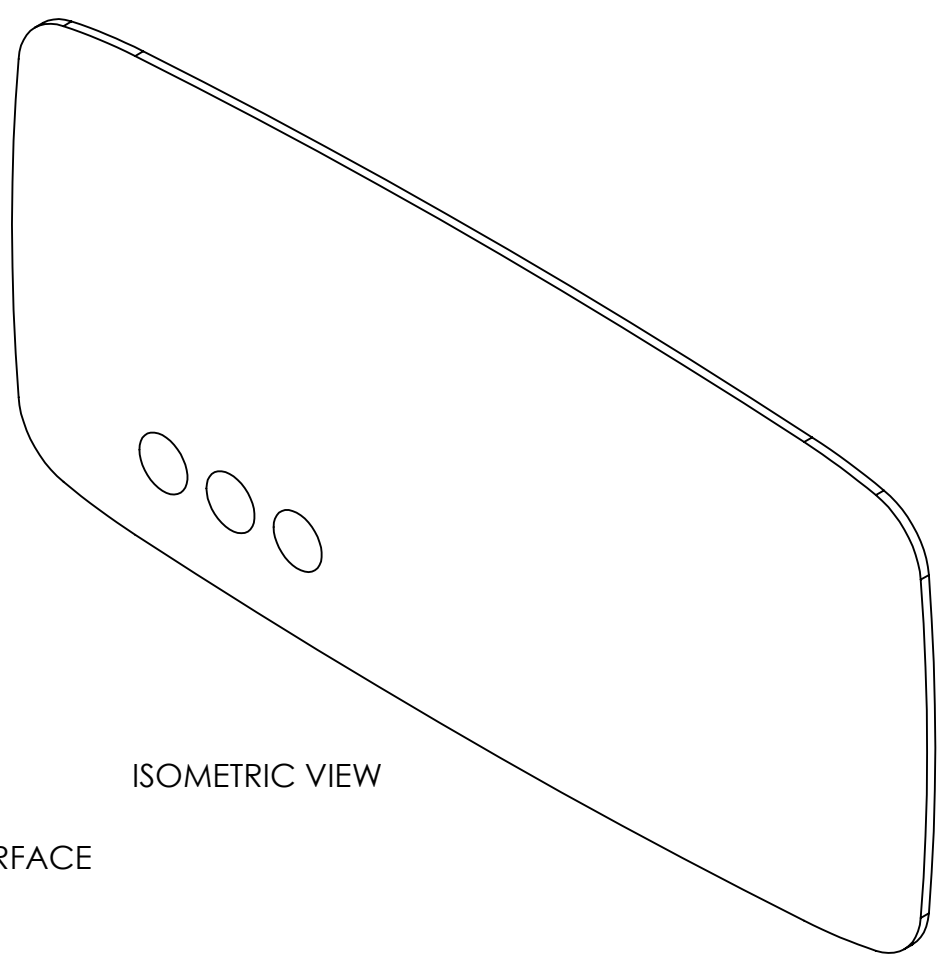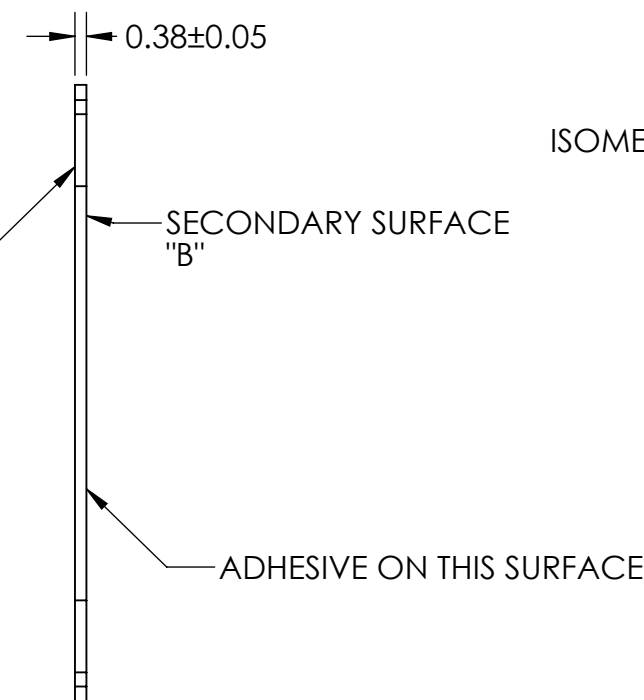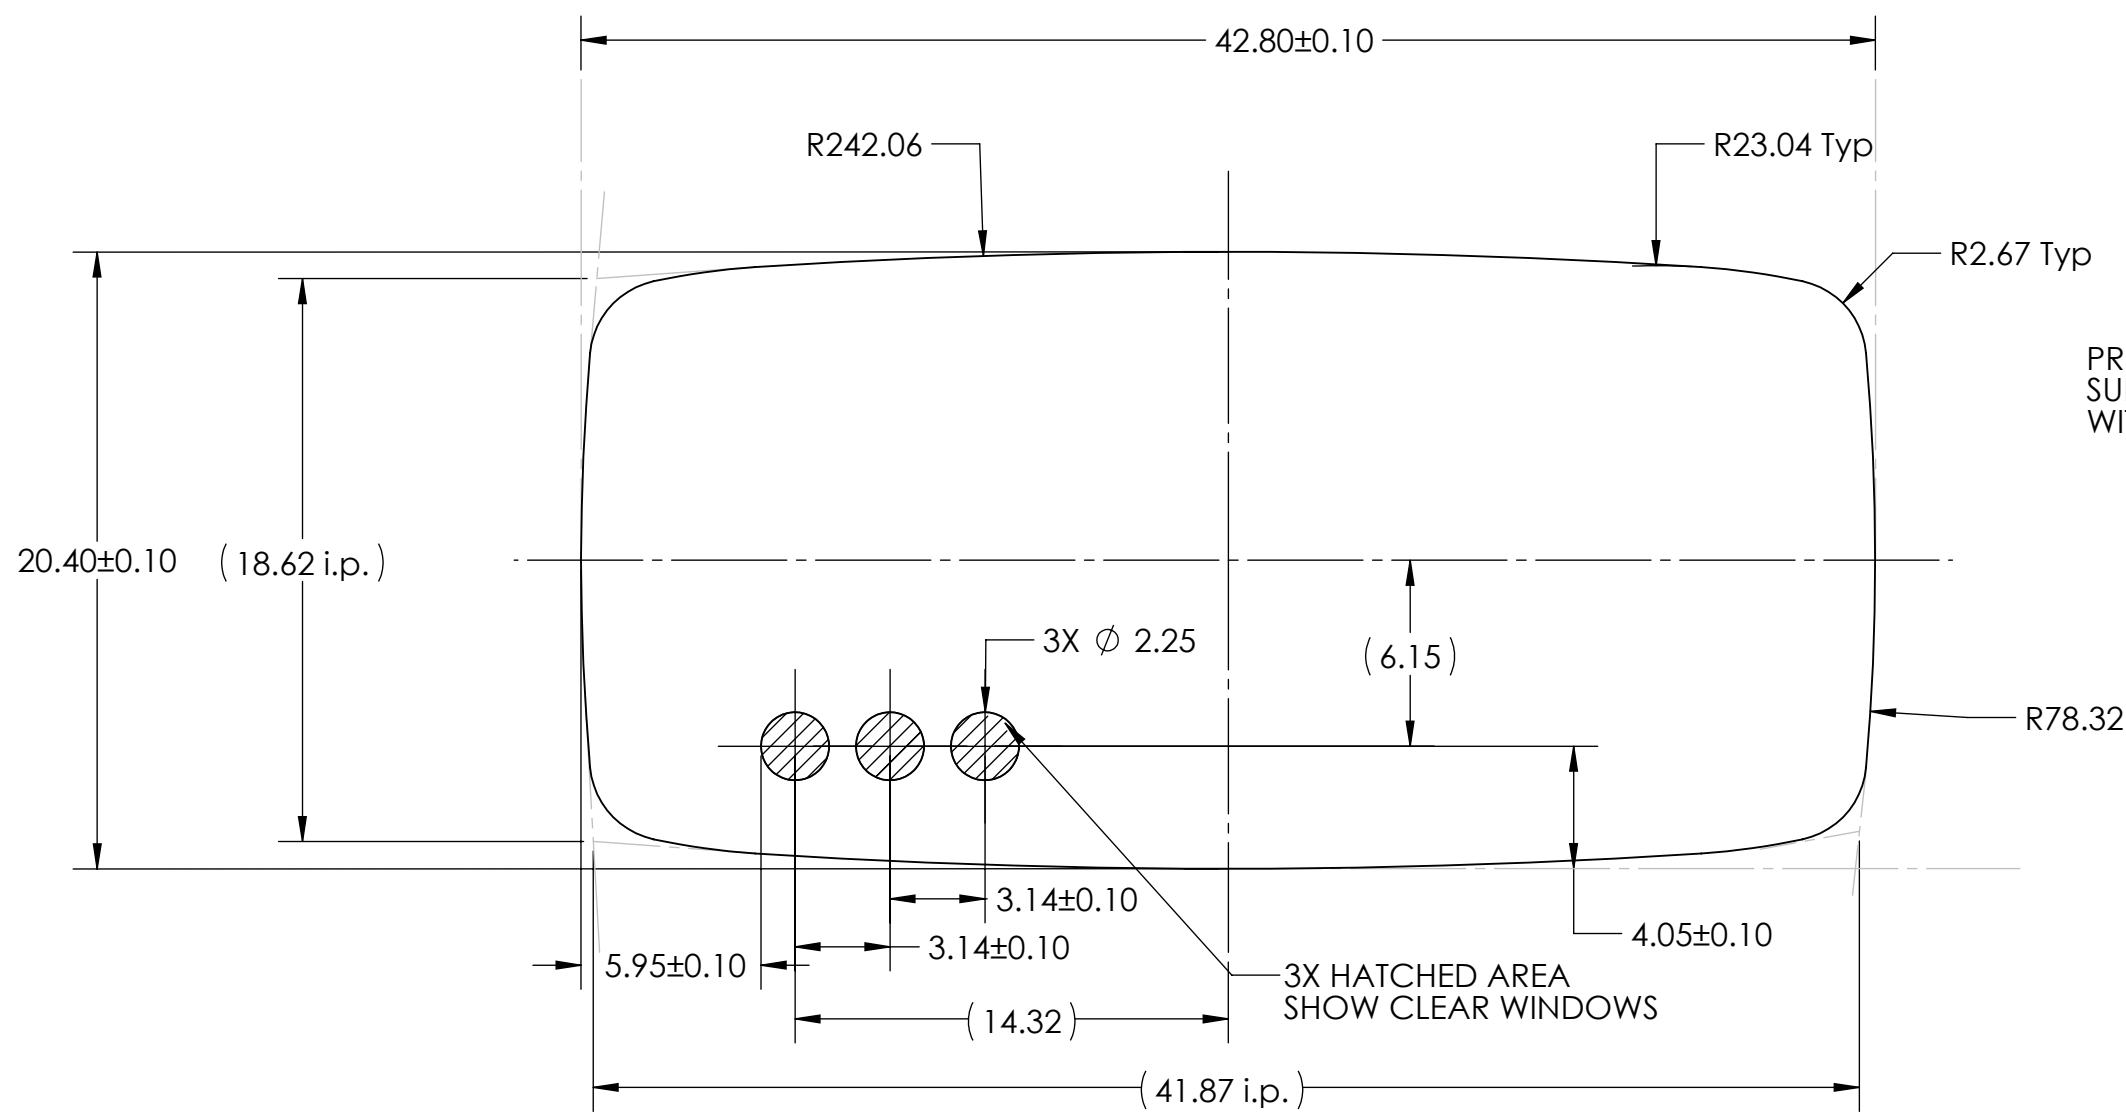

- NOTES:
1. MATERIAL: PC + 3M9448HK. FINISH: GLOSSY
 2. ADHESIVE: 3M 7533
 3. HATCHED AREA SHOULD HAVE NO COLOR, SHOULD BE CLEAR/TRANSPARENT WINDOWS
 4. DIE TRACE OUTER DIMENSION DECAL PROFILE AT 0.2MM OFFSET FROM RECESS
 5. UNDIMENSIONED FEATURES HAVE GENERAL TOLERANCE SHOWN IN TABLE BELOW

LINEAR: APPLY AS SHOWN BELOW.						ANGULAR: ±0.5°
DIM[mm]	D<10	10≤D<40	40≤D<80	80≤D<120	120≤D<200	200≤D<300
TOLERANCE	±0.05	±0.07	±0.10	±0.15	±0.20	±0.30
PER ADDITIONAL 100 ±0.1						

6. REFER TO CAD DATA FOR UNDIMENSIONED FEATURES
7. LEGEND: FUNCTIONAL, CRITICAL, ASSEMBLY

Tolerance: Stripping lengths (-0 +0.5)mm Cable Cutting lengths (<1000: -0 +2)mm, (>1000: -0 +5) mm Sleeving, Heatshrink, Corrugated Sleeving (-1 +1)mm			DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	Rev: A1	
			ALL DIMENSIONS ARE IN MM	GEOTAB		
	NAME	DATE	TITLE: GO9B DECAL			
DRAWN	Z.OLEJARZ	11/5/2021				
REVIEWED	T. MISTRY	11/9/2021				
CHECKED	A.YU	11/9/2021				
APP'VD	M.CHRISTELIS	11/9/2021				
			ALL DIMENSIONS ARE IN MM	DWG NO.	LBL-GO9B	A2
				WEIGHT:		