



FCC RF Test Report

APPLICANT : Shenzhen Zolon Technology Co.,Ltd.
EQUIPMENT : Smart Computer
BRAND NAME : ZOLON
MODEL NAME : M11
FCC ID : 2AV5BM11
STANDARD : 47 CFR Part 27 Subpart O (3700-3980MHz)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jun. 07, 2025 ~ Jul. 10, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	6
1.6 Maximum EIRP and Emission Designator	7
1.7 Testing Location	8
1.8 Test Software	8
1.9 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power and EIRP	14
3.5 Peak-to-Average Ratio	15
3.6 Occupied Bandwidth	16
3.7 Conducted Band Edge	17
3.8 Conducted Spurious Emission	18
3.9 Frequency Stability	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	21
4.4 Radiated Spurious Emission	22
5 LIST OF MEASURING EQUIPMENT	23
6 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG552610J	Rev. 01	Initial issue of report	Sep. 08, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 30.22 dB at 10354.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Shenzhen Zolon Technology Co.,Ltd.

401, Building 3, Shenzhen Software Park, Maling Community, Yuehai Sub-district, Nanshan District,
Shenzhen City, Guangdong Province, P.R.C

1.2 Manufacturer

Shenzhen Zolon Technology Co.,Ltd.

401, Building 3, Shenzhen Software Park, Maling Community, Yuehai Sub-district, Nanshan District,
Shenzhen City, Guangdong Province, P.R.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Computer
Brand Name	ZOLON
Model Name	M11
FCC ID	2AV5BM11
IMEI Code	Conducted: 869153080003533/869153080003541 Radiation: 869153080002196
HW Version	V02
SW Version	0.00.00.20250521
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	30kHz
Bandwidth	n77/n78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 2> 5G NR n77: 2.26 dBi 5G NR n78: 1.61 dBi <Ant. 3> 5G NR n77: 2.32 dBi 5G NR n78: 2.32 dBi <Ant. 4> 5G NR n77: 2.05 dBi 5G NR n78: 2.05 dBi <Ant. 5> 5G NR n77: 1.20 dBi 5G NR n78: -0.36 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP is shown in the report, 5G NR n77/n78 for Antenna 4.
2. For conducted test items, only the test data of the worst Antenna 4 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
4. The device supports HPUE mode for 5G NR n77/n78.
5. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
6. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.5420	8M57G7D	0.4335	8M59W7D
15	3705.52 ~ 3972.48	0.5333	13M6G7D	0.4335	13M5W7D
20	3710.01 ~ 3969.99	0.5370	18M3G7D	0.4227	18M2W7D
25	3712.50 ~ 3967.50	0.5309	23M2G7D	0.4227	23M3W7D
30	3715.02 ~ 3964.98	0.5370	27M8G7D	0.4217	27M9W7D
40	3720.00 ~ 3960.00	0.5370	37M8G7D	0.4266	37M9W7D
50	3725.01 ~ 3954.99	0.5395	47M5G7D	0.4285	47M5W7D
60	3730.02 ~ 3949.98	0.5284	57M8G7D	0.4276	57M8W7D
70	3735.00 ~ 3945.00	0.5395	67M4G7D	0.4325	67M7W7D
80	3740.01 ~ 3939.99	0.5358	77M4G7D	0.4285	77M7W7D
90	3745.02 ~ 3934.98	0.5333	87M3G7D	0.4217	87M4W7D
100	3750.00 ~ 3930.00	0.5508	97M3G7D	0.4416	97M7W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3795.00	0.5272	8M57G7D	0.4159	8M59W7D
15	3707.52 ~ 3792.48	0.5224	13M6G7D	0.4198	13M5W7D
20	3710.01 ~ 3789.99	0.5260	18M3G7D	0.4207	18M2W7D
25	3712.50 ~ 3787.50	0.5200	23M2G7D	0.4159	23M3W7D
30	3715.02 ~ 3784.98	0.5260	27M8G7D	0.4178	27M9W7D
40	3720.00 ~ 3780.00	0.5248	37M8G7D	0.4150	37M9W7D
50	3725.01 ~ 3774.99	0.5260	47M5G7D	0.4178	47M5W7D
60	3730.02 ~ 3769.98	0.5212	57M8G7D	0.4150	57M8W7D
70	3735.00 ~ 3765.00	0.5358	67M4G7D	0.4227	67M7W7D
80	3740.01 ~ 3759.99	0.5236	77M4G7D	0.4150	77M7W7D
90	3745.02 ~ 3754.98	0.5236	87M3G7D	0.4140	87M4W7D
100	3750.00 ~ 3750.00	0.5370	97M3G7D	0.4276	97M7W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore



the conducted test results of n77 provided in this report cover n78.

2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH02-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		10	15	20	25	30	40	50	60	70~90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Partial	Full	L	M	H
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	n77			v								v	v						v		v	
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v		v	v	v	v			v		v	
Conducted Band Edge	n77	v						v			v	v	v				v		v	v		v
Conducted Spurious Emission	n77	v						v			v	v	v				v			v	v	v
Frequency Stability	n77			v									v						v		v	
E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Radiated Spurious Emission	n77	Worst Case																		v	v	v
	n78	Worst Case																			v	
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.85V; Low Voltage =3.60V; High Voltage =4.30V. 5. n78 RSE testing for LTE B38 other PA.																					

2.2 Connection Diagram of Test System

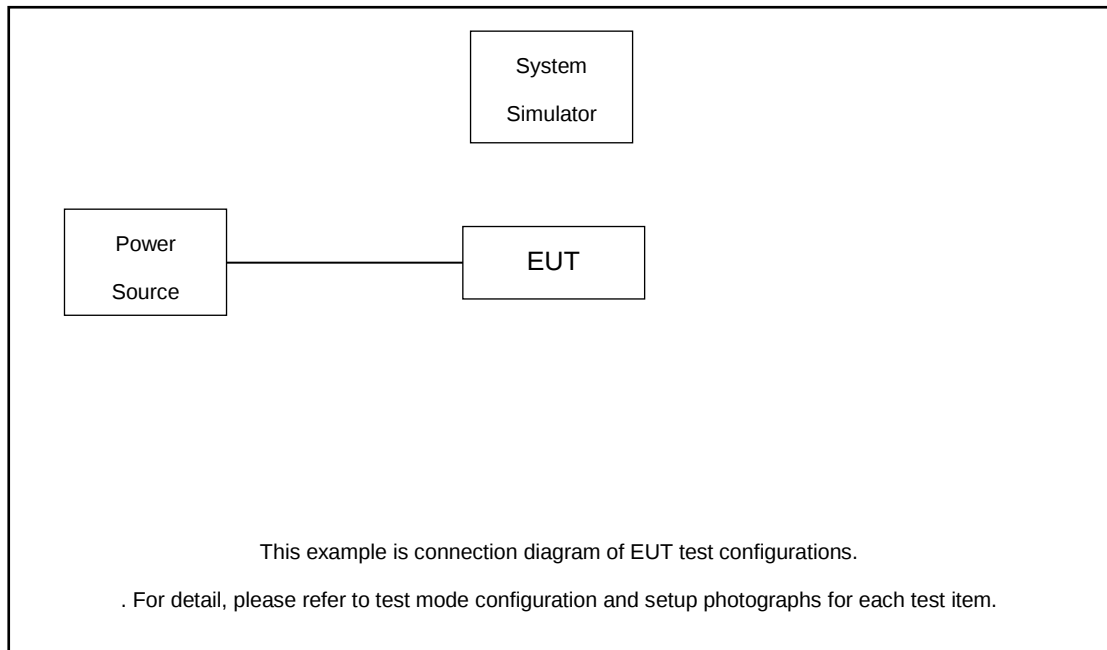

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975



5G n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

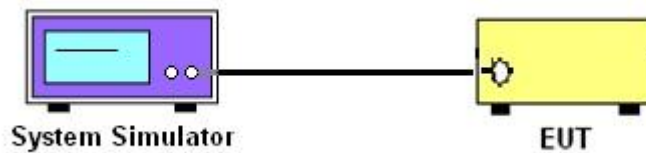

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

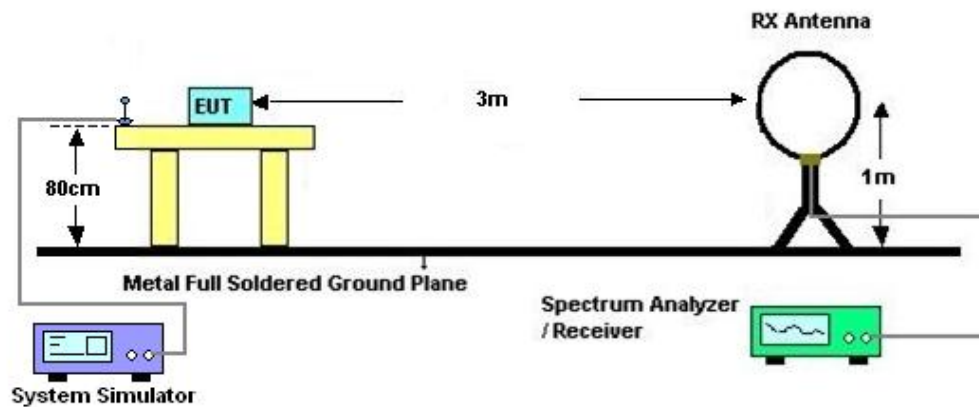

4.2.2 For radiated test from 30MHz to 1GHz

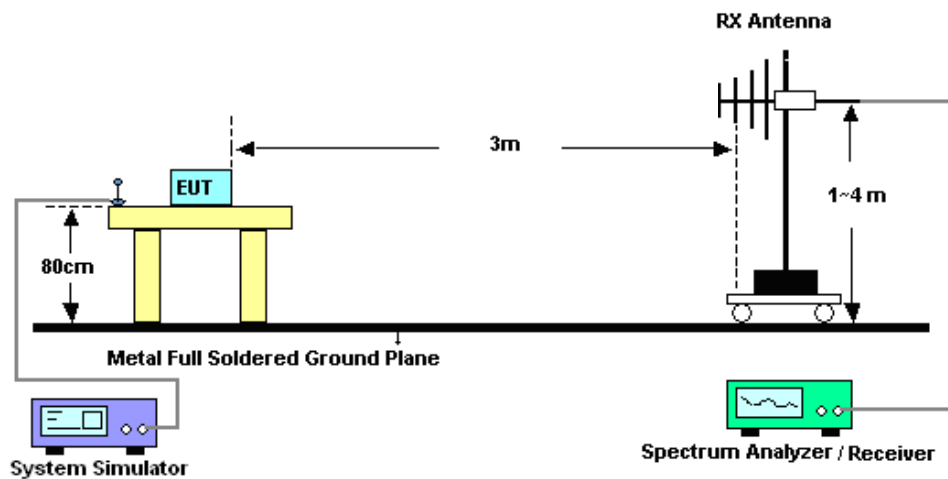

4.2.3 For radiated test above 1GHz

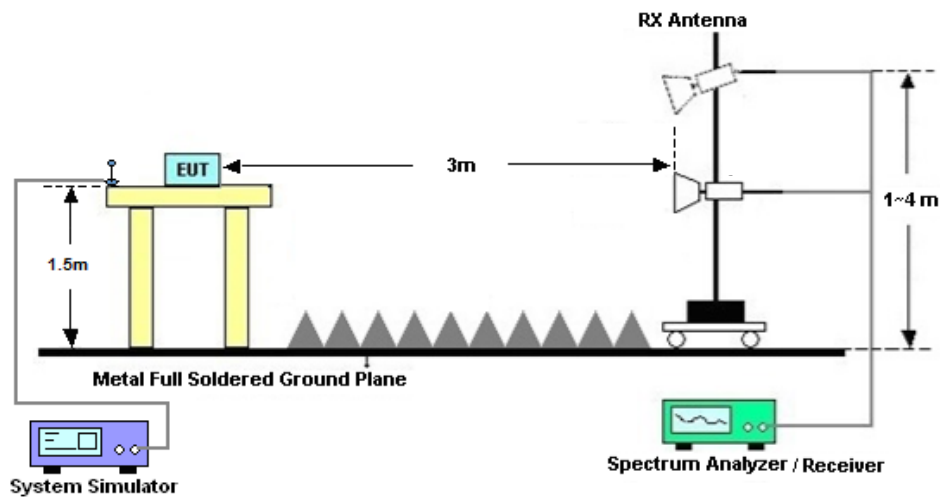

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jun. 07, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 24, 2024	Jun. 07, 2025	Dec. 23, 2025	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Jun. 07, 2025	Jul. 02, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V, 3A	Oct. 14, 2024	Jun. 07, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jul. 09, 2025~Jul. 10, 2025	Jul. 02, 2026	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jul. 09, 2025~Jul. 10, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jul. 09, 2025~Jul. 10, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Jul. 09, 2025~Jul. 10, 2025	Jul. 04, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jul. 09, 2025~Jul. 10, 2025	Jul. 03, 2026	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Jul. 09, 2025~Jul. 10, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	Jul. 09, 2025~Jul. 10, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Jul. 09, 2025~Jul. 10, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Jul. 09, 2025~Jul. 10, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jul. 09, 2025~Jul. 10, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jul. 09, 2025~Jul. 10, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77 ANT4

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=2.05 dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	10	647000	3705	DFT-s-OFDM QPSK	12@6	25.23	27.28	0.5346
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@1	25.09	27.14	0.5176
77	30	10	647000	3705	DFT-s-OFDM QPSK	1@22	25.09	27.14	0.5176
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	12@6	24.3	26.35	0.4315
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@1	24.06	26.11	0.4083
77	30	10	647000	3705	DFT-s-OFDM 16 QAM	1@22	24.07	26.12	0.4093
77	30	10	656000	3840	DFT-s-OFDM QPSK	12@6	25.26	27.31	0.5383
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@1	25.29	27.34	0.5420
77	30	10	656000	3840	DFT-s-OFDM QPSK	1@22	25.22	27.27	0.5333
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	12@6	24.25	26.3	0.4266
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.32	26.37	0.4335
77	30	10	656000	3840	DFT-s-OFDM 16 QAM	1@22	24.27	26.32	0.4285
77	30	10	665000	3975	DFT-s-OFDM QPSK	12@6	25.01	27.06	0.5082
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@1	24.92	26.97	0.4977
77	30	10	665000	3975	DFT-s-OFDM QPSK	1@22	24.95	27	0.5012
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	12@6	24.08	26.13	0.4102
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@1	23.97	26.02	0.3999
77	30	10	665000	3975	DFT-s-OFDM 16 QAM	1@22	24.07	26.12	0.4093
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	18@9	25.18	27.23	0.5284
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@1	25.11	27.16	0.5200
77	30	15	647168	3707.52	DFT-s-OFDM QPSK	1@36	25.15	27.2	0.5248
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	18@9	24.23	26.28	0.4246
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@1	24.14	26.19	0.4159
77	30	15	647168	3707.52	DFT-s-OFDM 16 QAM	1@36	24.1	26.15	0.4121
77	30	15	656000	3840	DFT-s-OFDM QPSK	18@9	25.22	27.27	0.5333
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@1	25.21	27.26	0.5321
77	30	15	656000	3840	DFT-s-OFDM QPSK	1@36	25.16	27.21	0.5260
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	18@9	24.32	26.37	0.4335
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.23	26.28	0.4246
77	30	15	656000	3840	DFT-s-OFDM 16 QAM	1@36	24.21	26.26	0.4227
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	18@9	24.9	26.95	0.4955
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@1	24.81	26.86	0.4853
77	30	15	664832	3972.48	DFT-s-OFDM QPSK	1@36	24.89	26.94	0.4943



77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	18@9	24.02	26.07	0.4046
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@1	23.73	25.78	0.3784
77	30	15	664832	3972.48	DFT-s-OFDM 16 QAM	1@36	23.82	25.87	0.3864
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	25@12	25.18	27.23	0.5284
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	25.02	27.07	0.5093
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@49	25.09	27.14	0.5176
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	25@12	24.16	26.21	0.4178
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	23.97	26.02	0.3999
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@49	24.01	26.06	0.4036
77	30	20	656000	3840	DFT-s-OFDM QPSK	25@12	25.25	27.3	0.5370
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	25.18	27.23	0.5284
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@49	25.14	27.19	0.5236
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	25@12	24.21	26.26	0.4227
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.16	26.21	0.4178
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@49	24.06	26.11	0.4083
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	25@12	24.93	26.98	0.4989
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	24.74	26.79	0.4775
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@49	24.83	26.88	0.4875
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	25@12	23.94	25.99	0.3972
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	23.56	25.61	0.3639
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@49	23.66	25.71	0.3724
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	32@16	25.14	27.19	0.5236
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	1@1	24.88	26.93	0.4932
77	30	25	647500	3712.5	DFT-s-OFDM QPSK	1@63	24.86	26.91	0.4909
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	32@16	24.16	26.21	0.4178
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	1@1	23.8	25.85	0.3846
77	30	25	647500	3712.5	DFT-s-OFDM 16 QAM	1@63	23.77	25.82	0.3819
77	30	25	656000	3840	DFT-s-OFDM QPSK	32@16	25.2	27.25	0.5309
77	30	25	656000	3840	DFT-s-OFDM QPSK	1@1	25.02	27.07	0.5093
77	30	25	656000	3840	DFT-s-OFDM QPSK	1@63	24.94	26.99	0.5000
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	32@16	24.21	26.26	0.4227
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.87	25.92	0.3908
77	30	25	656000	3840	DFT-s-OFDM 16 QAM	1@63	23.79	25.84	0.3837
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	32@16	24.91	26.96	0.4966
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	1@1	24.71	26.76	0.4742
77	30	25	664500	3967.5	DFT-s-OFDM QPSK	1@63	24.75	26.8	0.4786
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	32@16	23.96	26.01	0.3990
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	1@1	23.8	25.85	0.3846
77	30	25	664500	3967.5	DFT-s-OFDM 16 QAM	1@63	23.85	25.9	0.3890
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	36@18	25.19	27.24	0.5297
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	24.87	26.92	0.4920



77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@76	24.83	26.88	0.4875
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	36@18	24.16	26.21	0.4178
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	23.94	25.99	0.3972
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@76	23.9	25.95	0.3936
77	30	30	656000	3840	DFT-s-OFDM QPSK	36@18	25.25	27.3	0.5370
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	24.93	26.98	0.4989
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@76	24.81	26.86	0.4853
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	36@18	24.2	26.25	0.4217
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.95	26	0.3981
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@76	23.81	25.86	0.3855
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	36@18	24.83	26.88	0.4875
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	24.61	26.66	0.4634
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@76	24.61	26.66	0.4634
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	36@18	23.82	25.87	0.3864
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	23.55	25.6	0.3631
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@76	23.54	25.59	0.3622
77	30	40	648000	3720	DFT-s-OFDM QPSK	50@25	25.16	27.21	0.5260
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	24.64	26.69	0.4667
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@104	24.57	26.62	0.4592
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	50@25	24.17	26.22	0.4188
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	23.78	25.83	0.3828
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@104	23.7	25.75	0.3758
77	30	40	656000	3840	DFT-s-OFDM QPSK	50@25	25.25	27.3	0.5370
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	24.68	26.73	0.4710
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@104	24.65	26.7	0.4677
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	50@25	24.25	26.3	0.4266
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.78	25.83	0.3828
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@104	23.68	25.73	0.3741
77	30	40	664000	3960	DFT-s-OFDM QPSK	50@25	24.87	26.92	0.4920
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	24.57	26.62	0.4592
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@104	24.5	26.55	0.4519
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	50@25	23.89	25.94	0.3926
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	23.64	25.69	0.3707
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@104	23.56	25.61	0.3639
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	64@32	25.2	27.25	0.5309
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	24.94	26.99	0.5000
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@131	24.8	26.85	0.4842
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	64@32	24.2	26.25	0.4217
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	23.8	25.85	0.3846
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@131	23.76	25.81	0.3811
77	30	50	656000	3840	DFT-s-OFDM QPSK	64@32	25.27	27.32	0.5395



77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	24.87	26.92	0.4920
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@131	24.82	26.87	0.4864
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	64@32	24.27	26.32	0.4285
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.76	25.81	0.3811
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@131	23.83	25.88	0.3873
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	64@32	24.91	26.96	0.4966
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	24.89	26.94	0.4943
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@131	24.65	26.7	0.4677
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	64@32	23.92	25.97	0.3954
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	23.89	25.94	0.3926
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@131	23.62	25.67	0.3690
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	81@40	25.11	27.16	0.5200
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	24.78	26.83	0.4819
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@160	24.64	26.69	0.4667
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	81@40	24.12	26.17	0.4140
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	23.67	25.72	0.3733
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@160	23.53	25.58	0.3614
77	30	60	656000	3840	DFT-s-OFDM QPSK	81@40	25.18	27.23	0.5284
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	24.82	26.87	0.4864
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@160	24.88	26.93	0.4932
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	81@40	24.26	26.31	0.4276
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.74	25.79	0.3793
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@160	23.77	25.82	0.3819
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	81@40	24.97	27.02	0.5035
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	24.78	26.83	0.4819
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@160	24.6	26.65	0.4624
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	81@40	23.96	26.01	0.3990
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	23.81	25.86	0.3855
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@160	23.58	25.63	0.3656
77	30	70	649000	3735	DFT-s-OFDM QPSK	90@45	25.16	27.21	0.5260
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	24.67	26.72	0.4699
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@187	24.69	26.74	0.4721
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	90@45	24.16	26.21	0.4178
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	23.91	25.96	0.3945
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@187	23.86	25.91	0.3899
77	30	70	656000	3840	DFT-s-OFDM QPSK	90@45	25.27	27.32	0.5395
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	24.66	26.71	0.4688
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@187	24.72	26.77	0.4753
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	90@45	24.31	26.36	0.4325
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.71	25.76	0.3767
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@187	23.71	25.76	0.3767



77	30	70	663000	3945	DFT-s-OFDM QPSK	90@45	25.16	27.21	0.5260
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	24.85	26.9	0.4898
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@187	24.52	26.57	0.4539
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	90@45	24.11	26.16	0.4130
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	23.91	25.96	0.3945
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@187	23.66	25.71	0.3724
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	108@54	25.14	27.19	0.5236
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	24.67	26.72	0.4699
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@215	24.64	26.69	0.4667
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	108@54	24.14	26.19	0.4159
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	23.53	25.58	0.3614
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@215	23.5	25.55	0.3589
77	30	80	656000	3840	DFT-s-OFDM QPSK	108@54	25.24	27.29	0.5358
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	24.41	26.46	0.4426
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@215	24.55	26.6	0.4571
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	108@54	24.27	26.32	0.4285
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.52	25.57	0.3606
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@215	23.66	25.71	0.3724
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	108@54	25.12	27.17	0.5212
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	24.79	26.84	0.4831
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@215	24.38	26.43	0.4395
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	108@54	24.11	26.16	0.4130
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	23.97	26.02	0.3999
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@215	23.59	25.64	0.3664
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	120@60	25.13	27.18	0.5224
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	24.45	26.5	0.4467
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@243	24.36	26.41	0.4375
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	120@60	24.15	26.2	0.4169
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	23.35	25.4	0.3467
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@243	23.2	25.25	0.3350
77	30	90	656000	3840	DFT-s-OFDM QPSK	120@60	25.22	27.27	0.5333
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	24.36	26.41	0.4375
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@243	24.4	26.45	0.4416
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	120@60	24.2	26.25	0.4217
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.48	25.53	0.3573
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@243	23.55	25.6	0.3631
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	120@60	25.05	27.1	0.5129
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	24.64	26.69	0.4667
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@243	24.11	26.16	0.4130
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	120@60	24.04	26.09	0.4064
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	23.7	25.75	0.3758



77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@243	23.27	25.32	0.3404
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	25.28	27.33	0.5408
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	24.52	26.57	0.4539
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	24.3	26.35	0.4315
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	25.28	27.33	0.5408
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	24.53	26.58	0.4550
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	24.33	26.38	0.4345
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	24.27	26.32	0.4285
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	23.33	25.38	0.3451
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	23.15	25.2	0.3311
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	22.76	24.81	0.3027
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	21.87	23.92	0.2466
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	21.64	23.69	0.2339
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	20.7	22.75	0.1884
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	20.06	22.11	0.1626
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	19.85	21.9	0.1549
77	30	100	650000	3750	CP-OFDM QPSK	137@68	23.77	25.82	0.3819
77	30	100	650000	3750	CP-OFDM QPSK	1@1	22.92	24.97	0.3141
77	30	100	650000	3750	CP-OFDM QPSK	1@271	22.74	24.79	0.3013
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	25.36	27.41	0.5508
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	24.45	26.5	0.4467
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	24.38	26.43	0.4395
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	25.34	27.39	0.5483
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	24.42	26.47	0.4436
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	24.34	26.39	0.4355
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	24.4	26.45	0.4416
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	23.23	25.28	0.3373
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	23.24	25.29	0.3381
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	22.87	24.92	0.3105
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	21.72	23.77	0.2382
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	21.73	23.78	0.2388
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	20.87	22.92	0.1959
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	19.99	22.04	0.1600
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	19.94	21.99	0.1581
77	30	100	656000	3840	CP-OFDM QPSK	137@68	23.83	25.88	0.3873
77	30	100	656000	3840	CP-OFDM QPSK	1@1	22.93	24.98	0.3148
77	30	100	656000	3840	CP-OFDM QPSK	1@271	22.95	25	0.3162



77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	25.29	27.34	0.5420
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	24.75	26.8	0.4786
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	24.18	26.23	0.4198
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	25.3	27.35	0.5433
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	24.72	26.77	0.4753
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	24.16	26.21	0.4178
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	24.3	26.35	0.4315
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	23.93	25.98	0.3963
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	23.36	25.41	0.3475
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	22.81	24.86	0.3062
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	22.2	24.25	0.2661
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	21.68	23.73	0.2360
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	20.77	22.82	0.1914
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	20	22.05	0.1603
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	19.5	21.55	0.1429
77	30	100	662000	3930	CP-OFDM QPSK	137@68	23.78	25.83	0.3828
77	30	100	662000	3930	CP-OFDM QPSK	1@1	23.23	25.28	0.3373
77	30	100	662000	3930	CP-OFDM QPSK	1@271	22.73	24.78	0.3006

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	11.6	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	12.4	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	15.0	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	12.7	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	7.9	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	15.0	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	15.9	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	9.7	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	14.8	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	9.4	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	11.4	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	8.5	PASS	50°C

$|\text{MAX}(\Delta f)| = 15.9 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	3701.777984	$\geq 3700 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	3978.737816	$\leq 3980 \text{ MHz}$	

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	50@0	3.95	13	PASS
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	5.14	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH





Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	656000	3840.0	CP-OFDM QPSK	24@0	8.5712	9.391
77	30	10	656000	3840.0	CP-OFDM 16 QAM	24@0	8.563	9.339
77	30	10	656000	3840.0	CP-OFDM 64 QAM	24@0	8.54	9.092
77	30	10	656000	3840.0	CP-OFDM 256 QAM	24@0	8.5946	9.276
77	30	15	656000	3840.0	CP-OFDM QPSK	38@0	13.573	14.36
77	30	15	656000	3840.0	CP-OFDM 16 QAM	38@0	13.542	14.36
77	30	15	656000	3840.0	CP-OFDM 64 QAM	38@0	13.548	14.41
77	30	15	656000	3840.0	CP-OFDM 256 QAM	38@0	13.511	14.25
77	30	20	656000	3840.0	CP-OFDM QPSK	51@0	18.273	19.46
77	30	20	656000	3840.0	CP-OFDM 16 QAM	51@0	18.2	19.18
77	30	20	656000	3840.0	CP-OFDM 64 QAM	51@0	18.182	19.4
77	30	20	656000	3840.0	CP-OFDM 256 QAM	51@0	18.213	19.35
77	30	25	656000	3840.0	CP-OFDM QPSK	65@0	23.247	24.25
77	30	25	656000	3840.0	CP-OFDM 16 QAM	65@0	23.264	24.05
77	30	25	656000	3840.0	CP-OFDM 64 QAM	65@0	23.146	24.14
77	30	25	656000	3840.0	CP-OFDM 256 QAM	65@0	23.159	24.21
77	30	30	656000	3840.0	CP-OFDM QPSK	78@0	27.82	28.97
77	30	30	656000	3840.0	CP-OFDM 16 QAM	78@0	27.795	28.86
77	30	30	656000	3840.0	CP-OFDM 64 QAM	78@0	27.732	28.87
77	30	30	656000	3840.0	CP-OFDM 256 QAM	78@0	27.852	29.22
77	30	40	656000	3840.0	CP-OFDM QPSK	106@0	37.846	39.07
77	30	40	656000	3840.0	CP-OFDM 16 QAM	106@0	37.899	39.32




77	30	40	656000	3840.0	CP-OFDM 64 QAM	106@0	37.836	39.28
77	30	40	656000	3840.0	CP-OFDM 256 QAM	106@0	37.826	39.14
77	30	50	656000	3840.0	CP-OFDM QPSK	133@0	47.54	49.54
77	30	50	656000	3840.0	CP-OFDM 16 QAM	133@0	47.396	49.31
77	30	50	656000	3840.0	CP-OFDM 64 QAM	133@0	47.454	49.17
77	30	50	656000	3840.0	CP-OFDM 256 QAM	133@0	47.416	49.12
77	30	60	656000	3840.0	CP-OFDM QPSK	162@0	57.801	59.67
77	30	60	656000	3840.0	CP-OFDM 16 QAM	162@0	57.654	59.67
77	30	60	656000	3840.0	CP-OFDM 64 QAM	162@0	57.824	59.78
77	30	60	656000	3840.0	CP-OFDM 256 QAM	162@0	57.786	59.72
77	30	70	656000	3840.0	CP-OFDM QPSK	189@0	67.439	69.93
77	30	70	656000	3840.0	CP-OFDM 16 QAM	189@0	67.486	69.9
77	30	70	656000	3840.0	CP-OFDM 64 QAM	189@0	67.703	69.88
77	30	70	656000	3840.0	CP-OFDM 256 QAM	189@0	67.513	69.73
77	30	80	656000	3840.0	CP-OFDM QPSK	217@0	77.417	79.84
77	30	80	656000	3840.0	CP-OFDM 16 QAM	217@0	77.329	79.97
77	30	80	656000	3840.0	CP-OFDM 64 QAM	217@0	77.736	80.23
77	30	80	656000	3840.0	CP-OFDM 256 QAM	217@0	77.42	79.95
77	30	90	656000	3840.0	CP-OFDM QPSK	245@0	87.297	90.4
77	30	90	656000	3840.0	CP-OFDM 16 QAM	245@0	87.397	90.29
77	30	90	656000	3840.0	CP-OFDM 64 QAM	245@0	87.255	90.32
77	30	90	656000	3840.0	CP-OFDM 256 QAM	245@0	87.354	90.16
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.349	100.3
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.139	100.7




77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.188	100.3
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.692	100.4




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

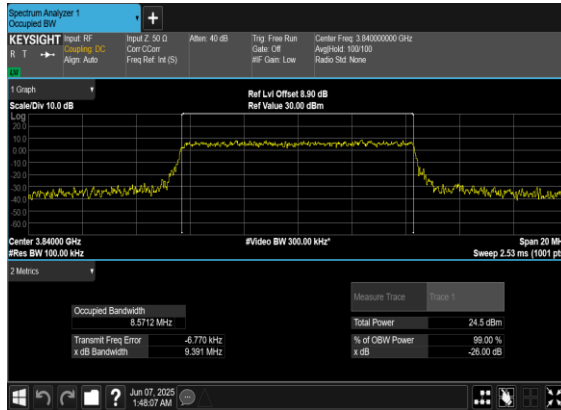


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

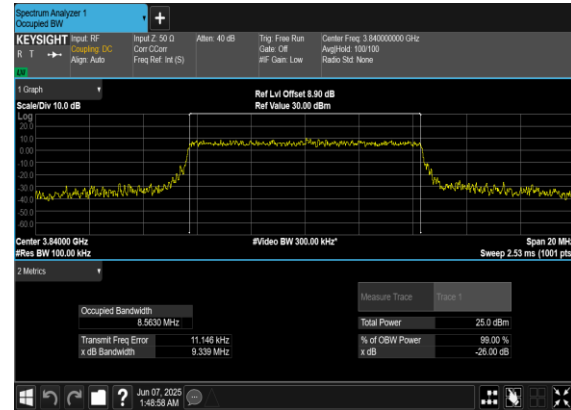

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

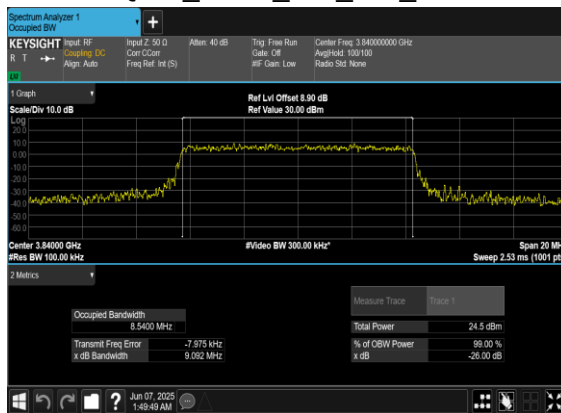


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

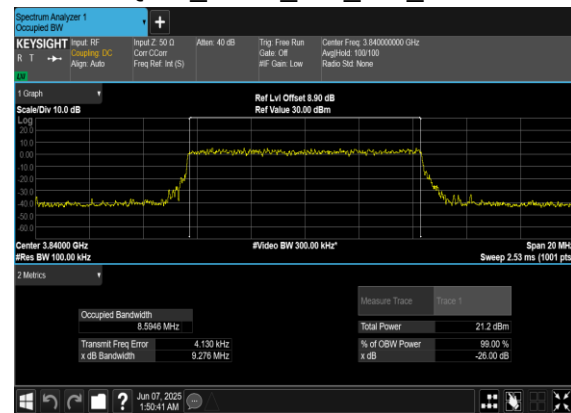





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

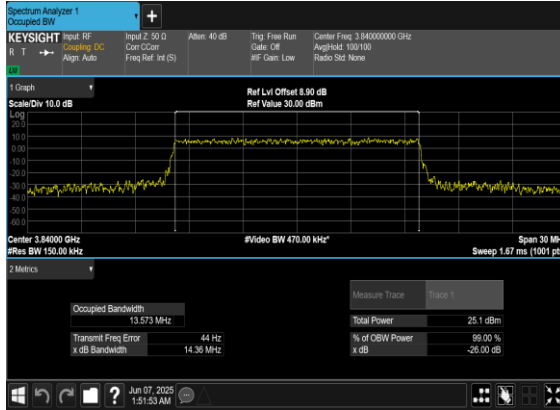


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

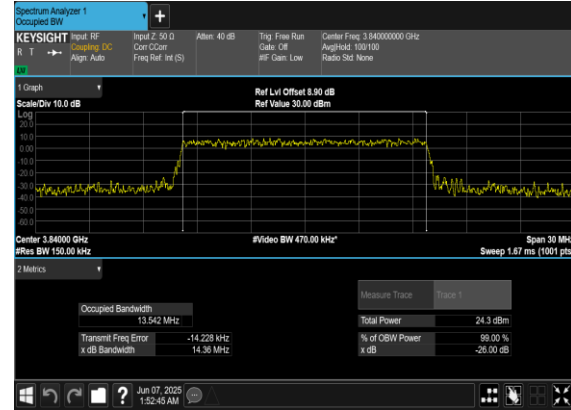

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

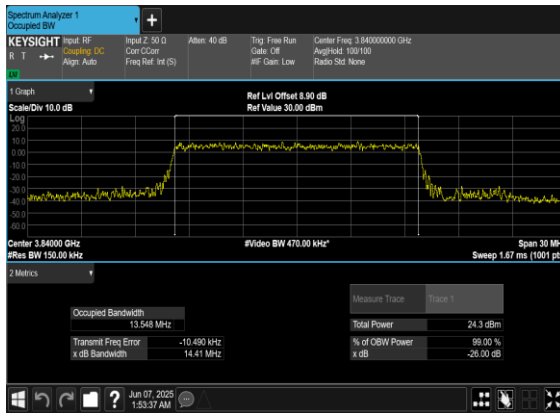


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

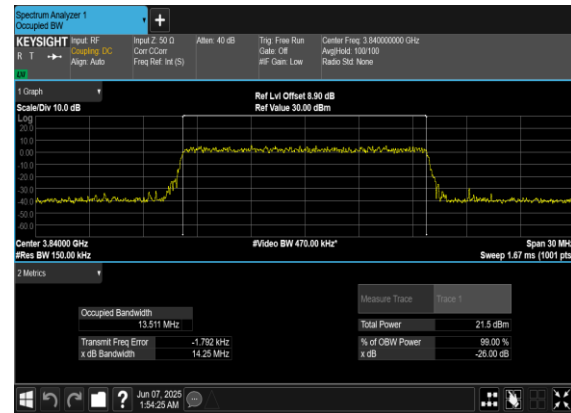





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

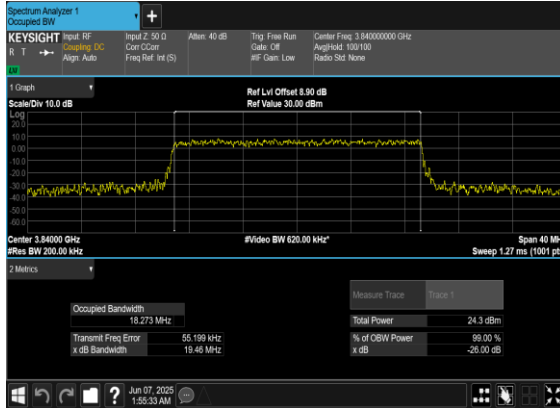


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

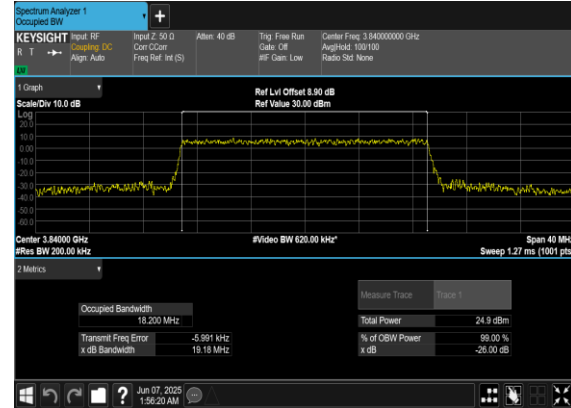

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

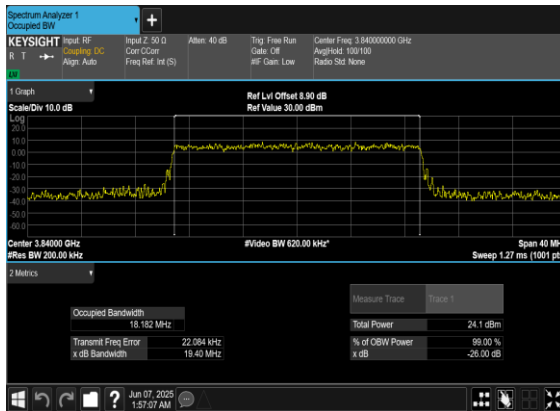


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

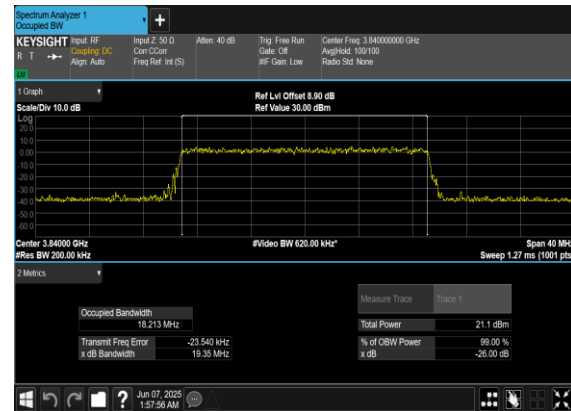





N77(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

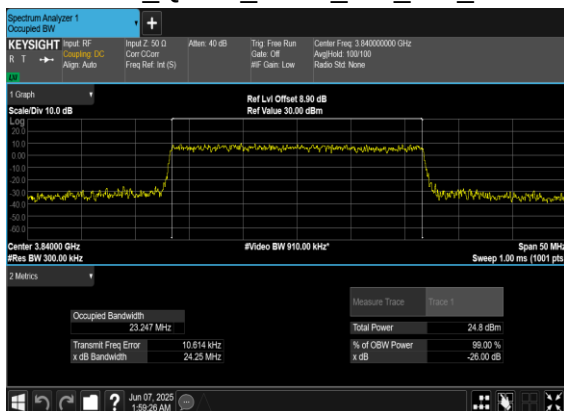


N77(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

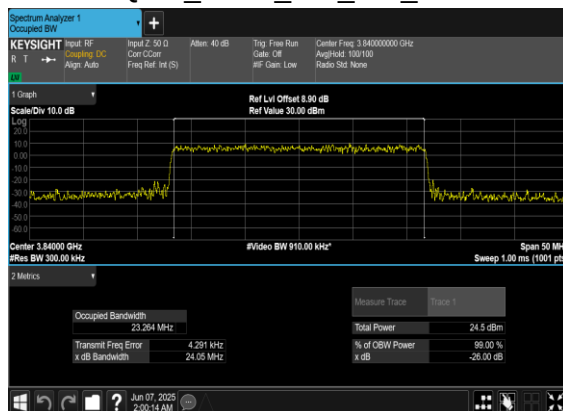

N77(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

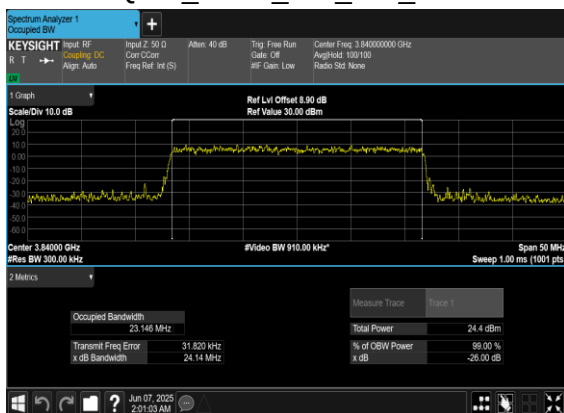


N77(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

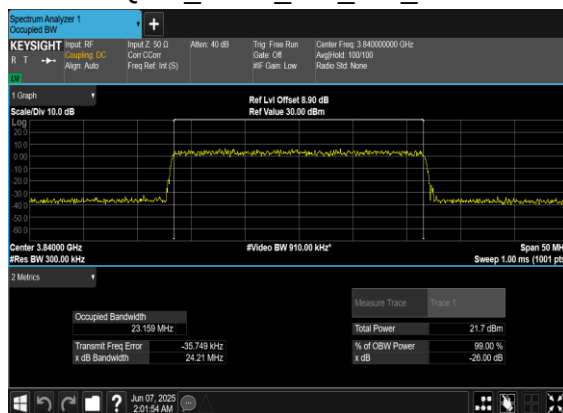





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

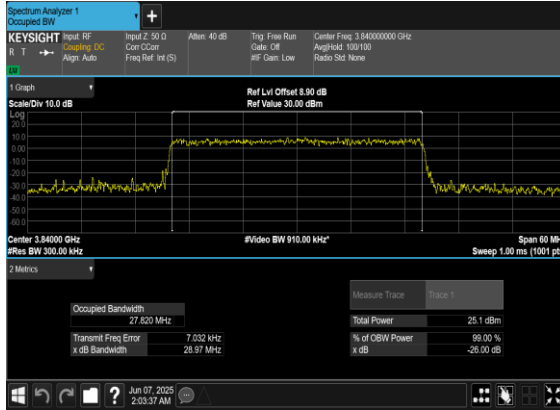


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

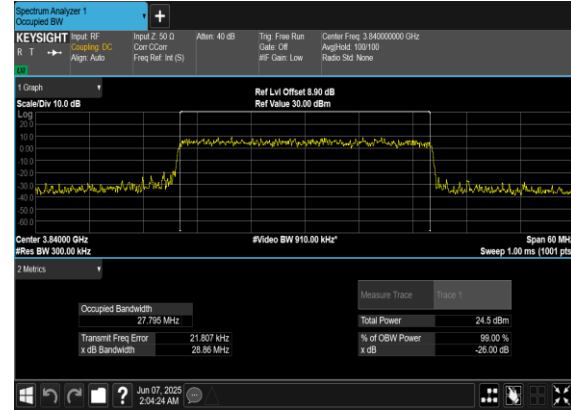

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

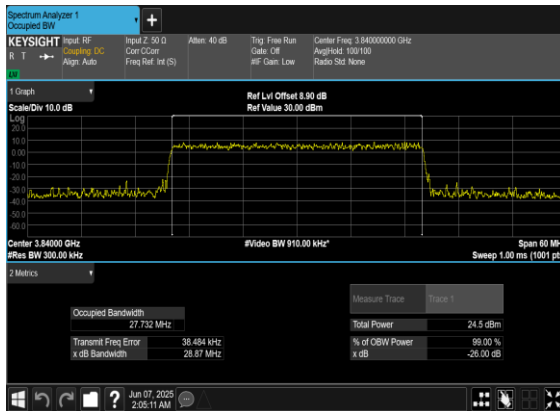


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

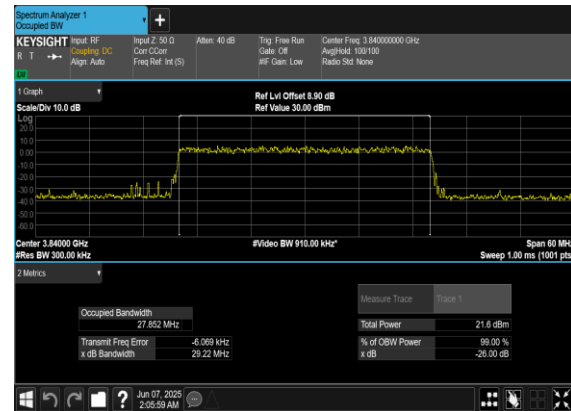





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

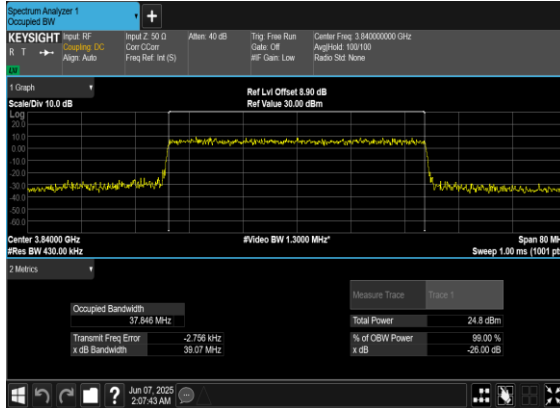


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

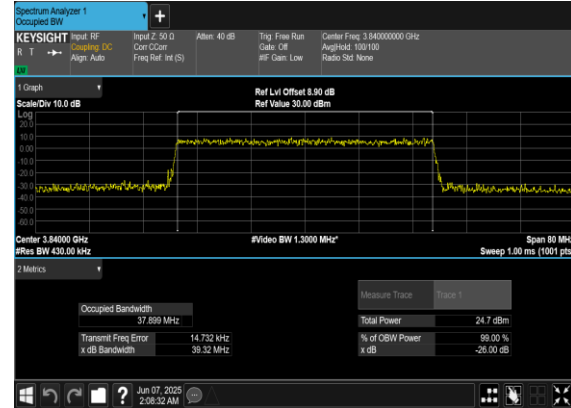

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

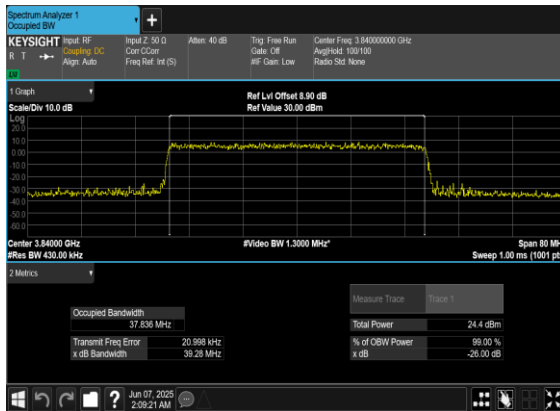


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

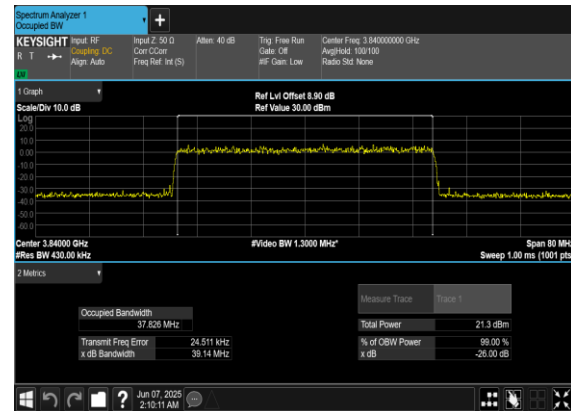





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

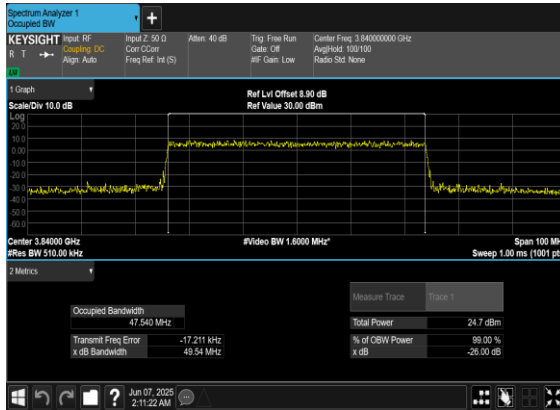


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

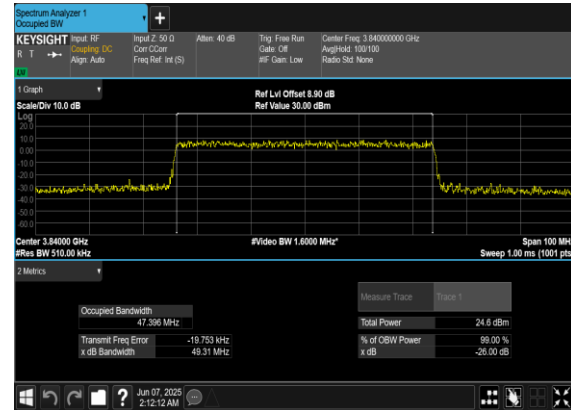

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

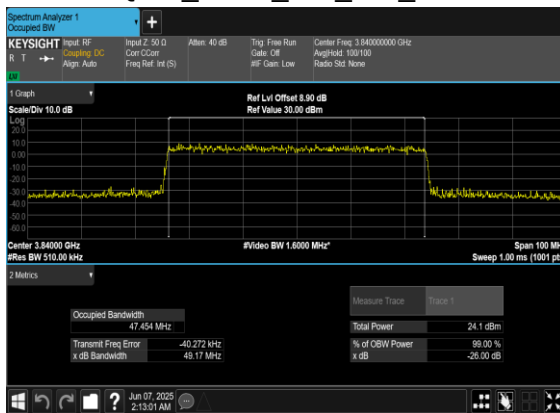


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

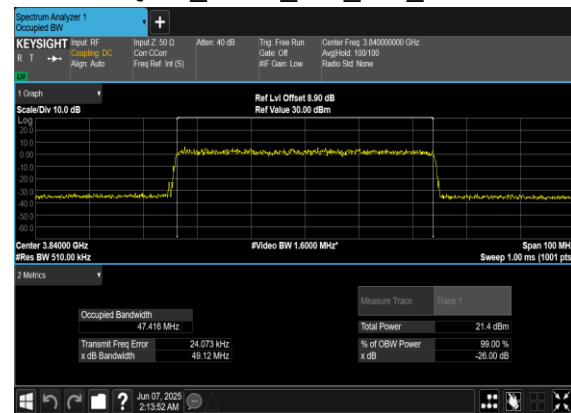





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

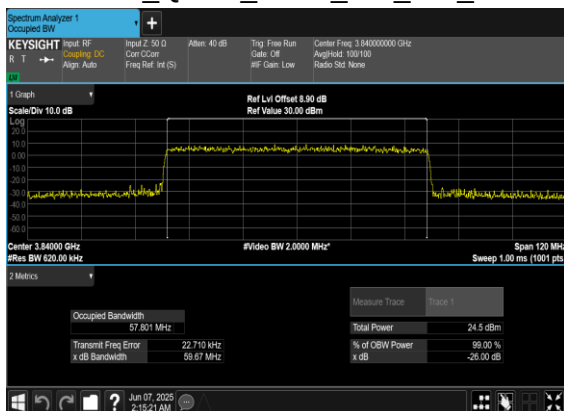


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

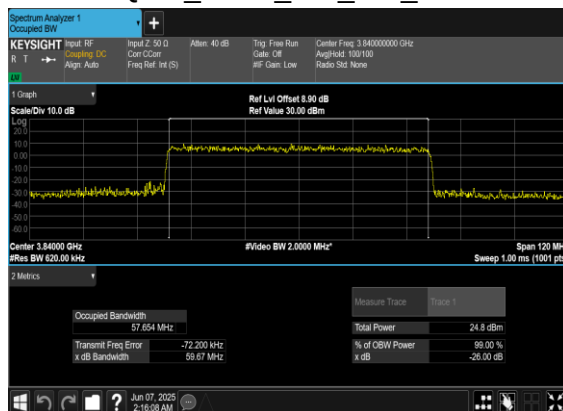

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

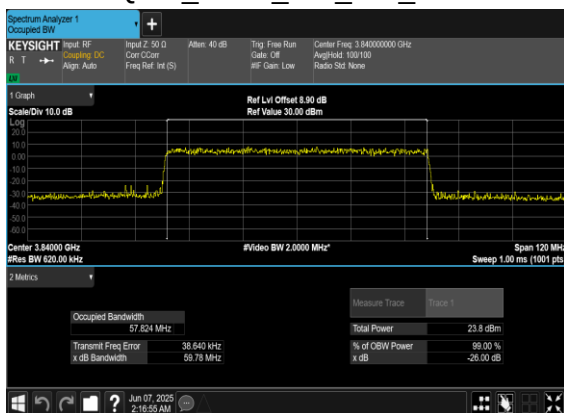


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

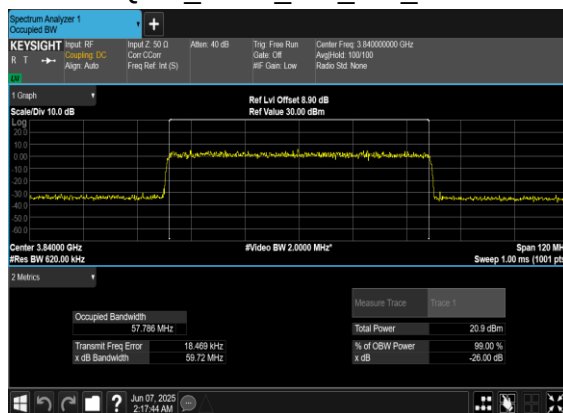





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

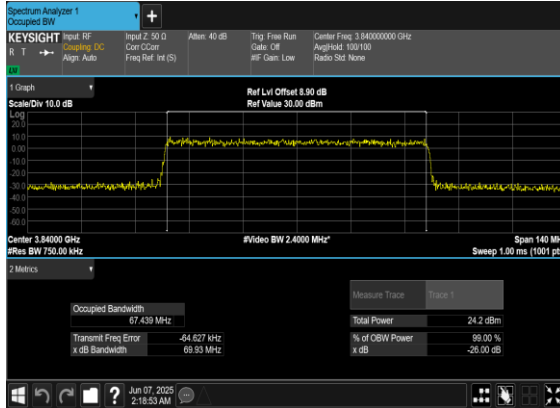


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

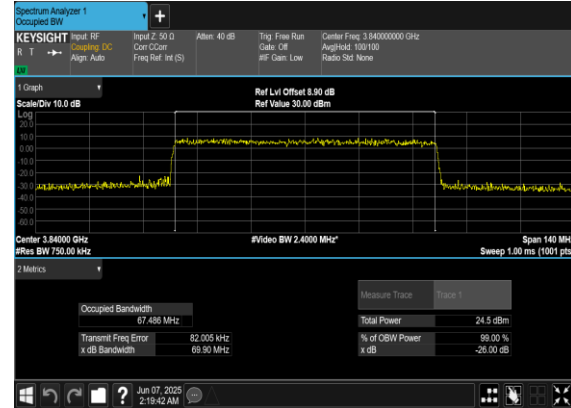

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

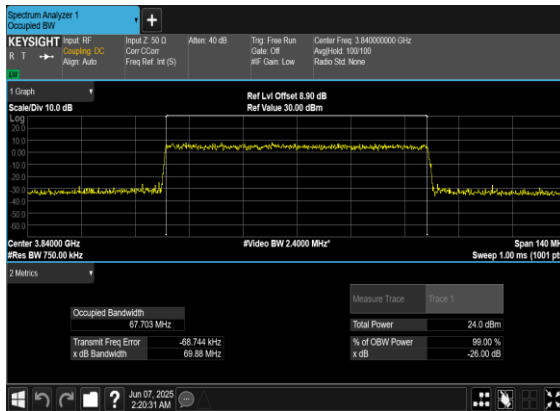


N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

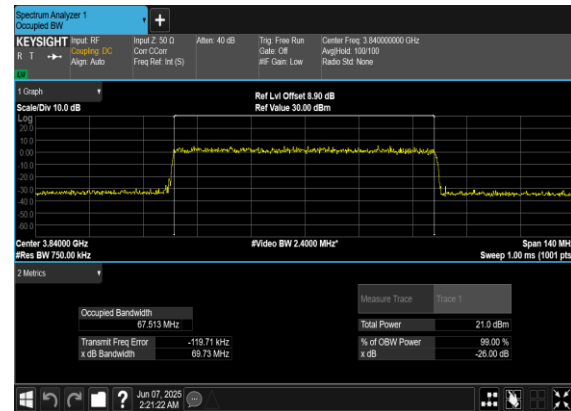





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

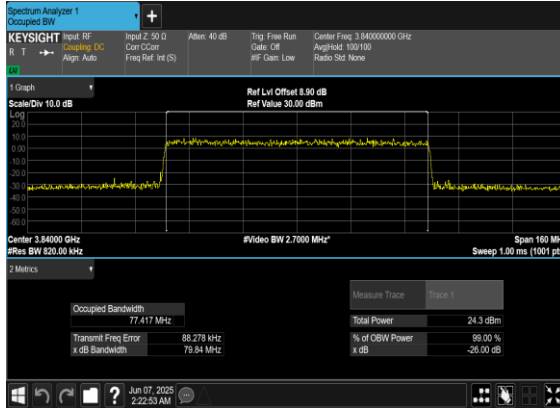


N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

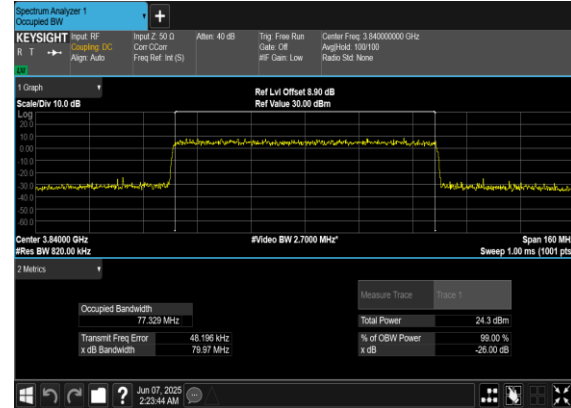

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

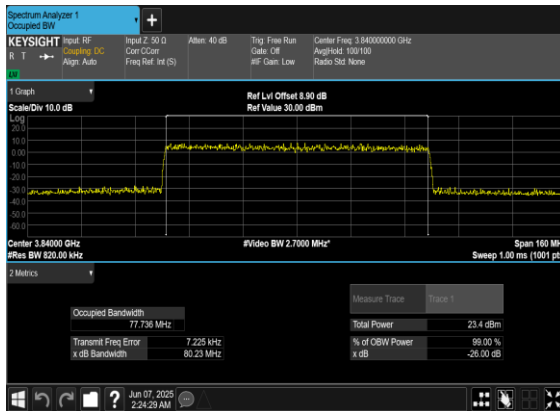


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

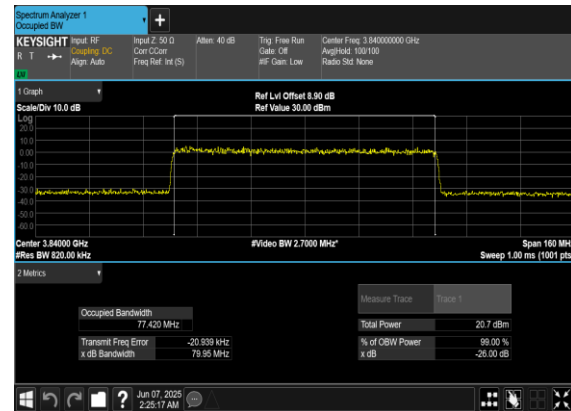





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

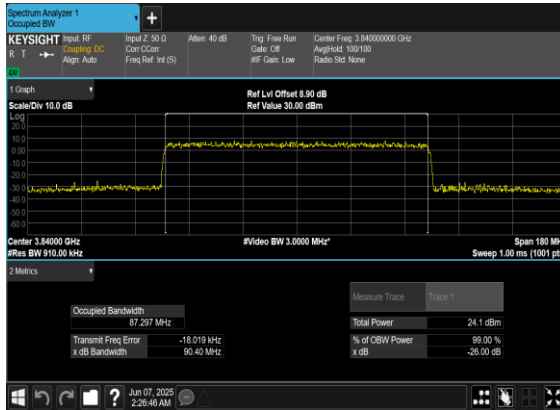


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

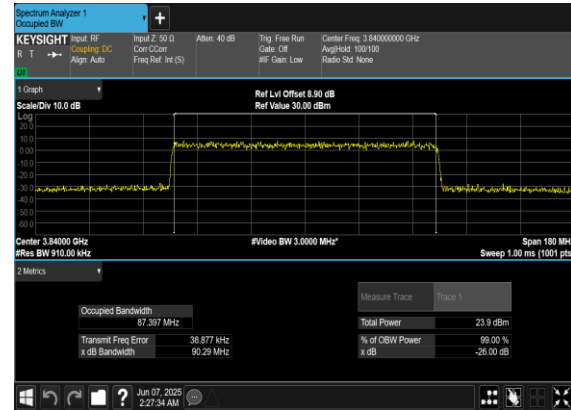

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

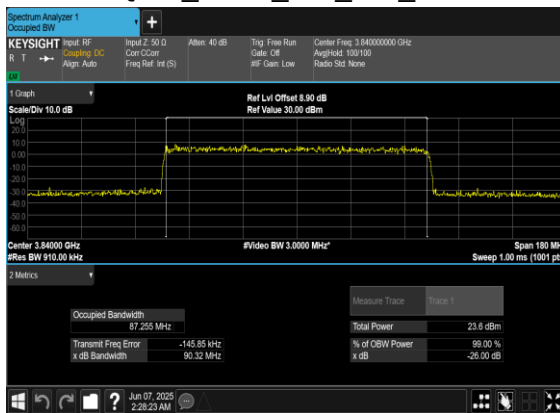


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

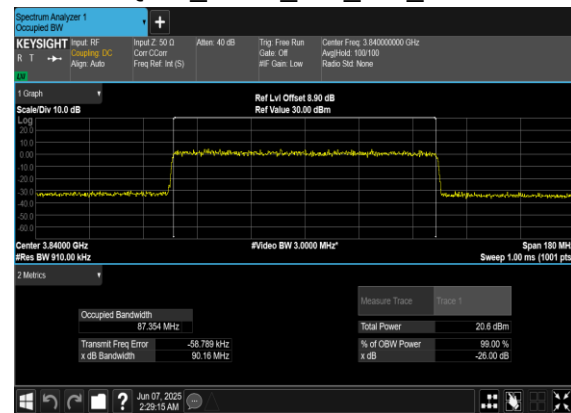





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

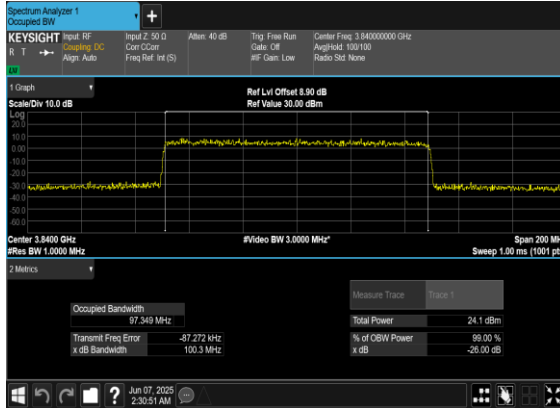


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

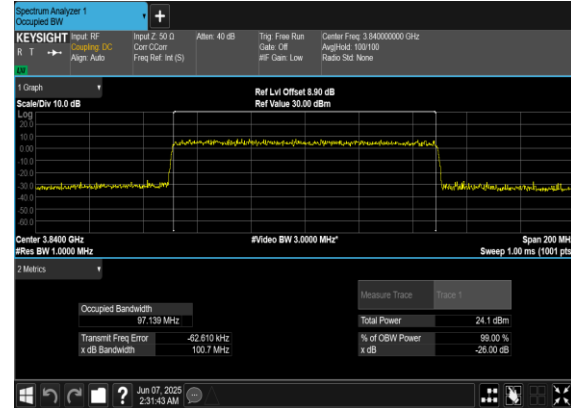

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

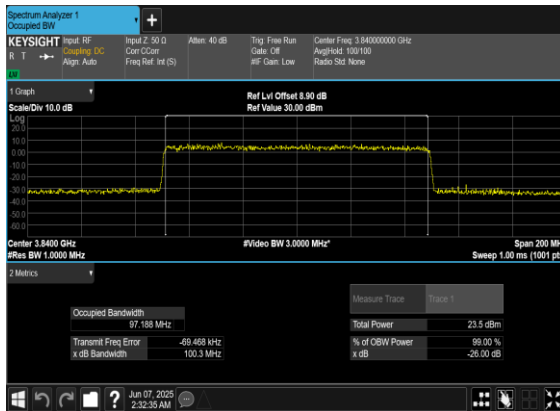

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

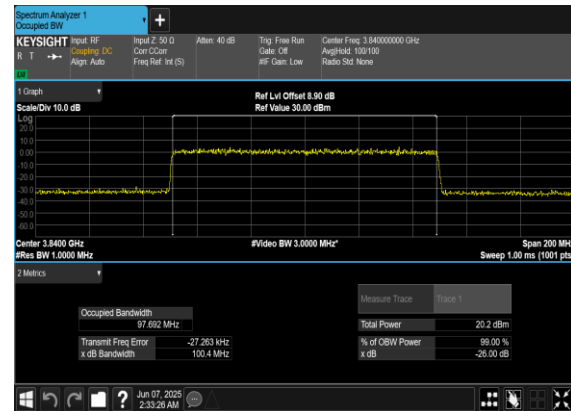



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	---



77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---




77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

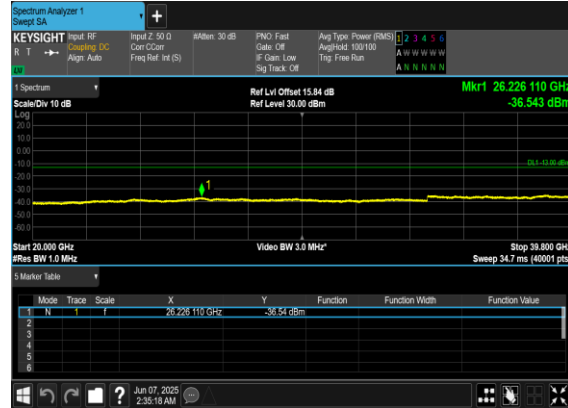

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

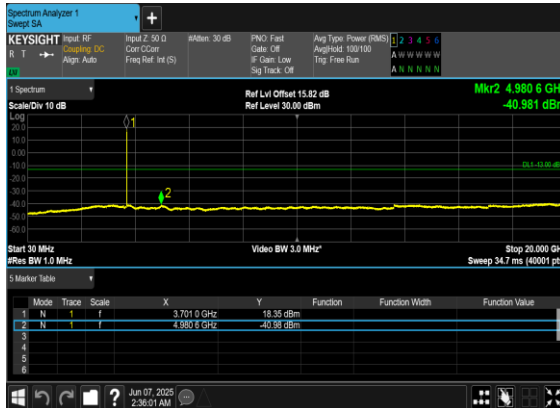


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

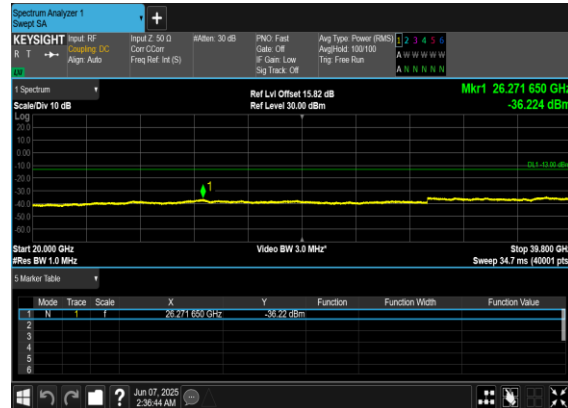





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

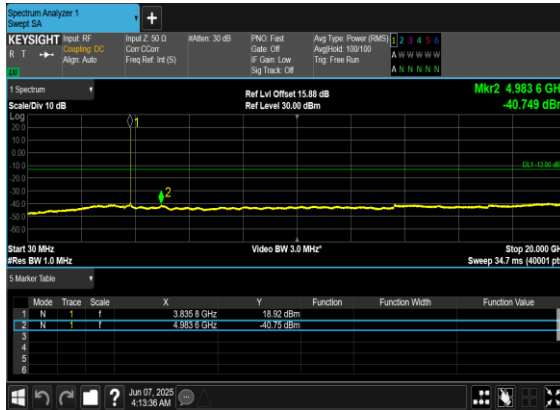


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

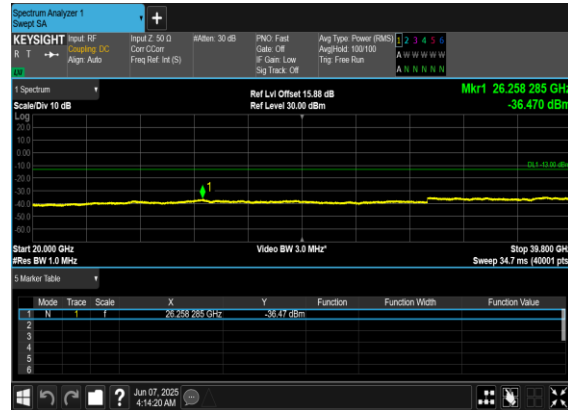

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

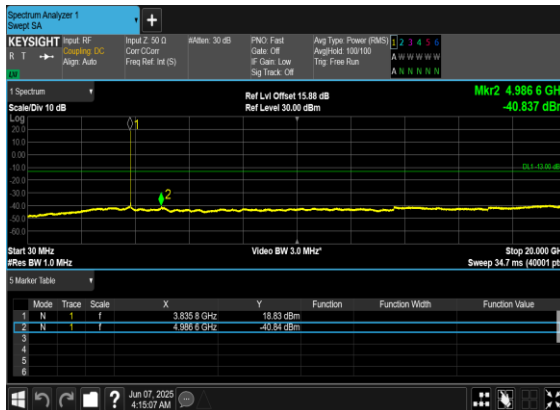


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

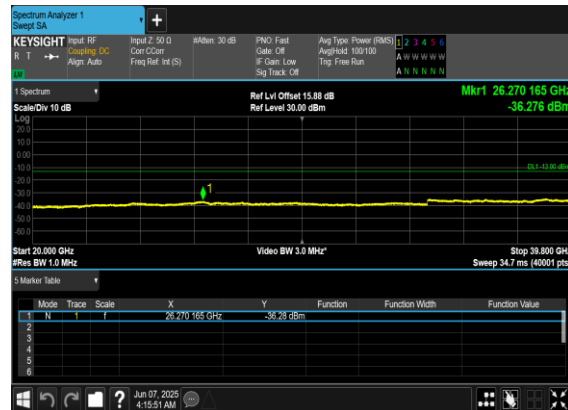





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

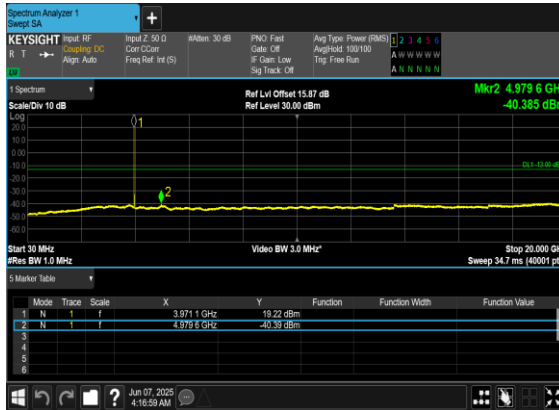


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

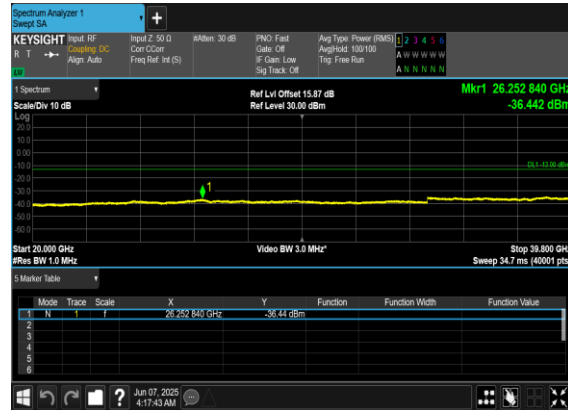

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

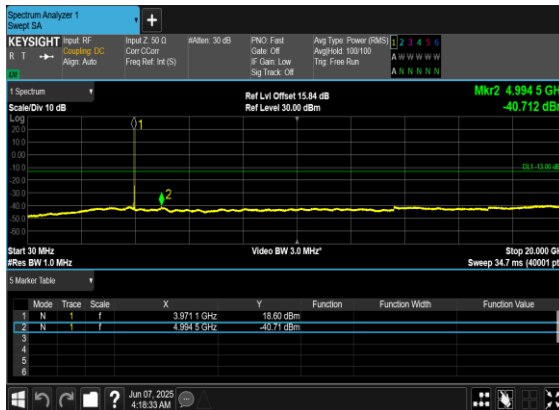


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

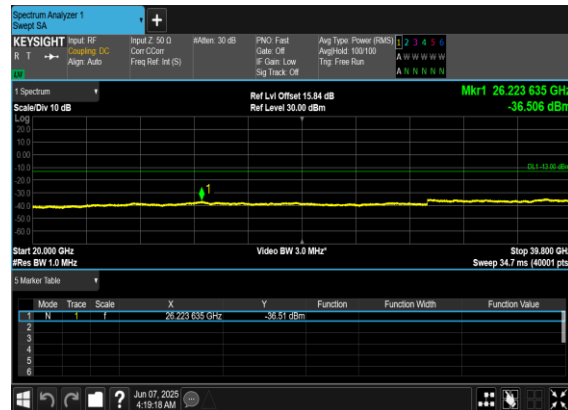




N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

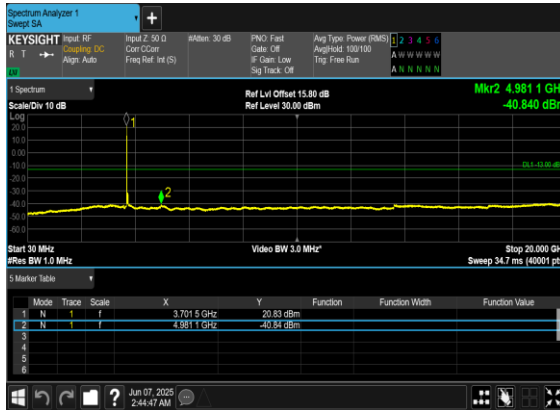


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH



N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

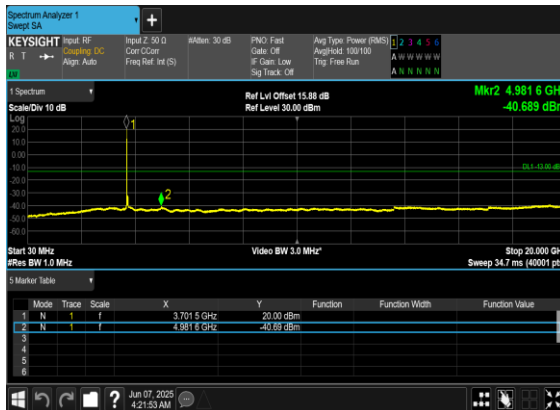

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

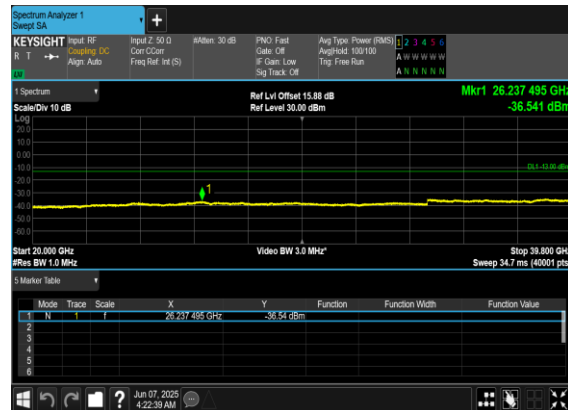





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

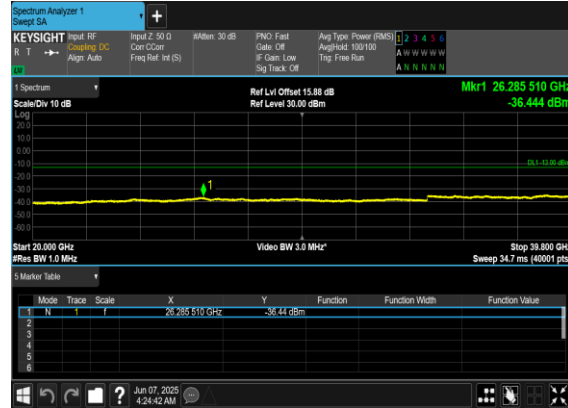

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

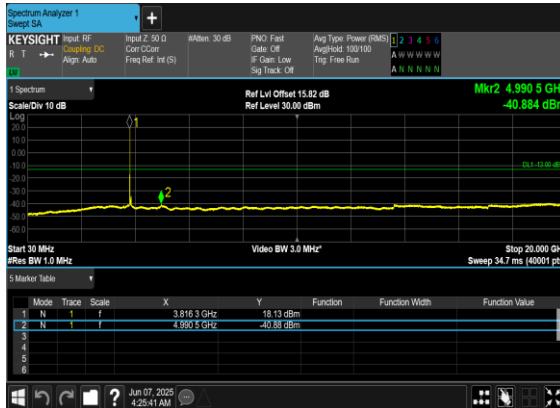


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

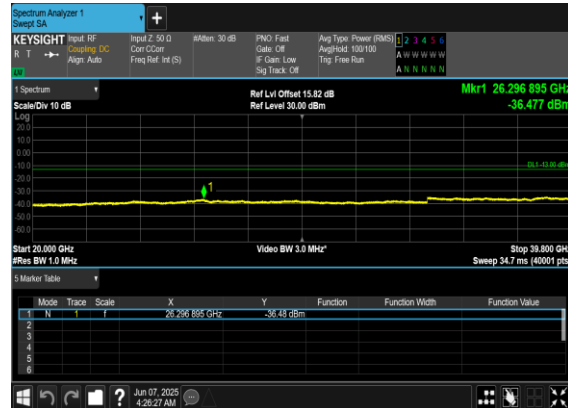





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

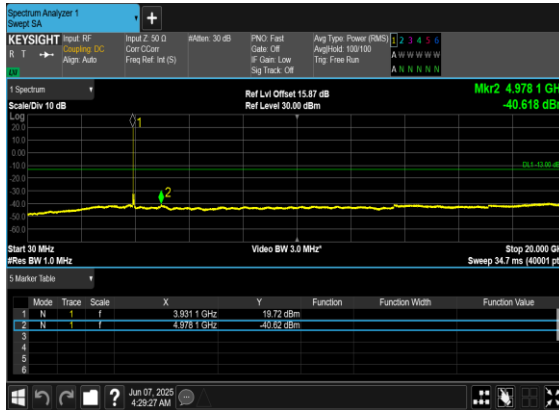


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

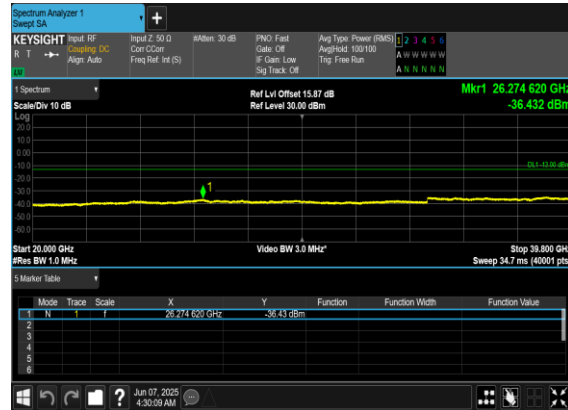

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

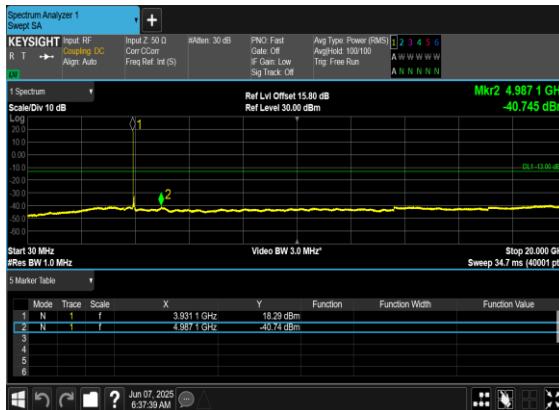


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

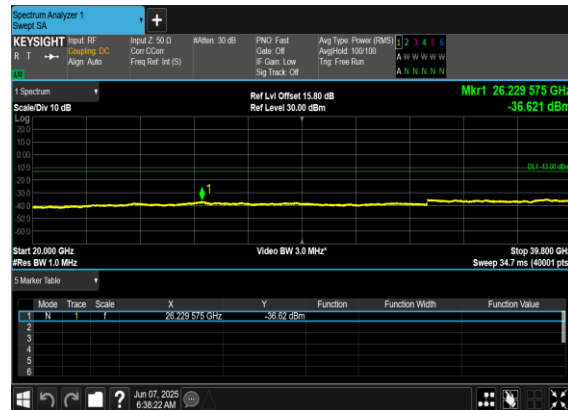





N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

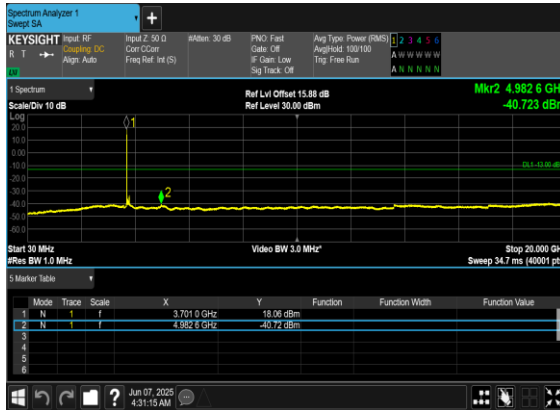

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

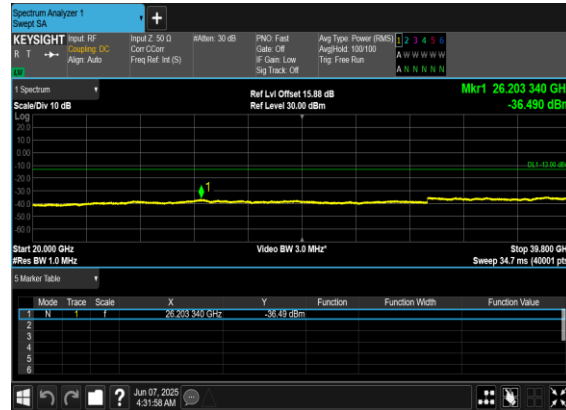

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

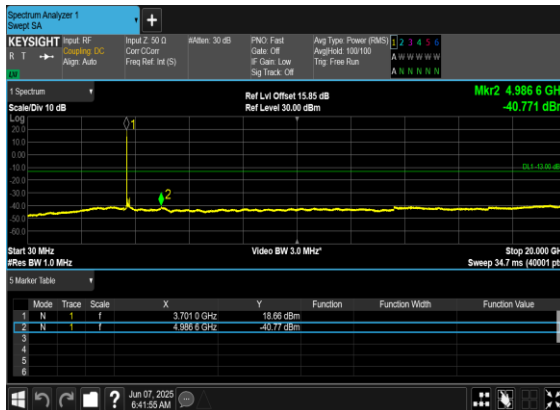

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

