

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2025/8/12

01_LTE Band 13_10M_QPSK_1RB_25Offset_Bottom Face_0mm_Ch23230

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 43.044$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

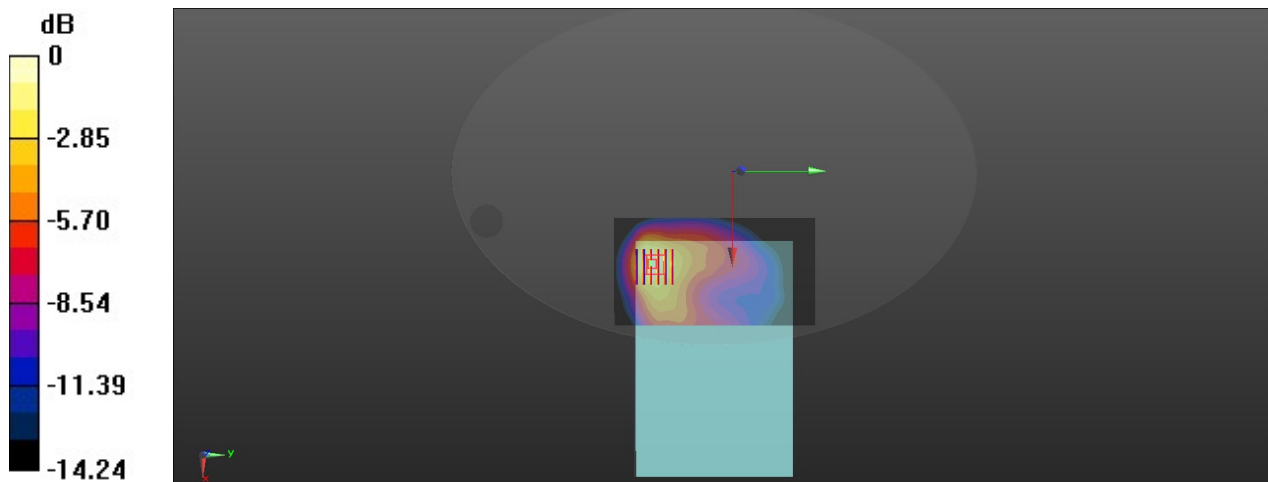Area Scan (81x151x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.16 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.255 V/m ; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.47 W/kg **SAR(1 g) = 0.874 W/kg ; SAR(10 g) = 0.546 W/kg** Smallest distance from peaks to all points 3 dB below = 12.2 mm Ratio of SAR at M2 to SAR at M1 = 61.7% Maximum value of SAR (measured) = 1.23 W/kg 0 dB = 1.23 W/kg = 0.90 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2025/8/12

02_LTE Band 14_10M_QPSK_1RB_25Offset_Bottom Face_0mm_Ch23330

Communication System: UID 0, LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.991$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

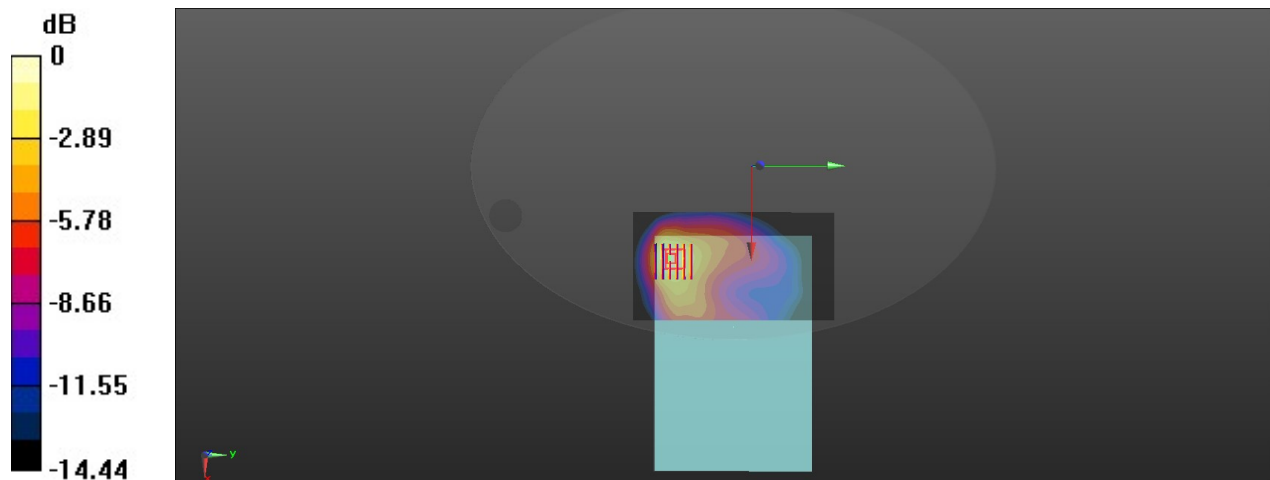Area Scan (81x151x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.07 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.047 V/m ; Power Drift = 0.13 dB Peak SAR (extrapolated) = 1.40 W/kg **SAR(1 g) = 0.827 W/kg ; SAR(10 g) = 0.512 W/kg** Smallest distance from peaks to all points 3 dB below = 14.3 mm Ratio of SAR at M2 to SAR at M1 = 60.7% Maximum value of SAR (measured) = 1.18 W/kg 0 dB = 1.18 W/kg = 0.72 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2025/8/12

03_LTE Band 17_10M_QPSK_1RB_25Offset_Bottom Face_0mm_Ch23790

Communication System: UID 0, LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 43.179$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

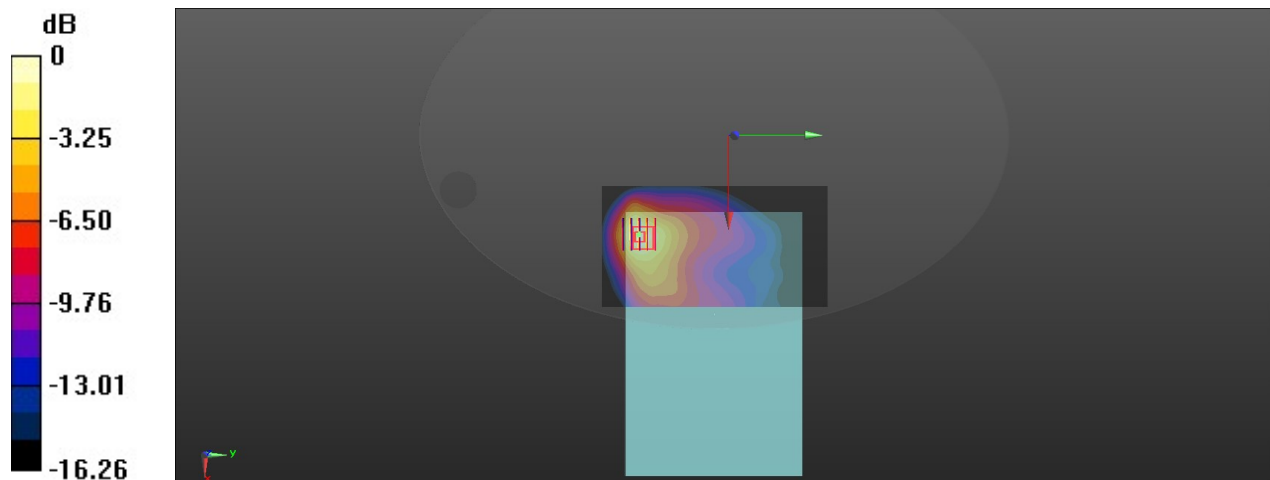Area Scan (81x151x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.26 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.80 W/kg **SAR(1 g) = 0.947 W/kg ; SAR(10 g) = 0.562 W/kg** Smallest distance from peaks to all points 3 dB below = 10.7 mm Ratio of SAR at M2 to SAR at M1 = 52.5% Maximum value of SAR (measured) = 1.49 W/kg 0 dB = 1.49 W/kg = 1.73 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/8/12

04_LTE Band 71_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch133297

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.9170 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 1.42 W/kg

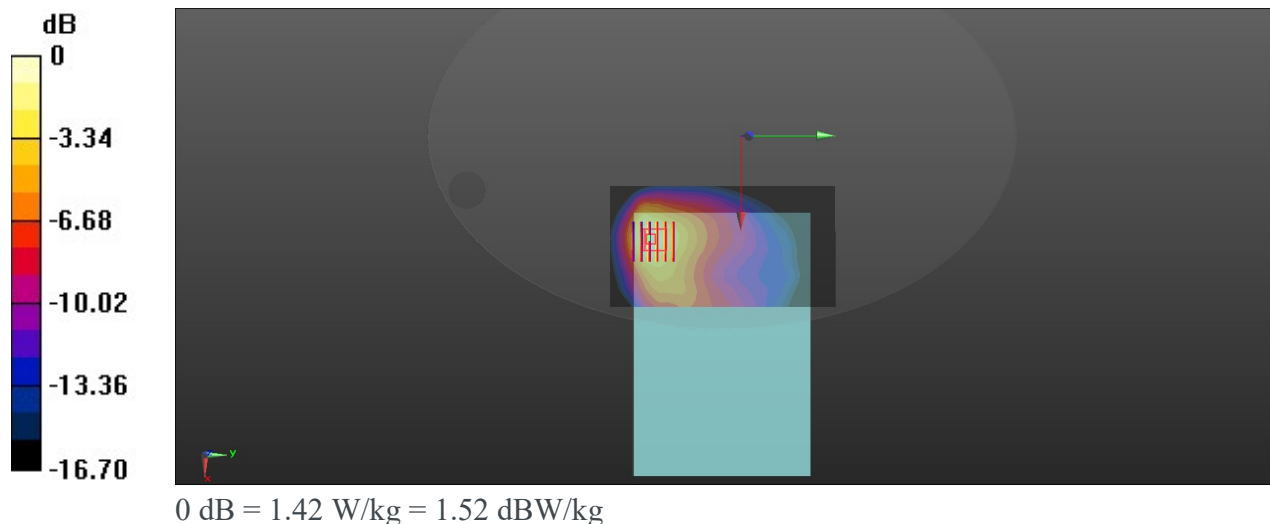

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/8/12

05_FR1 n12_15M_QPSK_36RB_22Offset_DFT-15_Bottom Face_0mm_Ch141500

Communication System: UID 0, 5G NR (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 43.188$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7380 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.449 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.35 W/kg

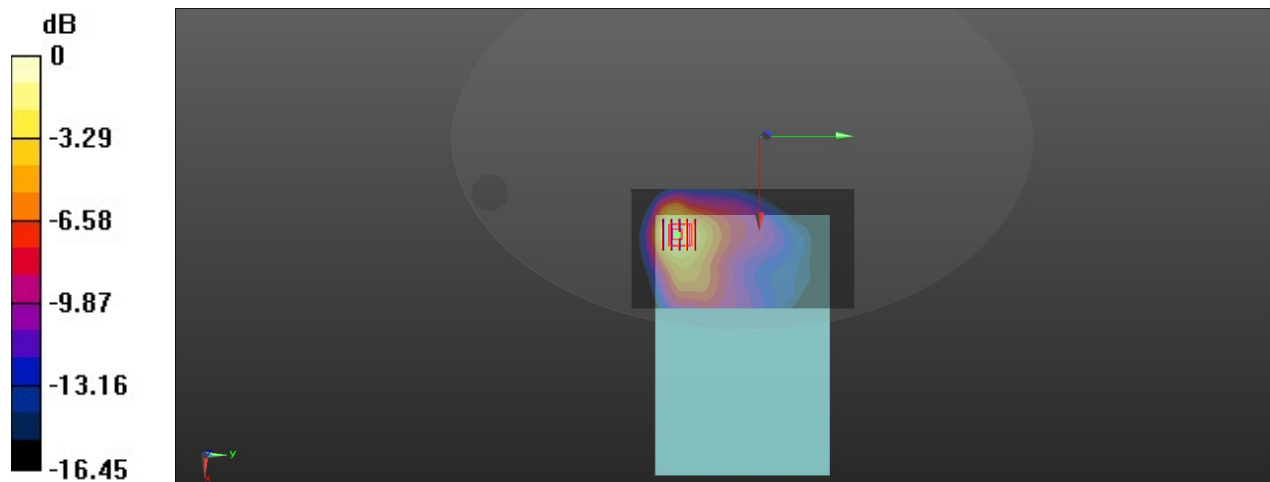

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2025/8/12

06_FR1 n13_10M_QPSK_25RB_14Offset_DFT-15_Bottom Face_0mm_Ch156400

Communication System: UID 0, 5G NR (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 43.044$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

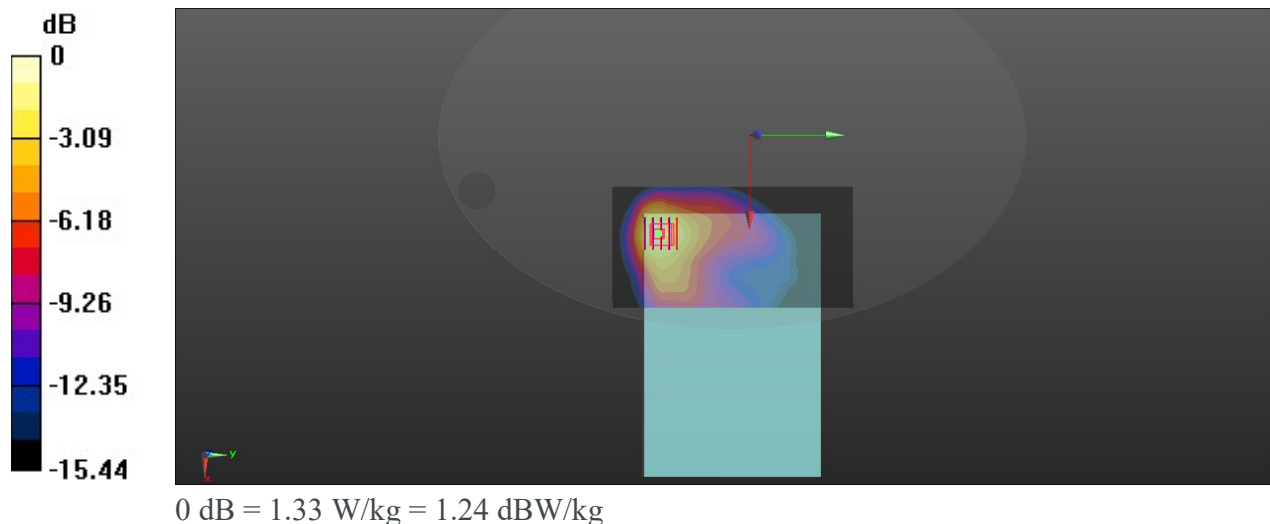Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.12 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0.6820 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.67 W/kg **SAR(1 g) = 0.846 W/kg ; SAR(10 g) = 0.490 W/kg** Smallest distance from peaks to all points 3 dB below = 10.1 mm Ratio of SAR at M2 to SAR at M1 = 52.3% Maximum value of SAR (measured) = 1.33 W/kg 

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab


Date: 2025/8/12

07_FR1 n14_10M_QPSK_25RB_14Offset_DFT-15_Bottom Face_0mm_Ch158600

Communication System: UID 0, 5G NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 42.991$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$ **DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

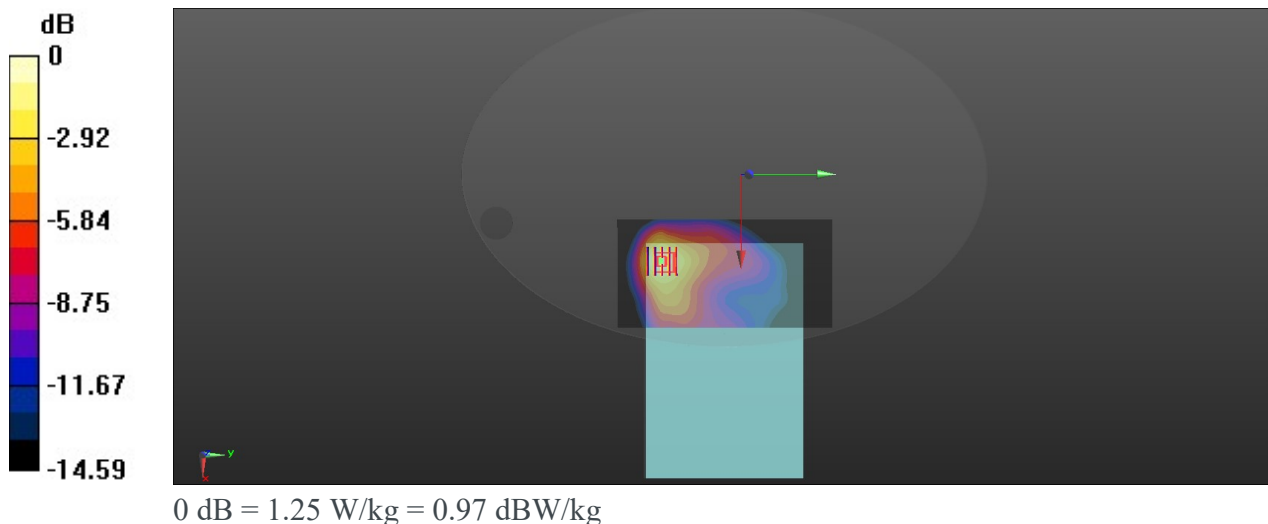Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$ Maximum value of SAR (interpolated) = 1.27 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 0.5500 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.69 W/kg **SAR(1 g) = 0.851 W/kg ; SAR(10 g) = 0.494 W/kg** Smallest distance from peaks to all points 3 dB below = 9.6 mm Ratio of SAR at M2 to SAR at M1 = 54.8% Maximum value of SAR (measured) = 1.25 W/kg 

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/8/12

08_FR1 n71_20M_QPSK_50RB_28Offset_DFT-15_Bottom Face_0mm_Ch136100

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.318$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.93, 9.65, 9.97); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6930 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.12 W/kg

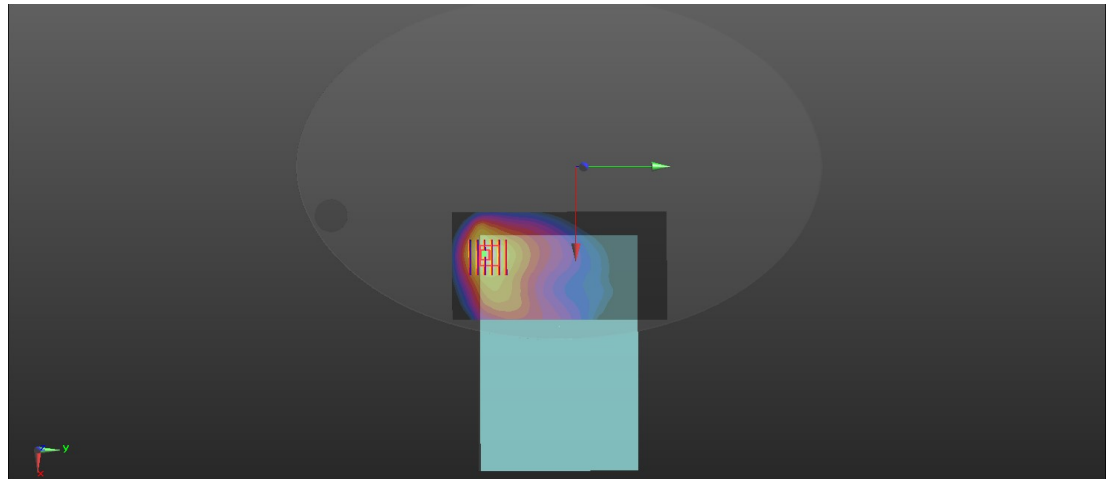

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/6/30

09_WCDMA V_RMC 12.2Kbps_Bottom Face_0mm_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 42.837$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.61, 9.34, 9.64); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.45 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.5520 V/m; Power Drift = -0.16 dB



Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.604 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.42 W/kg

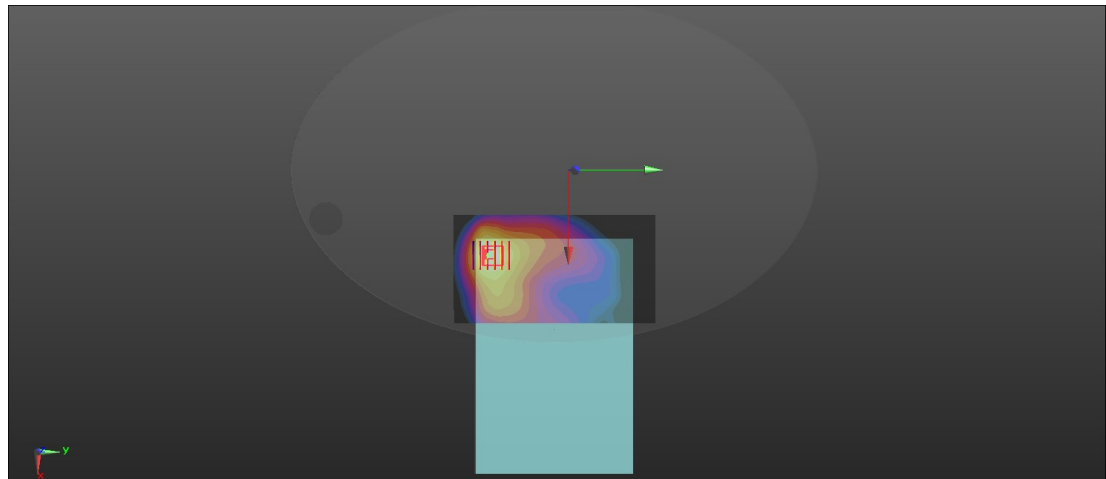

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/6/30

10_LTE Band 26_15M_QPSK_1RB_37Offset_Bottom Face_0mm_Ch26865

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 42.824$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.61, 9.34, 9.64); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.7930 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.854 W/kg; SAR(10 g) = 0.518 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.6%

Maximum value of SAR (measured) = 1.35 W/kg

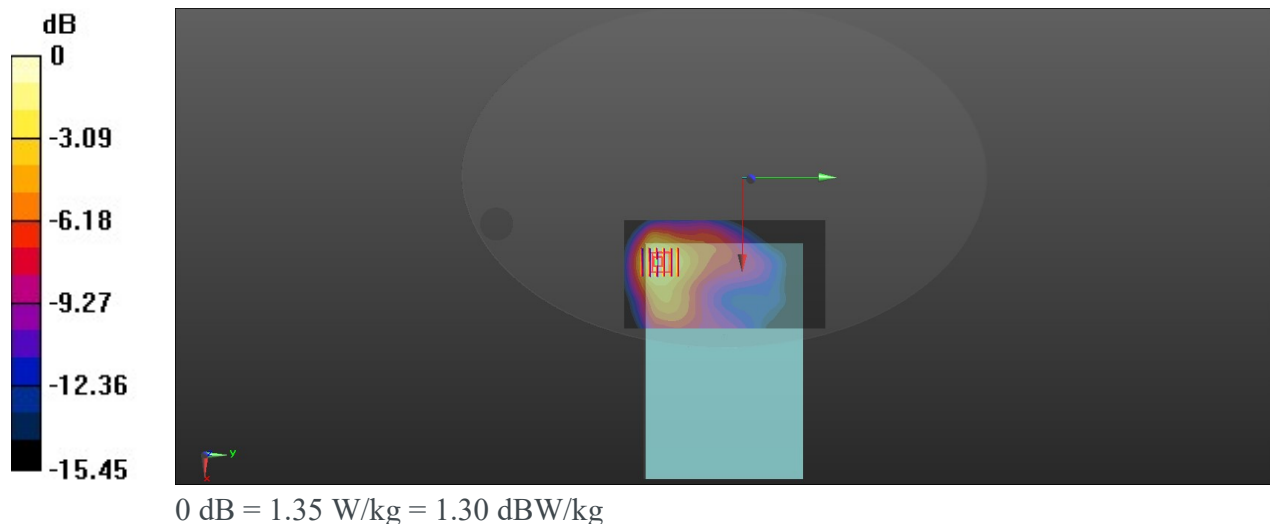

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/6/30

11_FR1 n26_20M_QPSK_50RB_28Offset_DFT-15_Bottom Face_0mm_Ch166300

Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 42.824$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.61, 9.34, 9.64); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.6240 V/m; Power Drift = 0.15 dB



Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.533 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 1.34 W/kg

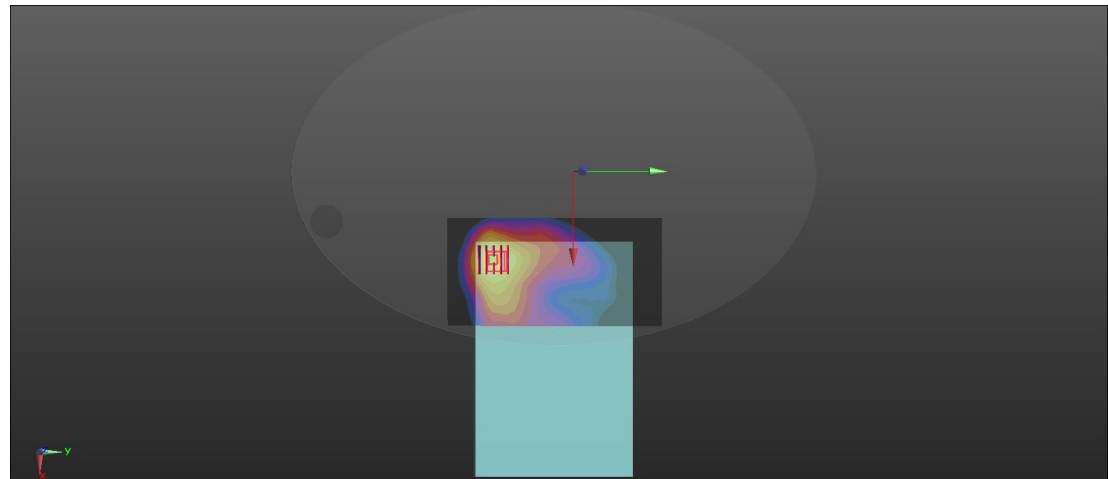

0 dB = 1.34 W/kg = 1.27 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/5

12_WCDMA IV_RMC 12.2Kbps_Bottom Face_0mm_Ch1312

Communication System: UID 0, UMTS (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium: HSL_1750 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.347$ S/m; $\epsilon_r = 40.446$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.14, 7.91, 8.17); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.500 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.995 W/kg; SAR(10 g) = 0.534 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.50 W/kg

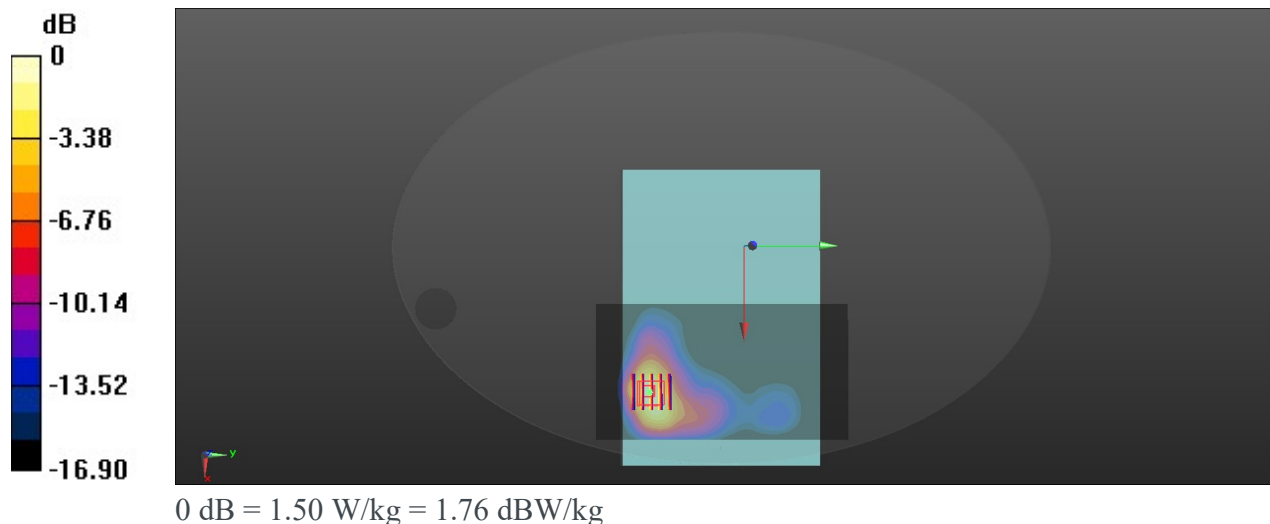

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/5

13_LTE Band 66_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch132072

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.432$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.14, 7.91, 8.17); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.731 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.501 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 1.42 W/kg

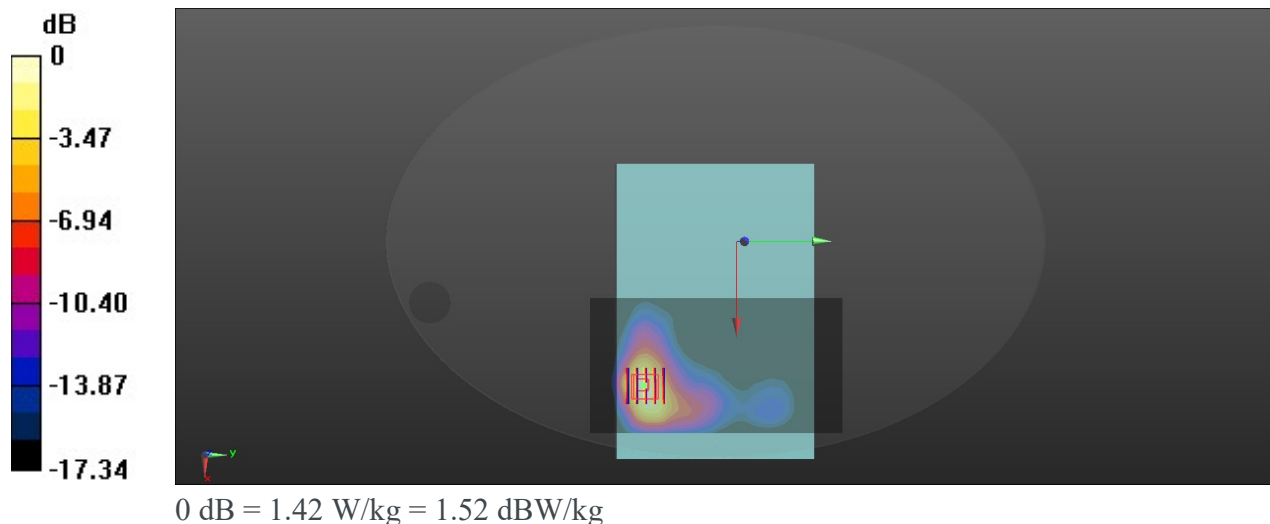

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/5

14_FR1 n66_40M_QPSK_108RB_54Offset_DFT-15_Bottom Face_0mm_Ch349000

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 40.377$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.14, 7.91, 8.17); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.958 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.493 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 1.41 W/kg

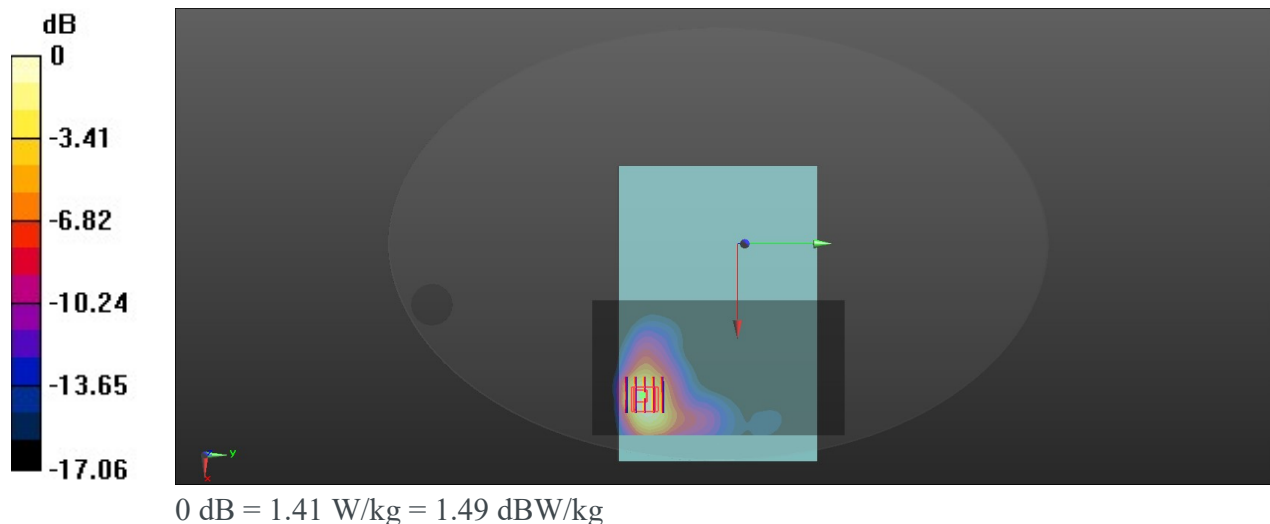

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/3

15_WCDMA II_RMC 12.2Kbps_Bottom Face_0mm_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.82$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.83, 7.61, 7.86); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0.5890 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.972 W/kg; SAR(10 g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.47 W/kg

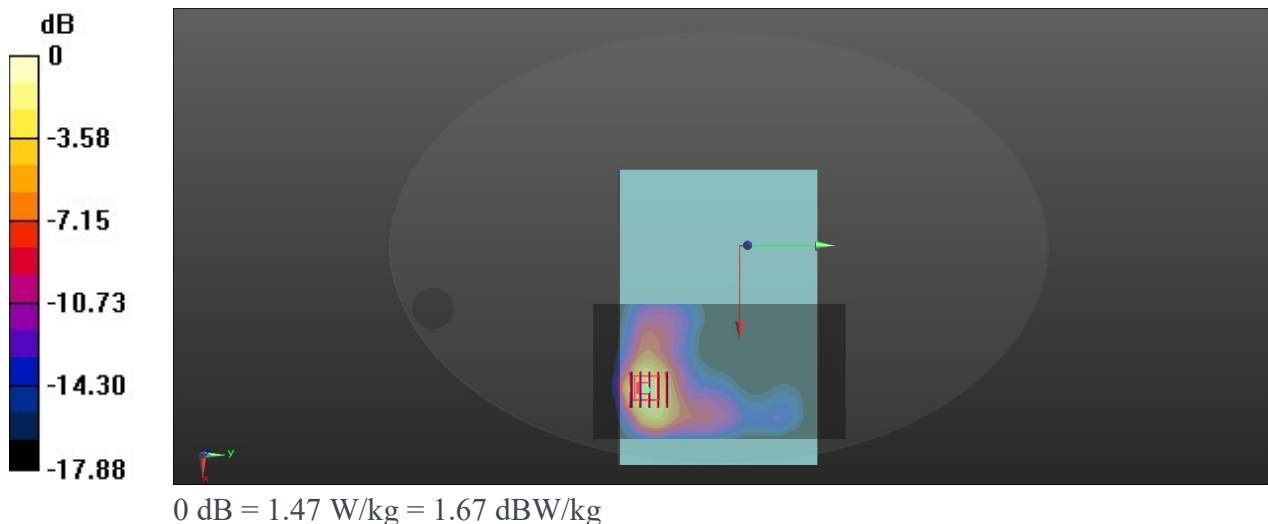

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/3

16_LTE Band 25_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch26140

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 40.862$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.83, 7.61, 7.86); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.394 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.549 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.54 W/kg

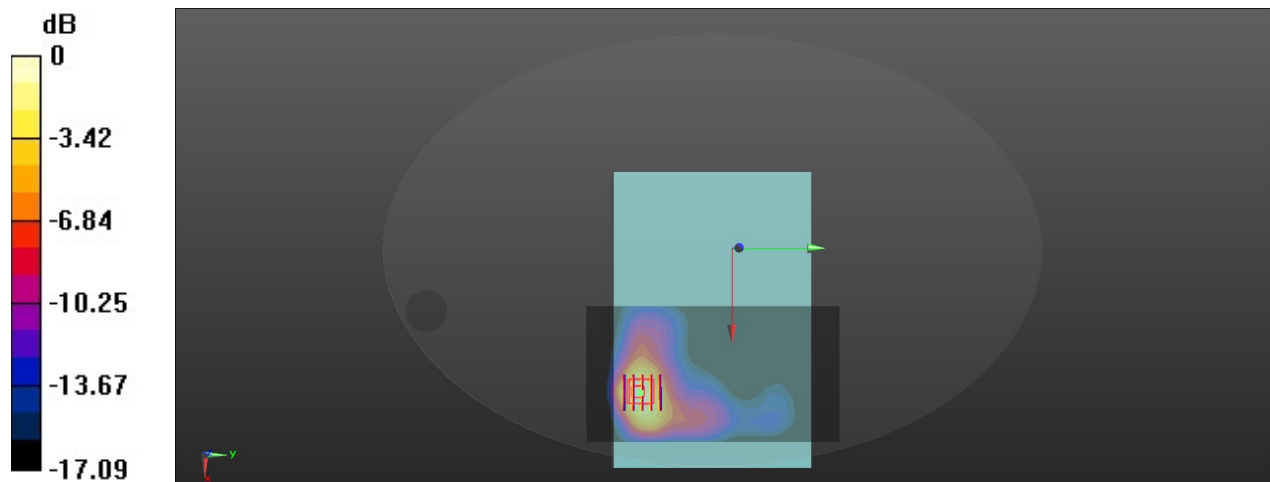

0 dB = 1.54 W/kg = 1.88 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/3

17_FR1 n25_40M_QPSK_108RB_54Offset_DFT-15_Bottom Face_0mm_Ch376500

Communication System: UID 0, 5G NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium: HSL_1900 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.846$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.83, 7.61, 7.86); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x151x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.829 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.459 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 1.34 W/kg

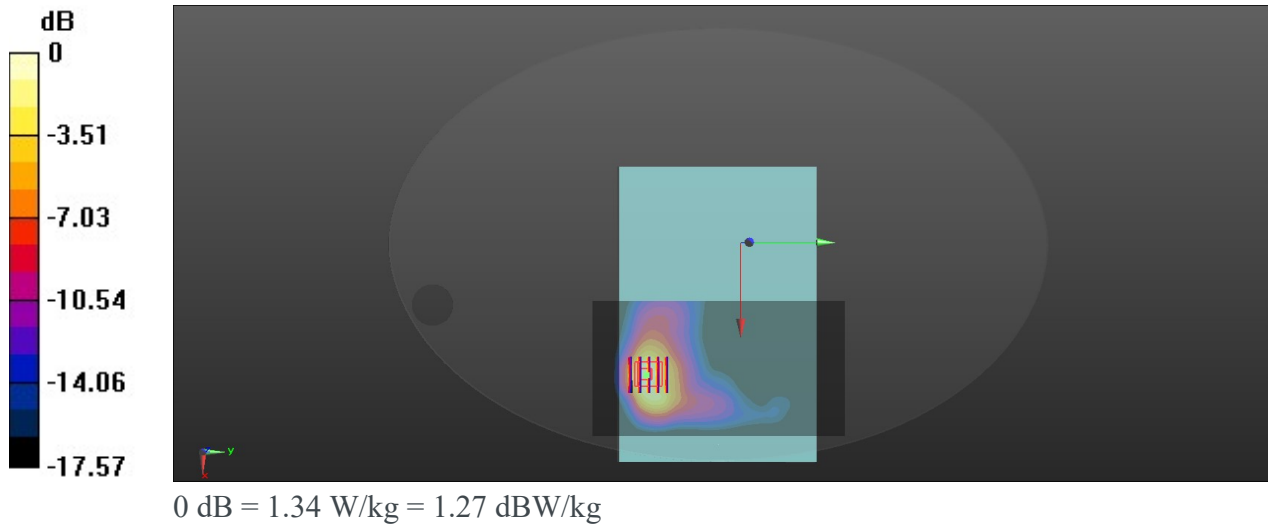

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

18_LTE Band 7_20M_QPSK_1RB_49Offset_Edge3_0mm_Ch21350

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 39.842$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.19, 6.99, 7.22); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.003 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 1.40 W/kg

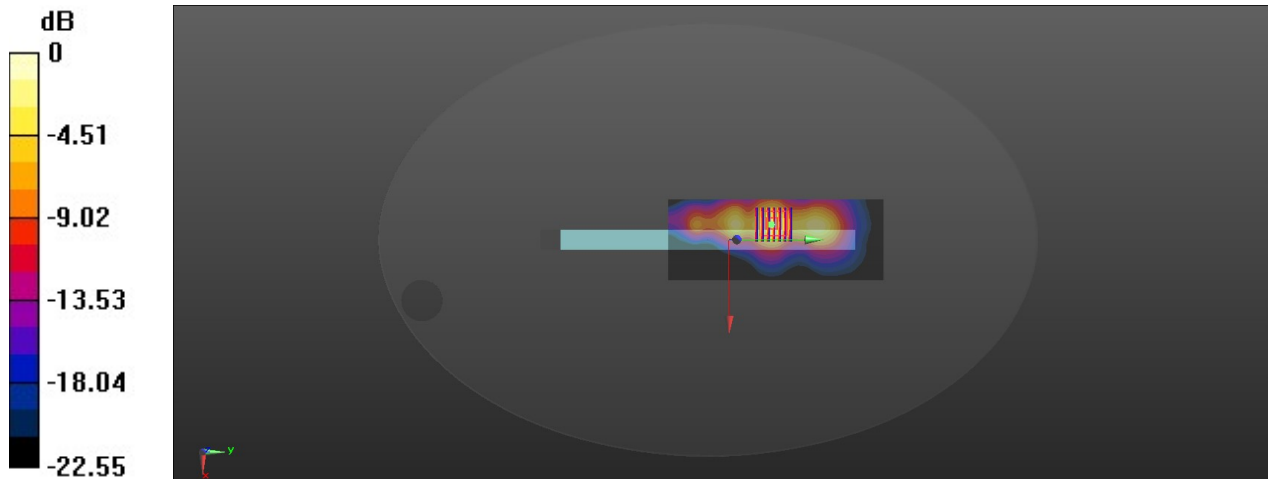

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

19_LTE Band 38_20M_QPSK_1RB_49Offset_Edge3_0mm_Ch38000

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.19, 6.99, 7.22); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.575 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.1%

Maximum value of SAR (measured) = 1.36 W/kg

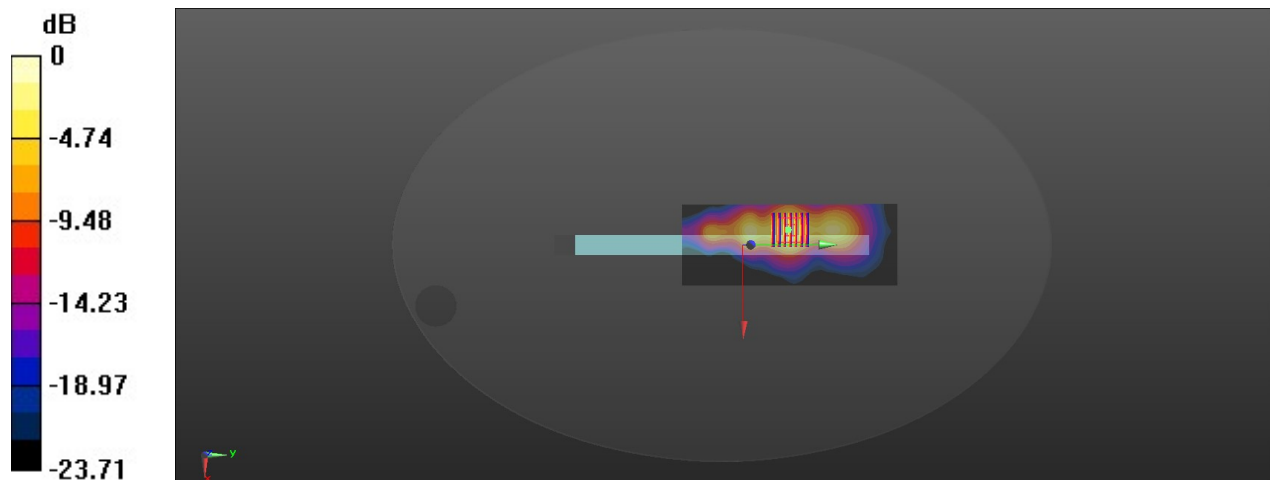

0 dB = 1.36 W/kg = 1.34 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

20_LTE Band 41_20M_QPSK_50RB_0Offset_Edge3_0mm_Ch41055

Communication System: UID 0, LTE (0); Frequency: 2636.5 MHz; Duty Cycle: 1:1.59
 Medium: HSL_2600 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.972$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.19, 6.99, 7.22); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.28 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.273 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.821 W/kg; SAR(10 g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 1.30 W/kg

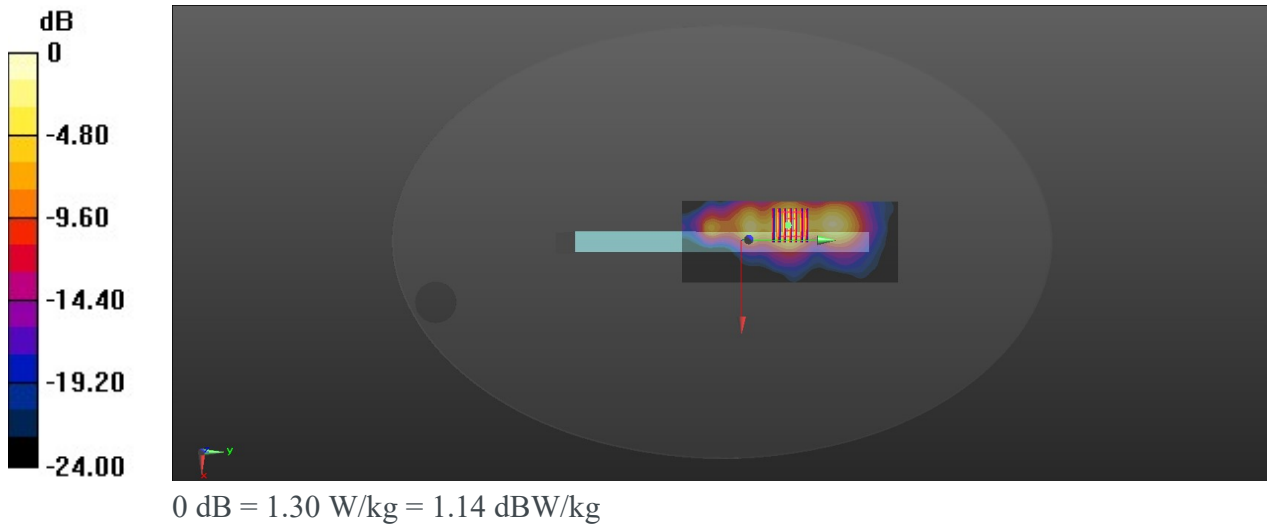

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

21_FR1 n38_40M_QPSK_50RB_28Offset_DFT-30_Bottom Face_0mm_Ch519000

Communication System: UID 0, 5G NR (0); Frequency: 2595 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.939$ S/m; $\epsilon_r = 39.794$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.19, 6.99, 7.22); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.331 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 1.28 W/kg

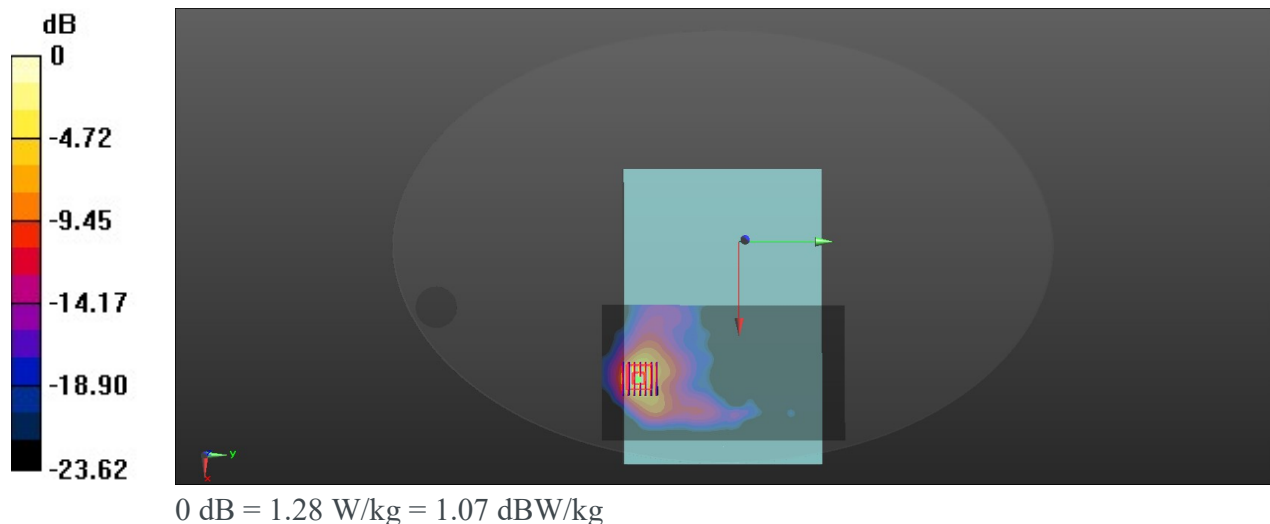

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/8

22_FR1 n41_100M_QPSK_135RB_69Offset_DFT-30_Edge3_0mm_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium: HSL_2600 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.938$ S/m; $\epsilon_r = 39.798$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.19, 6.99, 7.22); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.43 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 4.529 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 1.70 W/kg
SAR(1 g) = 0.920 W/kg; SAR(10 g) = 0.432 W/kg
 Smallest distance from peaks to all points 3 dB below = 10.3 mm
 Ratio of SAR at M2 to SAR at M1 = 56%
 Maximum value of SAR (measured) = 1.44 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 4.529 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 1.40 W/kg
SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.265 W/kg
 Smallest distance from peaks to all points 3 dB below = 5 mm
 Ratio of SAR at M2 to SAR at M1 = 42.4%
 Maximum value of SAR (measured) = 1.06 W/kg

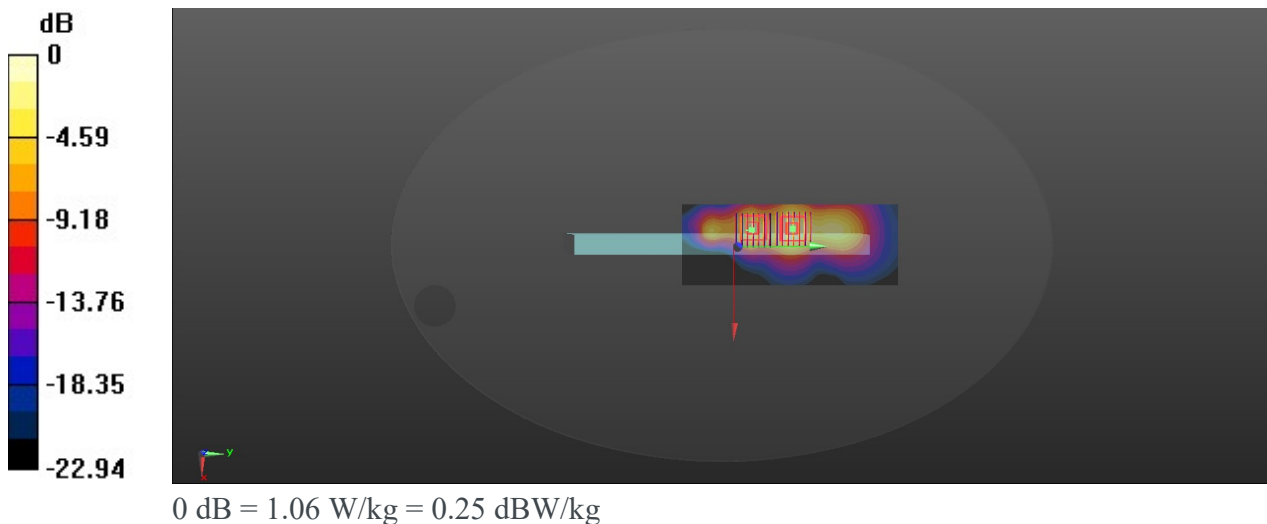

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/9

23_FR1 n77_100M_QPSK_1RB_137Offset_DFT-30_Bottom Face_0mm_Ch633332

Communication System: UID 0, 5G NR (0); Frequency: 3499.98 MHz; Duty Cycle: 1:1
 Medium: HSL_3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.851$ S/m; $\epsilon_r = 37.182$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.52, 6.33, 6.54); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x181x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.56 W/kg

Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=1.4$ mm

Reference Value = 0 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.8%

Maximum value of SAR (measured) = 1.55 W/kg

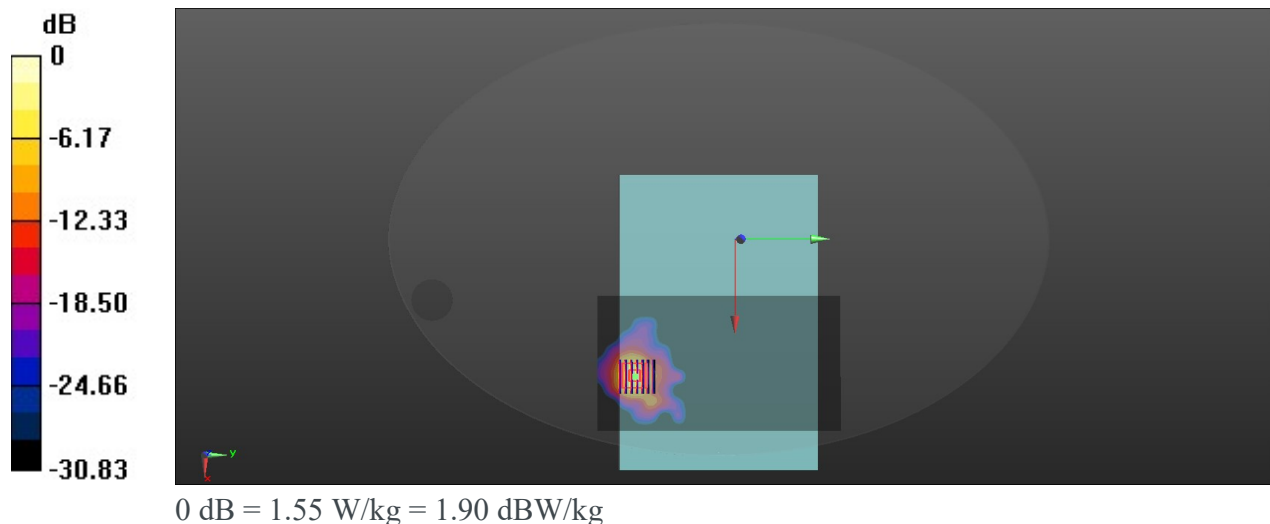

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/8/26

24_Bluetooth_DH5_Edge1_0mm_Ch0

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.302
 Medium: HSL_2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.07, 6.87, 7.09); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 0.180 W/kg

Configuration/Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.007 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 0.171 W/kg

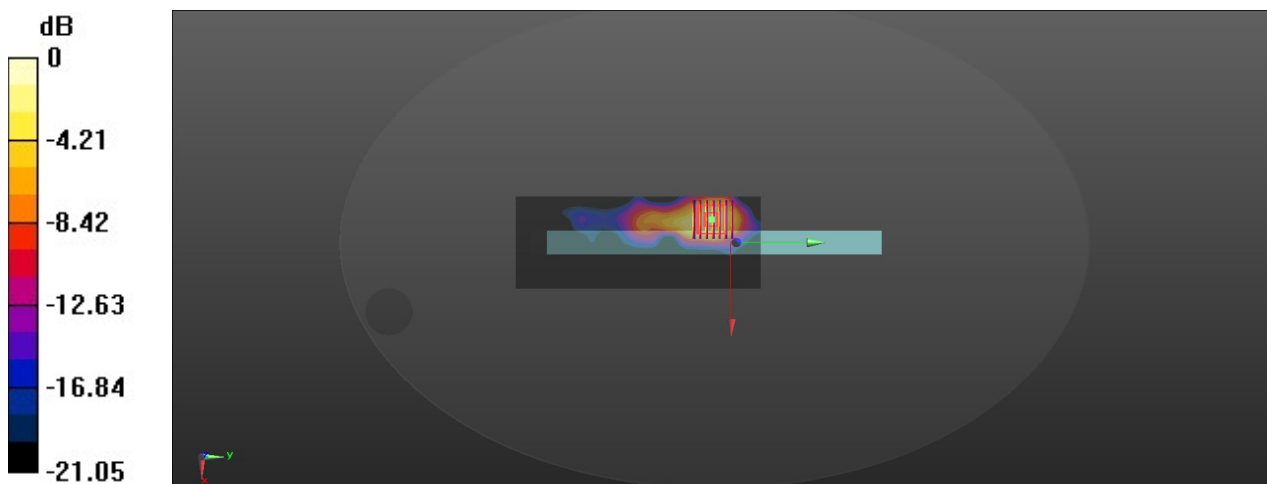

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/9

25_WLAN2.4GHz_802.11b 1Mbps_Edge1_0mm_Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.012

Medium: HSL_2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.836$ S/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.07, 6.87, 7.09); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.23 V/m; Power Drift = 0.02 dB



Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.44 W/kg

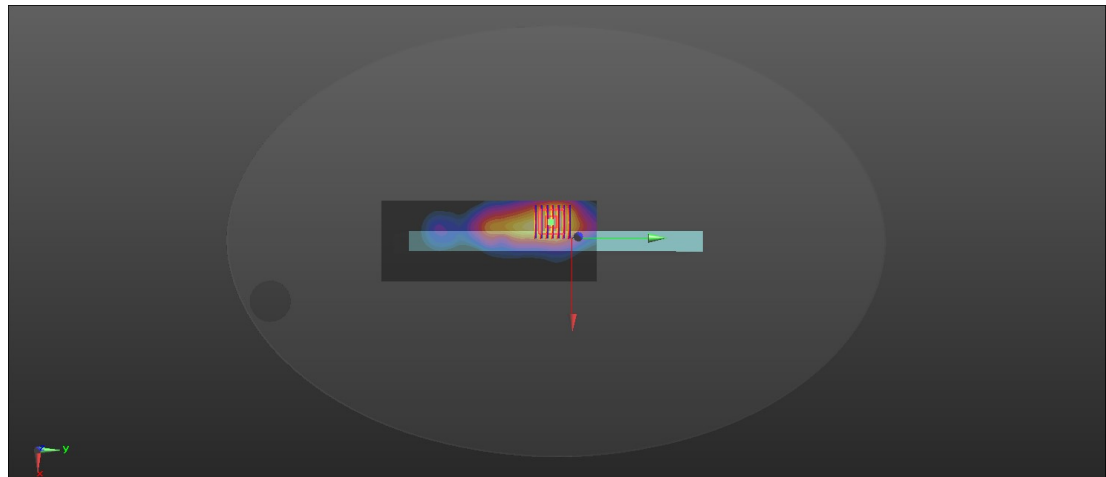

0 dB = 1.44 W/kg = 1.67 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/7

26_WLAN5GHz_802.11n-HT40 MCS0_Bottom Face_0mm_Ch54

Communication System: UID 0, WIFI (0); Frequency: 5270 MHz; Duty Cycle: 1:1.156
 Medium: HSL_5250 Medium parameters used: $f = 5270$ MHz; $\sigma = 4.727$ S/m; $\epsilon_r = 34.848$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.37, 5.22, 5.39); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (111x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 2.01 W/kg

Zoom Scan (9x10x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 1.039 V/m; Power Drift = -0.11 dB



Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

Maximum value of SAR (measured) = 2.31 W/kg

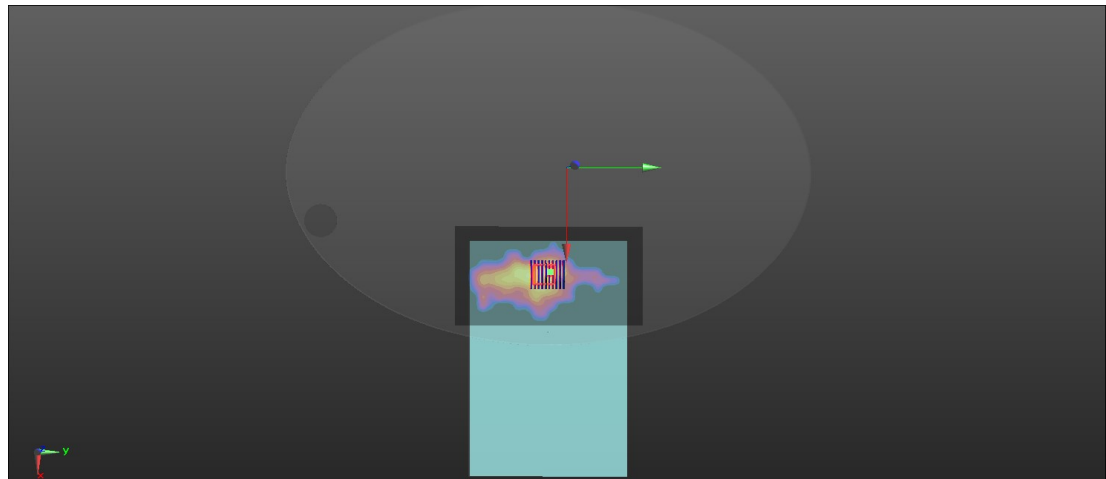

0 dB = 2.31 W/kg = 3.64 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/9

27_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face _0mm_Ch122

Communication System: UID 0, WIFI (0); Frequency: 5610 MHz; Duty Cycle: 1:1.077

Medium: HSL_5600 Medium parameters used: $f = 5610$ MHz; $\sigma = 4.862$ S/m; $\epsilon_r = 36.469$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(4.85, 4.71, 4.87); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.53 W/kg

Zoom Scan (9x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9290 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 5.05 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.7%

Maximum value of SAR (measured) = 2.80 W/kg

Zoom Scan (9x10x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9290 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 4.31 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 2.24 W/kg

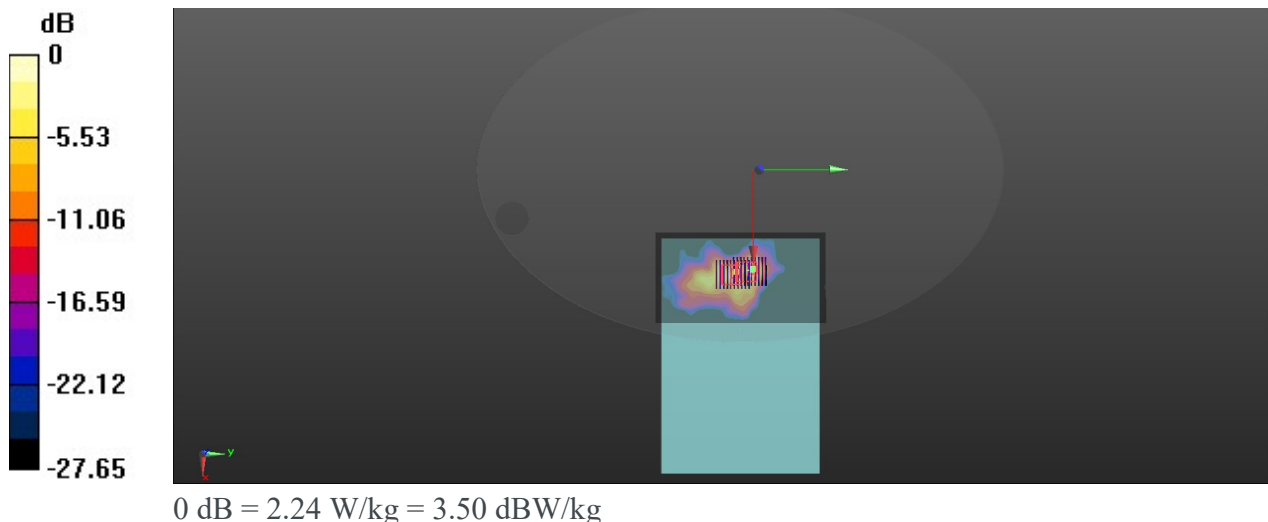

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/7/11

28_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face _0mm_Ch155

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.077
 Medium: HSL_5800 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 36.255$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(5.02, 4.88, 5.04); Calibrated: 2024/10/10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn715; Calibrated: 2025/2/20
- Phantom: ELI V5.0 (Left); Type: QD OVA 002 AA; Serial: 1232
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x191x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 2.53 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.9950 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 5.24 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 2.66 W/kg

Zoom Scan (8x8x7)/Cube 1: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.9950 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 1.83 W/kg

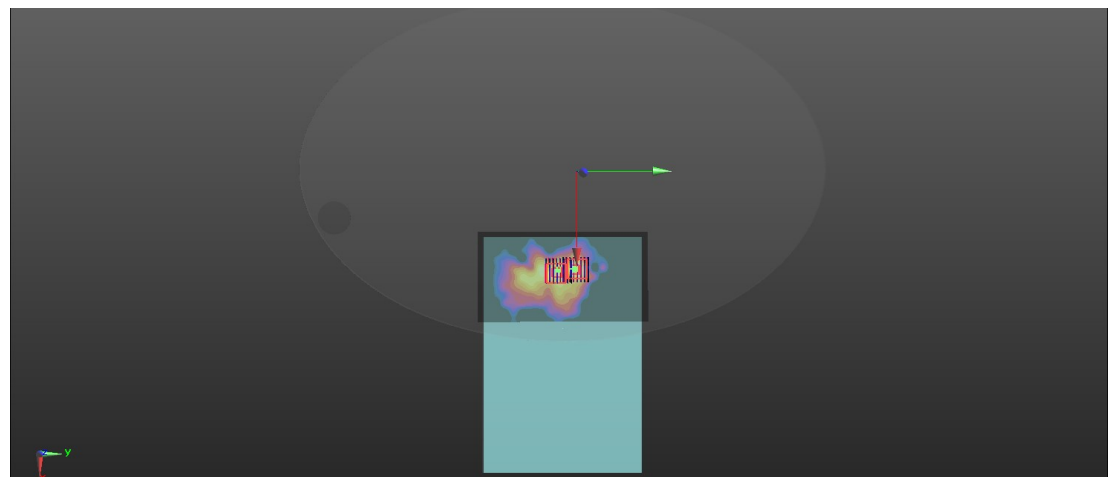

0 dB = 1.83 W/kg = 2.62 dBW/kg