



RADIO TEST REPORT

Applicant	:	Empowerment Technologies Inc.
Address of Applicant	:	590 York Rd., Unit 2 Niagara-on-the-Lake, ON Canada, L0S 1J0
Manufacturer	:	Empowerment Technologies Inc.
Address of Manufacturer	:	590 York Rd., Unit 2 Niagara-on-the-Lake, ON Canada, L0S 1J0
Equipment under Test	:	DEFENDER GO 2K AI POWERED PLUG-IN INDOOR/OUTDOOR HOME, BUSINESS, BABY & PET SECURITY CAMERA
Model No.	:	IP3MCB1A
FCC ID	:	2AV6B-IP3MCB1A
IC	:	26035-IP3MCB1A
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
Report No.	:	DDT-RE25061119-2E02
Issue Date	:	2025/08/21
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	6dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	21
5.1.	Block diagram of test setup	21
5.2.	Limits	21
5.3.	Test procedure	21
5.4.	Test result.....	22
5.5.	Test graphs	23
6.	Conducted Output Power	29
6.1.	Block diagram of test setup	29
6.2.	Limits	29
6.3.	Test procedure	29
6.4.	Test result average.....	30
7.	Power Spectral Density	31
7.1.	Block diagram of test setup	31
7.2.	Limits	31
7.3.	Test procedure	31
7.4.	Test result.....	32
7.5.	Test graphs	33
8.	Band Edge Compliance (Conducted Method)	39
8.1.	Block diagram of test setup	39

8.2.	Limits	39
8.3.	Test procedure	39
8.4.	Test result.....	40
8.5.	Test graphs	41
9.	RF Conducted Spurious Emissions.....	45
9.1.	Block diagram of test setup	45
9.2.	Limits	45
9.3.	Test procedure	45
9.4.	Test result.....	46
9.5.	Test graphs	47
10.	Duty Cycle	65
10.1.	Block diagram of test setup	65
10.2.	Limit.....	65
10.3.	Test procedure	65
10.4.	Test result.....	66
10.5.	Test graphs	67
11.	Antenna Requirements.....	73
11.1.	Limit.....	73
11.2.	Result	73
12.	Radiated Emission	74
12.1.	Test equipment.....	74
12.2.	Block diagram of test setup	75
12.3.	Limits	76
12.4.	Assistant equipment used for test	78
12.5.	Test procedure	78
12.6.	Test result.....	80
12.7.	Test data	81
13.	Band Edge Compliance.....	89
13.1.	Test equipment.....	89
13.2.	Block diagram of test setup	90
13.3.	Limits	90
13.4.	Assistant equipment used for test	90
13.5.	Test procedure	90
13.6.	Test result.....	90
13.7.	Test data	91
14.	Power Line Conducted Emissions.....	115
14.1.	Test equipment.....	115
14.2.	Block diagram of test setup	115

14.3. Limits115

14.4. Assistant equipment used for test115

14.5. Test procedure116

14.6. Test result.....116

14.7. Test data117

15. Test Setup Photograph119

16. Photos of the EUT121

Test Report Declare

Applicant	:	Empowerment Technologies Inc.
Address of Applicant	:	590 York Rd., Unit 2 Niagara-on-the-Lake, ON Canada, L0S 1J0
Equipment under Test	:	DEFENDER GO 2K AI POWERED PLUG-IN INDOOR/OUTDOOR HOME, BUSINESS, BABY & PET SECURITY CAMERA
Model No.	:	IP3MCB1A
Manufacturer	:	Empowerment Technologies Inc.
Address of Manufacturer	:	590 York Rd., Unit 2 Niagara-on-the-Lake, ON Canada, L0S 1J0

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,
RSS-247 Issue 3 August 2023,
ANSI C63.10:2013,
RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25061119-2E02		
Date of Receipt:	2025/03/14	Date of Test:	2025/03/14 - 2025/08/06

Created: Zoe Peng	Reviewed: Chen Ziqin	Approved: Ella Gong
		
2025/08/06	2025/08/20	2025/08/21

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/08/21	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 6.3.2, RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 6.3.2	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 6.3.1	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 6.6	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 6.6, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 6.6, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
8	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass
Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.				

2. General Test Information

2.1. Description of EUT

EUT Name	:	DEFENDER GO 2K AI POWERED PLUG-IN INDOOR/OUTDOOR HOME, BUSINESS, BABY & PET SECURITY CAMERA
Model Number	:	IP3MCB1A
Difference of model number	:	/
EUT Function Description	:	Please reference user manual of this device
Power Supply	:	DC 5V by external adapter
Hardware Version	:	/
Software Version	:	/
Antenna Type	:	FPC Antenna
Max Antenna Gain(dBi)	:	Bluetooth Antenna: 1.79dBi WIFI 2.4G Antenna: 1.79dBi WIFI 5G Antenna: 4.51dBi

Radio Technology	:	IEEE 802.11b/g/n/ax
Operation frequency	:	IEEE 802.11b: 2412MHz to 2462MHz IEEE 802.11g: 2412MHz to 2462MHz IEEE 802.11n HT20: 2412MHz to 2462MHz IEEE 802.11n HT40: 2422MHz to 2452MHz IEEE 802.11ax HE20: 2412MHz to 2462MHz IEEE 802.11ax HE40: 2422MHz to 2452MHz
Modulation	:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☒” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
AC ADAPTER	Bazhong Chuanyuan	CY-01050100UU	INPUT: 100-240V~50/60Hz 0.3A MAX OUTPUT: 5.0V $\overline{=}$ 1.0A 5.0W
Power Cable	/	/	Length: 175cm, without core

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: SecureCRT.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Data rate, Channel, and Frequency				
Tested mode	Tx Power Setting	Data rate (Mbps) (see Note)	Test Channel	Frequency (MHz)
IEEE 802.11b	15	1	LCH: CH1	2412
		1	MCH: CH6	2437
		1	HCH: CH11	2462
IEEE 802.11g	14	6	LCH: CH1	2412
		6	MCH: CH6	2437
		6	HCH: CH11	2462
IEEE 802.11n HT20	15	MCS 0	LCH: CH1	2412
		MCS 0	MCH: CH6	2437
		MCS 0	HCH: CH11	2462
IEEE 802.11n HT40	15	MCS 0	LCH: CH3	2422
		MCS 0	MCH: CH6	2437
		MCS 0	HCH: CH9	2452
IEEE 802.11ax HE20	15	MCS 0	LCH: CH1	2412
		MCS 0	MCH: CH6	2437
		MCS 0	HCH: CH11	2462
IEEE 802.11ax HE40	13	MCS 0	LCH: CH3	2422
		MCS 0	MCH: CH6	2437
		MCS 0	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.38 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$)
Frequencies Stability	6.7×10^{-8} (Antenna couple method) 5.5×10^{-8} (Conducted method)
Conducted spurious emissions	0.86 dB ($10 \text{ MHz} \leq f < 3.6 \text{ GHz}$); 1.40 dB ($3.6 \text{ GHz} \leq f < 8 \text{ GHz}$) 1.66 dB ($8 \text{ GHz} \leq f < 26.5 \text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10^{-8}
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz) 3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 3#)				
SIGNAL ANALYZER	R&S	FSV40	101407	2026/07/06
Wideband Radio Communication Tester	R&S	CMW500	117491	2026/03/28
EXG Analog Signal Generator	KEYSIGHT	N5173B	MY62153058	2026/07/06
MXG Vector Signal Generator	Agilent	N5182A	MY48180912	2026/03/28
RF Control Unit	Tonscend	JS0806-2	20C8060230	2026/03/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2026/03/28
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

4. 6dB Bandwidth

4.1. Block diagram of test setup

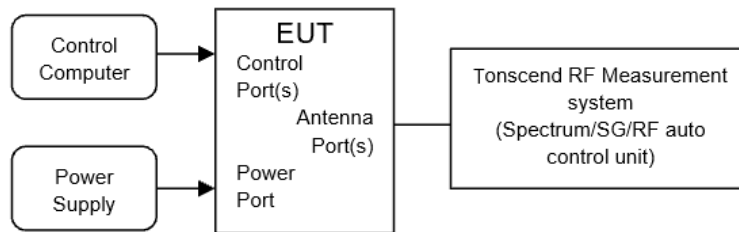

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold

Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


4.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	25.8-26.5℃,35.3-41.2%RH	Test Date:	2025.07.22-2025.07.23
Test Power Supply:	AC 120V	Sample Number:	S25061119-002


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	9.08	2407.48	2416.56	0.5	PASS
		2437	9.04	2432.52	2441.56	0.5	PASS
		2462	9.04	2457.56	2466.60	0.5	PASS
11G	Ant1	2412	16.36	2403.88	2420.24	0.5	PASS
		2437	16.36	2428.88	2445.24	0.5	PASS
		2462	16.40	2453.84	2470.24	0.5	PASS
11N20SISO	Ant1	2412	17.60	2403.24	2420.84	0.5	PASS
		2437	17.56	2428.28	2445.84	0.5	PASS
		2462	17.60	2453.24	2470.84	0.5	PASS
11N40SISO	Ant1	2422	35.84	2404.08	2439.92	0.5	PASS
		2437	35.84	2419.08	2454.92	0.5	PASS
		2452	35.84	2434.08	2469.92	0.5	PASS
11AX20SISO	Ant1	2412	18.20	2403.00	2421.20	0.5	PASS
		2437	18.24	2428.04	2446.28	0.5	PASS
		2462	18.04	2452.92	2470.96	0.5	PASS
11AX40SISO	Ant1	2422	37.12	2403.28	2440.40	0.5	PASS
		2437	37.20	2418.36	2455.56	0.5	PASS
		2452	36.88	2433.52	2470.40	0.5	PASS


4.5. Test graphs



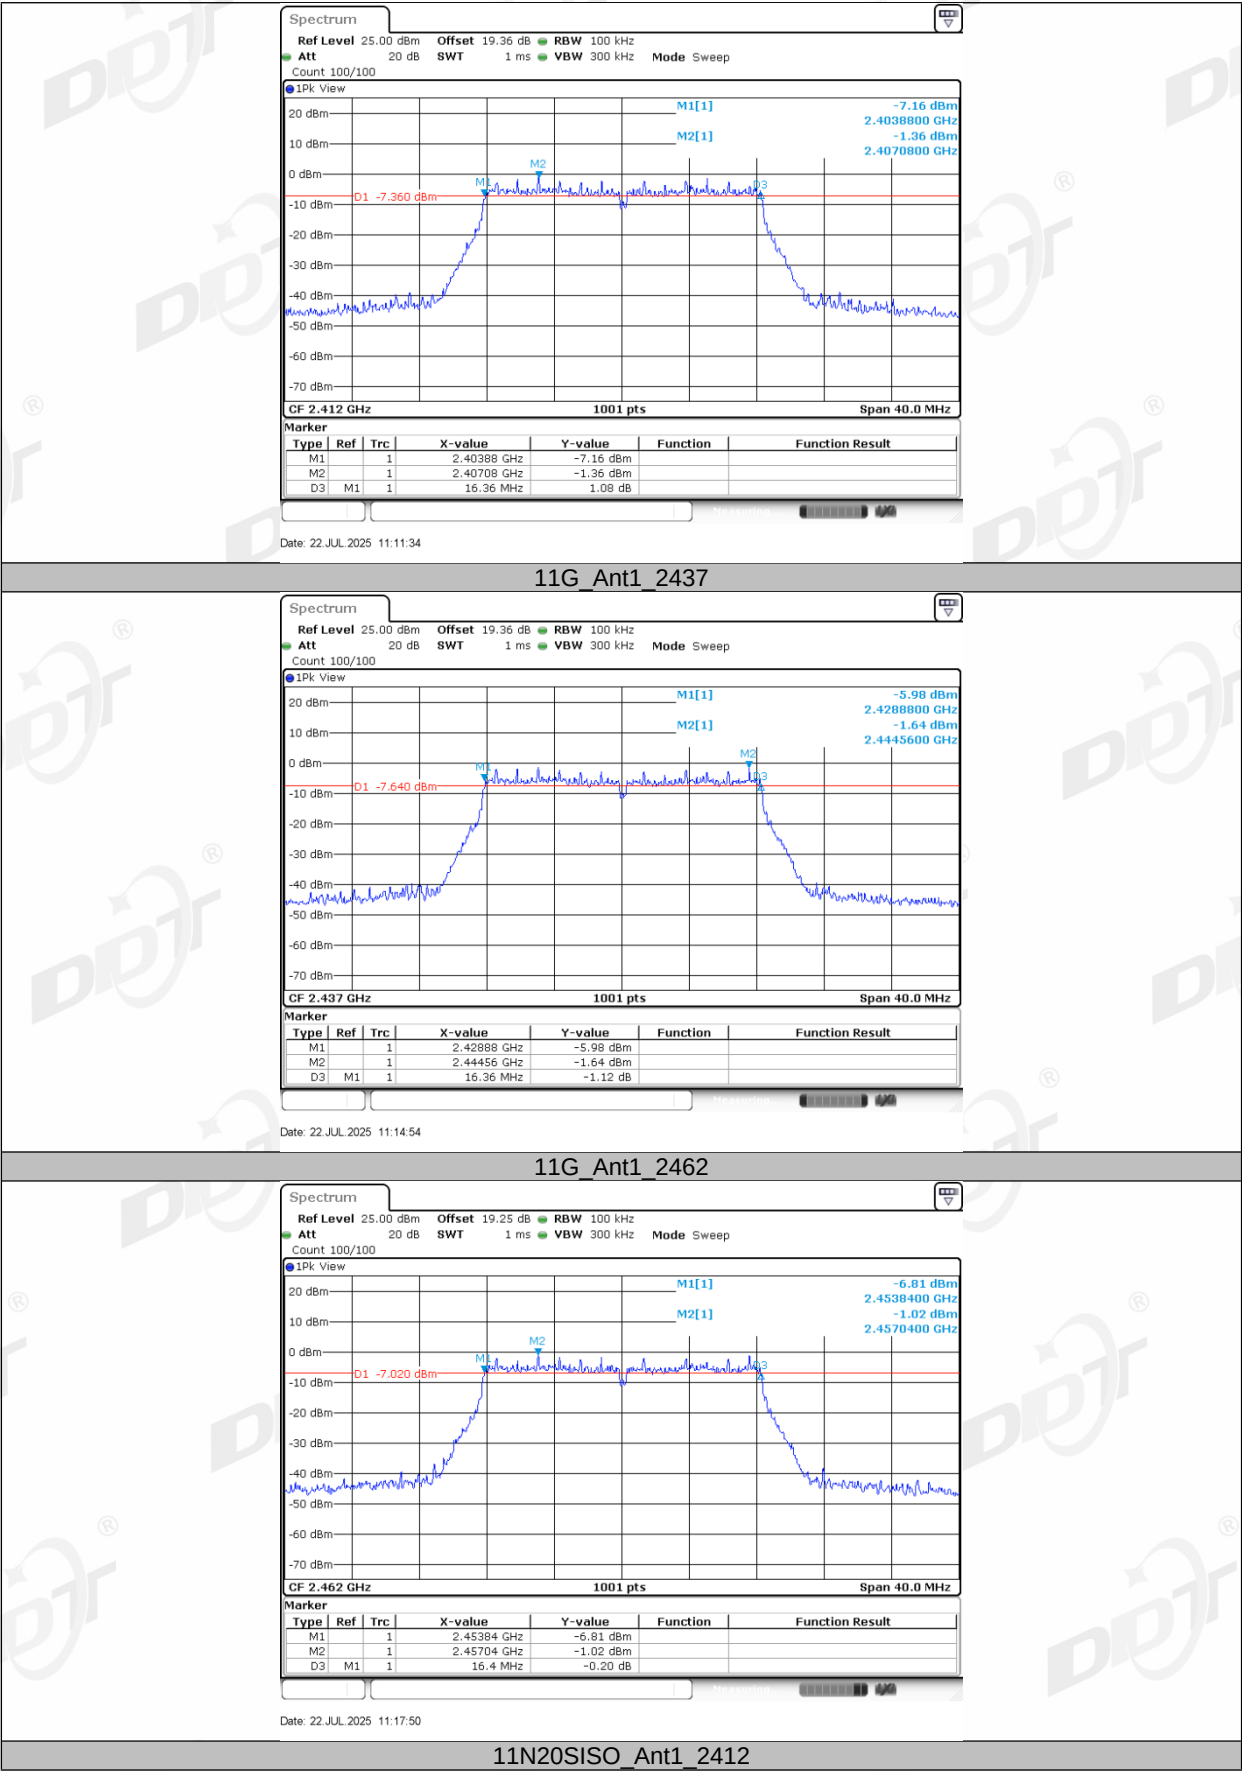

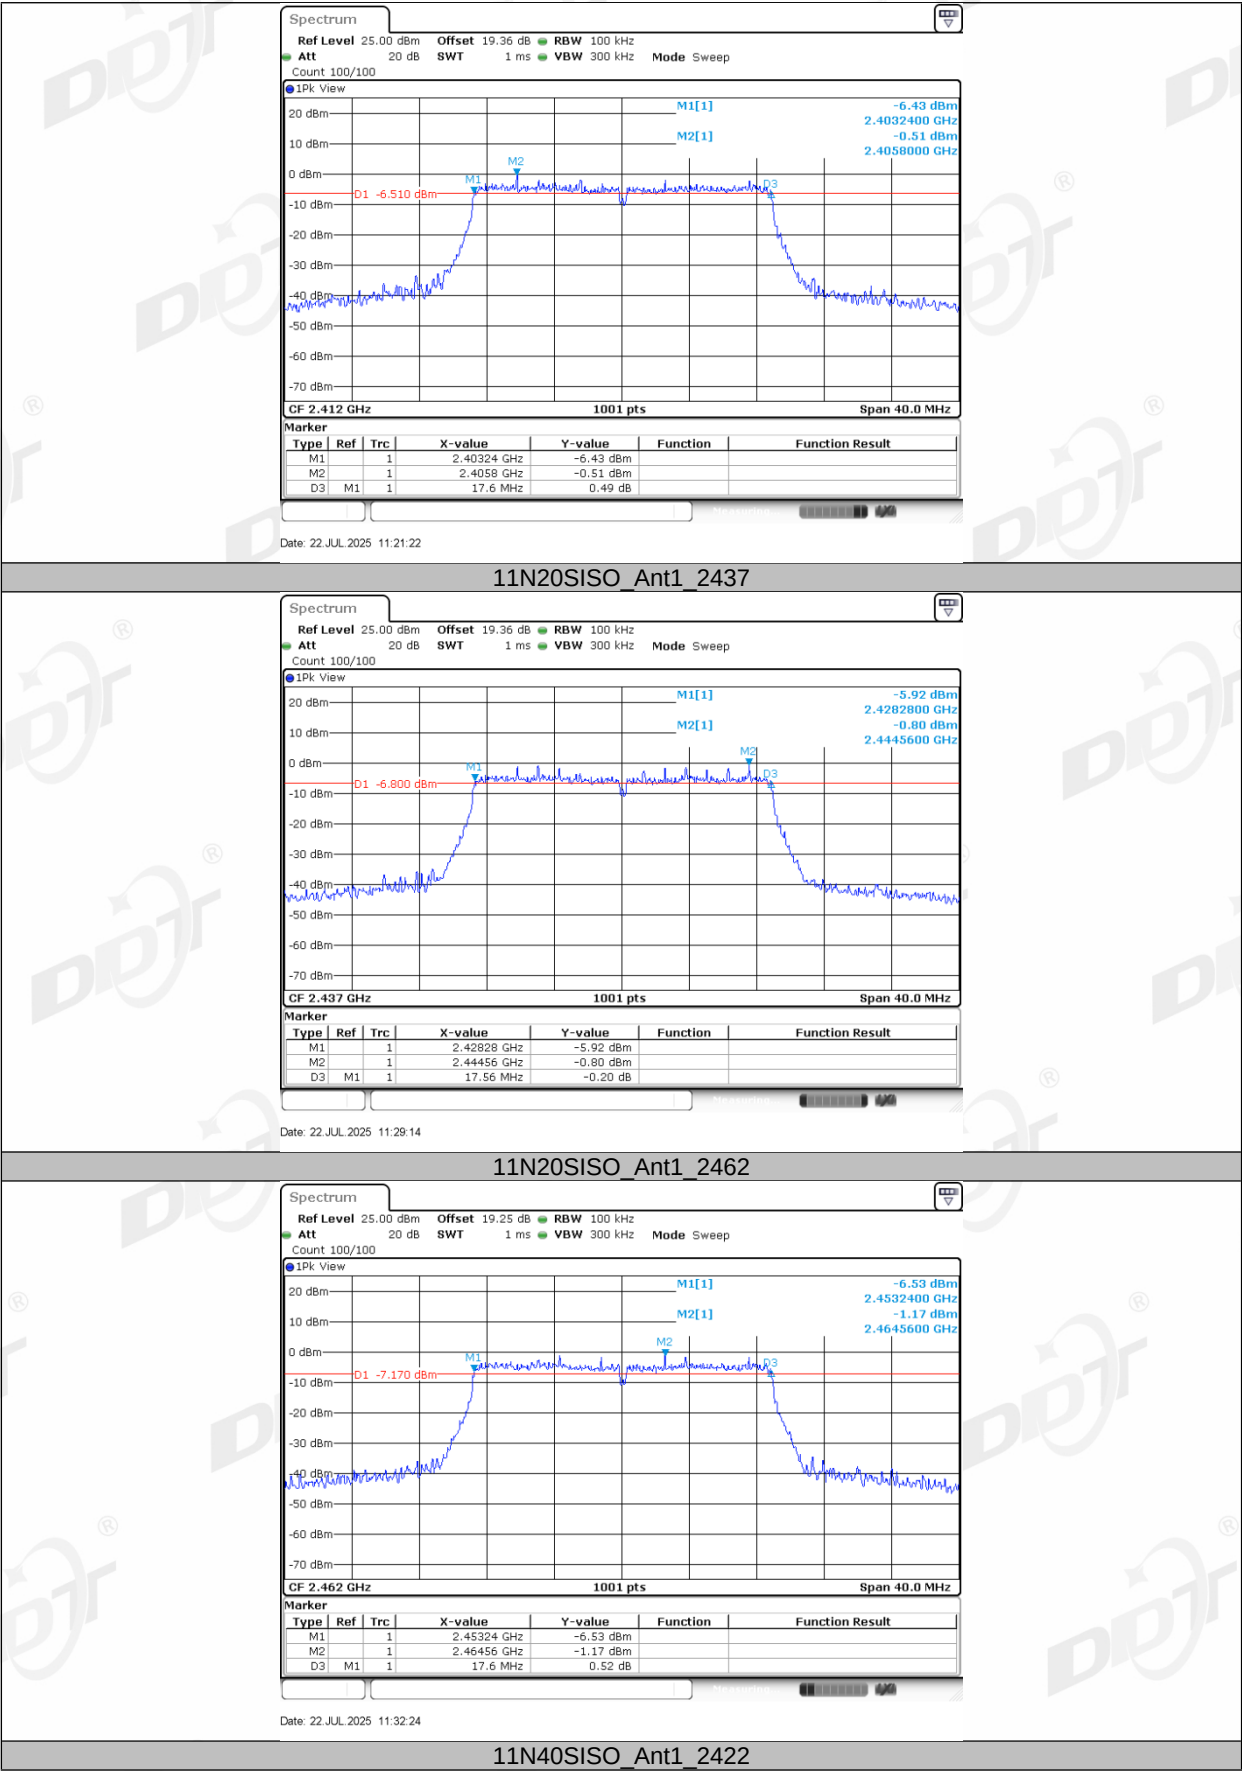

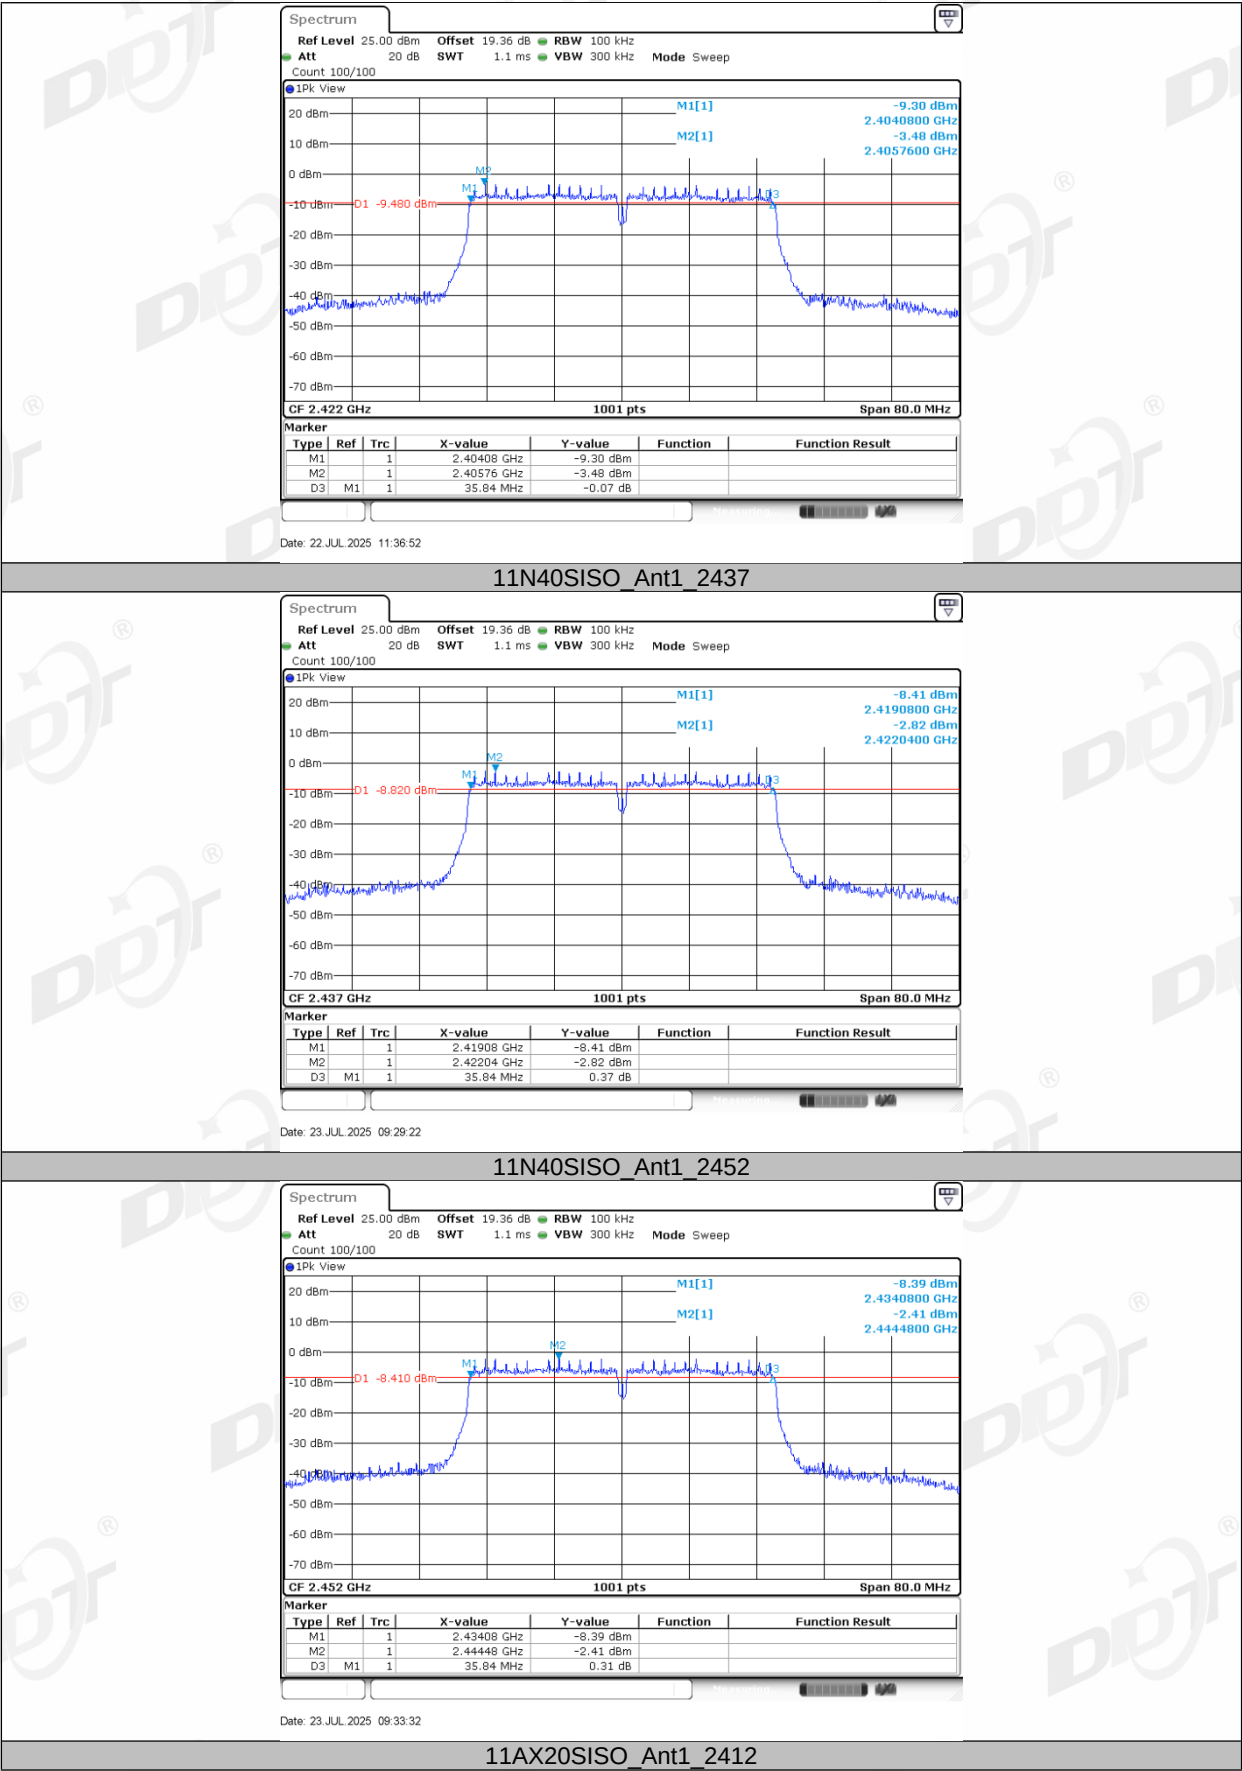


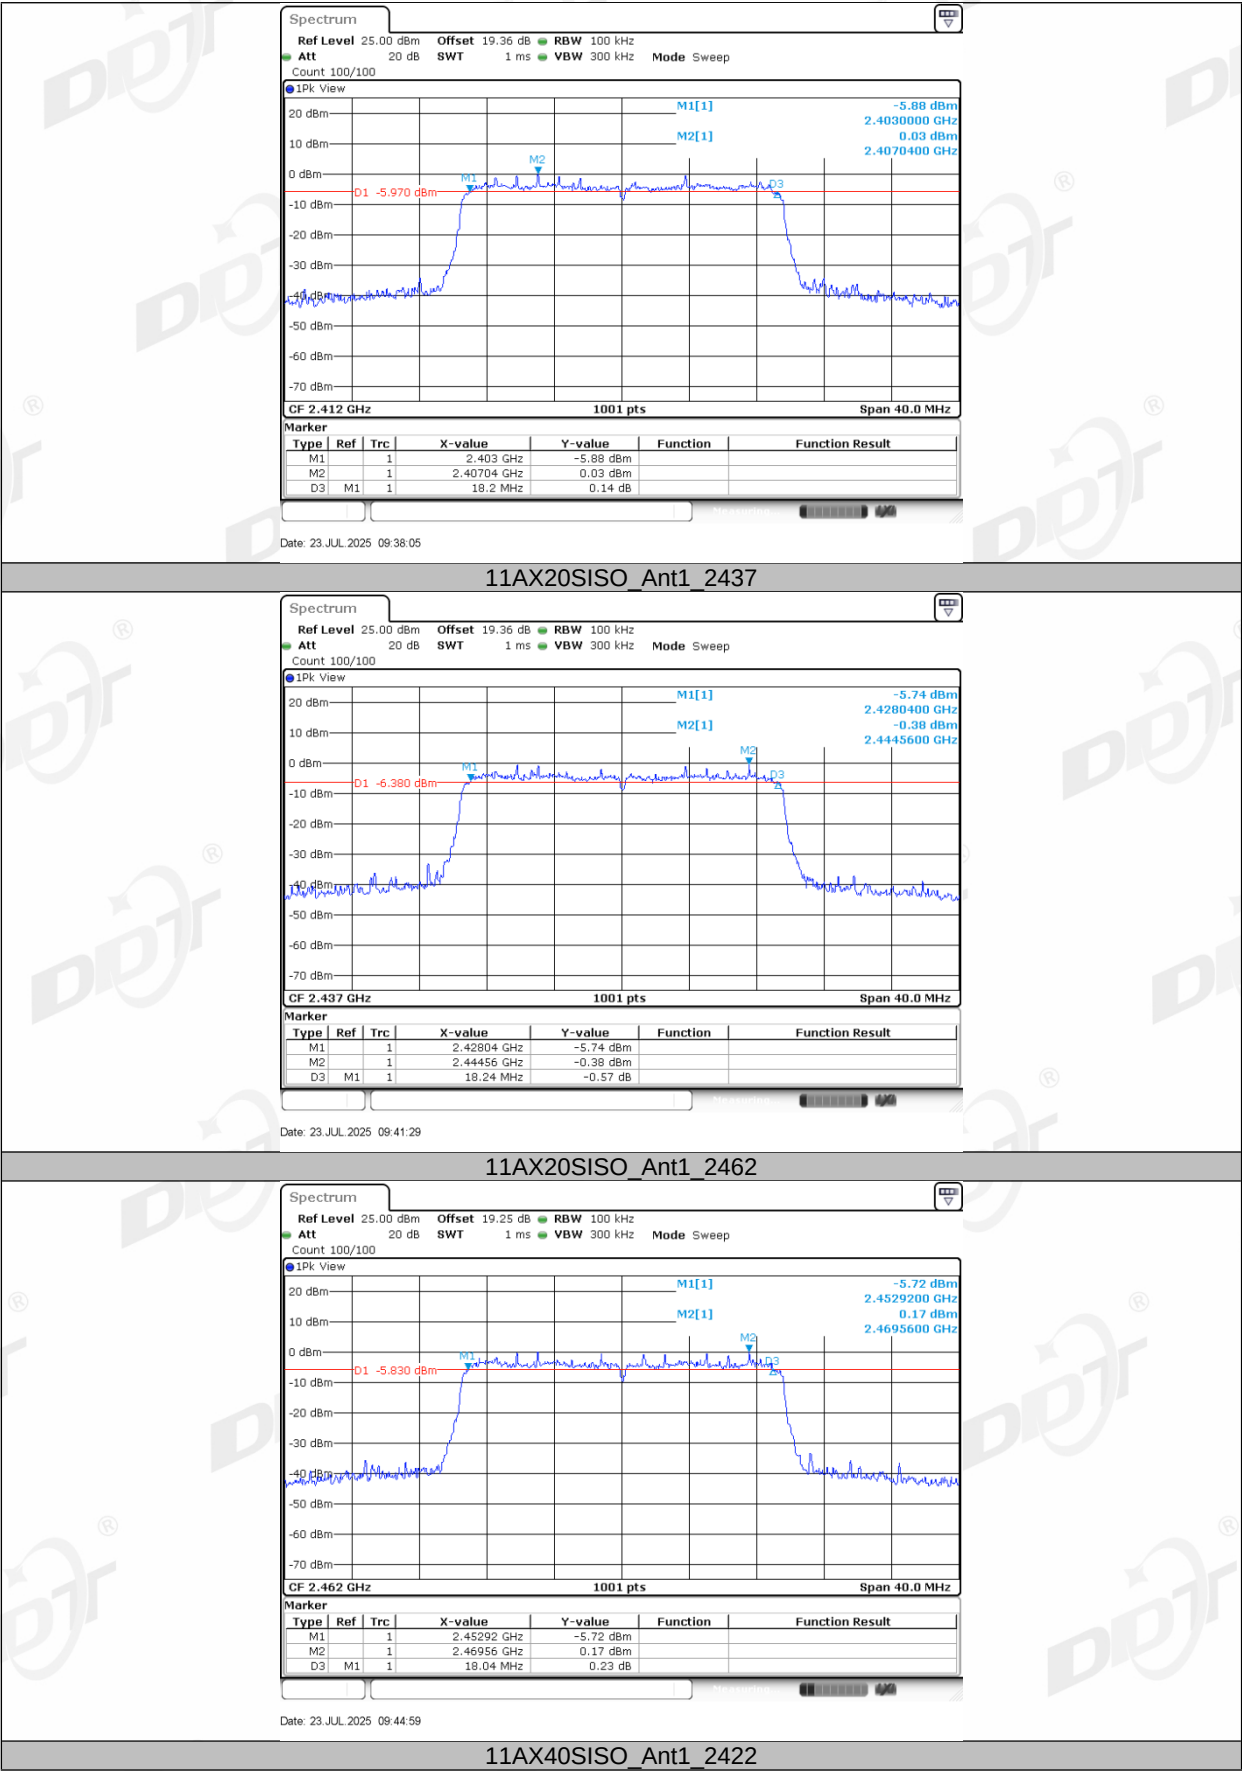



5. 99% Bandwidth

5.1. Block diagram of test setup

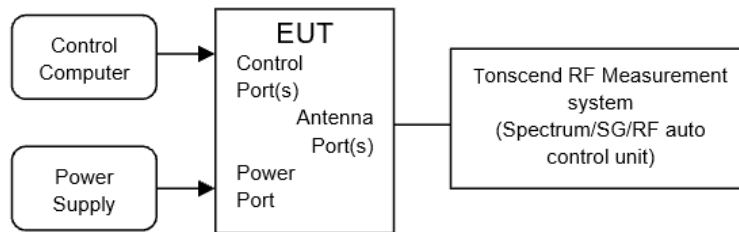

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


5.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	25.8-26.5℃,35.3-41.2%RH	Test Date:	2025.07.22-2025.07.23
Test Power Supply:	AC 120V	Sample Number:	S25061119-002


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	15.145	2404.4076	2419.5524	---	---
		2437	14.905	2429.5674	2444.4725	---	---
		2462	14.945	2454.5275	2469.4725	---	---
11G	Ant1	2412	17.263	2403.4086	2420.6713	---	---
		2437	17.303	2428.3686	2445.6713	---	---
		2462	17.263	2453.3686	2470.6314	---	---
11N20SISO	Ant1	2412	18.102	2402.9690	2421.0709	---	---
		2437	18.142	2427.9690	2446.1109	---	---
		2462	18.102	2452.9690	2471.0709	---	---
11N40SISO	Ant1	2422	36.523	2403.6983	2440.2218	---	---
		2437	36.523	2418.6983	2455.2218	---	---
		2452	36.603	2433.6983	2470.3017	---	---
11AX20SISO	Ant1	2412	18.901	2402.5694	2421.4705	---	---
		2437	18.901	2427.5694	2446.4705	---	---
		2462	18.901	2452.5694	2471.4705	---	---
11AX40SISO	Ant1	2422	37.642	2403.1389	2440.7812	---	---
		2437	37.642	2418.2188	2455.8611	---	---
		2452	37.562	2433.2188	2470.7812	---	---


5.5. Test graphs

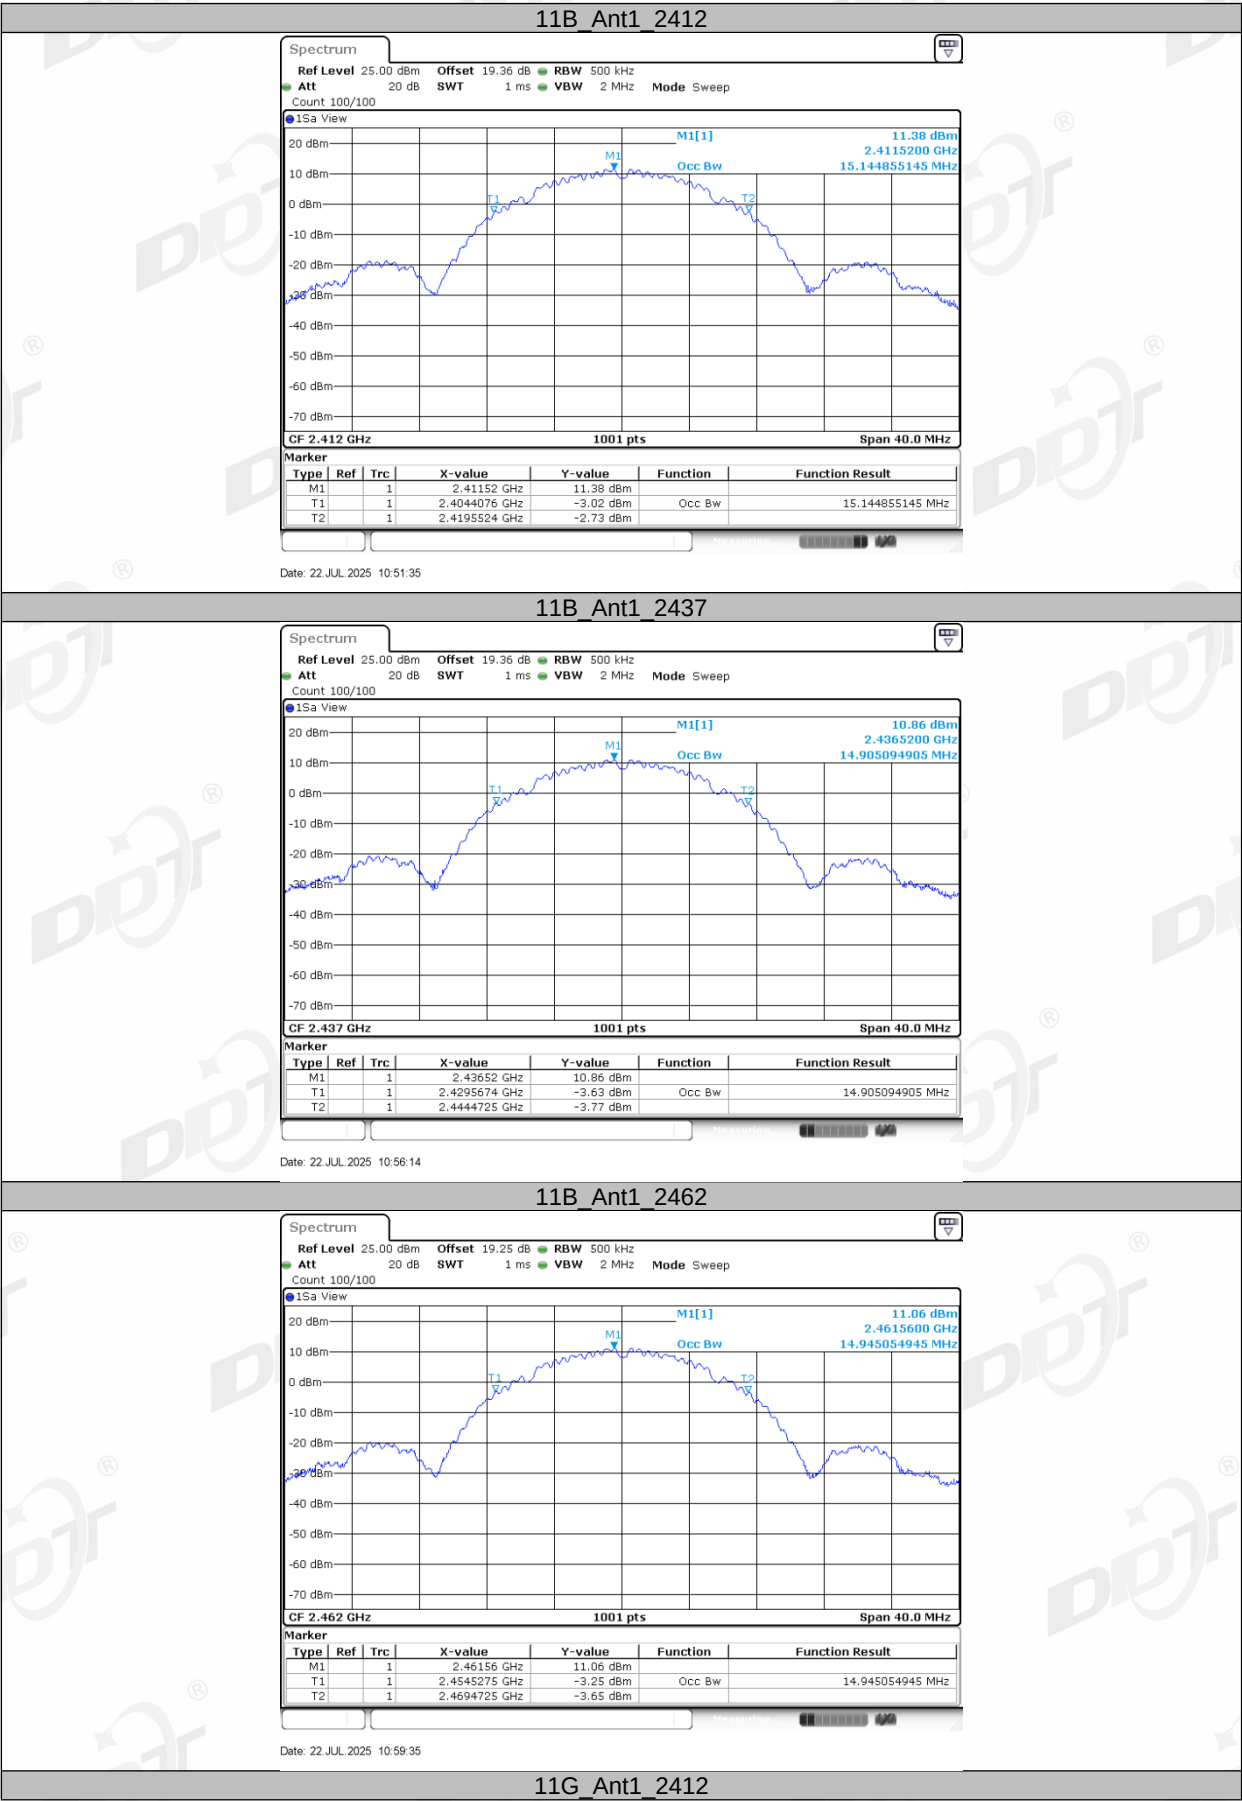


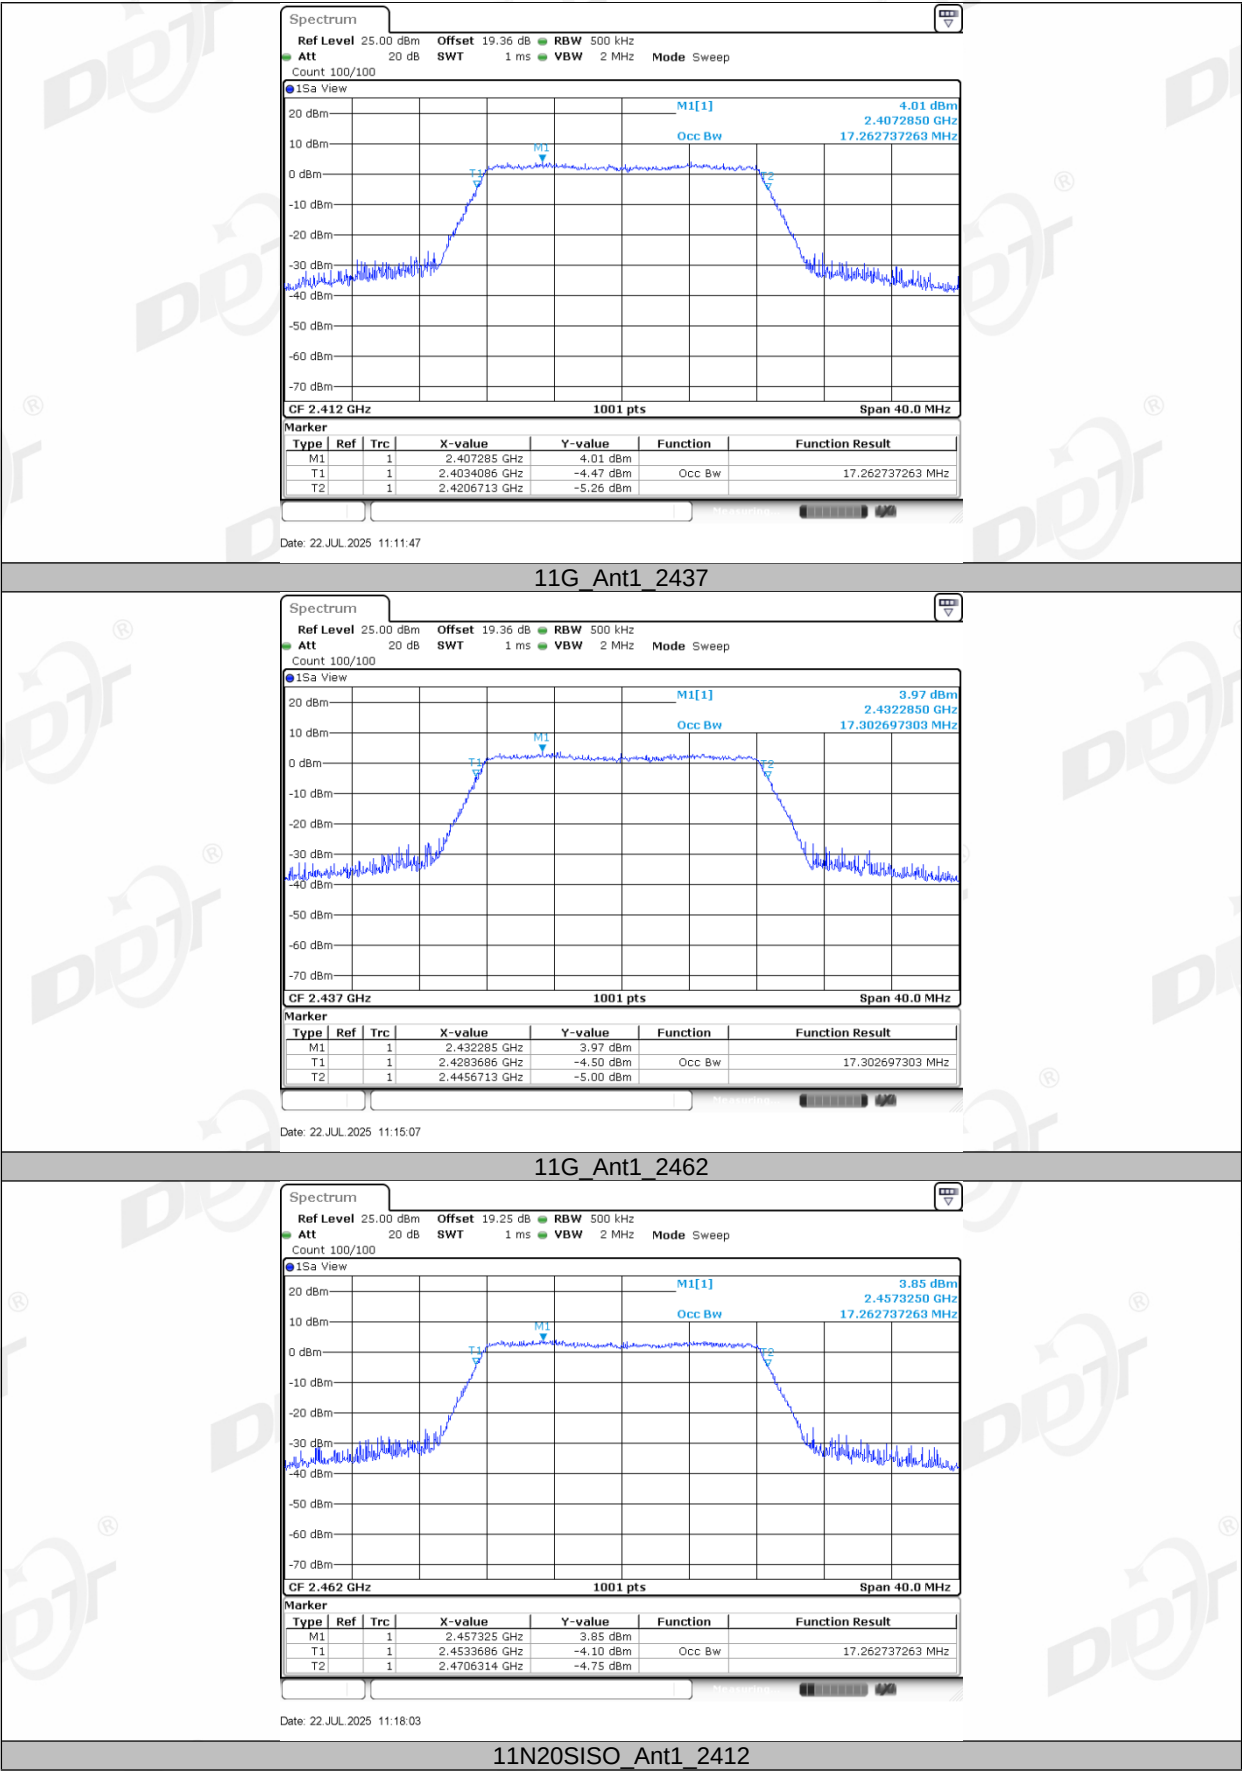

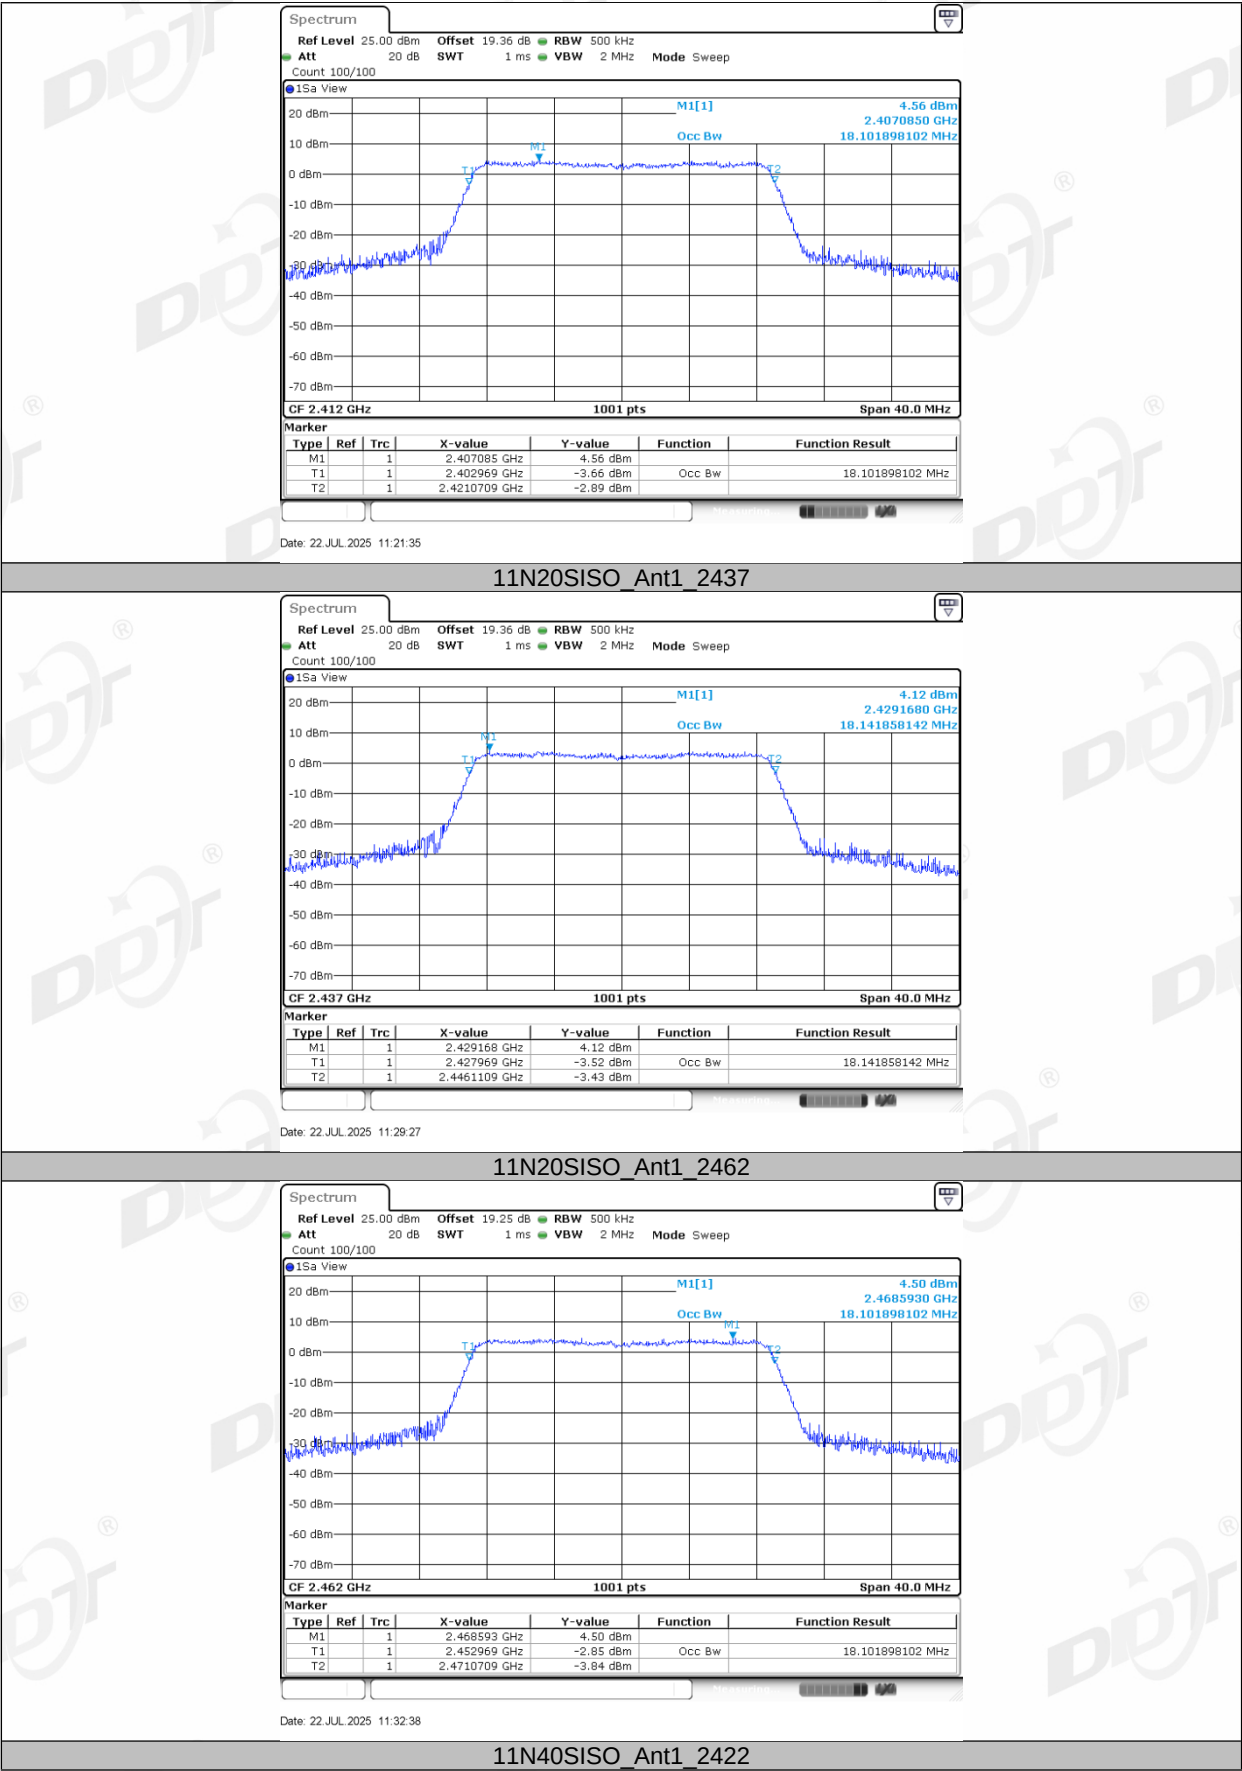

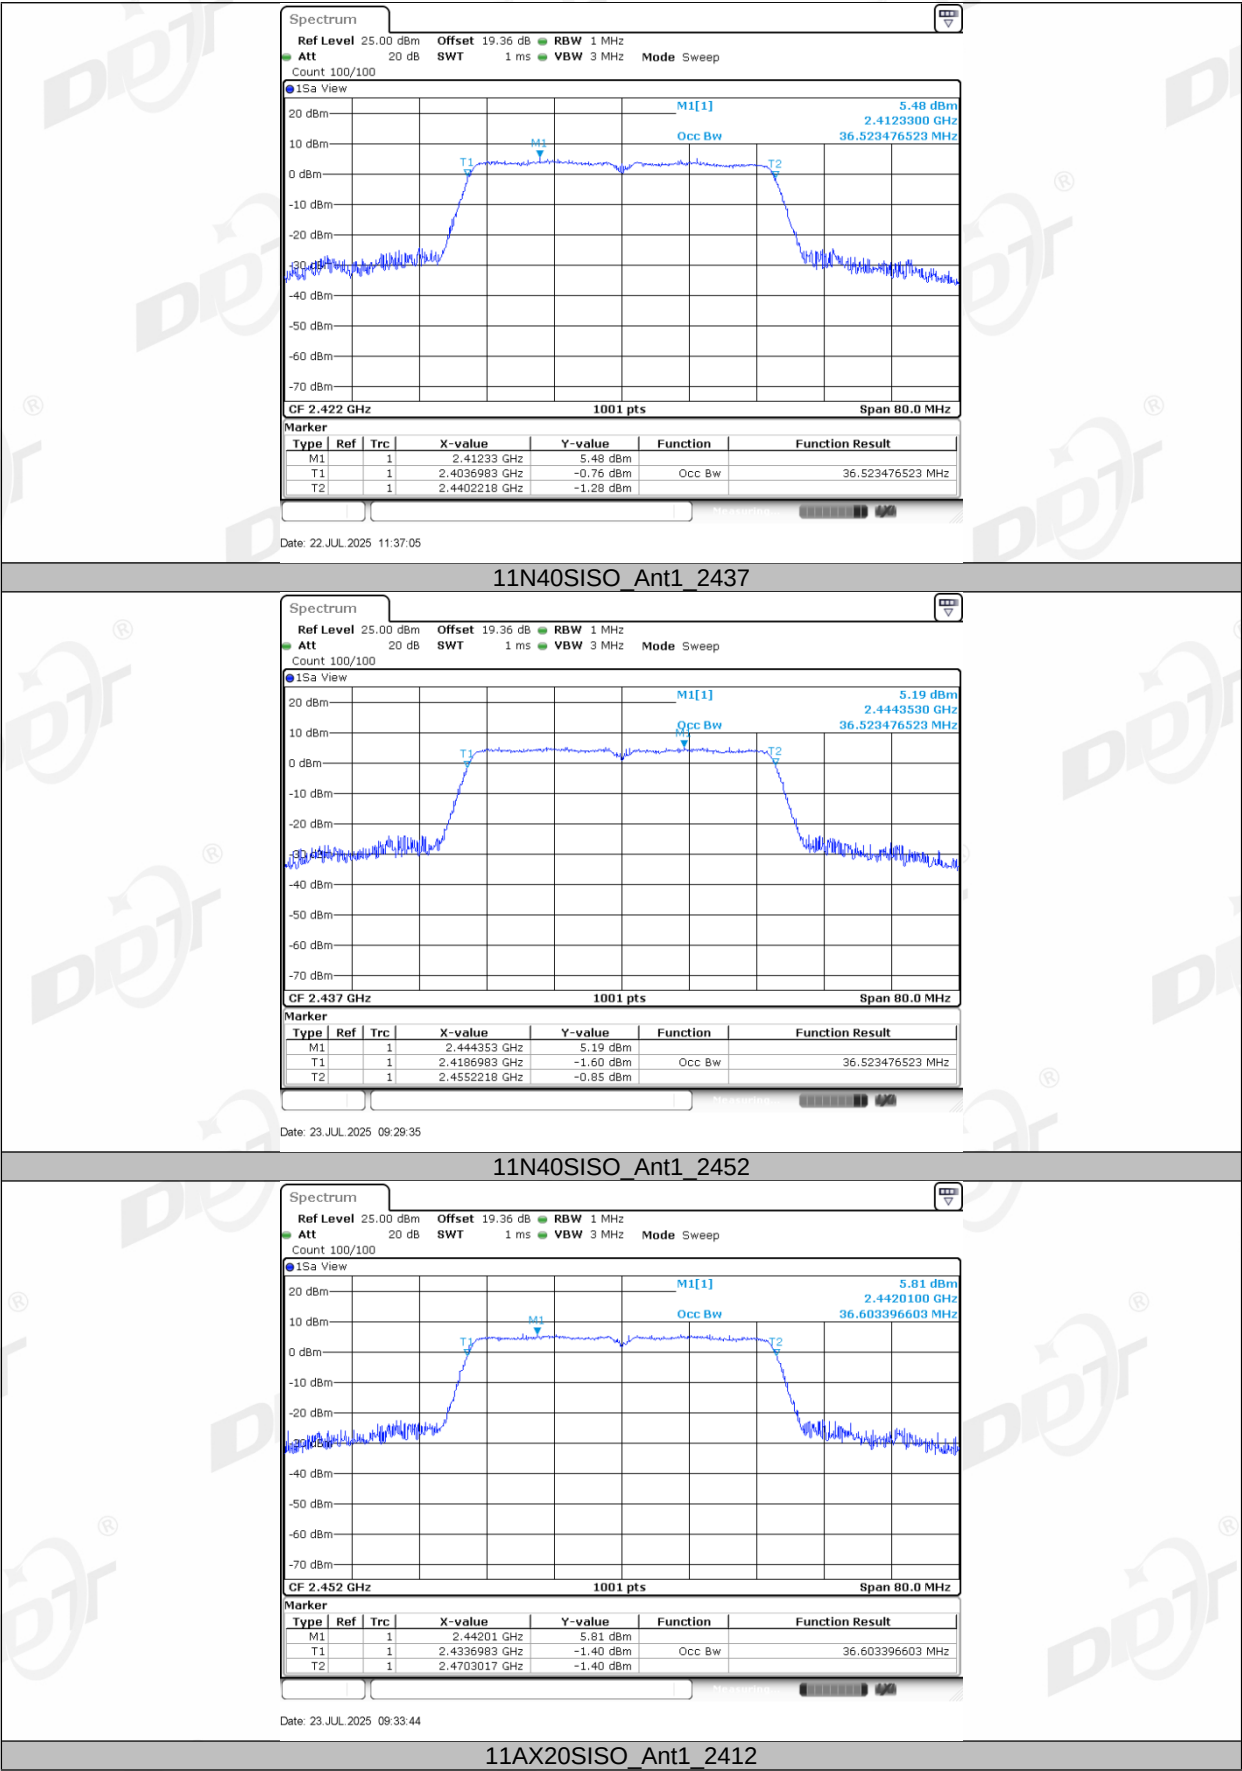


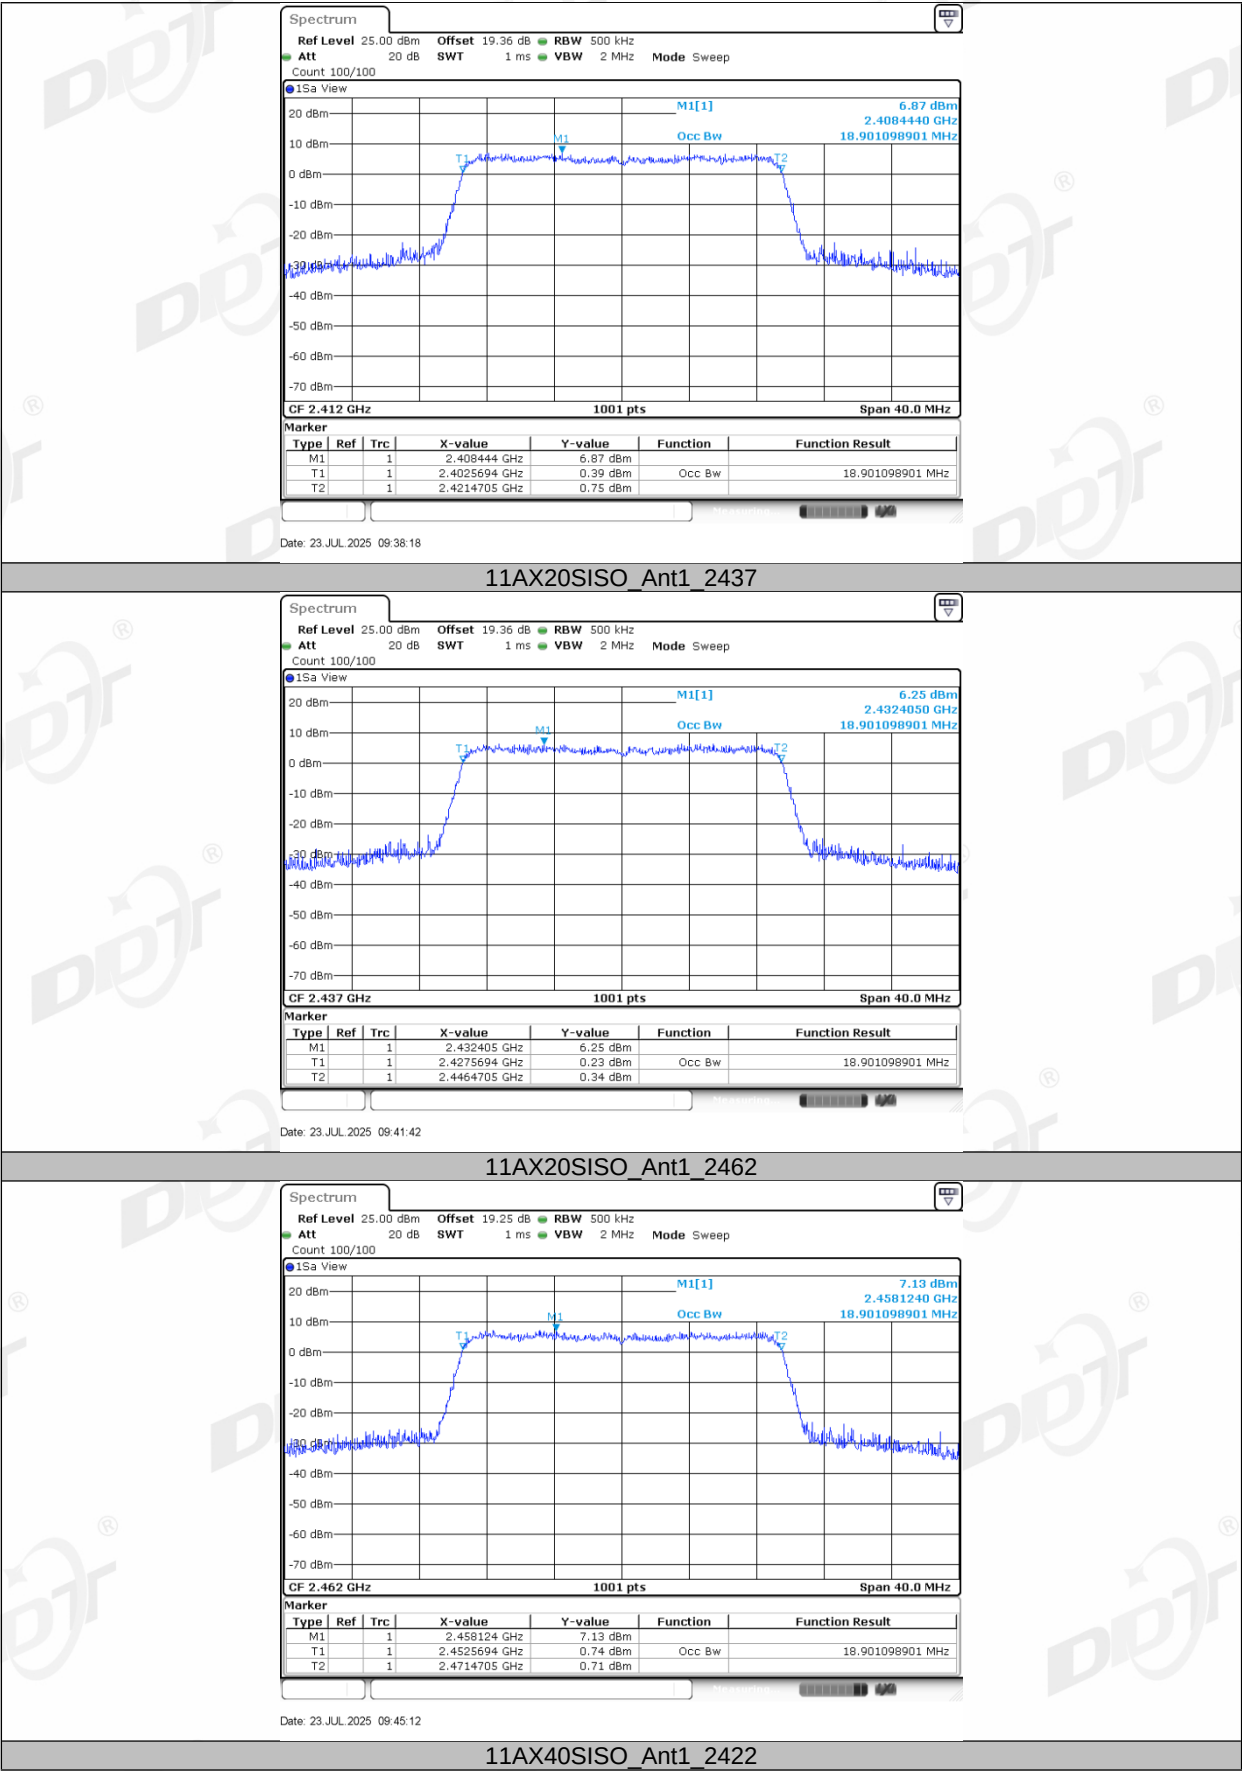

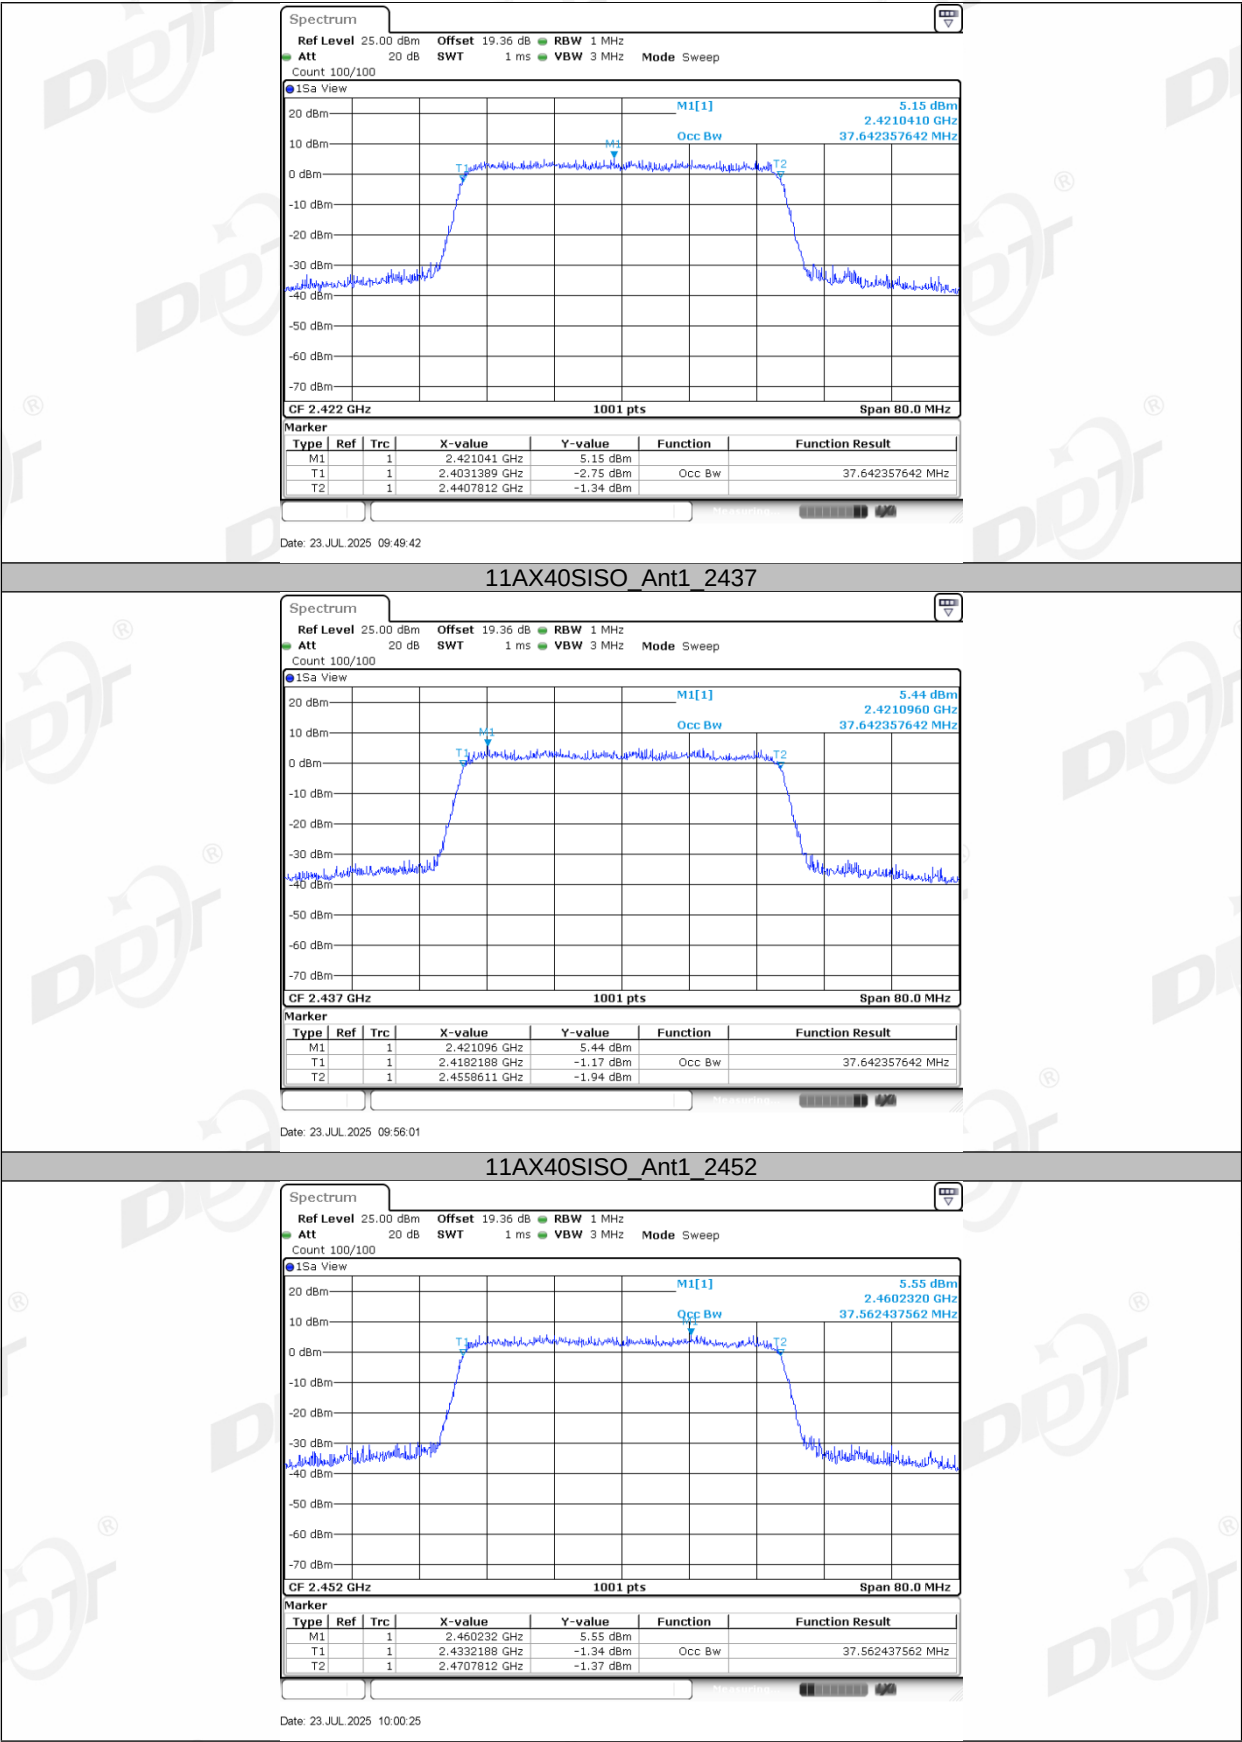

6. Conducted Output Power

6.1. Block diagram of test setup

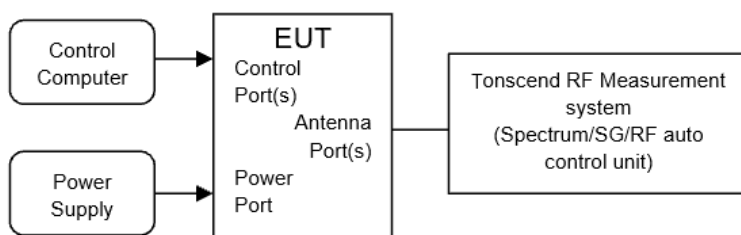

6.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.9.2.3.
- (2) Connect EUT's antenna output to RF power meter by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously, If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal.
- (4) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- (5) Adjust the measurement in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.
- (6) Record the RF average power of each antenna port.

6.4. Test result average


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	25.8-26.5℃,35.3-41.2%RH	Test Date:	2025.07.22-2025.07.23
Test Power Supply:	AC 120V	Sample Number:	S25061119-002

Test Mode	Antenna	Frequency [MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11B	Ant1	2412	20.67	97.97	0.09	20.76	≤30.00	22.55	≤36.00	PASS
		2437	20.17	97.85	0.09	20.26	≤30.00	22.05	≤36.00	PASS
		2462	20.34	97.85	0.09	20.43	≤30.00	22.22	≤36.00	PASS
11G	Ant1	2412	10.89	88.31	0.54	11.43	≤30.00	13.22	≤36.00	PASS
		2437	10.50	88.89	0.51	11.01	≤30.00	12.80	≤36.00	PASS
		2462	11.10	88.89	0.51	11.61	≤30.00	13.40	≤36.00	PASS
11N20SISO	Ant1	2412	12.38	96.76	0.14	12.52	≤30.00	14.31	≤36.00	PASS
		2437	11.83	96.77	0.14	11.97	≤30.00	13.76	≤36.00	PASS
		2462	12.37	96.77	0.14	12.51	≤30.00	14.30	≤36.00	PASS
11N40SISO	Ant1	2422	11.93	93.21	0.31	12.24	≤30.00	14.03	≤36.00	PASS
		2437	12.50	93.56	0.29	12.79	≤30.00	14.58	≤36.00	PASS
		2452	13.00	93.58	0.29	13.29	≤30.00	15.08	≤36.00	PASS
11AX20SISO	Ant1	2412	12.54	96.40	0.16	12.70	≤30.00	14.49	≤36.00	PASS
		2437	12.08	96.40	0.16	12.24	≤30.00	14.03	≤36.00	PASS
		2462	12.65	96.41	0.16	12.81	≤30.00	14.60	≤36.00	PASS
11AX40SISO	Ant1	2422	9.99	93.15	0.31	10.30	≤30.00	12.09	≤36.00	PASS
		2437	9.74	93.15	0.31	10.05	≤30.00	11.84	≤36.00	PASS
		2452	10.55	93.15	0.31	10.86	≤30.00	12.65	≤36.00	PASS

Note: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

7. Power Spectral Density

7.1. Block diagram of test setup

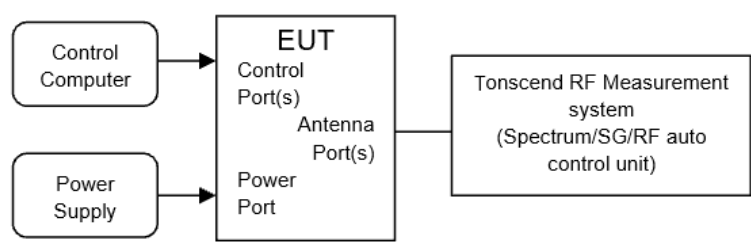

7.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.10.5.
- (2) Connect EUT’s antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for Power Spectral Density measurement:

Center frequency	DTS Channel center frequency
RBW:	$3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	max hold
	Employ trace averaging (rms)
Trace	mode over a minimum of 100 traces.

- (5) Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


7.4. Test result


Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	25.8-26.5℃,35.3-41.2%RH	Test Date:	2025.07.22-2025.07.23
Test Power Supply:	AC 120V	Sample Number:	S25061119-002


Test Mode	Antenna	Frequency [MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-11.27	≤8.00	PASS
		2437	-11.78	≤8.00	PASS
		2462	-11.61	≤8.00	PASS
11G	Ant1	2412	-17.33	≤8.00	PASS
		2437	-16.17	≤8.00	PASS
		2462	-16.94	≤8.00	PASS
11N20SISO	Ant1	2412	-15.45	≤8.00	PASS
		2437	-16.16	≤8.00	PASS
		2462	-16.76	≤8.00	PASS
11N40SISO	Ant1	2422	-16.85	≤8.00	PASS
		2437	-18.33	≤8.00	PASS
		2452	-17.07	≤8.00	PASS
11AX20SISO	Ant1	2412	-14.60	≤8.00	PASS
		2437	-15.18	≤8.00	PASS
		2462	-15.22	≤8.00	PASS
11AX40SISO	Ant1	2422	-15.58	≤8.00	PASS
		2437	-15.55	≤8.00	PASS
		2452	-15.93	≤8.00	PASS


Note: The Duty Cycle Factor is compensated in the graph.


7.5. Test graphs

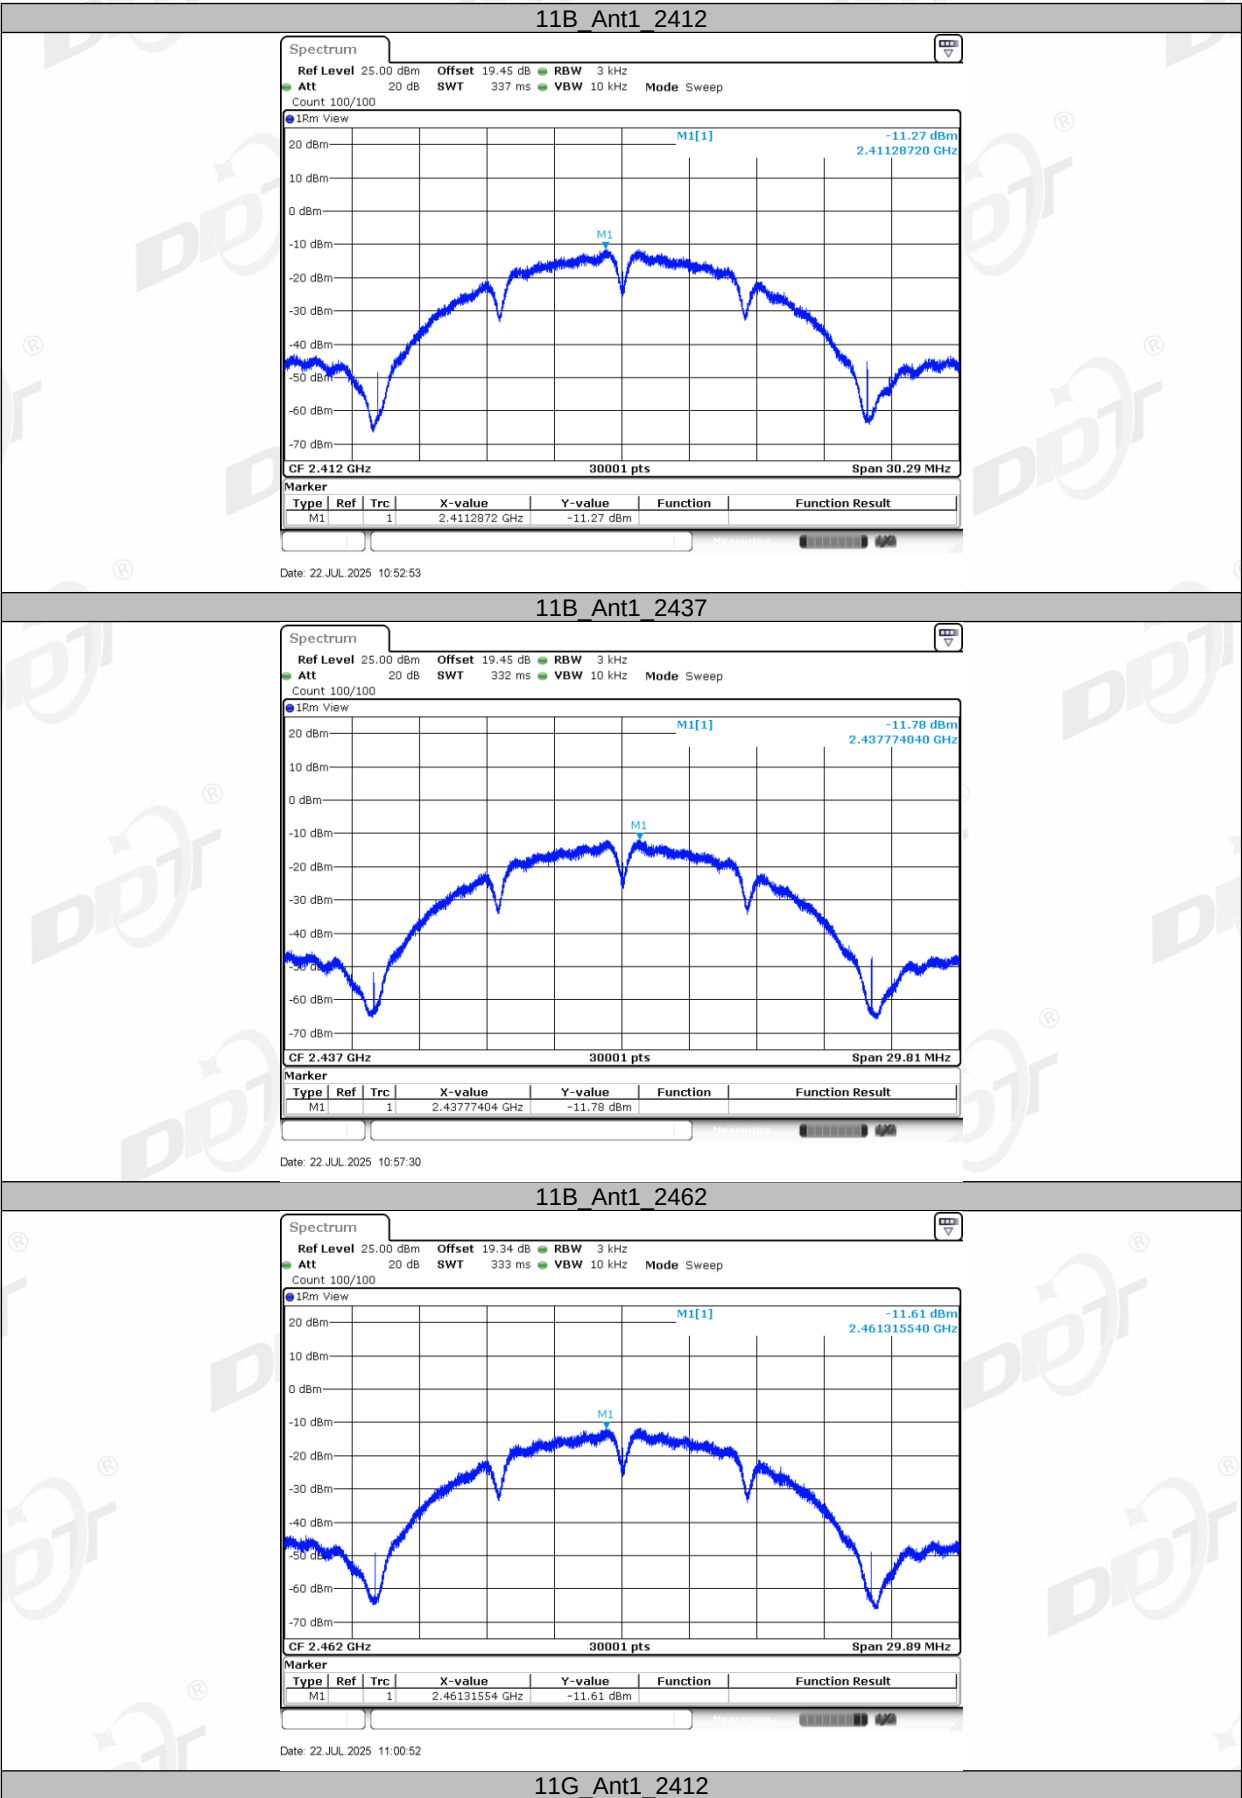


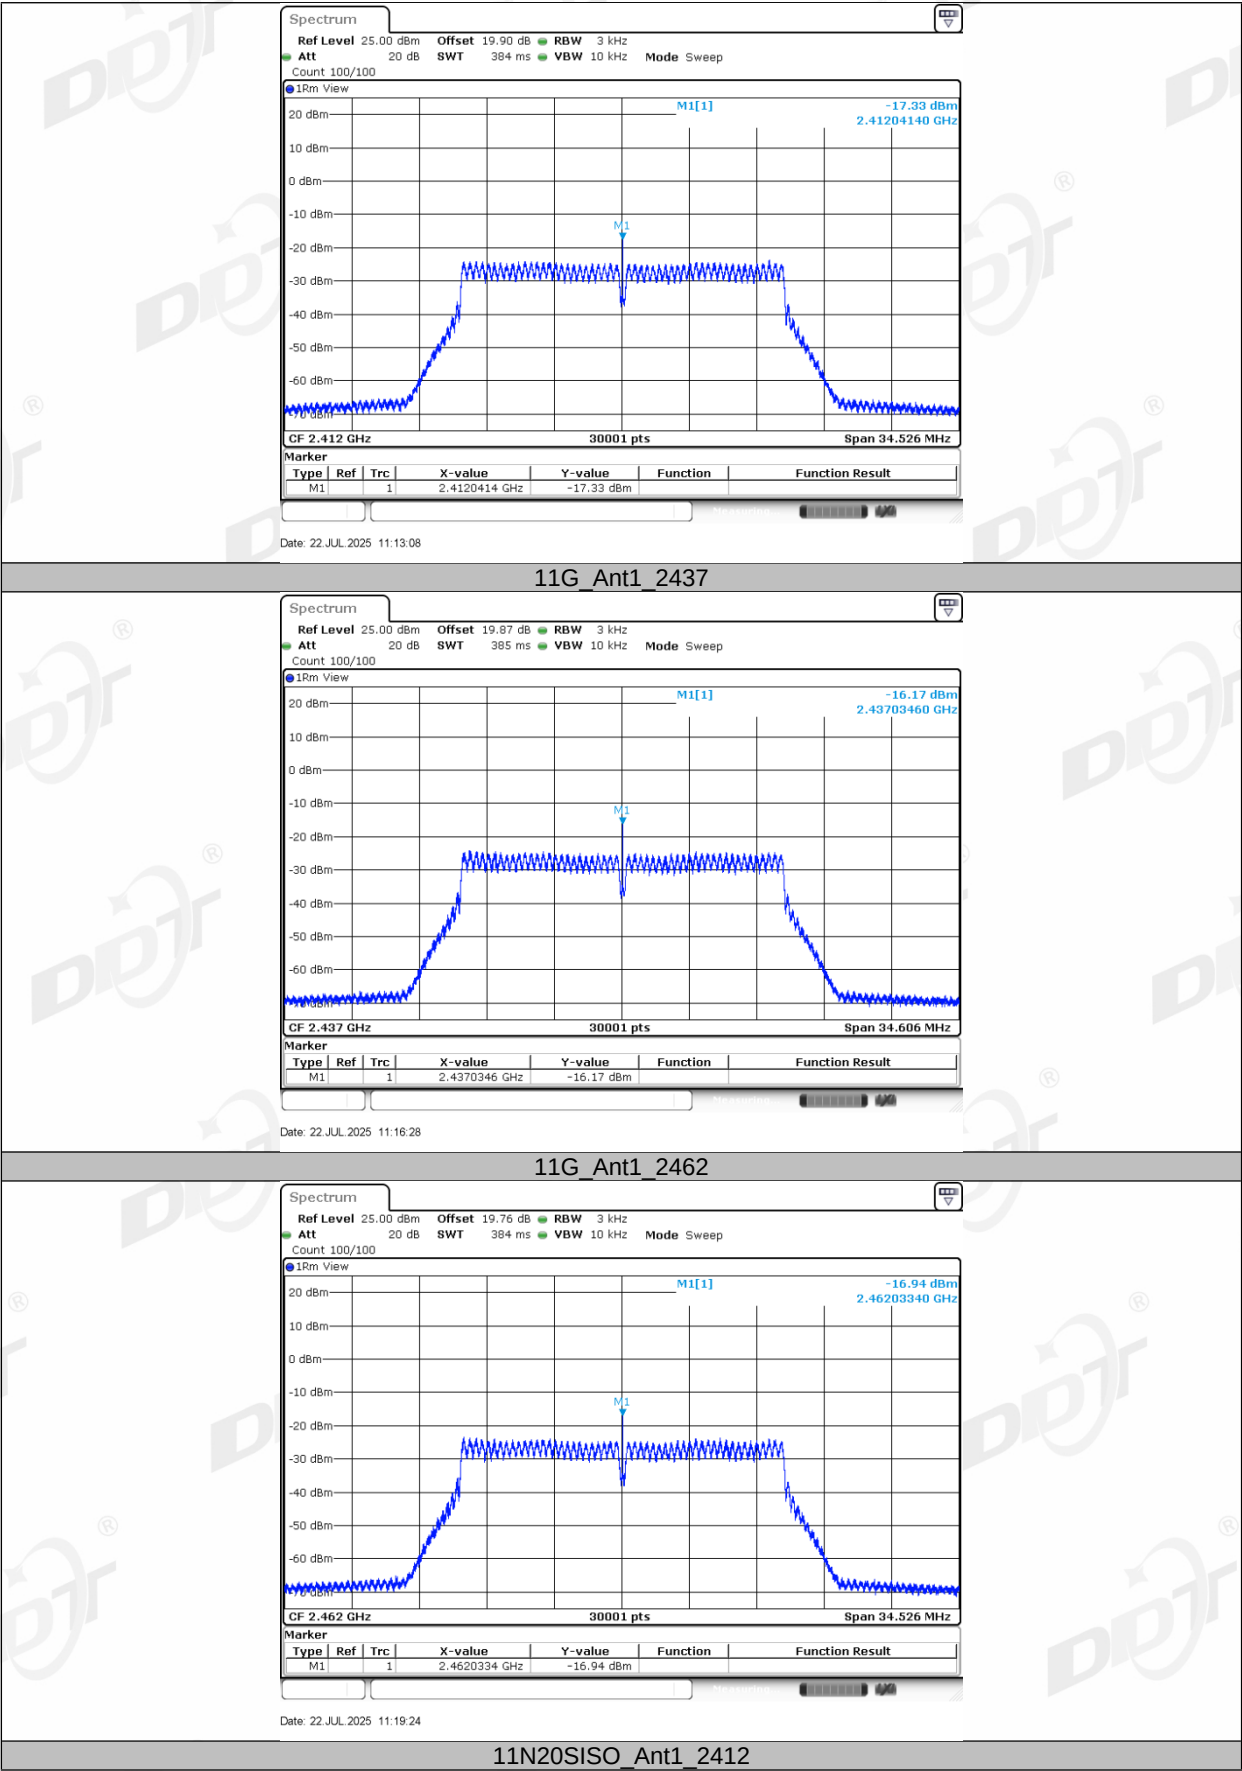

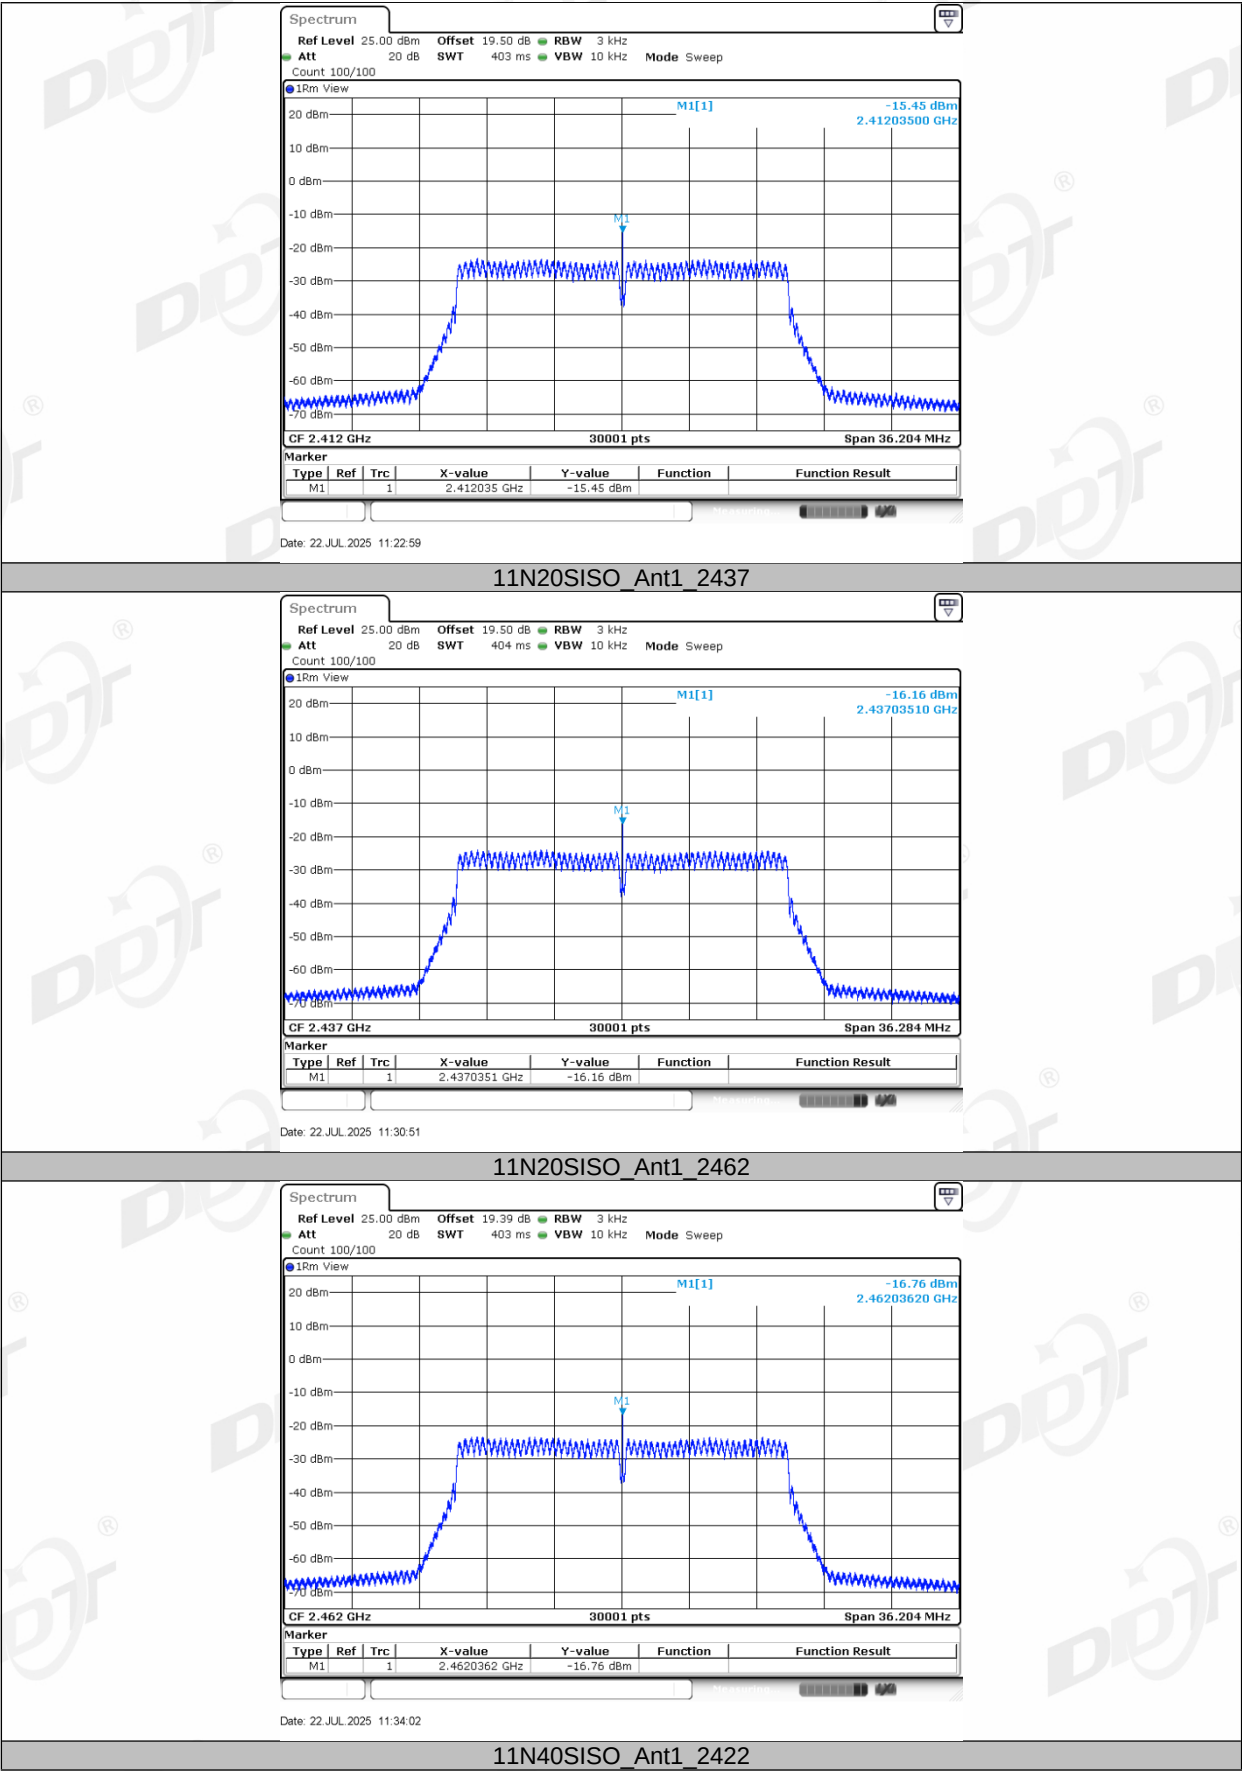

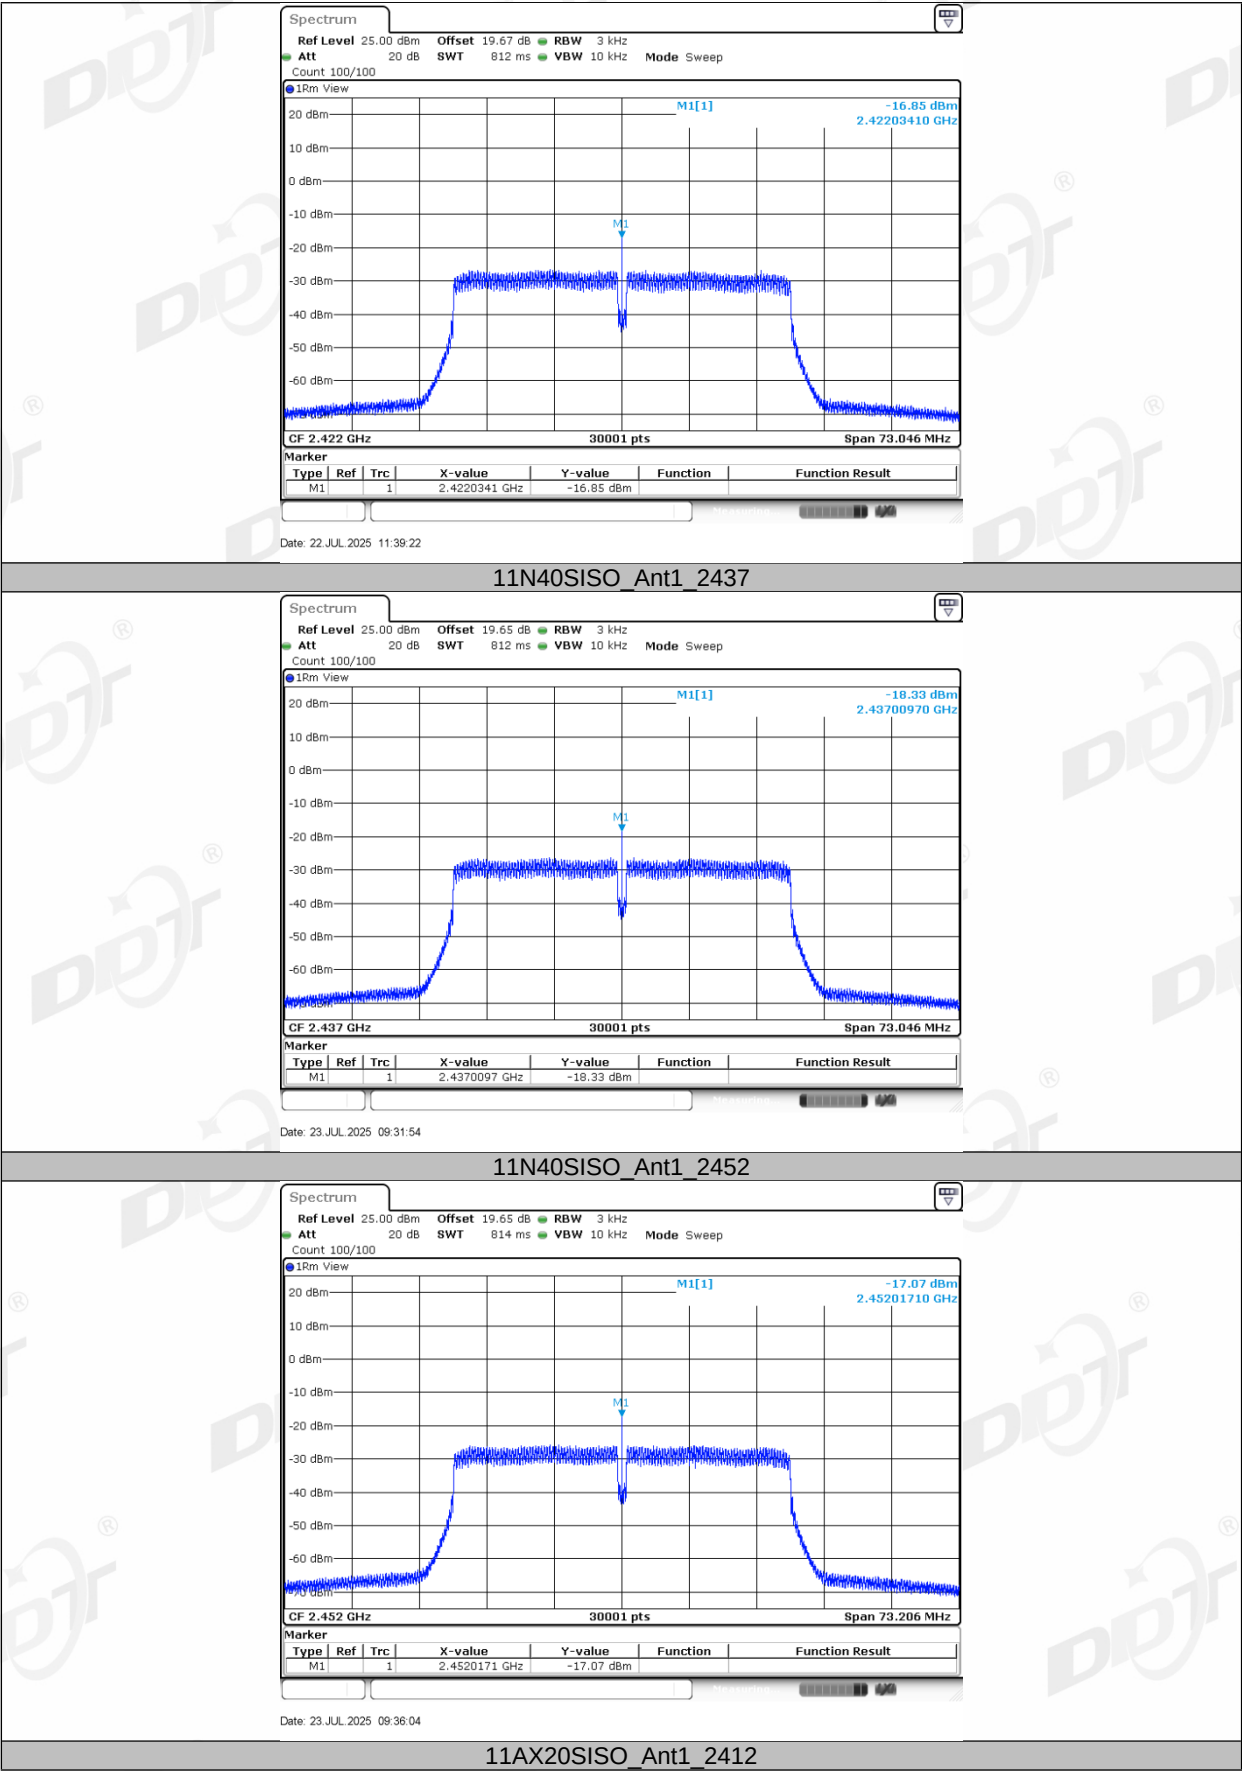


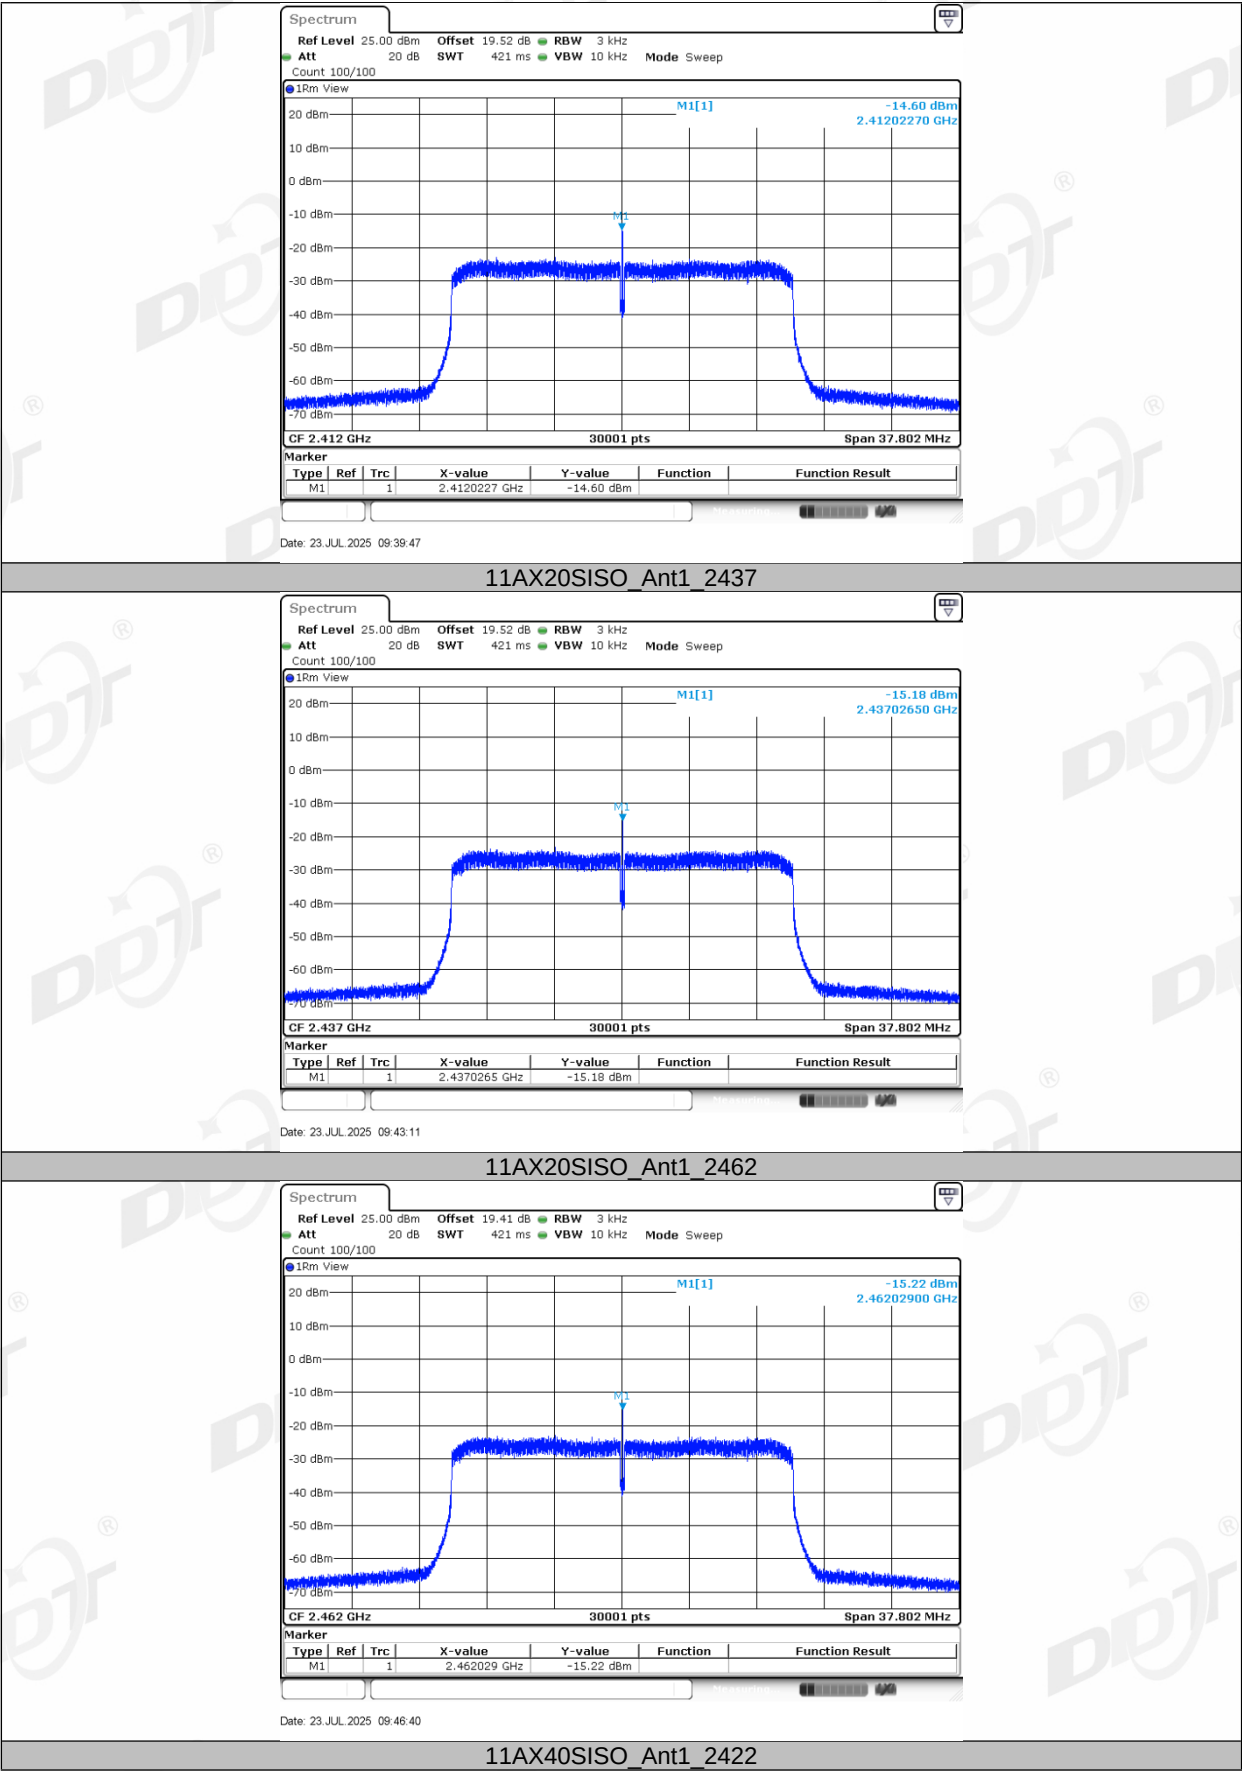

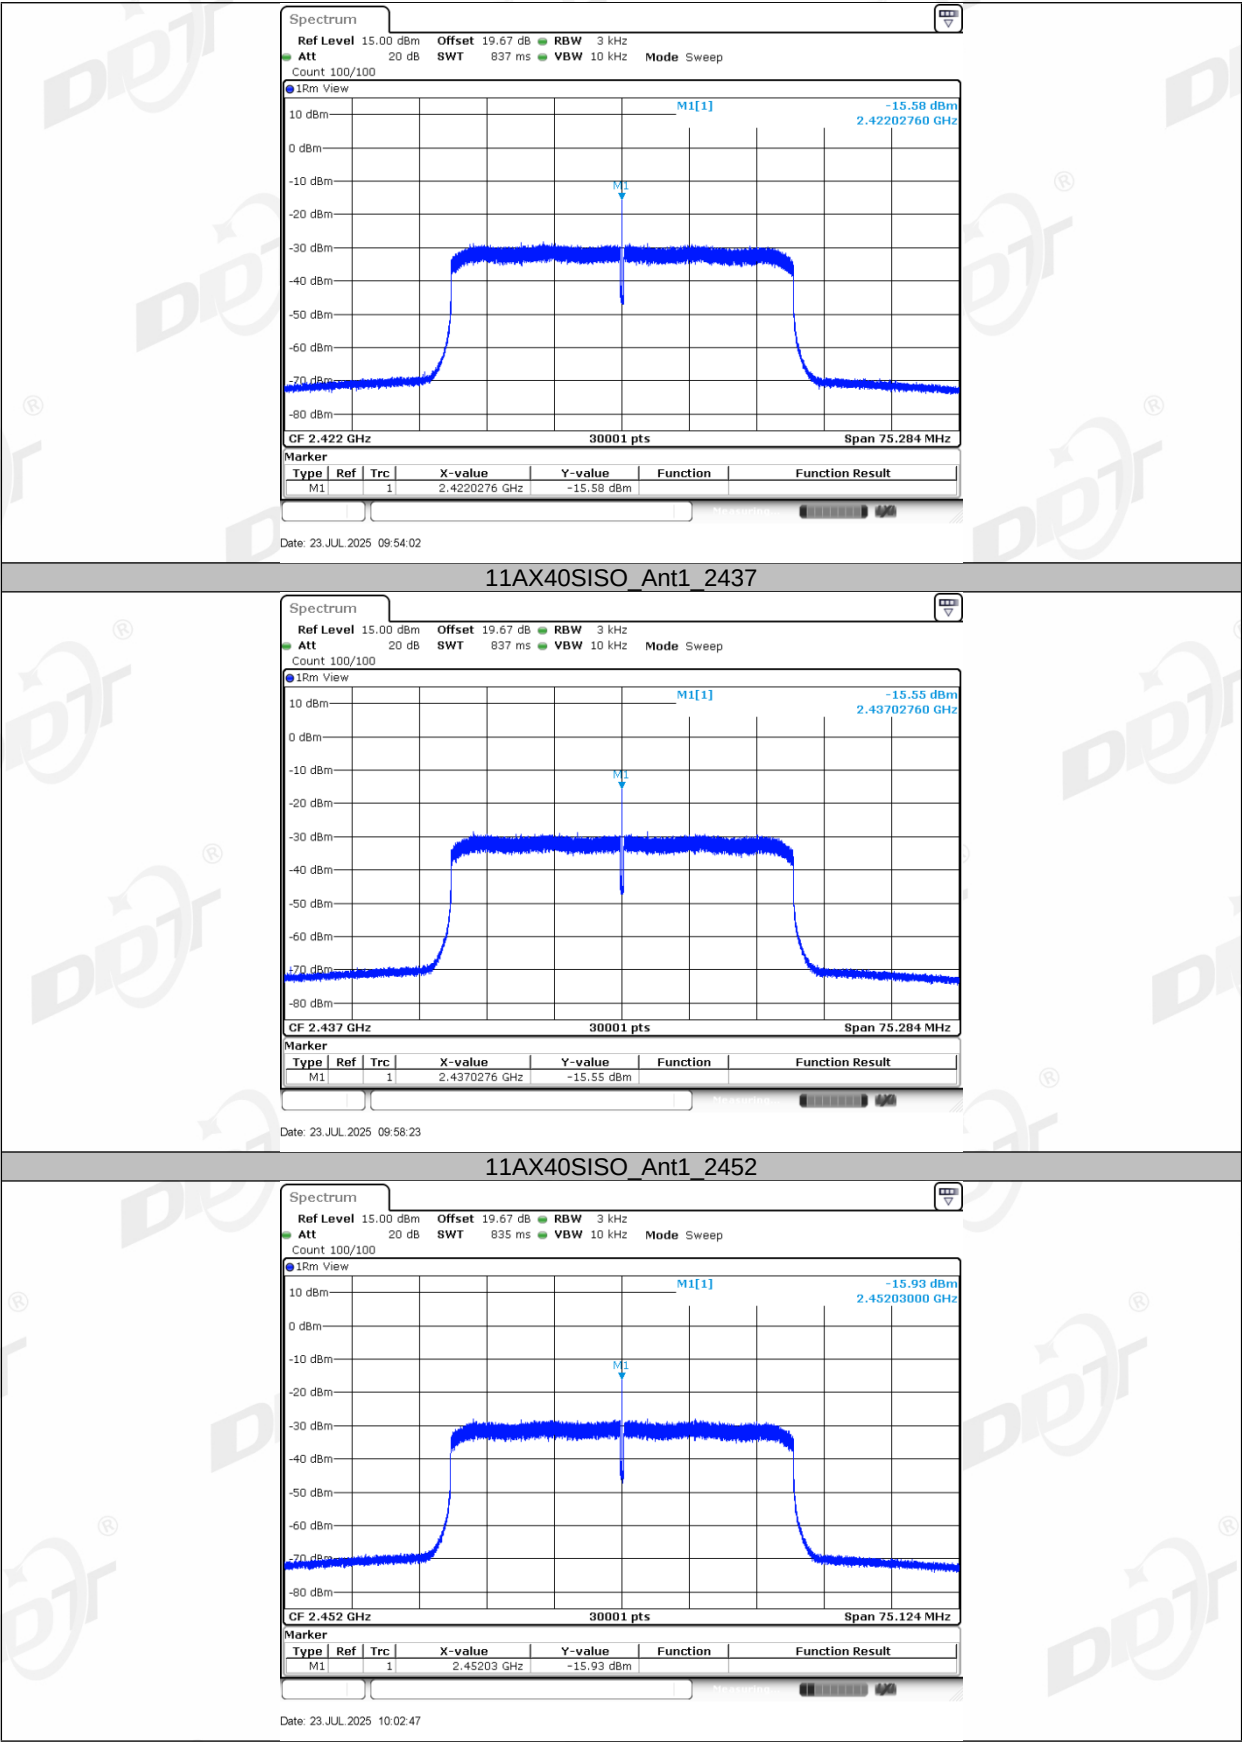

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

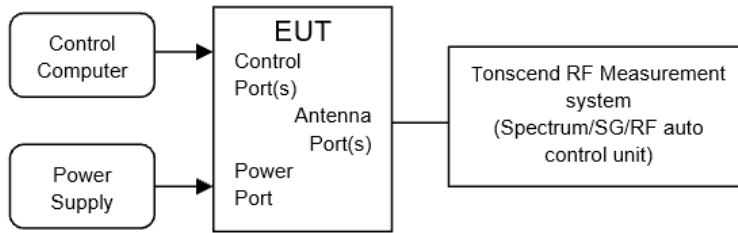

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.