




Puw test Plot

LCH SPURIOUS EMISSION 30MHz~1GHz

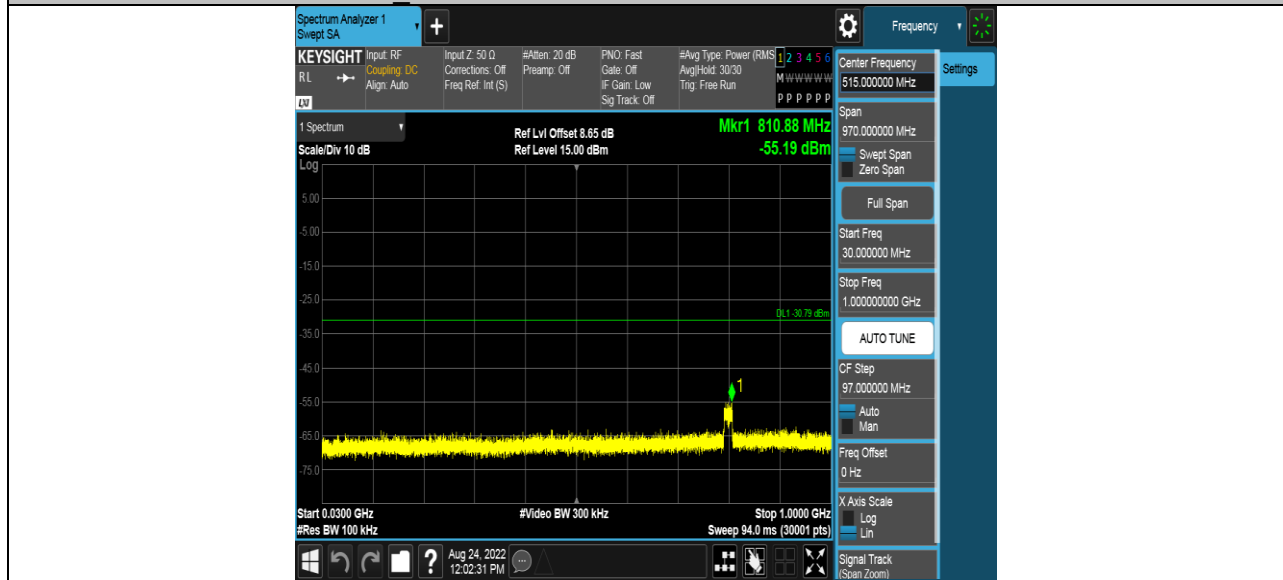

LCH SPURIOUS EMISSION 1GHz~26GHz





Test Mode	Channel	Verdict
11G	MCH	PASS


Pref test Plot





Puw test Plot

MCH SPURIOUS EMISSION 30MHz~1GHz

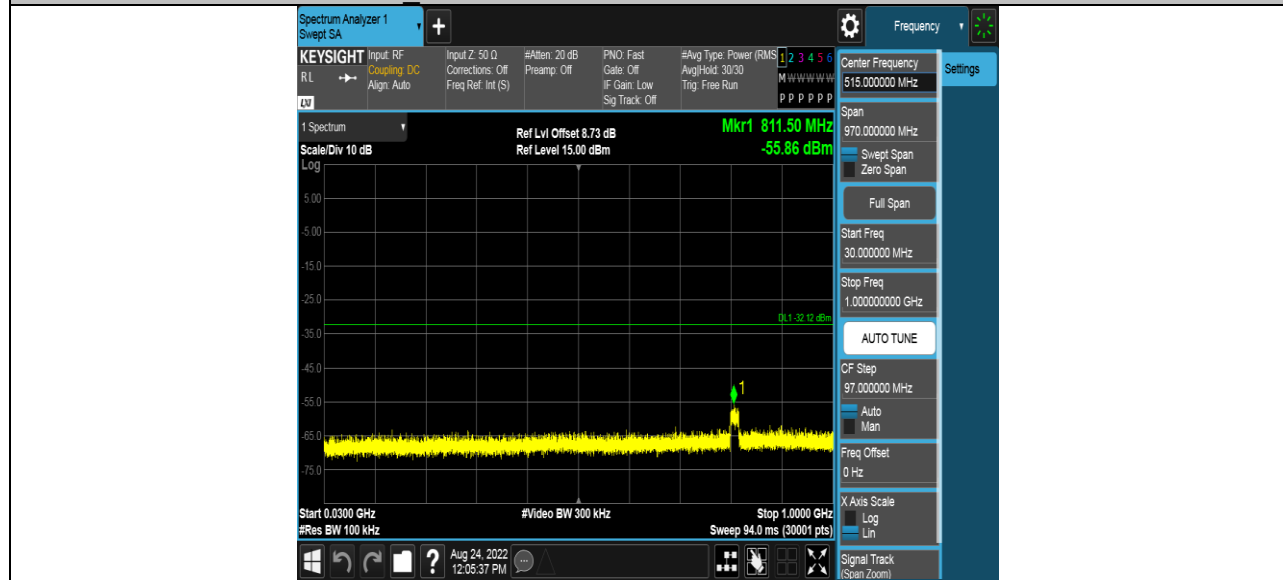

MCH SPURIOUS EMISSION 1GHz~26GHz





Test Mode	Channel	Verdict
11G	HCH	PASS


Pref test Plot





Puw test Plot

HCH SPURIOUS EMISSION 30MHz~1GHz

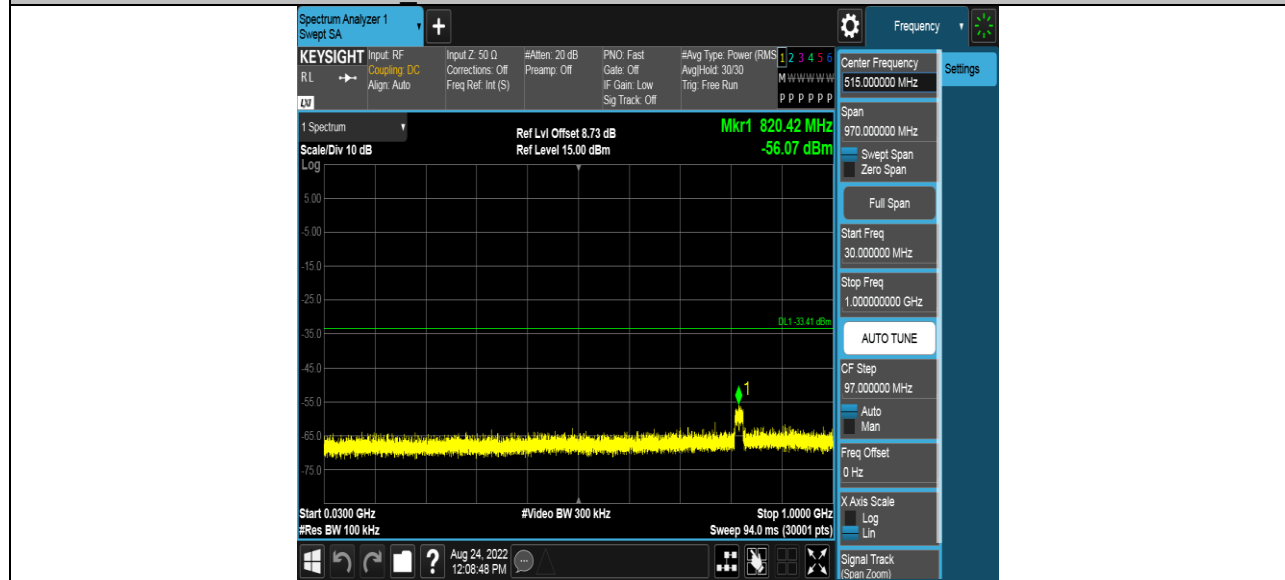


HCH SPURIOUS EMISSION 1GHz~26GHz





Test Mode	Channel	Verdict
11N HT20	LCH	PASS


Pref test Plot

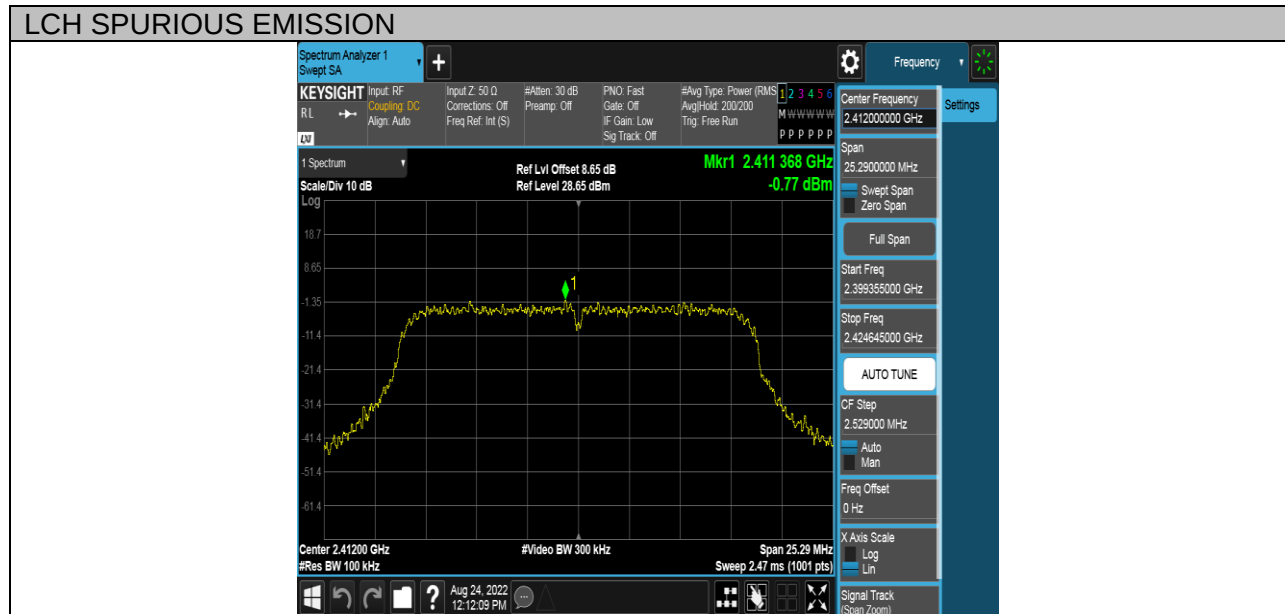



Puw test Plot

LCH SPURIOUS EMISSION 30MHz~1GHz

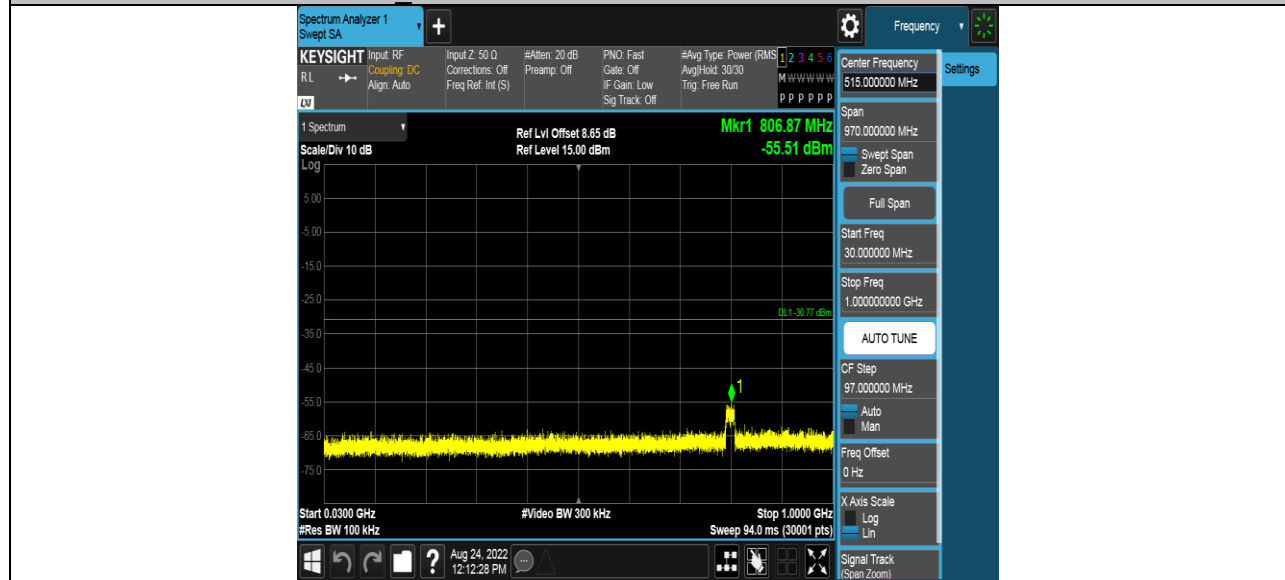

LCH SPURIOUS EMISSION 1GHz~26GHz





Test Mode	Channel	Verdict
11N HT20	MCH	PASS

Pref test Plot





Puw test Plot

MCH SPURIOUS EMISSION 30MHz~1GHz



MCH SPURIOUS EMISSION 1GHz~26GHz





Test Mode	Channel	Verdict
11N HT20	HCH	PASS


Pref test Plot





Puw test Plot

HCH SPURIOUS EMISSION 30MHz~1GHz

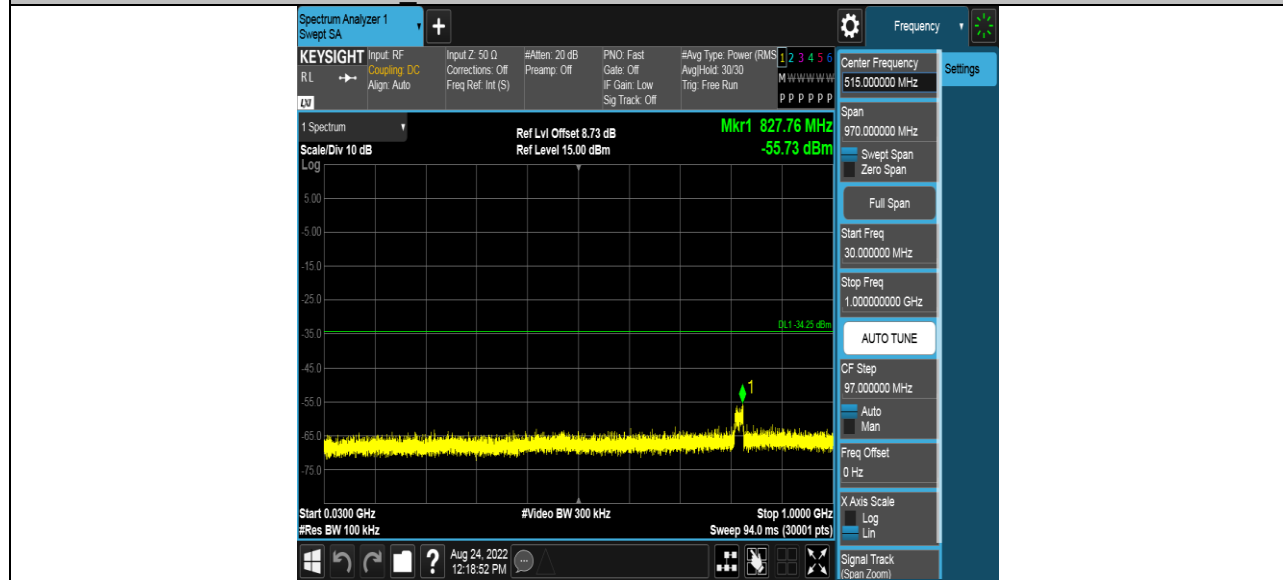

HCH SPURIOUS EMISSION 1GHz~26GHz





7.7. RADIATED TEST RESULTS

7.7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13 (Transmitter)

Radiation Disturbance Test Limit for ISED(9KHz-1GHz)

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

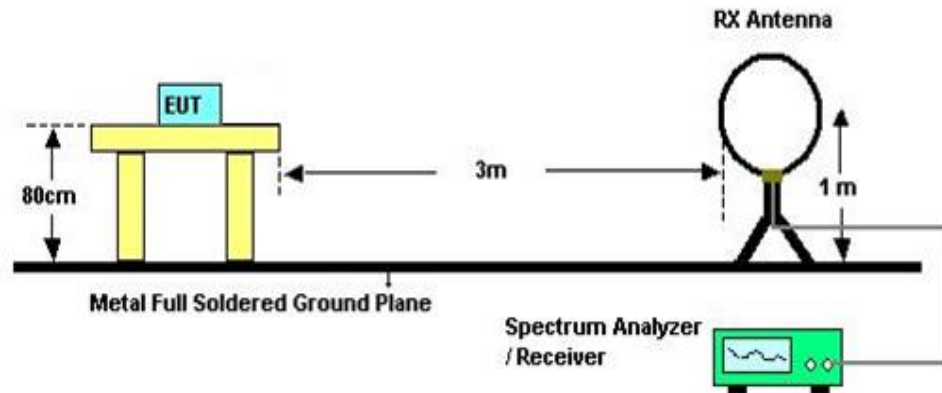


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

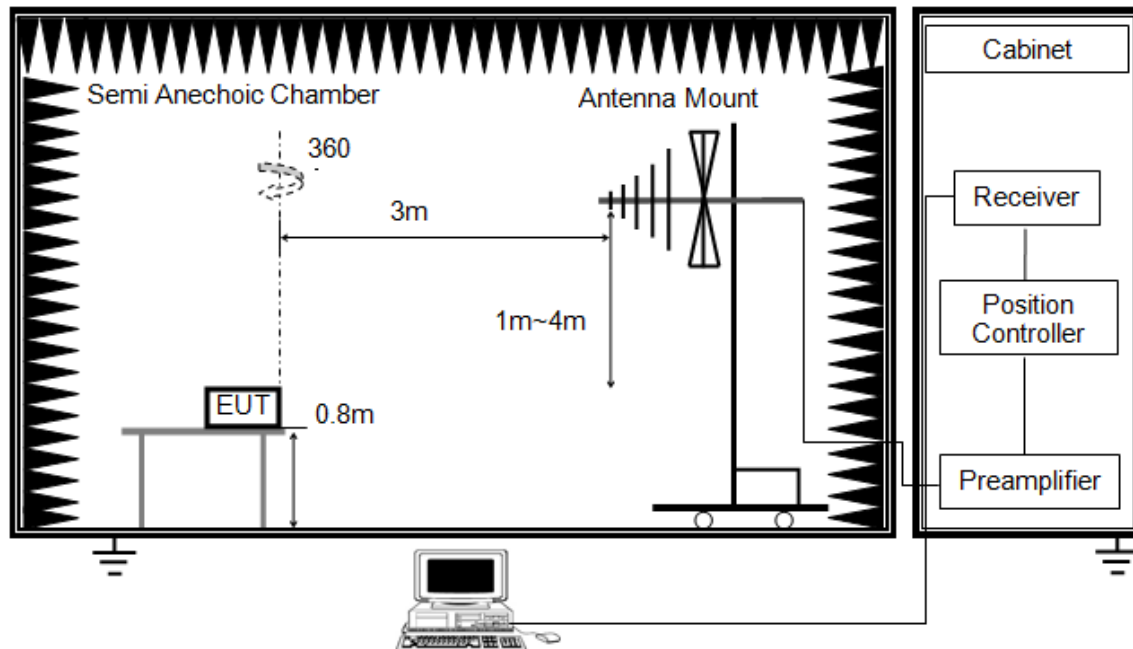


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

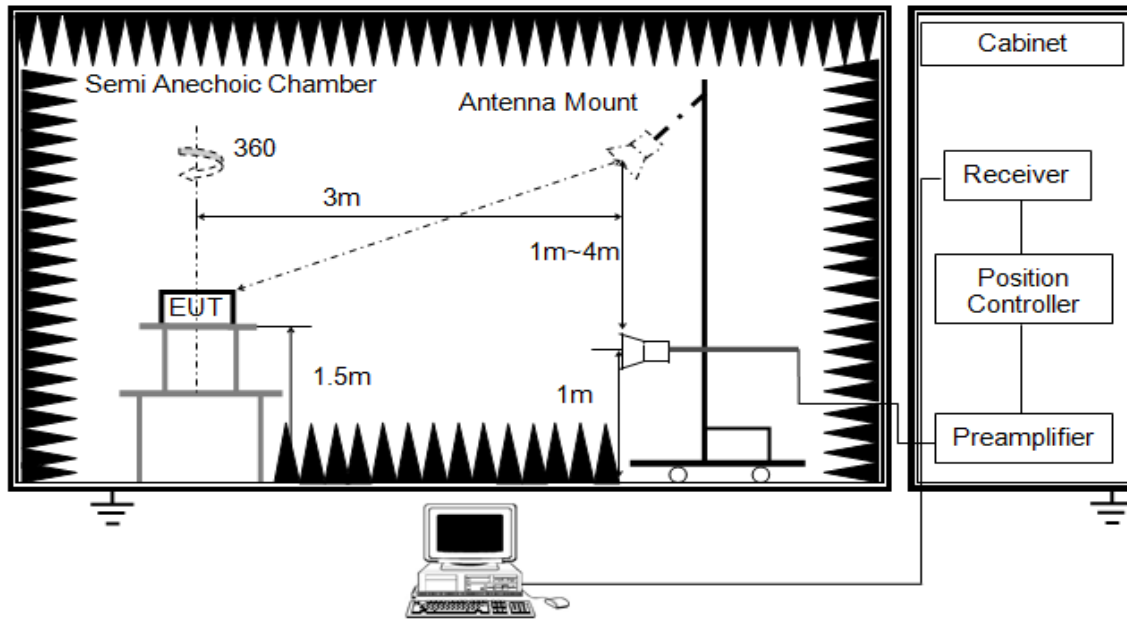


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth $\geq 1/T$ but not less than the setting list in section 7.2 when use peak detector, max hold to be run for at least $[50 \cdot (1/\text{Duty Cycle})]$ traces for average measurements. For the Duty Cycle need to refer the results in section 7.2.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

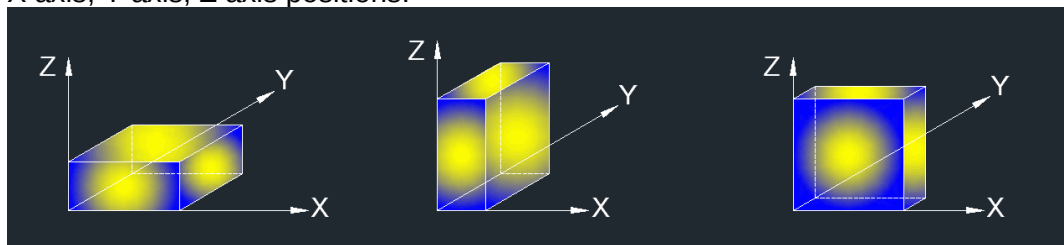

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

7.7.2.RESTRICTED BANDEDGE

TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests
Relative Humidity	62.5%
Atmospheric Pressure:	101kPa
Temperature	23.2°C


Test Result Table

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	HCH	<Limit	PASS



Test Graphs:

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

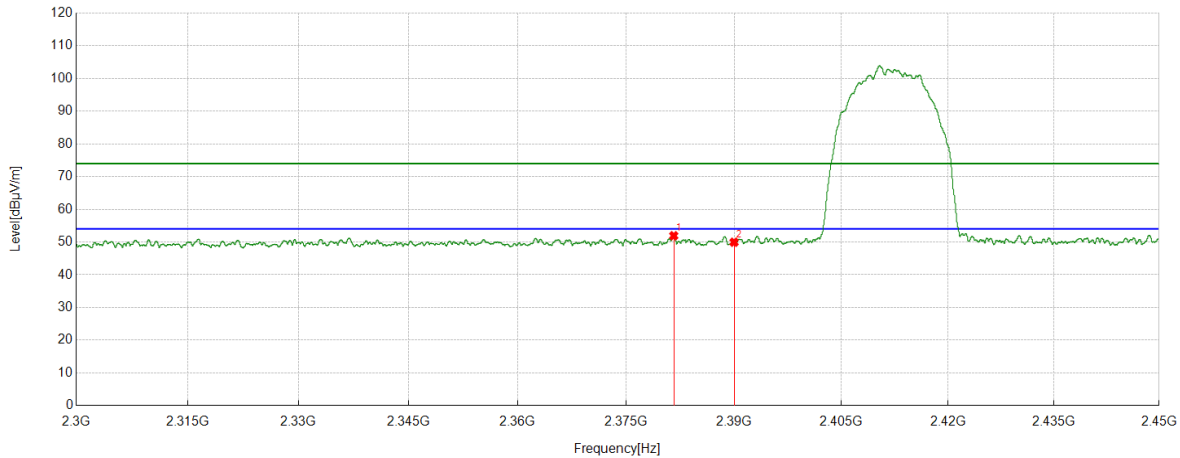


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2381.6102	40.62	11.31	51.93	74.00	-22.07	peak
2	2390	38.70	11.25	49.95	74.00	-24.05	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

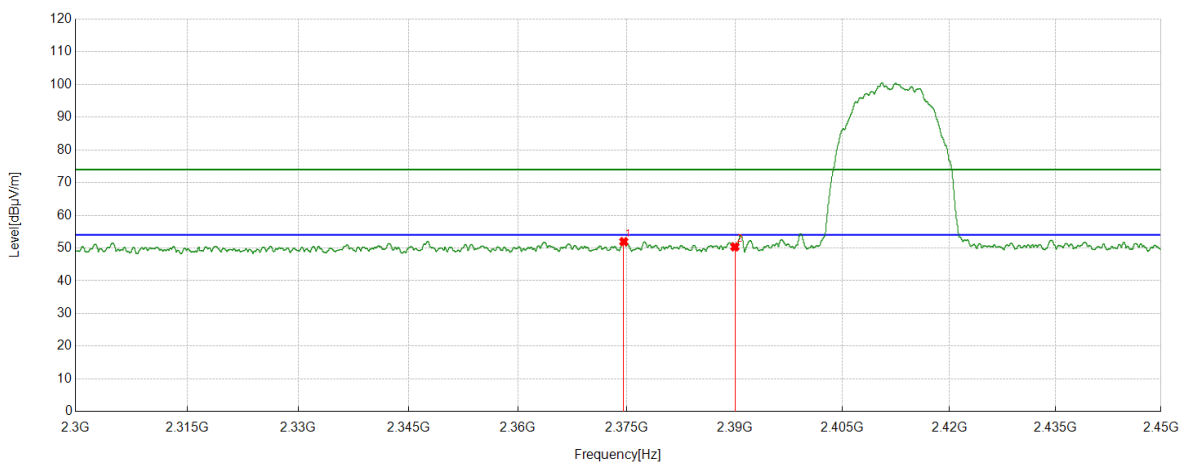


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2374.5968	40.67	11.29	51.96	74.00	-22.04	peak
2	2390	39.12	11.25	50.37	74.00	-23.63	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

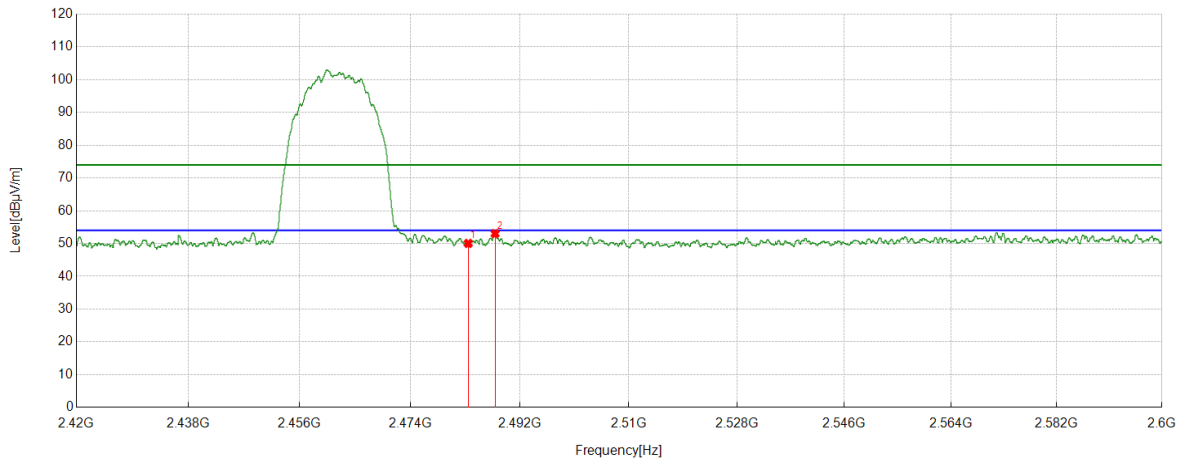


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	38.77	11.28	50.05	74.00	-23.95	peak
2	2487.9135	41.67	11.35	53.02	74.00	-20.98	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

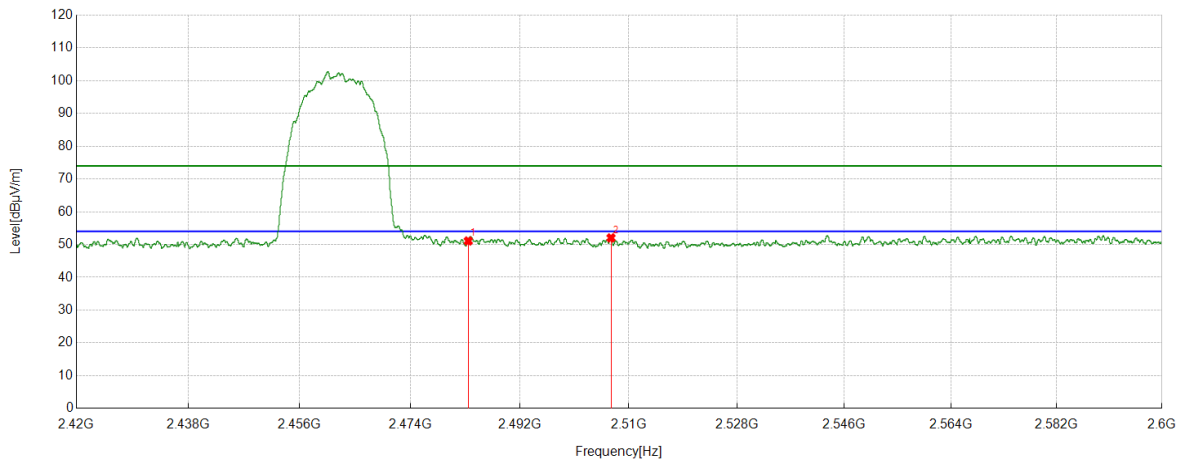


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	39.81	11.28	51.09	74.00	-22.91	peak
2	2507.0409	40.55	11.48	52.03	74.00	-21.97	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

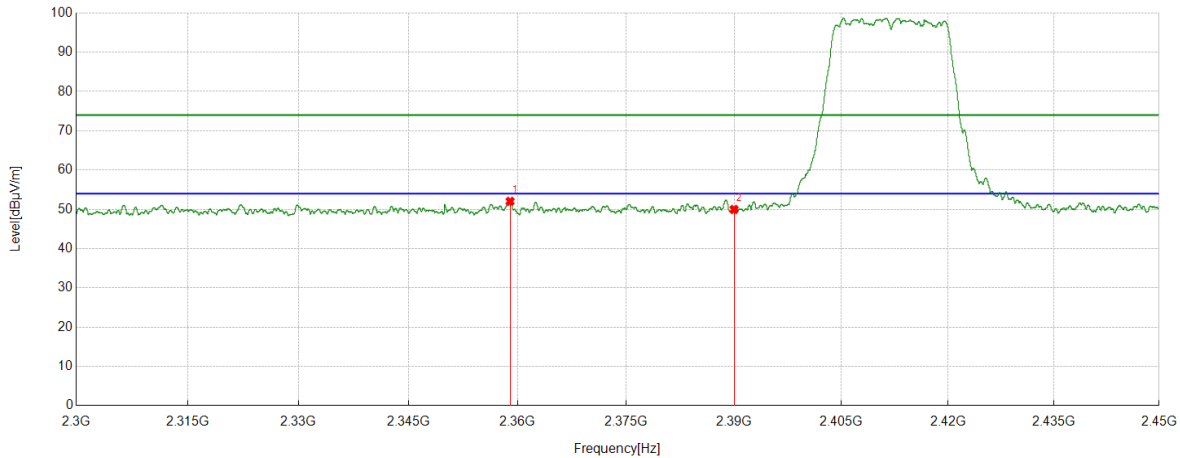


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2358.9761	40.89	11.15	52.04	74.00	-21.96	peak
2	2390	38.72	11.25	49.97	74.00	-24.03	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

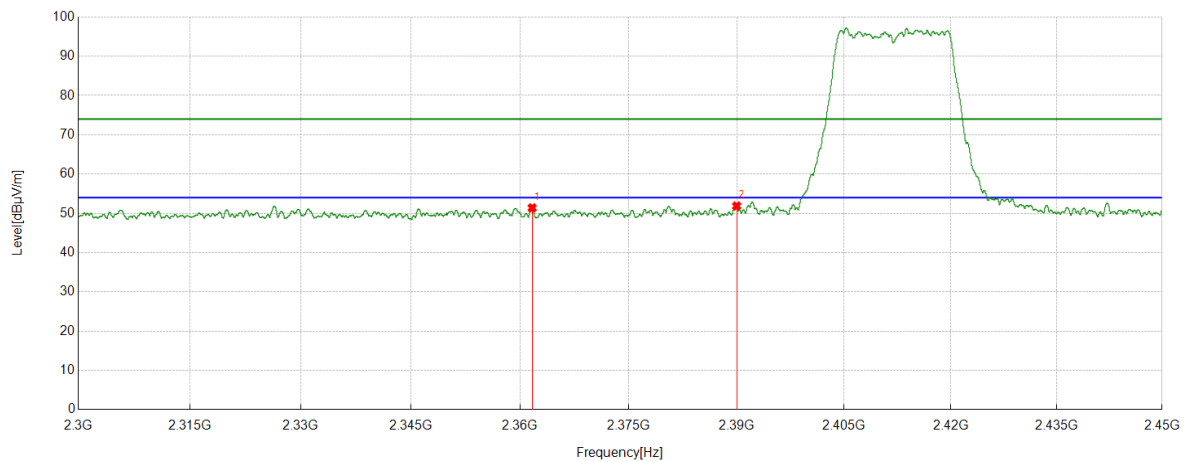


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2361.6765	40.22	11.17	51.39	74.00	-22.61	peak
2	2390	40.62	11.25	51.87	74.00	-22.13	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

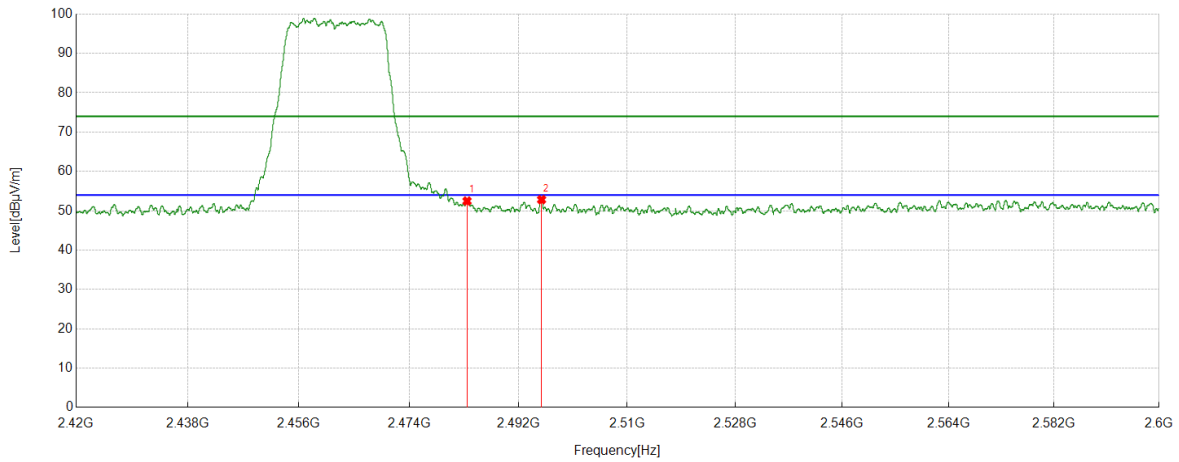


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	41.19	11.28	52.47	74.00	-21.53	peak
2	2495.7895	41.38	11.44	52.82	74.00	-21.18	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

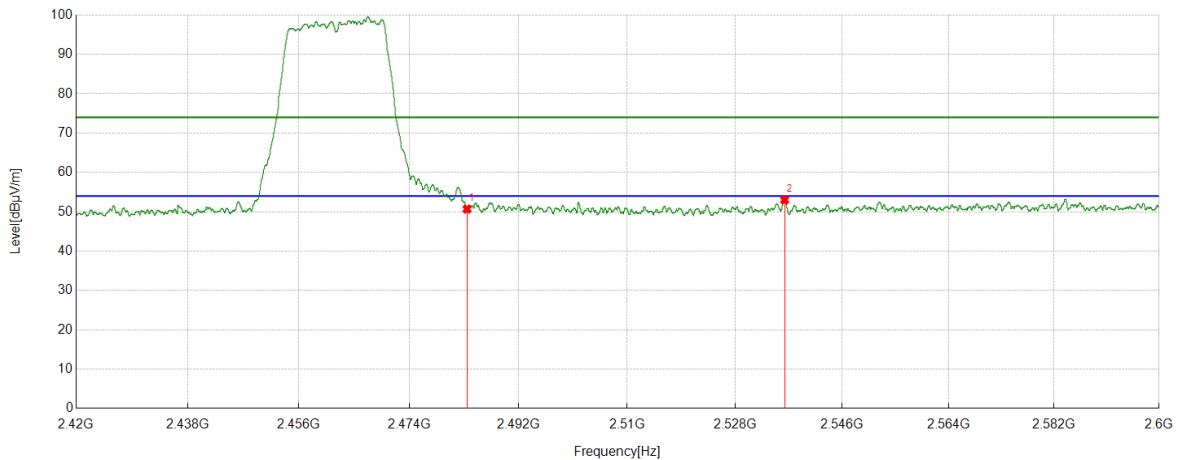


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	39.41	11.28	50.69	74.00	-23.31	peak
2	2536.2945	41.14	11.86	53.00	74.00	-21.00	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

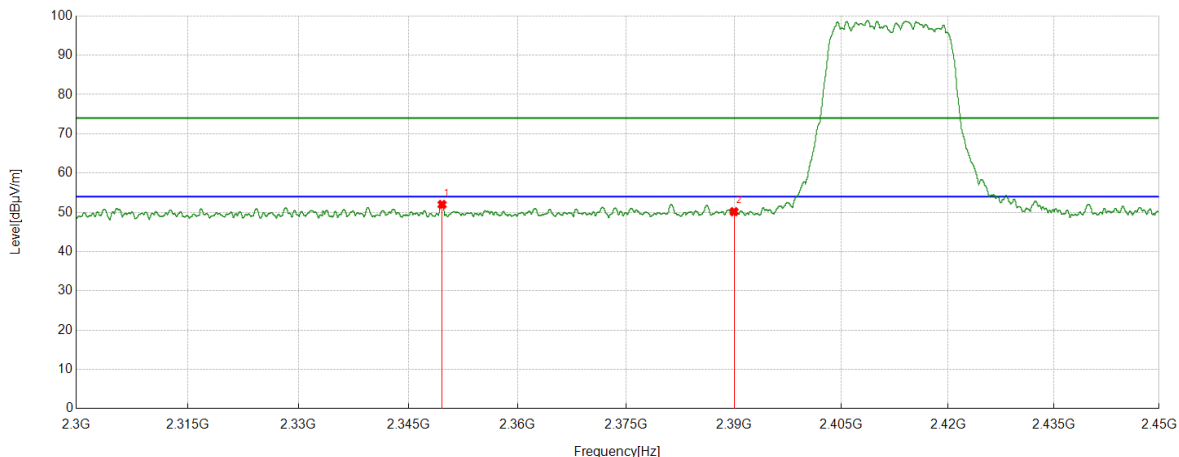


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2349.6375	40.84	11.15	51.99	74.00	-22.01	peak
2	2390	38.91	11.25	50.16	74.00	-23.84	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

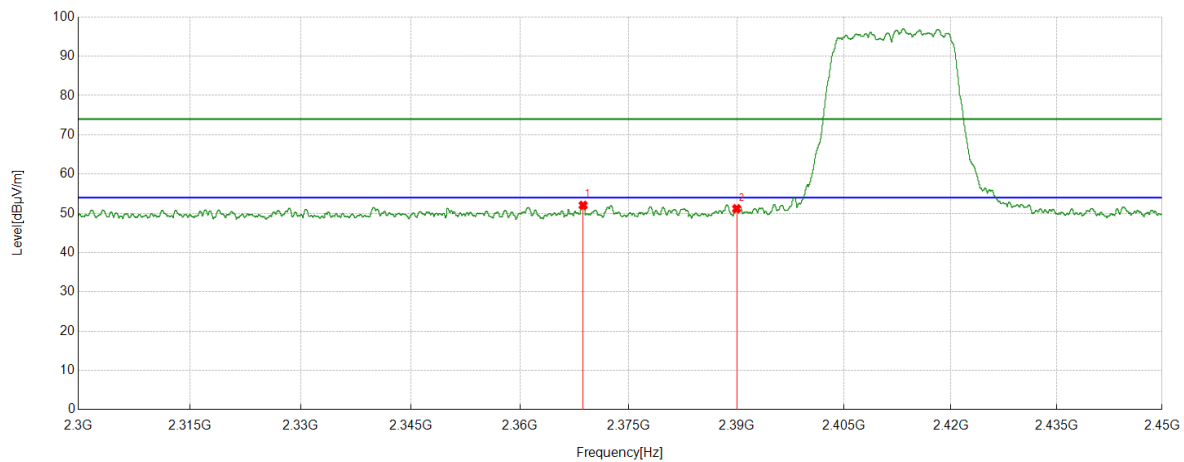


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2368.7086	40.79	11.25	52.04	74.00	-21.96	peak
2	2390	39.92	11.25	51.17	74.00	-22.83	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

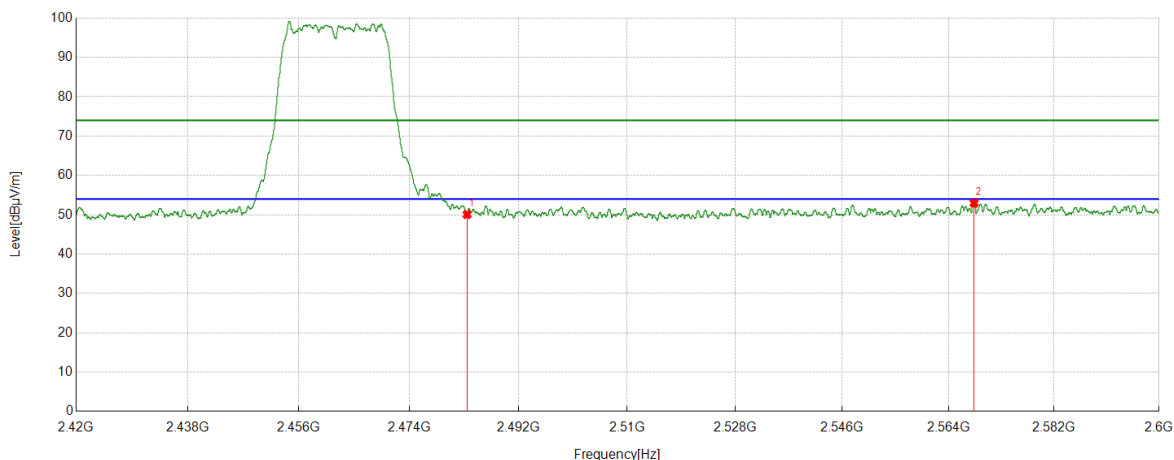


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	38.79	11.28	50.07	74.00	-23.93	peak
2	2568.3385	40.98	11.99	52.97	74.00	-21.03	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

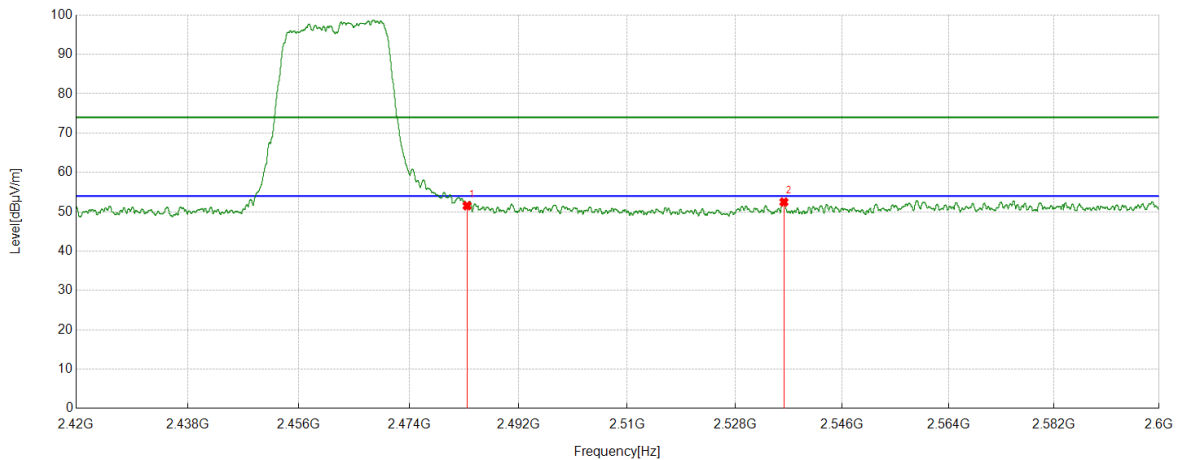

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5	40.24	11.28	51.52	74.00	-22.48	peak
2	2536.182	40.61	11.86	52.47	74.00	-21.53	peak

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.7.3.SPURIOUS EMISSIONS

Test Result Table:

1) For 1GHz~3GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	62.5%
Atmospheric Pressure:	101kPa
Temperature	23.2°C

Test Mode	Channel	Puw(dBm)	Verdict
11B SISO	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G SISO	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 3GHz~18GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	59.6%
Atmospheric Pressure:	100.4kPa
Temperature	23.1°C

Test Mode	Channel	Puw(dBm)	Verdict
11B SISO	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G SISO	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS



3) For 18GHz~26.5GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	62.5%
Atmospheric Pressure:	101kPa
Temperature	23.2°C

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 30MHz~1GHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.5%
Atmospheric Pressure:	101.5Kpa
Temperature	22°C

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

5) For 9KHz~30MHz

Environment Parameter	Selected Values During Tests
Relative Humidity	64.5%
Atmospheric Pressure:	101.5Kpa
Temperature	22°C

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS

Remark:


1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.



Part I: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

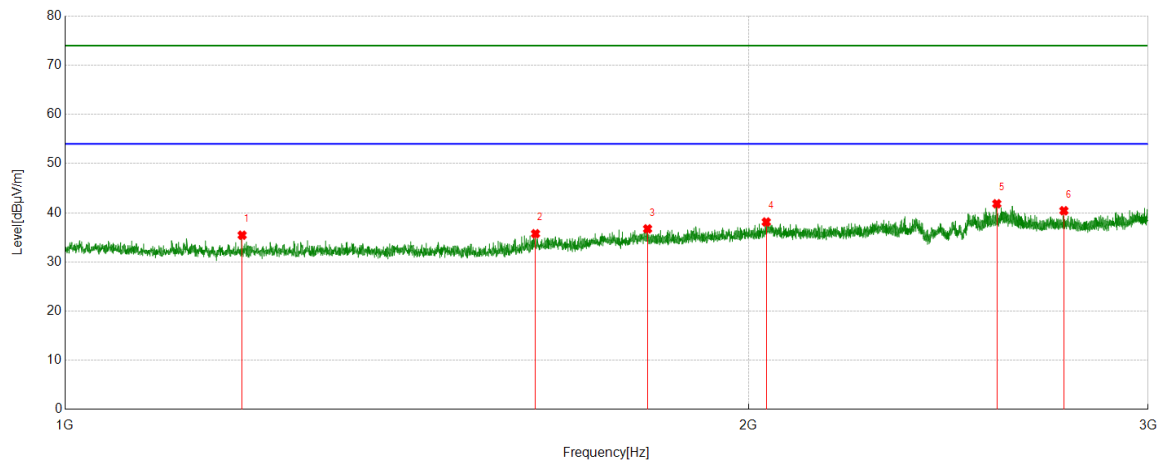


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.7746	42.10	-6.66	35.44	74.00	-38.56	peak
2	1611.5764	41.35	-5.61	35.74	74.00	-38.26	peak
3	1805.6007	41.04	-4.31	36.73	74.00	-37.27	peak
4	2036.6296	40.71	-2.59	38.12	74.00	-35.88	peak
5	2573.1966	44.01	-2.18	41.83	74.00	-32.17	peak
6	2754.4693	41.69	-1.28	40.41	74.00	-33.59	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

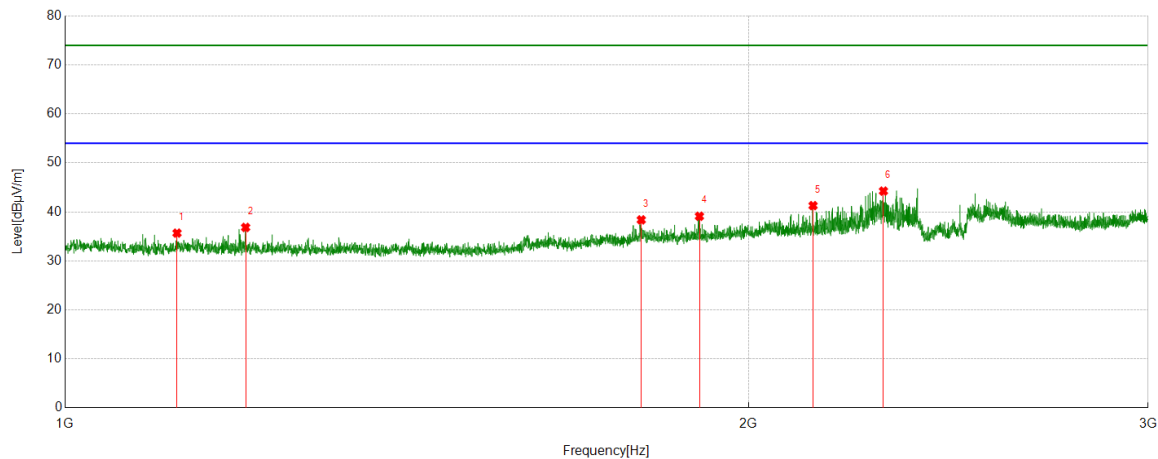


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1120.265	41.72	-6.05	35.67	74.00	-38.33	peak
2	1201.0251	43.48	-6.65	36.83	74.00	-37.17	peak
3	1794.0993	42.67	-4.30	38.37	74.00	-35.63	peak
4	1903.1129	42.83	-3.72	39.11	74.00	-34.89	peak
5	2135.642	44.22	-2.94	41.28	74.00	-32.72	peak
6	2293.6617	47.38	-3.13	44.25	74.00	-29.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

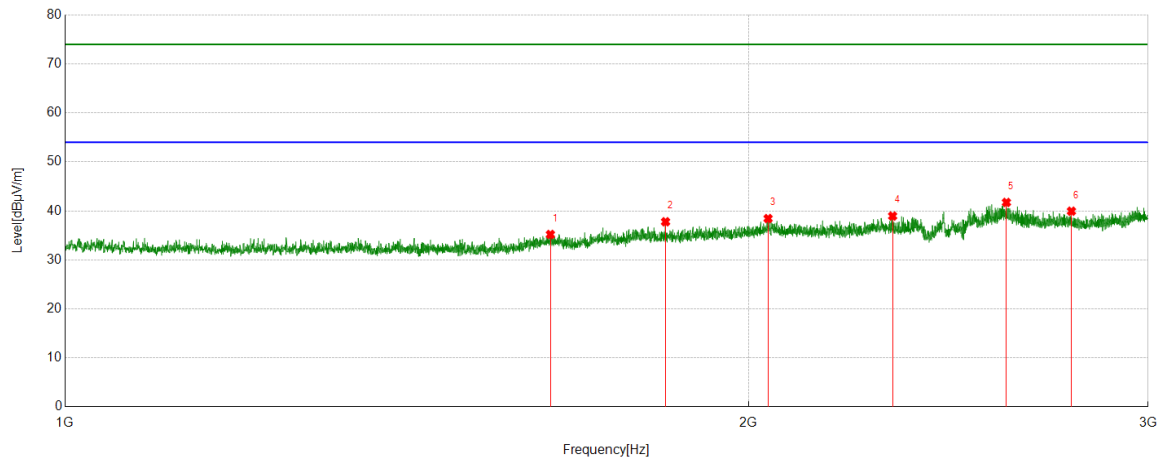


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1636.0795	40.55	-5.36	35.19	74.00	-38.81	peak
2	1838.8549	42.00	-4.22	37.78	74.00	-36.22	peak
3	2040.38	40.92	-2.48	38.44	74.00	-35.56	peak
4	2315.1644	41.94	-2.99	38.95	74.00	-35.05	peak
5	2598.4498	43.52	-1.79	41.73	74.00	-32.27	peak
6	2775.4719	41.27	-1.33	39.94	74.00	-34.06	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

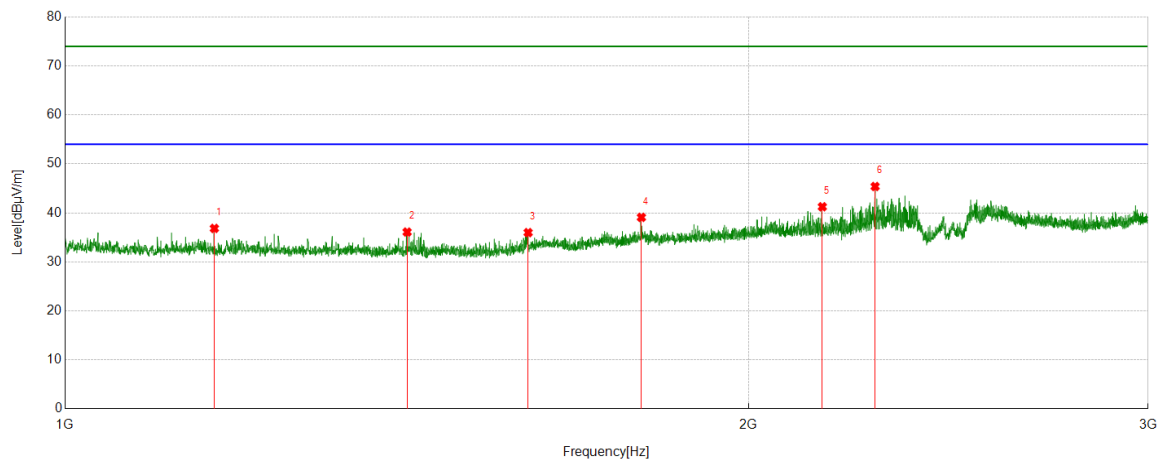

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1163.5204	43.04	-6.21	36.83	74.00	-37.17	peak
2	1414.8018	42.62	-6.53	36.09	74.00	-37.91	peak
3	1599.5749	41.53	-5.55	35.98	74.00	-38.02	peak
4	1794.3493	43.38	-4.29	39.09	74.00	-34.91	peak
5	2155.8945	44.42	-3.17	41.25	74.00	-32.75	peak
6	2274.4093	48.61	-3.22	45.39	74.00	-28.61	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 7.2.

6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

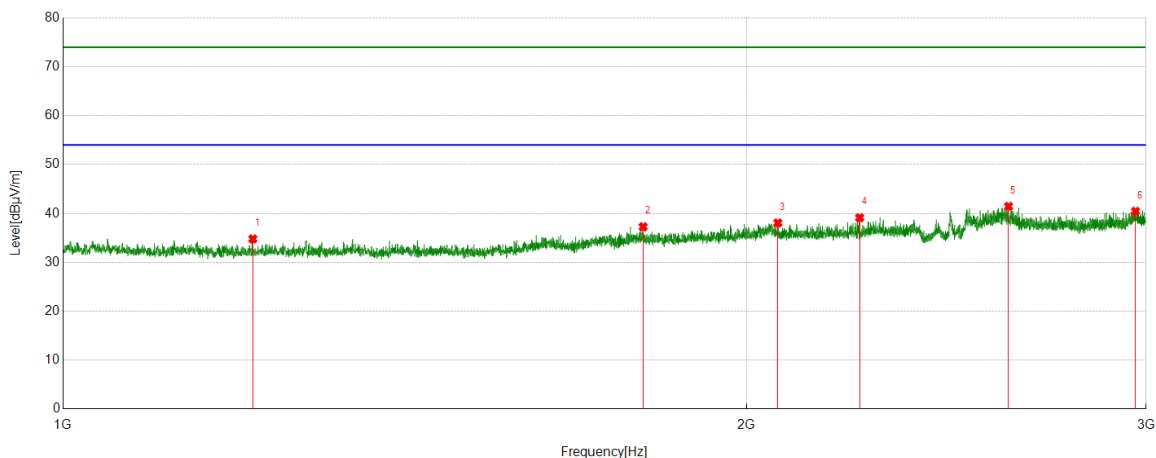


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1212.2765	41.23	-6.43	34.80	74.00	-39.20	peak
2	1801.1001	41.51	-4.23	37.28	74.00	-36.72	peak
3	2064.8831	40.95	-2.89	38.06	74.00	-35.94	peak
4	2243.6555	42.39	-3.26	39.13	74.00	-34.87	peak
5	2609.4512	42.98	-1.53	41.45	74.00	-32.55	peak
6	2967.996	39.96	0.48	40.44	74.00	-33.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

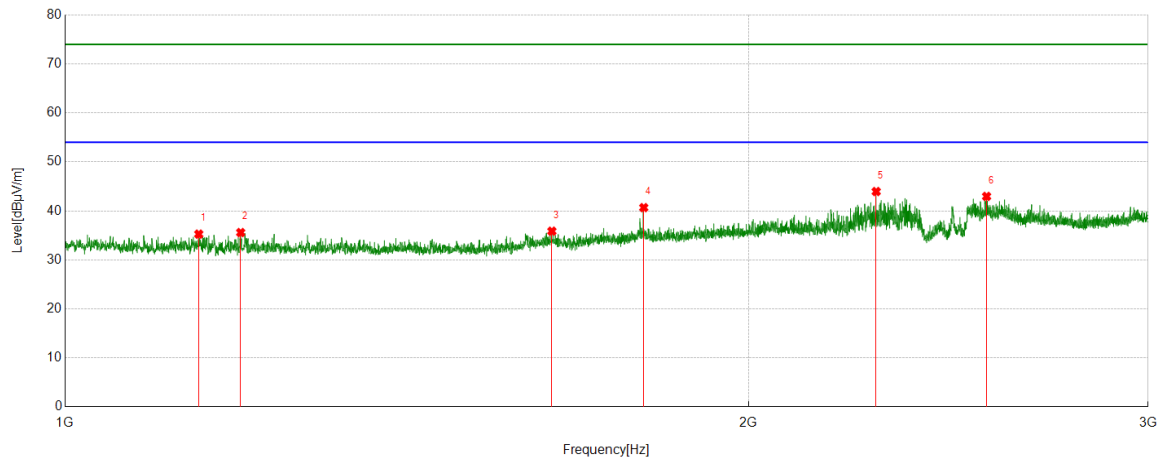

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1145.2682	41.32	-6.06	35.26	74.00	-38.74	peak
2	1195.0244	42.23	-6.65	35.58	74.00	-38.42	peak
3	1638.5798	41.21	-5.35	35.86	74.00	-38.14	peak
4	1798.5998	44.90	-4.23	40.67	74.00	-33.33	peak
5	2276.9096	47.16	-3.21	43.95	74.00	-30.05	peak
6	2546.6933	45.33	-2.37	42.96	74.00	-31.04	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 7.2.

6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

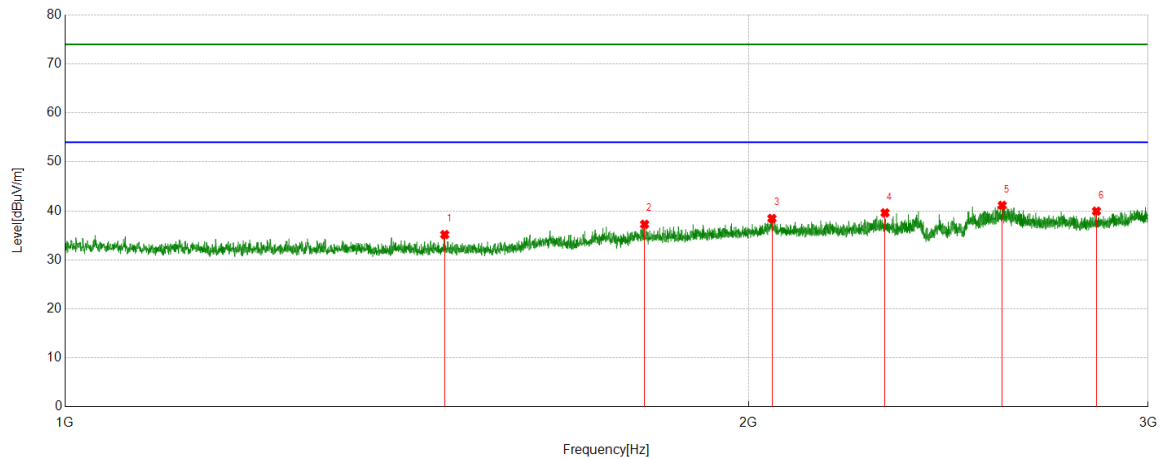


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1469.8087	41.69	-6.53	35.16	74.00	-38.84	peak
2	1800.1	41.48	-4.21	37.27	74.00	-36.73	peak
3	2048.381	40.98	-2.52	38.46	74.00	-35.54	peak
4	2297.4122	42.71	-3.11	39.60	74.00	-34.40	peak
5	2587.4484	43.20	-2.07	41.13	74.00	-32.87	peak
6	2846.9809	41.11	-1.17	39.94	74.00	-34.06	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

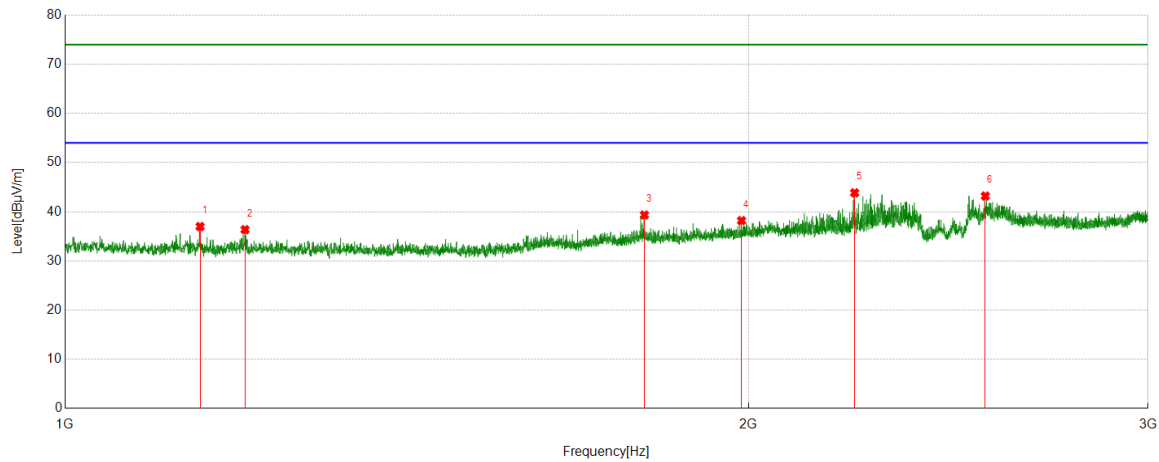


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1146.7683	43.06	-6.06	37.00	74.00	-37.00	peak
2	1200.275	43.03	-6.67	36.36	74.00	-37.64	peak
3	1799.85	43.56	-4.21	39.35	74.00	-34.65	peak
4	1986.1233	41.44	-3.24	38.20	74.00	-35.80	peak
5	2227.6535	47.06	-3.20	43.86	74.00	-30.14	peak
6	2543.4429	45.54	-2.34	43.20	74.00	-30.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

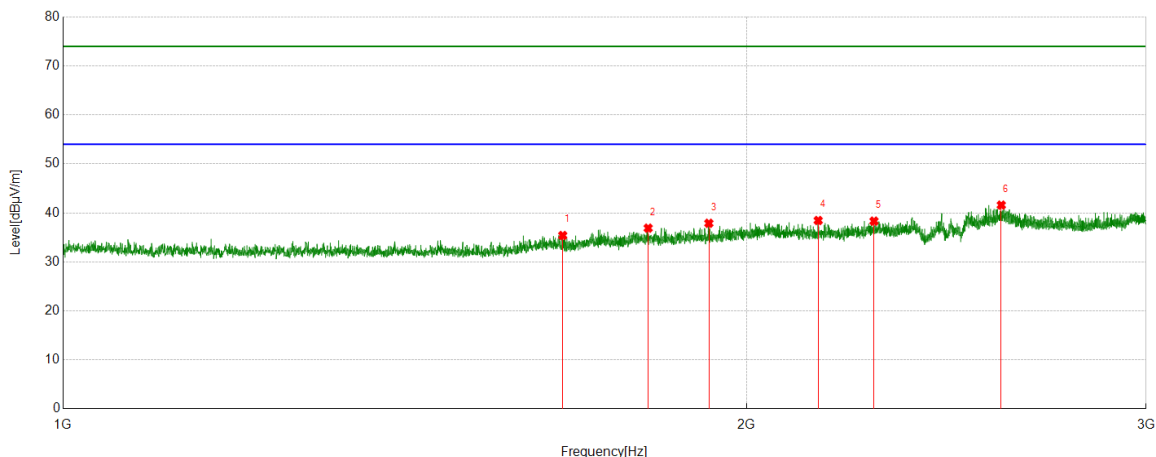


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1660.0825	40.49	-5.10	35.39	74.00	-38.61	peak
2	1810.3513	41.27	-4.38	36.89	74.00	-37.11	peak
3	1925.3657	41.30	-3.42	37.88	74.00	-36.12	peak
4	2151.1439	41.56	-3.11	38.45	74.00	-35.55	peak
5	2276.4096	41.54	-3.22	38.32	74.00	-35.68	peak
6	2590.1988	43.60	-2.01	41.59	74.00	-32.41	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

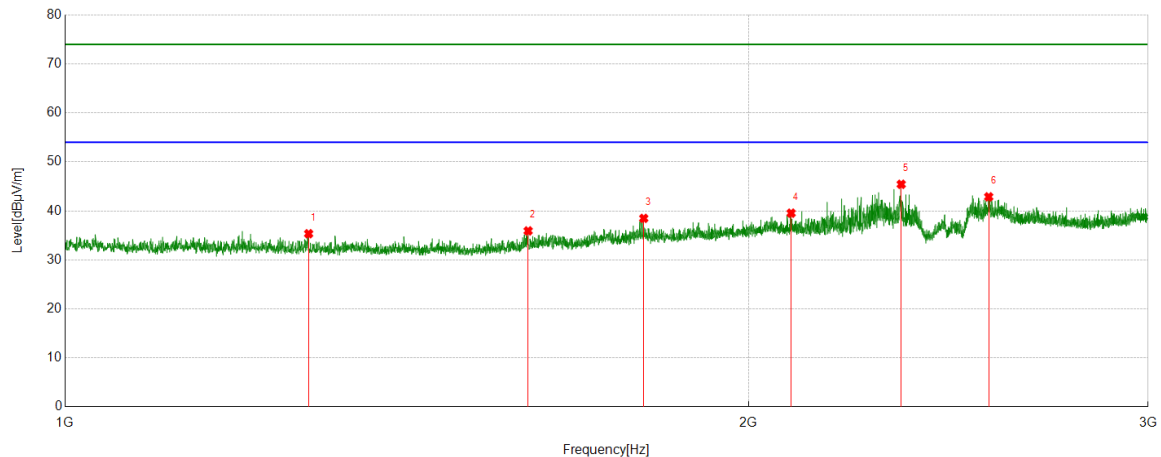


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1280.285	41.70	-6.36	35.34	74.00	-38.66	peak
2	1599.5749	41.47	-5.55	35.92	74.00	-38.08	peak
3	1798.5998	42.71	-4.23	38.48	74.00	-35.52	peak
4	2088.6361	42.53	-2.99	39.54	74.00	-34.46	peak
5	2335.4169	48.56	-3.13	45.43	74.00	-28.57	peak
6	2552.194	45.24	-2.37	42.87	74.00	-31.13	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

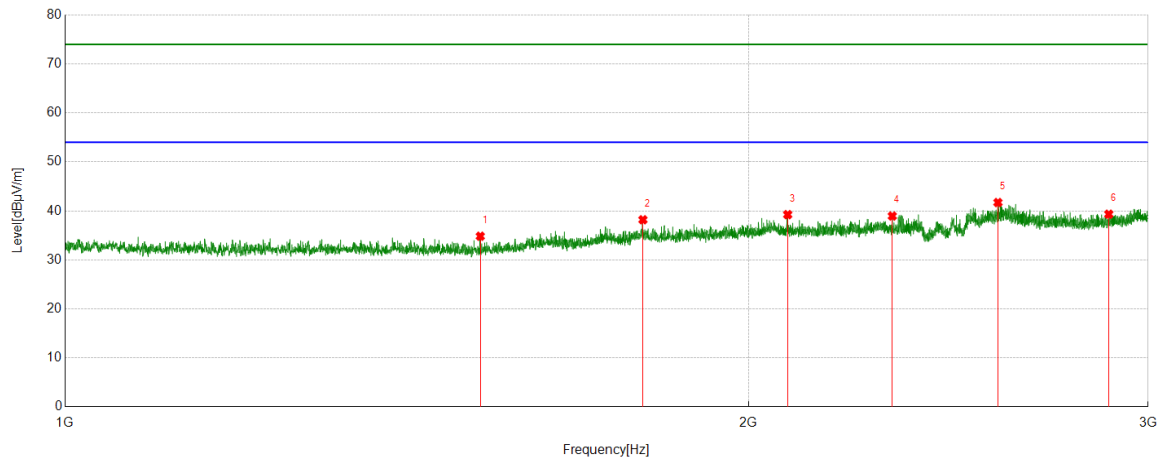


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1523.8155	41.47	-6.64	34.83	74.00	-39.17	peak
2	1797.0996	42.44	-4.25	38.19	74.00	-35.81	peak
3	2081.3852	42.24	-3.00	39.24	74.00	-34.76	peak
4	2314.4143	41.94	-2.99	38.95	74.00	-35.05	peak
5	2576.197	43.92	-2.21	41.71	74.00	-32.29	peak
6	2882.7353	40.29	-0.96	39.33	74.00	-34.67	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

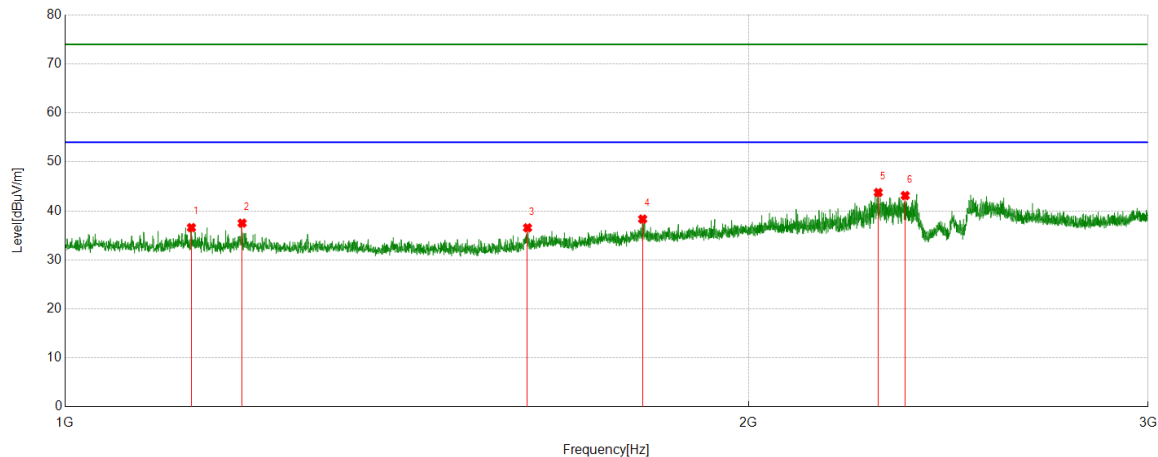

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1136.7671	42.65	-6.06	36.59	74.00	-37.41	peak
2	1196.7746	44.16	-6.66	37.50	74.00	-36.50	peak
3	1598.5748	42.14	-5.59	36.55	74.00	-37.45	peak
4	1796.5996	42.59	-4.26	38.33	74.00	-35.67	peak
5	2281.6602	46.94	-3.19	43.75	74.00	-30.25	peak
6	2344.9181	46.23	-3.10	43.13	74.00	-30.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 7.2.

6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

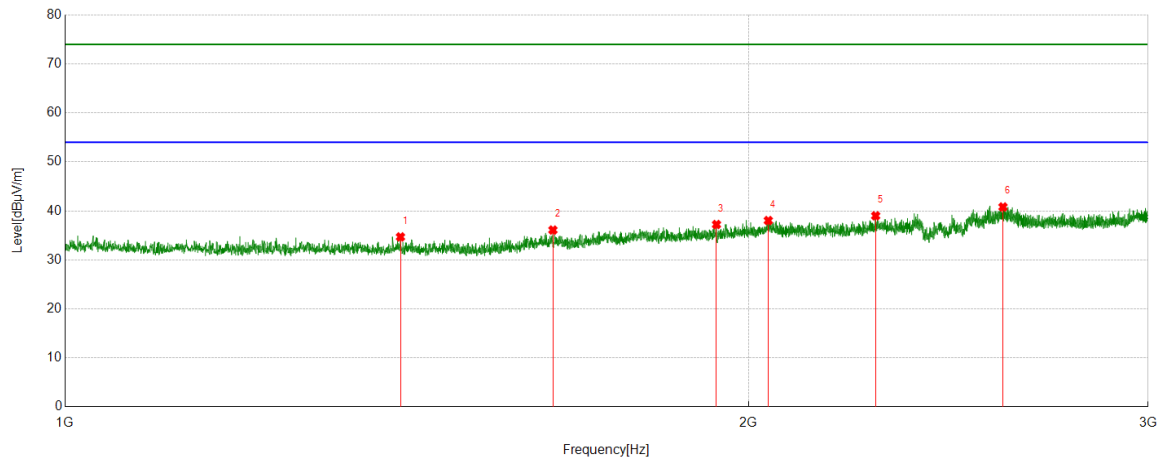


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1405.3007	41.22	-6.53	34.69	74.00	-39.31	peak
2	1640.33	41.43	-5.34	36.09	74.00	-37.91	peak
3	1936.367	40.68	-3.46	37.22	74.00	-36.78	peak
4	2040.8801	40.51	-2.48	38.03	74.00	-35.97	peak
5	2275.6595	42.22	-3.22	39.00	74.00	-35.00	peak
6	2589.4487	42.83	-2.03	40.80	74.00	-33.20	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

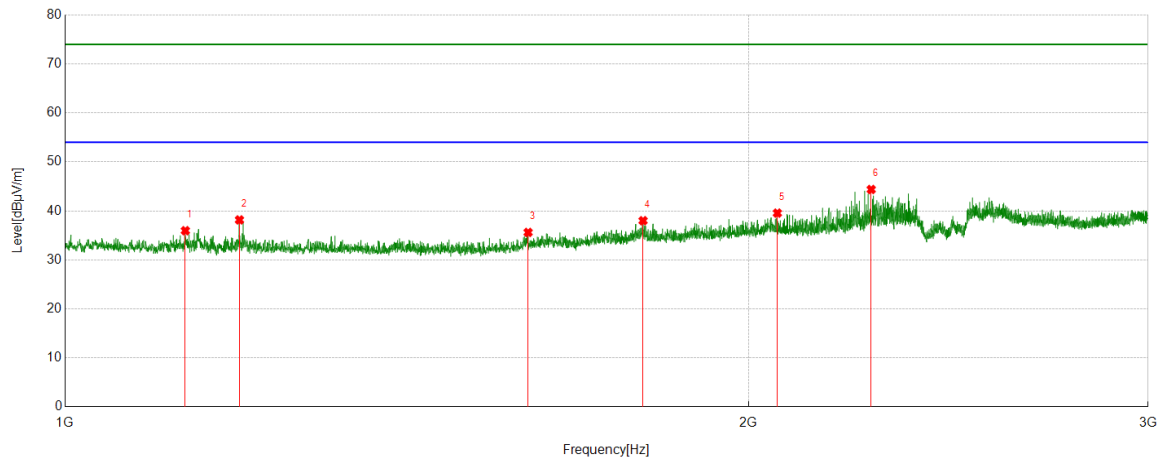


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1129.7662	42.01	-6.05	35.96	74.00	-38.04	peak
2	1193.5242	44.79	-6.63	38.16	74.00	-35.84	peak
3	1599.5749	41.16	-5.55	35.61	74.00	-38.39	peak
4	1797.3497	42.25	-4.25	38.00	74.00	-36.00	peak
5	2059.6325	42.37	-2.82	39.55	74.00	-34.45	peak
6	2265.4082	47.60	-3.23	44.37	74.00	-29.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

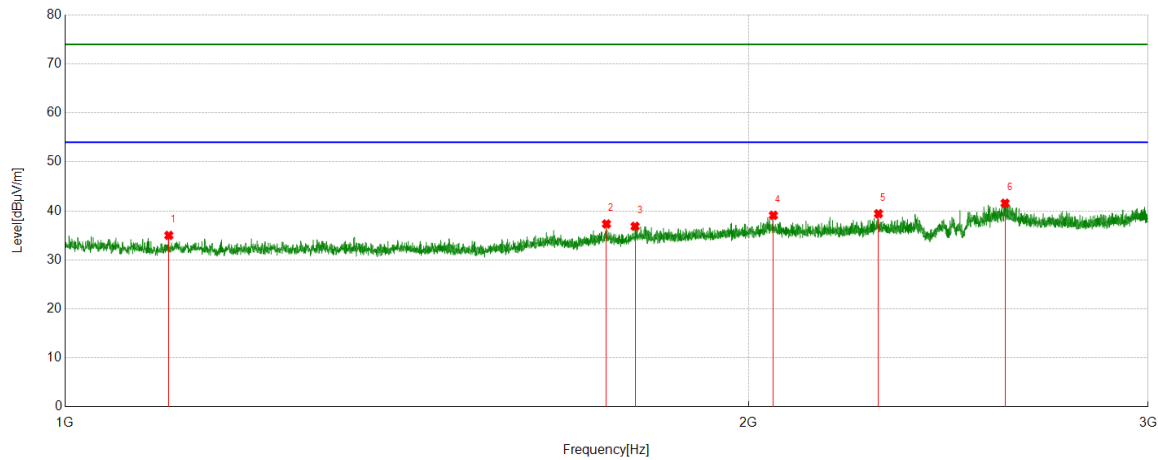

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1111.0139	41.13	-6.13	35.00	74.00	-39.00	peak
2	1731.8415	42.02	-4.69	37.33	74.00	-36.67	peak
3	1782.8479	41.23	-4.38	36.85	74.00	-37.15	peak
4	2051.3814	41.66	-2.57	39.09	74.00	-34.91	peak
5	2282.1603	42.62	-3.19	39.43	74.00	-34.57	peak
6	2594.9494	43.45	-1.88	41.57	74.00	-32.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.


5. AVG: VBW refer to section 7.2.

6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.

7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

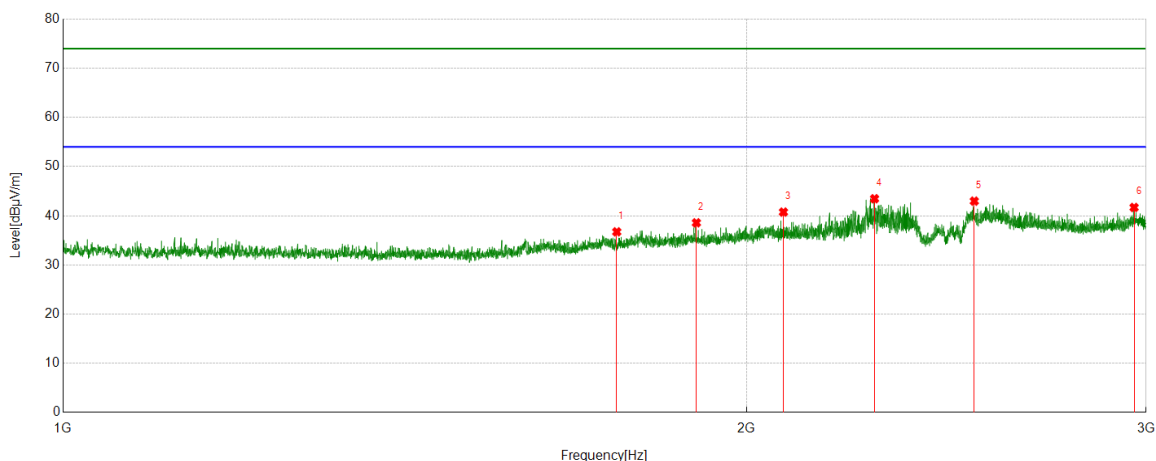


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1753.5942	41.60	-4.87	36.73	74.00	-37.27	peak
2	1901.1126	42.33	-3.76	38.57	74.00	-35.43	peak
3	2076.6346	43.74	-2.99	40.75	74.00	-33.25	peak
4	2277.6597	46.67	-3.21	43.46	74.00	-30.54	peak
5	2520.19	44.74	-1.76	42.98	74.00	-31.02	peak
6	2963.7455	41.32	0.37	41.69	74.00	-32.31	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

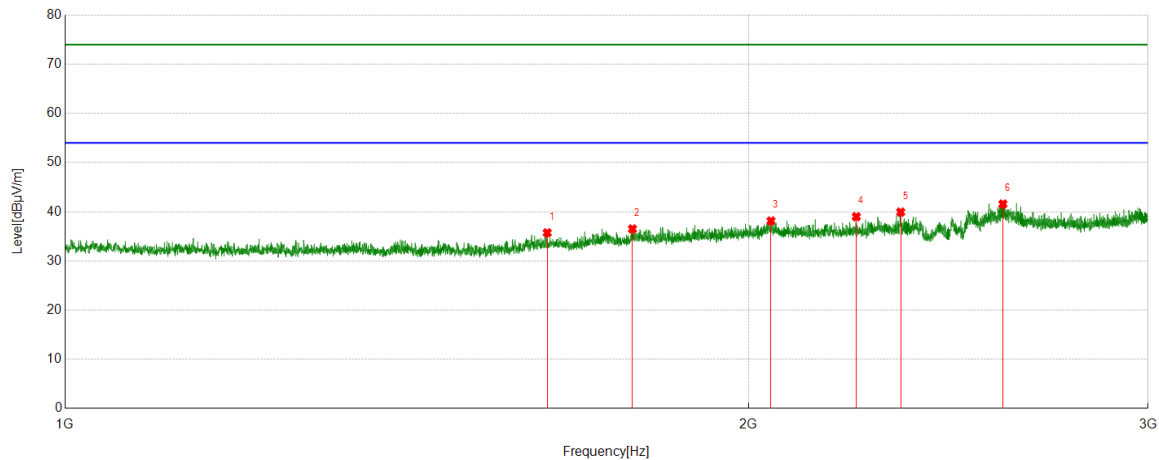


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1630.8289	41.09	-5.37	35.72	74.00	-38.28	peak
2	1778.0973	40.95	-4.44	36.51	74.00	-37.49	peak
3	2046.3808	40.64	-2.51	38.13	74.00	-35.87	peak
4	2231.4039	42.20	-3.20	39.00	74.00	-35.00	peak
5	2334.1668	43.06	-3.13	39.93	74.00	-34.07	peak
6	2589.1986	43.60	-2.03	41.57	74.00	-32.43	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

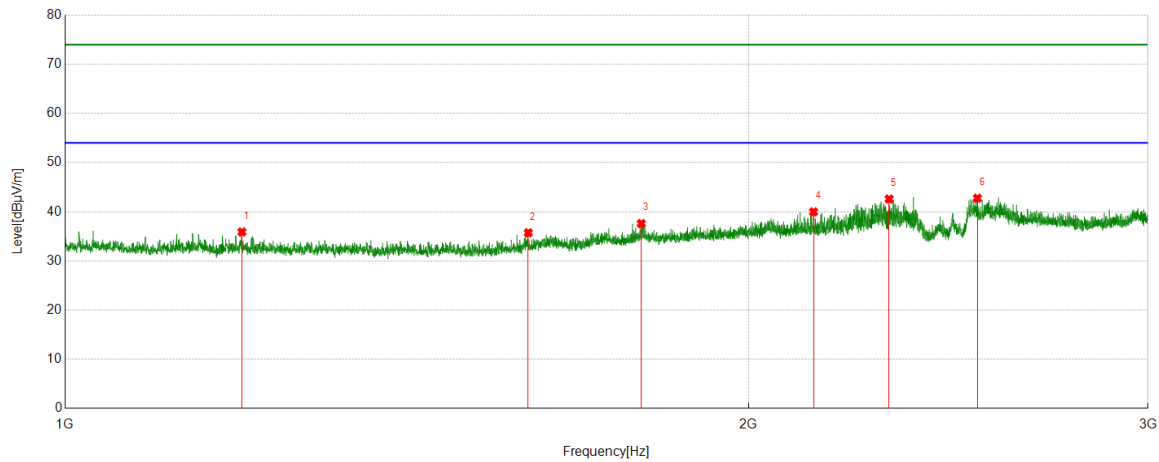

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.5246	42.55	-6.66	35.89	74.00	-38.11	peak
2	1599.825	41.26	-5.54	35.72	74.00	-38.28	peak
3	1794.0993	41.90	-4.30	37.60	74.00	-36.40	peak
4	2136.6421	42.92	-2.95	39.97	74.00	-34.03	peak
5	2306.9134	45.62	-3.03	42.59	74.00	-31.41	peak
6	2523.1904	44.64	-1.89	42.75	74.00	-31.25	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

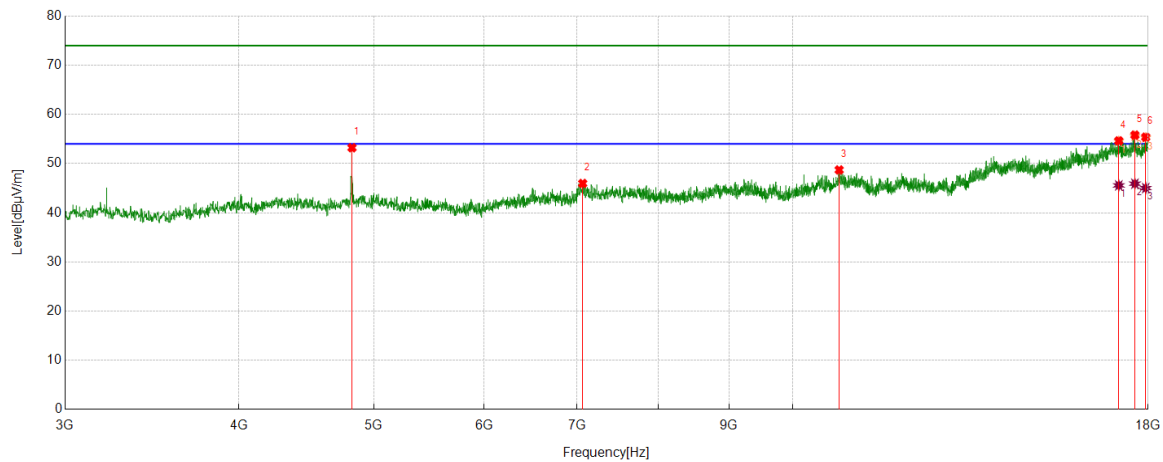


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4822.7278	47.87	5.35	53.22	74.00	-20.78	peak
2	7063.633	36.79	9.17	45.96	74.00	-28.04	peak
3	10797.2247	36.67	12.04	48.71	74.00	-25.29	peak
4	17148.6436	35.36	19.26	54.62	74.00	-19.38	peak
		26.30	19.26	45.56	54.00	-8.44	average
5	17611.8265	36.22	19.58	55.80	74.00	-18.20	peak
		26.33	19.58	45.91	54.00	-8.09	average
6	17930.6163	35.85	19.53	55.38	74.00	-18.62	peak
		25.49	19.53	45.02	54.00	-8.98	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

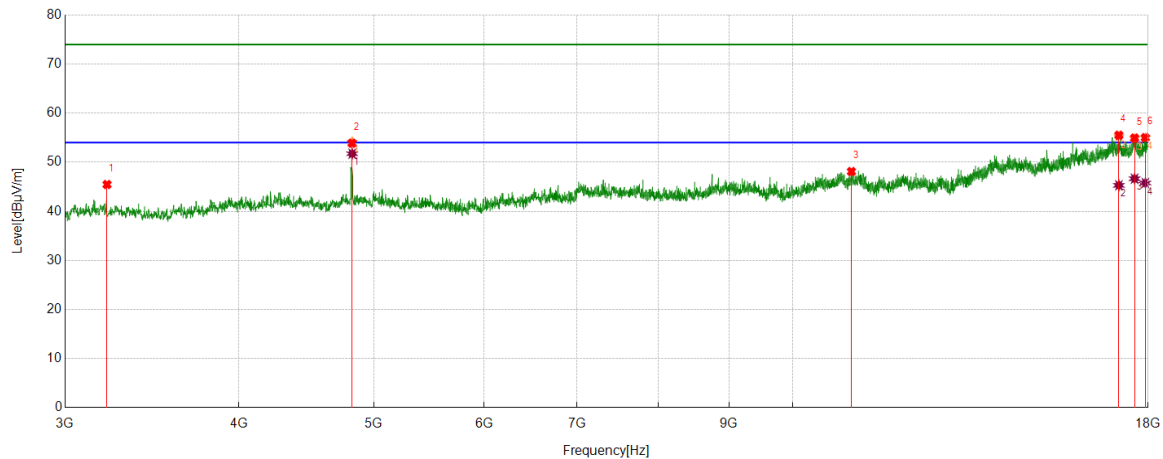


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3215.652	43.18	2.28	45.46	74.00	-28.54	peak
2	4822.7278	48.53	5.35	53.88	74.00	-20.12	peak
		46.39	5.35	51.74	54.00	-2.26	average
3	11018.5023	35.62	12.49	48.11	74.00	-25.89	peak
4	17150.5188	36.19	19.31	55.50	74.00	-18.50	peak
		25.99	19.31	45.30	54.00	-8.70	average
5	17602.4503	35.36	19.57	54.93	74.00	-19.07	peak
		27.08	19.57	46.65	54.00	-7.35	average
6	17919.3649	35.35	19.66	55.01	74.00	-18.99	peak
		26.11	19.66	45.77	54.00	-8.23	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

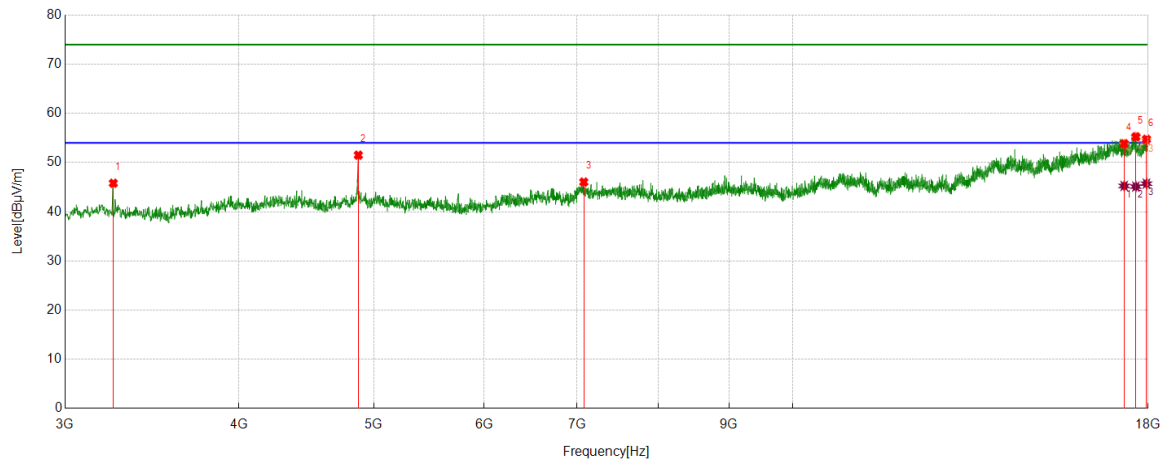


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3249.4062	43.62	2.18	45.80	74.00	-28.20	peak
2	4873.3592	45.97	5.54	51.51	74.00	-22.49	peak
3	7076.7596	36.67	9.37	46.04	74.00	-27.96	peak
4	17302.4128	35.50	18.35	53.85	74.00	-20.15	peak
		26.90	18.35	45.25	54.00	-8.75	average
5	17639.955	35.96	19.29	55.25	74.00	-18.75	peak
		25.83	19.29	45.12	54.00	-8.88	average
6	17951.2439	35.17	19.58	54.75	74.00	-19.25	peak
		26.14	19.58	45.72	54.00	-8.28	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

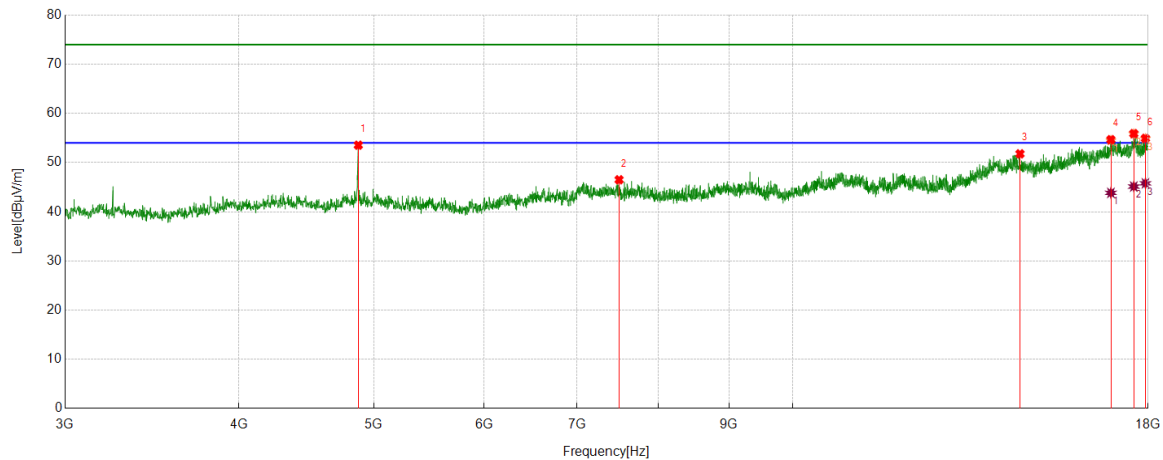


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4873.3592	48.00	5.54	53.54	74.00	-20.46	peak
2	7502.4378	38.30	8.21	46.51	74.00	-27.49	peak
3	14562.6953	35.58	16.20	51.78	74.00	-22.22	peak
4	16925.4907	35.78	18.88	54.66	74.00	-19.34	peak
		24.96	18.88	43.84	54.00	-10.16	average
5	17579.9475	36.20	19.69	55.89	74.00	-18.11	peak
		25.44	19.69	45.13	54.00	-8.87	average
6	17921.2402	35.27	19.66	54.93	74.00	-19.07	peak
		26.12	19.66	45.78	54.00	-8.22	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

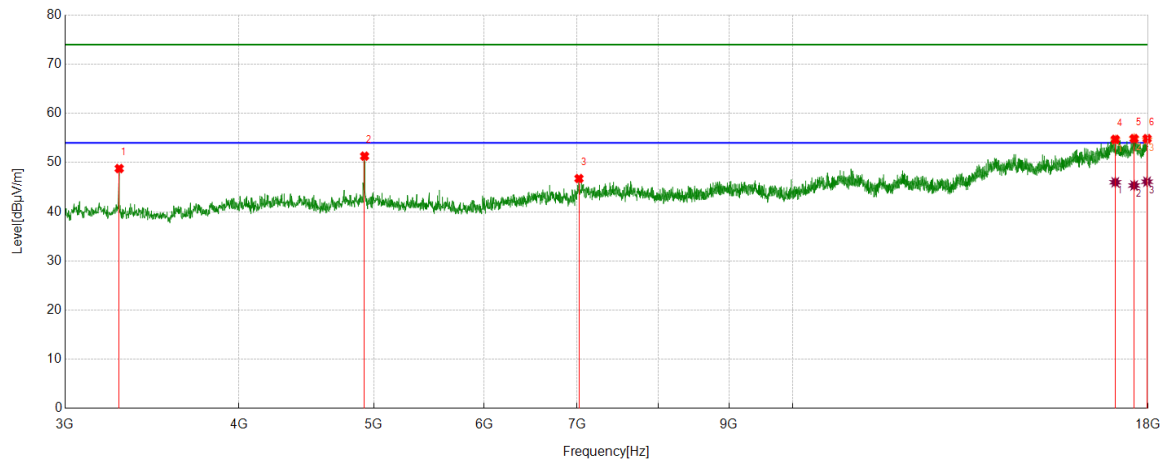


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3281.2852	45.78	3.01	48.79	74.00	-25.21	peak
2	4923.9905	45.75	5.56	51.31	74.00	-22.69	peak
3	7020.5026	37.47	9.28	46.75	74.00	-27.25	peak
4	17049.2562	34.86	19.86	54.72	74.00	-19.28	peak
		26.14	19.86	46.00	54.00	-8.00	average
5	17589.3237	35.13	19.75	54.88	74.00	-19.12	peak
		25.60	19.75	45.35	54.00	-8.65	average
6	17969.9962	35.37	19.50	54.87	74.00	-19.13	peak
		26.61	19.50	46.11	54.00	-7.89	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

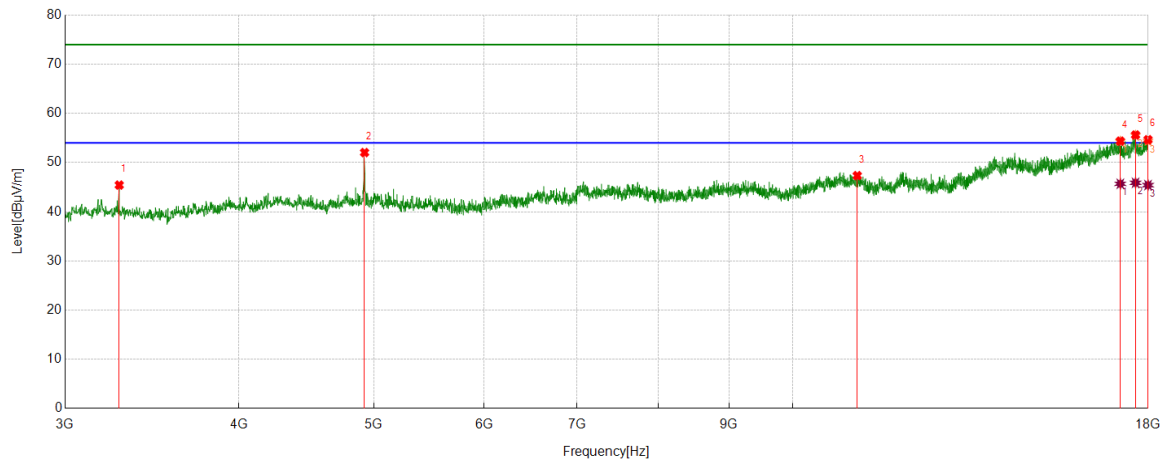


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3281.2852	42.42	3.01	45.43	74.00	-28.57	peak
2	4923.9905	46.48	5.56	52.04	74.00	-21.96	peak
3	11125.3907	35.17	12.18	47.35	74.00	-26.65	peak
4	17191.774	35.16	19.20	54.36	74.00	-19.64	peak
		26.49	19.20	45.69	54.00	-8.31	average
5	17630.5788	36.11	19.50	55.61	74.00	-18.39	peak
		26.39	19.50	45.89	54.00	-8.11	average
6	17998.1248	35.05	19.60	54.65	74.00	-19.35	peak
		25.82	19.60	45.42	54.00	-8.58	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

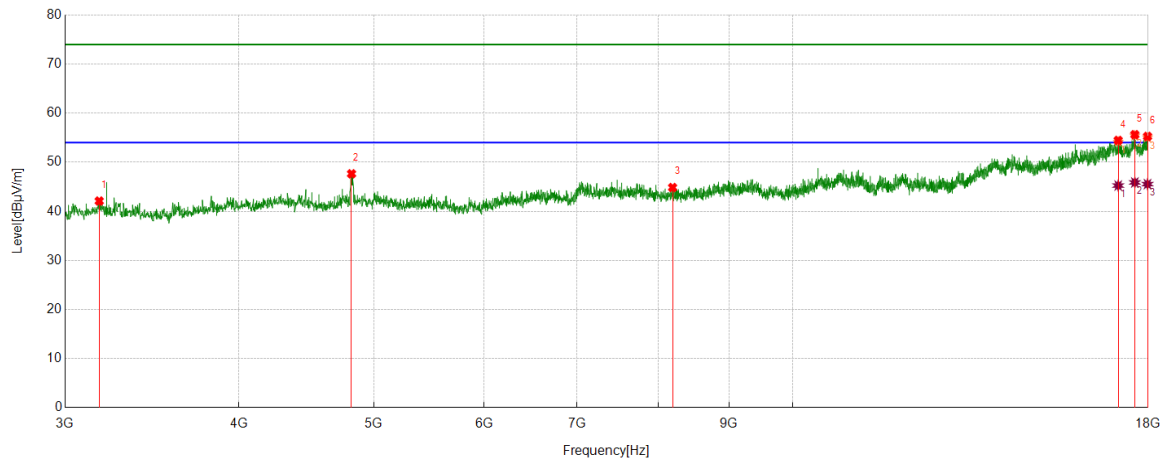


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3174.3968	39.26	2.84	42.10	74.00	-31.90	peak
2	4818.9774	42.34	5.31	47.65	74.00	-26.35	peak
3	8196.2745	36.76	8.09	44.85	74.00	-29.15	peak
4	17131.7665	35.71	18.74	54.45	74.00	-19.55	peak
		26.51	18.74	45.25	54.00	-8.75	average
5	17609.9512	35.97	19.65	55.62	74.00	-18.38	peak
		26.23	19.65	45.88	54.00	-8.12	average
6	17983.1229	35.80	19.46	55.26	74.00	-18.74	peak
		26.08	19.46	45.54	54.00	-8.46	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

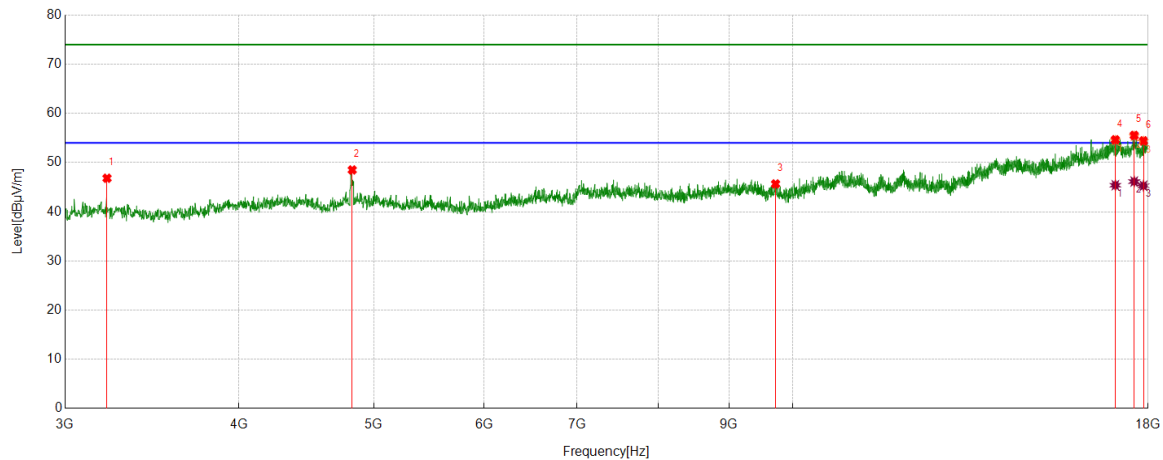


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3215.652	44.54	2.28	46.82	74.00	-27.18	peak
2	4824.6031	43.14	5.36	48.50	74.00	-25.50	peak
3	9718.9649	36.45	9.21	45.66	74.00	-28.34	peak
4	17051.1314	34.73	19.91	54.64	74.00	-19.36	peak
		25.49	19.91	45.40	54.00	-8.60	average
5	17591.1989	35.80	19.73	55.53	74.00	-18.47	peak
		26.41	19.73	46.14	54.00	-7.86	average
6	17863.1079	35.09	19.33	54.42	74.00	-19.58	peak
		25.96	19.33	45.29	54.00	-8.71	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

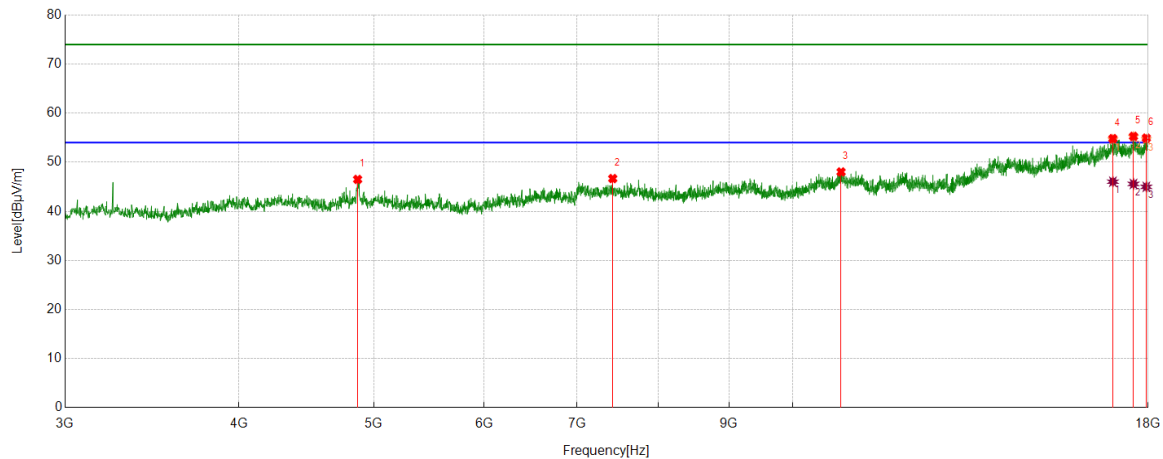


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	4867.7335	41.01	5.49	46.50	74.00	-27.50	peak
2	7423.678	38.16	8.51	46.67	74.00	-27.33	peak
3	10830.9789	35.81	12.22	48.03	74.00	-25.97	peak
4	16981.7477	35.03	19.78	54.81	74.00	-19.19	peak
		26.26	19.78	46.04	54.00	-7.96	average
5	17570.5713	35.23	20.04	55.27	74.00	-18.73	peak
		25.54	20.04	45.58	54.00	-8.42	average
6	17947.4934	35.34	19.58	54.92	74.00	-19.08	peak
		25.41	19.58	44.99	54.00	-9.01	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

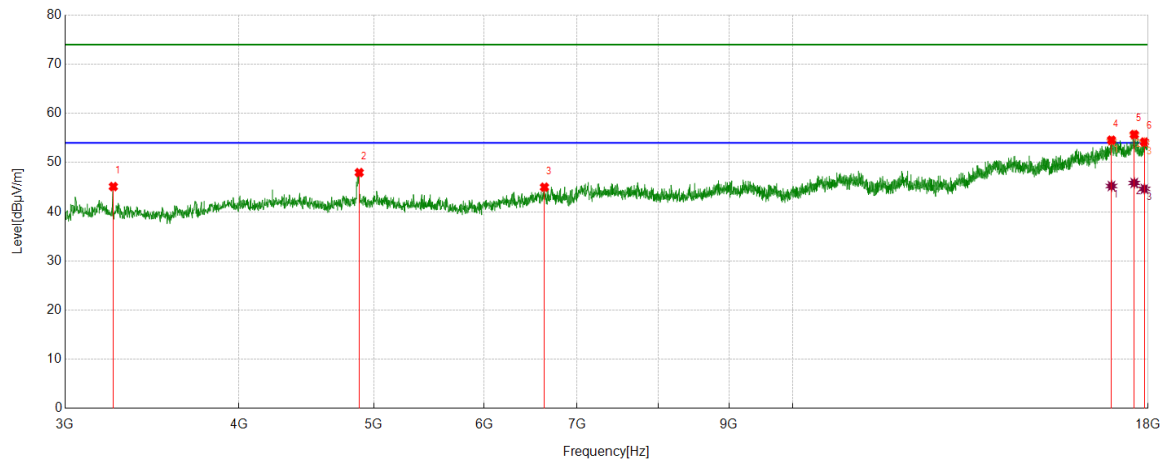


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3249.4062	42.94	2.18	45.12	74.00	-28.88	peak
2	4880.8601	42.44	5.53	47.97	74.00	-26.03	peak
3	6630.4538	36.12	8.88	45.00	74.00	-29.00	peak
4	16942.3678	35.15	19.41	54.56	74.00	-19.44	peak
		25.83	19.41	45.24	54.00	-8.76	average
5	17593.0741	36.01	19.69	55.70	74.00	-18.30	peak
		26.17	19.69	45.86	54.00	-8.14	average
6	17893.1116	34.73	19.45	54.18	74.00	-19.82	peak
		25.20	19.45	44.65	54.00	-9.35	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

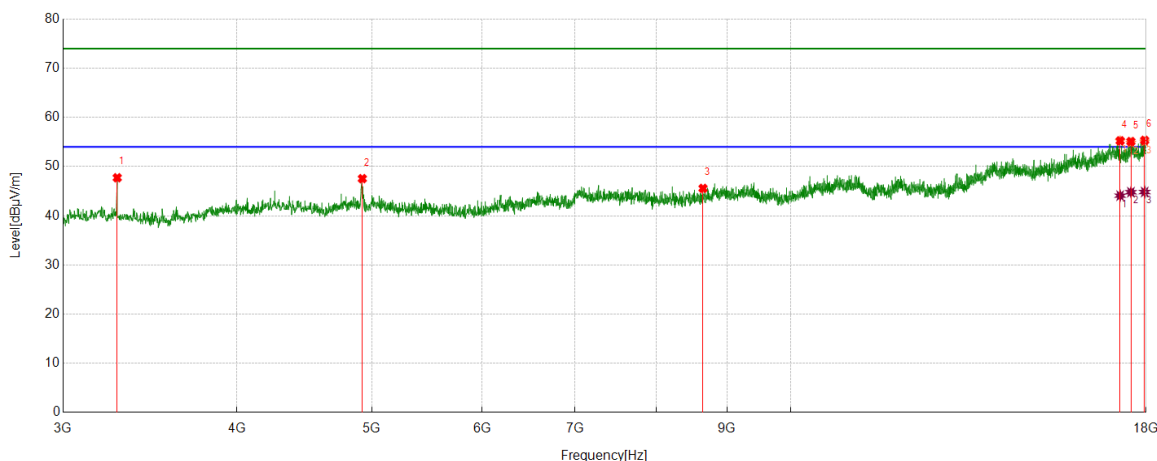

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	3281.2852	44.72	3.01	47.73	74.00	-26.27	peak
2	4922.1153	41.98	5.57	47.55	74.00	-26.45	peak
3	8648.206	37.16	8.41	45.57	74.00	-28.43	peak
4	17244.2805	36.87	18.37	55.24	74.00	-18.76	peak
		25.72	18.37	44.09	54.00	-9.91	average
5	17553.6942	35.84	19.25	55.09	74.00	-18.91	peak
		25.54	19.25	44.79	54.00	-9.21	average
6	17956.8696	35.67	19.66	55.33	74.00	-18.67	peak
		25.17	19.66	44.83	54.00	-9.17	average

- Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW refer to section 7.2.
6. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.