

# RF Exposure REPORT

**FCC ID: 2AV8F-KF-9201**

**Product: 4 USB wireless charger**

**Model No.: KF-9201**

**Additional Model No.: MA-KFL027**

**Trade Mark: N/A**

**Report No.: TCT200702E027**

**Issued Date: Jul. 09, 2020**

**Issued for:**

**Shenzhen Kafulle Electronics Co., Ltd.**

**No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District,  
Shenzhen, China**

**Issued By:**

**Shenzhen Tongce Testing Lab.**

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,  
Shenzhen, Guangdong, China**

**TEL: +86-755-27673339**

**FAX: +86-755-27673332**

**Note:** This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1. Test Certification .....</b>	<b>3</b>
<b>2. EUT Description.....</b>	<b>4</b>
<b>3. Facilities and Accreditations .....</b>	<b>5</b>
3.1. Facilities .....	5
3.2. Location .....	5
<b>4. Technical Requirements Specification .....</b>	<b>6</b>
4.1. Measuring Standard .....	6
4.2. Requirements.....	6
4.3. Test Setup .....	7
4.4. Test Procedure .....	7
4.5. Test Equipment List .....	7
4.6. Test Result .....	8
4.7. Test Set-up Photo.....	10

## 1. Test Certification

<b>Product:</b>	4 USB wireless charger
<b>Model No.:</b>	KF-9201
<b>Additional Model No.:</b>	MA-KFL027
<b>Trade Mark:</b>	N/A
<b>Applicant:</b>	Shenzhen Kafulle Electronics Co., Ltd.
<b>Address:</b>	No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District, Shenzhen, China
<b>Manufacturer:</b>	Shenzhen Kafulle Electronics Co., Ltd.
<b>Address:</b>	No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District, Shenzhen, China
<b>Date of Test:</b>	Jul. 03, 2020 – Jul. 08, 2020
<b>Applicable Standards:</b>	KDB 680106 D01 RF Exposure Wireless Charging App v03

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Tested By:** Brave. Zeng. **Date:** Jul. 08, 2020  
**Reviewed By:** Beryl Zhao **Date:** Jul. 09, 2020  
**Approved By:** Tomsin **Date:** Jul. 09, 2020

## 2. EUT Description

<b>Product:</b>	4 USB wireless charger
<b>Model No.:</b>	KF-9201
<b>Additional Model No.:</b>	MA-KFL027
<b>Trade Mark:</b>	N/A
<b>Operation Frequency:</b>	112.62KHz -171.88KHz
<b>Modulation Technology:</b>	Load modulation
<b>Antenna Type:</b>	Annular loaded Antenna
<b>Power Supply:</b>	DC 5V

### 3. Facilities and Accreditations

#### 3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

#### 3.2. Location

Shenzhen Tongce Testing Lab.

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

## 4. Technical Requirements Specification

### 4.1. Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging Apps v03

### 4.2. Requirements

According to the item 5.b of KDB 680106 D01v03:

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance. However, the responsible party is required to keep a copy of the test report in accordance with KDB 865664 D02. A copy of the test report is to be submitted with the application if the device is approved using certification.

- (1) Power transfer frequency is less than 1 MHz.
- (2) Output power from each primary coil is less than or equal to 15 watts.
- (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

#### Limits For Maximum Permissible Exposure (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz

\*=Plane-wave equivalent power density

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

### 4.3. Test Setup

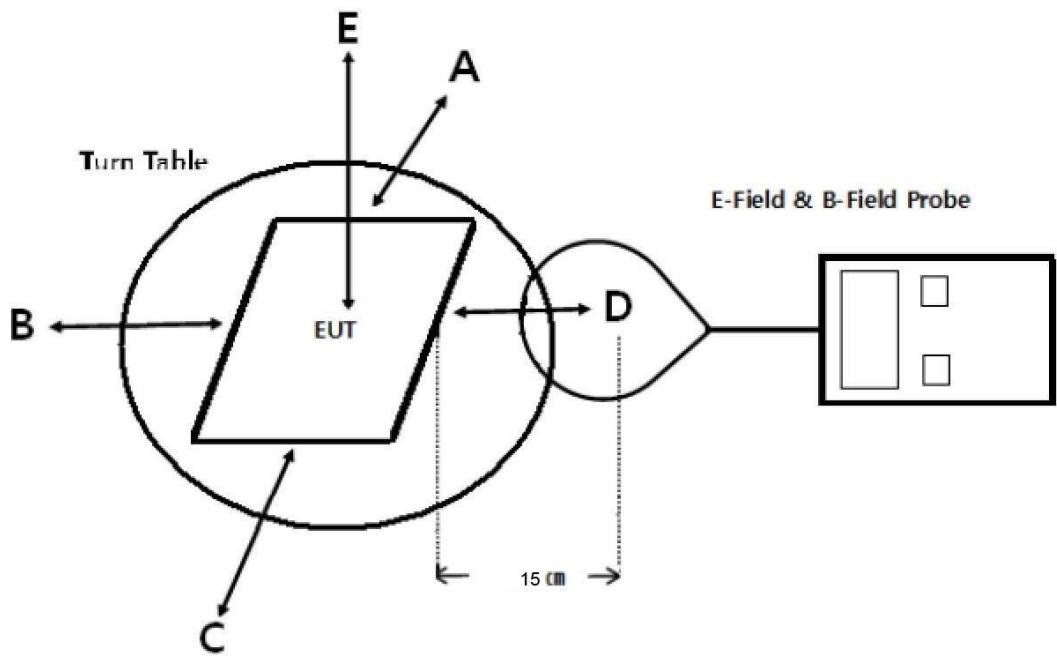

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15cm measured from the center of the probe(s) to the edge of the device.

### 4.4. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at 15 cm surrounding the device and 20 cm above the top surface of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03. Remark;

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

### 4.5. Test Equipment List

Equipment	Manufacturer	Model No.	Calibration Due
Magnetic field meter	NARDA	ELT-400	Jul. 25, 2020

## 4.6. Test Result

**E-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (V/m)**

Frequency Range (KHz)	Operation condition	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (V/m)	Limits Test (V/m)
112.62~171.88	Full load	1.46	1.62	1.56	1.70	1.50	307	614
112.62~171.88	Half load	1.28	1.38	1.21	1.51	1.22	307	614
112.62~171.88	No load	0.70	0.85	0.82	0.74	0.89	307	614

**H-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (A/m)**

Frequency Range (KHz)	Operation condition	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (A/m)	Limits Test ((A/m)
112.62~171.88	Full load	0.200	0.182	0.190	0.192	0.180	0.815	1.63
112.62~171.88	Half load	0.176	0.169	0.156	0.165	0.161	0.815	1.63
112.62~171.88	No load	0.118	0.109	0.106	0.117	0.108	0.815	1.63

According to KDB 680106 D01 v03 section 5, b, satisfy the following conditions.

Requirement of KDB 680106 D01	Yes/No	Description
Power transfer frequency is less than 1MHz	Yes	The device operate in the frequency range 112.62KHz - 171.88KHz
Output power from each primary coil is less than or equal to 15 watts	Yes	The maximum output power of the primary coil is 10W.
The transfer system includes only single primary and secondary coils. This includes charging system that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes single coil that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

#### 4.7. Test Set-up Photo



\*\*\*\*\***END OF REPORT**\*\*\*\*\*