

TEST REPORT

FCC ID: 2AV8F-KF-9201

Product: 4 USB wireless charger

Model No.: KF-9201

Additional Model No.: MA-KFL027

Trade Mark: N/A

Report No.: TCT200702E017

Issued Date: Jul. 09, 2020

Issued for:

**Shenzhen Kafulle Electronics Co., Ltd.
No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District,
Shenzhen, China**

Issued By:

**Shenzhen Tongce Testing Lab.
1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China
TEL: +86-755-27673339
FAX: +86-755-27673332**

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. General Information.....	6
4.1. Test environment and mode.....	6
4.2. Description of Support Units.....	6
5. Facilities and Accreditations	7
5.1. Facilities	7
5.2. Location	7
5.3. Measurement Uncertainty.....	7
6. Test Results and Measurement Data	8
6.1. Antenna requirement	8
6.2. Conducted Emission.....	9
6.3. Radiated Spurious Emission Measurement	13

Appendix A: Photographs of Test Setup**Appendix B: Photographs of EUT**

1. Test Certification

Product:	4 USB wireless charger
Model No.:	KF-9201
Additional Model No.:	MA-KFL027
Trade Mark:	N/A
Applicant:	Shenzhen Kafulle Electronics Co., Ltd.
Address:	No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District, Shenzhen, China
Manufacturer:	Shenzhen Kafulle Electronics Co., Ltd.
Address:	No.12 Zhengkeng Road, Liuhe, Community, Pingshan New District, Shenzhen, China
Date of Test:	Jul. 03, 2020 – Jul. 08, 2020
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Brave Zeng

Date: Jul. 08, 2020

Reviewed By: Beryl Zhao

Date: Jul. 09, 2020

Approved By: Tomsin

Date: Jul. 09, 2020

2. Test Result Summary


Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

Note:

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

3. EUT Description

Product:	4 USB wireless charger
Model No.:	KF-9201
Additional Model No.:	MA-KFL027
Trade Mark:	N/A
Operation Frequency:	112.62KHz -171.88KHz
Modulation Technology:	Load modulation
Antenna Type:	Annular loaded Antenna
Power Supply:	DC 5V

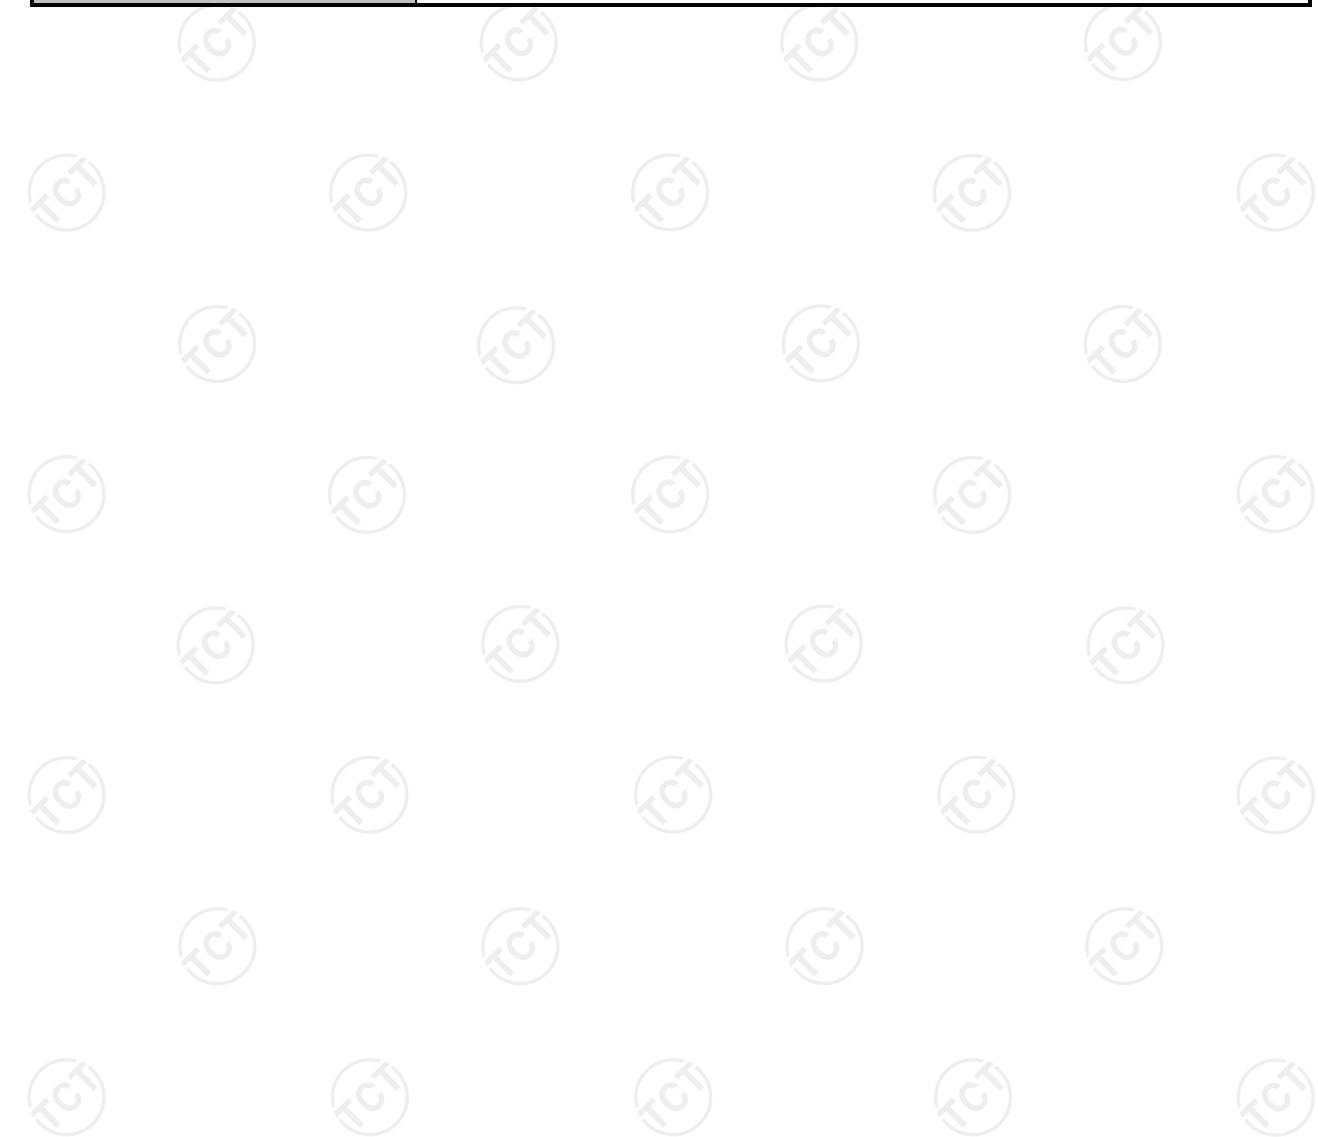

4. General Information

4.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting	

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	JD-050200	2012010907576735	/	SAMSUNG

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab.

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab.

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339


5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Antenna requirement

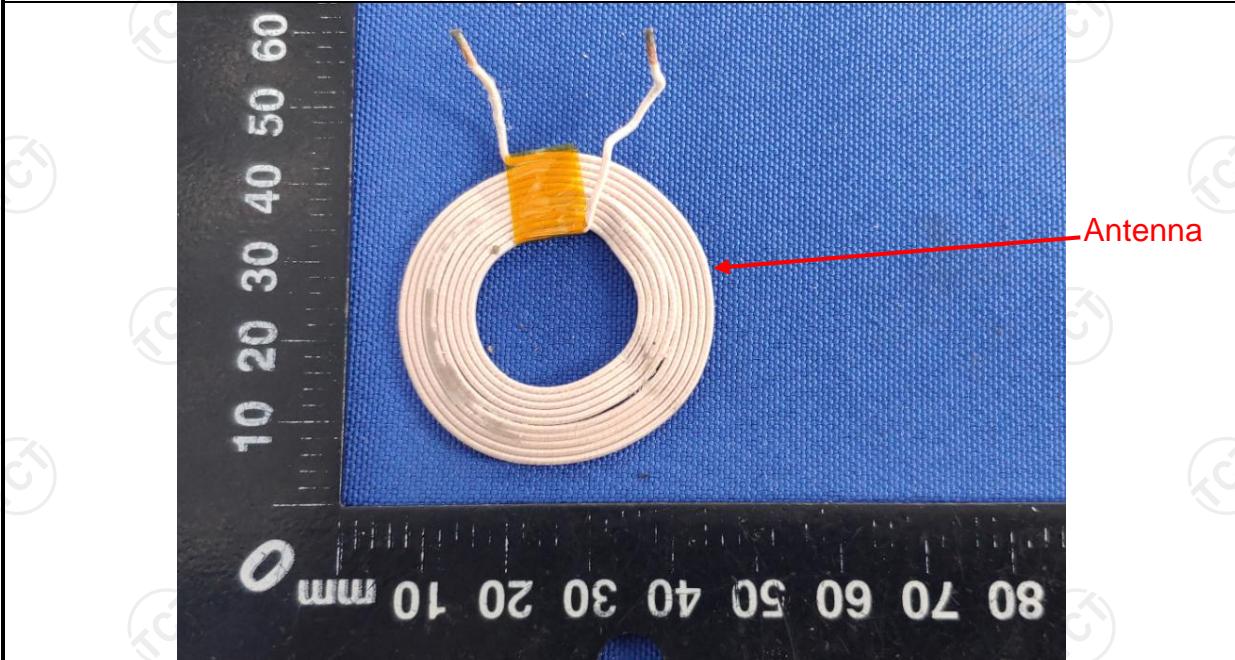Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is annular loaded antenna which permanently attached.	
	

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p>Reference Plane</p> <p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging + Transmitting Mode														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 														
Test Result:	PASS														

6.2.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101402	Jul. 29, 2020
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2020
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 08, 2020
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

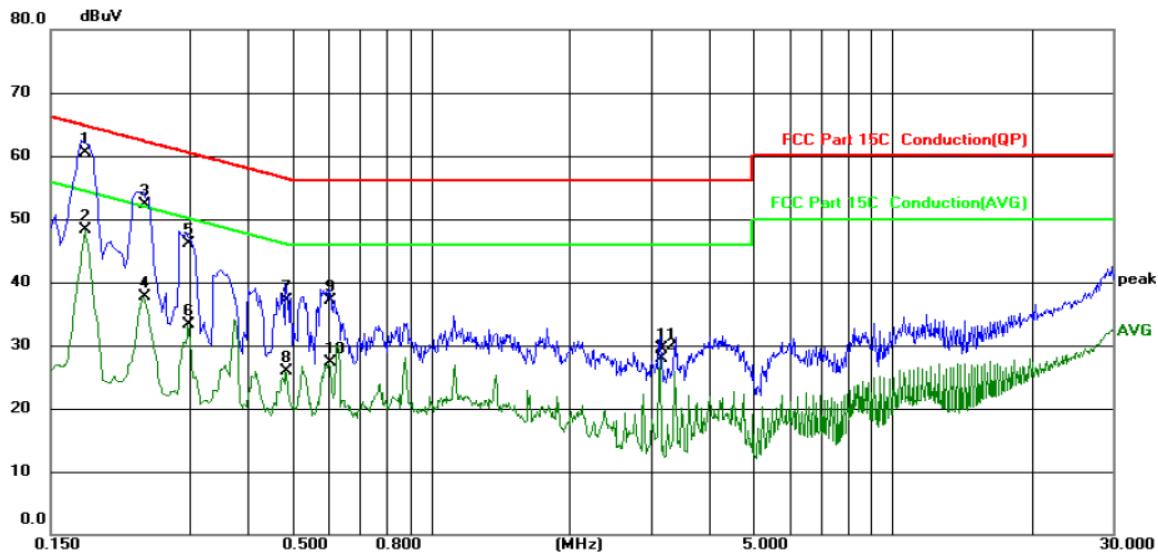

Site: **L1** Temperature: 25 (C)
Limit: FCC Part 15C Conduction(QP) Power: AC 120V/60Hz Humidity: 55 %RH

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
		dBuV	dB	dBuV	dB	Detector	
1 *	0.1780	50.45	10.12	60.57	64.58	-4.01	QP
2	0.1780	38.16	10.12	48.28	54.58	-6.30	AVG
3	0.2380	42.21	10.13	52.34	62.17	-9.83	QP
4	0.2380	27.60	10.13	37.73	52.17	-14.44	AVG
5	0.2980	35.94	10.13	46.07	60.30	-14.23	QP
6	0.2980	23.13	10.13	33.26	50.30	-17.04	AVG
7	0.4860	26.96	10.13	37.09	56.24	-19.15	QP
8	0.4860	15.69	10.13	25.82	46.24	-20.42	AVG
9	0.6020	26.89	10.13	37.02	56.00	-18.98	QP
10	0.6020	17.16	10.13	27.29	46.00	-18.71	AVG
11	3.1500	19.41	10.13	29.54	56.00	-26.46	QP
12	3.1500	17.82	10.13	27.95	46.00	-18.05	AVG

Note:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. = Quasi-Peak

AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

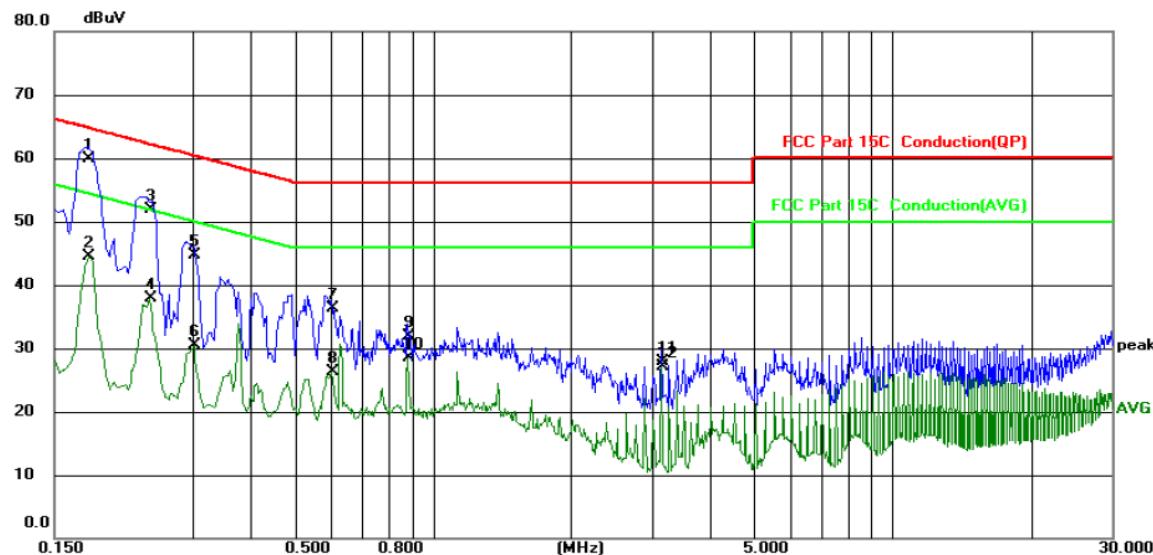

Site: **N** Temperature: 25 (C)
 Limit: FCC Part 15C Conduction(QP) Power: AC 120V/60Hz Humidity: 55 %RH

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1780	49.71	10.12	59.83	64.58	-4.75	QP	
2		0.1780	34.46	10.12	44.58	54.58	-10.00	AVG	
3		0.2420	41.83	10.13	51.96	62.03	-10.07	QP	
4		0.2420	27.70	10.13	37.83	52.03	-14.20	AVG	
5		0.3020	34.51	10.13	44.64	60.19	-15.55	QP	
6		0.3020	20.35	10.13	30.48	50.19	-19.71	AVG	
7		0.6020	26.17	10.13	36.30	56.00	-19.70	QP	
8		0.6020	16.10	10.13	26.23	46.00	-19.77	AVG	
9		0.8820	21.83	10.12	31.95	56.00	-24.05	QP	
10		0.8820	18.38	10.12	28.50	46.00	-17.50	AVG	
11		3.1500	17.70	10.13	27.83	56.00	-28.17	QP	
12		3.1500	16.90	10.13	27.03	46.00	-18.97	AVG	

Note1:

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) - Limits (dB μ V)


Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


6.3. Radiated Spurious Emission Measurement

6.3.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.209																																															
Test Method:	ANSI C63.10: 2013																																															
Frequency Range:	9 kHz to 25 GHz																																															
Measurement Distance:	3 m																																															
Antenna Polarization:	Horizontal & Vertical																																															
Operation mode:	Refer to item 4.1																																															
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value														
Frequency	Detector	RBW	VBW	Remark																																												
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																												
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																												
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																												
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																												
	Peak	1MHz	10Hz	Average Value																																												
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th></th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> <td></td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> <td></td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> <td></td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> <td></td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> <td></td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> <td></td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		0.009-0.490	2400/F(KHz)	300		0.490-1.705	24000/F(KHz)	30		1.705-30	30	30		30-88	100	3		88-216	150	3		216-960	200	3		Above 960	500	3		Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																														
0.009-0.490	2400/F(KHz)	300																																														
0.490-1.705	24000/F(KHz)	30																																														
1.705-30	30	30																																														
30-88	100	3																																														
88-216	150	3																																														
216-960	200	3																																														
Above 960	500	3																																														
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																													
Above 1GHz	500	3	Average																																													
	5000	3	Peak																																													
Test setup:	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>0.8m</p> <p>Turn table</p> <p>1m</p> <p>Ground Plane</p> <p>30MHz to 1GHz</p>																																															

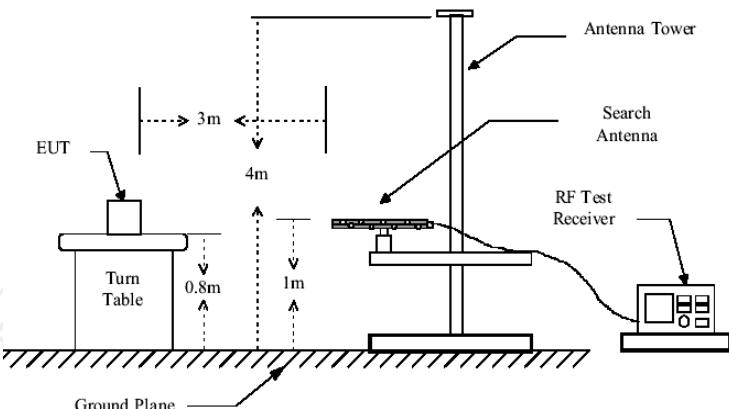

Above 1GHz

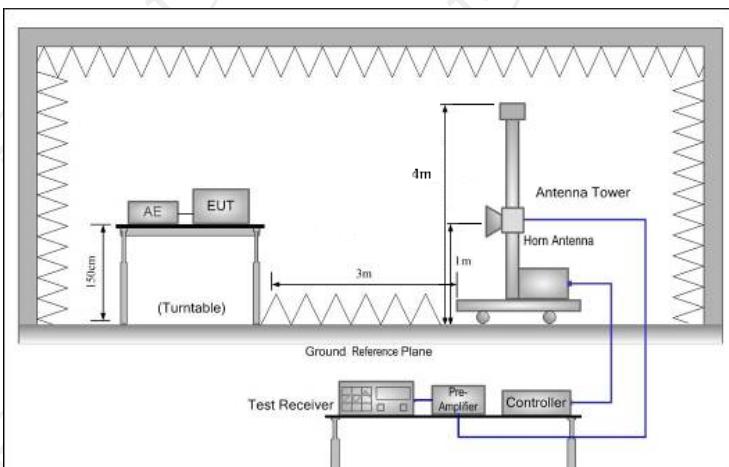

1. For the radiated emission test below 1GHz:
 The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:
 Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

Test Procedure:

	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <ol style="list-style-type: none"> (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Test mode:	Refer to section 4.1 for details
Test results:	PASS

6.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 29, 2020
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2020
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 08, 2020
Pre-amplifier	HP	8447D	2727A05017	Sep. 08, 2020
Loop antenna	ZHINAN	ZN30900A	12024	Oct. 27, 2020
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 06, 2020
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 06, 2020
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 06, 2020
Antenna Mast	Keleto	RE-AM	N/A	N/A
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 08, 2020
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 08, 2020
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test Data

Please refer to following diagram for individual

9KHz-30MHz


9KHz-150KHz:

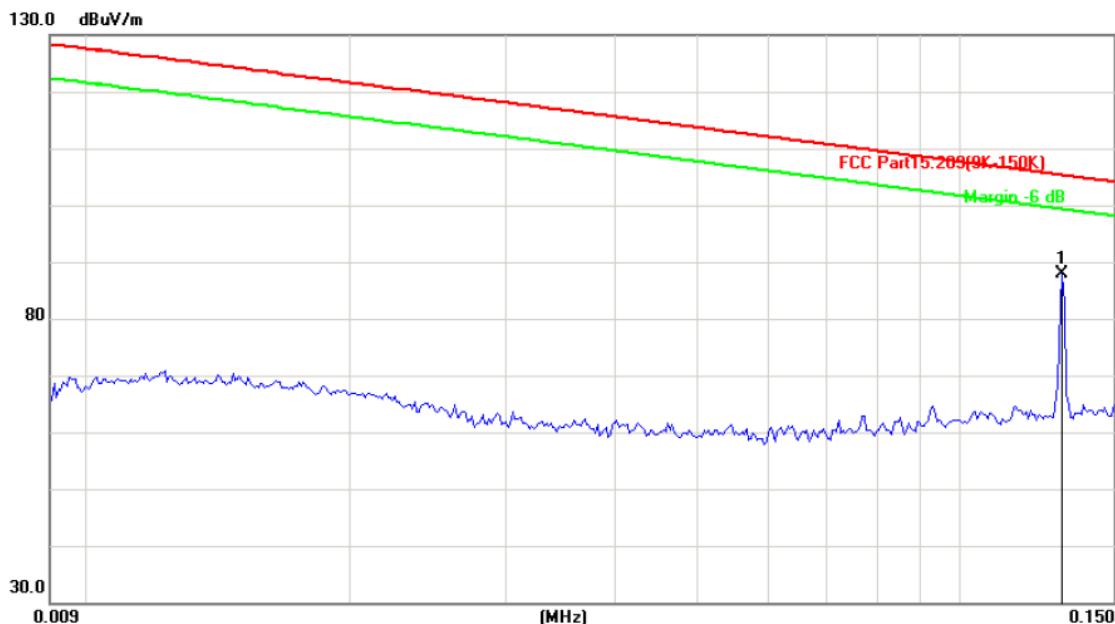

Site	Polarization: <i>Horizontal</i>	Temperature: 25
Limit: FCC Part15.209(9K-150K)	Power:	Humidity: 55 %

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Over	
		Freq.	Level					
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	0.1310	62.47	25.46	87.93	105.2	-17.35	peak

150KHz-30MHz:

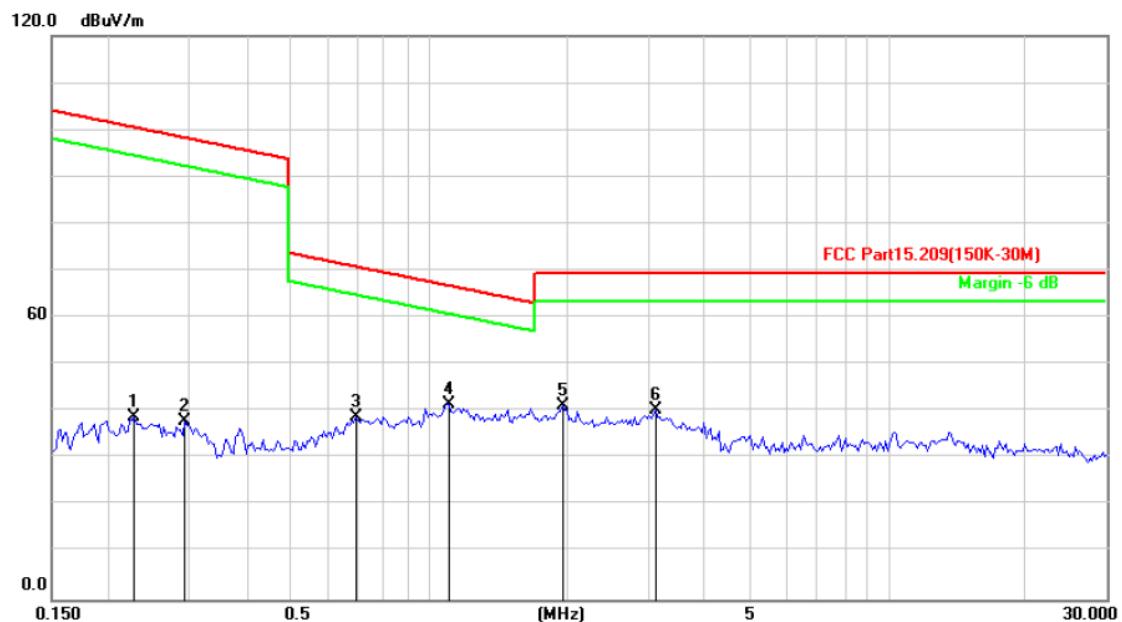


Site	Polarization:	Temperature: 25
Limit: FCC Part15.209(150K-30M)	Power:	Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.2268	13.11	25.77	38.88	100.5	-61.62	peak
2		0.2923	12.24	25.64	37.88	98.30	-60.42	peak
3		0.6896	13.82	25.16	38.98	70.84	-31.86	peak
4	*	1.0994	16.58	25.02	41.60	66.80	-25.20	peak
5		1.9489	16.52	24.77	41.29	69.50	-28.21	peak
6		3.1065	15.70	24.70	40.40	69.50	-29.10	peak

30MHz-1GHz


Horizontal:

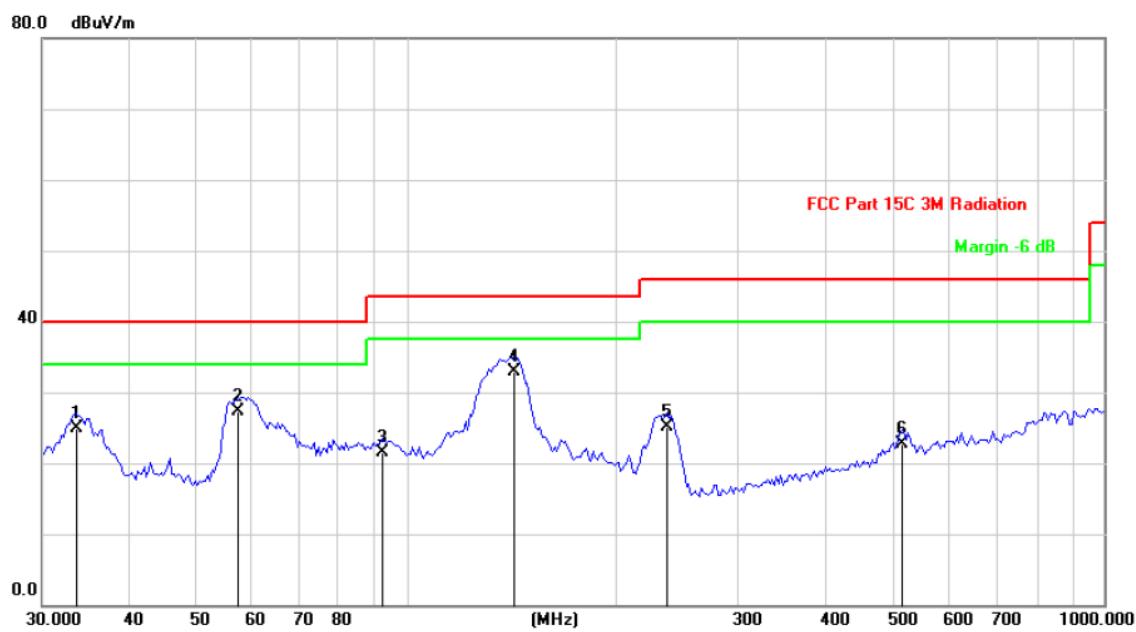

Site	Polarization: <i>Horizontal</i>	Temperature: 25
Limit: FCC Part 15C 3M Radiation	Power: AC 120V/60Hz	Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		33.5700	36.16	-11.16	25.00	40.00	-15.00	QP
2		57.2653	39.27	-11.90	27.37	40.00	-12.63	QP
3		92.3461	31.74	-10.25	21.49	43.50	-22.01	QP
4	*	142.7692	49.51	-16.51	33.00	43.50	-10.50	QP
5		236.7925	38.26	-13.15	25.11	46.00	-20.89	QP
6		512.9477	29.72	-7.07	22.65	46.00	-23.35	QP

Vertical:

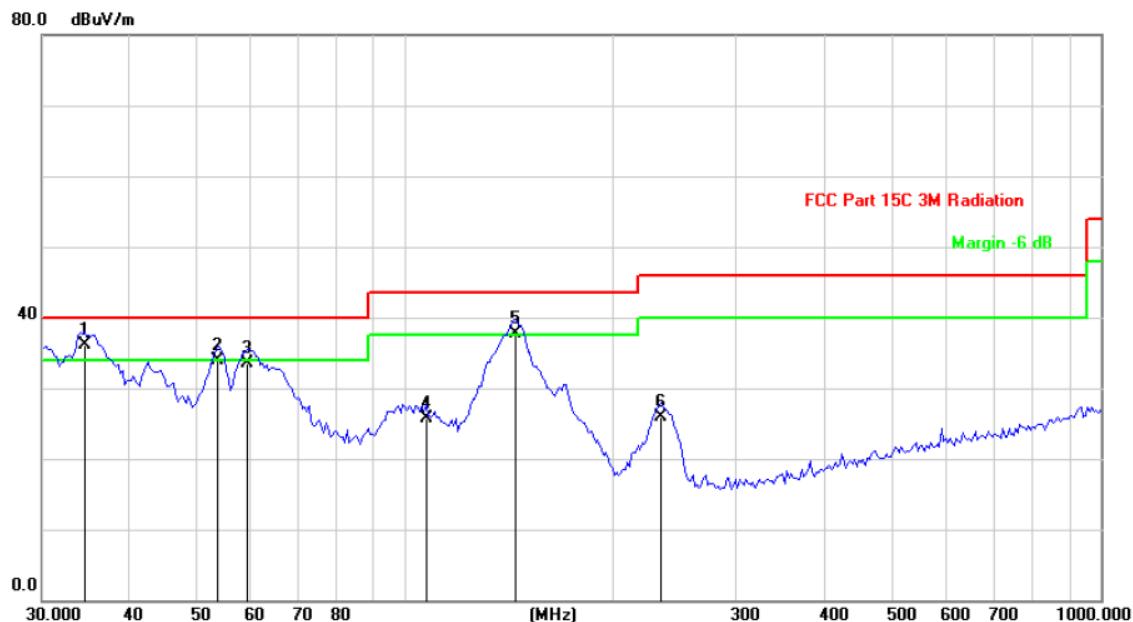

Site	Polarization: Vertical	Temperature: 25
Limit: FCC Part 15C 3M Radiation	Power: AC 120V/60Hz	Humidity: 55 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	34.5270	47.33	-11.17	36.16	40.00	-3.84	QP
2		53.7558	44.90	-11.05	33.85	40.00	-6.15	QP
3		59.3132	45.88	-12.40	33.48	40.00	-6.52	QP
4		107.0306	34.83	-9.06	25.77	43.50	-17.73	QP
5	!	143.7760	54.13	-16.52	37.61	43.50	-5.89	QP
6		233.4881	39.23	-13.25	25.98	46.00	-20.02	QP

Note:



Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Appendix A: Photographs of Test Setup


Product: 4 USB wireless charger

Model: KF-9201

Radiated Emission

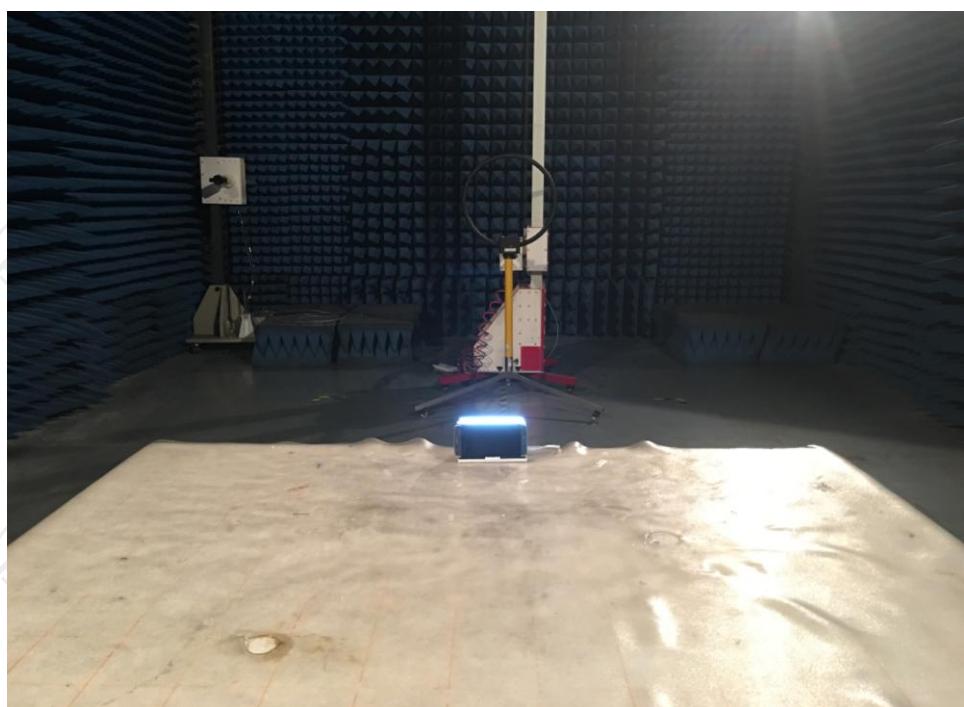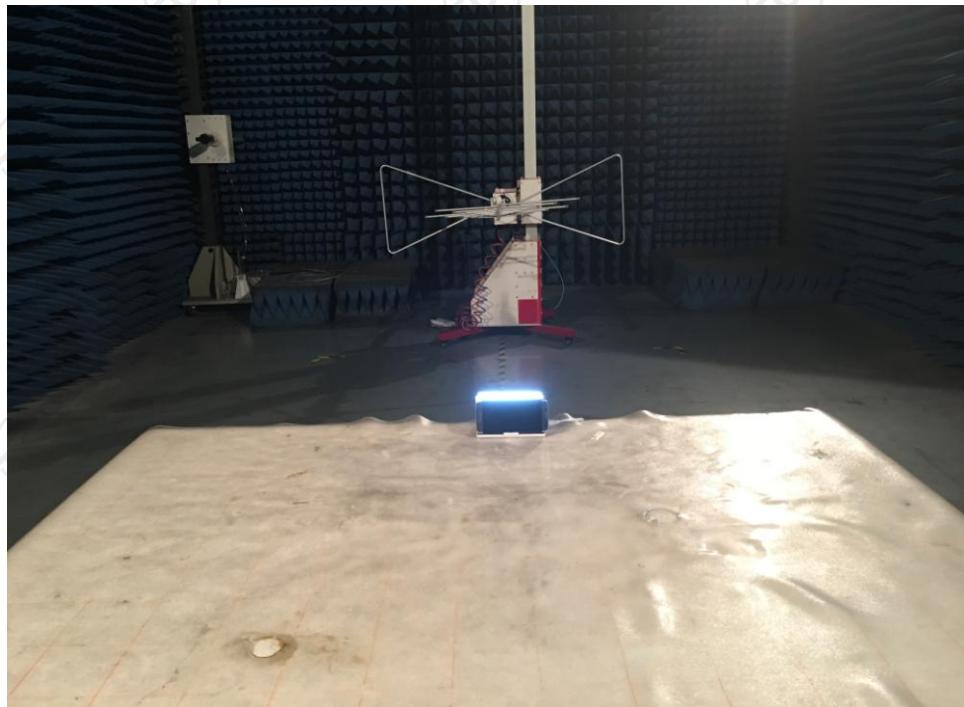

Conducted Emission

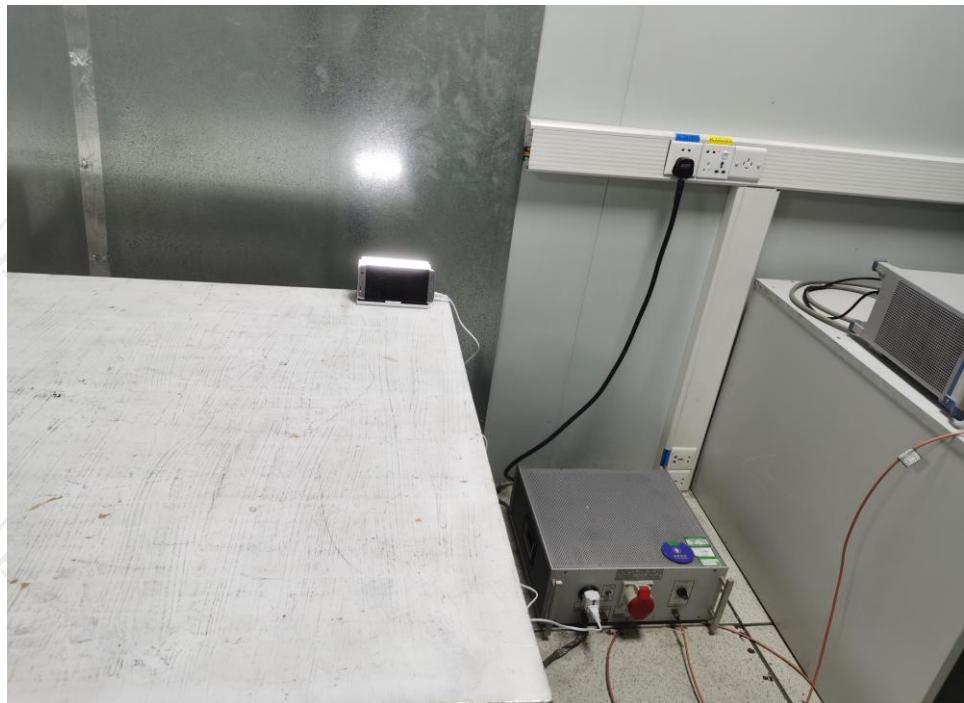




Appendix B: Photographs of EUT



Product: 4 USB wireless charger


Model: KF-9201

External Photos


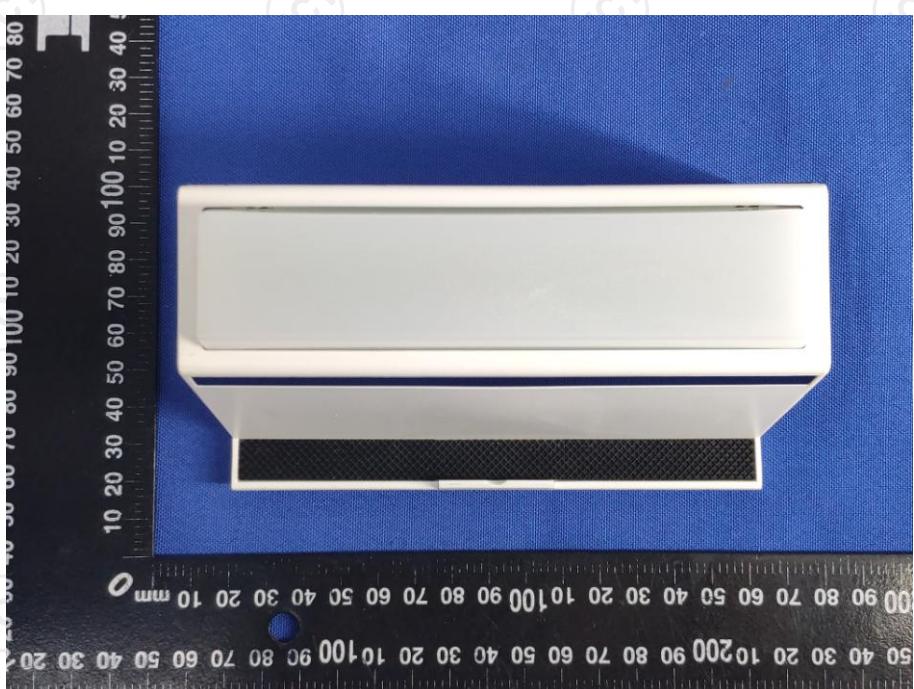


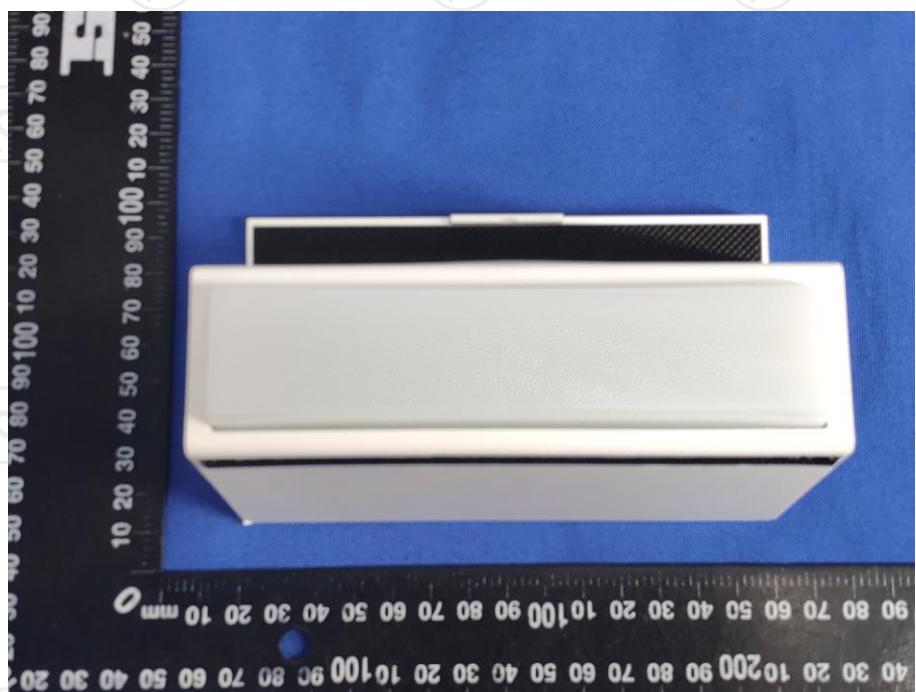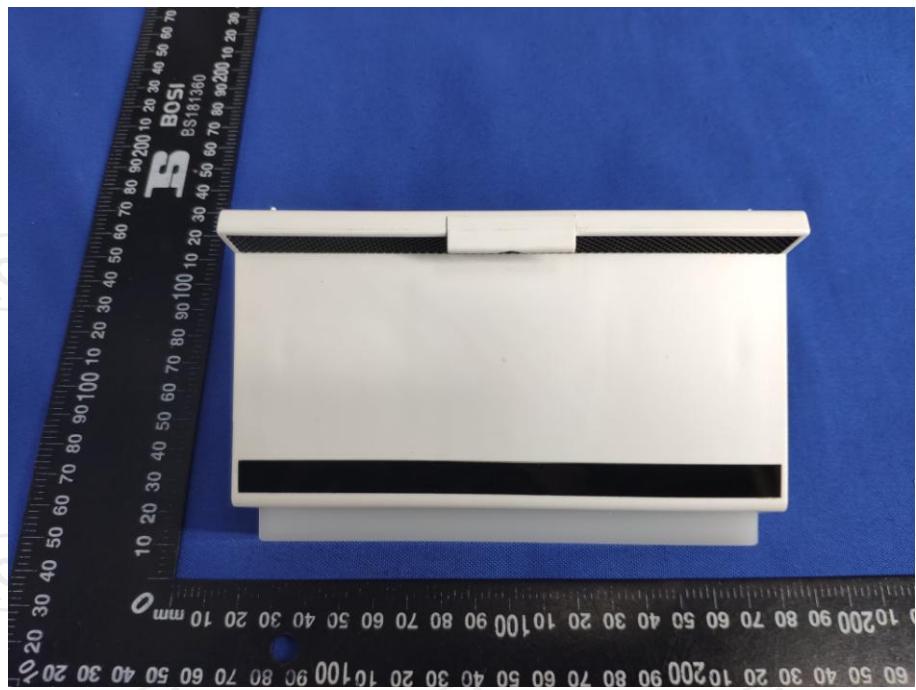


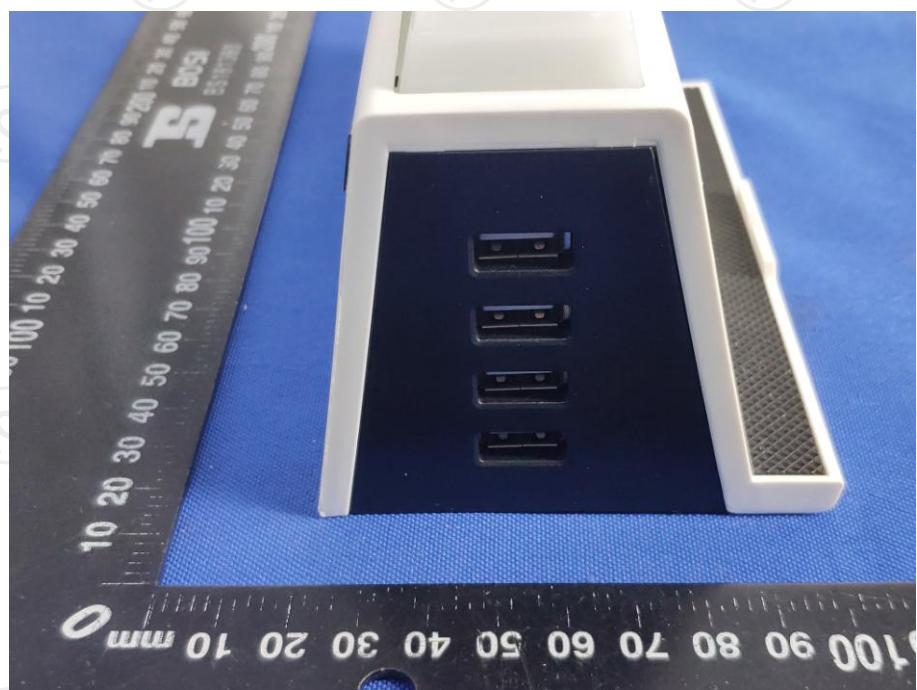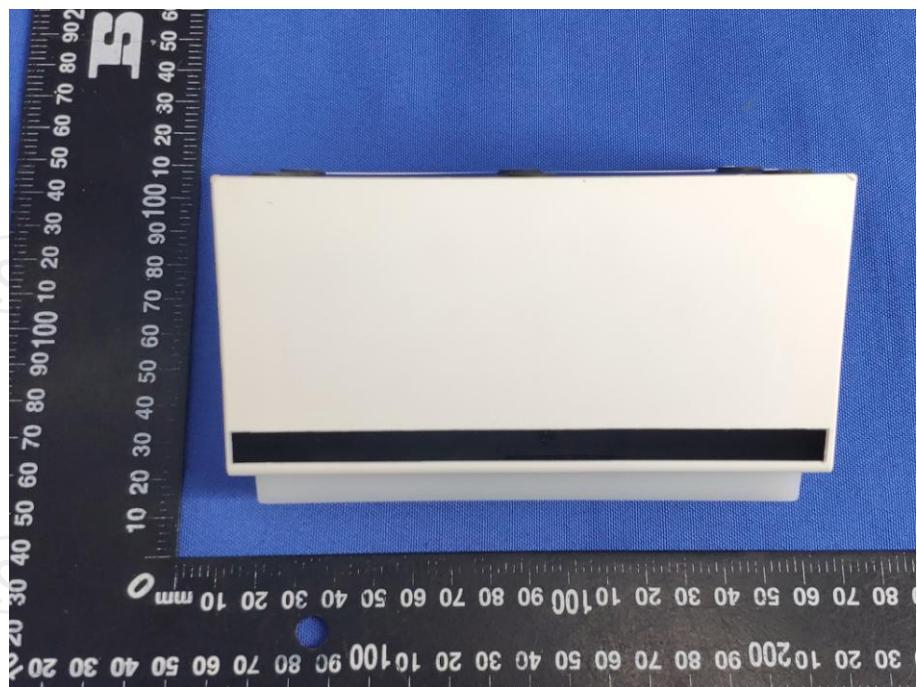

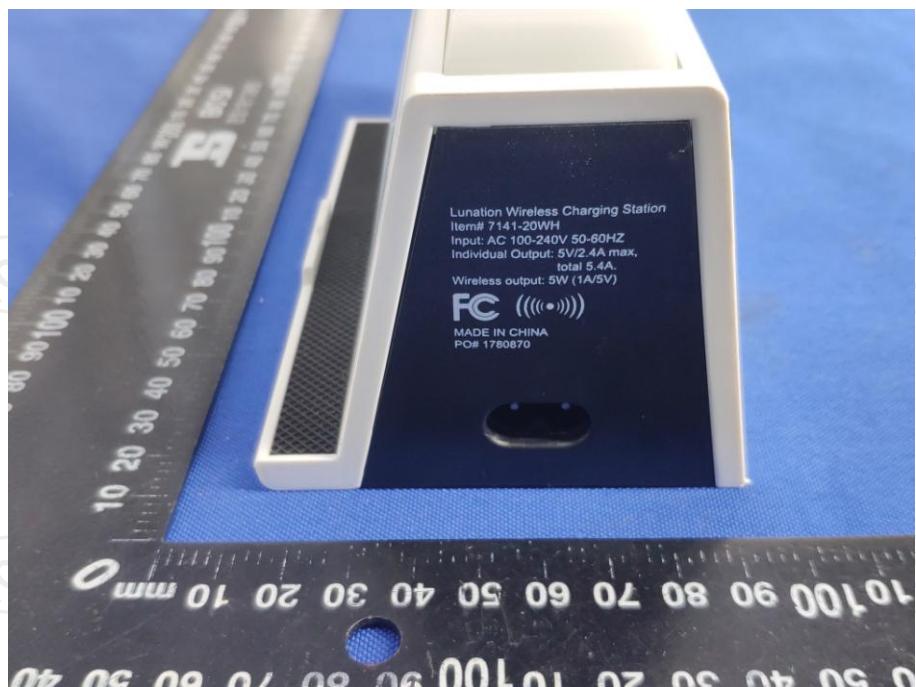




**Product: 4 USB wireless charger
Model: KF-9201
Internal Photos**

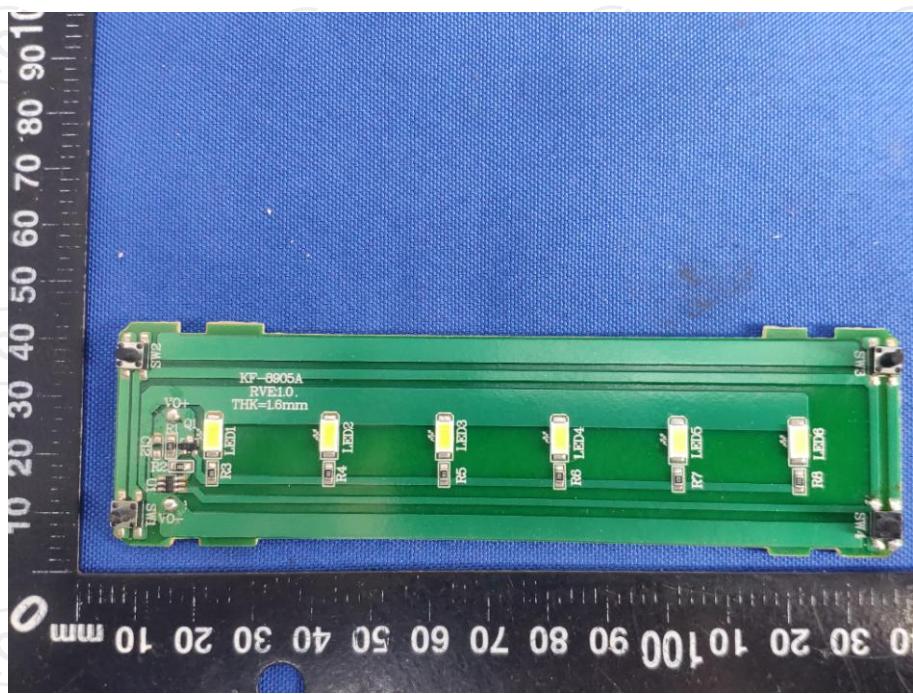
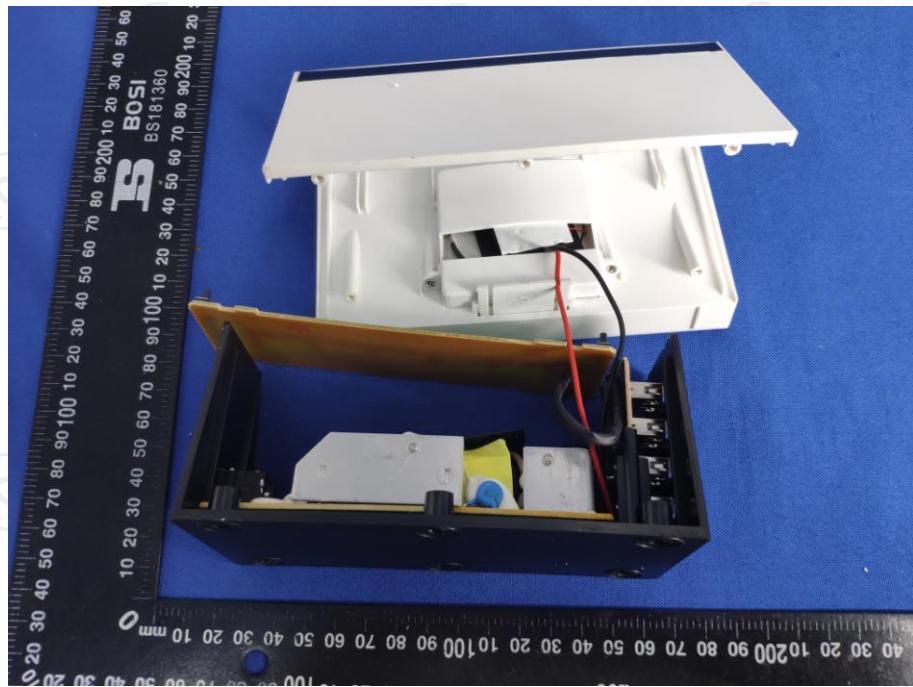



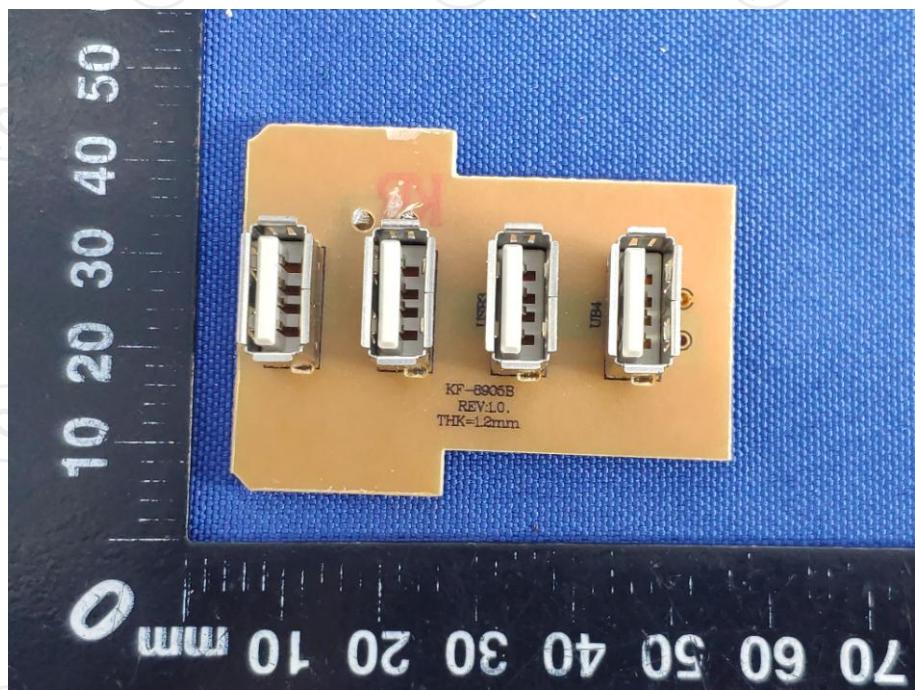


KF-8905B
REV:1.0.
THK=1.2mm

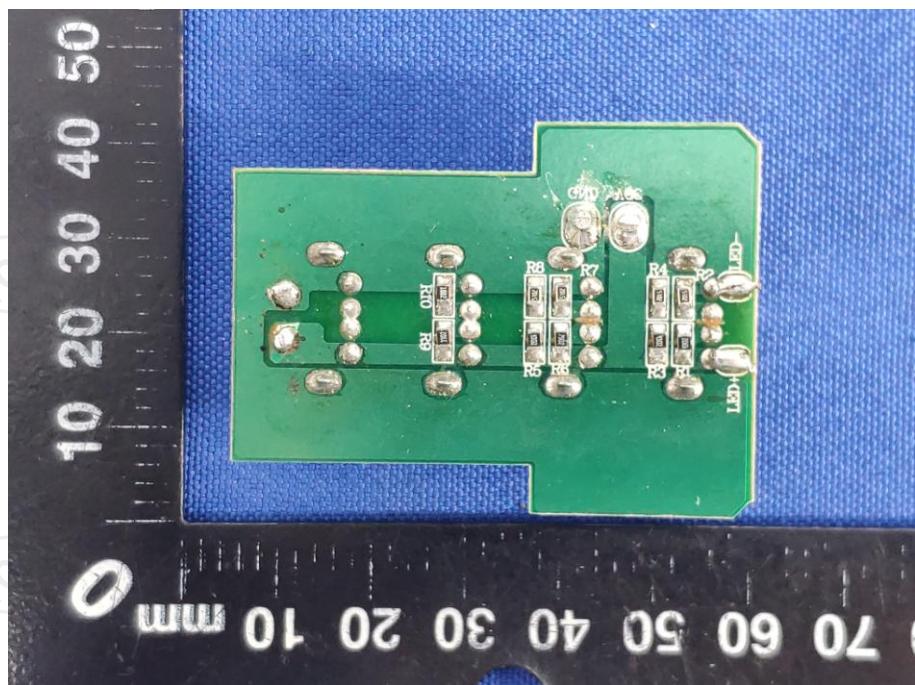

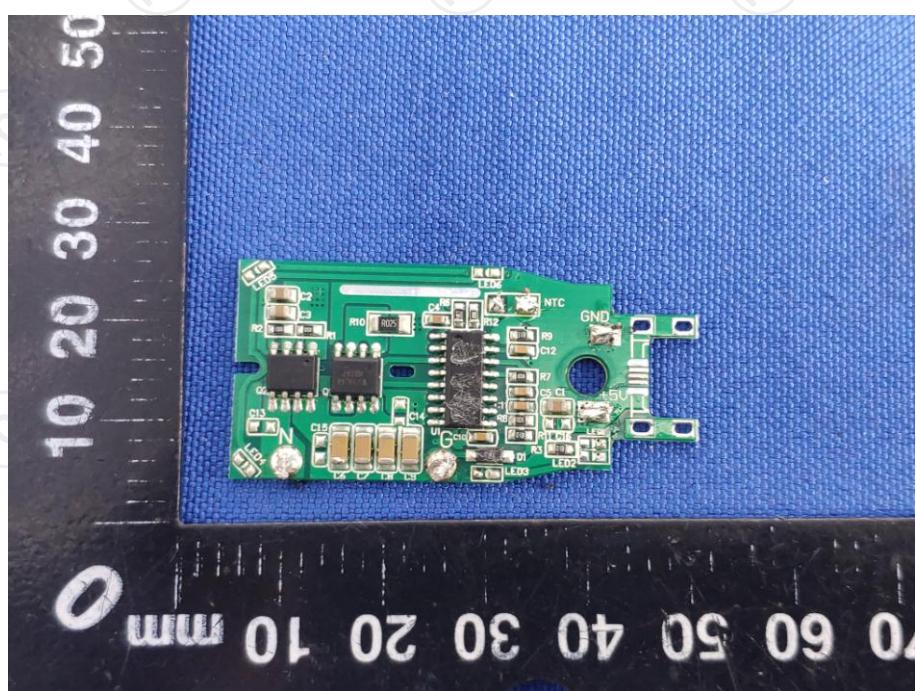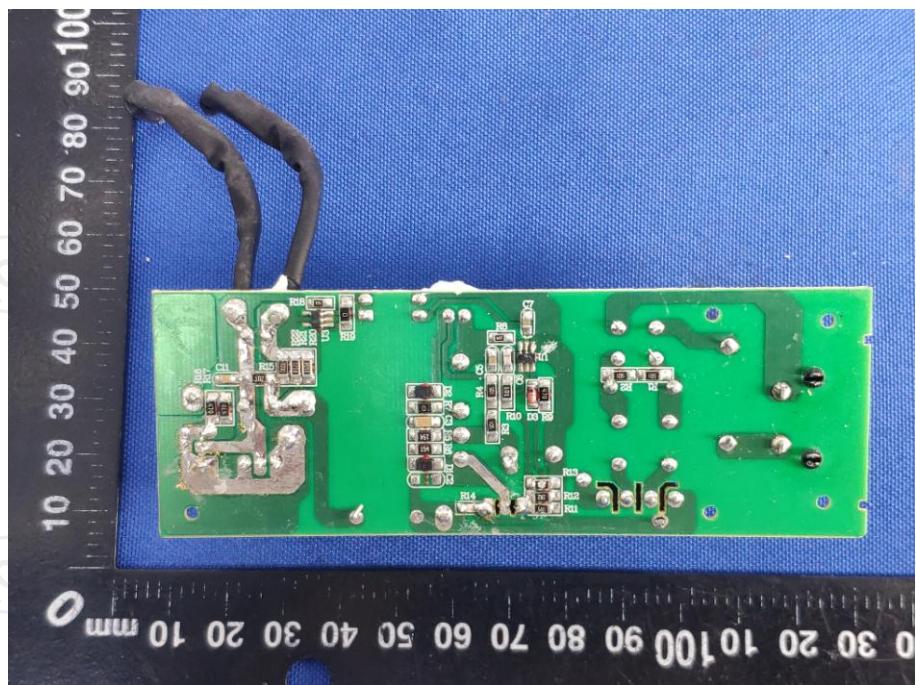

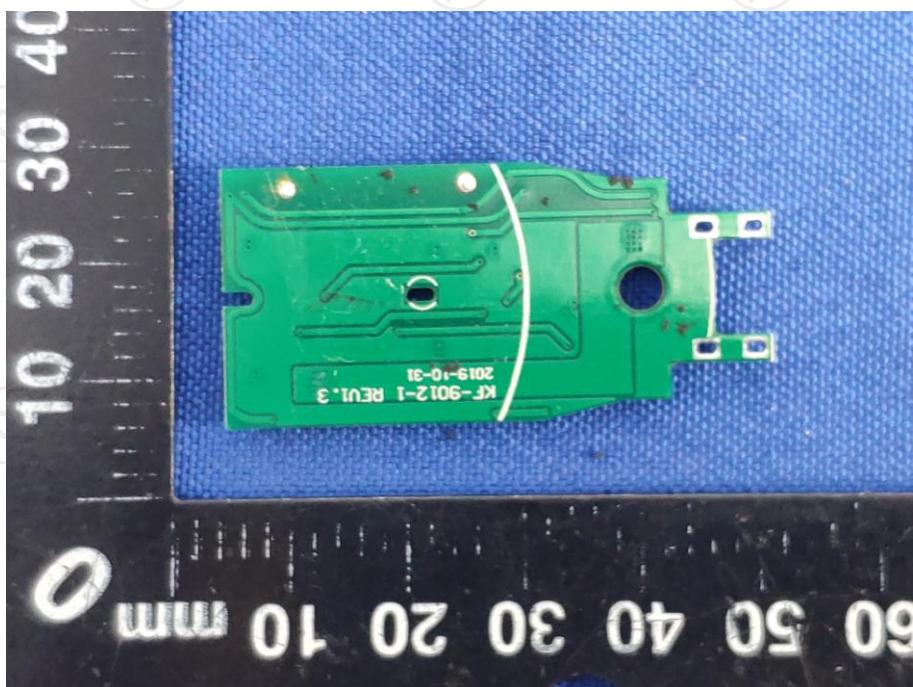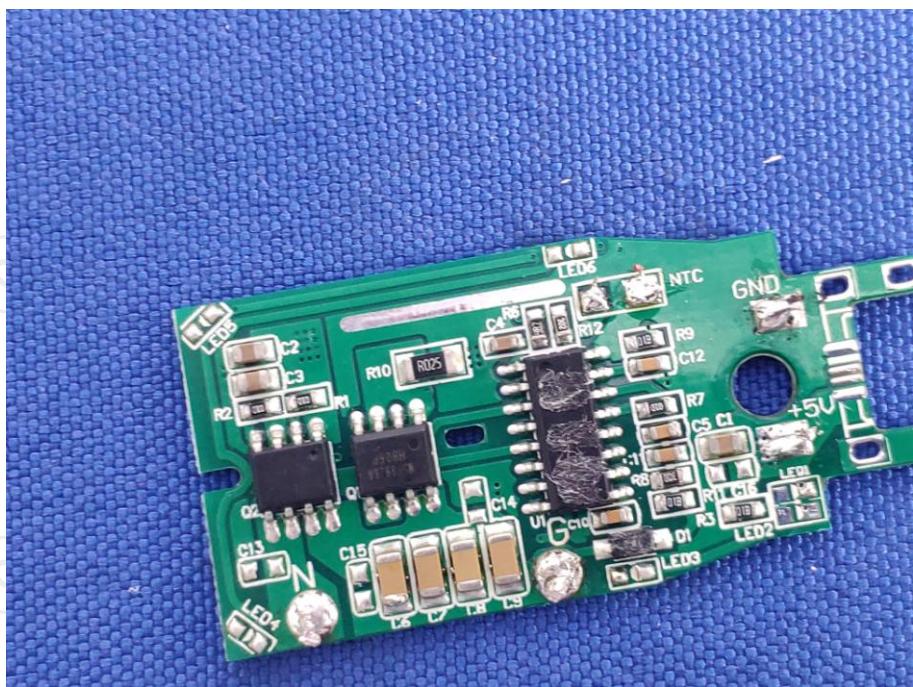

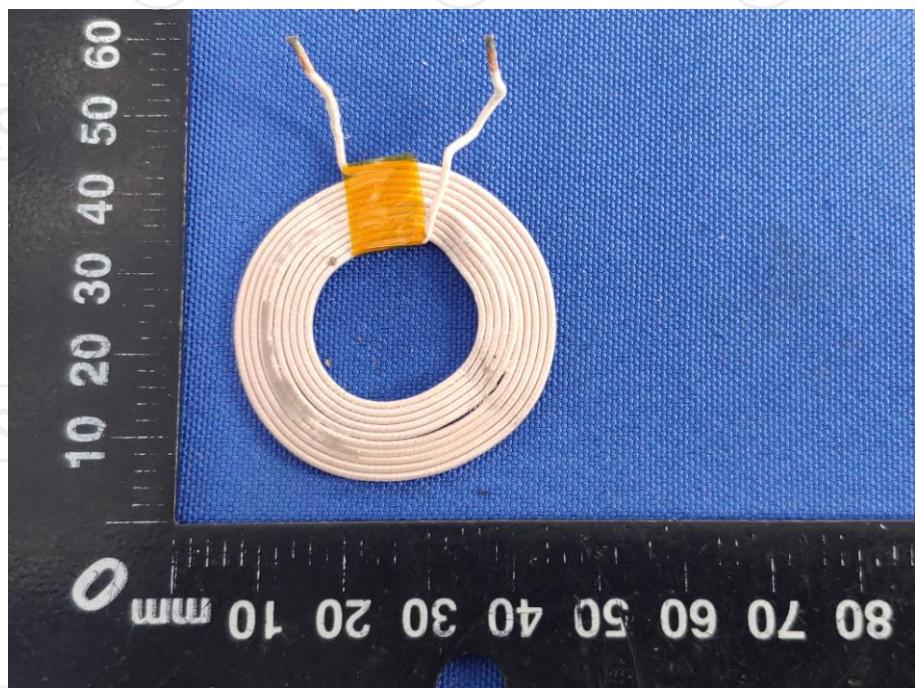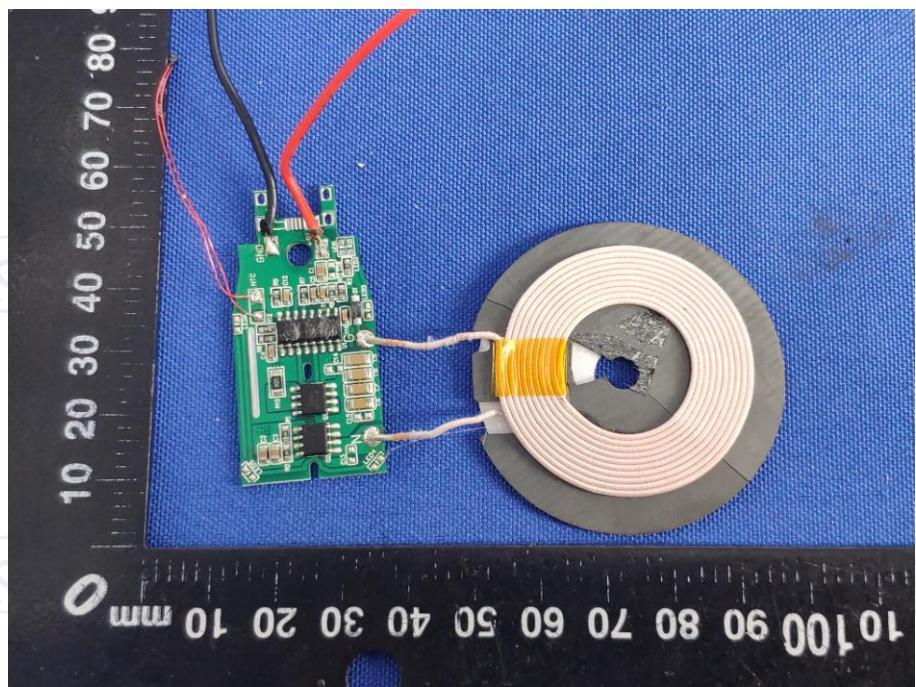

*******END OF REPORT*******