

TEST REPORT

Product Name: Multimedia all in one interactive display

FCC ID: 2AV8KDT-I75XX

Trademark: N/A

Model Number: DT-I75XX, DT-I32XX, DT-I43XX, DT-I49X, DT-I55XX, DT-I65XX, DT-I85XX, DT-I86XX, DT-I98XX, DT-I100XX, DT-O32XX, DT-O43XX, DT-O49X, DT-O55XX, DT-O65XX, DT-O75XX, DT-O85XX, DT-O86XX, DT-O98XX, DT-O100XX, DT-TV32XX, DT-TV43XX, DT-TV49XX, DT-TV55XX, DT-TV65XX, DT-TV75XX, DT-TV85XX, DT-TV86XX, DT-TV98XX, DT-TV100XX, DT-C32XX, DT-C43XX, DT-C49XX, DT-C55XX, DT-C65XX, DT-C75XX, DT-C85XX, DT-C86XX, DT-C98XX, DT-C100XX

Prepared For: Shenzhen Devops Technology Co., Ltd.

Address: 802, Tower H, ChuangxinYungu, No.48 Paotai Rd, Gongming Street, Shenzhen, China

Manufacturer: Shenzhen Devops Technology Co., Ltd.

Address: 802, Tower H, ChuangxinYungu, No.48 Paotai Rd, Gongming Street, Shenzhen, China

Prepared By: Shenzhen CTB Testing Technology Co., Ltd.

Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China

Sample Received Date: May 13, 2020

Sample tested Date: May 13, 2020 to May 18, 2020

Issue Date: May 18, 2020

Report No.: CTB200521016RFX

Test Standards: FCC Part15.247
ANSI C63.10:2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Victory

Reviewed by:

Rita Xiao

Approved by:

Sherwin Qian/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	8
4.4 Channel List	9
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
8.4 Test Result	41
9. CONDUCTED PEAK OUTPUT POWER	48
9.1 Block Diagram Of Test Setup	48
9.2 Limit	48
9.3 Test procedure	48
9.4 Test Result	49
10. 6DB OCCUPIED BANDWIDTH	51
10.1 Block Diagram Of Test Setup	51
10.2 Limit	51
10.3 Test procedure	51
10.4 Test Result	52
11. POWER SPECTRAL DENSITY	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57

11.3	Test procedure	57
11.4	Test Result	58
12.	ANTENNA REQUIREMENT	68
13.	EUT PHOTOGRAPHS	69
14.	EUT TEST SETUP PHOTOGRAPHS	72

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB200521016RFX	May 18, 2020	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): DT-I75XX, DT-I32XX, DT-I43XX, DT-I49X, DT-I55XX, DT-I65XX, DT-I85XX, DT-I86XX, DT-I98XX, DT-I100XX, DT-O32XX, DT-O43XX, DT-O49X, DT-O55XX, DT-O65XX, DT-O75XX, DT-O85XX, DT-O86XX, DT-O98XX, DT-O100XX, DT-TV32XX, DT-TV43XX, DT-TV49XX, DT-TV55XX, DT-TV65XX, DT-TV75XX, DT-TV85XX, DT-TV86XX, DT-TV98XX, DT-TV100XX, DT-C32XX, DT-C43XX, DT-C49XX, DT-C55XX, DT-C65XX, DT-C75XX, DT-C85XX, DT-C86XX, DT-C98XX, DT-C100XX

Model Description: All model's the function, software and electric circuit are the same, only with a product model named different. Test sample model: DT-I75XX

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2472MHz/ 13 channel
IEEE 802.11n 40: 2422-2462MHz/ 9 channel

Max. RF output power: WiFi (2.4G) : 13.68dBm

Type of Modulation: WiFi: DQPSK, DBPSK, DSSS, CCK and OFDM

Antenna installation: WiFi: External antenna

Antenna Gain: WiFi (2.4G) : 5dBi

Ratings: AC 100-240V

Adapter: AC 100-240V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Laptop	DELL	Inspiron5 570	JR4G1A00DPC	AE
2	AC Adaptor	DELL	HA45NM140	CN-00285K-CH 200-88V-OEYC	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	2467
13	2472						

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2462MHz
Receiving(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Receiving(802.11n40)	2422MHz	2437MHz	2452MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	100-240V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Oct. 17, 2019	Oct. 16, 2020
2	Power Sensor	Agilent	U2021XA	MY56120032	Nov. 02, 2019	Nov. 01, 2020
3	Power Sensor	Agilent	U2021XA	MY56120034	Nov. 02, 2019	Nov. 01, 2020
4	Communication test set	R&S	CMW500	118735	Nov. 02, 2019	Nov. 01, 2020
5	Spectrum Analyzer	R&S	FSP40	100550	Nov. 02, 2019	Nov. 01, 2020
6	Signal Generator	Agilent	N5181A	MY49060920	Nov. 03, 2019	Nov. 02, 2020
7	Signal Generator	Agilent	N5182A	MY47420195	Nov. 03, 2019	Nov. 02, 2020
8	Communication test set	R&S	CMU200	119978	Nov. 02, 2019	Nov. 01, 2020
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Nov. 02, 2019	Nov. 01, 2020
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Nov. 02, 2019	Nov. 01, 2020
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Nov. 02, 2019	Nov. 01, 2020
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Nov. 02, 2019	Nov. 01, 2020
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Nov. 02, 2019	Nov. 01, 2020
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 10, 2019	Nov. 09, 2020
17	Receiver	R&S	ESPI	100362	Nov. 02, 2019	Nov. 01, 2020

18	Amplifier	HP	8447E	2945A02747	Nov. 03, 2019	Nov. 02, 2020
19	Amplifier	Agilent	8449B	3008A01838	Nov. 03, 2019	Nov. 02, 2020
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	Nov. 02, 2019	Nov. 01, 2020
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2019	Nov. 01, 2020
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Nov. 02, 2019	Nov. 01, 2020
24	loop antenna	ZHINAN	ZN30900A	/	Nov. 02, 2019	Nov. 01, 2020
25	Horn antenna	A/H/System	SAS-574	588	Nov. 02, 2019	Nov. 01, 2020
26	Amplifier	AEROFLEX	/	S/N/ 097	Nov. 02, 2019	Nov. 01, 2020

Conducted emissions Test						
27	Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
28	AMN	ROHDE&SC HWARZ	ESH3-Z5	831551852	Nov. 02, 2019	Nov. 01, 2020
29	Pulse limiter	ROHDE&SC HWARZ	ESH3Z2	357881052	Nov. 02, 2019	Nov. 01, 2020
30	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCS30	834115/006	Nov. 02, 2019	Nov. 01, 2020
31	Coaxial cable	ZDECL	Z302S	18091904	Nov. 02, 2019	Nov. 01, 2020
32	ISN	TESEQ	NTFM8158	NTFM8158# 183	Nov. 02, 2019	Nov. 01, 2020
33	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCI	10428	Nov. 02, 2019	Nov. 01, 2020
34	Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup



6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Remark: This Report only show the test plots of the ANT1 worst case.

Test Specification: Line

80.0 dBuV

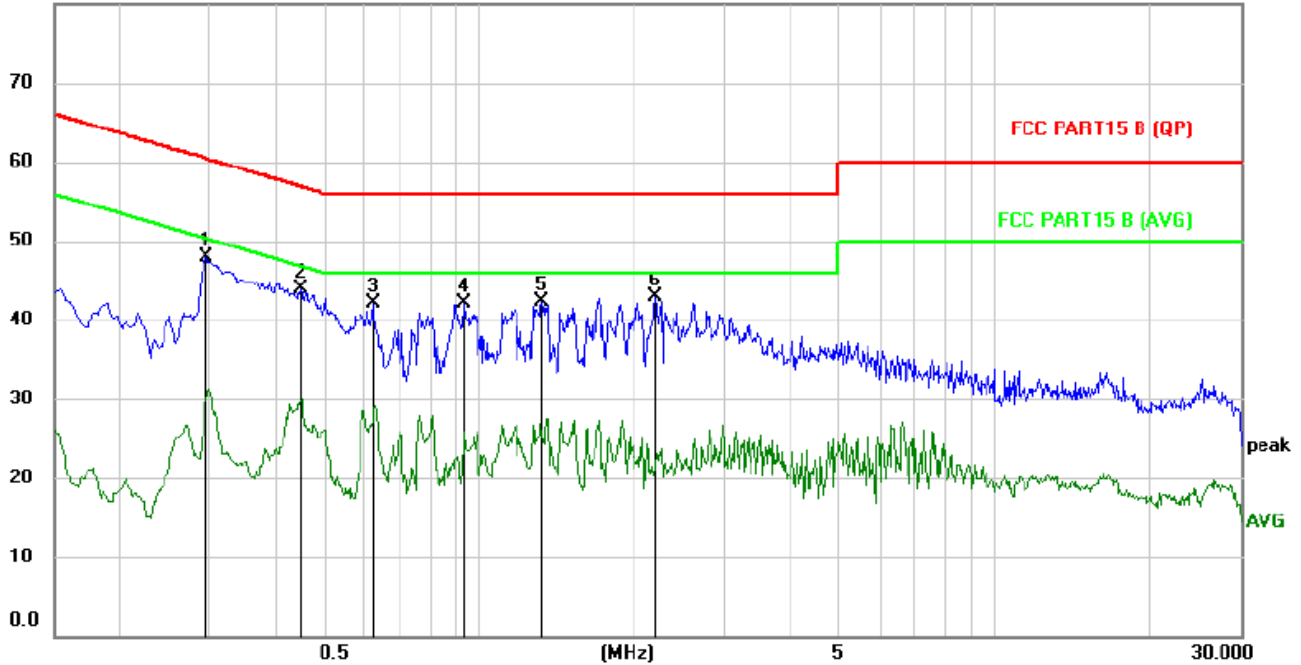


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.2938	37.71	10.17	47.88	60.42	-12.54	peak	
2		0.4500	33.73	10.08	43.81	56.88	-13.07	peak	
3		0.6219	31.95	10.07	42.02	56.00	-13.98	peak	
4		0.9300	31.85	10.20	42.05	56.00	-13.95	peak	
5		1.3180	32.15	10.23	42.38	56.00	-13.62	peak	
6		2.1979	32.58	10.24	42.82	56.00	-13.18	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral

80.0 dBuV

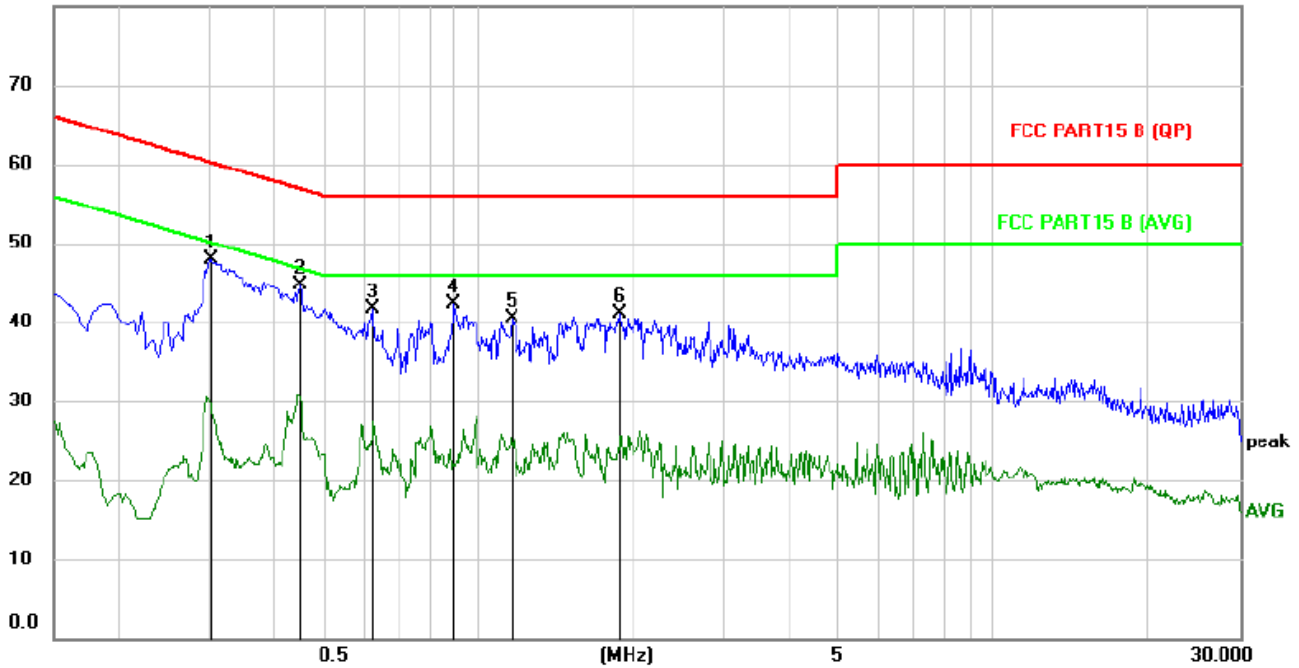

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3019	37.65	10.16	47.81	60.19	-12.38	peak	
2	*	0.4500	34.39	10.22	44.61	56.88	-12.27	peak	
3		0.6219	31.49	10.23	41.72	56.00	-14.28	peak	
4		0.8980	32.11	10.17	42.28	56.00	-13.72	peak	
5		1.1615	30.30	10.15	40.45	56.00	-15.55	peak	
6		1.8700	30.89	10.13	41.02	56.00	-14.98	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

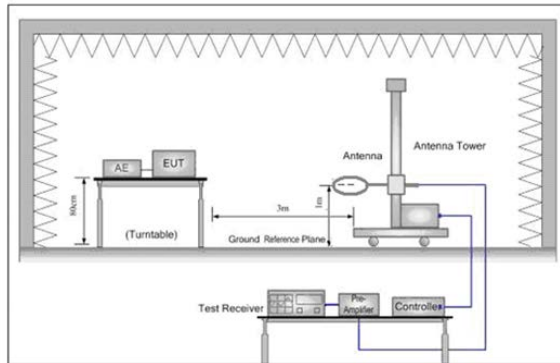


Figure 1. Below 30MHz

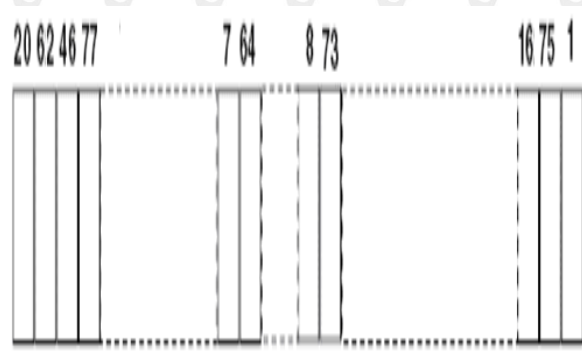


Figure 2. 30MHz to 1GHz

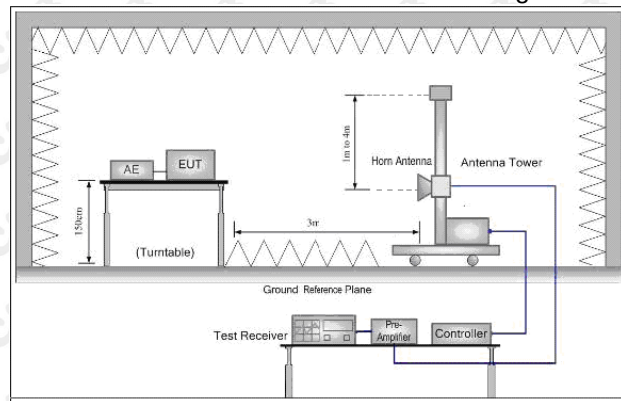


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Remark: This Report only show the test plots of the ANT1 worst case.

Below 1GHz Test Results:


Antenna polarity: H

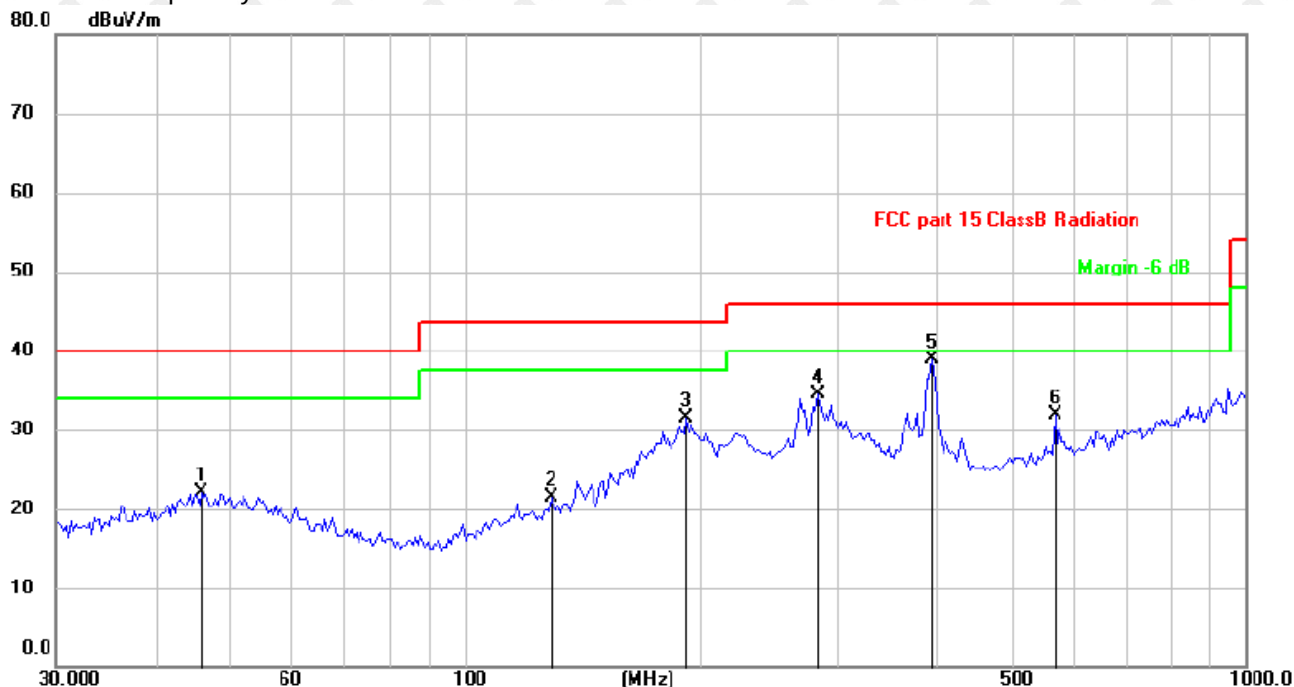

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		46.0162	27.92	-5.85	22.07	40.00	-17.93	peak		
2		129.0144	28.68	-7.19	21.49	43.50	-22.01	peak		
3		192.4183	40.56	-8.99	31.57	43.50	-11.93	peak		
4		282.9849	39.88	-5.41	34.47	46.00	-11.53	peak		
5	*	396.2414	41.19	-2.24	38.95	46.00	-7.05	peak		
6		570.6100	30.51	1.46	31.97	46.00	-14.03	peak		

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

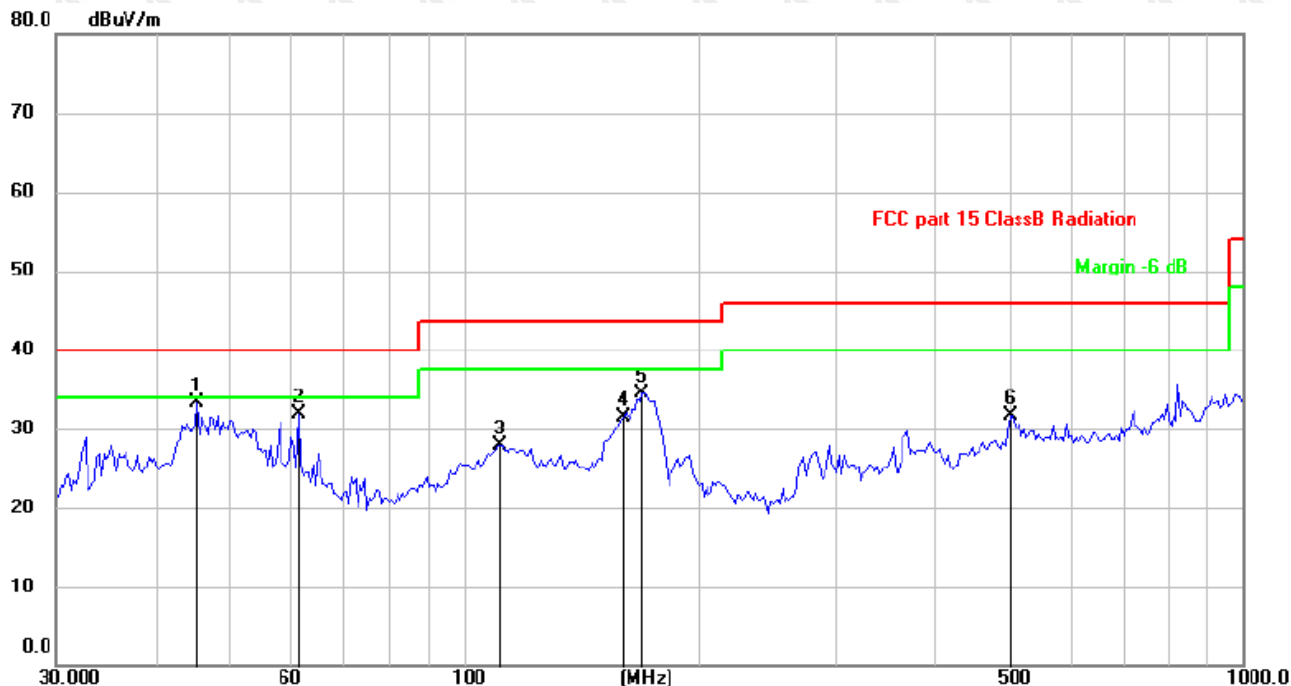

No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1	*	45.3753	39.14	-5.81	33.33	40.00	-6.67	peak		
2		61.3462	38.83	-7.02	31.81	40.00	-8.19	peak		
3		111.3468	36.24	-8.34	27.90	43.50	-15.60	peak		
4		160.3454	37.76	-6.27	31.49	43.50	-12.01	peak		
5		169.5988	41.80	-7.26	34.54	43.50	-8.96	peak		
6		502.9395	31.52	0.17	31.69	46.00	-14.31	peak		

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.99	-3.64	62.35	74	-11.65	peak
4824	48.77	-3.64	45.13	54	-8.87	AVG
7236	56.73	-0.95	55.78	74	-18.22	peak
7236	44.33	-0.95	43.38	54	-10.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.34	-3.64	62.70	74	-11.30	peak
4824	47.84	-3.64	44.20	54	-9.80	AVG
7236	56.17	-0.95	55.22	74	-18.78	peak
7236	44.66	-0.95	43.71	54	-10.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.51	-3.51	62.00	74	-12.00	peak
4874	49.62	-3.51	46.11	54	-7.89	AVG
7311	59.96	-0.82	59.14	74	-14.86	peak
7311	43.62	-0.82	42.80	54	-11.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.83	-3.51	61.32	74	-12.68	peak
4874	48.31	-3.51	44.80	54	-9.20	AVG
7311	58.49	-0.82	57.67	74	-16.33	peak
7311	45.02	-0.82	44.20	54	-9.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.56	-3.43	61.13	74	-12.87	peak
4924	48.67	-3.43	45.24	54	-8.76	AVG
7386	59.27	-0.75	58.52	74	-15.48	peak
7386	44.44	-0.75	43.69	54	-10.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.44	-3.43	60.01	74	-13.99	peak
4924	46.18	-3.43	42.75	54	-11.25	AVG
7386	57.92	-0.75	57.17	74	-16.83	peak
7386	43.88	-0.75	43.13	54	-10.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.62	-3.64	61.98	74	-12.02	peak
4824	48.30	-3.64	44.66	54	-9.34	AVG
7236	59.54	-0.95	58.59	74	-15.41	peak
7236	44.93	-0.95	43.98	54	-10.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.42	-3.64	59.78	74	-14.22	peak
4824	48.75	-3.64	45.11	54	-8.89	AVG
7236	58.23	-0.95	57.28	74	-16.72	peak
7236	45.67	-0.95	44.72	54	-9.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.46	-3.51	58.95	74	-15.05	peak
4874	47.74	-3.51	44.23	54	-9.77	AVG
7311	58.14	-0.82	57.32	74	-16.68	peak
7311	44.40	-0.82	43.58	54	-10.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.61	-3.51	61.10	74	-12.90	peak
4874	47.71	-3.51	44.20	54	-9.80	AVG
7311	56.91	-0.82	56.09	74	-17.91	peak
7311	43.16	-0.82	42.34	54	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.90	-3.43	61.47	74	-12.53	peak
4924	50.06	-3.43	46.63	54	-7.37	AVG
7386	57.14	-0.75	56.39	74	-17.61	peak
7386	42.92	-0.75	42.17	54	-11.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.76	-3.43	60.33	74	-13.67	peak
4924	46.63	-3.43	43.20	54	-10.80	AVG
7386	57.81	-0.75	57.06	74	-16.94	peak
7386	41.94	-0.75	41.19	54	-12.81	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.54	-3.64	58.90	74	-15.10	peak
4824	47.43	-3.64	43.79	54	-10.21	AVG
7236	57.09	-0.95	56.14	74	-17.86	peak
7236	45.46	-0.95	44.51	54	-9.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.01	-3.64	61.37	74	-12.63	peak
4824	47.29	-3.64	43.65	54	-10.35	AVG
7236	58.91	-0.95	57.96	74	-16.04	peak
7236	45.37	-0.95	44.42	54	-9.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.20	-3.51	59.69	74.00	-14.31	peak
4874.00	48.80	-3.51	45.29	54.00	-8.71	AVG
7311.00	59.78	-0.82	58.96	74.00	-15.04	peak
7311.00	45.64	-0.82	44.82	54.00	-9.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.28	-3.51	58.77	74.00	-15.23	peak
4874.00	47.79	-3.51	44.28	54.00	-9.72	AVG
7311.00	58.73	-0.82	57.91	74.00	-16.09	peak
7311.00	44.14	-0.82	43.32	54.00	-10.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.72	-3.43	60.29	74	-13.71	peak
4924	45.71	-3.43	42.28	54	-11.72	AVG
7386	59.08	-0.75	58.33	74	-15.67	peak
7386	43.46	-0.75	42.71	54	-11.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.40	-3.43	61.97	74	-12.03	peak
4924	47.33	-3.43	43.90	54	-10.10	AVG
7386	56.22	-0.75	55.47	74	-18.53	peak
7386	41.33	-0.75	40.58	54	-13.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.57	-3.63	60.94	74	-13.06	peak
4844	47.80	-3.63	44.17	54	-9.83	AVG
7266	57.80	-0.94	56.86	74	-17.14	peak
7266	44.84	-0.94	43.90	54	-10.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.37	-3.63	60.74	74	-13.26	peak
4844	49.11	-3.63	45.48	54	-8.52	AVG
7266	58.28	-0.94	57.34	74	-16.66	peak
7266	45.44	-0.94	44.50	54	-9.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.64	-3.51	59.13	74	-14.87	peak
4874	46.93	-3.51	43.42	54	-10.58	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	43.81	-0.82	42.99	54	-11.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.28	-3.51	58.77	74	-15.23	peak
4874	46.47	-3.51	42.96	54	-11.04	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.06	-3.43	59.63	74	-14.37	peak
4904	47.40	-3.43	43.97	54	-10.03	AVG
7356	55.98	-0.75	55.23	74	-18.77	peak
7356	42.01	-0.75	41.26	54	-12.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.06	-3.43	58.63	74	-15.37	peak
4904	48.29	-3.43	44.86	54	-9.14	AVG
7356	59.15	-0.75	58.40	74	-15.60	peak
7356	43.37	-0.75	42.62	54	-11.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.24	-5.81	52.43	74	-21.57	
2390	/	-5.81	/	54	/	AVG
2399	64.29	-5.84	58.45	74	-15.55	peak
2399	48.21	-5.84	42.37	54	-11.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.32	-5.81	51.51	74	-22.49	
2390	/	-5.81	/	54	/	AVG
2399	61.76	-5.84	55.92	74	-18.08	peak
2399	46.05	-5.84	40.21	54	-13.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.25	-5.65	51.60	74	-22.40	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.62	-5.65	50.97	74	-23.03	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.71	-5.81	51.90	74	-22.10	peak
2390	/	-5.81	/	54	/	AVG
2399	61.58	-5.84	55.74	74	-18.26	peak
2399	46.67	-5.84	40.83	54	-13.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.35	-5.81	50.54	74	-23.46	peak
2390	/	-5.81	/	54	/	AVG
2399	62.84	-5.84	57.00	74	-17.00	peak
2399	45.30	-5.84	39.46	54	-14.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	56.65	-5.65	51.00	74	-23.00	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.28	-5.65	51.63	74	-22.37	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.06	-5.81	50.25	74	-23.75	peak
2390	/	-5.81	/	54	/	AVG
2399	62.64	-5.84	56.80	74	-17.20	peak
2399	48.01	-5.84	42.17	54	-11.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.86	-5.81	50.05	74	-23.95	peak
2390	/	-5.81	/	54	/	AVG
2399	60.75	-5.84	54.91	74	-19.09	peak
2399	47.05	-5.84	41.21	54	-12.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.96	-5.65	50.31	74	-23.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.36	-5.65	50.71	74	-23.29	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	59.20	-5.81	53.39	74	-20.61	
2390	/	-5.81	/	54	/	AVG
2399	62.56	-5.84	56.72	74	-17.28	peak
2399	45.60	-5.84	39.76	54	-14.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.97	-5.81	52.16	74	-21.84	
2390	/	-5.81	/	54	/	AVG
2399	60.95	-5.84	55.11	74	-18.89	peak
2399	46.82	-5.84	40.98	54	-13.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.32	-5.65	51.67	74	-22.33	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.19	-5.65	51.54	74	-22.46	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

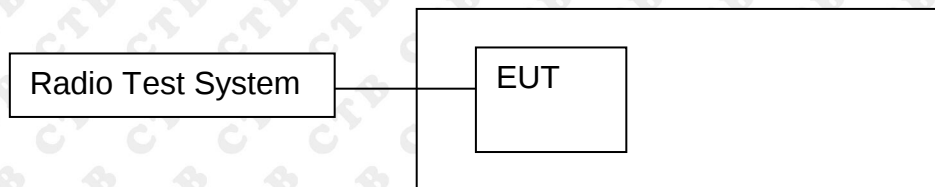

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result



Remark: This Report only show the test plots of the ANT1 worst case.

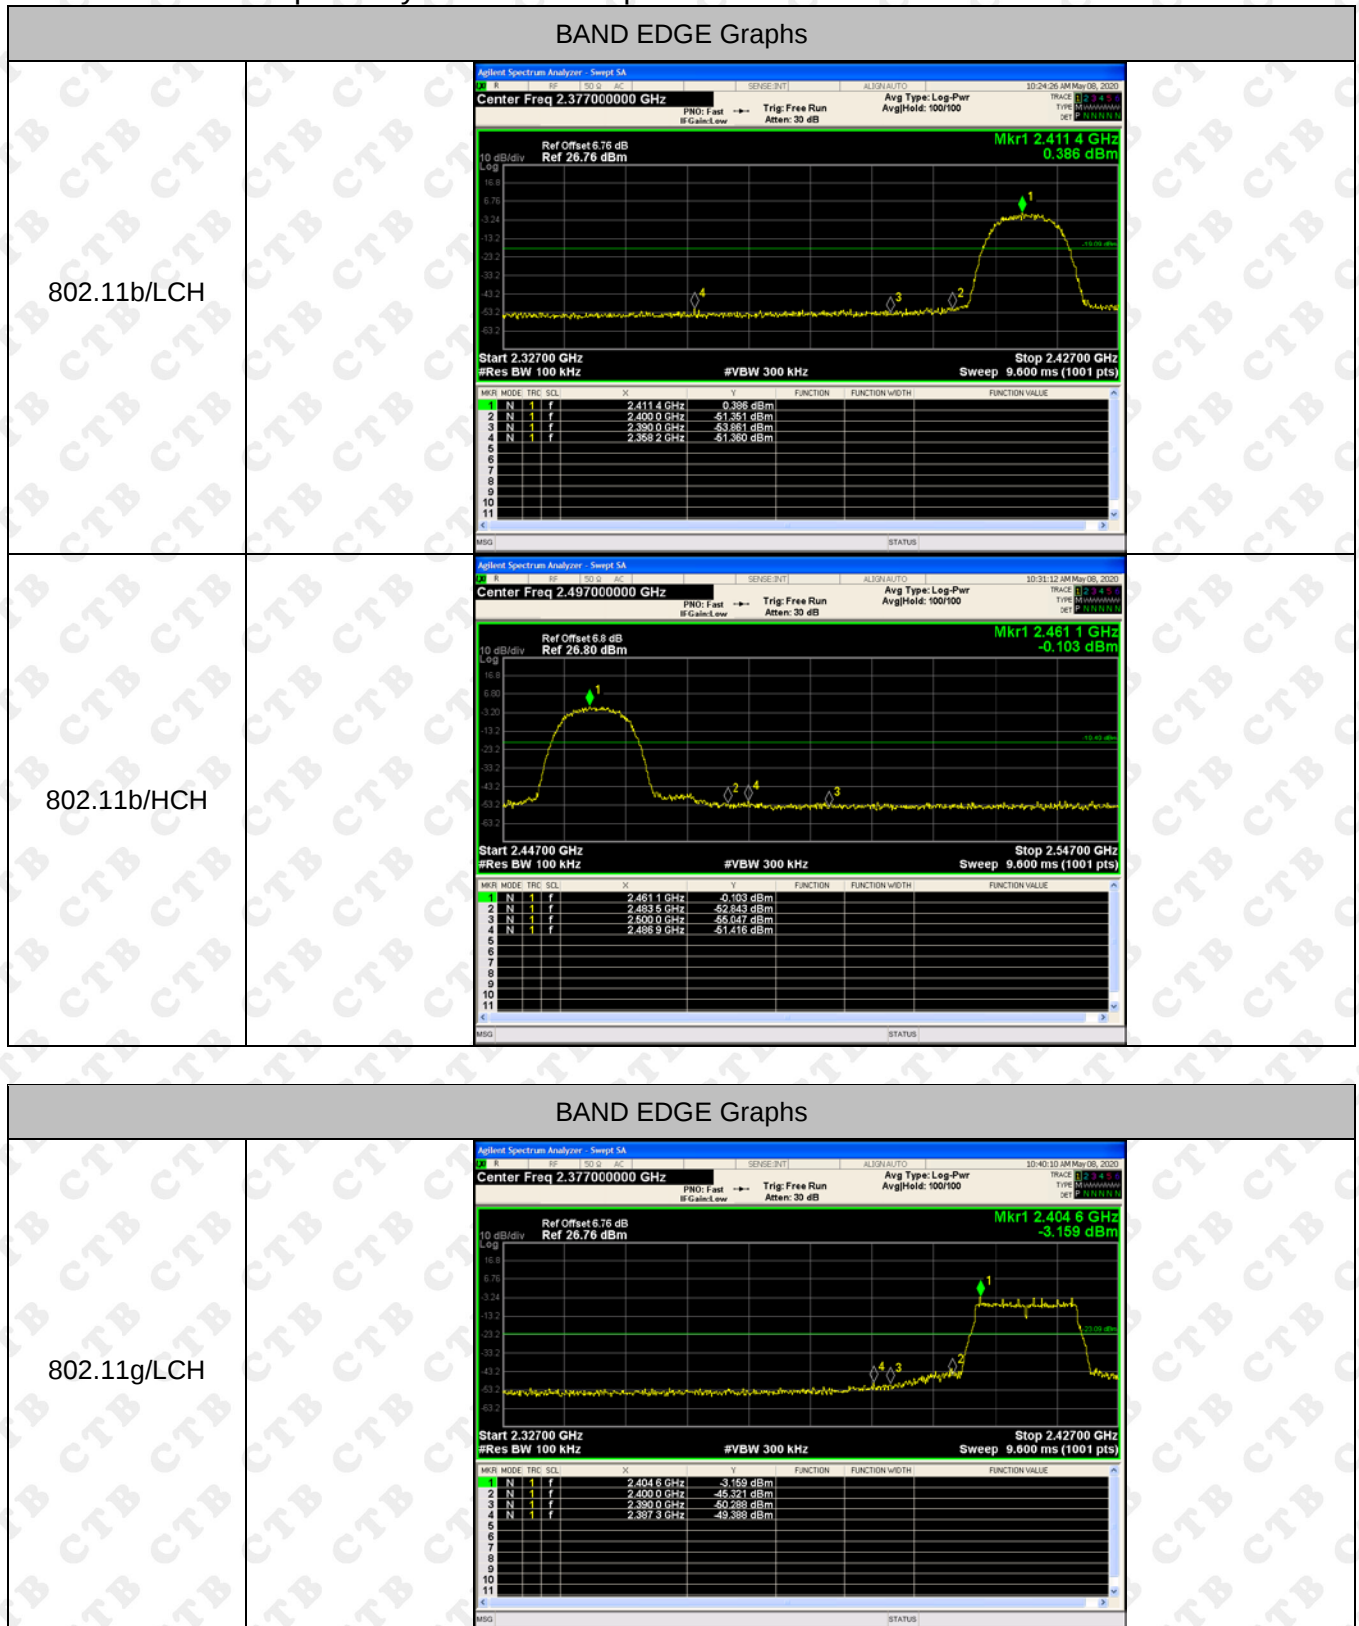

802.11g/HCH

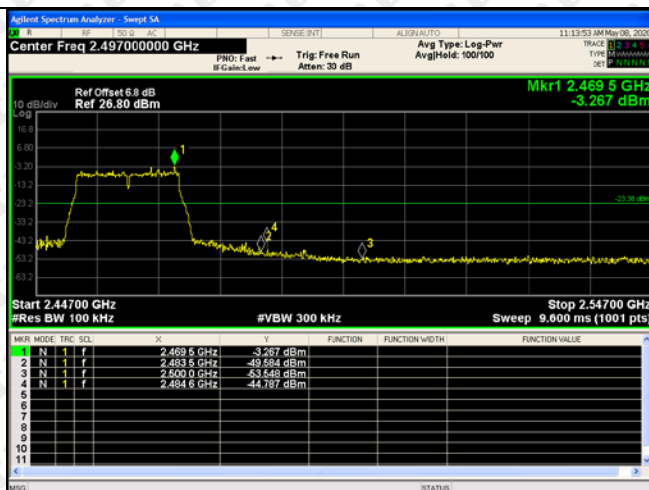


BAND EDGE Graphs

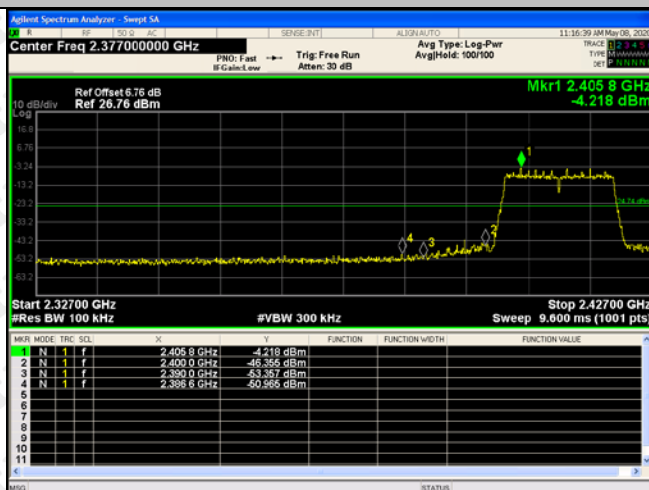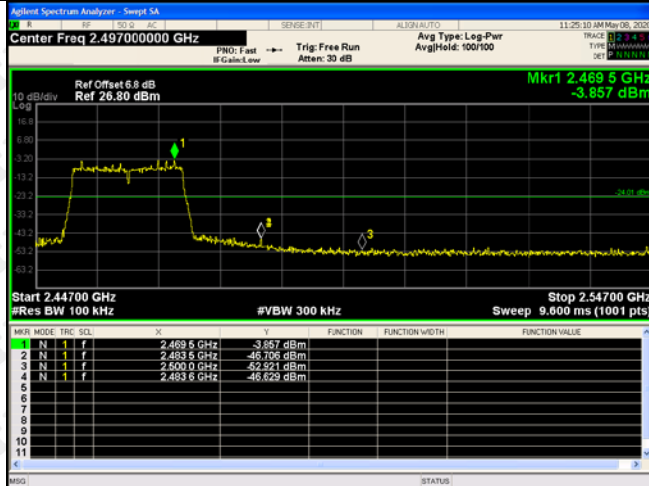
802.11n(HT20)/L
CH

802.11n(HT20)/H
CH


BAND EDGE Graphs

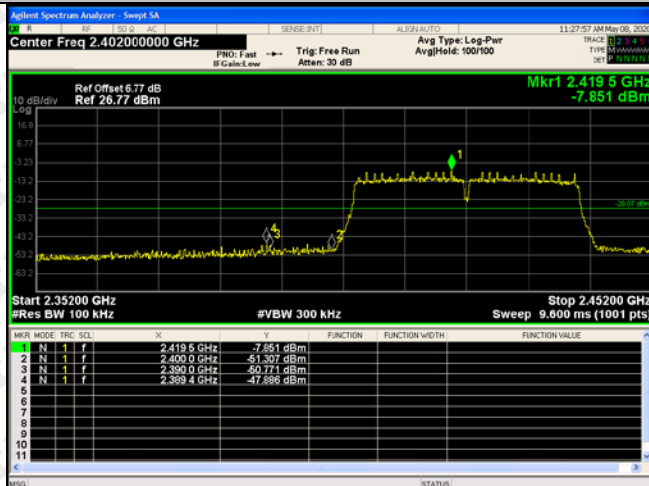802.11n(HT40)/L
CH

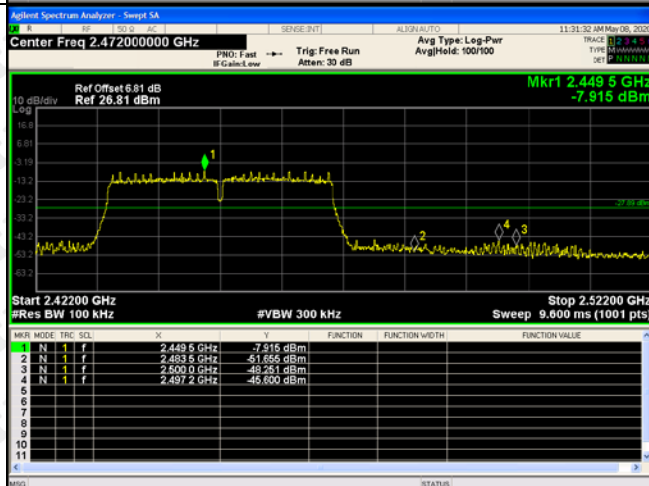

802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs

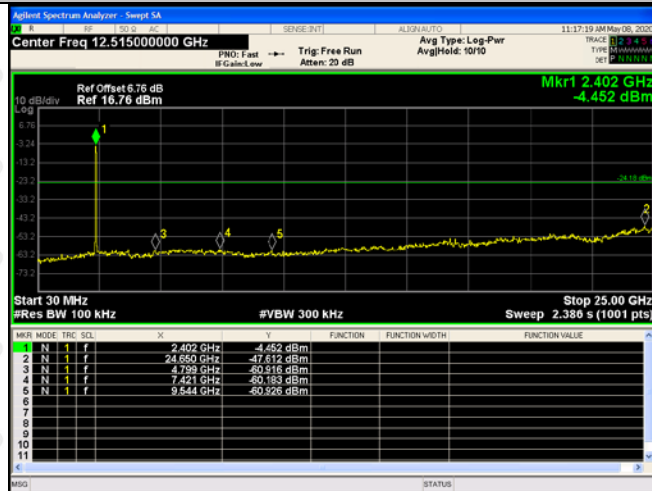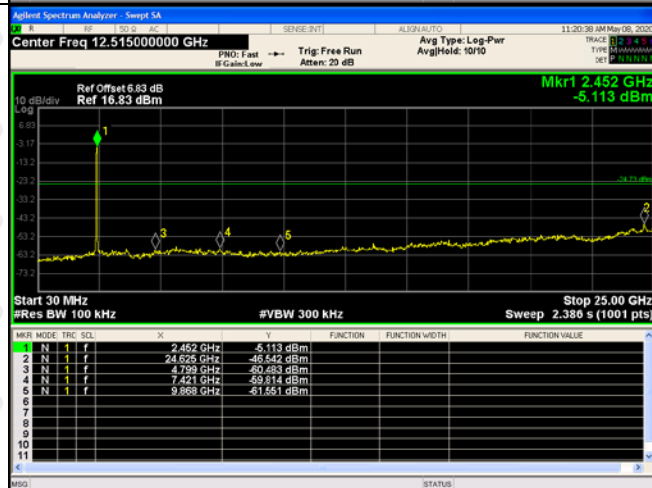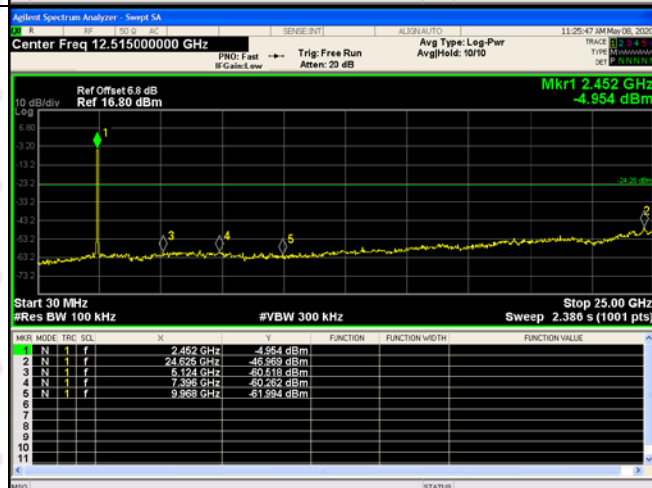
802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH

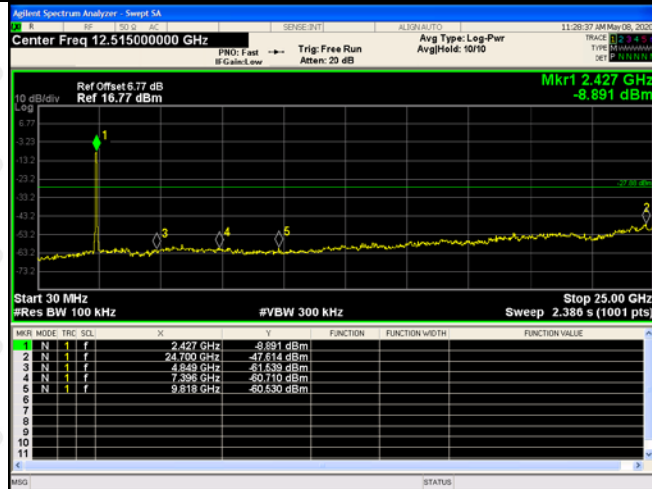
RF Conducted Spurious Emissions Graphs


802.11
n(HT40)
/LCH

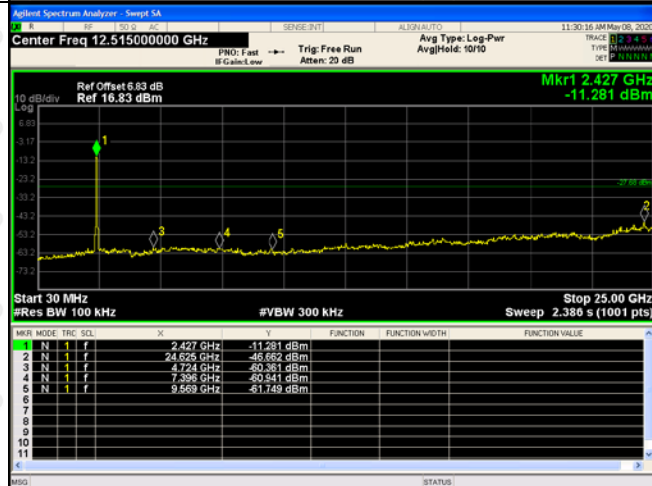

802.11
n(HT40)
/MCH




802.11
n(HT40)
/HCH

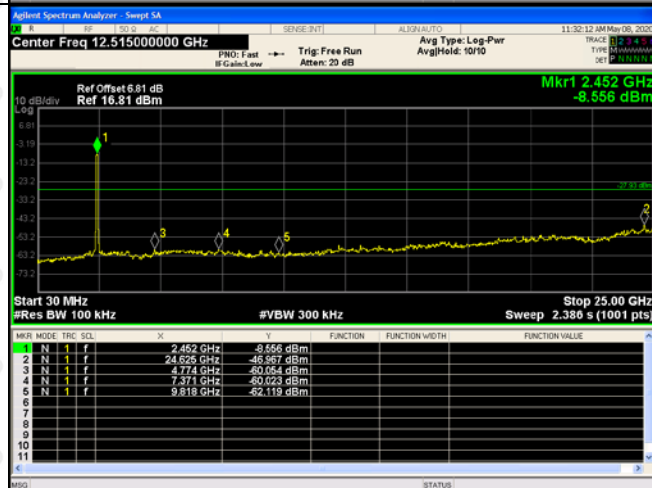

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

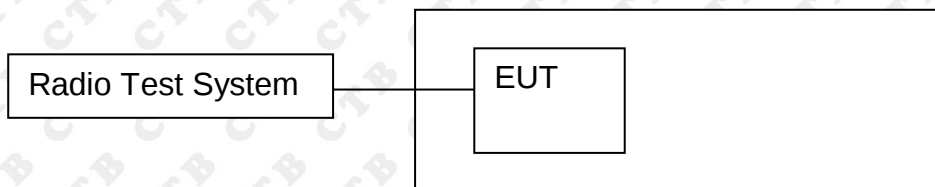

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = RMS.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

ANT 1

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	13.481	30	PASS
	MCH	13.319	30	PASS
	HCH	13.508	30	PASS
802.11g	LCH	12.718	30	PASS
	MCH	12.344	30	PASS
	HCH	12.356	30	PASS
802.11n(HT20)	LCH	11.654	30	PASS
	MCH	11.225	30	PASS
	HCH	11.519	30	PASS
802.11n(HT40)	LCH	10.522	30	PASS
	MCH	10.509	30	PASS
	HCH	10.357	30	PASS

ANT 2


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	13.525	30	PASS
	MCH	13.501	30	PASS
	HCH	13.68	30	PASS
802.11g	LCH	12.667	30	PASS
	MCH	12.437	30	PASS
	HCH	12.813	30	PASS
802.11n(HT20)	LCH	11.582	30	PASS
	MCH	11.599	30	PASS
	HCH	11.684	30	PASS
802.11n(HT40)	LCH	10.623	30	PASS
	MCH	10.616	30	PASS
	HCH	10.51	30	PASS

MIMO:ANT1+ANT 2

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	16.513	30	PASS
	MCH	16.421	30	PASS
	HCH	16.605	30	PASS
802.11g	LCH	15.703	30	PASS
	MCH	15.401	30	PASS
	HCH	15.601	30	PASS
802.11n(HT20)	LCH	14.628	30	PASS
	MCH	14.426	30	PASS
	HCH	14.613	30	PASS
802.11n(HT40)	LCH	13.583	30	PASS
	MCH	13.573	30	PASS
	HCH	13.444	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

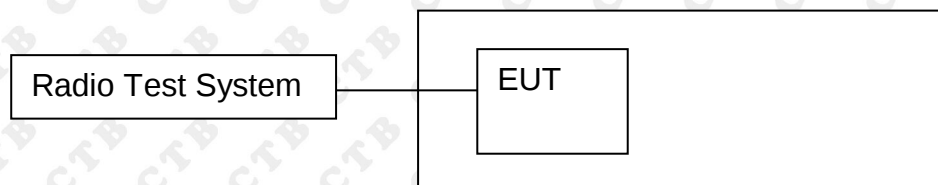

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure


1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result


Remark: This Report only show the test plots of the ANT1 worst case.

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.7013	500	PASS
	MCH	9.1545	500	PASS
	HCH	9.3658	500	PASS
802.11g	LCH	16.3908	500	PASS
	MCH	16.3767	500	PASS
	HCH	16.367	500	PASS
802.11n(HT20)	LCH	17.6595	500	PASS
	MCH	17.6745	500	PASS
	HCH	17.6089	500	PASS
802.11n(HT40)	LCH	35.0205	500	PASS
	MCH	35.124	500	PASS
	HCH	35.3366	500	PASS


Test Graph:

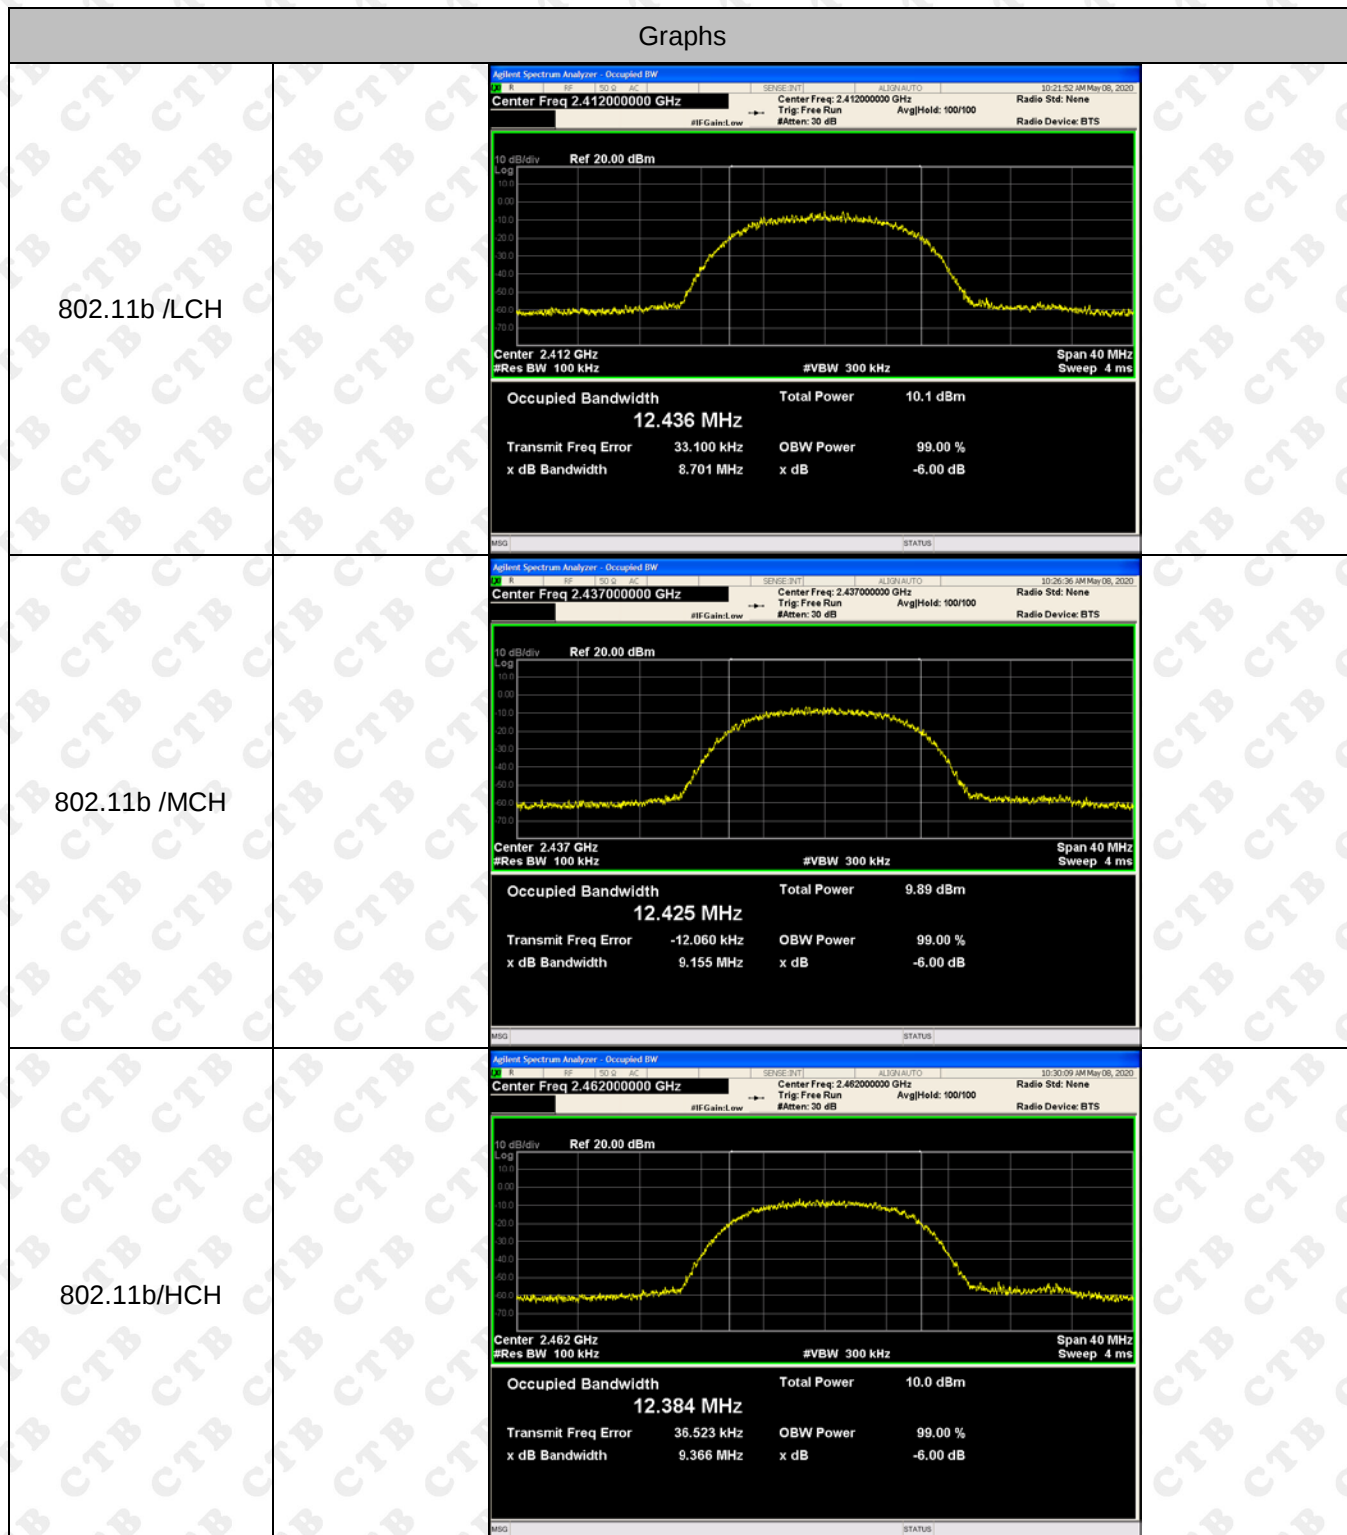


802.11g/LCH



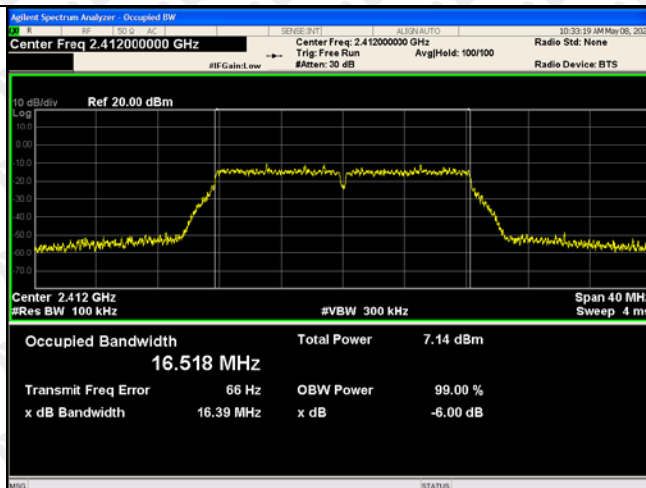





802.11g/MCH

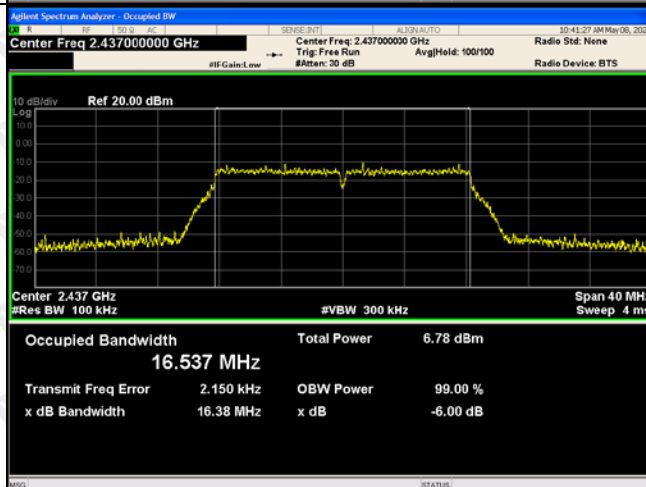

802.11g/HCH

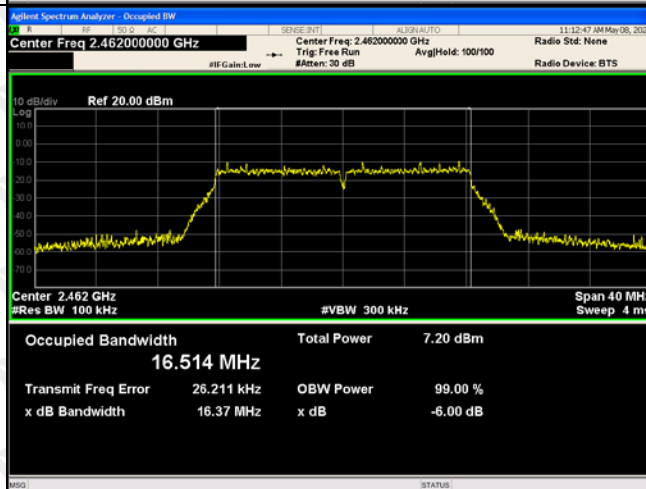


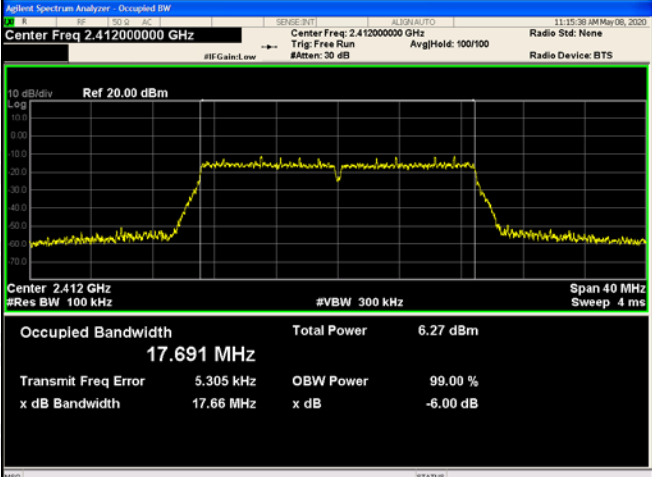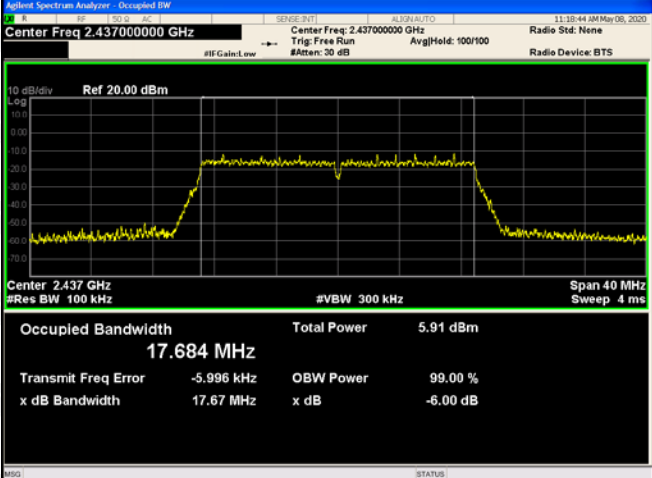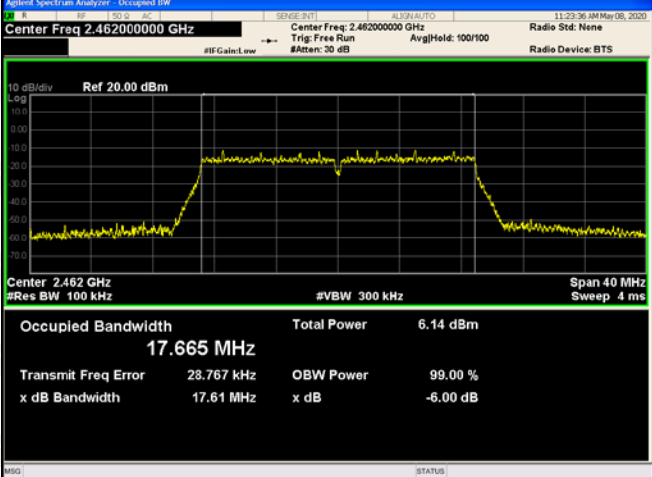802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Occupied Bandwidth: 17.691 MHz Total Power: 6.27 dBm
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Occupied Bandwidth: 17.684 MHz Total Power: 5.91 dBm
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Occupied Bandwidth: 17.665 MHz Total Power: 6.14 dBm

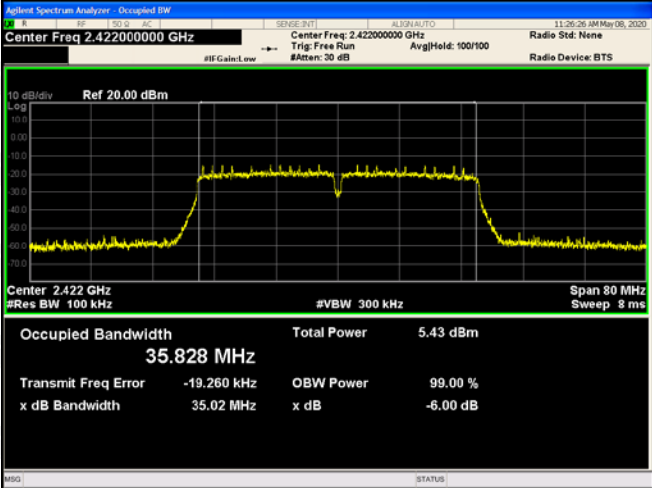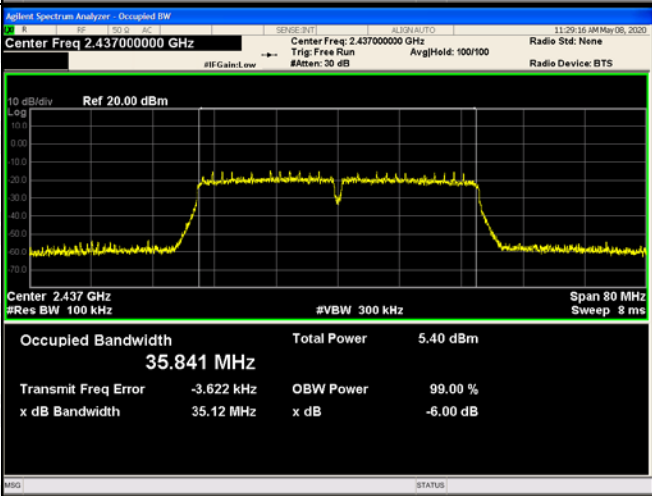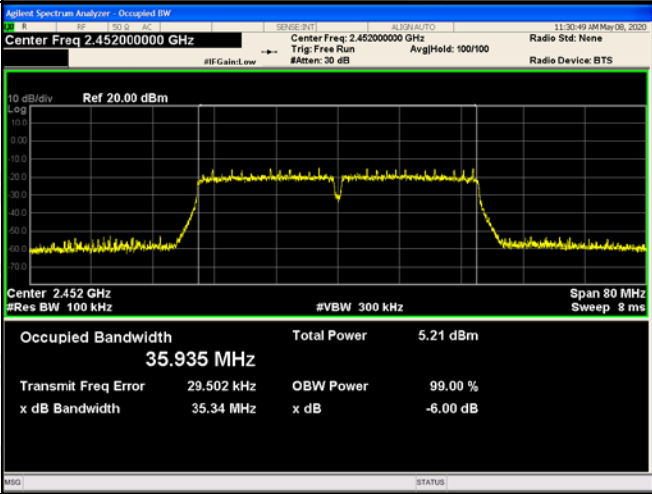802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Occupied Bandwidth: 35.828 MHz Total Power: 5.43 dBm Transmit Freq Error: -19.260 kHz x dB Bandwidth: 35.02 MHz
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Occupied Bandwidth: 35.841 MHz Total Power: 5.40 dBm Transmit Freq Error: -3.622 kHz x dB Bandwidth: 35.12 MHz
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Occupied Bandwidth: 35.935 MHz Total Power: 5.21 dBm Transmit Freq Error: 29.502 kHz x dB Bandwidth: 35.34 MHz

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

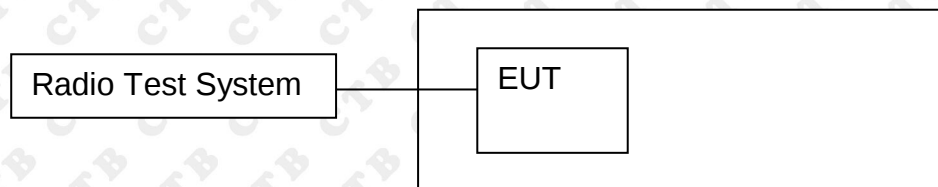

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = RMS.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

ANT 1

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(dBm)	Verdict
802.11b	LCH	-16.154	8	PASS
	MCH	-16.061	8	PASS
	HCH	-15.518	8	PASS
802.11g	LCH	-18.641	8	PASS
	MCH	-18.573	8	PASS
	HCH	-18.038	8	PASS
802.11n(H T20)	LCH	-19.313	8	PASS
	MCH	-20.49	8	PASS
	HCH	-19.17	8	PASS
802.11n(H T40)	LCH	-23.157	8	PASS
	MCH	-23.696	8	PASS
	HCH	-23.933	8	PASS

ANT 2

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(dBm)	Verdict
802.11b	LCH	-15.442	8	PASS
	MCH	-15.465	8	PASS
	HCH	-15.523	8	PASS
802.11g	LCH	-17.193	8	PASS
	MCH	-18.445	8	PASS
	HCH	-17.983	8	PASS
802.11n(H T20)	LCH	-18.938	8	PASS
	MCH	-19.728	8	PASS
	HCH	-19.924	8	PASS
802.11n(H T40)	LCH	-23.677	8	PASS
	MCH	-23.48	8	PASS
	HCH	-24.385	8	PASS

MIMO:ANT1+ANT 2


Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(dBm)	Verdict
802.11b	LCH	-12.773	8	PASS
	MCH	-12.742	8	PASS
	HCH	-12.510	8	PASS
802.11g	LCH	-14.847	8	PASS
	MCH	-15.498	8	PASS
	HCH	-15.000	8	PASS
802.11n(H T20)	LCH	-16.111	8	PASS
	MCH	-17.082	8	PASS
	HCH	-16.520	8	PASS
802.11n(H T40)	LCH	-20.399	8	PASS
	MCH	-20.576	8	PASS
	HCH	-21.143	8	PASS

Test Graph


ANT 1

Graphs


802.11b /LCH



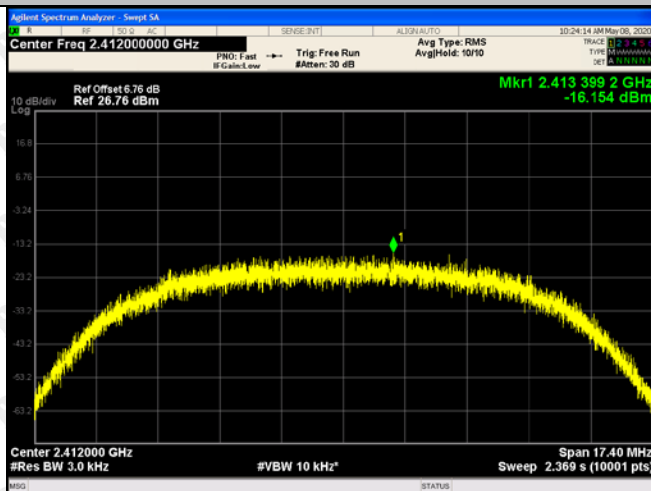





802.11b /MCH



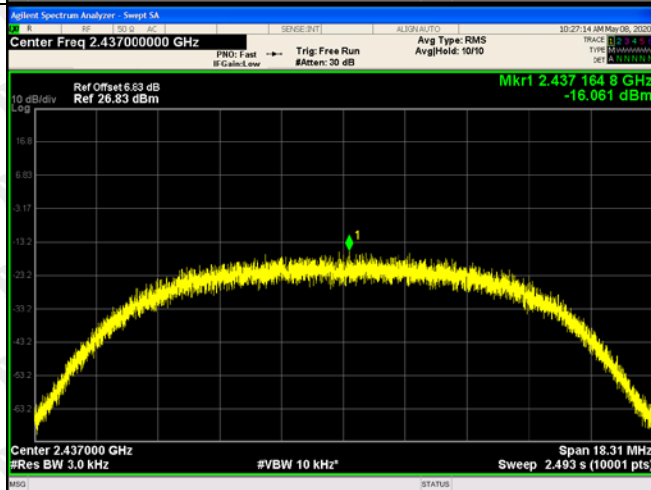


802.11b/HCH

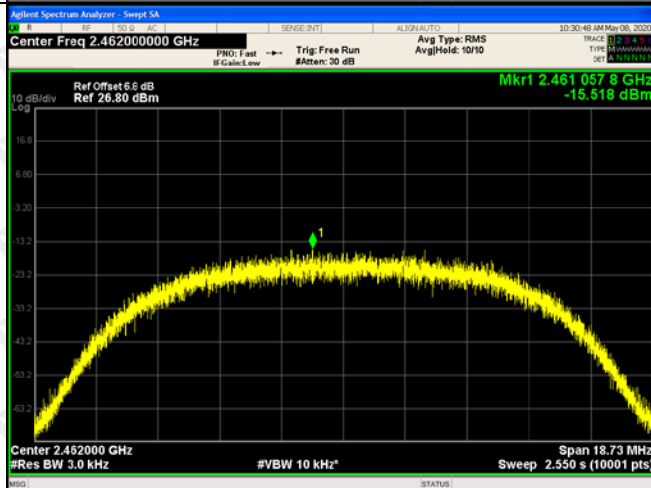


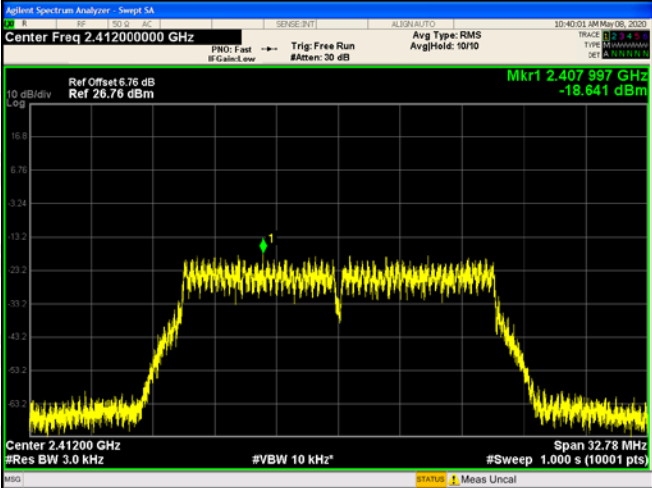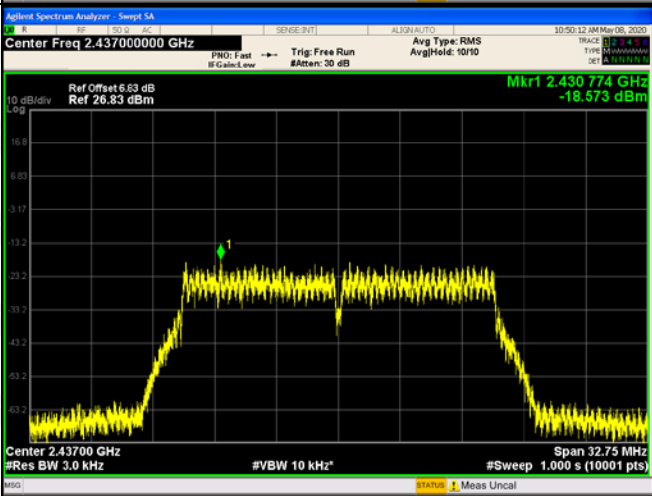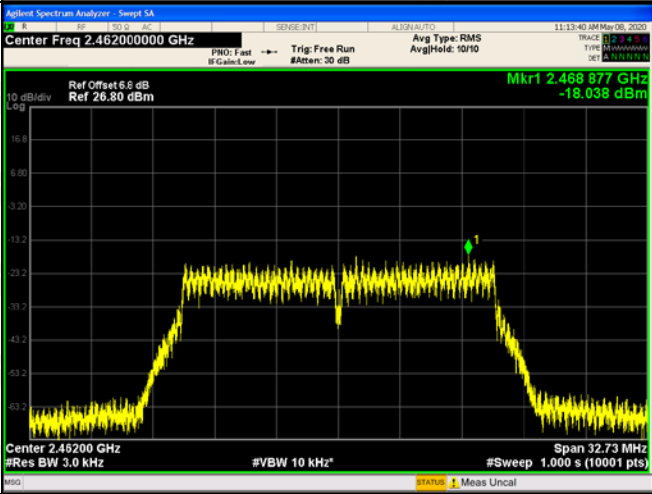802.11g/LCH	
802.11g/MCH	
802.11g/HCH	

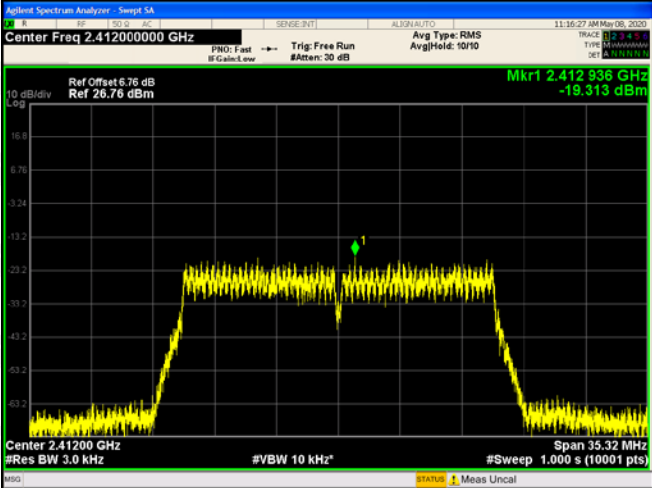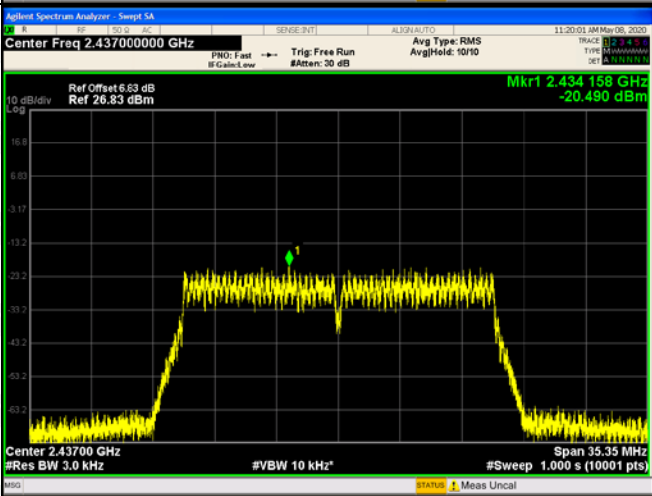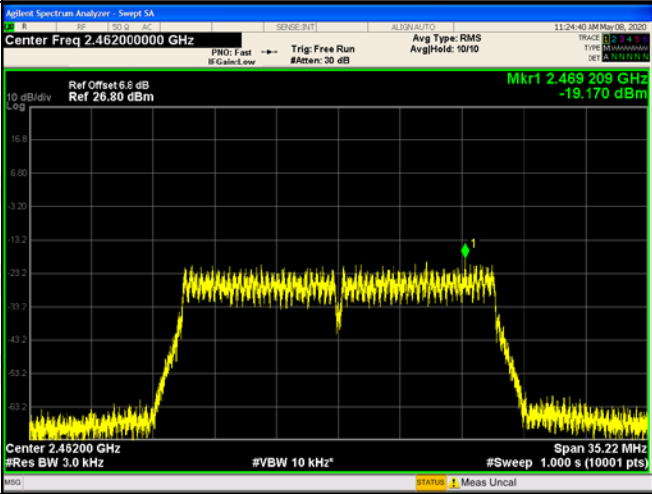
802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

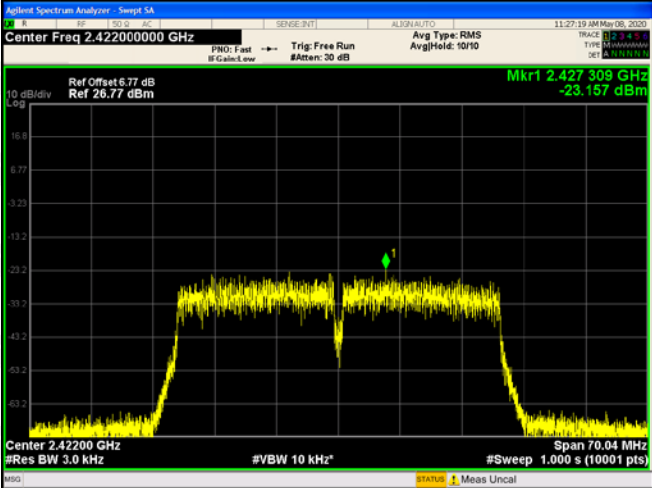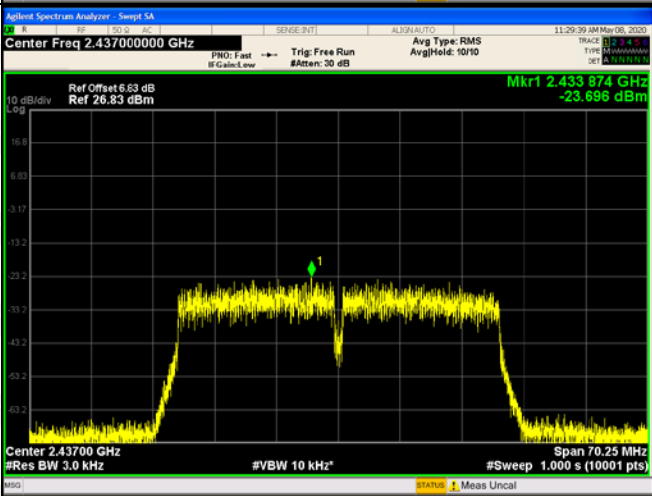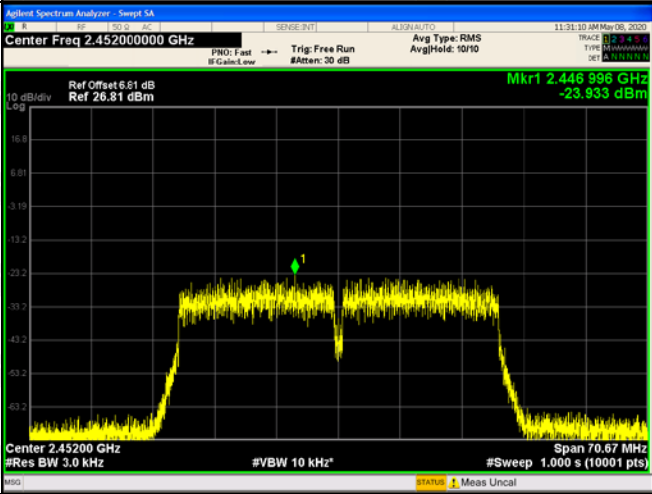802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	


ANT 2

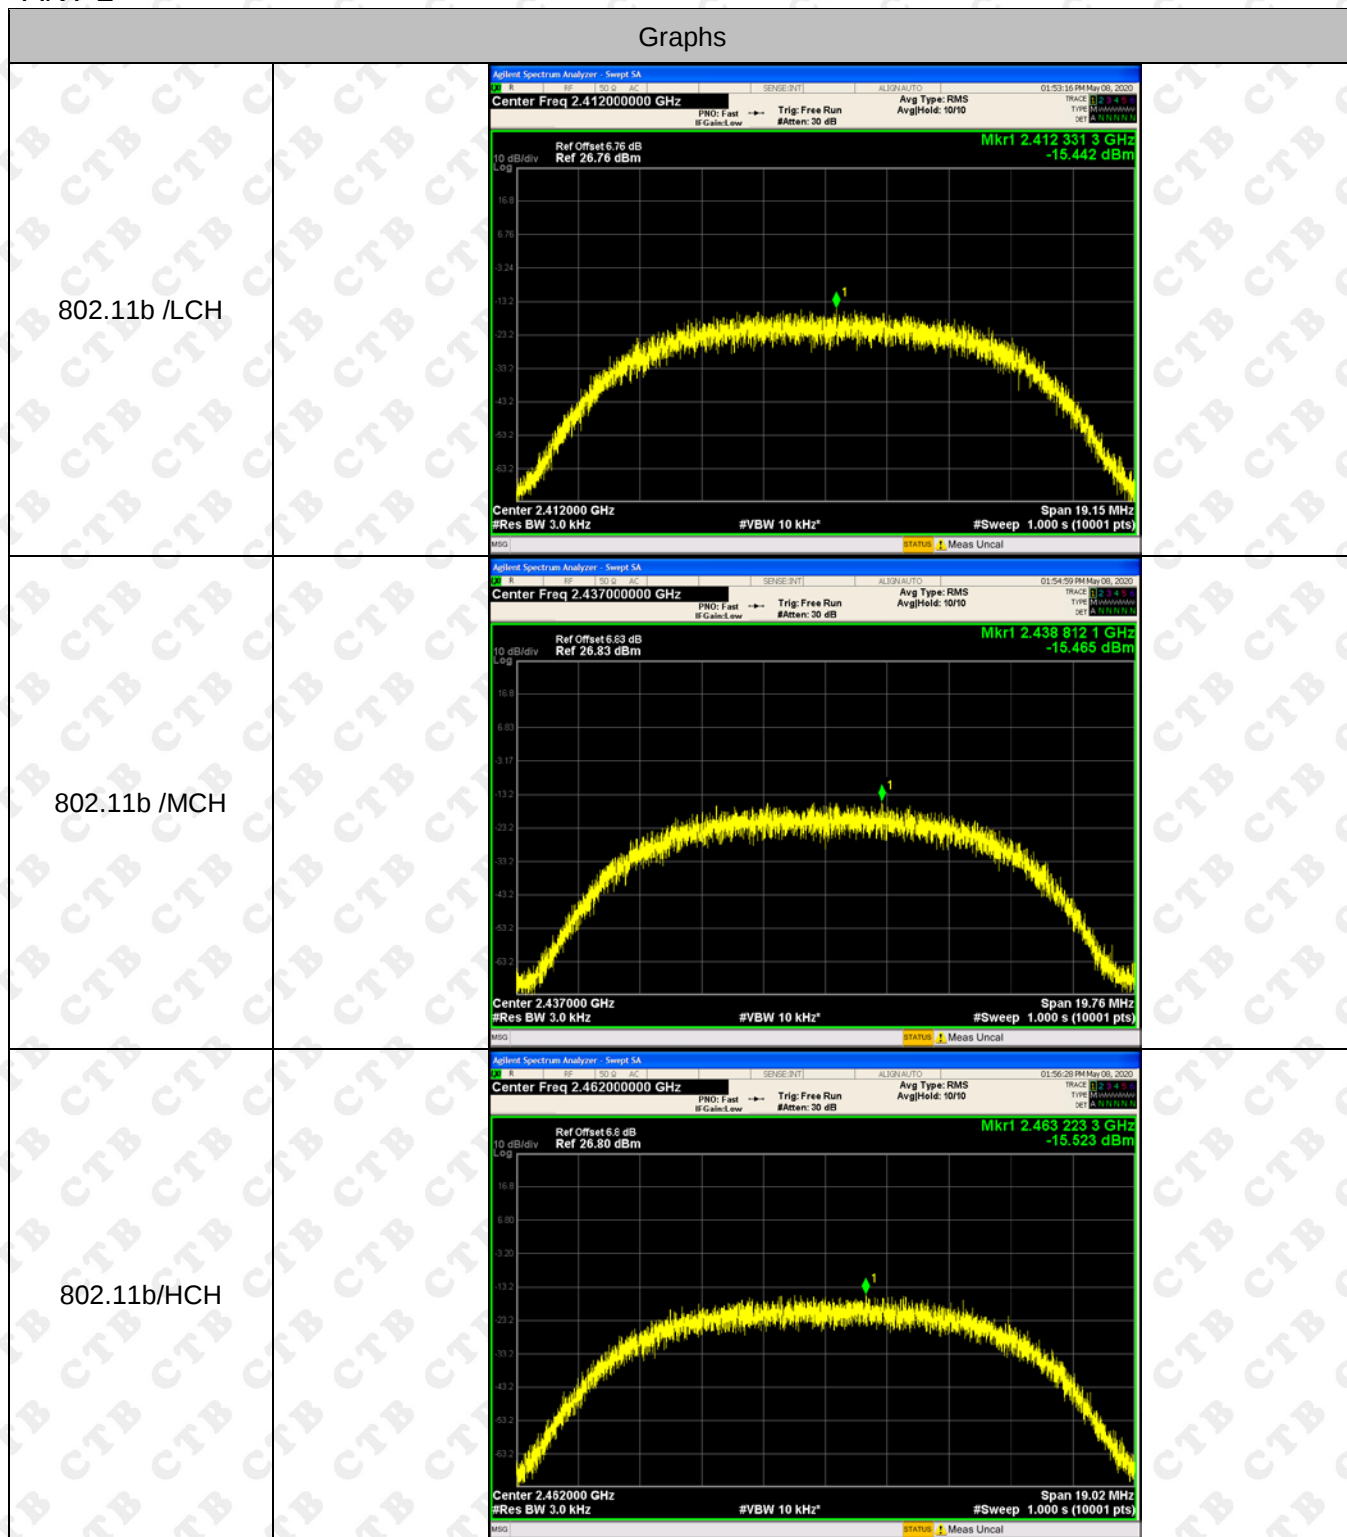


802.11g/LCH



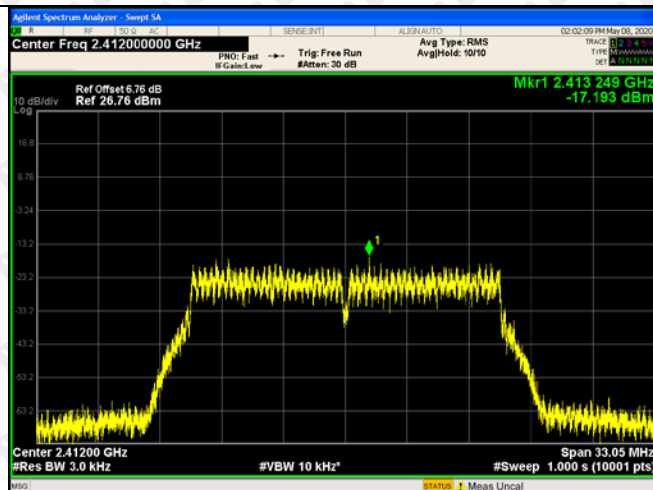





802.11g/MCH

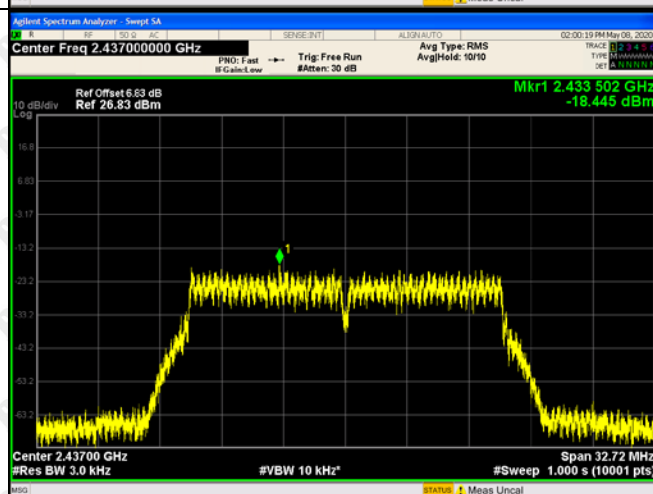

802.11g/HCH

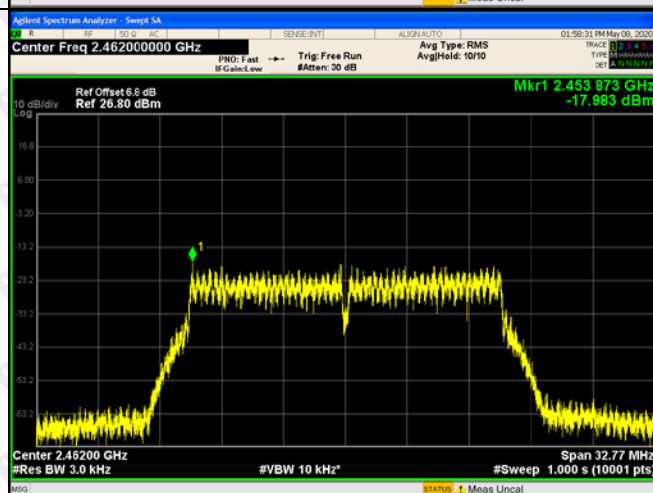

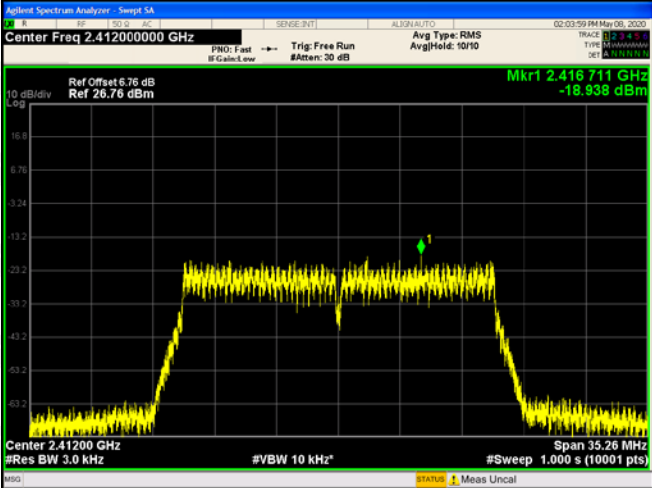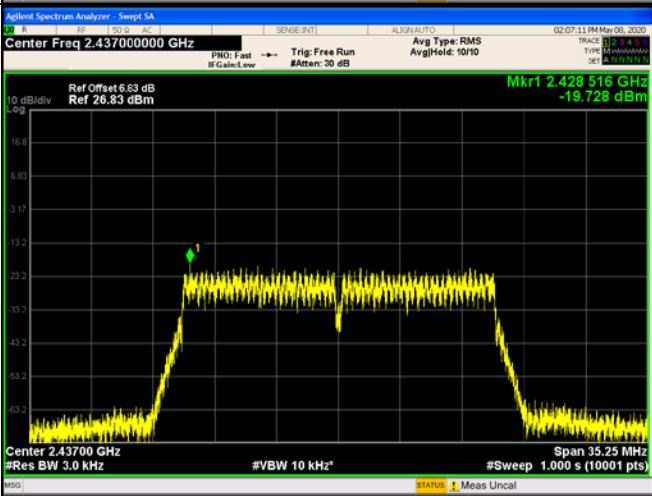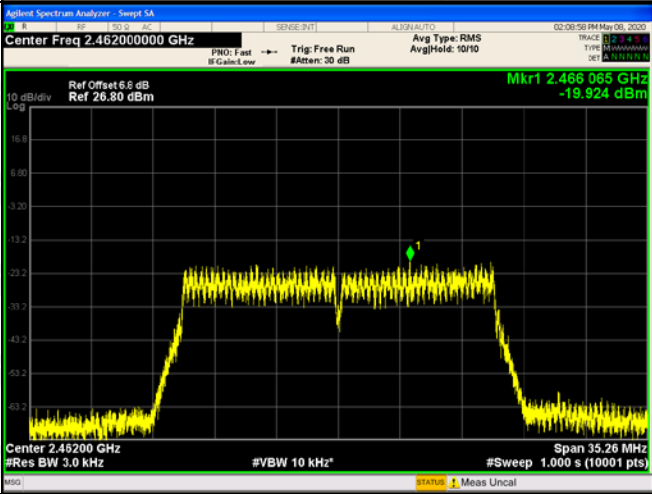802.11n(HT20)/LC H	
802.11n(HT20)/MC H	
802.11n(HT20)/HC H	

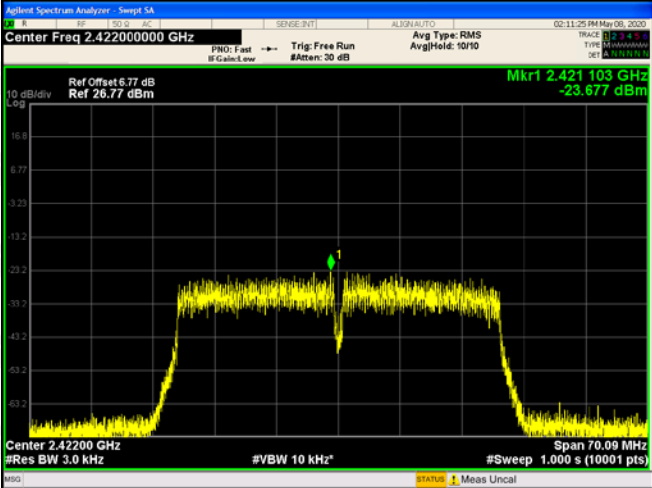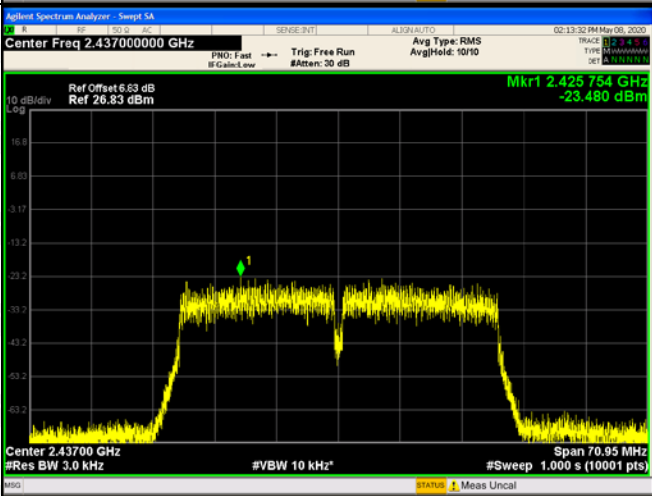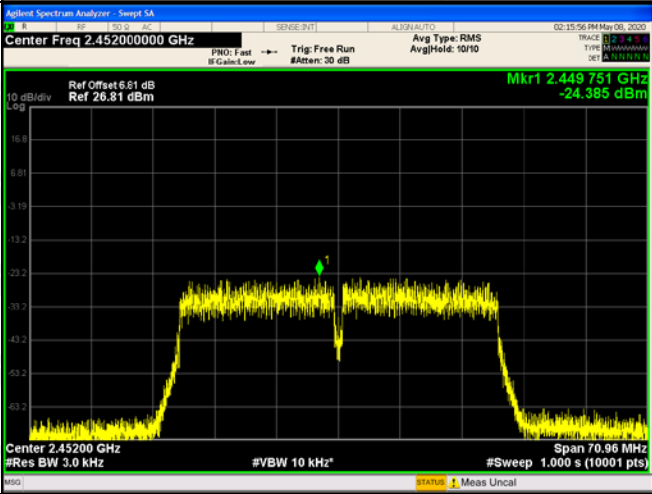802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.77 dB Ref 26.77 dBm Mkr1 2.421 103 GHz -23.677 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 70.09 MHz #Sweep 1.000 s (10001 pts) STATUS Meas Uncal
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.63 dB Ref 26.83 dBm Mkr1 2.425 754 GHz -23.480 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 70.05 MHz #Sweep 1.000 s (10001 pts) STATUS Meas Uncal
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.61 dB Ref 26.81 dBm Mkr1 2.449 751 GHz -24.385 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 70.96 MHz #Sweep 1.000 s (10001 pts) STATUS Meas Uncal

12. ANTENNA REQUIREMENT

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is External Antenna and no consideration of replacement. The best case gain of the antenna is 5dBi.

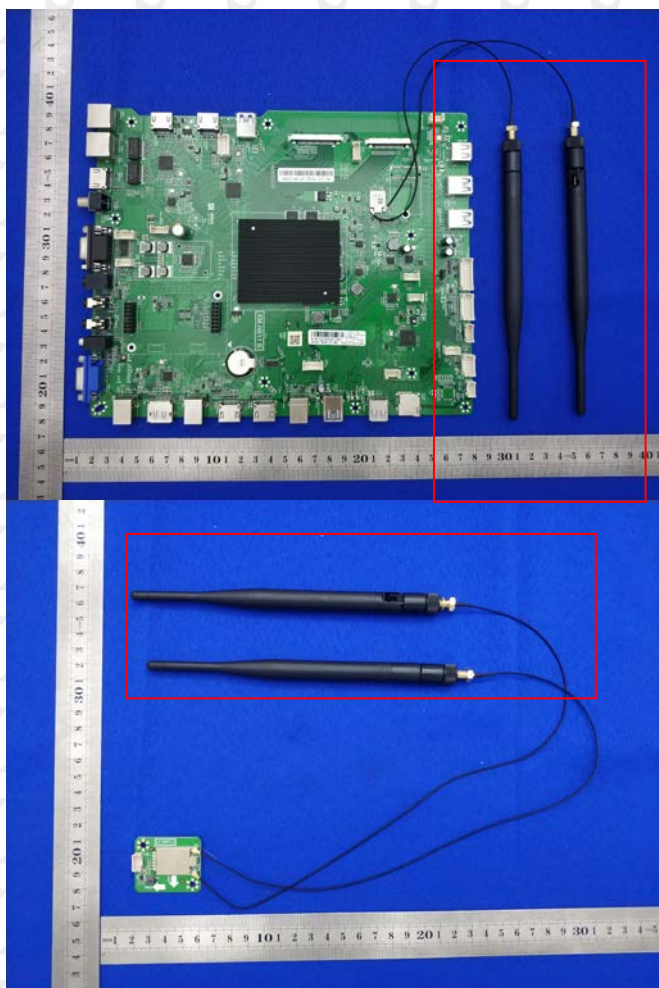


13. EUT PHOTOGRAPHS


EUT Photo 1

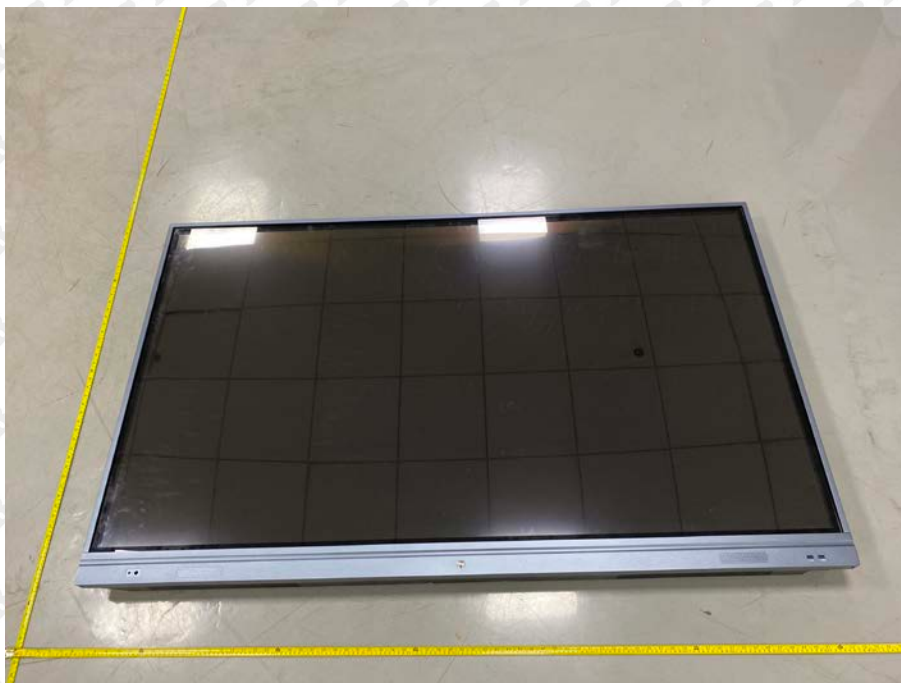

EUT Photo 2

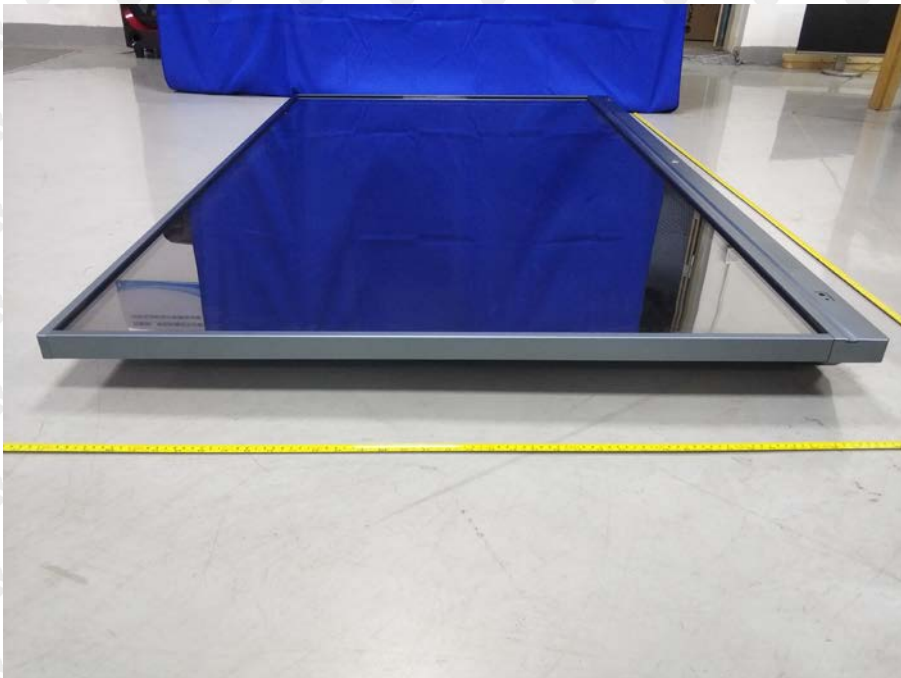


EUT Photo 3**EUT Photo 4**

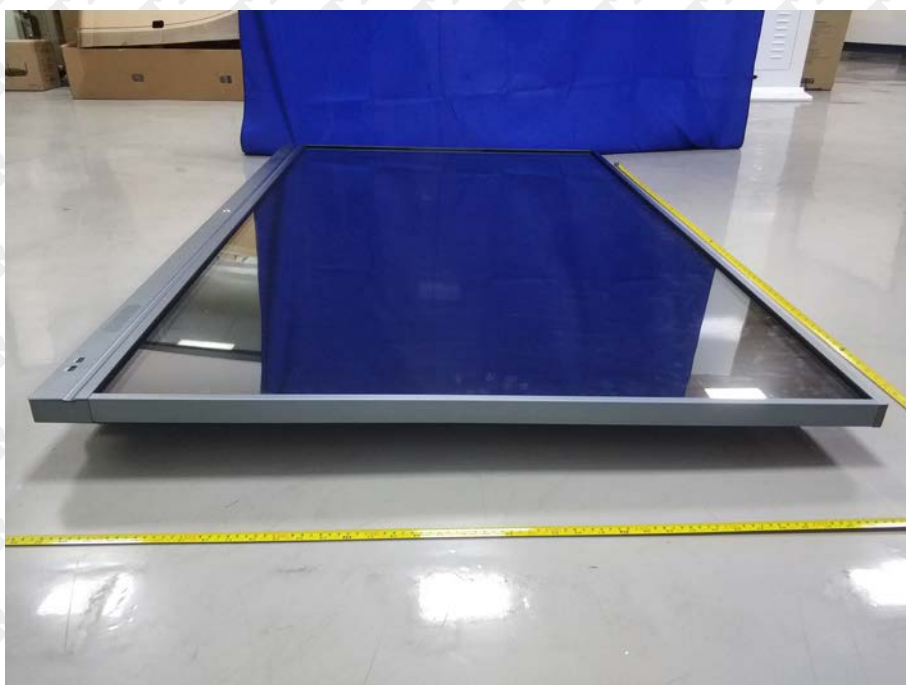EUT Photo 5**EUT Photo 6**

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

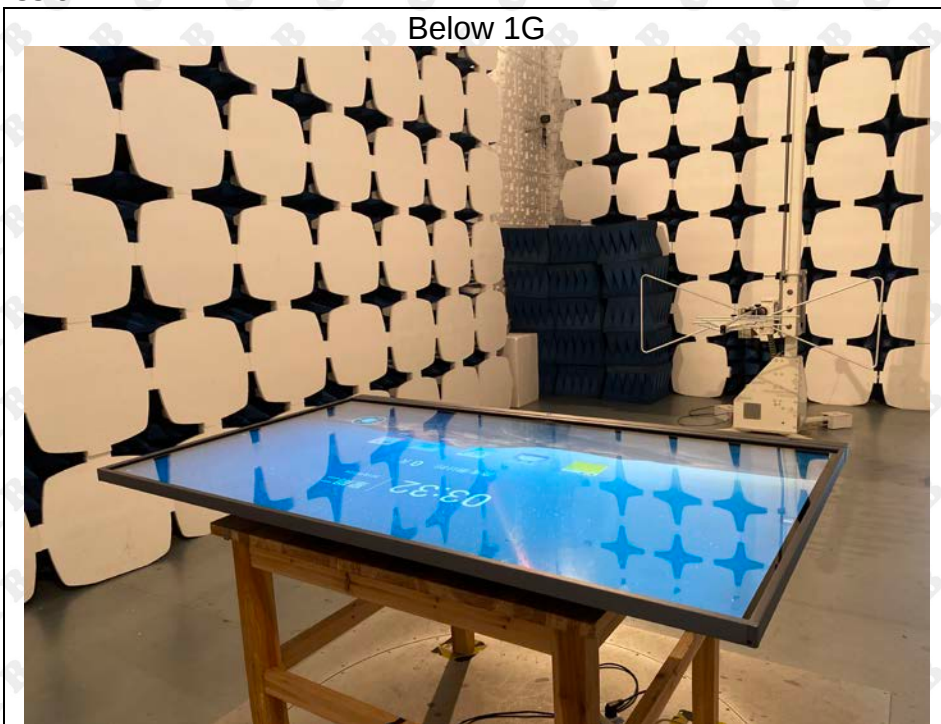

Above 1G



Conducted Emission



***** END OF REPORT *****