



Test Report - FCC PART 90

Applicant: STORMQUANT

Signature:

A handwritten signature of Tim Royer.

Sr. EMC Engineer
EMC-003838-NE

Name & Title:

Tim Royer, Lab Manager

Date of Signature

01/29/2025

Signature:

A handwritten signature of Fouzia Syed.

Name & Title:

Fouzia Syed, Senior Test Engineer

Date of Signature

01/29/2025

This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1. APPLICANT INFORMATION.....	3
1.1 PART 90 TEST RESULT SUMMARY	3
2. LOCATION OF TESTING.....	4
2.1 TEST LABORATORY	4
3. TEST SAMPLE(S) (EUT/DUT).....	4
3.1 DESCRIPTION OF THE EUT.....	5
3.2 CONFIGURATION OF EUT.....	6
3.3 TEST SETUP OF EUT.....	6
4. TEST METHODS & APPLICABLE REGULATORY LIMITS.....	7
4.1 TEST METHODS/STANDARDS/GUIDANCE:	7
4.2 APPLIED LIMITS AND REGULATORY LIMITS:.....	7
5. MEASUREMENT UNCERTAINTY.....	7
6. ENVIRONMENTAL CONDITIONS	7
6.1 TEMPERATURE & HUMIDITY.....	7
7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....	8
7.1 LIST OF TEST EQUIPMENT	8
8. TEST RESULTS	9
8.1 POWER AT THE FINAL AMPLIFIER.....	10
8.2 RF OUTPUT POWER	11
8.3 BANDWIDTH & EMISSION.....	12
8.3.1 <i>Test Data: Measurement Table</i>	13
8.3.2 <i>Test Data: 100 uS, 99% OBW Plot</i>	14
8.3.3 <i>Test Data: 1600 uS, 99% OBW Plot</i>	15
8.4 EMISSION LIMITATIONS, IN-BAND.....	16
8.4.1 <i>Emission Mask, 9344 MHz, 0.8us</i>	17
8.5 EMISSION LIMITATIONS, OUT-OF-BAND	18
8.5.1 <i>Conducted Emissions, Below 1 GHz, 9344 MHz</i>	19
8.5.2 <i>Conducted Emissions, Above 1 GHz, 9344 MHz</i>	20
8.6 RADIATED EMISSIONS.....	21
8.6.1 <i>Radiated Emissions, 9344 MHz</i>	22
8.7 MODULATION CHARACTERISTICS.....	23
8.8 FREQUENCY STABILITY.....	24
8.8.1 <i>Frequency Stability Data</i>	25
8.8.2 <i>Frequency Stability Plot</i>	26
8.9 TRANSIENT FREQUENCY BEHAVIOR.....	27
8.10 ADJACENT CHANNEL POWER LIMITS	28
9. ANNEX-B – TEST SETUP PHOTOGRAPHS	29
10. HISTORY OF TEST REPORT CHANGES.....	29

1. Applicant Information

Applicant: STORMQUANT
 Address: 1431 Chaffee Drive Suite 1
 Titusville FL 32780

1.1 Part 90 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 90 (PRIVATE LAND MOBILE RADIO SERVICES) known as Licensed Land Mobile; ANSI C63.26-2015. Full test results are available in this report.

Applicable Clauses from Part 2		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.202	Bandwidth & Emission	Pass
2.1033 (c)(8)	Power at the Final Amplifier	Reported
2.1046 (a)	RF Output Power	Pass
2.1047	Modulation characteristics	n/a
2.1049	Occupied Bandwidth	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass
2.1055	Frequency stability	Pass

Applicable Clauses from Part 90		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
90.205 (r)	Transmitter Power	Pass
90.207 (n)	Emission designator	Reported
90.209 (b) (5) footnote 2	Bandwidth limitations	Pass
90.210 (n)	Emission masks, In-band	Pass
90.210 (n)	Emission masks, Out-of-band	Pass
90.213 (a) footnote 10	Frequency stability	Pass
90.214	Transient Frequency Behavior	n/a
90.221	Adjacent channel power limits	n/a

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. IIA Lab Services LLC does not offer opinions and interpretations, only a pass/fail statement.

2. Location of Testing

2.1 Test Laboratory

IIA Lab Services LLC. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at IIA's permanent laboratory located at 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615.

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

3. Test Sample(s) (EUT/DUT)

The test sample was received: 11/13/2024

Dates of Testing: 11/13/2024 – 11/22/2024

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	2AV9O-BATV1
Brief Description	Weather Radar
Model(s) #	200AA
Firmware version	BRD108-0002; FPGA-0011; TMS-0004
Software version	4.0.0
Serial Number	24-28-000

Technical Characteristics	
Technology	Radar
Frequency Range	9344 MHz
Modulation	Pulse
Bandwidth & Emission Class	PON
Antenna Connector	Waveguide
Voltage Rating (AC or Batt.)	110V AC

Antenna Characteristics	
Frequency Range	Antenna Gain
9344 MHz	33.7

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.

3.2 Configuration of EUT

Test Modes				
Mode (#)	Mode (Type)	Test Frequencies (MHz)	BW (nominal) (MHz)	Emission Designator
1	Transmit	9344	12.85	PON

Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

A laptop was used to program the EUT.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 90 Licensed device:

- 1) ANSI C63.26-2015

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 90

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB

Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	9/1/2024	9/1/2027
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	5/31/23	5/30/2026
CHAMBER	CHAMBER	Panashield	3M	N/A	12/29/23	12/18/2025
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/22	7/26/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	9/18/24	9/18/2027
Function Generator	Function Generator	Standford	DS340	25200	2/22/2024	02/21/2027
Thermometer	Type K J Thermometer	Martel	303	080504494	1/16/23	1/15/2026
Signal Generator	Signal Generator HP 8648C	HP	8648C	3847A04696	8/4/22	8/03/2025
Antenna	Biconical 1057	Eaton	94455-1	1057	9/1/2024	9/1/2027

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	IIA	v4.10.7.0	2016

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	= 30.36 dB μ V/m @ 3m

$$\text{EIRP} = \text{Pcond (dBm)} + \text{dBi}$$


8.1 Power at the Final Amplifier

Limits from FCC Part 2.1033 (c)(8). No method of measurement is specified.

Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
110v AV	20 A	2200 W

8.2 RF Output Power

Limits from FCC Parts 2.1046(a), and 90.205 (r); and test procedure from ANSI C63.26-2015.

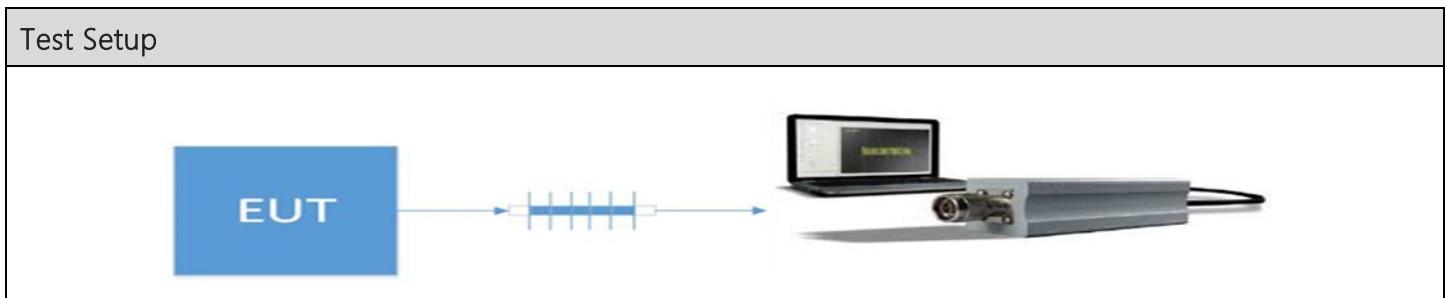

Tuned Frequency (MHZ)	DC (%)	Peak Power (dBm)	Peak Power (W)	Mean power (W)
9375	10%	62.37	1725.84	172.584


Note: The mean power was calculated based on formula:

$$Pa = Pm * DC$$

8.3 Bandwidth & Emission

Limits from FCC Parts 2.1049, and 90.207 & 90.209, and test procedure from ANSI C63.26-2015.

Test Setup



Test Results, Authorized Bandwidth

Rule Part	Operating Range (MHz)	Authorized Bandwidth (kHz)
Part 90	9344 MHz	200 MHz


Occupied Bandwidth, Spectrum Plots

8.3.1 Test Data: Measurement Table, Occupied Bandwidth

Test Results, Occupied Bandwidth				
Mode	Tuned Frequency (MHz)	Emission Designator	Occupied Bandwidth (MHz)	Bandwidth Type
100 uS	9344	PON	6.05	99%
1600 uS	9344	PON	5.95	99%

OCCUPIED BANDWIDTH


8.3.2 Test Data: 100 uS, 99% OBW Plot

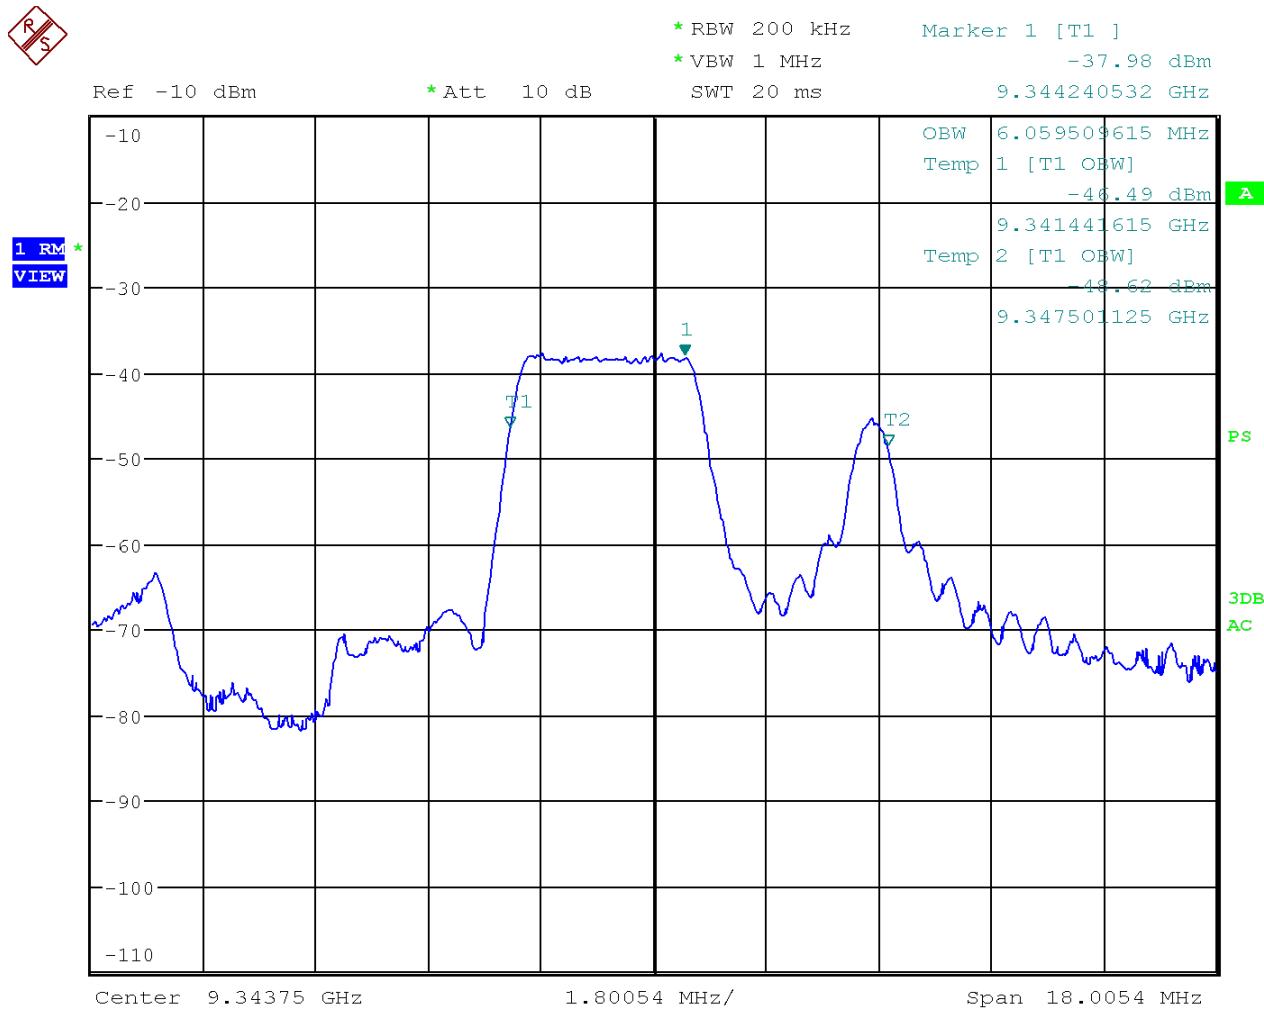

Date: 13.NOV.2024 10:59:51

OCCUPIED BANDWIDTH

8.3.1 Test Data: 1600 uS, 99% OBW Plot

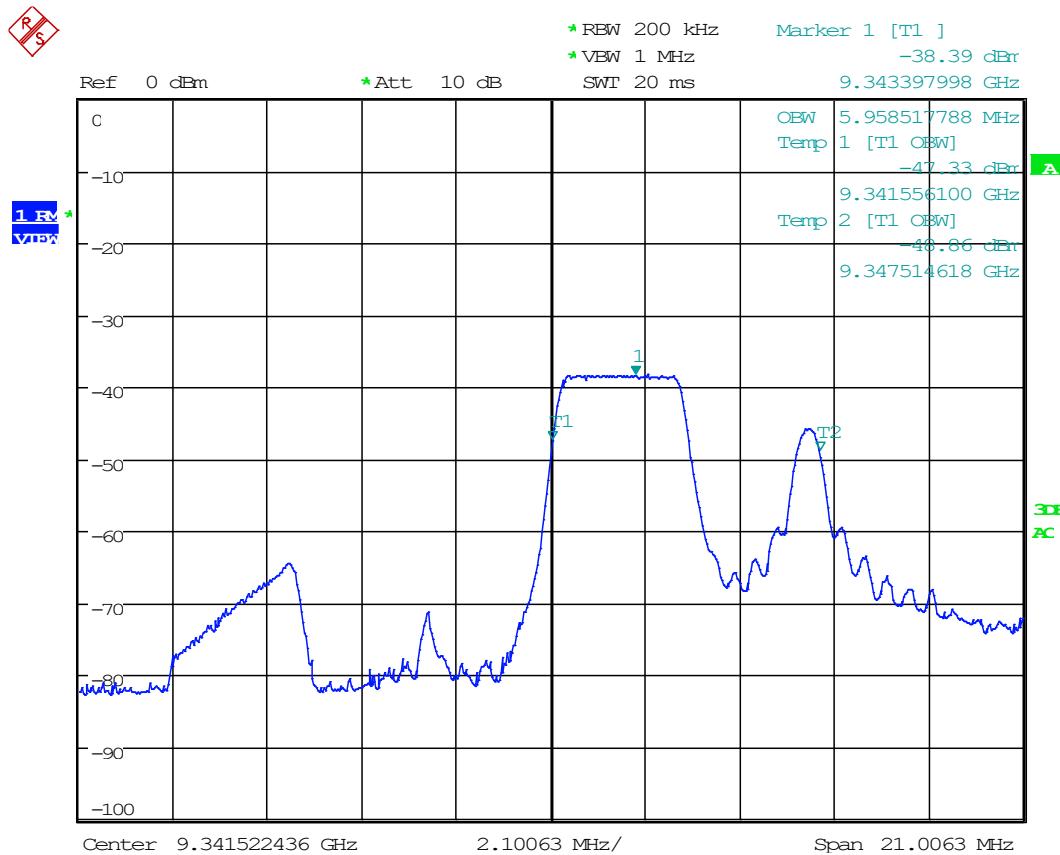


Date: 13.NOV.2024 11:41:43

OCCUPIED BANDWIDTH


8.4 Emission Limitations, In-Band

Limits from FCC Part 90.210; and test procedure from ANSI C63.26-2015.

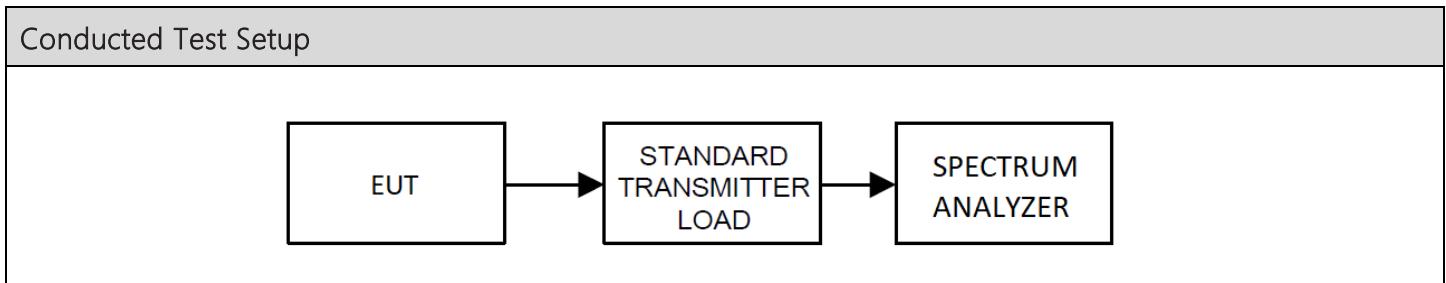

Conducted Emissions Mask, Spectrum Plots


8.4.1 Emission Mask, 9344 MHz, 0.8us

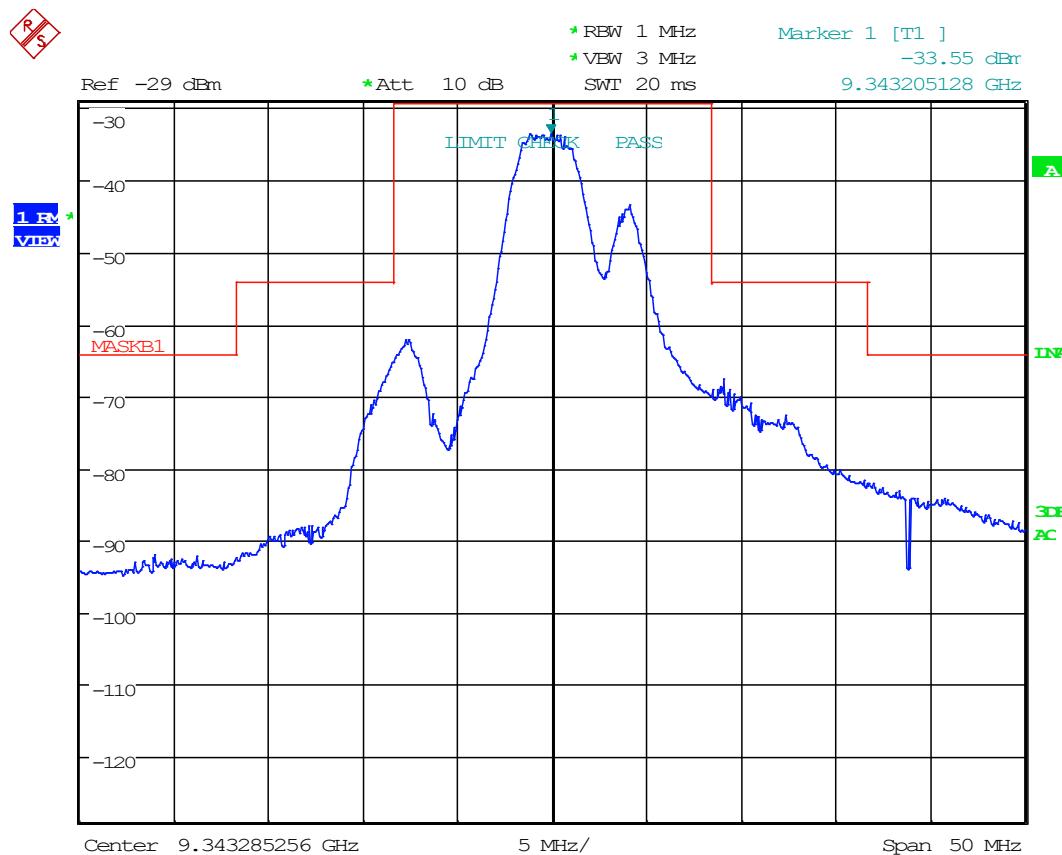

Date: 13.NOV.2024 12:16:14


8.5 Emission Limitations, Out-of-Band

Limits from FCC Parts 2.1051, and 90.210; and test procedure from ANSI C63.26-2015.

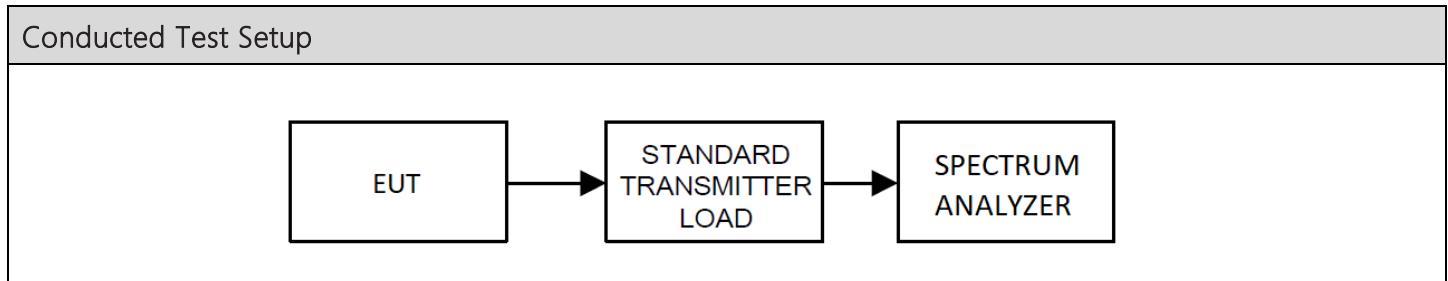


Conducted Emissions Spectrum Plots

8.5.1 Conducted Emissions, Below 1 GHz, 9344 MHz

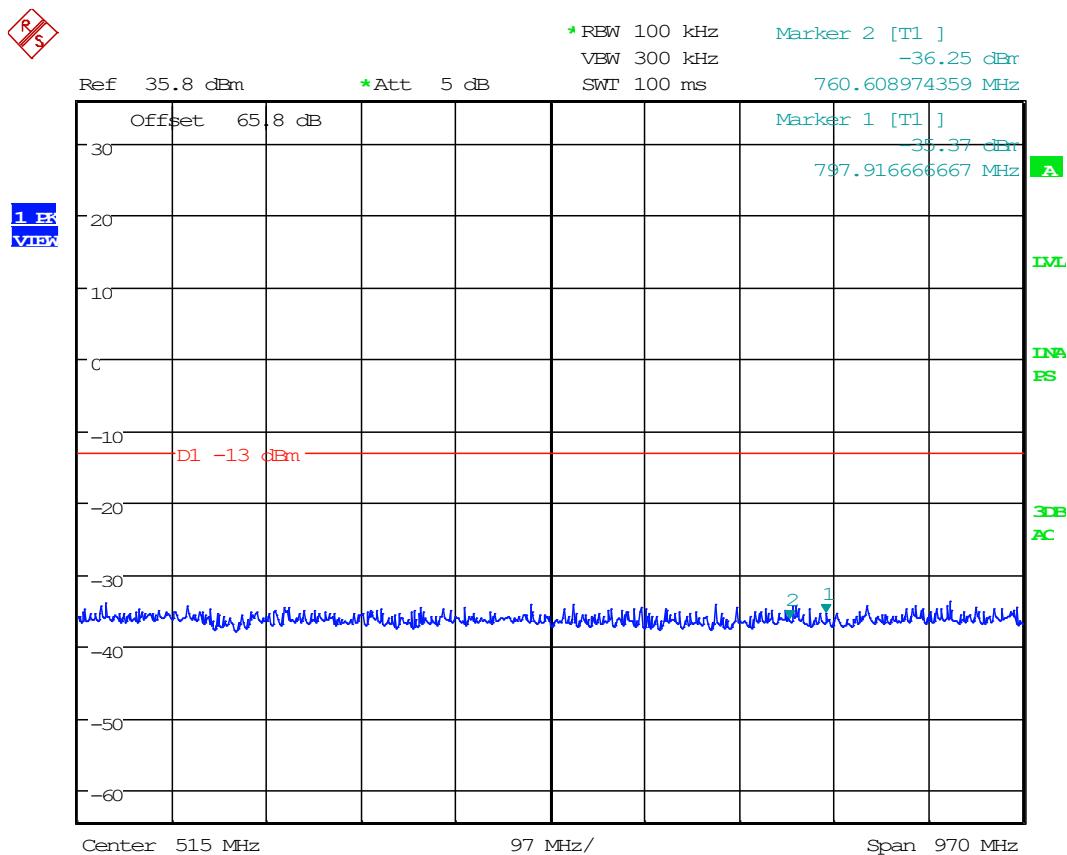

Date: 13.NOV.2024 11:07:51

8.5.2 Conducted Emissions, Above 1 GHz, 9344 MHz

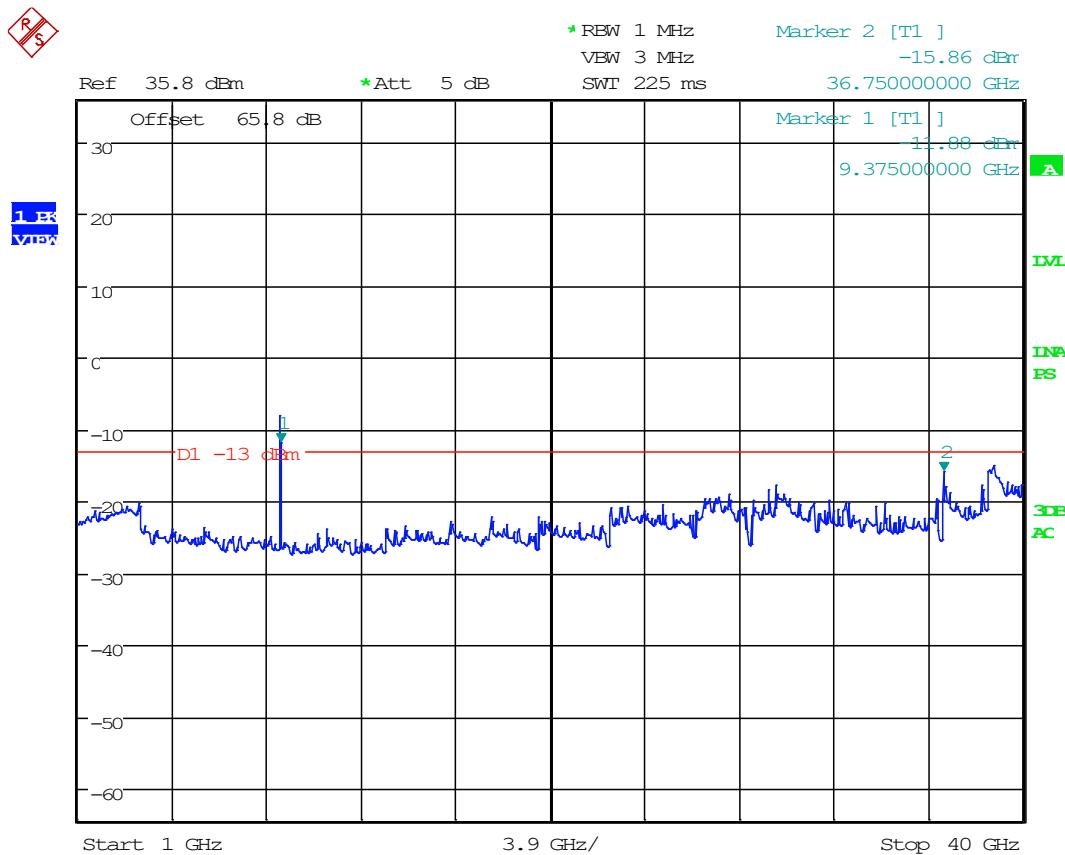


Date: 13.NOV.2024 11:08:58


8.6 Radiated Emissions

Limits from FCC Parts 2.1053 and 90.210 (n); and test procedure from ANSI C63.26-2015.

Radiated Test Setup, 30 – 1000 MHz

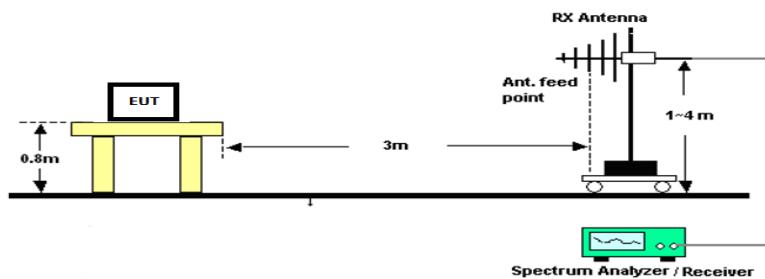

Radiated Test Setup, Above 1000 MHz

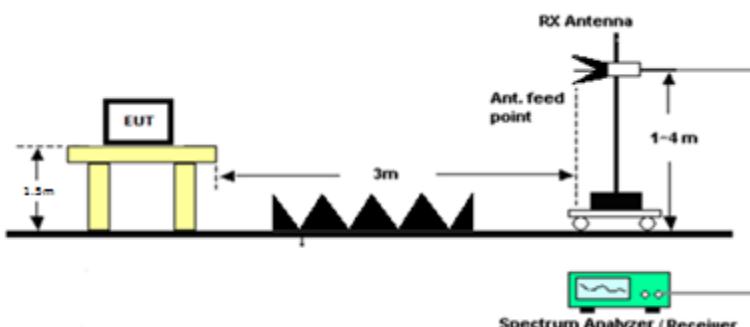


Radiated Emissions, Tabular Data

8.6.1 Radiated Emissions, 9344 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dB μ V/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
9344.00	18688.00	PK	14.23	H	-0.63	27.00	3.00	40.60	-56.78	-13.00	43.78
9344.00	18688.00	PK	21.88	V	-0.63	27.00	3.00	48.25	-49.13	-13.00	36.13
9344.00	28032.00	PK	17.88	H	-0.63	27.00	3.00	44.25	-53.13	-13.00	40.13
9344.00	28032.00	PK	17.12	V	-0.63	27.00	3.00	43.49	-53.89	-13.00	40.89
9344.00	37376.00	PK	18.51	H	-0.63	27.00	3.00	44.88	-52.50	-13.00	39.50
9344.00	37376.00	PK	18.03	V	-0.63	27.00	3.00	44.40	-52.98	-13.00	39.98

8.7 Modulation Characteristics


Limits from FCC Parts 2.1047 and test procedure from ANSI C63.26-2015

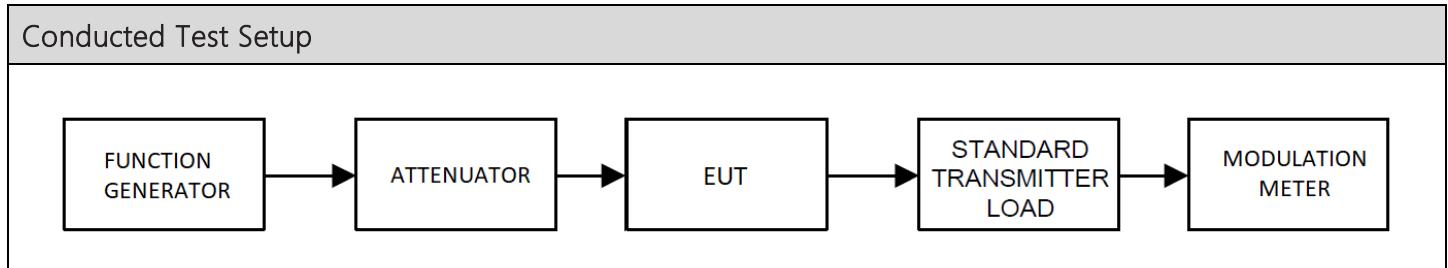

N/A

8.8 Frequency Stability

Limits from FCC Parts 2.1055, and 90.213; and test procedure from ANSI C63.26-2015.

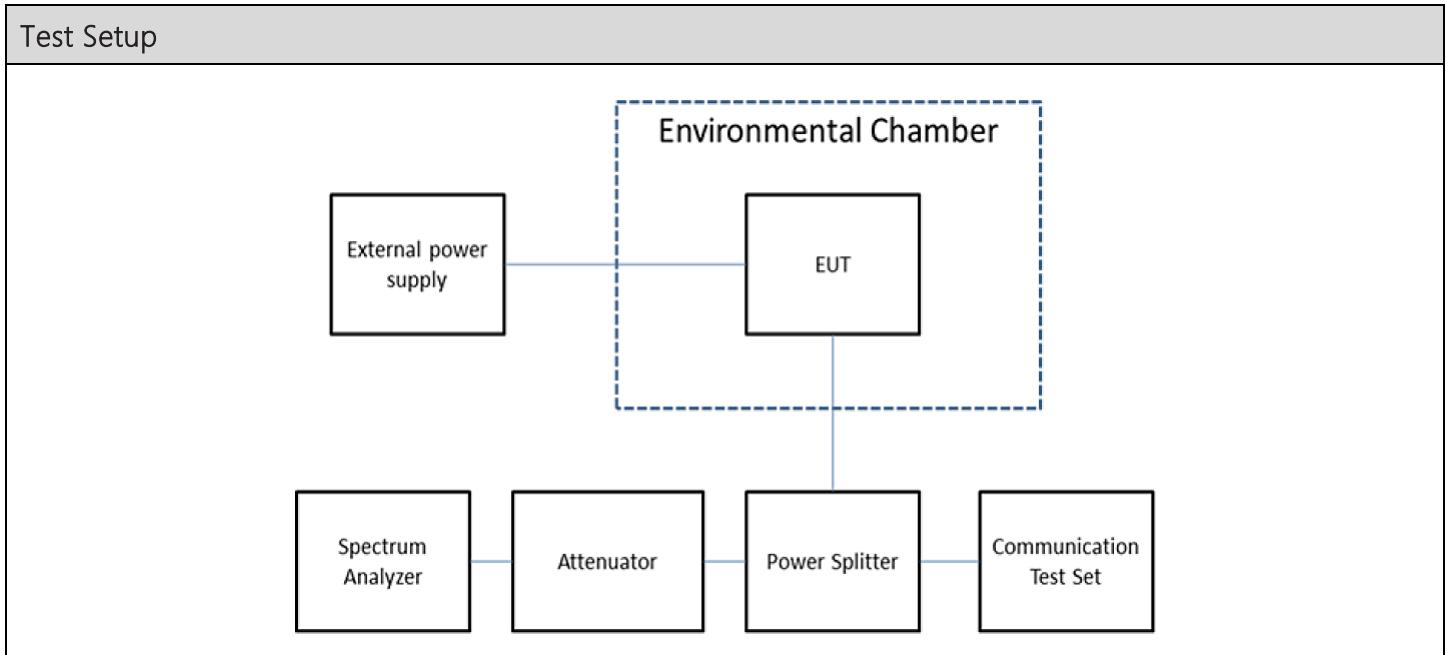

Test Results, Mode 1


Tuned Frequency (MHz)	Max Deviation (kHz)	Limit (ppm)
9344	-0.002	20

Frequency Stability, Tabular Data

8.8.1 Frequency Stability Data


FCC Part 90 Limit	20.0	ppm	
FCC Part 90 Limit, as ppb	20000	ppb (Parts per Billion)	
FCC Part 90 Limit, as %	0.00200	%	
Strictest Combined Limit, as Hz	187004.795	Hz	
Combined Lower Limit	9350.052738	MHz	
Combined Upper Limit	9350.426748	MHz	
Rated Supply Voltage	6.0	<input type="radio"/> AC <input checked="" type="radio"/> DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
-30	6.0	9350.422275	-182.532
-20	6.0	9350.245192	-5.449
-10	6.0	9350.247756	-8.013
0	6.0	9350.226923	12.820
+10	6.0	9350.399840	-160.096
+20 (reference)	6.0	9350.239743	0.000
+20	5.1	9350.239743	0.000
+20	6.9	9350.239743	0.000
+30	6.0	9350.101443	138.301
+40	6.0	9350.281090	-41.347
+50	6.0	9350.120673	119.070

8.8.2 Frequency Stability Plot

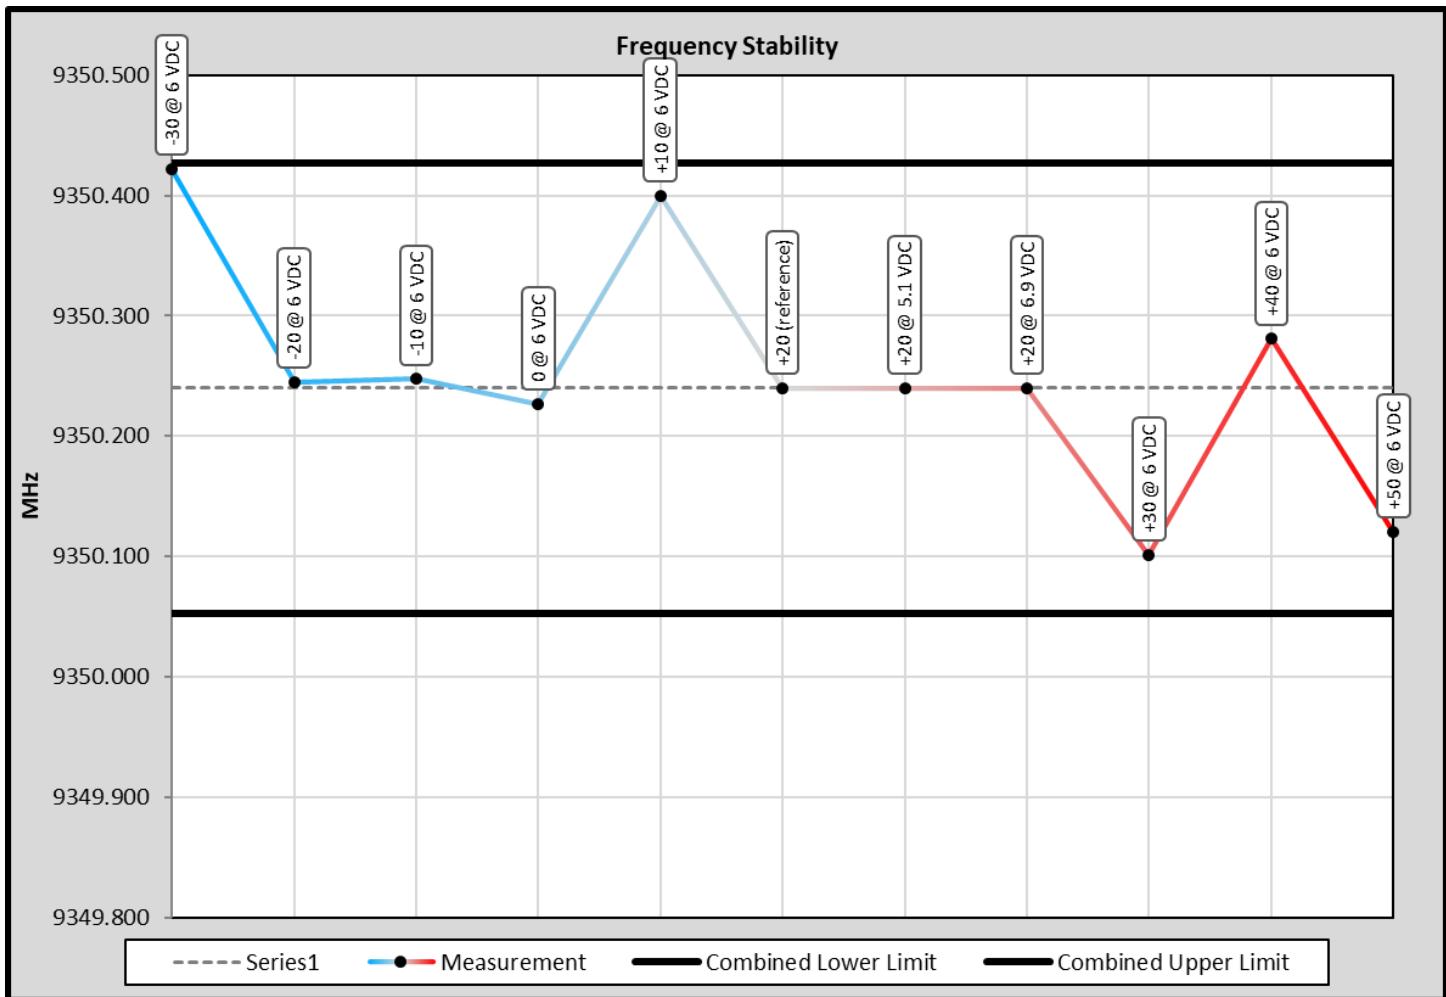

8.9 Transient Frequency Behavior


Limits from FCC Part 90.214; and test procedure from ANSI C63.26-2015.

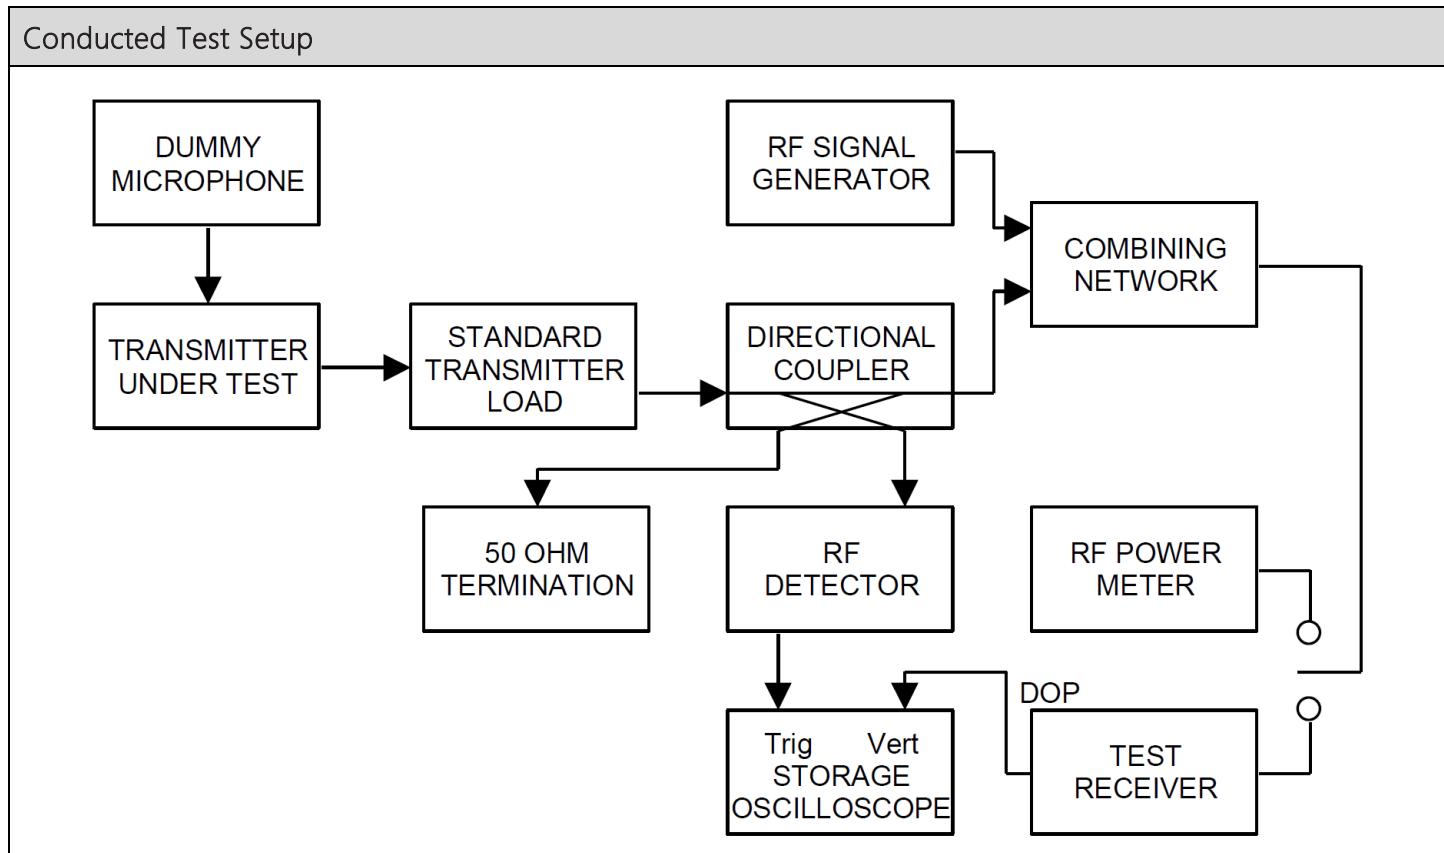

N/A

8.10 Adjacent channel power limits

Limits from FCC Part 90.221, and test procedure from ANSI C63.26-2015.

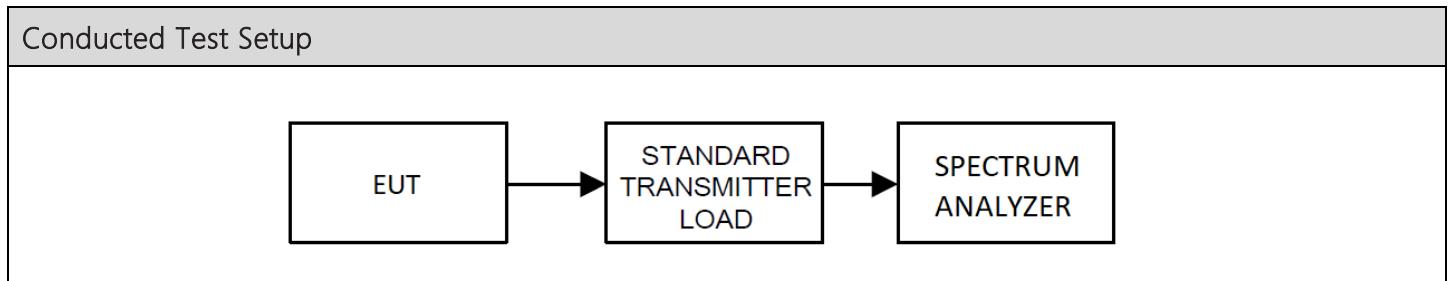

n/a. The EUT does not operate in a band requiring ACP.

9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_17263-24_FCC_PT90_1	1	Initial release	01/29/2025
	2	Change to page 11	07/24/2025



13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

END OF TEST REPORT
