



FCC RADIO TEST REPORT

FCC ID: 2AVAG-201215

Product : Taycan - RC CAR

Trade Name : Porsche

Model Name : TRK-201215

Serial Model : N/A

Report No. : UNIA19121719ER-01

Prepared for

Dong Guan Fu Qiao Gifts Co.,Ltd.

South 1 Road, Xiangxi Industrial, Shipai, Dongguan, Guangdong, China

Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang
Community, Xixiang Str, Bao'an District, Shenzhen, China

TEST RESULT CERTIFICATION

Applicant's name : Dong Guan Fu Qiao Gifts Co.,Ltd.

Address : South 1 Road, Xiangxi Industrial, Shipai, Dongguan, Guangdong, China

Manufacturer's Name : Dong Guan Fu Qiao Gifts Co.,Ltd.

Address : South 1 Road, Xiangxi Industrial, Shipai, Dongguan, Guangdong, China

Product description

Product name : Taycan - RC CAR

Trade Mark : Porsche

Model and/or type reference : N/A

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 2019-11-14 ~ 2019-11-26

Date of Issue : 2019-11-27

Test Result : Pass

Prepared by:

Reviewer:

Approved & Authorized Signer:



Liuze/Manager

Table of Contents	Page
1 . TEST SUMMARY	1
2 . GENERAL INFORMATION	1
2.1 GENERAL DESCRIPTION OF EUT	1
2.2 Carrier Frequency of Channels	1
2.3 Operation of EUT during testing	1
2.4 DESCRIPTION OF TEST SETUP	1
2.5 MEASUREMENT INSTRUMENTS LIST	1
3 . CONDUCTED EMISSIONS TEST	1
3.1 Conducted Power Line Emission Limit	10
3.2 Test Setup	10
3.3 Test Procedure	10
3.4 Test Result	10
4 RADIATED EMISSION TEST	13
4.1 Radiation Limit	13
4.2 Test Setup	13
4.3 Test Procedure	14
4.4 Test Result	14
5 BAND EDGE	20
5.1 Limits	20
5.2 Test Procedure	20
5.3 Test Result	20
6 OCCUPIED BANDWIDTH MEASUREMENT	25
6.1 Test Limit	25
6.2 Test Procedure	25
6.3 Measurement Equipment Used	25
6.4 Test Result	25
7 POWER SPECTRAL DENSITY TEST	28
7.1 Test Limit	28
7.2 Test Procedure	28
7.3 Measurement Equipment Used	28
7.4 Test Result	28
8 PEAK OUTPUT POWER TEST	31
8.1 Test Limit	31
8.2 Test Procedure	31



Table of Contents

	Page
8.3 Measurement Equipment Used	31
8.4 Test Result	31
9 OUT OF BAND EMISSIONS TEST	32
9.1 Test Limit	32
9.2 Test Procedure	32
9.3 Test Setup	32
9.4 Test Result	32
10 ANTENNA REQUIREMENT	34



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	STANDARD	RESULT
6dB Bandwidth And 99% Occupied Bandwidth	FCC Part 15.247 (a)(2)	COMPLIANT
Peak Output Power	FCC Part 15.247(b)(3)	COMPLIANT
Power Spectral Density	FCC Part 15.247(e)	COMPLIANT
Spurious Emissions at Antenna Port	FCC Part 15.247(d)&	COMPLIANT
Spurious Emissions	FCC Part 15.205, 15.209,FCC Part 15.247(d)	COMPLIANT
100 kHz Bandwidth of Frequency Band Edge	FCC Part 15.205, 15.209,FCC Part 15.247(d)	COMPLIANT
AC Line Conducted Emissions	FCC Part 15.207 (a)	COMPLIANT
Antenna requirement	FCC Part 15: 15.203	COMPLIANT

1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.
Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L6494

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

Designation Number: CN1227

Test Firm Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files.

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.06dB, k=2

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Taycan - RC CAR
Trade Mark	Porsche
Model Name	TRK-201215
Serial No.	N/A
Model Difference	N/A
FCC ID	2AVAG-201215
Antenna Type	Wire Antenna
Antenna Gain	1.62dBi
Frequency Range	2402 MHz to 2480 MHz
Number of Channels	40
Modulation Type	GFSK
Battery	DC 7.4V from battery
PowerSource	DC 5V from adapter
Adapter	N/A

2.2 Carrier Frequency of Channels

Description of Channel:			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

2.3 Operation of EUT during testing

Operating Mode

The mode is used:

Transmitting mode for TX 1Mbps Mode

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

2.4 DESCRIPTION OF TEST SETUP

Operation of EUT during Conducted testing:



Operation of EUT during Radiation and Above1GHz Radiation testing:



Table for auxiliary equipment:

Equipment Description	Manufacturer	Model	Calibration Due Date
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A

2.5 MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
CONDUCTED EMISSIONS TEST					
1	AMN	Schwarzbeck	NNLK8121	8121370	2020.9.9
2	AMN	ETS	3810/2	00020199	2020.9.9
3	EMI TEST RECEIVER	Rohde&Schwarz	ESCI	101210	2020.9.9
4	AAN	TESEQ	T8-Cat6	38888	2020.9.9
RADIATED EMISSION TEST					
1	Horn Antenna	Sunol	DRH-118	A101415	2020.9.9
2	BicoNILog Antenna	Sunol	JB1 Antenna	A090215	2020.9.9
3	PREAMP	HP	8449B	3008A00160	2020.9.9
4	PREAMP	HP	8447D	2944A07999	2020.9.9
5	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2020.9.9
6	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2020.9.28
7	Signal Generator	Agilent	E4421B	MY4335105	2020.9.28
8	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2020.9.28
9	MXA Signal Analyzer	Agilent	N9020A	MY51110104	2020.9.9
10	ANT Tower&Turn table Controller	Champro	EM 1000	60764	2020.9.28
11	Anechoic Chamber	Taihe Maorui	9m*6m*6m	966A0001	2020.9.9
12	Shielding Room	Taihe Maorui	6.4m*4m*3m	643A0001	2020.9.9
13	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2020.3.14
14	RF Power sensor	DARE	RPR3006W	15I00041SNQ80	2020.3.14



15	RF power divider	Anritsu	K241B	992289	2020.9.28
16	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2020.9.28
17	Biconical antenna	Schwarzbeck	VHA 9103	91032360	2020.9.8
18	Biconical antenna	Schwarzbeck	VHA 9103	91032361	2020.9.8
19	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2020.9.8
20	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2020.1.12
21	Active Receive Loop Antenna	Schwarzbeck	FMZB 1919B	00023	2020.9.8
22	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170651	2020.03.14
23	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2020.9.8
24	Active Loop Antenna	Com-Power	AL-130R	10160009	2020.05.10
25	Power Meter	KEYSIGHT	N1911A	MY50520168	2020.05.10
26	Frequency Meter	VICTOR	VC2000	997406086	2020.05.10
27	DC Power Source	HYELEC	HY5020E	055161818	2020.05.10

3. CONDUCTED EMISSIONS TEST

3.1 Conducted Power Line Emission Limit


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

Frequency (MHz)	Maximum RF Line Voltage(dB V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

3.2 Test Setup

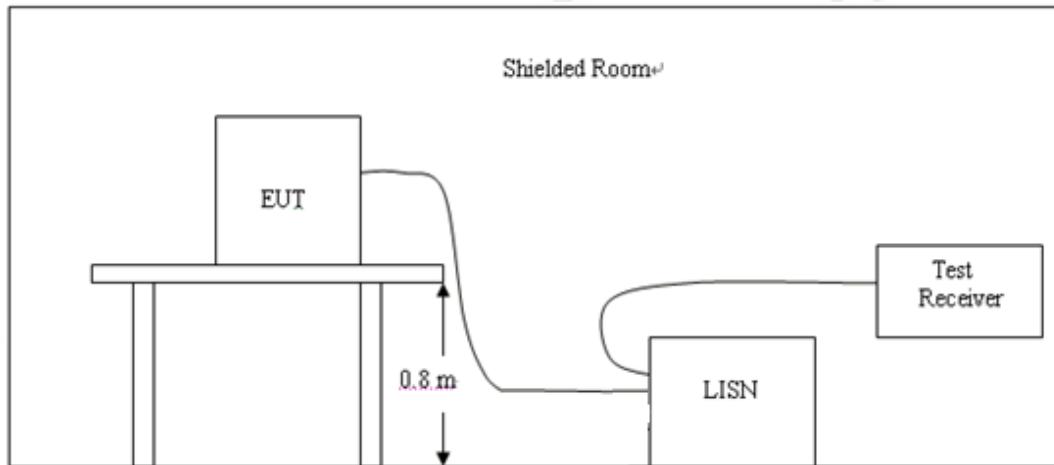

3.3 Test Procedure

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. A wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.


3.4 Test Result

Pass

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were tested at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported as below:


Temperature:	24°C	Relative Humidity:	48%
Test Date:	2019-11-16	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode: TX (1Mbps) CH00 (worst case)			

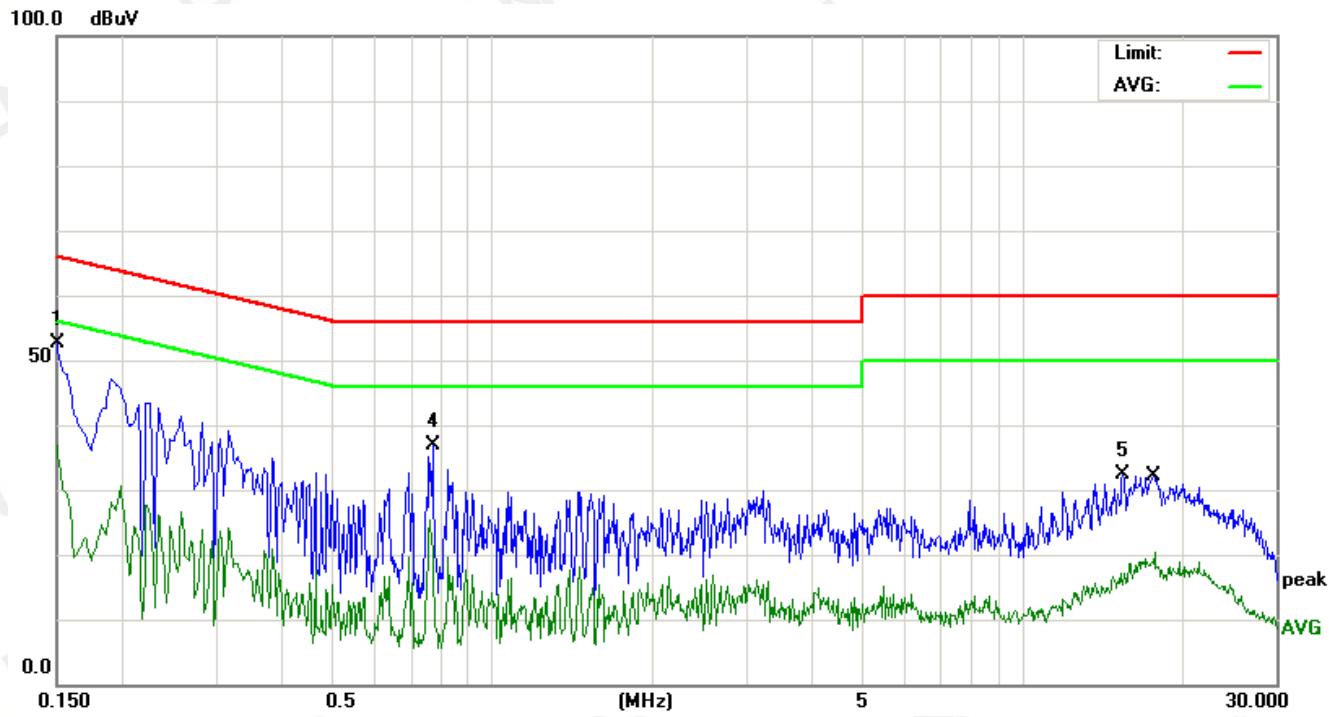

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1	*	0.1500	40.63	11.94	52.57	65.99	-13.42
2		0.1500	24.82	11.94	36.76	55.99	-19.23
3		0.7620	15.36	9.97	25.33	46.00	-20.67
4		0.7700	26.80	9.97	36.77	56.00	-19.23
5		15.4620	21.84	10.48	32.32	60.00	-27.68
6		17.6940	9.60	10.77	20.37	50.00	-29.63

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	24°C	Relative Humidity:	48%
Test Date:	2019-11-16	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	TX (1Mbps) CH00 (worst case)		

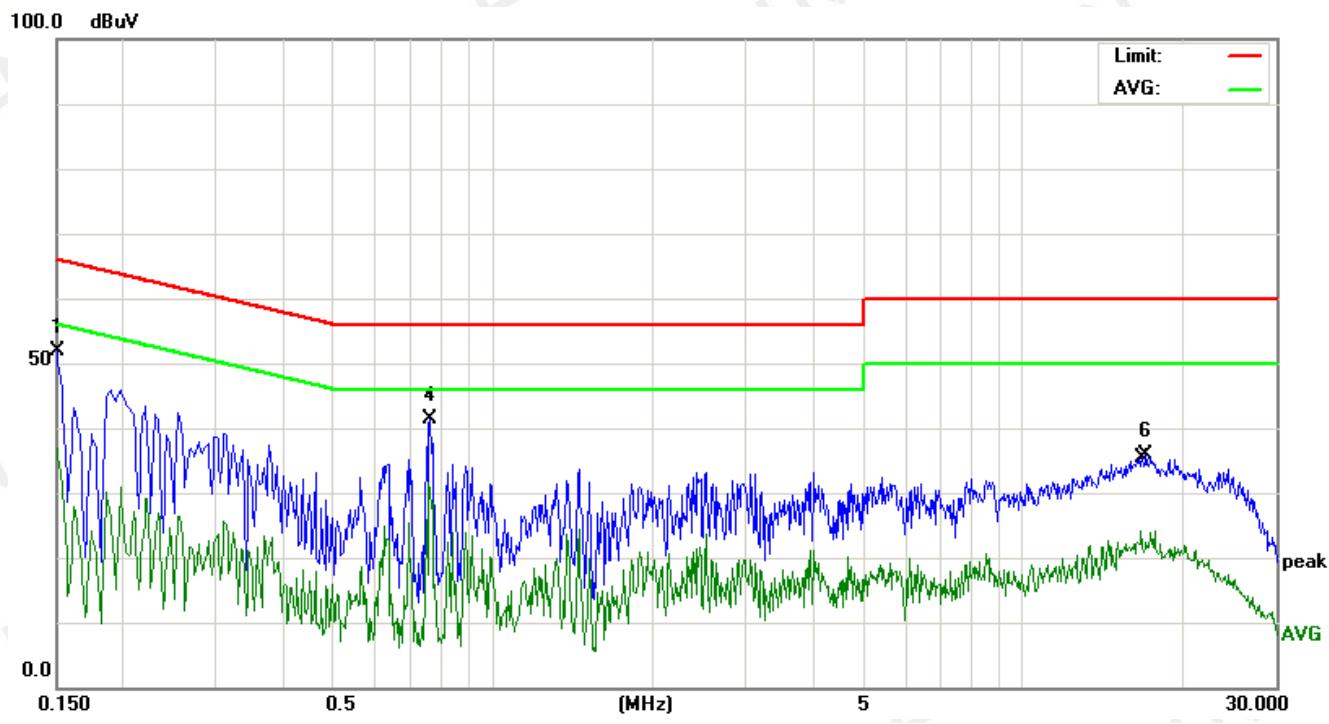

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dBuV	dB
1	*	0.1500	39.87	11.94	51.81	65.99	-14.18
2		0.1500	24.83	11.94	36.77	55.99	-19.22
3		0.7580	21.64	9.97	31.61	46.00	-14.39
4		0.7620	31.33	9.97	41.30	56.00	-14.70
5		16.6780	13.54	10.64	24.18	50.00	-25.82
6		17.0260	25.21	10.69	35.90	60.00	-24.10

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION TEST

4.1 Radiation Limit


For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40	100
88-216	3	43.5	150
216-960	3	46	200
Above 960	3	54	500


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.


4.2 Test Setup

1. Radiated Emission Test-Up Frequency Below 30MHz

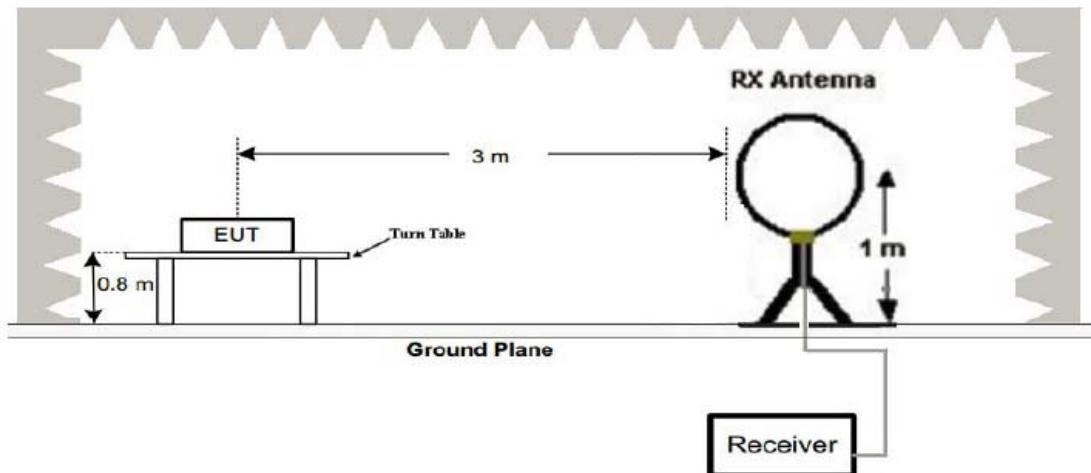

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

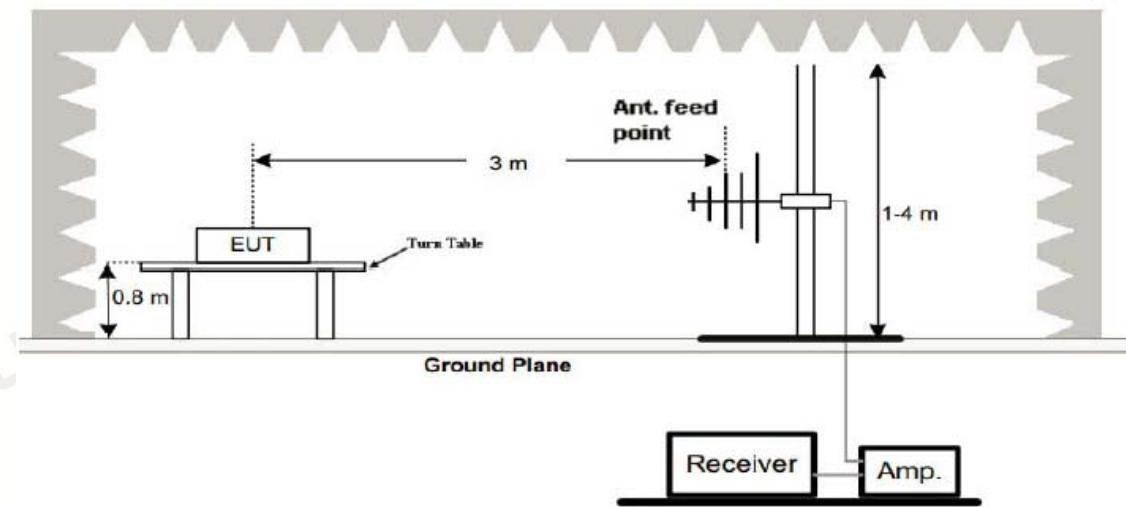

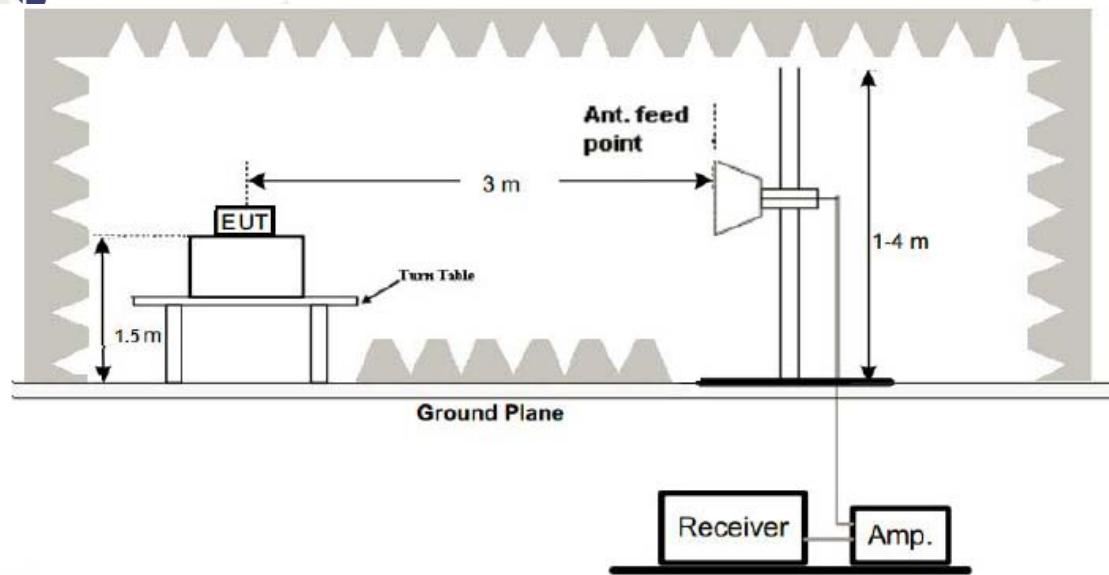

4.3 Test Procedure

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

4.4 Test Result

PASS

Remark:

1. All modes of mode were tested at Low, Middle, and High channel, and only the worst result of GFSK(1Mbps) Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.



Below 30M

Temperature:	22°C	Relative Humidity:	48%
Test Date:	2019-11-16	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	TX (1Mbps) CH00 (worst case)		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor

Below 1GHz Test Results:


Temperature:	22°C	Relative Humidity:	48%
Test Date:	2019-11-16	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Horizontal
Test Mode:	TX (1Mbps) CH00 (worst case)		

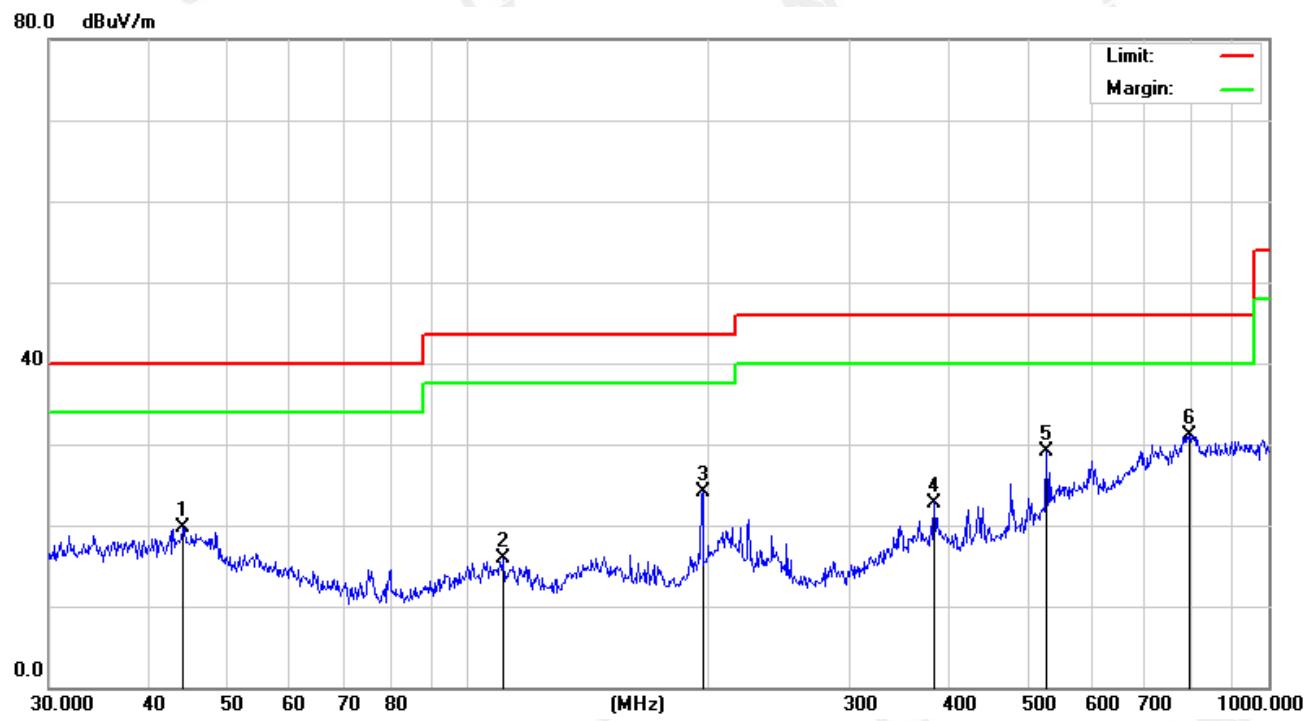

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		44.1202	24.22	-4.48	19.74	40.00	-20.26	peak
2		110.9571	23.69	-7.76	15.93	43.50	-27.57	peak
3		196.5098	31.12	-6.99	24.13	43.50	-19.37	peak
4		382.5879	27.19	-4.39	22.80	46.00	-23.20	peak
5		528.2458	28.78	0.32	29.10	46.00	-16.90	peak
6	*	796.1830	23.46	7.70	31.16	46.00	-14.84	peak

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
 Factor=Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	22°C	Relative Humidity:	48%
Test Date:	2019-11-16	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Polarization:	Vertical
Test Mode: TX (1Mbps) CH00 (worst case)			

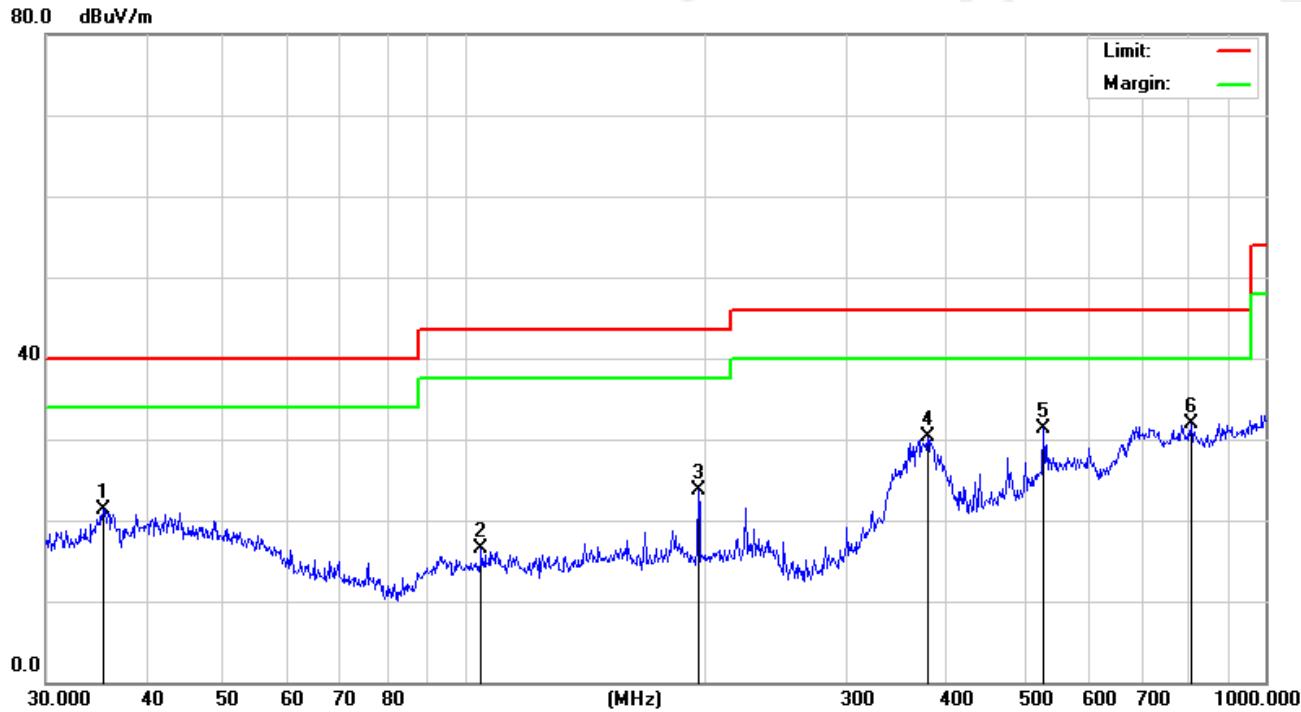

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		35.3750	24.95	-3.55	21.40	40.00	-18.60
2		104.9033	23.78	-7.24	16.54	43.50	-26.96
3		195.8220	31.31	-7.56	23.75	43.50	-19.75
4		378.5843	35.11	-4.76	30.35	46.00	-15.65
5		528.2458	27.41	3.83	31.24	46.00	-14.76
6	*	807.4290	24.77	7.14	31.91	46.00	-14.09

Remark: Absolute Level= Reading Level+ Factor, Margin= Absolute Level – Limit
 Factor=Ant. Factor + Cable Loss – Pre-amplifier

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.



Above 1 GHz Test Results:

CH Low of 2402MHz

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	43.63	5.06	48.69	74	-25.31	
4804	32.49	5.06	37.55	54	-16.45	PK
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4804	42.58	5.06	47.64	74	-26.36	
4804	31.97	5.06	37.03	54	-16.97	PK
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

CH Middle of 2440MHz

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4880	44.01	5.14	49.15	74	-24.85	
4880	32.13	5.14	37.27	54	-16.73	PK
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4880	43.72	5.14	48.86	74	-25.14	
4880	32.58	5.14	37.72	54	-16.28	PK
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit						



CH High of 2480MHz

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
4960	44.26	5.22	49.48	74	-24.52	PK
4960	33.13	5.22	38.35	54	-15.65	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Margin (dB)	Detector Type
4960	43.25	5.22	48.47	74	-25.53	PK
4960	32.64	5.22	37.86	54	-16.14	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin= Absolute Level – Limit

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB μ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB μ V/m(PK Value) <54 dB μ V/m(AV Limit), the Average Detected not need to completed.

5.1 Limits

FCC PART 15.247 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


5.2 Test Procedure

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSIC63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW 1MHz VBW 3MHz PK detector is for PK value ; RBW to 1MHz and VBW to 10Hz PK detector is for measure the average radiated field strength. The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge.

5.3 Test Result


PASS

Operation Mode:TX 1Mbps Mode

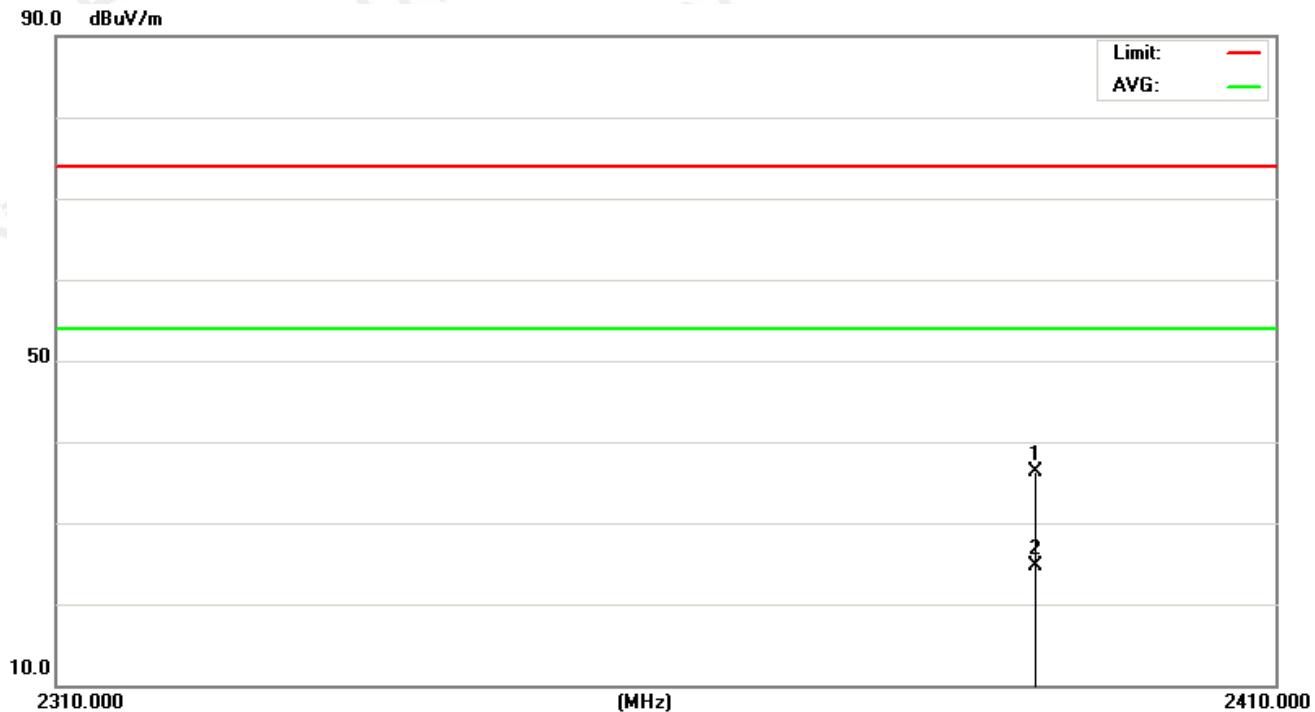
Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2390.000	42.15	-5.79	36.36	74.00	-37.64	peak
2	*	2390.000	30.49	-5.79	24.70	54.00	-29.30	AVG

V:

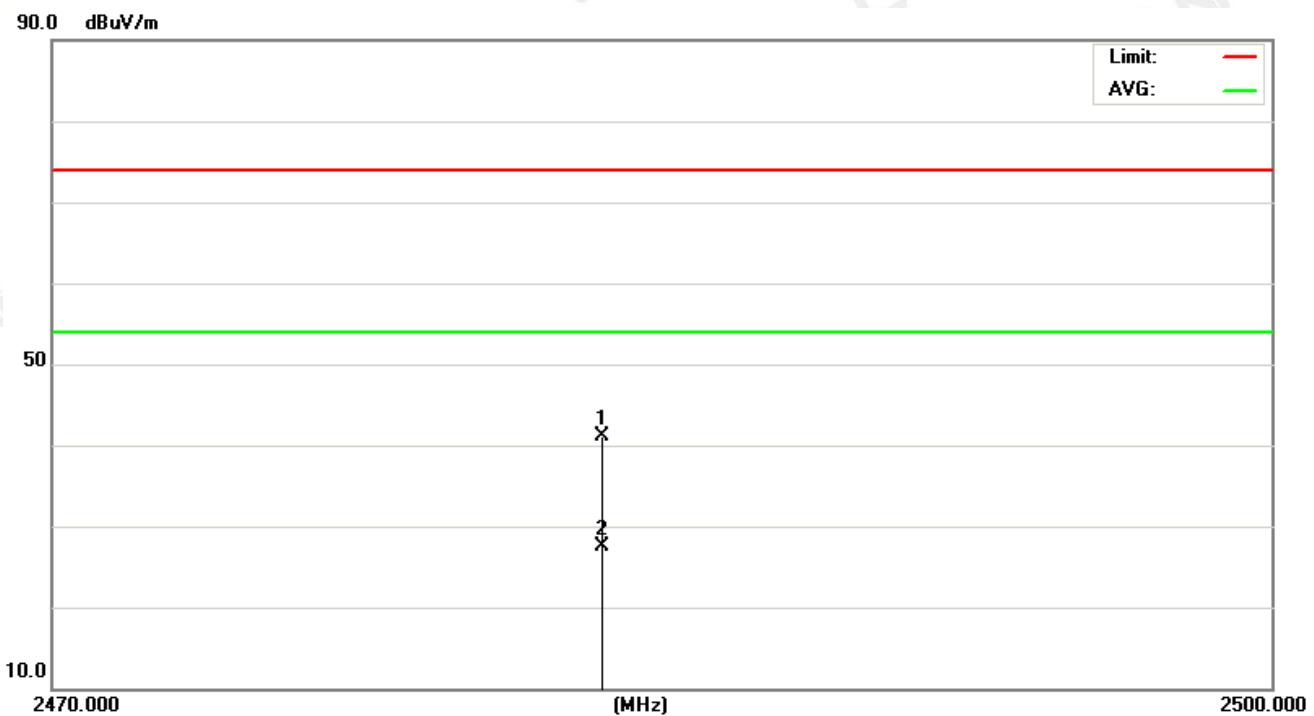


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		2483.500	46.18	-4.98	41.20	74.00	-32.80	peak
2	*	2483.500	32.49	-4.98	27.51	54.00	-26.49	AVG

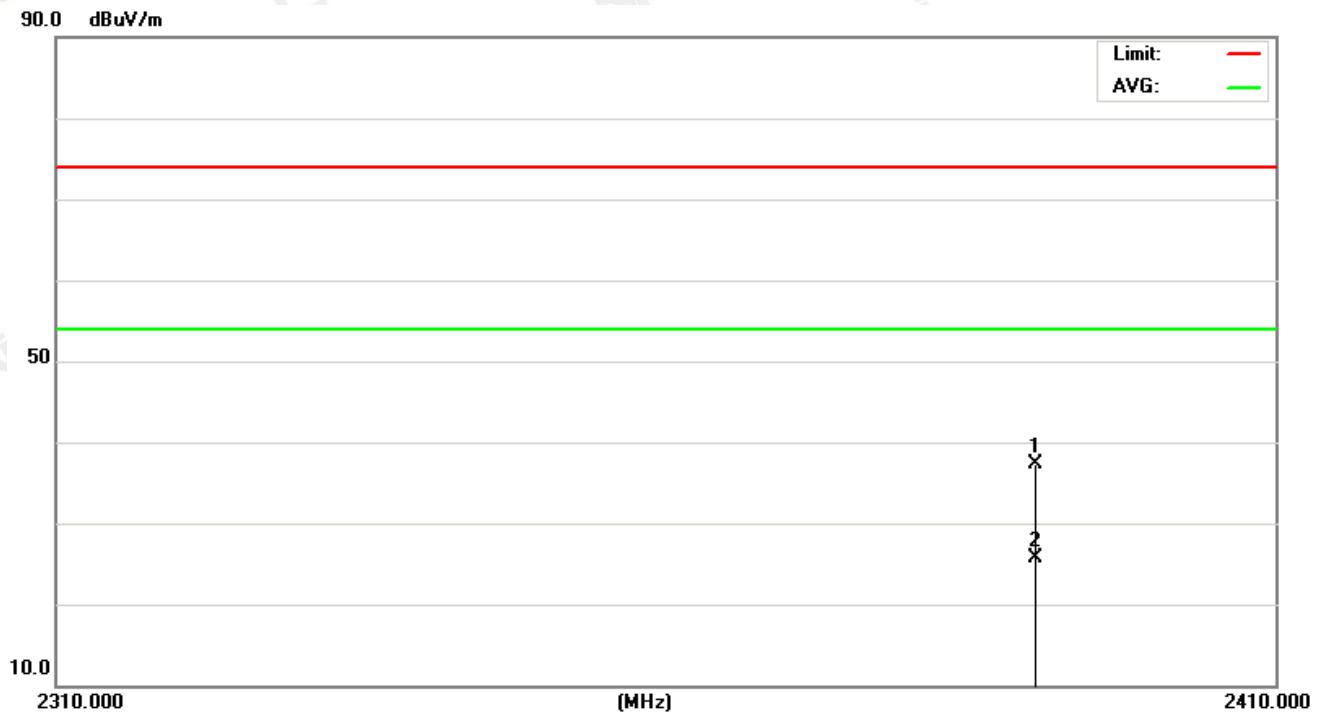

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		2390.000	43.05	-5.79	37.26	74.00	-36.74 peak
2	*	2390.000	31.46	-5.79	25.67	54.00	-28.33 AVG

H:

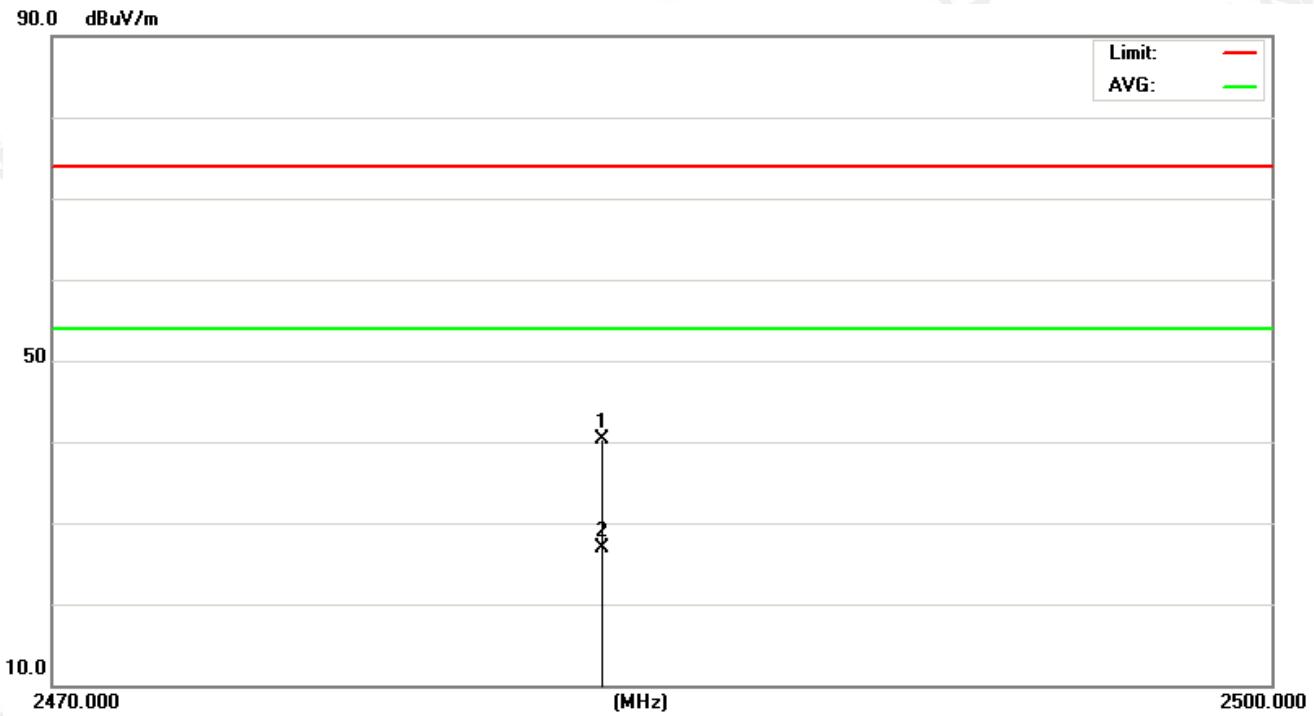

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2483.500	45.29	-4.98	40.31	74.00	-33.69	peak
2	*	2483.500	31.87	-4.98	26.89	54.00	-27.11	AVG



6 OCCUPIED BANDWIDTH MEASUREMENT

6.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

6.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

6.3 Measurement Equipment Used


Same as Radiated Emission Measurement

6.4 Test Result


PASS

EUT Set Mode	CH or Frequency	6 dB bandwidth	Limit	Conclusion
		Result (MHz)		
BLE	CH 00	0.821	>500KHz	PASS
	CH 19	0.823		PASS
	CH 39	0.825		PASS


CH: 2402MHz

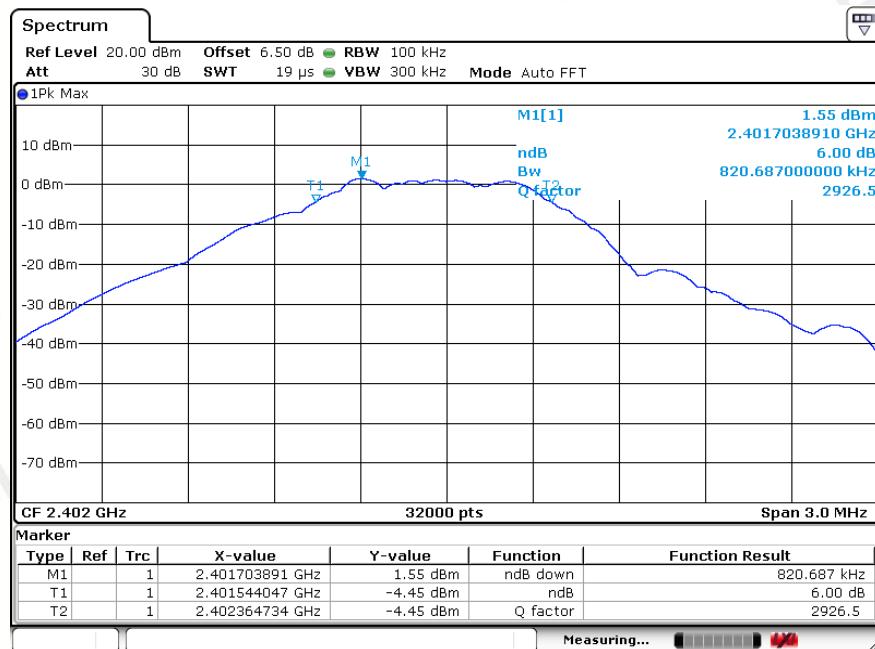

CH: 2440MHz

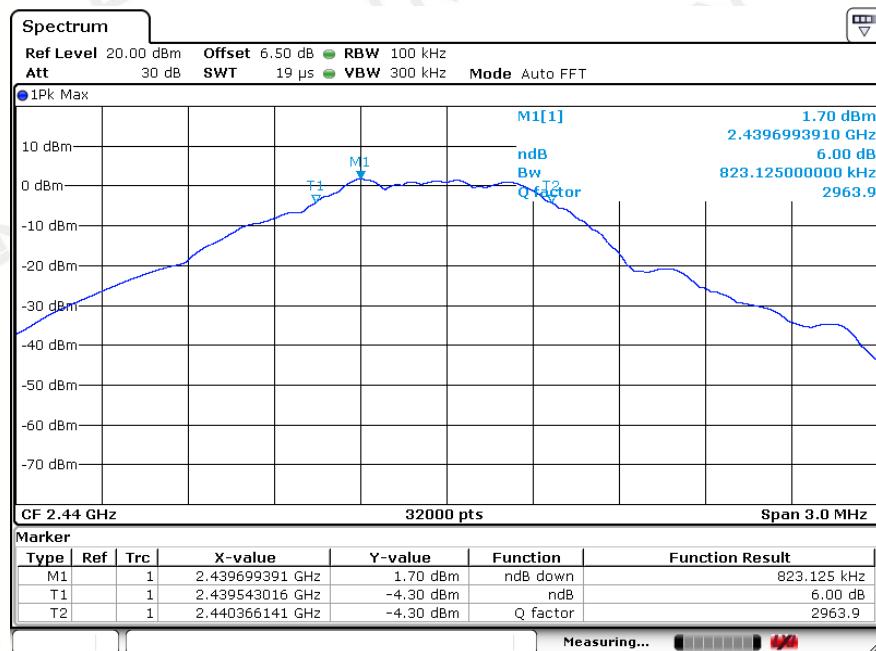

CH: 2480MHz

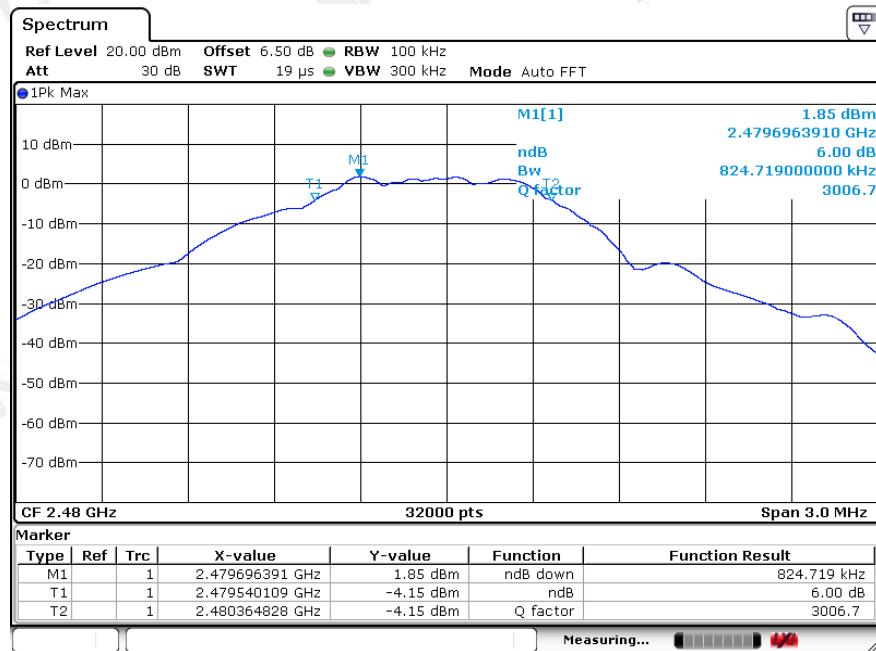



7 POWER SPECTRAL DENSITY TEST

7.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

7.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on FCC Part15 C Section 15.247: RBW=3KHz, VBW=10KHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.

7.3 Measurement Equipment Used


Same as Radiated Emission Measurement

7.4 Test Result


PASS

TX1Mbps Mode			
Frequency (MHz)	Power Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2402	-14.27	8	PASS
2440	-14.31	8	PASS
2480	-13.72	8	PASS


CH: 2402MHz

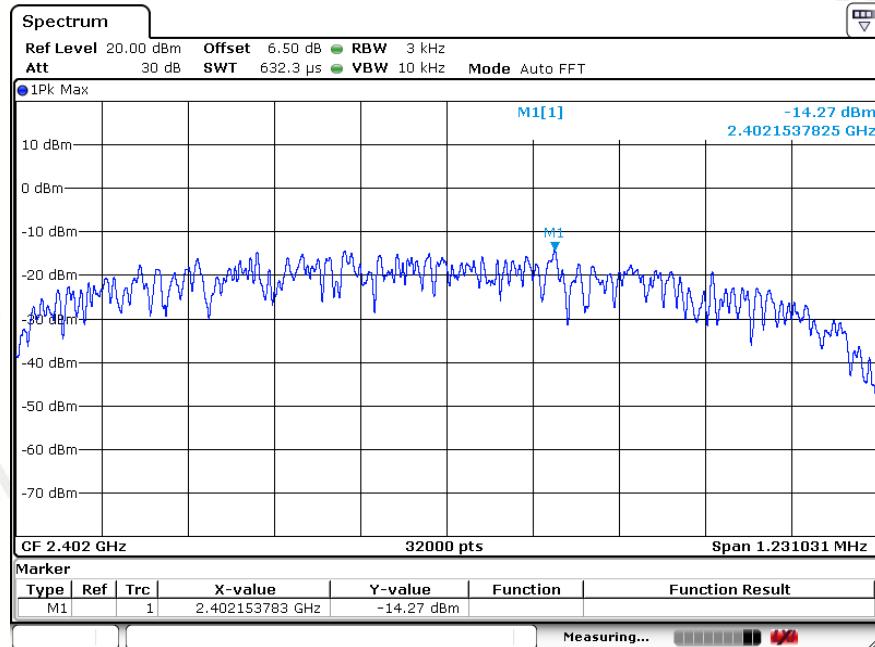

CH: 2440MHz

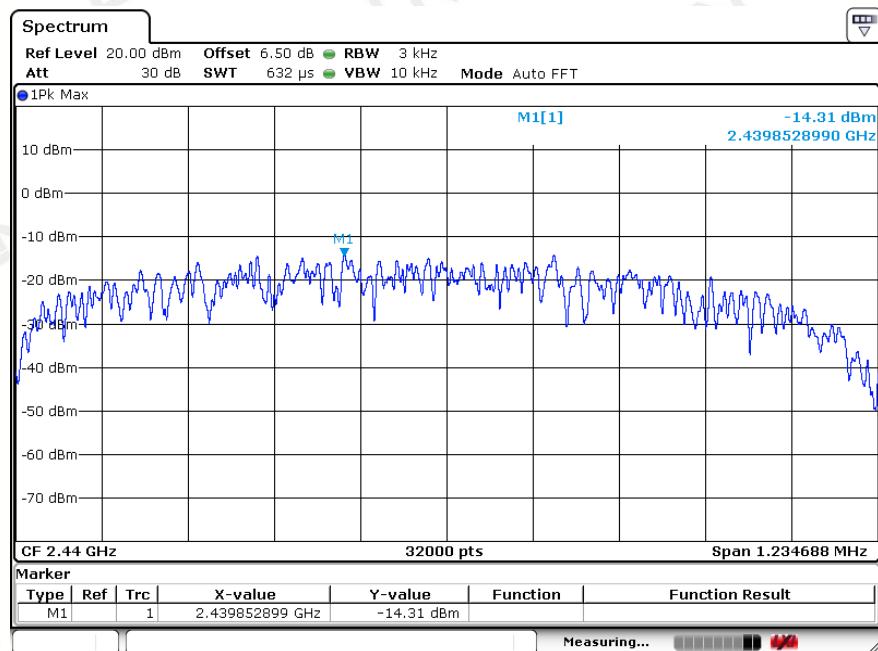

CH: 2480MHz

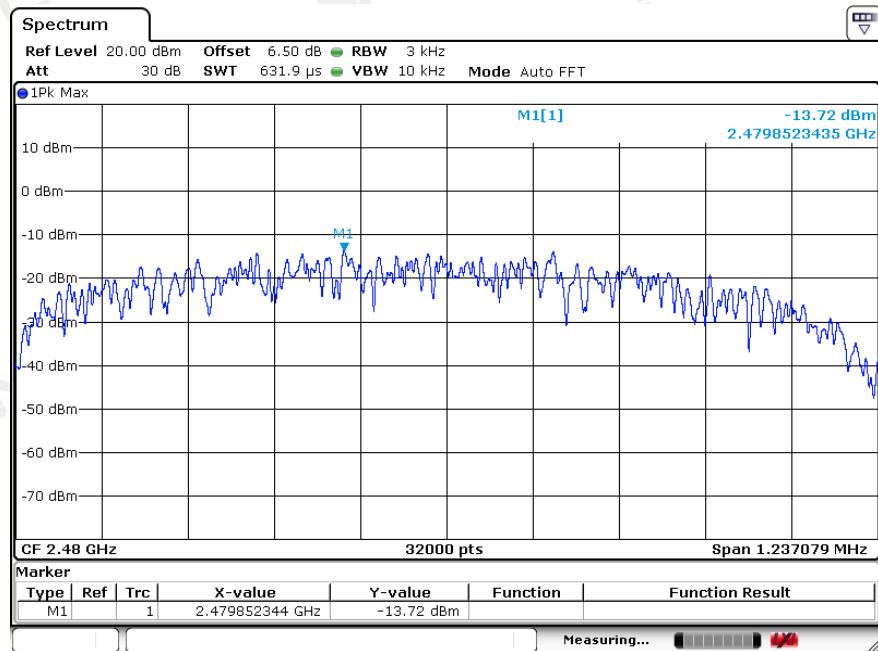



8 PEAK OUTPUT POWERTEST

8.1 Test Limit

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The EUT was directly connected to the Power meter.

8.3 Measurement Equipment Used

Same as Radiated Emission Measurement

8.4 Test Result

PASS

All the test modes completed for test.

TX1Mbps Mode				
Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT	
	(MHz)	(dBm)	(dBm)	
CH01	2402	3.21		30
CH06	2440	3.31		30
CH11	2480	3.44		30

9 OUT OF BAND EMISSIONSTEST


9.1 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

9.2 Test Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100KHz, VBW=300KHz.
4. Set detected by the spectrum analyzer with peak detector.


9.3 TestSetup

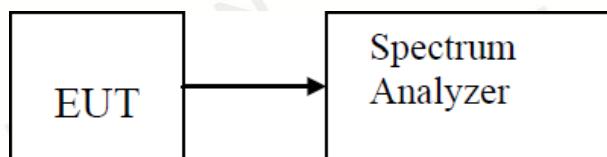


9.4 Test Result

PASS

CH: 2402MHz

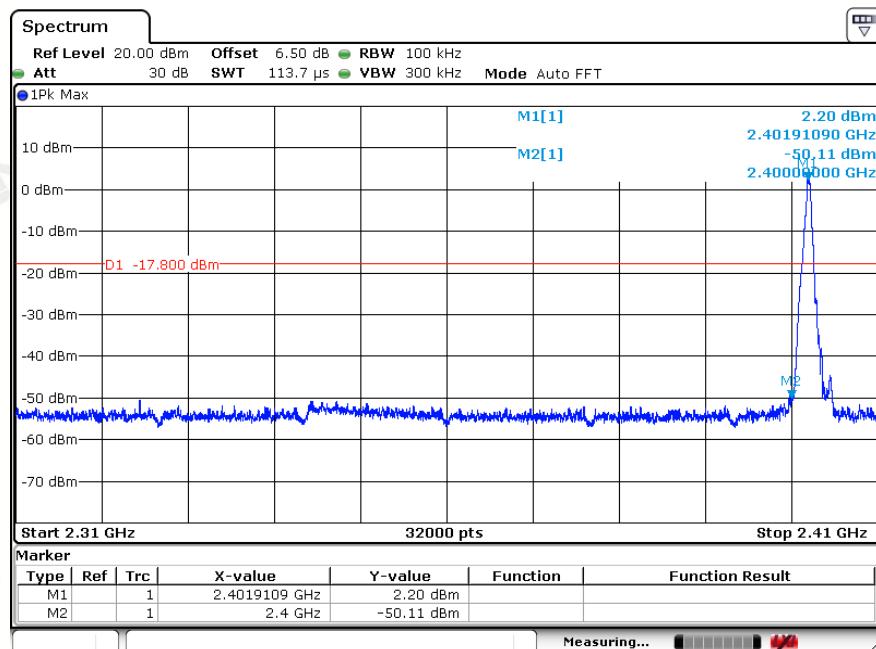

CH: 2480MHz

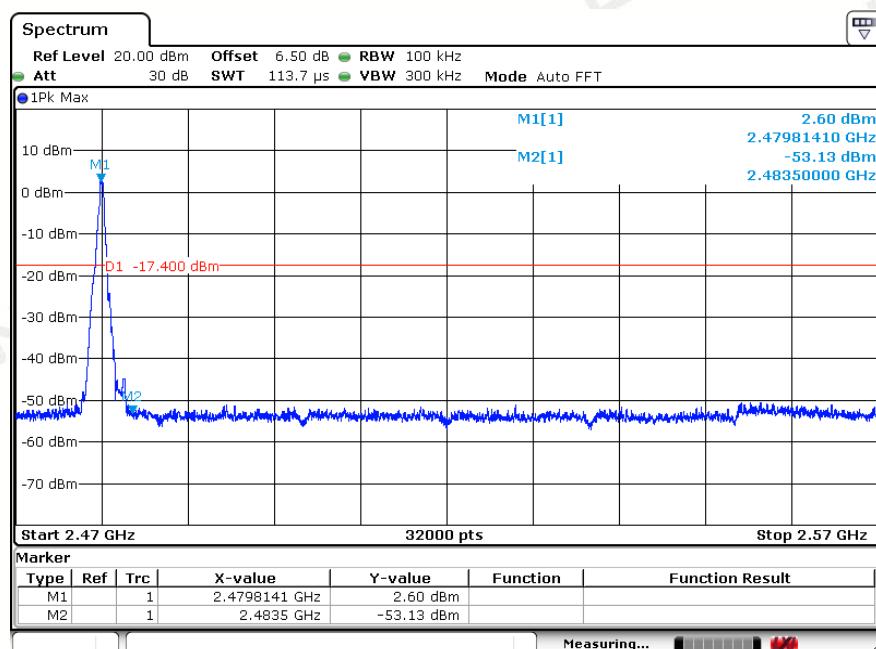

10 ANTENNA REQUIREMENT


Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connected Construction

The antenna used in this product is a Wire Antenna, The directional gains of antenna used for transmitting is 1.62dBi.

ANTENNA:

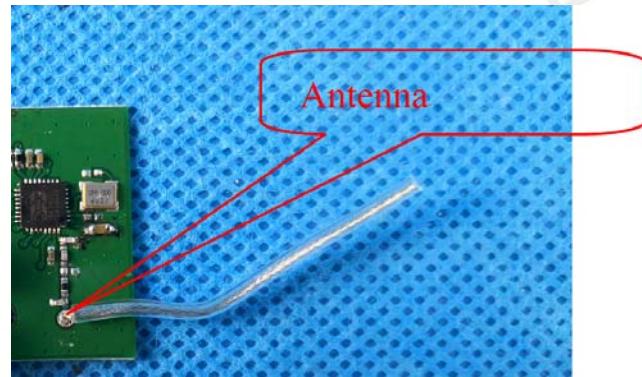

End of Report