



TEST REPORT

**Test report
On Behalf of
Venture 3 Systems LLC
For
Notebook
Model No.: ADR15-01, ADR15-02, ADR15-03, ADR15-04
FCC ID: 2AVAHADR15-01**

Prepared for : Venture 3 Systems LLC
2805 Sterling Drive Hatfield, PA 19440, USA

Prepared By : SHENZHEN DEVOPS TECHNOLOGY CO., LTD.
8F-B TOWER H CHUANGXINYUNGU, #48 PAOTAI ROAD, GONGMING,
GUANGMING NEW DISTRICT, SHENZHEN

Date of Test: Nov. 28, 2019 ~ Dec. 05, 2019
Date of Report: Dec. 05, 2019
Report Number: HK1911293050-4E



TEST RESULT CERTIFICATION

Applicant's name: Venture 3 Systems LLC
Address: 2805 Sterling Drive Hatfield, PA 19440, USA.
Manufacture's Name.....: Shenzhen Adreamer Elite Co., Ltd.
Address: Floor 4th, Fuanna industrial park, No.1 qingning road, qinghu,
longhua Dist, Shenzhen, China.

Product description

Trade Mark: Telikin
Product name.....: Notebook
Model and/or type reference : ADR15-01, ADR15-02, ADR15-03, ADR15-04
Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
Date (s) of performance of tests: Nov. 28, 2019 ~ Dec. 05, 2019
Date of Issue.....: Dec. 05, 2019
Test Result.....: Pass

Prepared by:

Project Engineer

Reviewed by:

Project Supervisor

Approved by:

Technical Director



TABLE OF CONTENTS

1. Test Result Summary	4
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY	4
1.3. MEASUREMENT UNCERTAINTY	5
2. EUT Description	6
2.1. GENERAL DESCRIPTION OF EUT	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING	7
2.4. DESCRIPTION OF TEST SETUP	8
3. Genera Information	9
3.1. TEST ENVIRONMENT AND MODE	9
3.2. DESCRIPTION OF SUPPORT UNITS	10
4. Test Results and Measurement Data	11
4.1. CONDUCTED EMISSION	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER	17
4.3. 6dB EMISSION BANDWIDTH	25
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	34
4.5. POWER SPECTRAL DENSITY	43
4.6. BAND EDGE.....	64
4.7. SPURIOUS EMISSION	90
4.8. FREQUENCY STABILITY MEASUREMENT.....	125
4.9. UNWANTED EMISSIONS MEASUREMENT.....	128
4.10. ANTENNA REQUIREMENT	139
4.11. PHOTOGRAPHS OF TEST SETUP	140



1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	PASS
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Notebook
Model Name	ADR15-01
Serial No.	ADR15-02, ADR15-03, ADR15-04
Trade Mark	Telikin
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: ADR15-01
FCC ID	2AVAHADR15-01
Operation Frequency:	IEEE 802.11a/n/ac(HT20) 5.180GHz-5.240GHz IEEE 802.11n/ac(HT40) 5.190GHz-5.230GHz IEEE 802.11ac(HT80) 5.210GHz
	IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	Internal Antenna 802.11a: SISO 802.11n/ac(HT20): MIMO 802.11n/ac(HT40): MIMO 802.11ac(HT80): MIMO
Antenna gain per antenna	-2.81dBi
Power Source	AC 100-240V~50/60Hz
Power Supply:	AC100-240V~50/60Hz

Remark: Antenna directional gain= $-2.81+10\log 2=0.2$ dBi



2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5795		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

For 802.11a/n (HT20)/ac(HT20)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
36	Low	5180	149	Low	5745
40	Mid	5200	157	Mid	5785
48	High	5240	165	High	5825

For 802.11n (HT40)/ ac(HT40)

Band I (5150 - 5250 MHz)			Band IV (5725 - 5850 MHz)		
Channel Number	Channel	Frequency (MHz)	Channel Number	Channel	Frequency (MHz)
38	Low	5190	151	Low	5755
46	High	5230	159	High	5795




For 802.11ac(HT80)

Band I (5150 - 5250 MHz)		Band IV (5725 - 5850 MHz)	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
42	5210	155	5775

2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiation testing:



- Adapter information
Model: JHD-AP024U-120200BA-A
Input: 100-240V~, 50/60Hz, 0.45A Max.
Output: 12VDC, 2000mA



3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Monitor	SE2417HGC	CE2417HG	/	DELL

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T AC power LISN Filter AC power EMI Receiver Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Tx Mode														
Test Procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														



4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2020
LISN	R&S	ENV216	HKE-002	Dec. 27, 2020
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2020
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




4.1.3. Test data

ANT1

Remark: We tested three Channels in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded.

Please refer to following diagram for individual


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

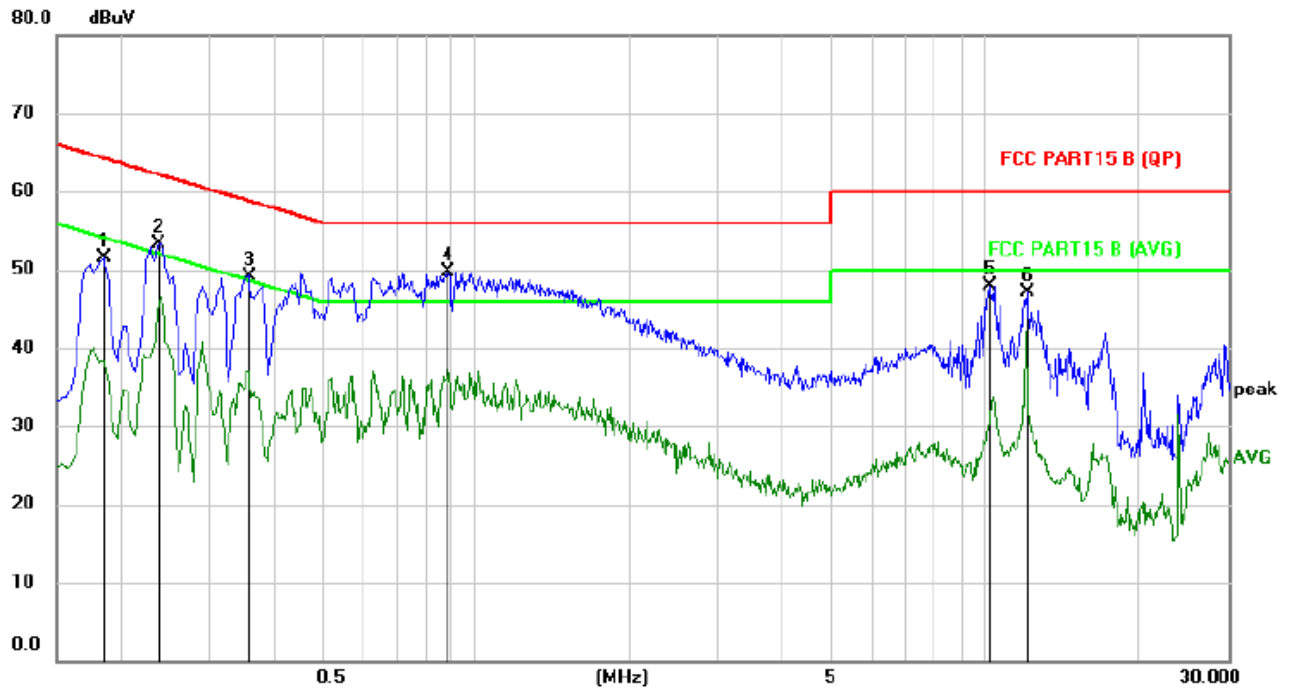

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1860	41.69	9.89	51.58	64.21	-12.63	peak	
2		0.2380	43.45	9.92	53.37	62.17	-8.80	peak	
3		0.3580	39.33	9.87	49.20	58.77	-9.57	peak	
4	*	0.8820	39.70	10.07	49.77	56.00	-6.23	peak	
5		10.2260	37.35	10.60	47.95	60.00	-12.05	peak	
6		12.0820	36.54	10.62	47.16	60.00	-12.84	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level

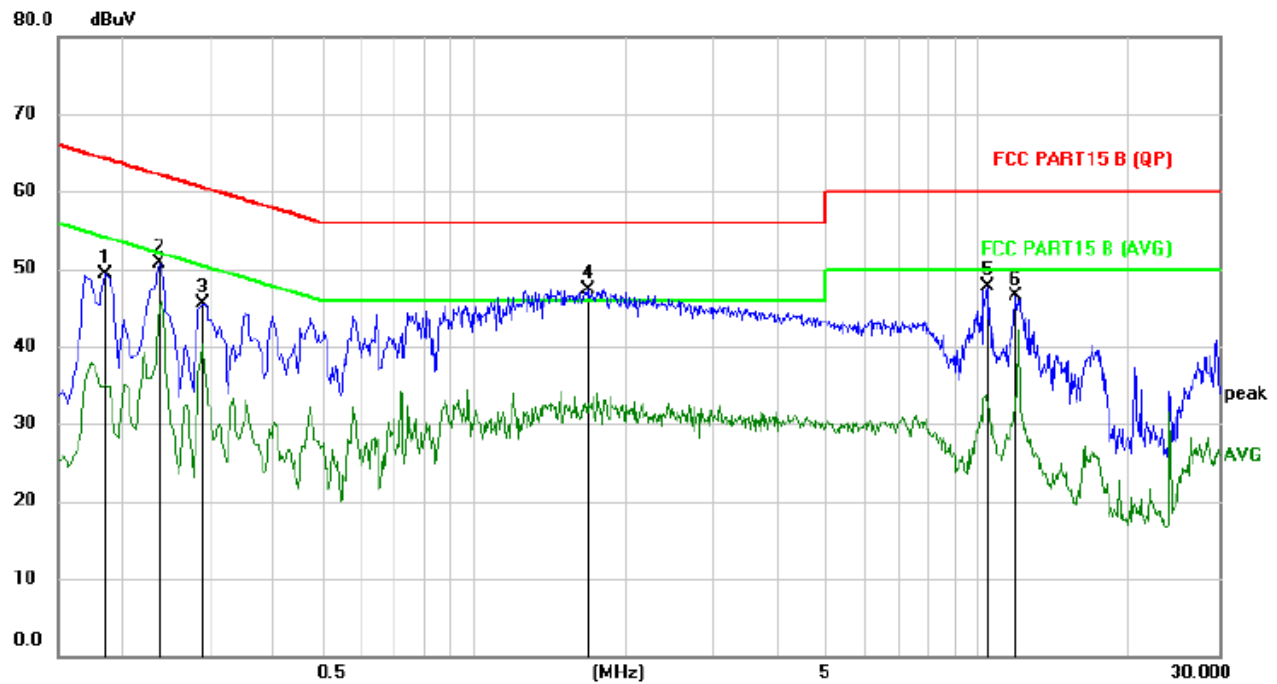**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1860	39.36	10.03	49.39	64.21	-14.82	peak	
2		0.2380	40.69	10.01	50.70	62.17	-11.47	peak	
3		0.2900	35.66	9.91	45.57	60.52	-14.95	peak	
4	*	1.6860	37.24	10.11	47.35	56.00	-8.65	peak	
5		10.4340	37.18	10.51	47.69	60.00	-12.31	peak	
6		11.9060	35.91	10.57	46.48	60.00	-13.52	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level




ANT2

Remark: We tested three Channels in AC 120V/60Hz and AC 240V/60Hz, the worst case was recorded.

Please refer to following diagram for individual


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

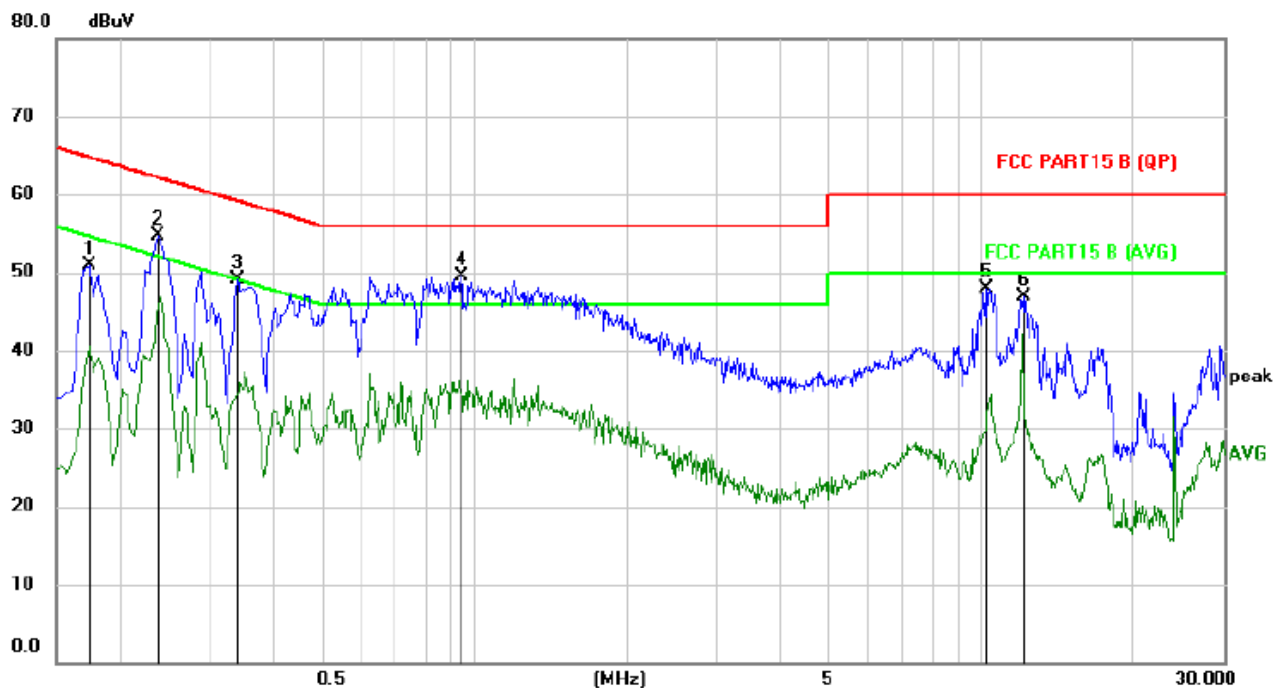

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1		0.1740	40.99	9.89	50.88	64.77	-13.89	peak	
2		0.2380	44.74	9.92	54.66	62.17	-7.51	peak	
3		0.3420	39.23	9.87	49.10	59.15	-10.05	peak	
4	*	0.9460	39.47	10.04	49.51	56.00	-6.49	peak	
5		10.1980	37.32	10.60	47.92	60.00	-12.08	peak	
6		12.1380	36.19	10.62	46.81	60.00	-13.19	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level

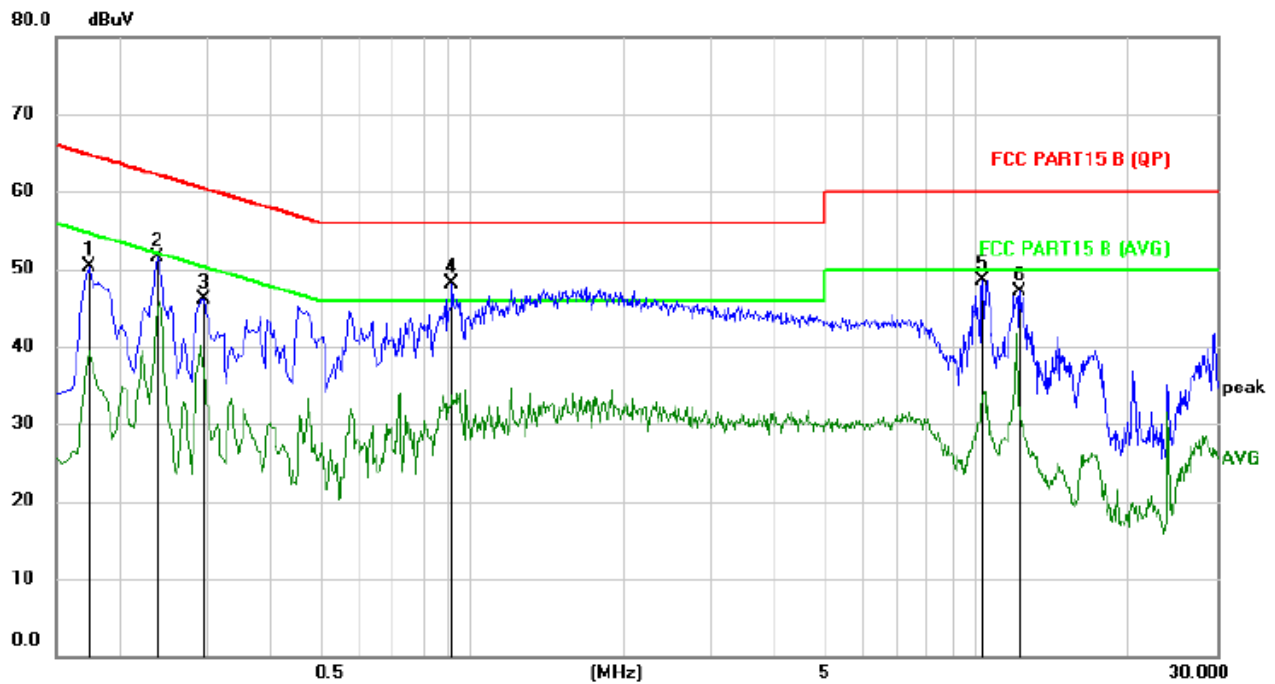**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		0.1740	40.34	10.05	50.39	64.77	-14.38	peak	
2		0.2380	41.57	10.01	51.58	62.17	-10.59	peak	
3		0.2940	36.19	9.90	46.09	60.41	-14.32	peak	
4	*	0.9140	38.03	10.00	48.03	56.00	-7.97	peak	
5		10.2940	38.04	10.51	48.55	60.00	-11.45	peak	
6		12.2420	36.54	10.57	47.11	60.00	-12.89	peak	

Remark:

Factor = Cable loss + LISN factor, Margin = Limit – Level



4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)& Part 2 J Section 2.1046	
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E	
Limit:	Frequency Band (MHz)	Limit
	5150-5250	250mW for client devices
	5725-5850	1 W
Test Setup:	 Power meter EUT	
Test Mode:	Transmitting mode with modulation	
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report.	
Test Result:	PASS	
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power	



4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2020
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2020
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2020
RF cable	Times	1-40G	HKE-034	Dec. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

ANT1

Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH36	8.879	24	PASS
11a	CH40	8.658	24	PASS
11a	CH48	8.472	24	PASS
11n(HT20)	CH36	8.373	24	PASS
11n(HT20)	CH40	8.015	24	PASS
11n(HT20)	CH48	7.893	24	PASS
11n(HT40)	CH38	7.15	24	PASS
11n(HT40)	CH46	6.817	24	PASS
11ac(HT20)	CH36	8.548	24	PASS
11ac(HT20)	CH40	8.604	24	PASS
11ac(HT20)	CH48	8.378	24	PASS
11ac(HT40)	CH38	7.764	24	PASS
11ac(HT40)	CH46	7.39	24	PASS
11ac(HT80)	CH42	6.251	24	PASS



Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	8.927	30	PASS
11a	CH157	8.424	30	PASS
11a	CH165	8.819	30	PASS
11n (HT20)	CH149	8.88	30	PASS
11n (HT20)	CH157	8.933	30	PASS
11n (HT20)	CH165	8.735	30	PASS
11n (HT40)	CH151	7.203	30	PASS
11n (HT40)	CH159	7.376	30	PASS
11ac(HT20)	CH149	8.862	30	PASS
11ac(HT20)	CH157	8.259	30	PASS
11ac(HT20)	CH165	8.767	30	PASS
11ac(HT40)	CH151	7.152	30	PASS
11ac(HT40)	CH159	7.309	30	PASS
11ac(HT80)	CH155	6.246	30	PASS

**ANT2**

Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH36	8.785	24	PASS
11a	CH40	8.450	24	PASS
11a	CH48	8.008	24	PASS
11n(HT20)	CH36	7.374	24	PASS
11n(HT20)	CH40	7.711	24	PASS
11n(HT20)	CH48	7.062	24	PASS
11n(HT40)	CH38	6.696	24	PASS
11n(HT40)	CH46	6.722	24	PASS
11ac(HT20)	CH36	8.057	24	PASS
11ac(HT20)	CH40	7.926	24	PASS
11ac(HT20)	CH48	8.164	24	PASS
11ac(HT40)	CH38	7.204	24	PASS
11ac(HT40)	CH46	6.403	24	PASS
11ac(HT80)	CH42	5.435	24	PASS



Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11a	CH149	8.478	30	PASS
11a	CH157	8.292	30	PASS
11a	CH165	8.528	30	PASS
11n (HT20)	CH149	8.366	30	PASS
11n (HT20)	CH157	8.498	30	PASS
11n (HT20)	CH165	7.926	30	PASS
11n (HT40)	CH151	7.047	30	PASS
11n (HT40)	CH159	6.529	30	PASS
11ac(HT20)	CH149	8.483	30	PASS
11ac(HT20)	CH157	7.872	30	PASS
11ac(HT20)	CH165	8.211	30	PASS
11ac(HT40)	CH151	6.973	30	PASS
11ac(HT40)	CH159	6.990	30	PASS
11ac(HT80)	CH155	5.508	30	PASS

**MIMO: ANT1+ANT2**

Configuration Band I (5150 - 5250 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11n(HT20)	CH36	10.912	24	PASS
11n(HT20)	CH40	10.876	24	PASS
11n(HT20)	CH48	10.508	24	PASS
11n(HT40)	CH38	9.939	24	PASS
11n(HT40)	CH46	9.78	24	PASS
11ac(HT20)	CH36	11.32	24	PASS
11ac(HT20)	CH40	11.289	24	PASS
11ac(HT20)	CH48	11.283	24	PASS
11ac(HT40)	CH38	10.503	24	PASS
11ac(HT40)	CH46	9.935	24	PASS
11ac(HT80)	CH42	8.872	24	PASS



Configuration Band IV (5725 - 5850 MHz)				
Mode	Test channel	Maximum Conducted Output Power (dBm)	FCC Limit (dBm)	Result
11n (HT20)	CH149	11.641	30	PASS
11n (HT20)	CH157	11.731	30	PASS
11n (HT20)	CH165	11.36	30	PASS
11n (HT40)	CH151	10.136	30	PASS
11n (HT40)	CH159	9.983	30	PASS
11ac(HT20)	CH149	11.687	30	PASS
11ac(HT20)	CH157	11.08	30	PASS
11ac(HT20)	CH165	11.508	30	PASS
11ac(HT40)	CH151	10.074	30	PASS
11ac(HT40)	CH159	10.163	30	PASS
11ac(HT80)	CH155	8.903	30	PASS



4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	>500kHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2020
RF cable	Times	1-40G	HKE-034	Dec. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.3.3. Test data

Remark: This Report only show the test plots of the ANT1 worst case.


Band IV (5725 - 5850 MHz)						
Mode	Test channel	Frequency (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.3761	16.3163	0.5	PASS
11a	CH157	5785	16.3356	16.326	0.5	PASS
11a	CH165	5825	16.3466	16.3318	0.5	PASS
11n(HT20)	CH149	5745	17.5732	17.584	0.5	PASS
11n(HT20)	CH157	5785	17.5806	17.3084	0.5	PASS
11n(HT20)	CH165	5825	17.5873	17.5607	0.5	PASS
11n(HT40)	CH151	5755	35.9642	34.1746	0.5	PASS
11n(HT40)	CH159	5795	36.0155	28.3272	0.5	PASS
11ac(HT20)	CH149	5745	17.5698	15.2546	0.5	PASS
11ac(HT20)	CH157	5785	17.585	12.2288	0.5	PASS
11ac(HT20)	CH165	5825	17.587	17.0583	0.5	PASS
11ac(HT40)	CH151	5755	35.9403	28.1973	0.5	PASS
11ac(HT40)	CH159	5795	36.046	30.7282	0.5	PASS
11ac(HT80)	CH155	5775	75.2371	72.5631	0.5	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a

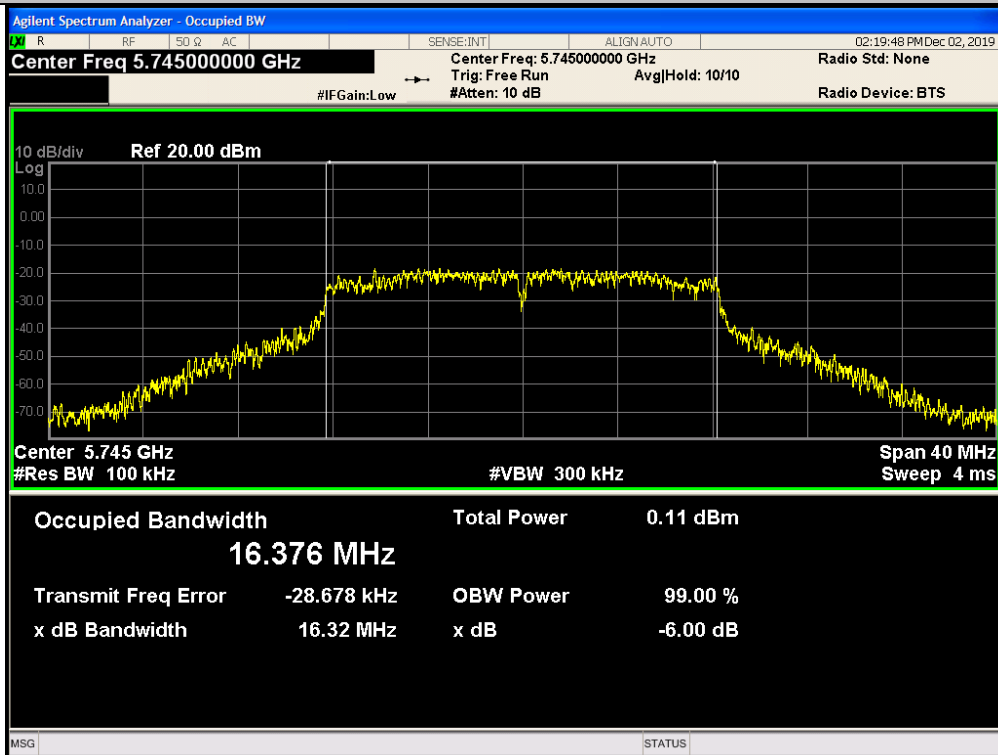

Low

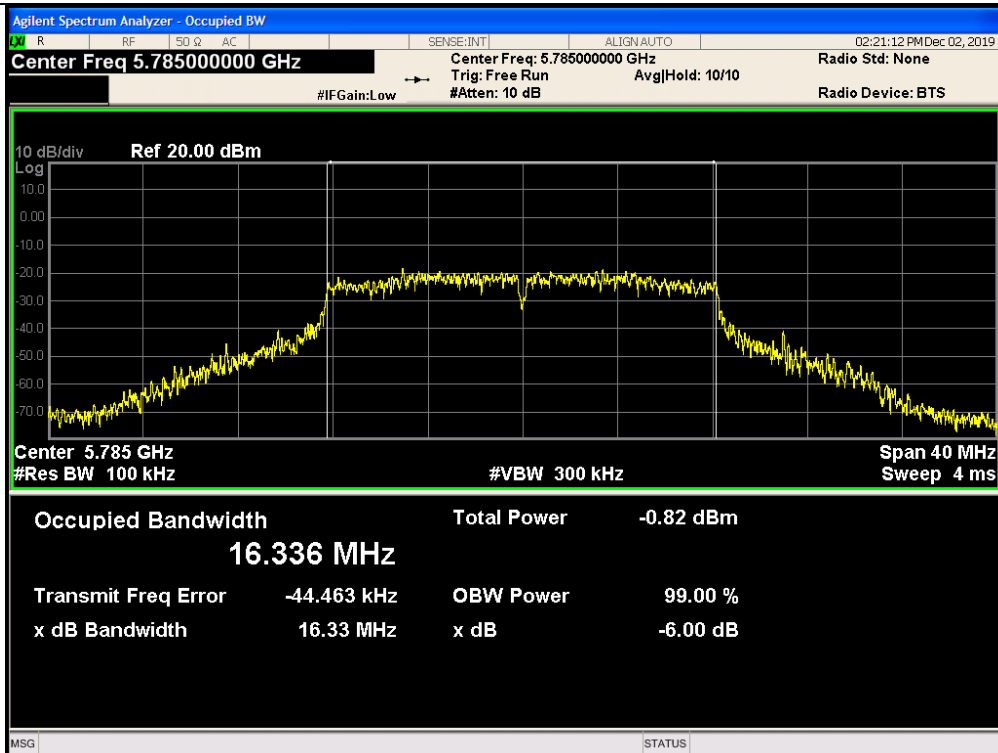


Mid

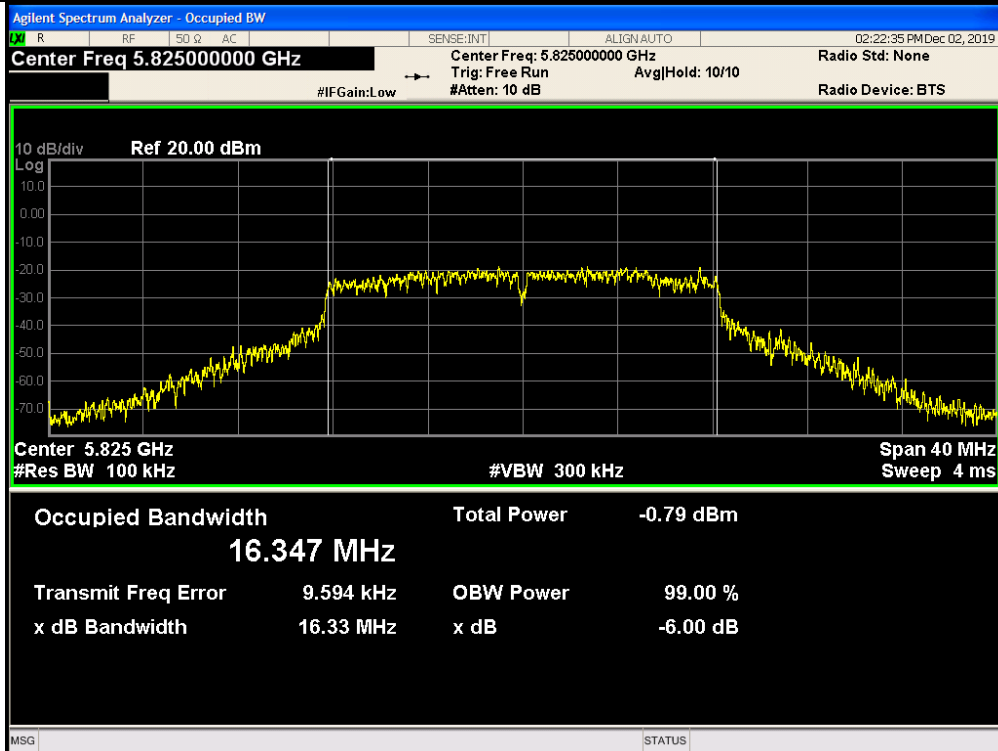


High


802.11n(HT20)

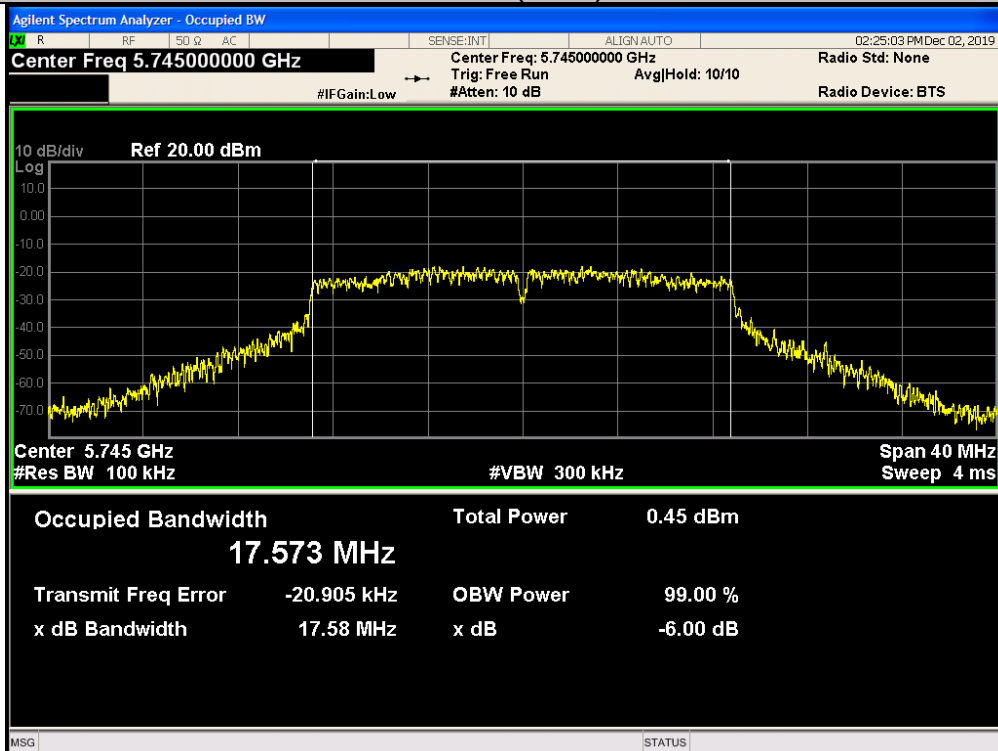

Low

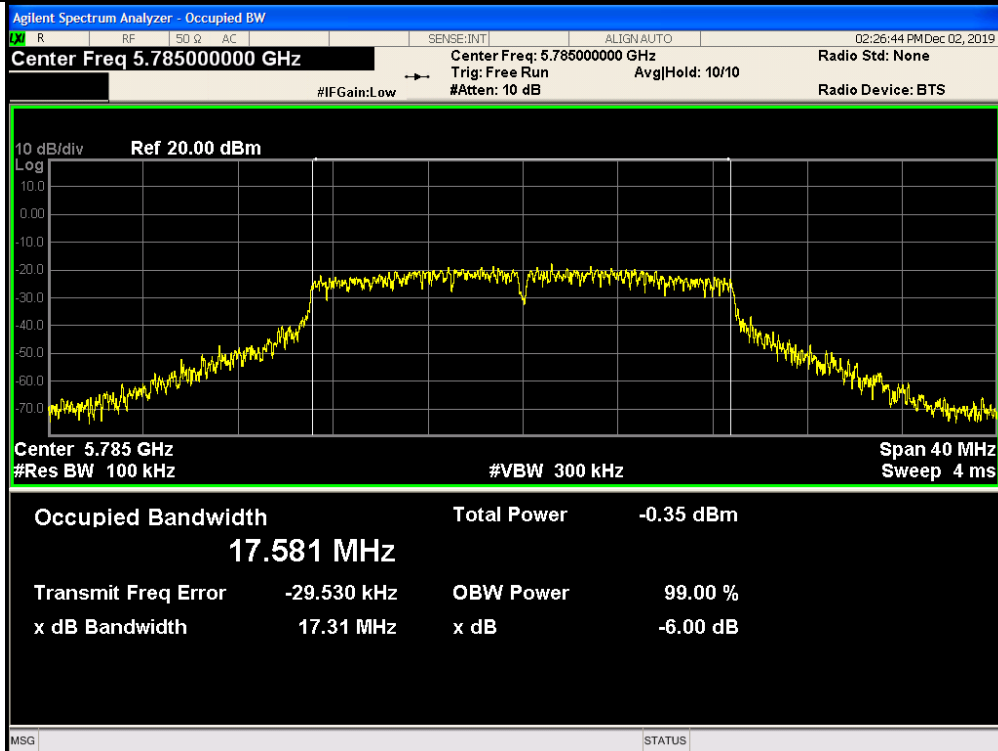


Mid

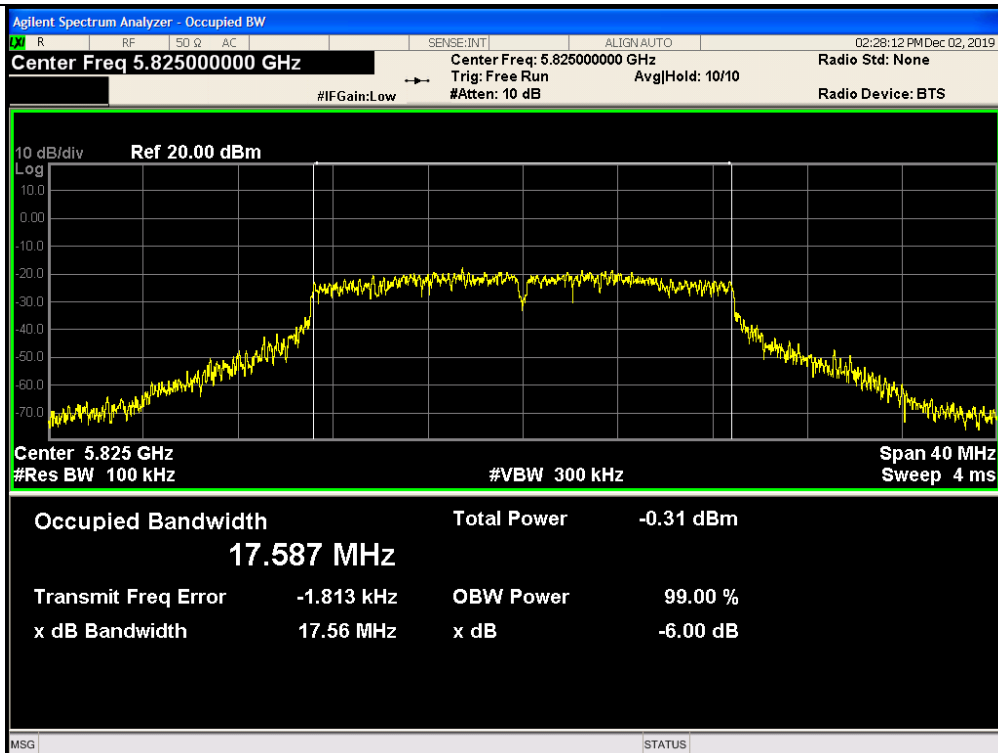


High



802.11n(HT40)

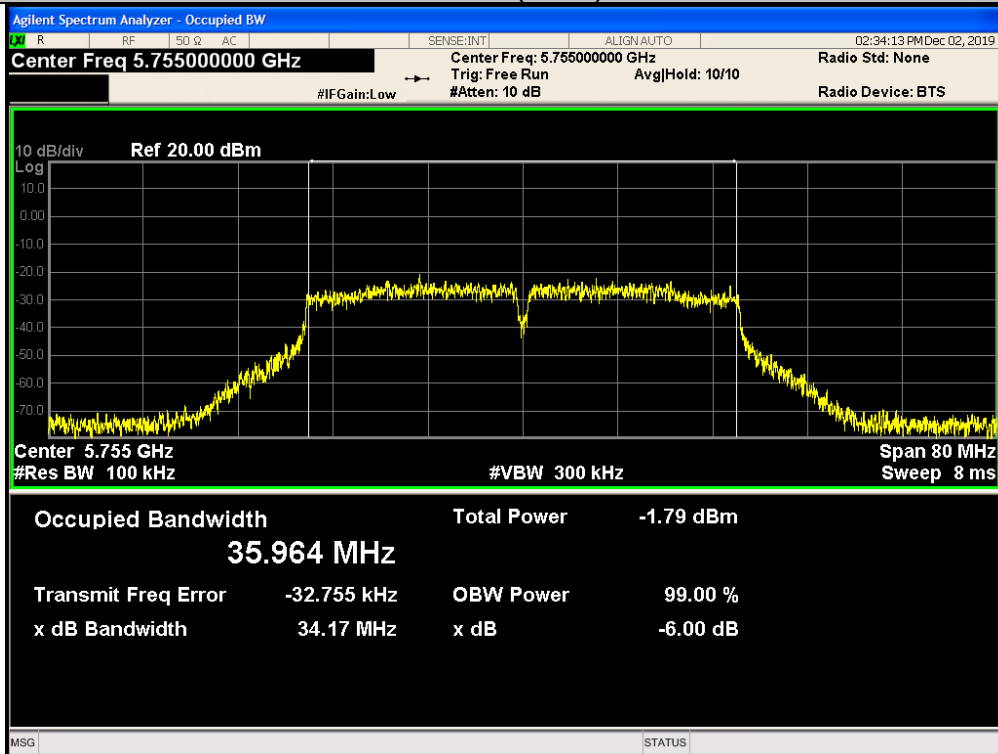


Low

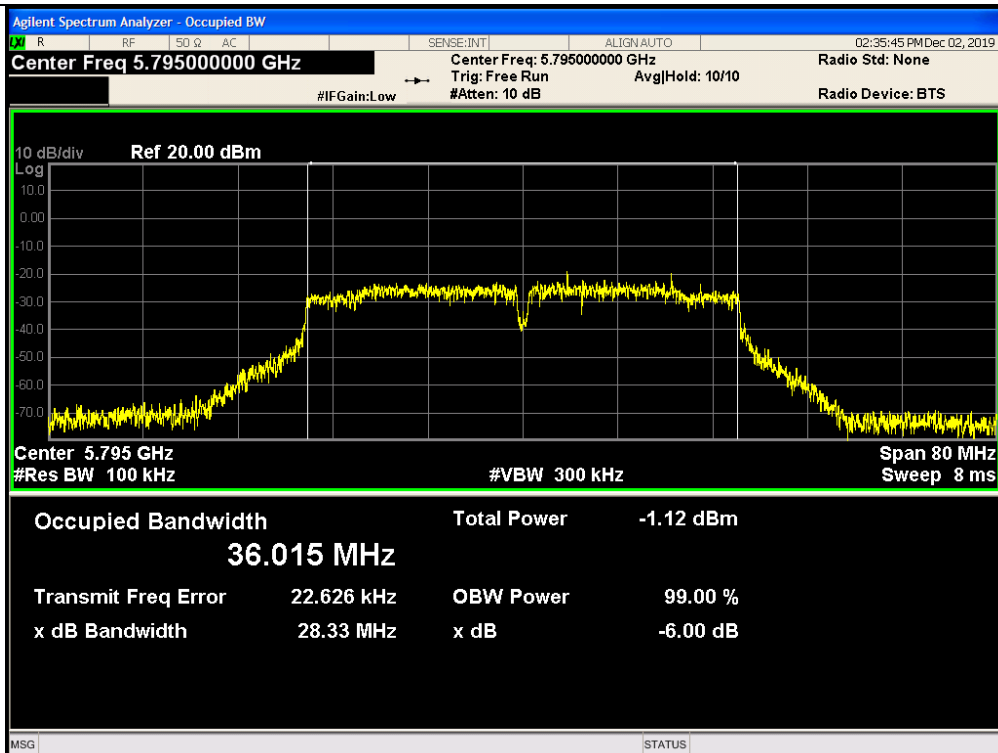


High


802.11ac(HT20)

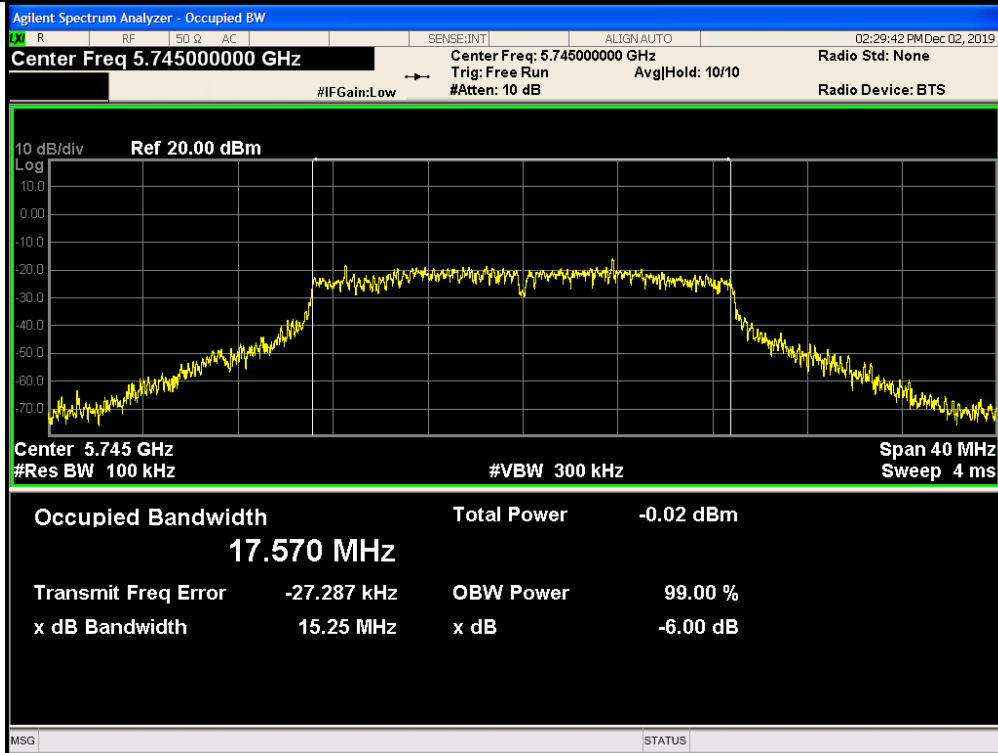

Low

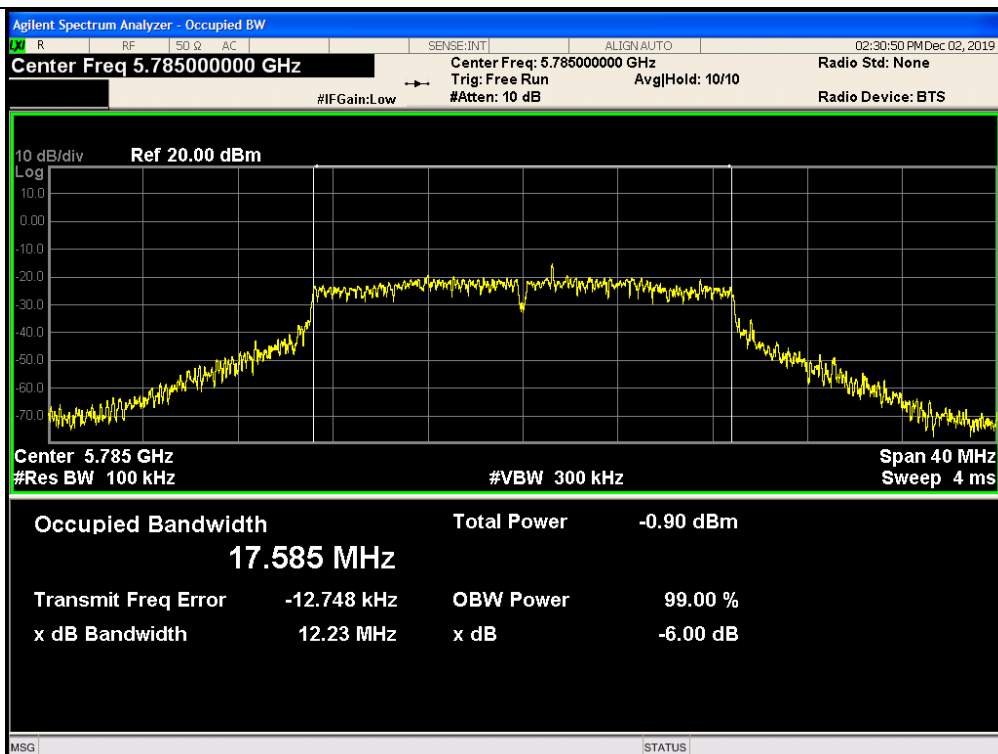


Mid

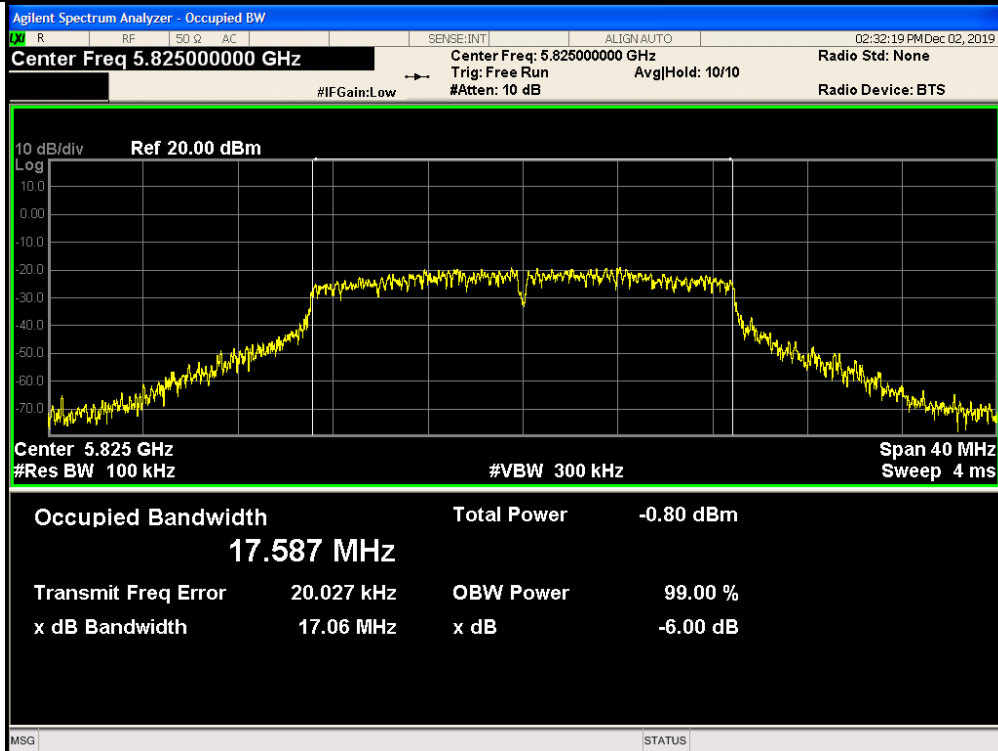


High

802.11ac(HT40)

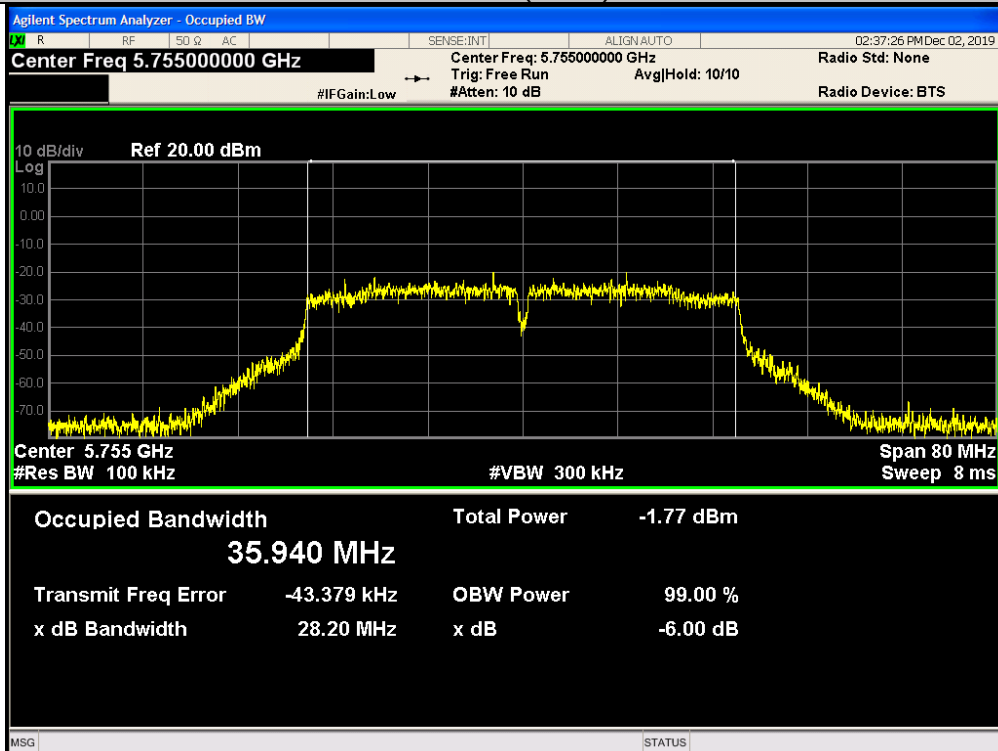


Low

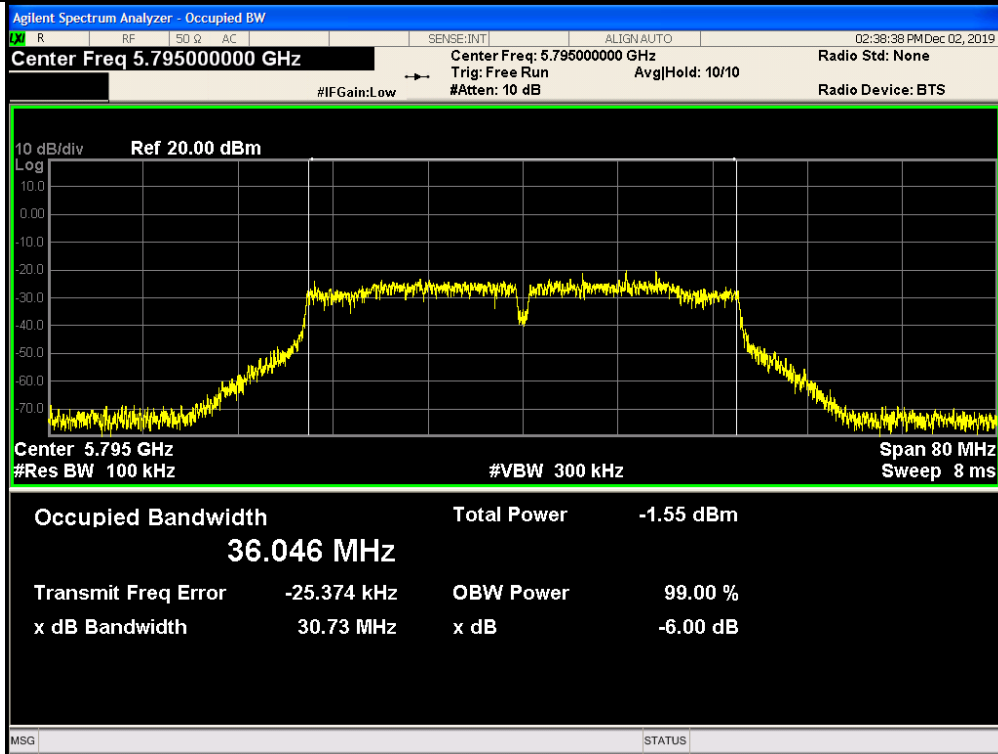

High

802.11ac(HT80)

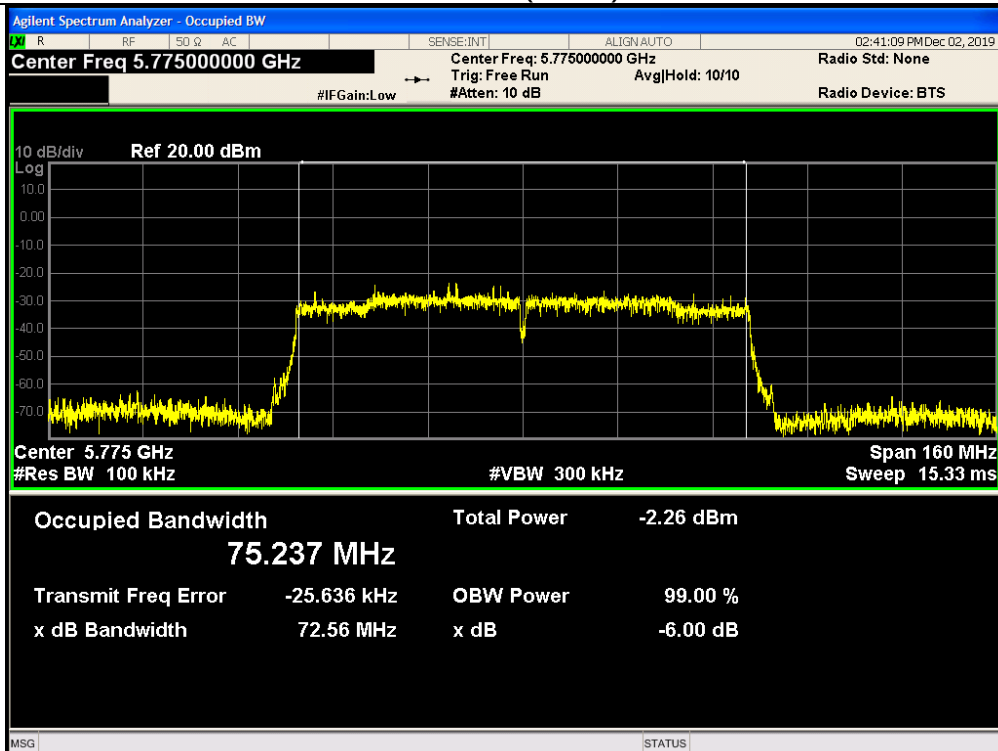



4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)& Part 2 J Section 2.1049
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% \text{ EBW}$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	PASS

4.4.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2020
RF cable	Times	1-40G	HKE-034	Dec. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.4.3. Test data

Remark: This Report only show the test plots of the ANT1 worst case.

Band I


Mode	Test channel	Frequency (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Verdict
11a	CH36	5180	16.5422	23.4312	PASS
11a	CH40	5200	16.5472	23.322	PASS
11a	CH48	5240	16.5523	22.2635	PASS
11n(HT20)	CH36	5180	17.7079	22.4802	PASS
11n(HT20)	CH40	5200	17.7119	23.796	PASS
11n(HT20)	CH48	5240	17.7132	22.9998	PASS
11n(HT40)	CH38	5190	35.996	41.0649	PASS
11n(HT40)	CH46	5230	35.9803	40.9633	PASS
11ac(HT20)	CH36	5180	17.7078	23.0643	PASS
11ac(HT20)	CH40	5200	17.737	22.9957	PASS
11ac(HT20)	CH48	5240	17.7089	24.7077	PASS
11ac(HT40)	CH38	5190	35.9792	41.3561	PASS
11ac(HT40)	CH46	5230	35.9617	41.475	PASS
11ac(HT80)	CH42	5210	75.1862	79.5525	PASS

Test plots as follows:




Band I (5150 – 5250 MHz)


802.11a

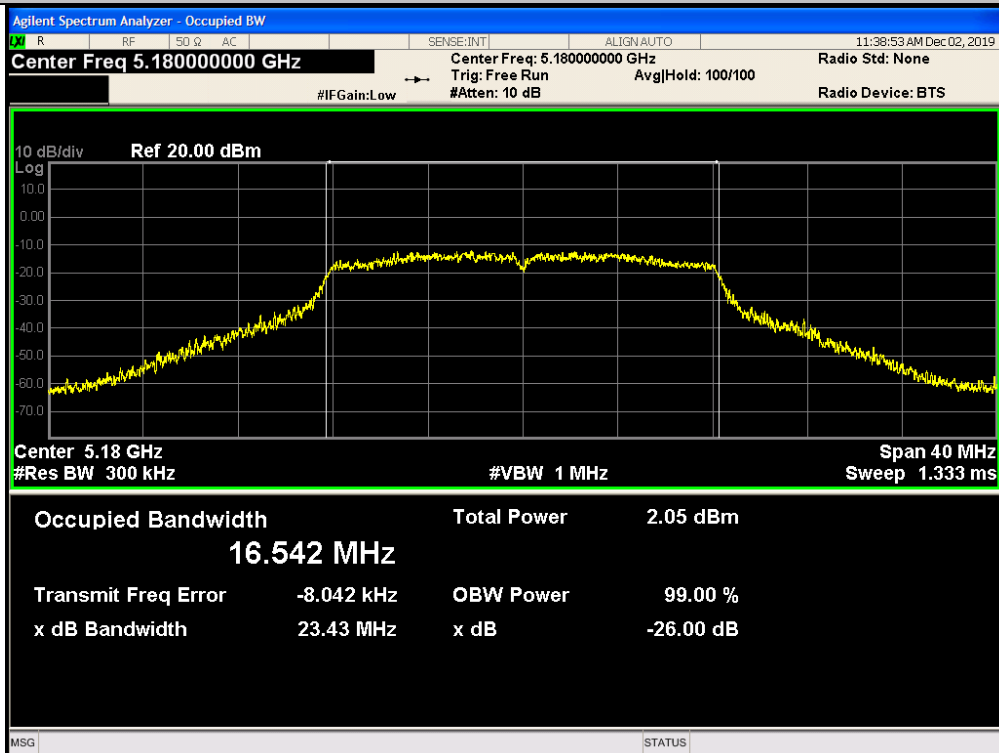

Low

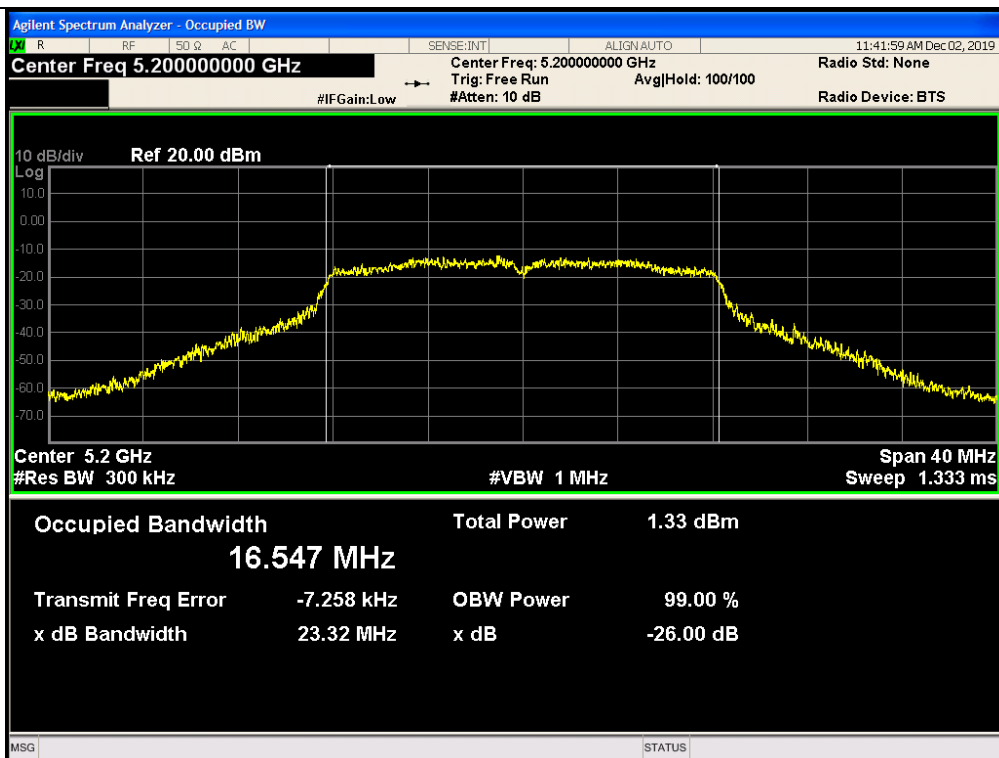


Mid

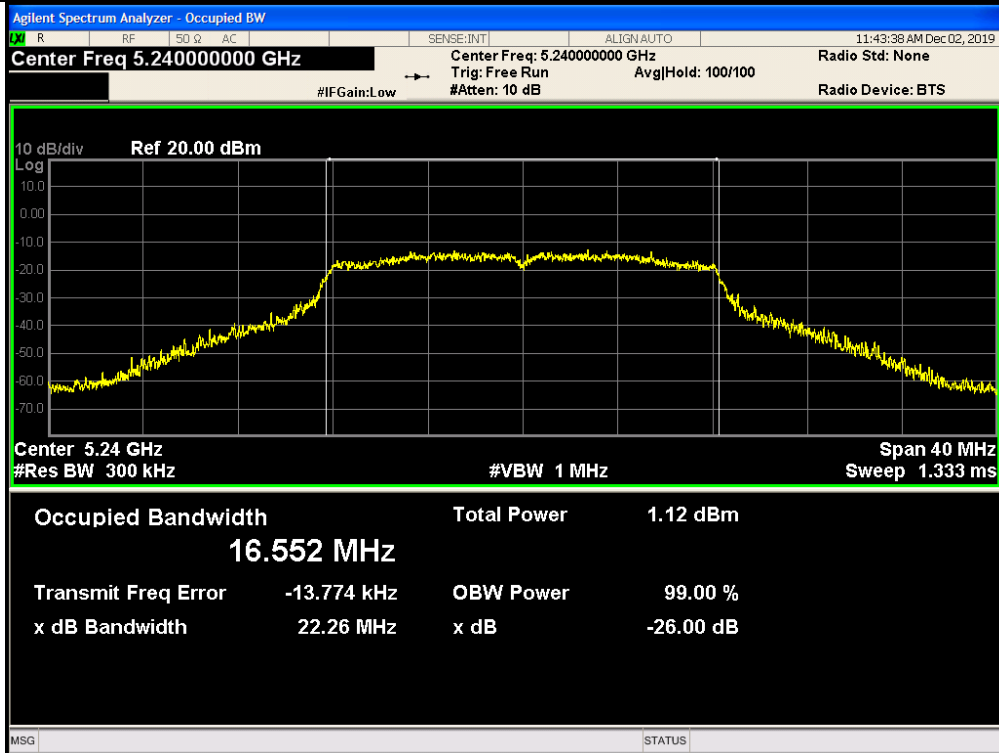


High


802.11n(HT20)

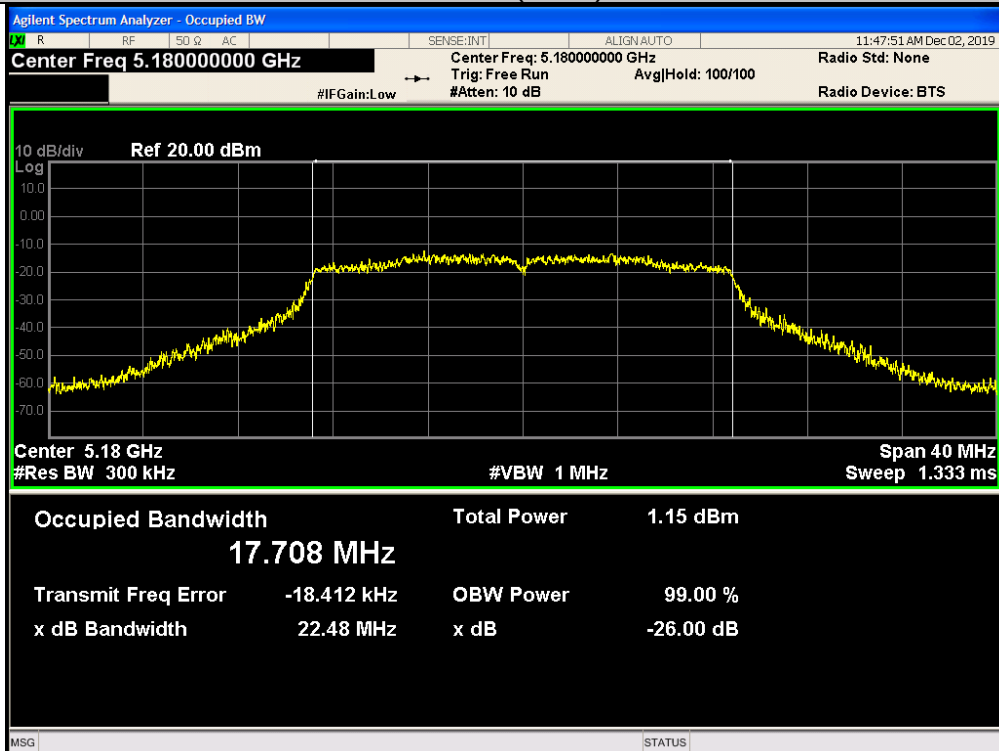

Low

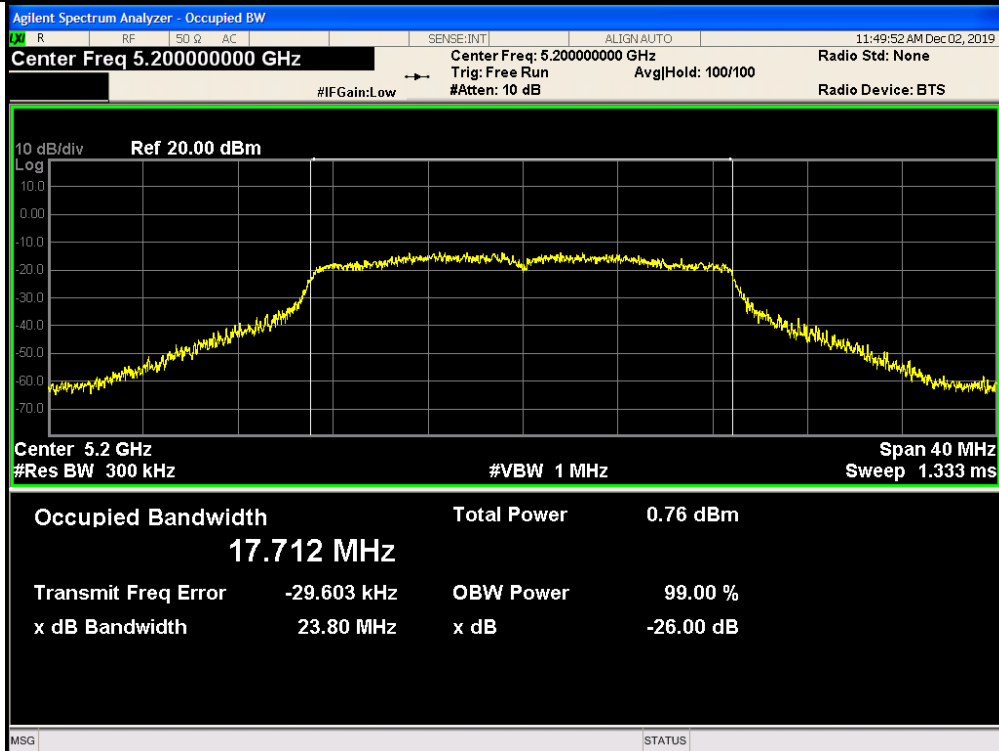


Mid

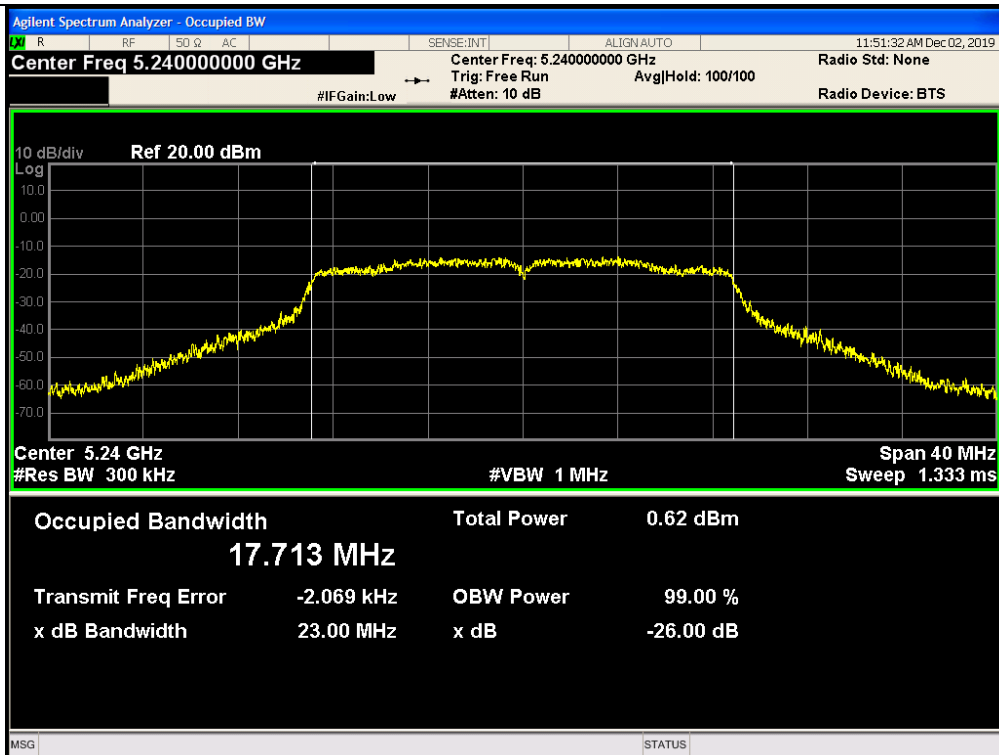


High



802.11n(HT40)

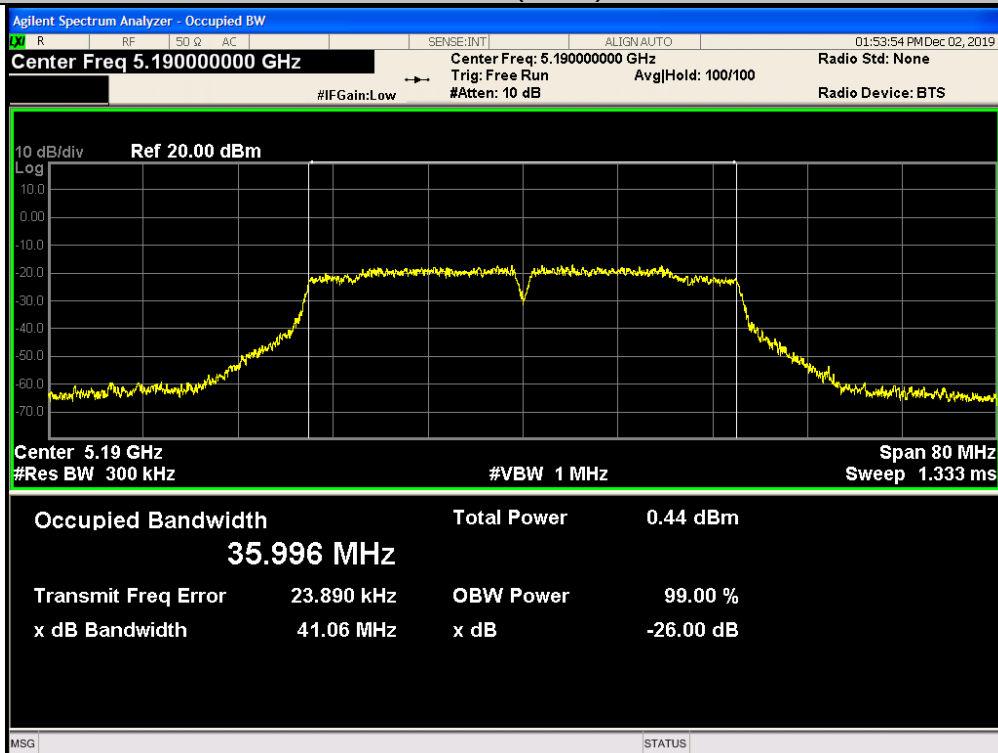


Low

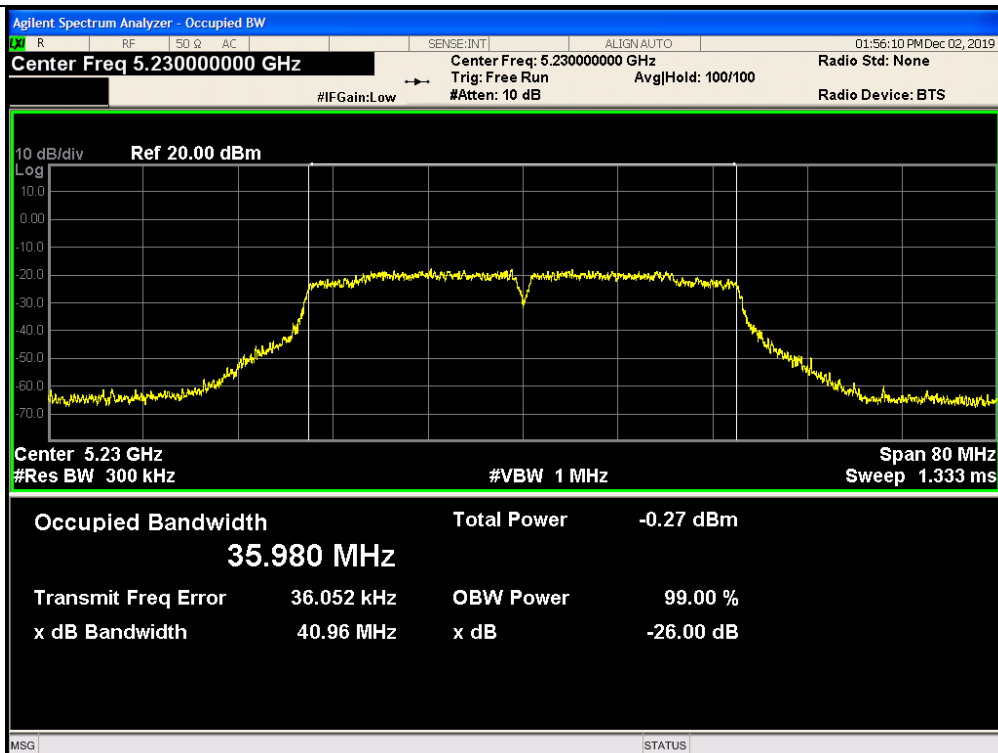


High




802.11ac(HT20)

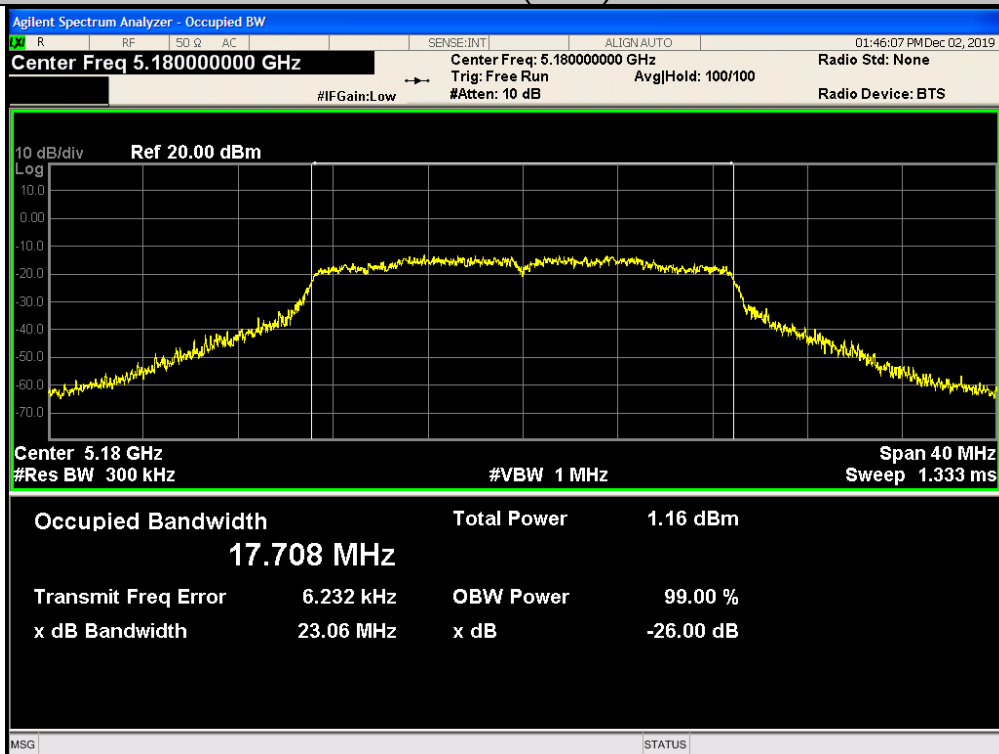

Low

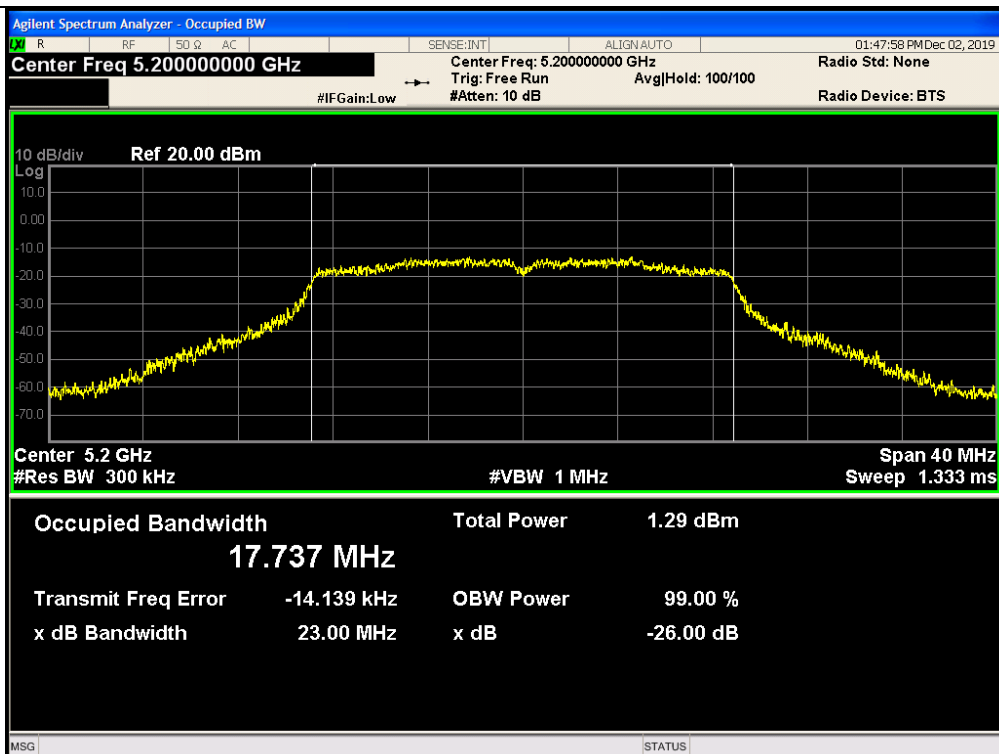


Mid


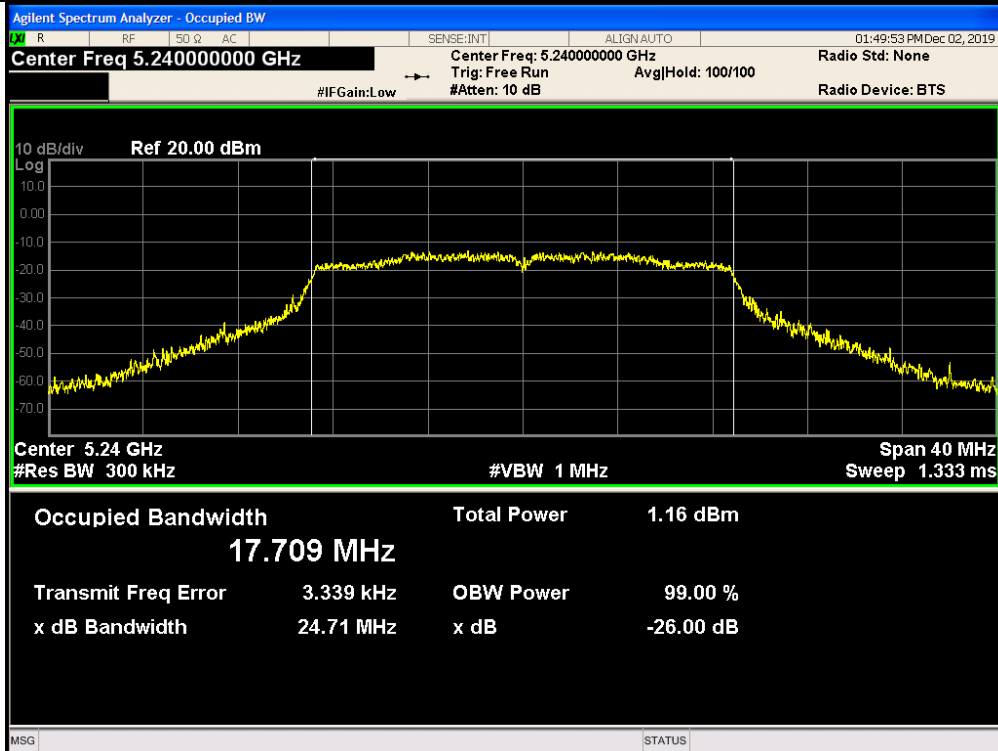


High

802.11ac(HT40)

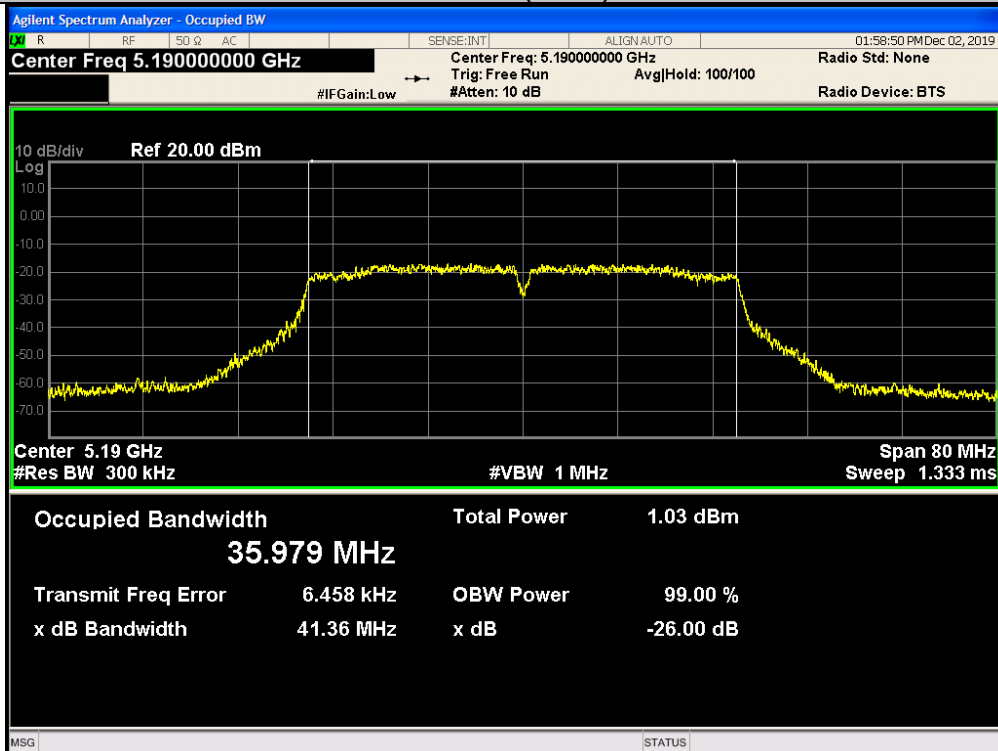

Low

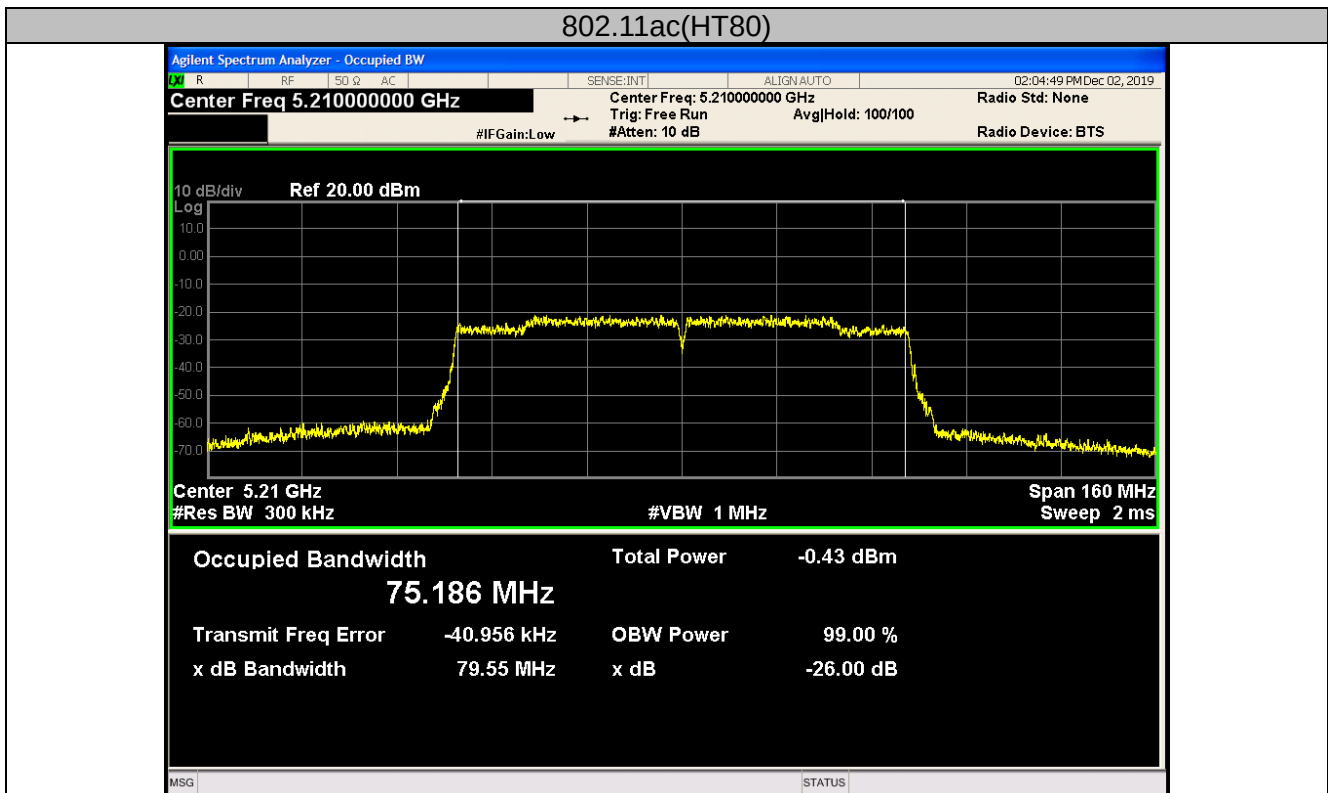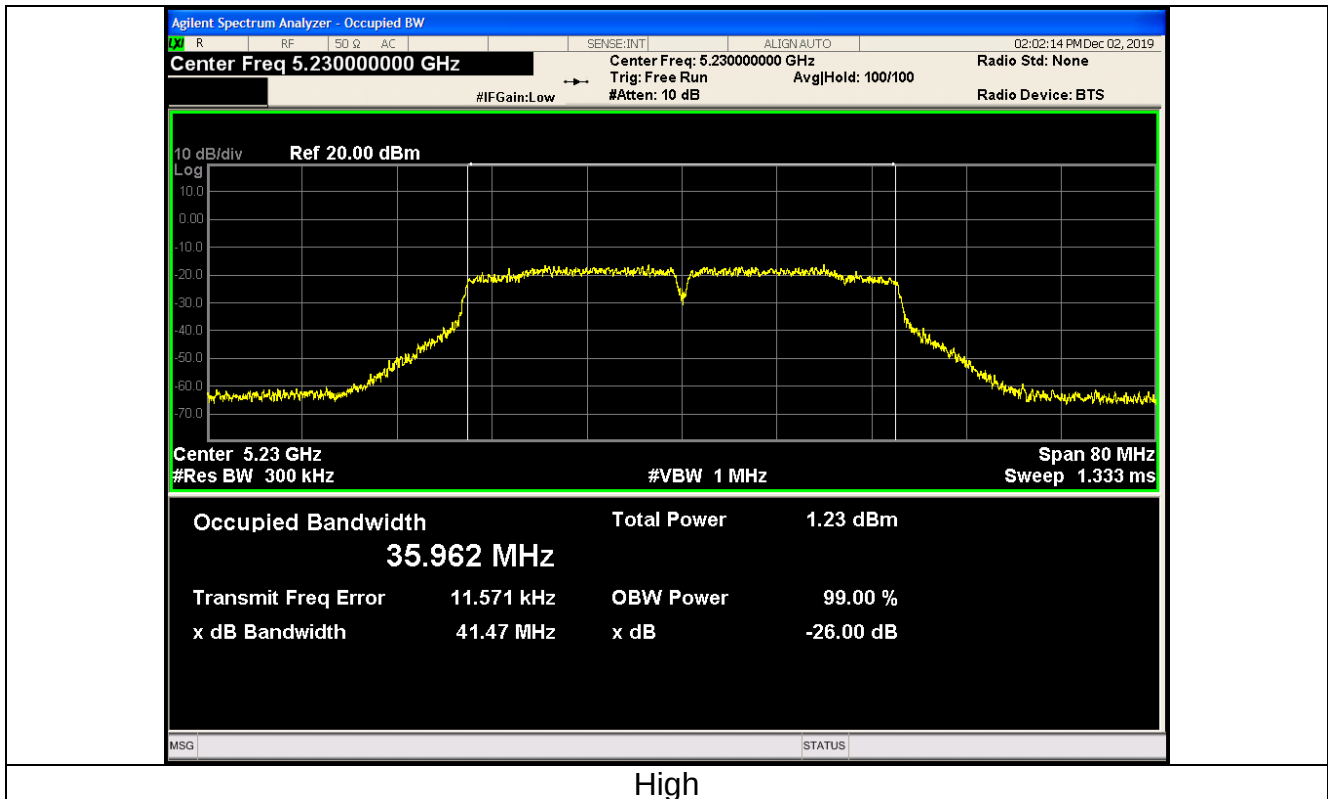



4.5. Power Spectral Density

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	$\leq 11.00\text{dBm/MHz}$ for Band I 5150MHz-5250MHz $\leq 30.00\text{dBm/500KHz}$ for Band IV 5725MHz-5850MHz The e.i.r.p spectral density for Band I 5150MHz – 5250 MHz should not exceed 10dBm/MHz
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW $\geq 3 \times$ RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2020
RF cable	Times	1-40G	HKE-034	Dec. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data

ANT1

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-5.778	0	-5.778	11	PASS
11a	CH40	-5.107	0	-5.107	11	PASS
11a	CH48	-5.337	0	-5.337	11	PASS
11n(HT20)	CH36	-6.179	0	-6.179	11	PASS
11n(HT20)	CH40	-6.192	0	-6.192	11	PASS
11n(HT20)	CH48	-6.06	0	-6.06	11	PASS
11n(HT40)	CH38	-10.978	0	-10.978	11	PASS
11n(HT40)	CH46	-10.942	0	-10.942	11	PASS
11ac(HT20)	CH36	-5.369	0	-5.369	11	PASS
11ac(HT20)	CH40	-5.674	0	-5.674	11	PASS
11ac(HT20)	CH48	-5.522	0	-5.522	11	PASS
11ac(HT40)	CH38	-10.151	0	-10.151	11	PASS
11ac(HT40)	CH46	-10.05	0	-10.05	11	PASS
11ac(HT80)	CH42	-14.719	0	-14.719	11	PASS



Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-0.778	0	-0.778	30	PASS
11a	CH157	-1.621	0	-1.621	30	PASS
11a	CH161	-1.307	0	-1.307	30	PASS
11n(HT20)	CH149	-1.305	0	-1.305	30	PASS
11n(HT20)	CH157	-1.586	0	-1.586	30	PASS
11n(HT20)	CH161	-1.711	0	-1.711	30	PASS
11n(HT40)	CH151	-6.514	0	-6.514	30	PASS
11n(HT40)	CH159	-6.756	0	-6.756	30	PASS
11ac(HT20)	CH149	-1.664	0	-1.664	30	PASS
11ac(HT20)	CH157	-1.611	0	-1.611	30	PASS
11ac(HT20)	CH161	-1.146	0	-1.146	30	PASS
11ac(HT40)	CH151	-6.587	0	-6.587	30	PASS
11ac(HT40)	CH159	-5.929	0	-5.929	30	PASS
11ac(HT80)	CH155	-10.131	0	-10.131	30	PASS



ANT2

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11a	CH36	-5.778	0	-5.891	11	PASS
11a	CH40	-5.107	0	-5.326	11	PASS
11a	CH48	-5.337	0	-5.483	11	PASS
11n(HT20)	CH36	-6.179	0	-6.596	11	PASS
11n(HT20)	CH40	-6.192	0	-6.338	11	PASS
11n(HT20)	CH48	-6.06	0	-6.175	11	PASS
11n(HT40)	CH38	-10.978	0	-11.065	11	PASS
11n(HT40)	CH46	-10.942	0	-11.329	11	PASS
11ac(HT20)	CH36	-5.369	0	-5.583	11	PASS
11ac(HT20)	CH40	-5.674	0	-5.984	11	PASS
11ac(HT20)	CH48	-5.522	0	-5.957	11	PASS
11ac(HT40)	CH38	-10.151	0	-10.638	11	PASS
11ac(HT40)	CH46	-10.05	0	-10.142	11	PASS
11ac(HT80)	CH42	-14.719	0	-15.210	11	PASS



Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-0.778	0	-1.055	30	PASS
11a	CH157	-1.621	0	-1.873	30	PASS
11a	CH161	-1.307	0	-1.708	30	PASS
11n(HT20)	CH149	-1.305	0	-1.737	30	PASS
11n(HT20)	CH157	-1.586	0	-2.052	30	PASS
11n(HT20)	CH161	-1.711	0	-2.055	30	PASS
11n(HT40)	CH151	-6.514	0	-6.689	30	PASS
11n(HT40)	CH159	-6.756	0	-6.976	30	PASS
11ac(HT20)	CH149	-1.664	0	-1.861	30	PASS
11ac(HT20)	CH157	-1.611	0	-1.682	30	PASS
11ac(HT20)	CH161	-1.146	0	-1.586	30	PASS
11ac(HT40)	CH151	-6.587	0	-6.820	30	PASS
11ac(HT40)	CH159	-5.929	0	-5.998	30	PASS
11ac(HT80)	CH155	-10.131	0	-10.612	30	PASS



MIMO: ANT1+ANT2

Configuration Band I (5150 - 5250 MHz)						
Mode	Test channel	Level [dBm/MHz]	10log(1/x) Factor [dB]	Power Spectral Density	Limit (dBm/MHz)	Result
11n(HT20)	CH36	-3.372	0	-3.372	11	PASS
11n(HT20)	CH40	-3.254	0	-3.254	11	PASS
11n(HT20)	CH48	-3.107	0	-3.107	11	PASS
11n(HT40)	CH38	-8.011	0	-8.011	11	PASS
11n(HT40)	CH46	-8.121	0	-8.121	11	PASS
11ac(HT20)	CH36	-2.464	0	-2.464	11	PASS
11ac(HT20)	CH40	-2.816	0	-2.816	11	PASS
11ac(HT20)	CH48	-2.724	0	-2.724	11	PASS
11ac(HT40)	CH38	-7.377	0	-7.377	11	PASS
11ac(HT40)	CH46	-7.085	0	-7.085	11	PASS
11ac(HT80)	CH42	-11.947	0	-11.947	11	PASS




Configuration Band IV (5725 - 5850 MHz)						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11n(HT20)	CH149	1.705	0	1.705	30	PASS
11n(HT20)	CH157	1.424	0	1.424	30	PASS
11n(HT20)	CH161	1.299	0	1.299	30	PASS
11n(HT40)	CH151	-3.504	0	-3.504	30	PASS
11n(HT40)	CH159	-3.746	0	-3.746	30	PASS
11ac(HT20)	CH149	1.346	0	1.346	30	PASS
11ac(HT20)	CH157	1.399	0	1.399	30	PASS
11ac(HT20)	CH161	1.864	0	1.864	30	PASS
11ac(HT40)	CH151	-3.577	0	-3.577	30	PASS
11ac(HT40)	CH159	-2.919	0	-2.919	30	PASS
11ac(HT80)	CH155	-7.121	0	-7.121	30	PASS

Remark: This Report only show the test plots of the ANT1 worst case.


Test plots as follows:




Band I (5150 – 5250 MHz)

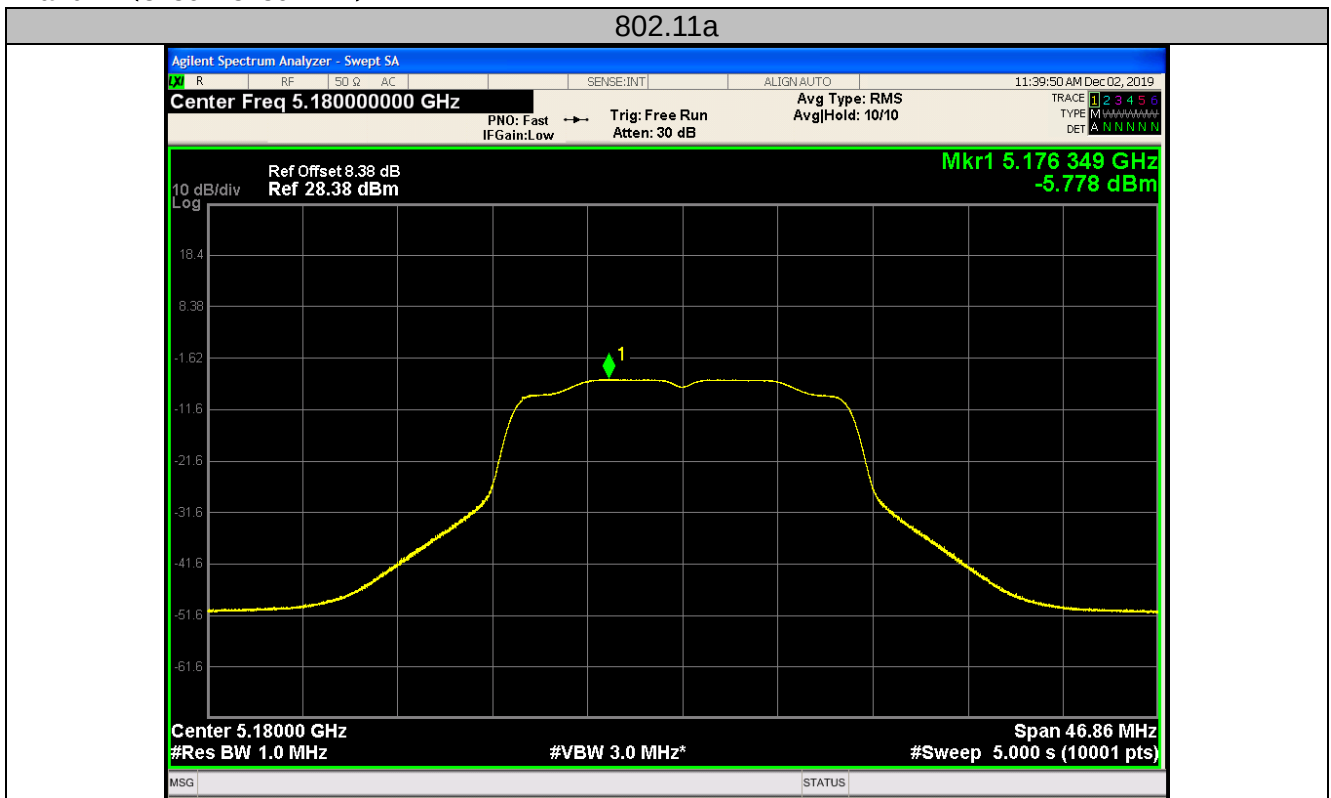

Low

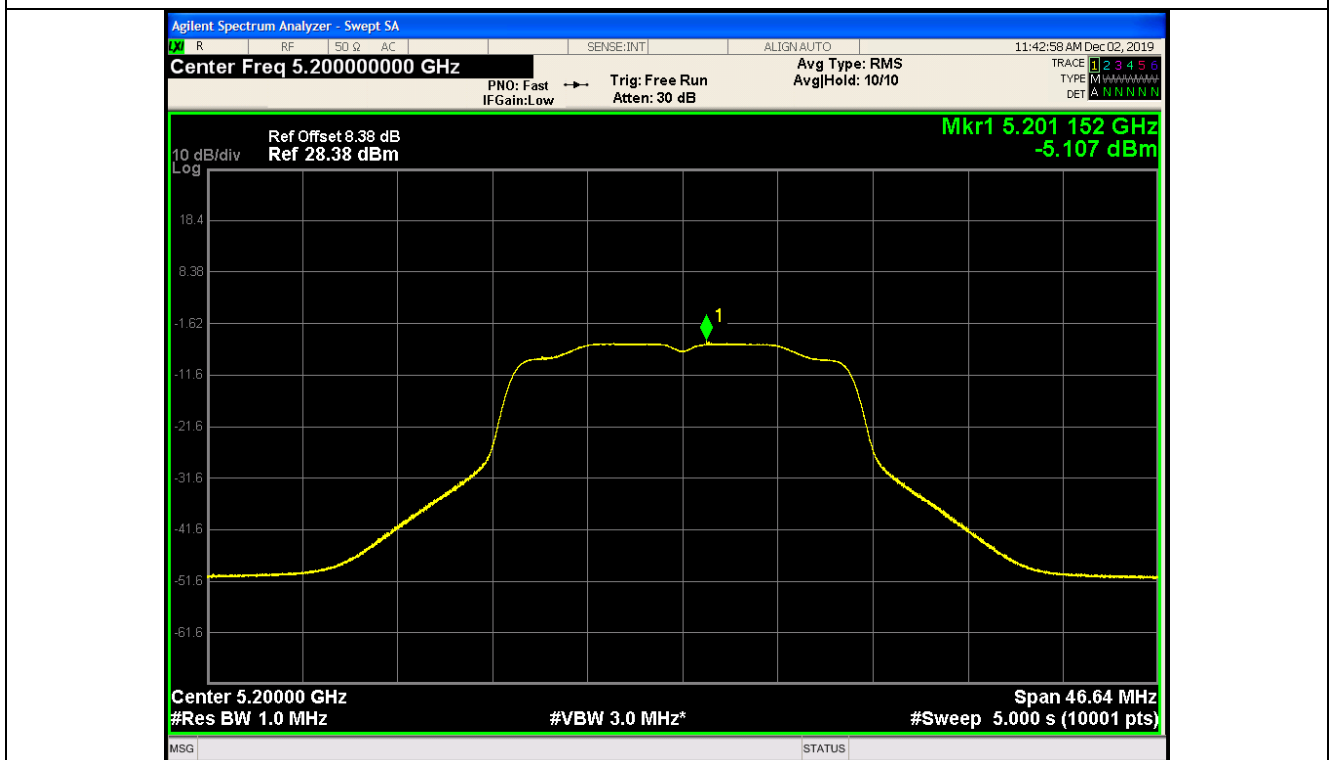


Mid

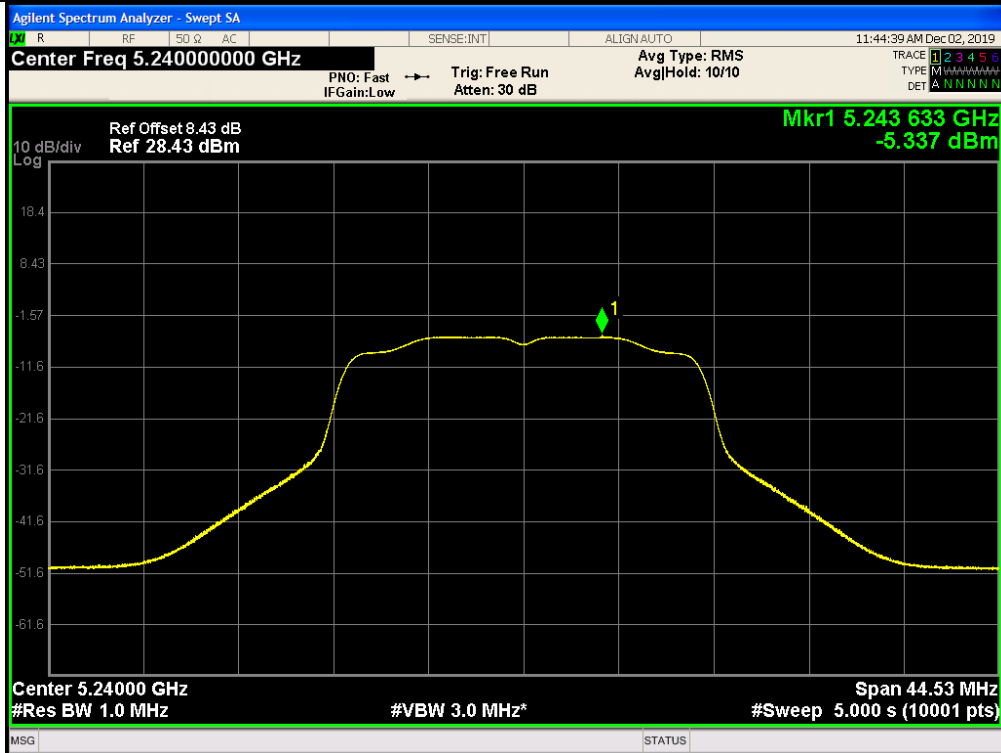


High


802.11n(HT20)

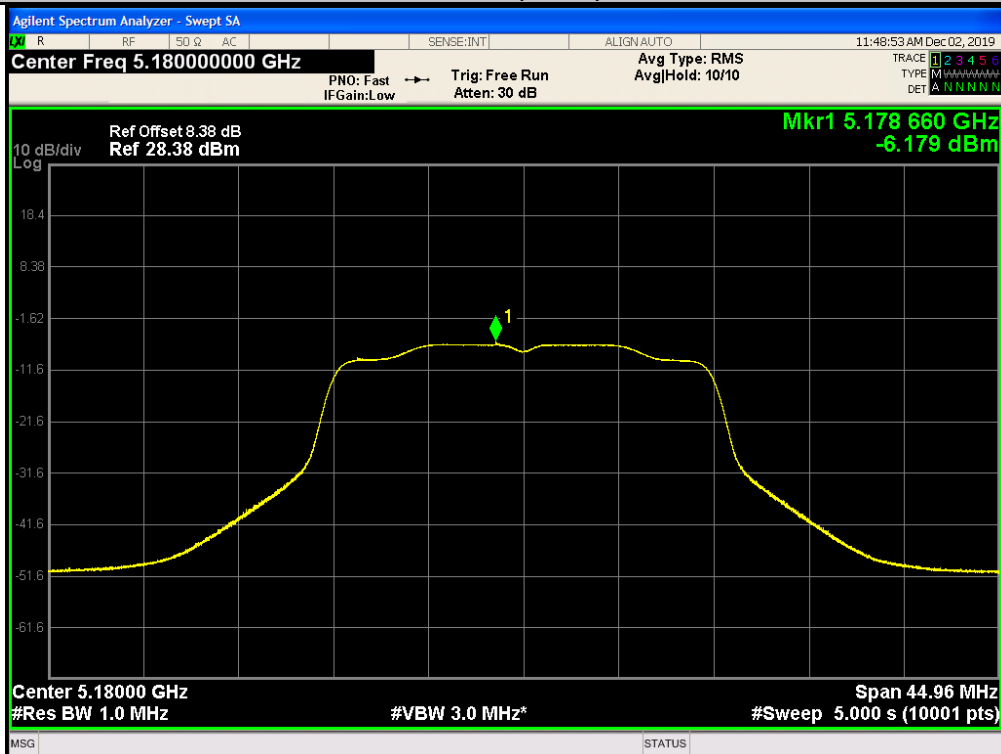

Low

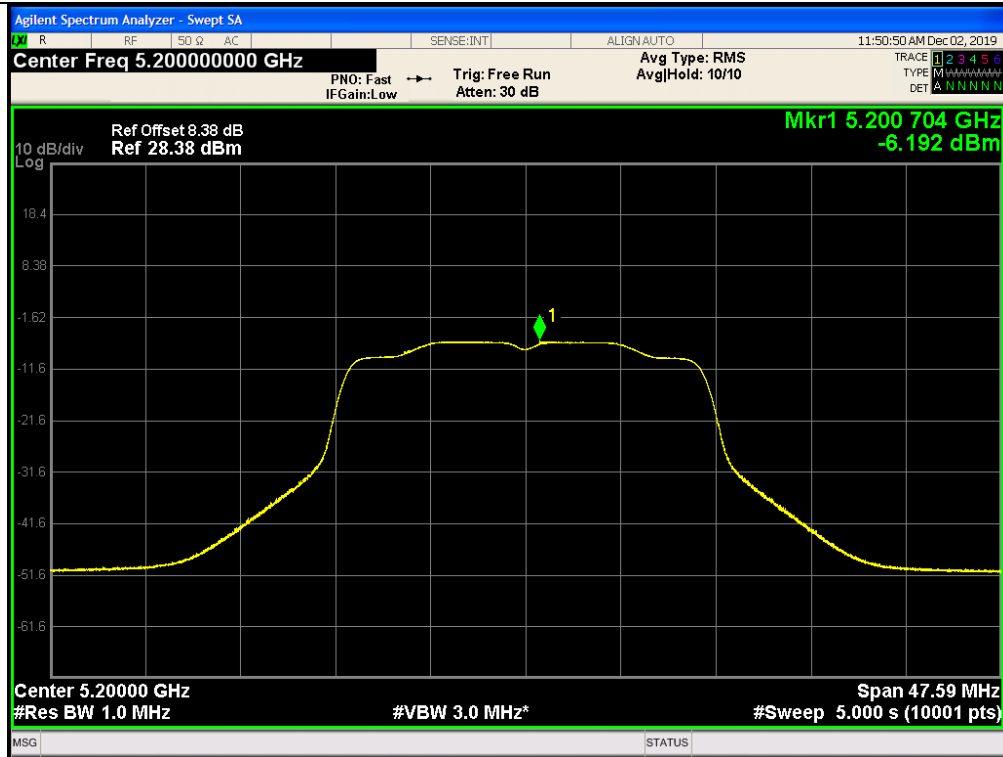


Mid

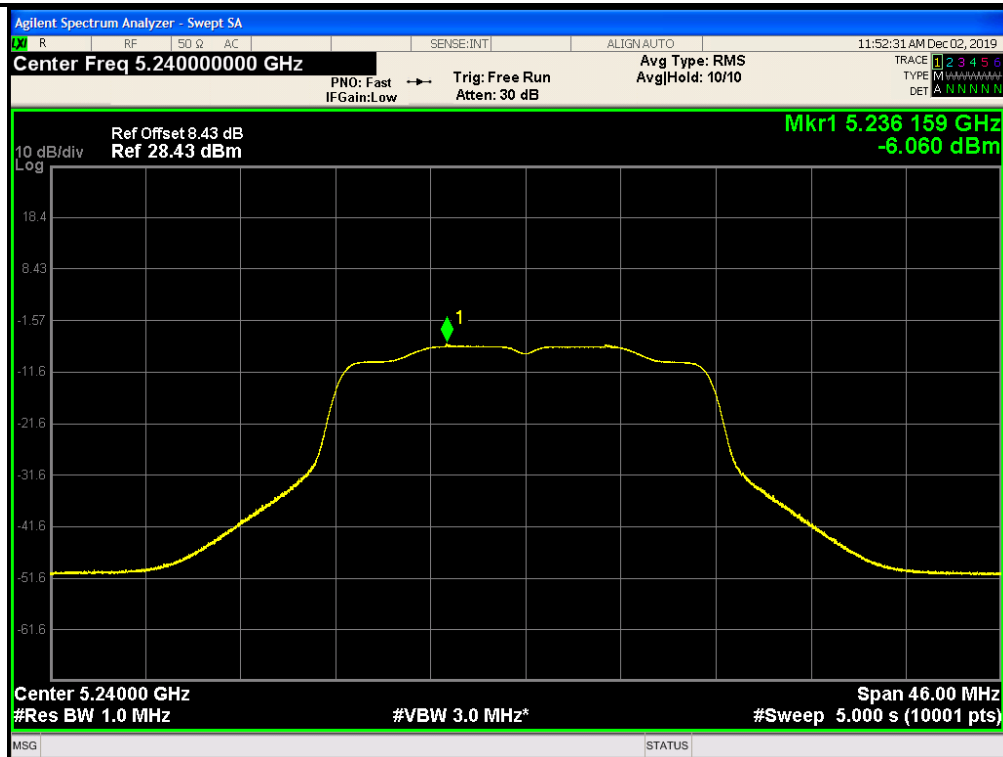


High



802.11n(HT40)

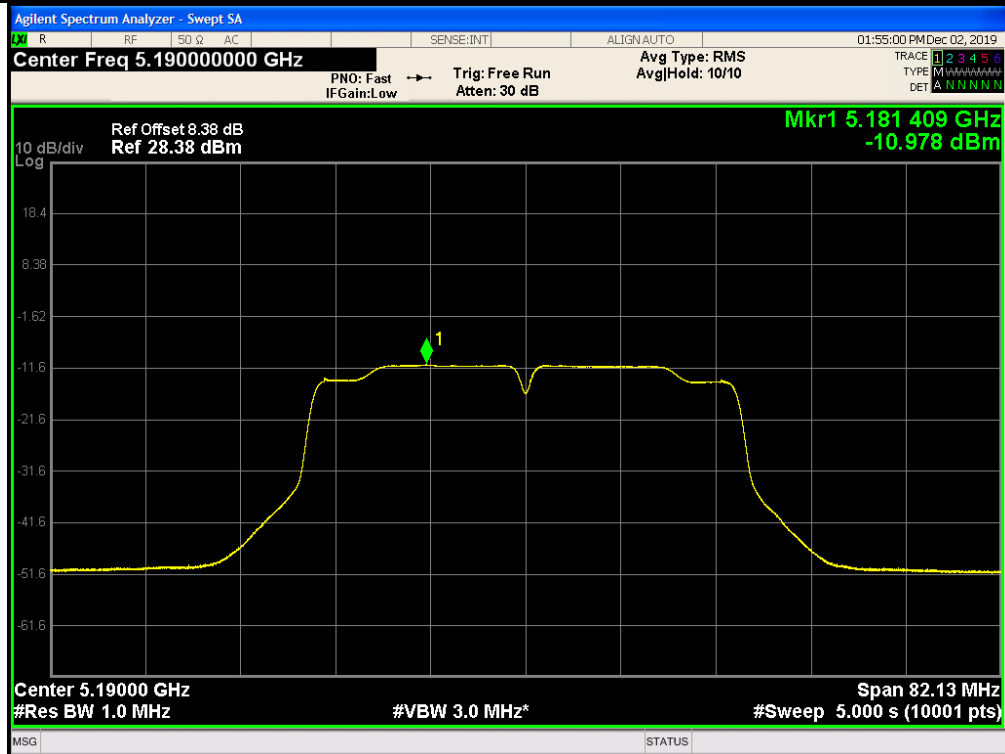


Low

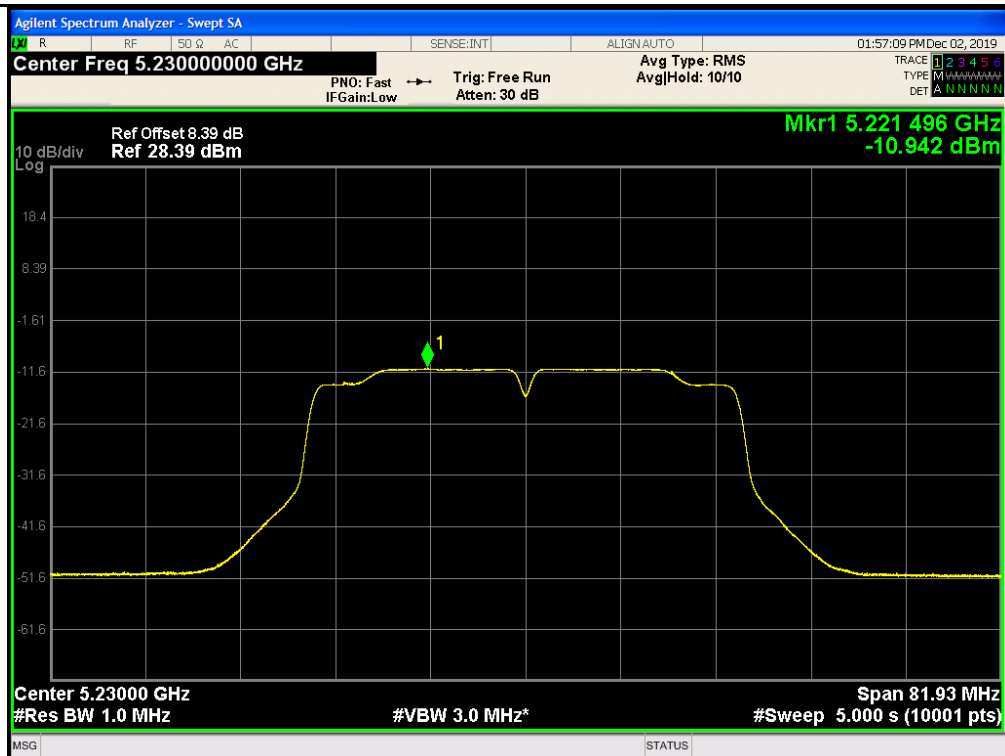


High




802.11ac(HT20)

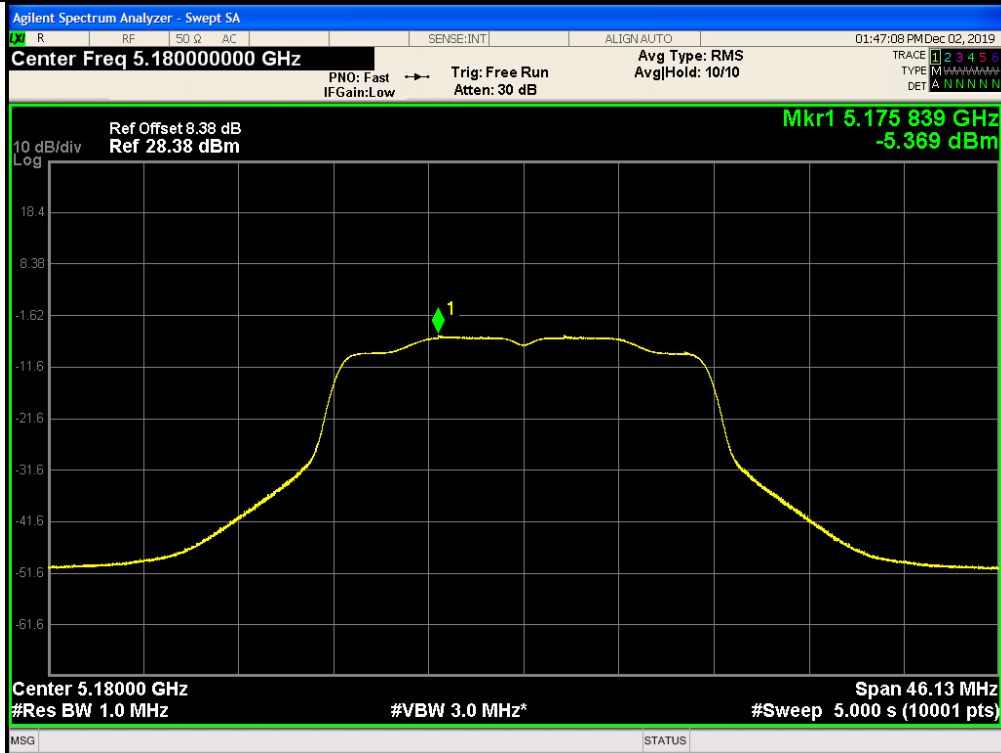

Low

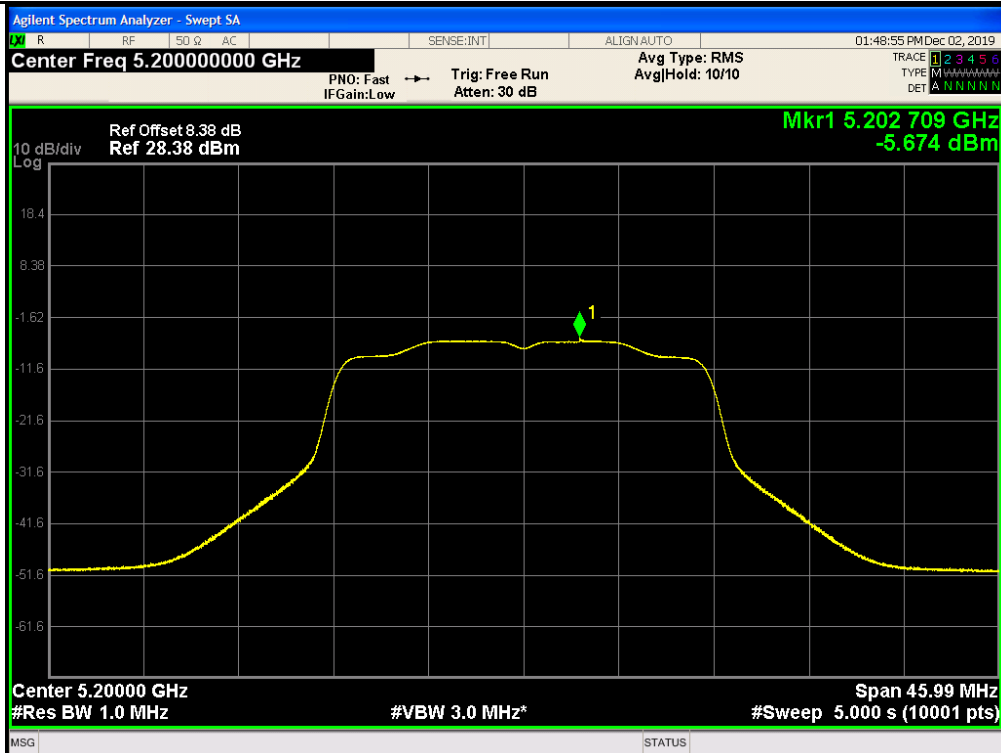


Mid

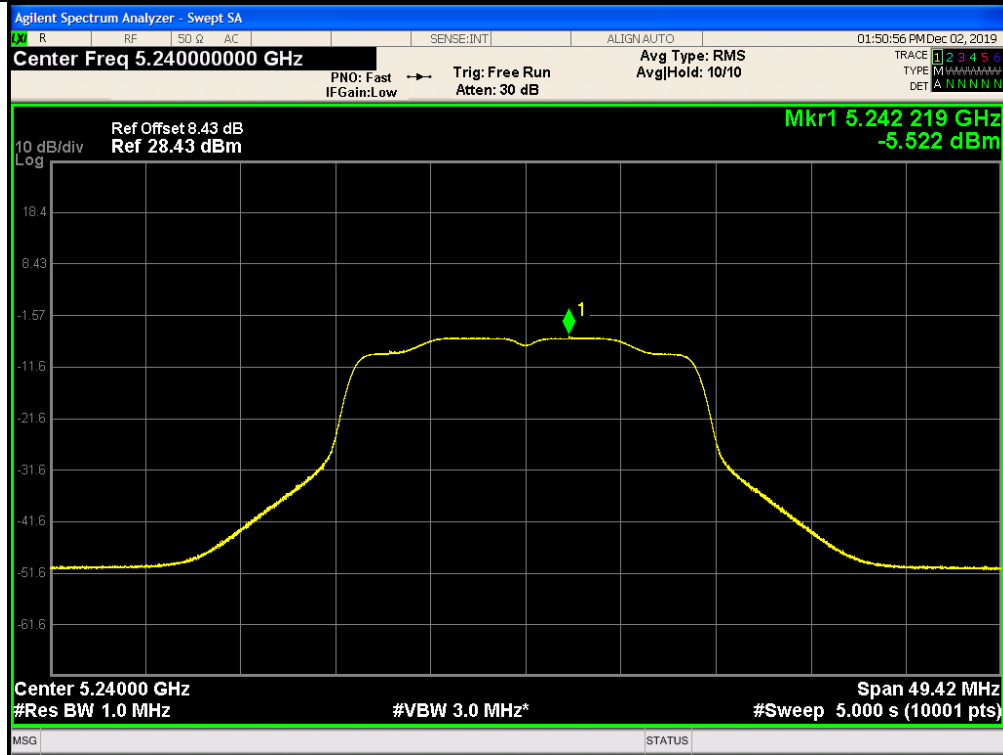


High

802.11ac(HT40)

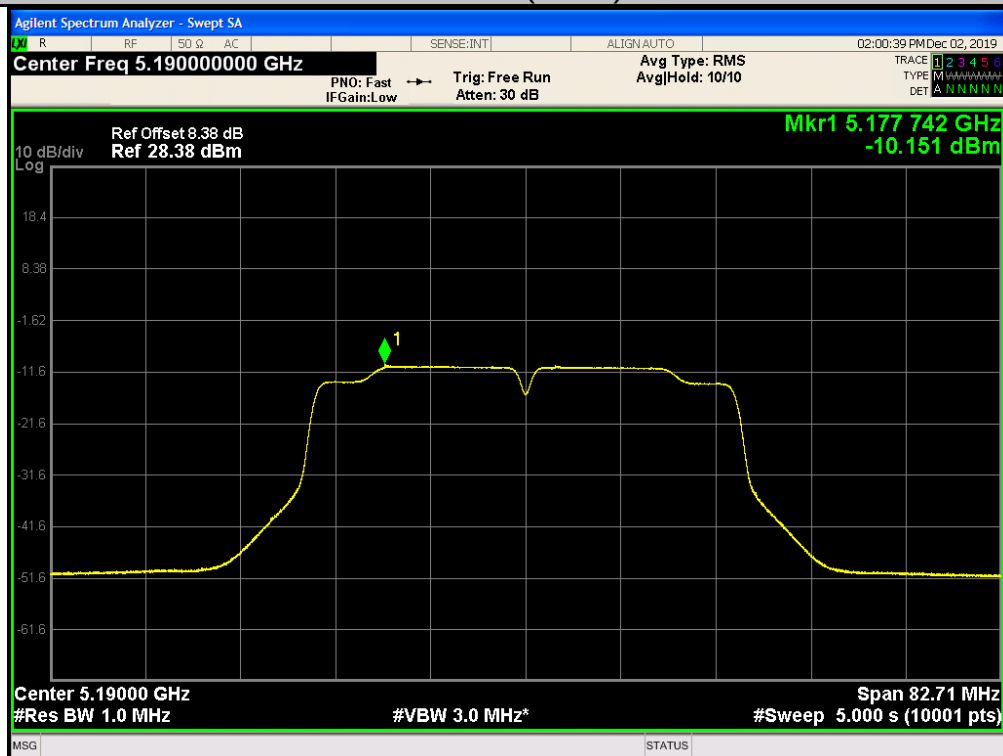


Low

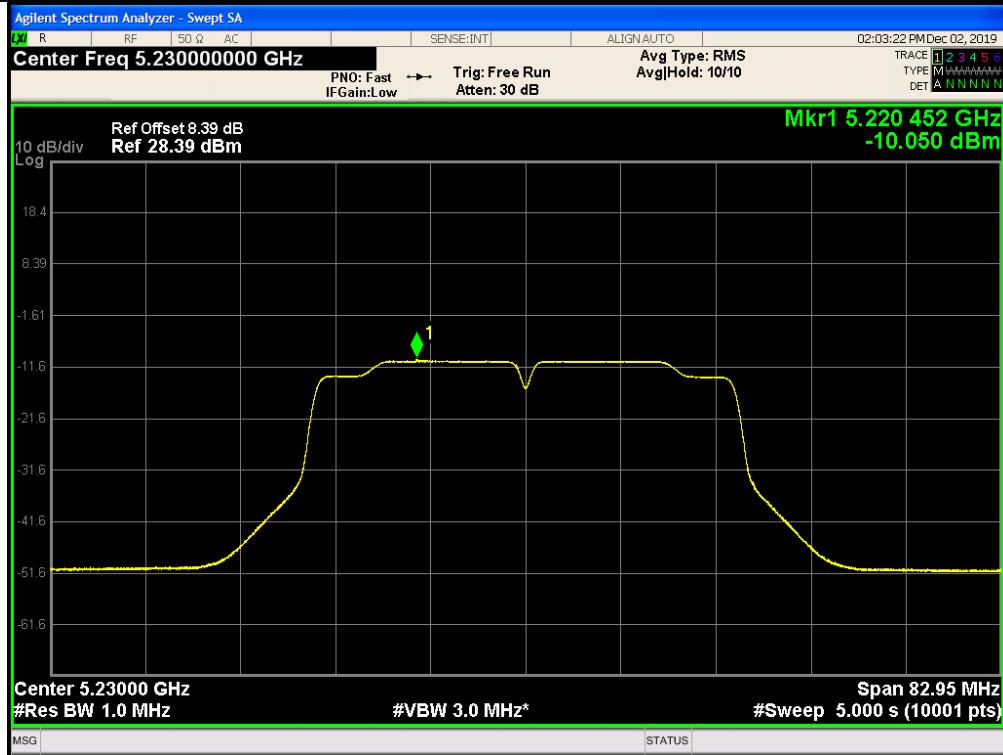

High

802.11ac(HT80)

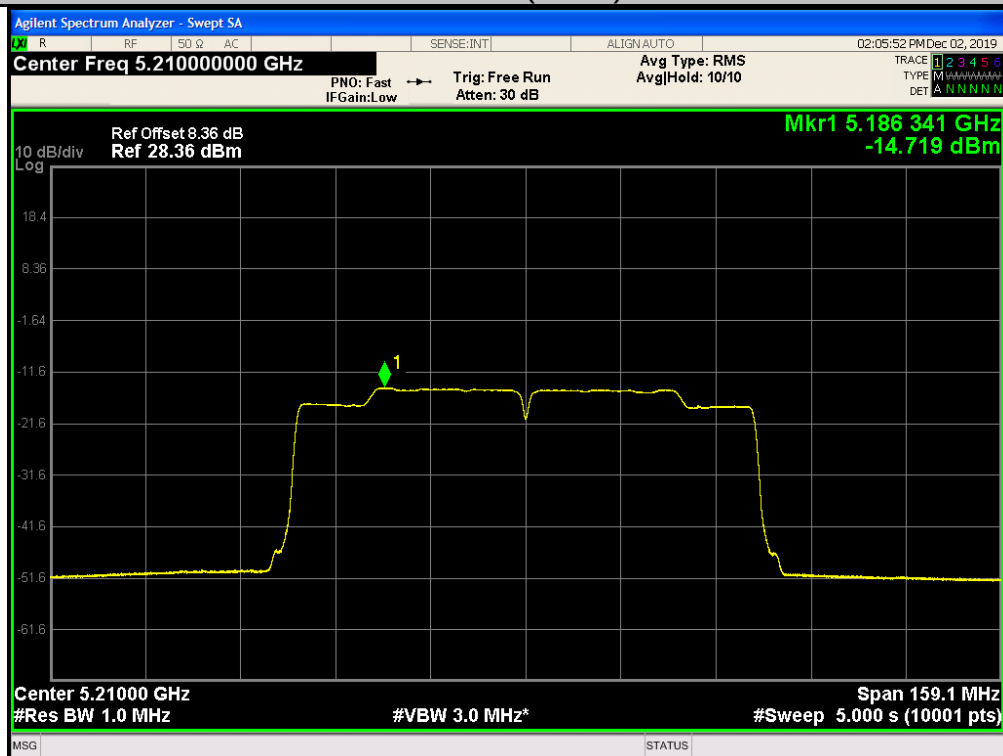


Low




Band IV (5725 – 5850 MHz)


802.11a

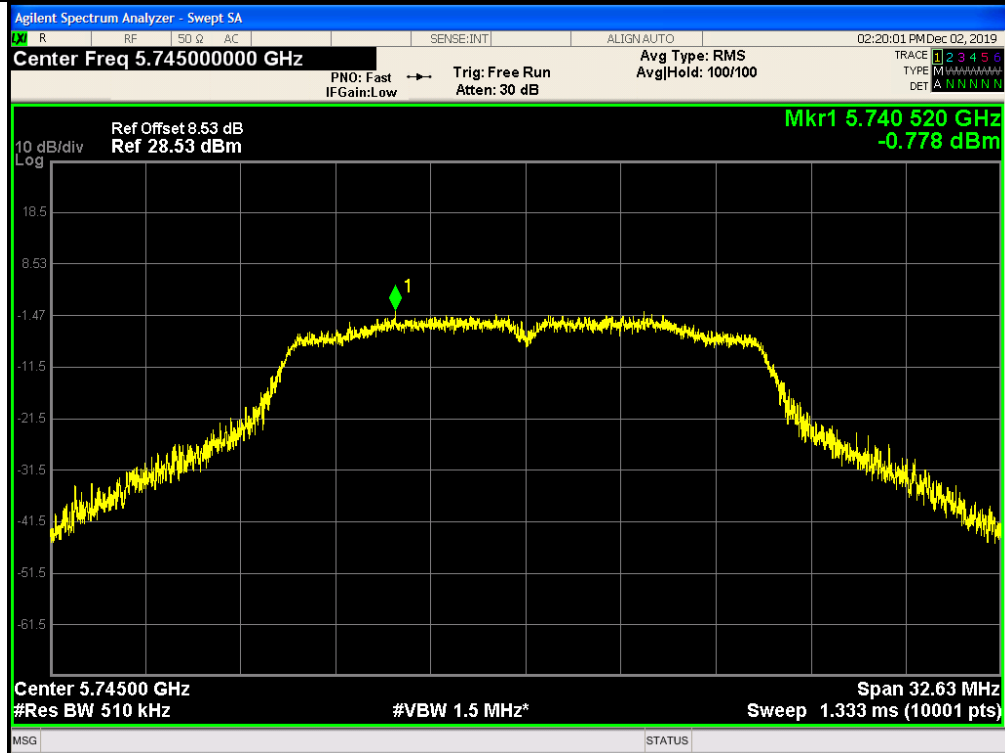

Low

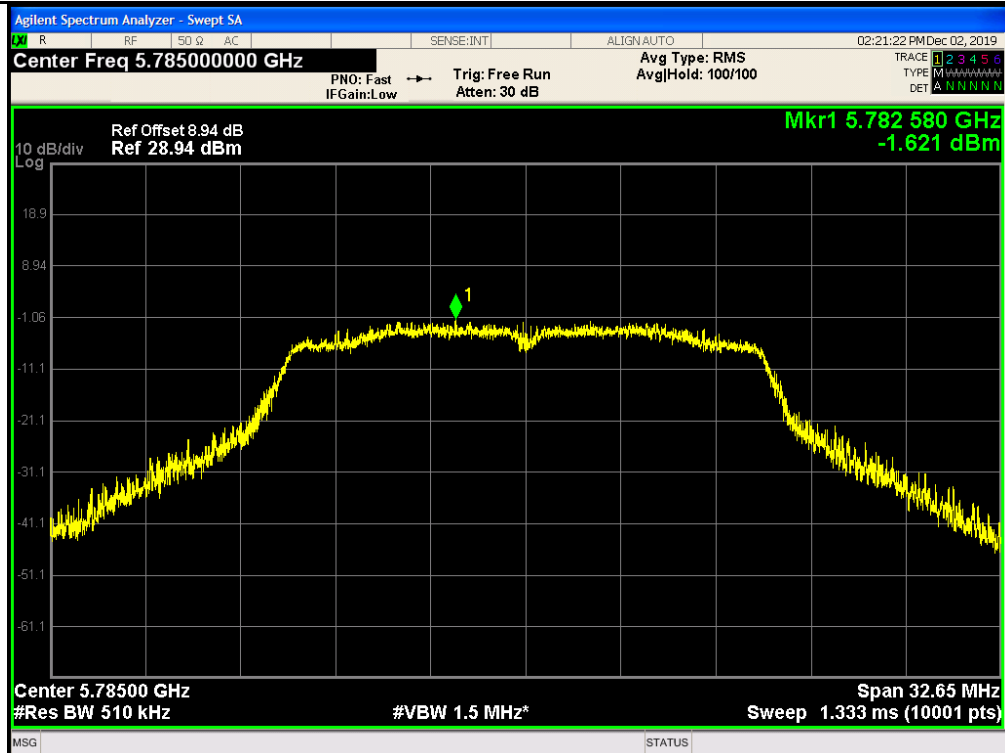


Mid

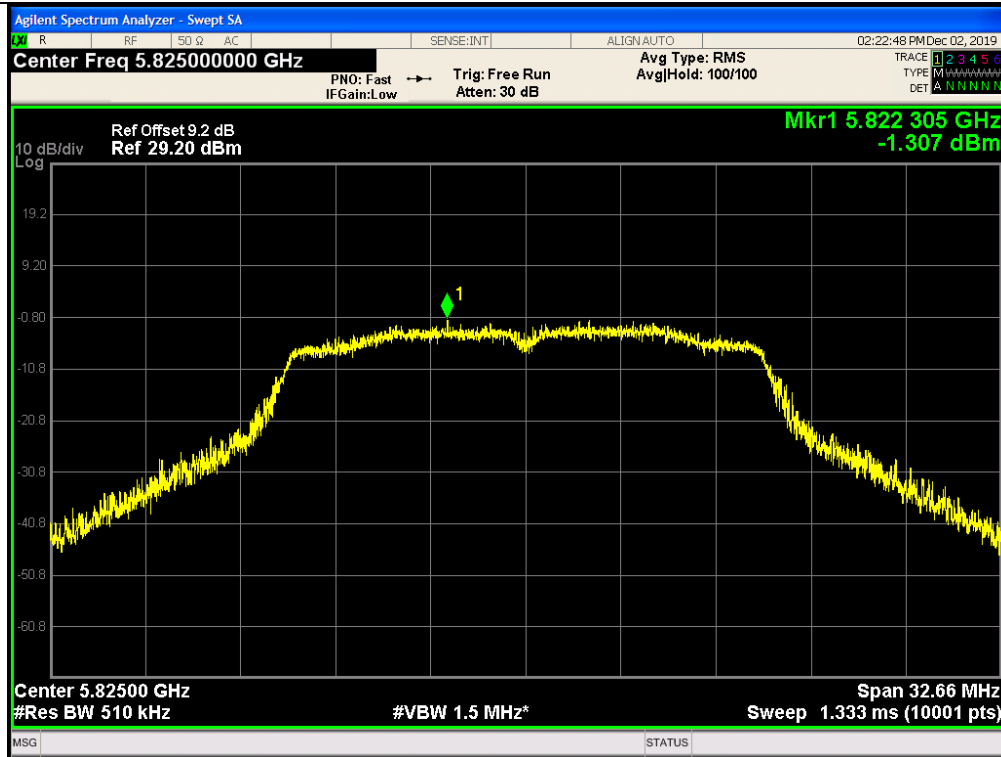


High


802.11n(HT20)

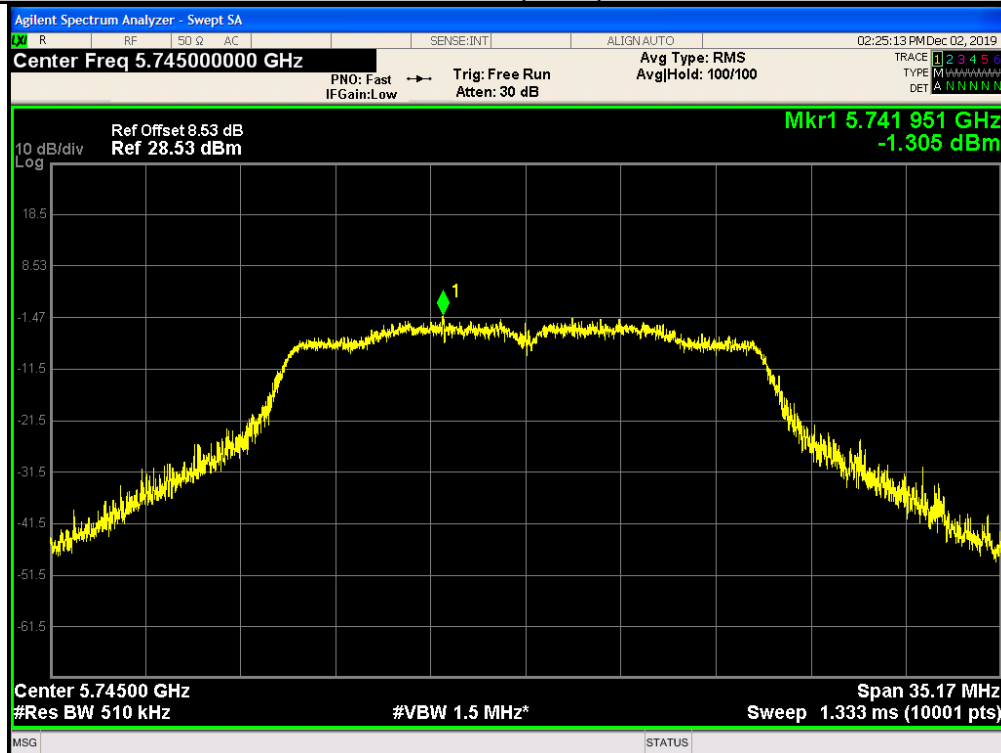

Low

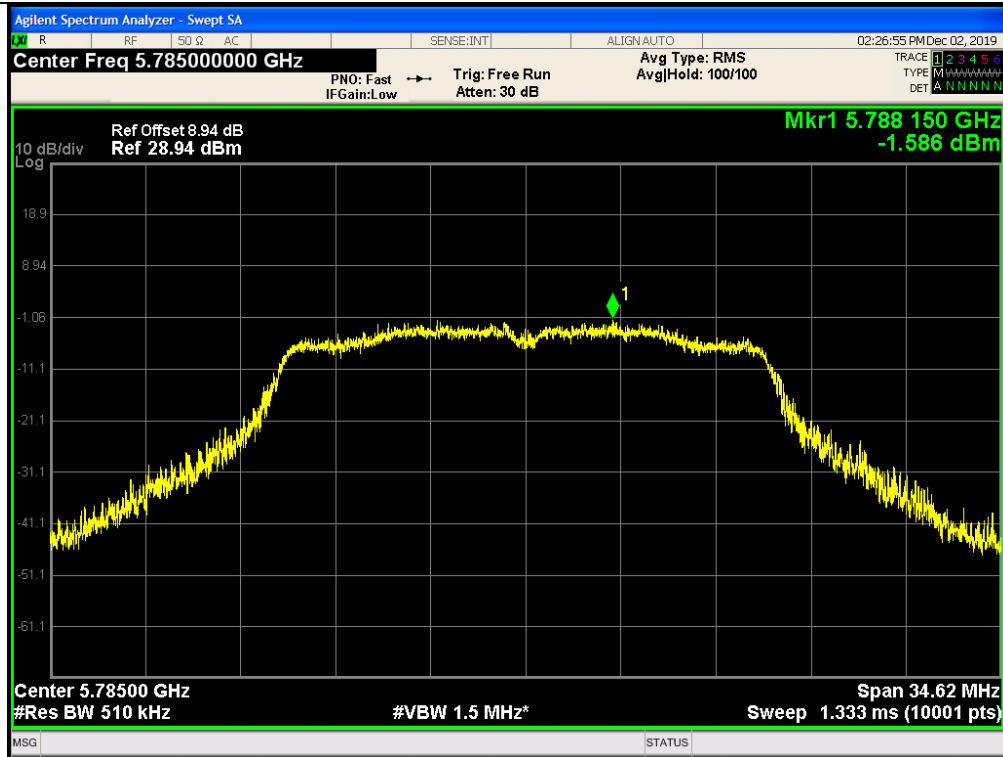


Mid

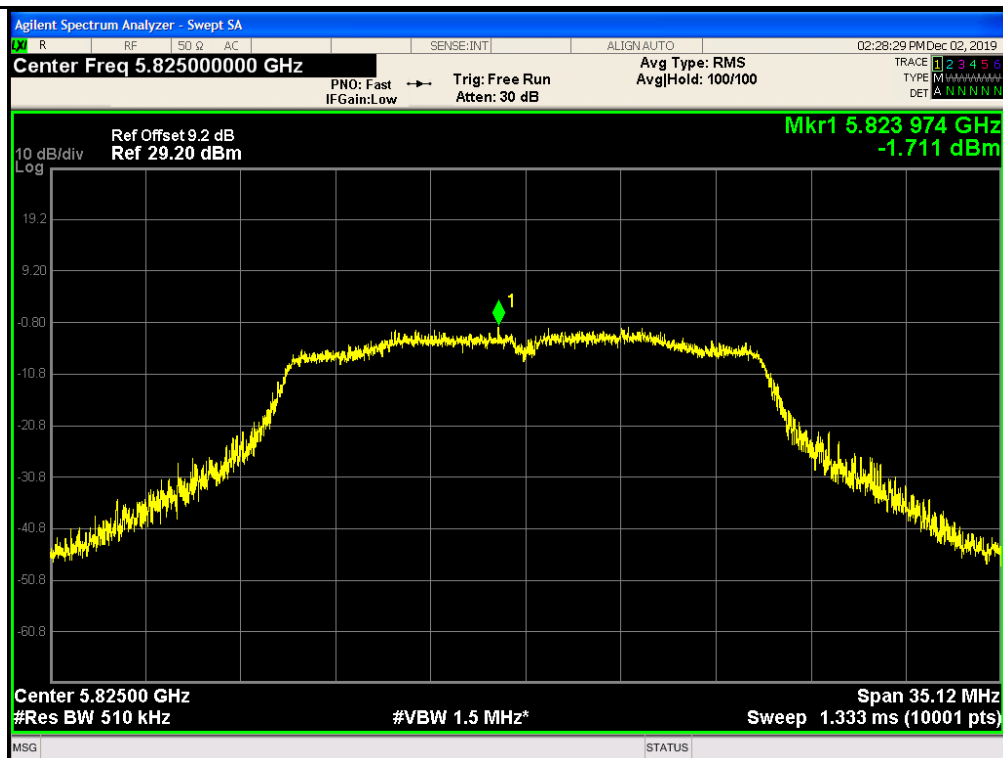


High



802.11n(HT40)

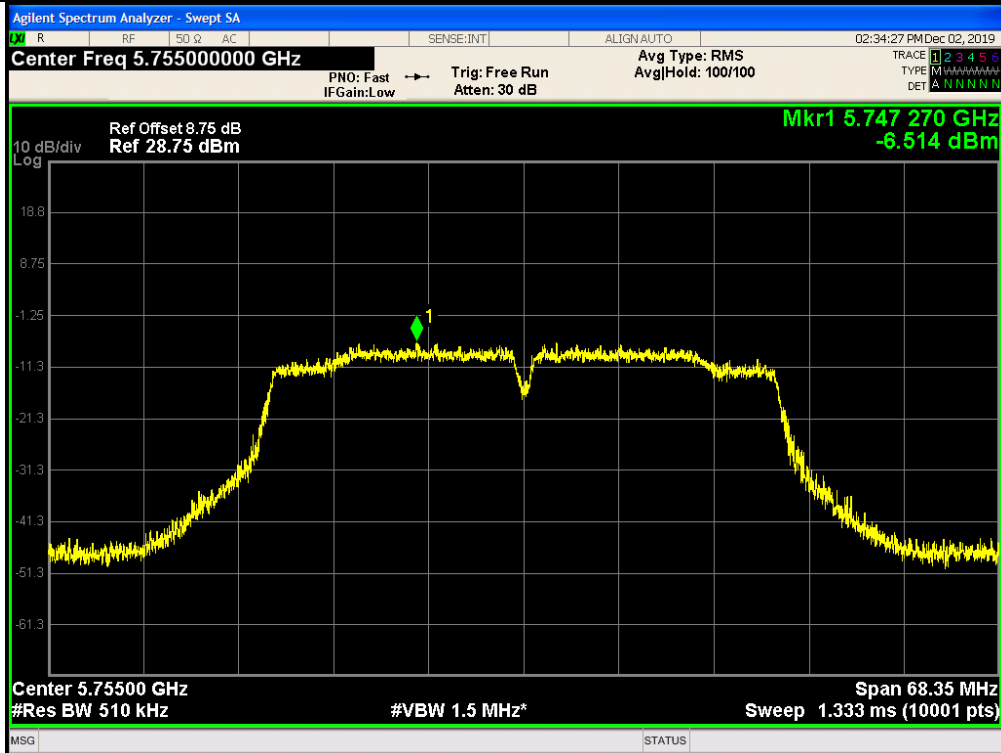


Low

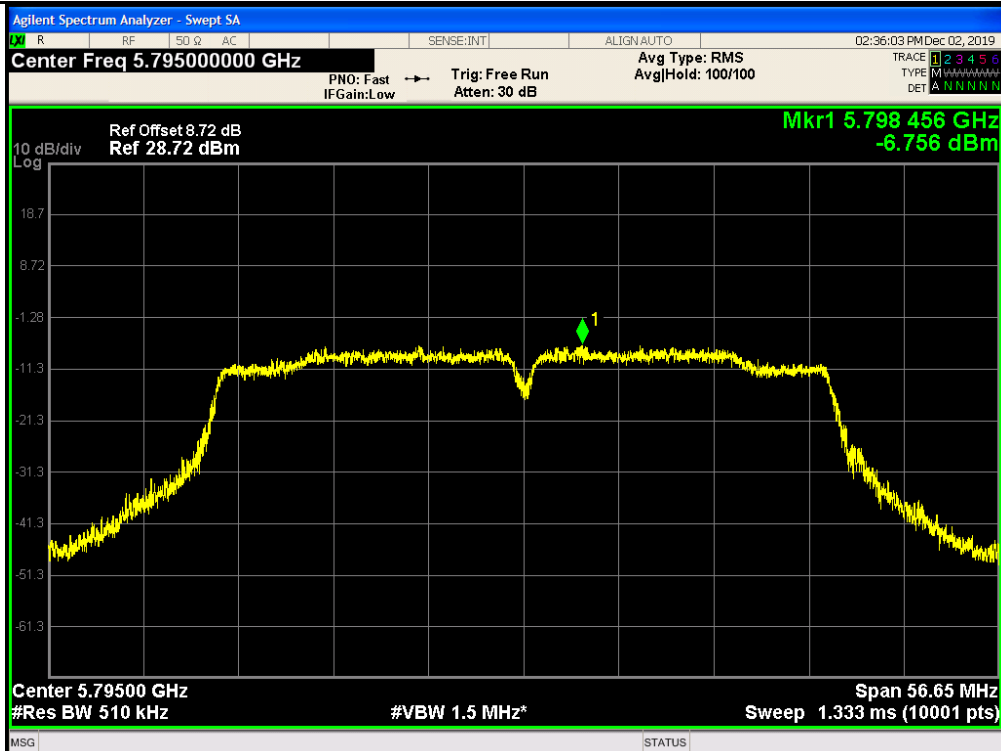


High




802.11ac(HT20)

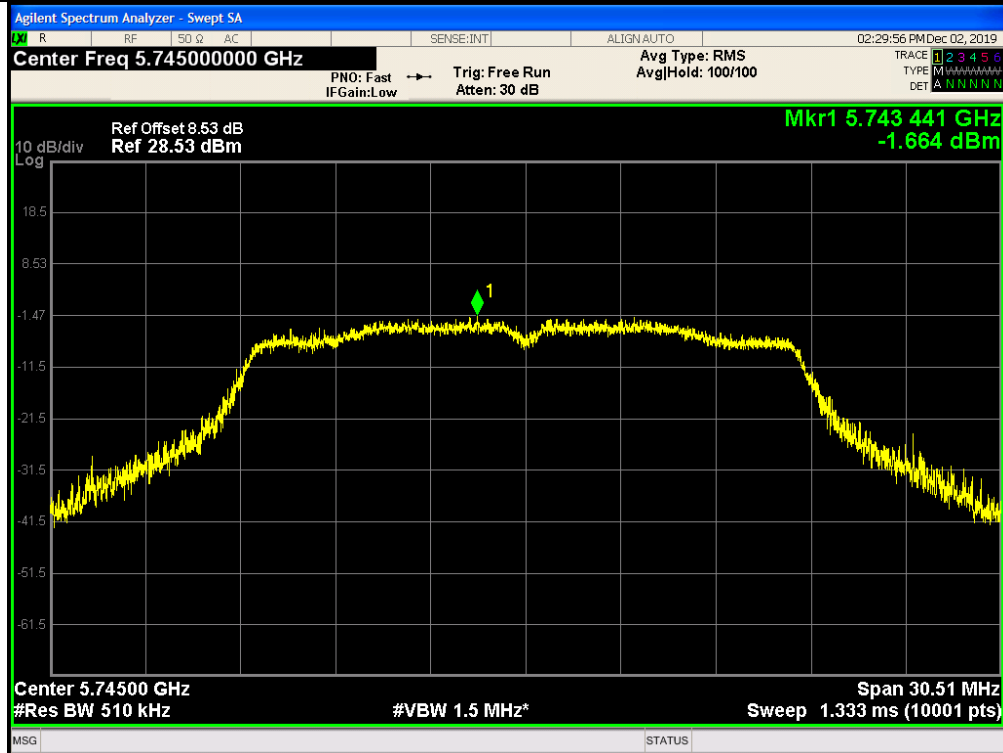

Low

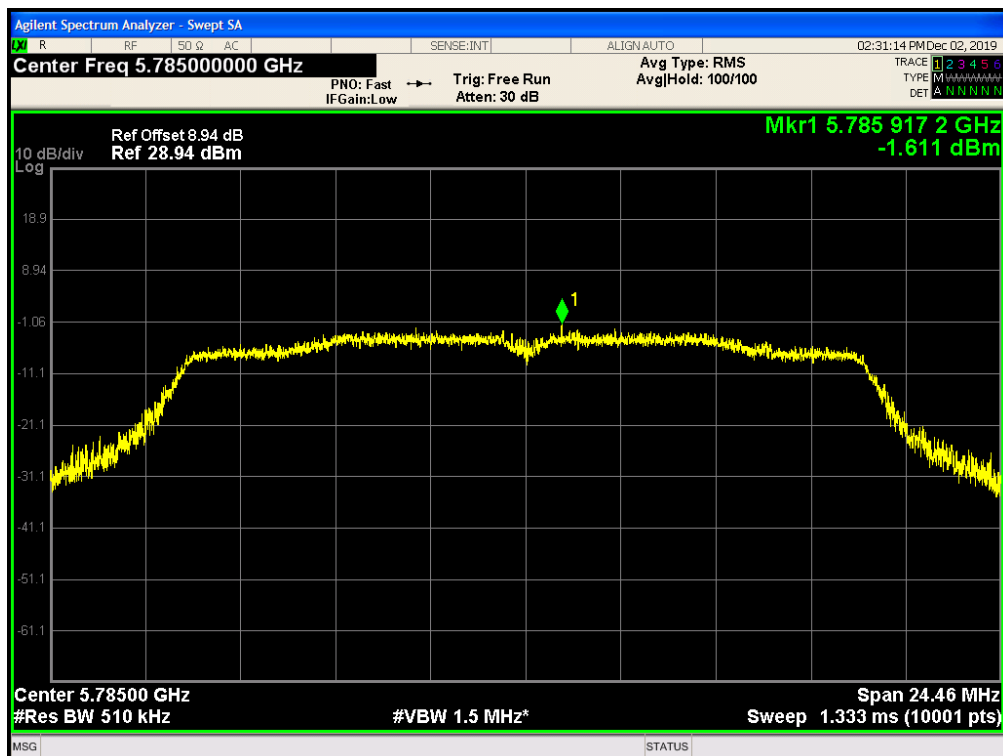


Mid

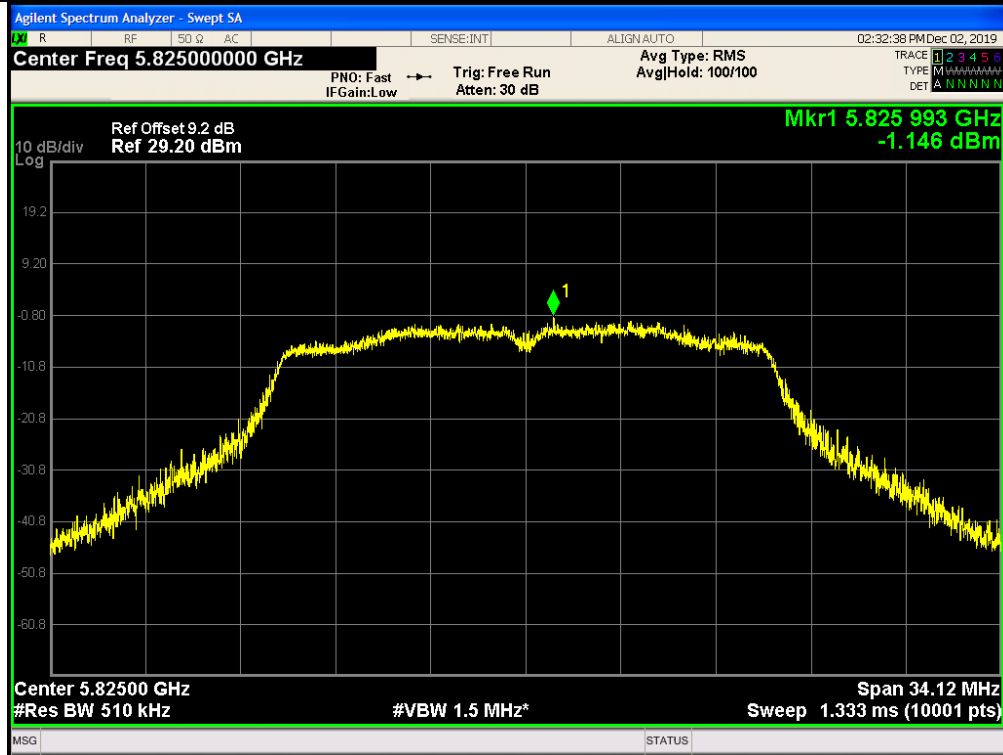


High

802.11ac(HT40)

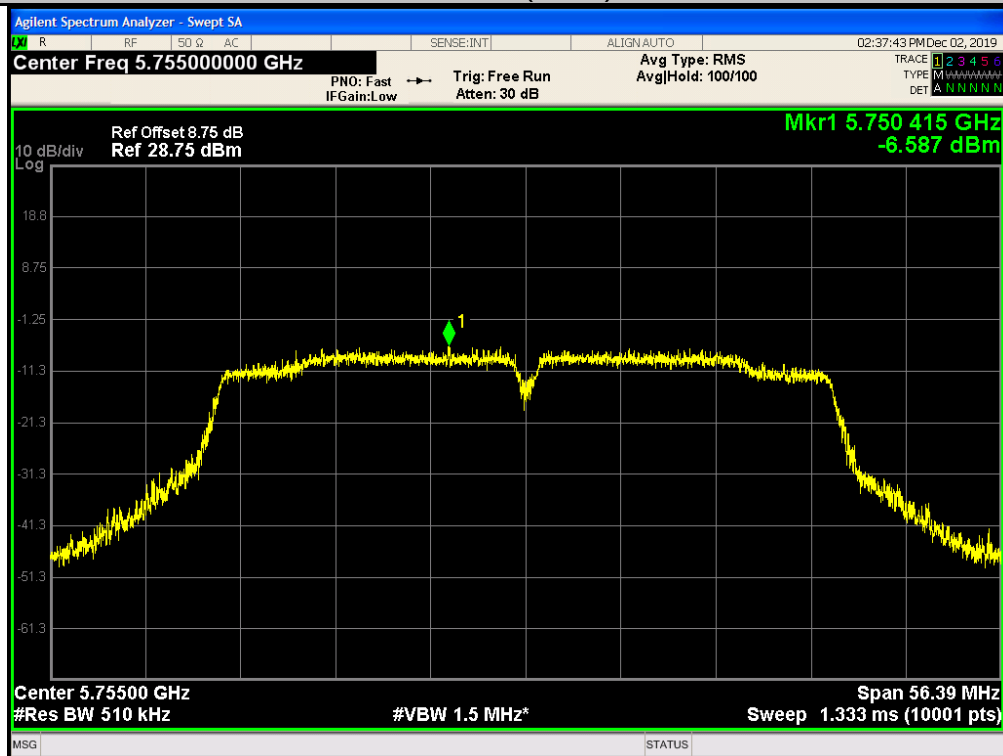


Low

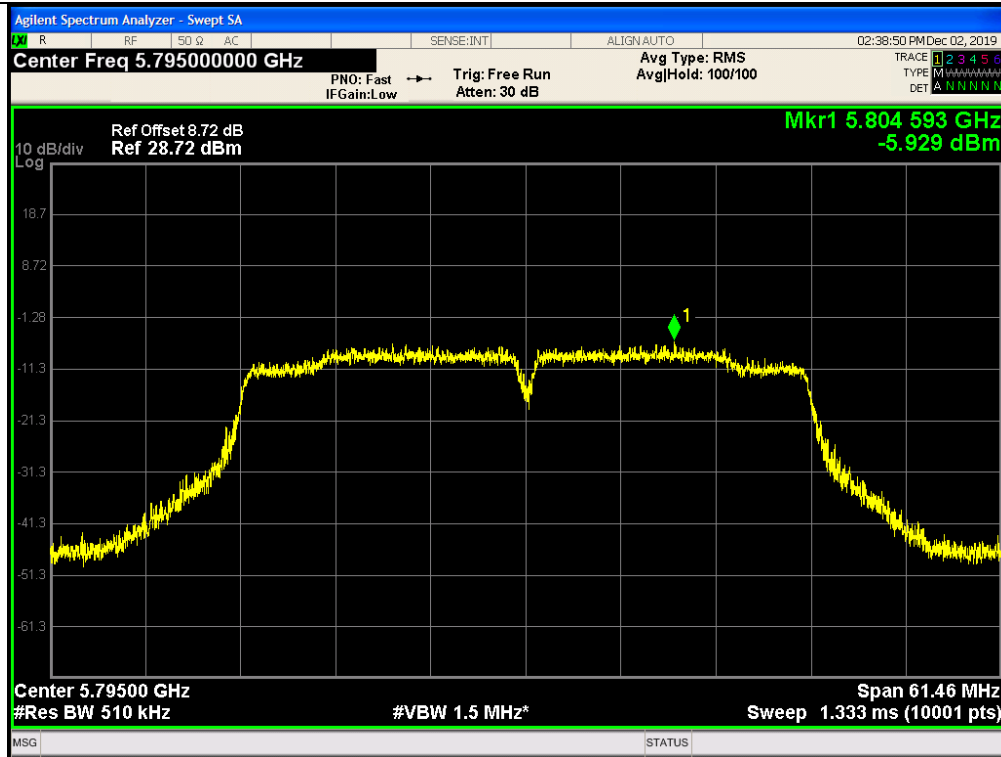

High

802.11ac(HT80)

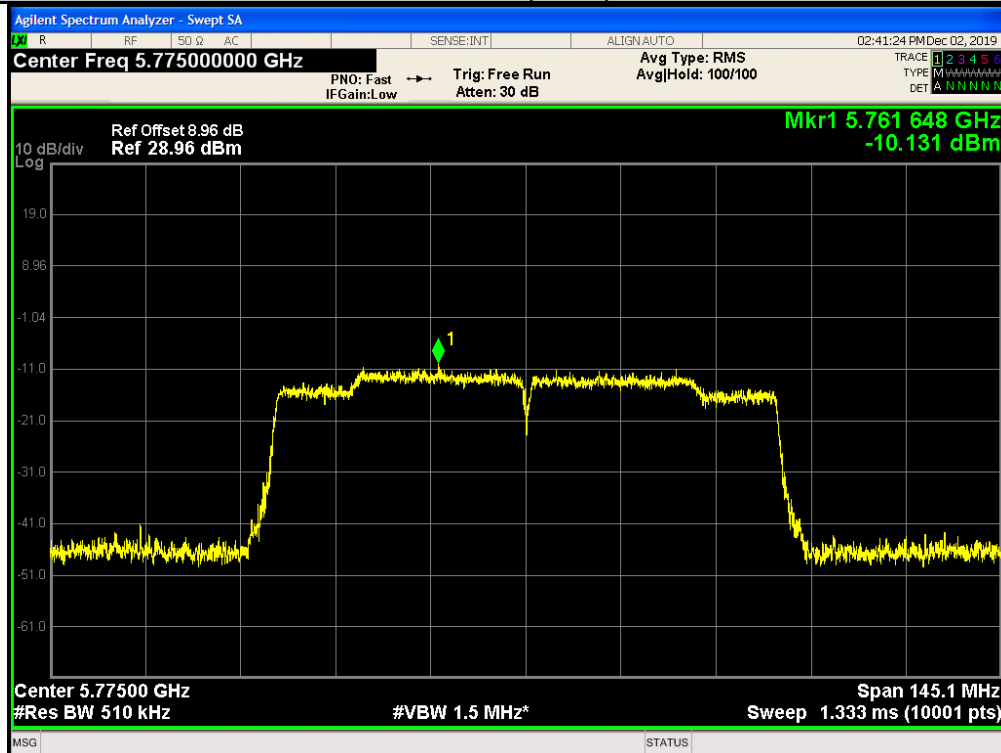


Low



4.6. Band edge

4.6.1. Test Specification

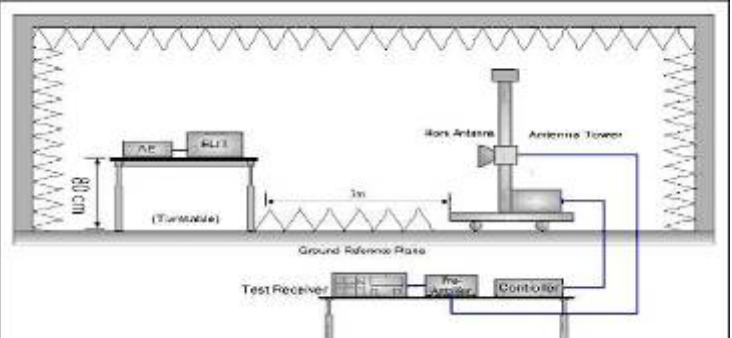Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	For band I&II&III: $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$ For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of $-27 \text{ dBm}/\text{MHz}$ at 75 MHz or more above or below the band edge increasing linearly to $10 \text{ dBm}/\text{MHz}$ at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of $15.6 \text{ dBm}/\text{MHz}$ at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of $27 \text{ dBm}/\text{MHz}$ at the band edge. For band IV(5715-5725MHz&5850-5860MHz): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$; For band IV(other un-restricted band): $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}$, for $\text{EIRP}(\text{dBm}) = -27\text{dBm}$
Test Setup:	
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8(<1G)/1.5(>1G) meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the



	maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS



4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2020
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2020
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2020
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2020
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2020
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2020
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2020
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2020
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Sep. 27, 2020
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2020
RF cable	Times	1-40G	HKE-034	Dec. 27, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

Remark: This Report only show the test plots of the ANT1 worst case.

Radiated Band Edge Test:

Operation Mode: 802.11a Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.26	-2.49	51.77	74	-22.23	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.36	-2.49	49.87	74	-24.13	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.36	-2.28	53.08	74	-20.92	peak
5250	/	-2.28	/	54	/	AVG
5350	52.31	-2.11	50.2	74	-23.8	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.46	-2.28	53.18	74	-20.82	peak
5250	/	-2.28	/	54	/	AVG
5350	53.88	-2.11	51.77	74	-22.23	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11n20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.29	-2.49	51.8	74	-22.2	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.86	-2.49	50.37	74	-23.63	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.13	-2.28	51.85	74	-22.15	peak
5250	/	-2.28	/	54	/	AVG
5350	52.98	-2.11	50.87	74	-23.13	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.66	-2.28	52.38	74	-21.62	peak
5250	/	-2.28	/	54	/	AVG
5350	53.64	-2.11	51.53	74	-22.47	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11 n40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	53.16	-2.49	50.67	74	-23.33	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.98	-2.49	50.49	74	-23.51	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.69	-2.28	51.41	74	-22.59	peak
5250	/	-2.28	/	54	/	AVG
5350	52.63	-2.11	50.52	74	-23.48	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.26	-2.28	52.98	74	-21.02	peak
5250	/	-2.28	/	54	/	AVG
5350	53.46	-2.11	51.35	74	-22.65	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11 ac20 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.18	-2.49	51.69	74	-22.31	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.69	-2.49	50.2	74	-23.8	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.46	-2.28	52.18	74	-21.82	peak
5250	/	-2.28	/	54	/	AVG
5350	54.17	-2.11	52.06	74	-21.94	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.66	-2.28	50.38	74	-23.62	peak
5250	/	-2.28	/	54	/	AVG
5350	51.63	-2.11	49.52	74	-24.48	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11 ac40 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.18	-2.49	49.69	74	-24.31	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	52.69	-2.49	50.2	74	-23.8	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	55.32	-2.28	53.04	74	-20.96	peak
5250	/	-2.28	/	54	/	AVG
5350	51.56	-2.11	49.45	74	-24.55	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	52.36	-2.28	50.08	74	-23.92	peak
5250	/	-2.28	/	54	/	AVG
5350	52.34	-2.11	50.23	74	-23.77	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11 ac80 Mode with 5.2G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	55.32	-2.49	52.83	74	-21.17	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5150	54.63	-2.49	52.14	74	-21.86	peak
5150	/	-2.49	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.2G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	53.76	-2.28	51.48	74	-22.52	peak
5250	/	-2.28	/	54	/	AVG
5350	52.43	-2.11	50.32	74	-23.68	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5250	54.37	-2.28	52.09	74	-21.91	peak
5250	/	-2.28	/	54	/	AVG
5350	52.36	-2.11	50.25	74	-23.75	peak
5350	/	-2.11	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



ANT1(WORSE CASE)

Operation Mode: 802.11a Mode with 5.8G TX CH Low
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.36	-2.06	52.3	68.2	-15.9	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.63	-1.96	90.67	105.2	-14.53	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.65	-2.87	90.78	110.8	-20.02	peak
5720	/	-2.87	/	90.8	/	AVG
5725	114.52	-2.14	112.38	122.2	-9.82	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.67	-2.06	51.61	68.2	-16.59	peak
5650	/	-2.06	/	48.2	/	AVG
5700	93.65	-1.96	91.69	105.2	-13.51	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.52	-2.87	91.65	110.8	-19.15	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.23	-2.14	113.09	122.2	-9.11	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	113.47	-1.97	111.5	122.2	-10.7	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.36	-2.13	93.23	110.8	-17.57	peak
5855	/	-2.13	/	90.8	/	AVG
5875	87.63	-2.65	84.98	105.2	-20.22	peak
5875	/	-2.65	/	85.2	/	AVG
5925	52.63	-2.28	50.35	68.2	-17.85	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	115.46	-1.97	113.49	122.2	-8.71	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.52	-2.13	92.39	110.8	-18.41	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.54	-2.65	83.89	105.2	-21.31	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.18	-2.28	52.9	68.2	-15.3	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.81	-2.06	54.75	68.2	-13.45	peak
5650	/	-2.06	/	48.2	/	AVG
5700	94.62	-1.96	92.66	105.2	-12.54	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.27	-2.87	91.4	110.8	-19.4	peak
5720	/	-2.87	/	90.8	/	AVG
5725	114.57	-2.14	112.43	122.2	-9.77	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.46	-2.06	57.4	68.2	-10.8	peak
5650	/	-2.06	/	48.2	/	AVG
5700	97.54	-1.96	95.58	105.2	-9.62	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.26	-2.87	90.39	110.8	-20.41	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.42	-2.14	113.28	122.2	-8.92	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	112.23	-1.97	110.26	122.2	-11.94	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.36	-2.13	93.23	110.8	-17.57	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.23	-2.65	83.58	105.2	-21.62	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.26	-2.28	51.98	68.2	-16.22	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	114.26	-1.97	112.29	122.2	-9.91	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.59	-2.13	92.46	110.8	-18.34	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.39	-2.65	82.74	105.2	-22.46	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.19	-2.28	52.91	68.2	-15.29	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.67	-2.06	52.61	68.2	-15.59	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.53	-1.96	90.57	105.2	-14.63	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.46	-2.87	90.59	110.8	-20.21	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.46	-2.14	113.32	122.2	-8.88	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.67	-2.06	52.61	68.2	-15.59	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.58	-1.96	90.62	105.2	-14.58	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.46	-2.87	90.59	110.8	-20.21	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.28	-2.14	113.14	122.2	-9.06	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	112.54	-1.97	110.57	122.2	-11.63	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.52	-2.13	92.39	110.8	-18.41	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.53	-2.65	83.88	105.2	-21.32	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.28	-2.28	52	68.2	-16.2	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	115.46	-1.97	113.49	122.2	-8.71	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.75	-2.13	91.62	110.8	-19.18	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.26	-2.65	82.61	105.2	-22.59	peak
5875	/	-2.65	/	85.2	/	AVG
5925	51.28	-2.28	49	68.2	-19.2	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.86	-2.06	55.8	68.2	-12.4	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.41	-1.96	90.45	105.2	-14.75	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.59	-2.87	90.72	110.8	-20.08	peak
5720	/	-2.87	/	90.8	/	AVG
5725	114.62	-2.14	112.48	122.2	-9.72	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.46	-2.06	56.4	68.2	-11.8	peak
5650	/	-2.06	/	48.2	/	AVG
5700	91.56	-1.96	89.6	105.2	-15.6	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.89	-2.87	92.02	110.8	-18.78	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.12	-2.14	112.98	122.2	-9.22	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	113.62	-1.97	111.65	122.2	-10.55	peak
5850	/	-1.97	/	102.2	/	AVG
5855	95.46	-2.13	93.33	110.8	-17.47	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.62	-2.65	82.97	105.2	-22.23	peak
5875	/	-2.65	/	85.2	/	AVG
5925	53.82	-2.28	51.54	68.2	-16.66	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	115.26	-1.97	113.29	122.2	-8.91	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.56	-2.13	92.43	110.8	-18.37	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.63	-2.65	82.98	105.2	-22.22	peak
5875	/	-2.65	/	85.2	/	AVG
5925	55.21	-2.28	52.93	68.2	-15.27	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.27	-2.06	54.21	68.2	-13.99	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.54	-1.96	90.58	105.2	-14.62	peak
5700	/	-1.96	/	85.2	/	AVG
5720	93.17	-2.87	90.3	110.8	-20.5	peak
5720	/	-2.87	/	90.8	/	AVG
5725	112.52	-2.14	110.38	122.2	-11.82	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.46	-2.06	55.4	68.2	-12.8	peak
5650	/	-2.06	/	48.2	/	AVG
5700	92.56	-1.96	90.6	105.2	-14.6	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.51	-2.87	91.64	110.8	-19.16	peak
5720	/	-2.87	/	90.8	/	AVG
5725	113.26	-2.14	111.12	122.2	-11.08	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	114.58	-1.97	112.61	122.2	-9.59	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.57	-2.13	92.44	110.8	-18.36	peak
5855	/	-2.13	/	90.8	/	AVG
5875	84.91	-2.65	82.26	105.2	-22.94	peak
5875	/	-2.65	/	85.2	/	AVG
5925	56.83	-2.28	54.55	68.2	-13.65	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	115.24	-1.97	113.27	122.2	-8.93	peak
5850	/	-1.97	/	102.2	/	AVG
5855	93.75	-2.13	91.62	110.8	-19.18	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.64	-2.65	82.99	105.2	-22.21	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.68	-2.28	52.4	68.2	-15.8	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.67	-2.06	51.61	68.2	-16.59	peak
5650	/	-2.06	/	48.2	/	AVG
5700	94.58	-1.96	92.62	105.2	-12.58	peak
5700	/	-1.96	/	85.2	/	AVG
5720	94.51	-2.87	91.64	110.8	-19.16	peak
5720	/	-2.87	/	90.8	/	AVG
5725	114.57	-2.14	112.43	122.2	-9.77	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	57.62	-2.06	55.56	68.2	-12.64	peak
5650	/	-2.06	/	48.2	/	AVG
5700	91.58	-1.96	89.62	105.2	-15.58	peak
5700	/	-1.96	/	85.2	/	AVG
5720	95.61	-2.87	92.74	110.8	-18.06	peak
5720	/	-2.87	/	90.8	/	AVG
5725	115.46	-2.14	113.32	122.2	-8.88	peak
5725	/	-2.14	/	102.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO:

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	112.53	-1.97	110.56	122.2	-11.64	peak
5850	/	-1.97	/	102.2	/	AVG
5855	92.57	-2.13	90.44	110.8	-20.36	peak
5855	/	-2.13	/	90.8	/	AVG
5875	85.68	-2.65	83.03	105.2	-22.17	peak
5875	/	-2.65	/	85.2	/	AVG
5925	56.42	-2.28	54.14	68.2	-14.06	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						


Vertical:



Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	113.52	-1.97	111.55	122.2	-10.65	peak
5850	/	-1.97	/	102.2	/	AVG
5855	94.58	-2.13	92.45	110.8	-18.35	peak
5855	/	-2.13	/	90.8	/	AVG
5875	86.53	-2.65	83.88	105.2	-21.32	peak
5875	/	-2.65	/	85.2	/	AVG
5925	54.67	-2.28	52.39	68.2	-15.81	peak
5925	/	-2.28	/	48.2	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



4.7. Spurious Emission

4.7.1.1. Test Specification

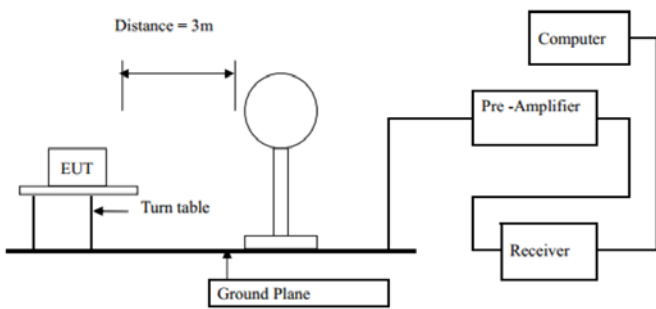Test Requirement:	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
Test Method:	KDB 789033 D02 v02r01				
Frequency Range:	9kHz to 40GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Limit (dBuV/m @3m)		Detector
Above 1G		74.0		Peak	
		54.0		Average	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

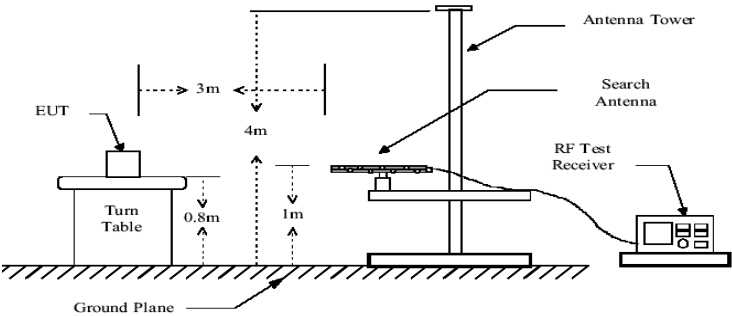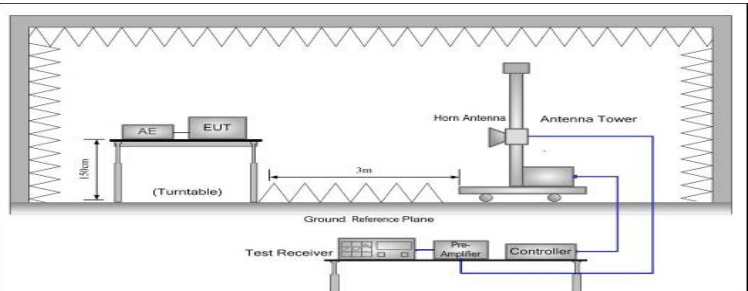	 Above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test results:	PASS



4.7.2. Test Data


Remark: We tested all Channels, the worst case was recorded.

Please refer to following diagram for individual

ANT1


Below 1GHz

Horizontal

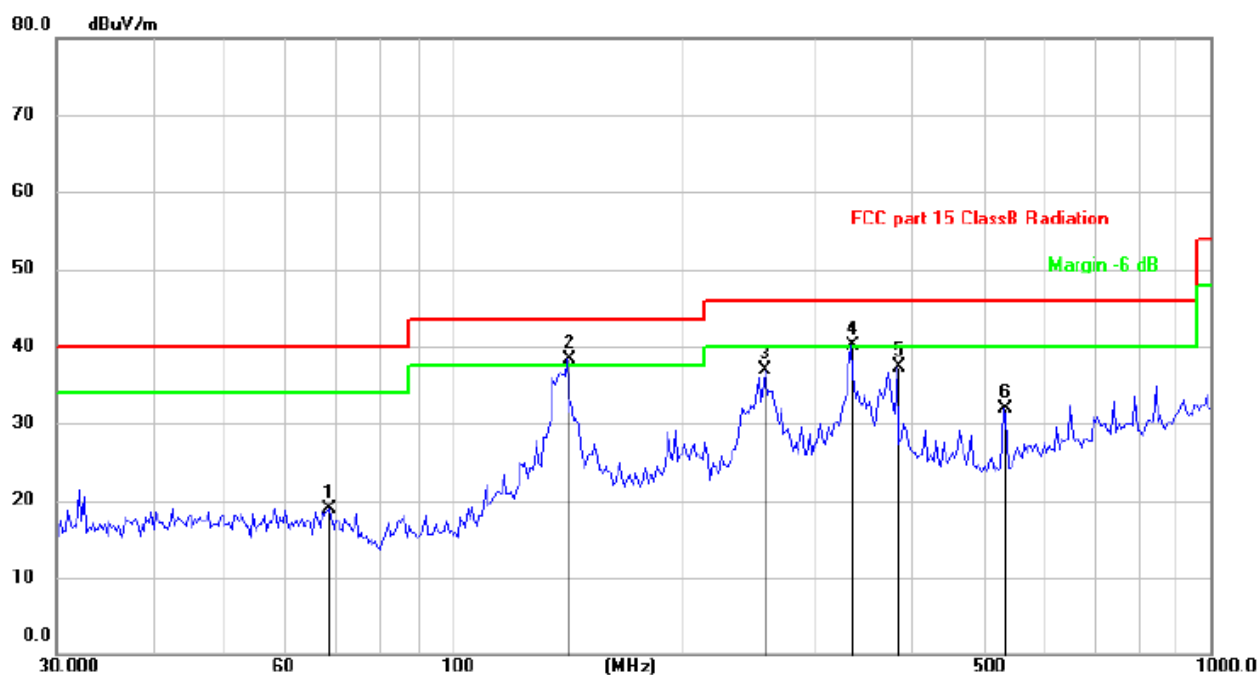

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1		68.6310	27.40	-8.41	18.99	40.00	-21.01	peak		
2	*	141.3298	45.03	-6.72	38.31	43.50	-5.19	peak		
3		258.3264	44.19	-7.35	36.84	46.00	-9.16	peak		
4	!	334.8589	44.96	-4.82	40.14	46.00	-5.86	peak		
5		385.2805	41.04	-3.65	37.39	46.00	-8.61	peak		
6		531.9635	32.23	-0.23	32.00	46.00	-14.00	peak		

Remark: Factor= Cableloss + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

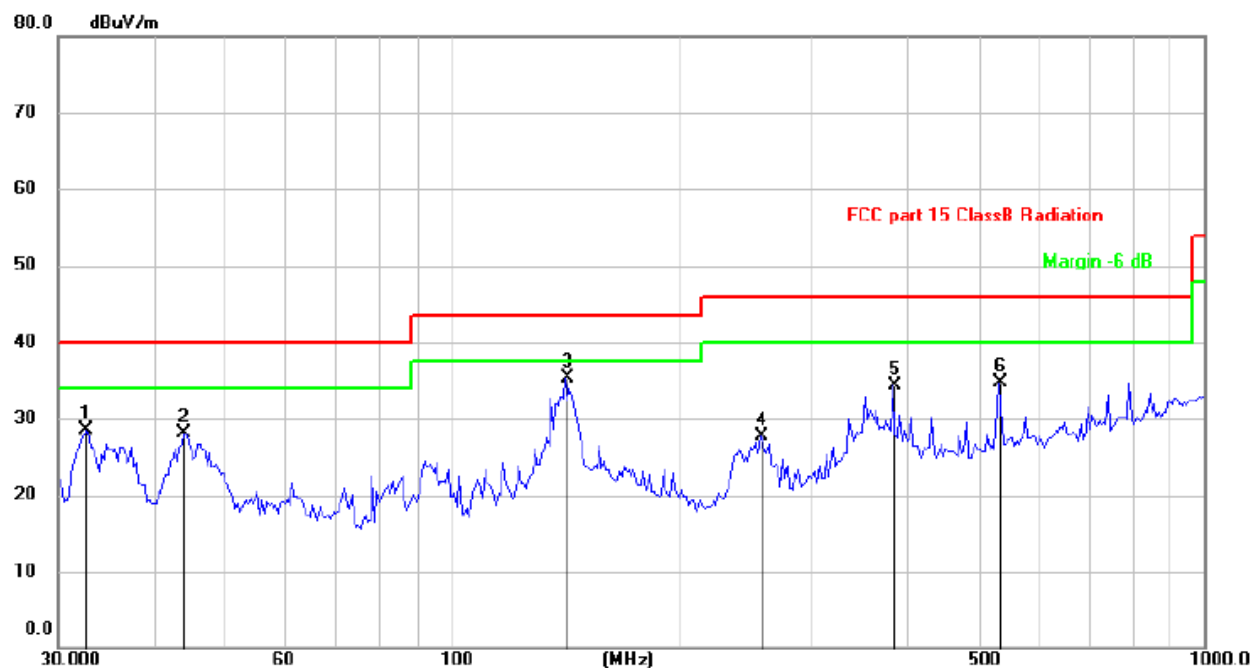**Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		32.6340	35.70	-7.18	28.52	40.00	-11.48	peak		
2		44.1202	34.55	-6.43	28.12	40.00	-11.88	peak		
3	*	141.3298	42.12	-6.72	35.40	43.50	-8.10	peak		
4		256.5211	35.12	-7.42	27.70	46.00	-18.30	peak		
5		385.2805	37.98	-3.65	34.33	46.00	-11.67	peak		
6		531.9635	34.85	-0.23	34.62	46.00	-11.38	peak		


Remark: Factor= Cableloss + Antenna factor - Pre-amplifier; Margin = Measurement – Limit



ANT2


Below 1GHz

Horizontal

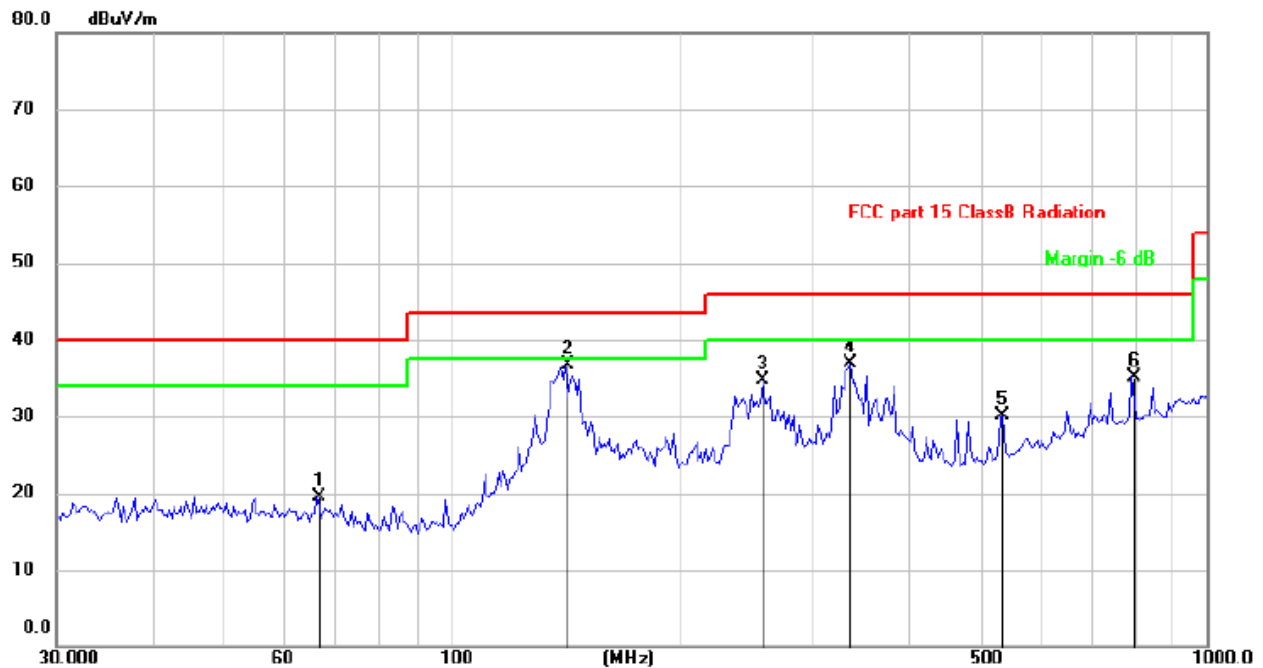

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1		66.2662	27.60	-8.03	19.57	40.00	-20.43	peak		
2	*	141.3298	43.34	-6.72	36.62	43.50	-6.88	peak		
3		258.3264	42.06	-7.35	34.71	46.00	-11.29	peak		
4		337.2155	41.75	-4.77	36.98	46.00	-9.02	peak		
5		535.7073	30.10	-0.08	30.02	46.00	-15.98	peak		
6		793.3960	29.97	5.23	35.20	46.00	-10.80	peak		

Remark: Factor= Cableloss + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

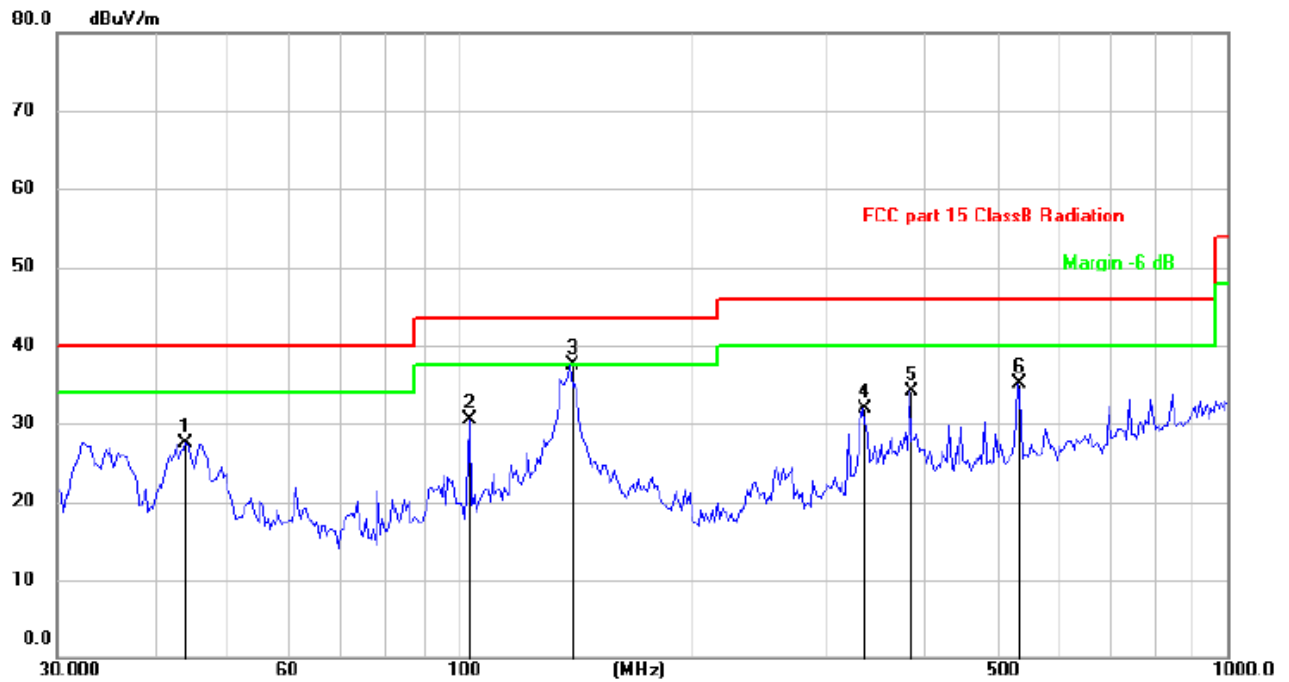**Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		44.1202	33.96	-6.43	27.53	40.00	-12.47	peak		
2		103.0800	40.07	-9.62	30.45	43.50	-13.05	peak		
3	*	139.3613	44.36	-6.81	37.55	43.50	-5.95	peak		
4		334.8589	36.76	-4.82	31.94	46.00	-14.06	peak		
5		385.2805	37.71	-3.65	34.06	46.00	-11.94	peak		
6		531.9635	35.25	-0.23	35.02	46.00	-10.98	peak		

Remark: Factor= Cableloss + Antenna factor - Pre-amplifier; Margin = Measurement – Limit



ANT1 WORSE CASE

Above 1G

LOW CH 36 (802.11 a Mode with 5.2G)/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.54	-4.59	57.95	74.00	-16.05	peak
3647	47.41	-4.59	42.82	54.00	-11.18	AVG
10360	52.51	3.74	56.25	74.00	-17.75	peak
10360	41.30	3.74	45.04	54.00	-8.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.37	-4.59	57.78	74.00	-16.22	peak
3647	47.25	-4.59	42.66	54.00	-11.34	AVG
10360	52.48	3.74	56.22	74.00	-17.78	peak
10360	41.09	3.74	44.83	54.00	-9.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH40 (802.11 a Mode with 5.2G)/5200

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.86	-4.59	58.27	74.00	-15.73	peak
3647	46.74	-4.59	42.15	54.00	-11.85	AVG
10400	54.36	3.74	58.10	74.00	-15.90	peak
10400	41.48	3.74	45.22	54.00	-8.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.62	-4.59	58.03	74.00	-15.97	peak
3647	46.38	-4.59	41.79	54.00	-12.21	AVG
10400	53.77	3.74	57.51	74.00	-16.49	peak
10400	41.03	3.74	44.77	54.00	-9.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 (802.11a Mode with 5.2G)/5240
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.82	-4.59	57.23	74.00	-16.77	peak
3647	46.55	-4.59	41.96	54.00	-12.04	AVG
10480	53.34	3.75	57.09	74.00	-16.91	peak
10480	40.68	3.75	44.43	54.00	-9.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.32	-4.59	56.73	74.00	-17.27	peak
3647	46.12	-4.59	41.53	54.00	-12.47	AVG
10480	52.48	3.75	56.23	74.00	-17.77	peak
10480	39.97	3.75	43.72	54.00	-10.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.65	-4.59	58.06	74.00	-15.94	peak
3647	46.88	-4.59	42.29	54.00	-11.71	AVG
11490	54.38	4.15	58.53	74.00	-15.47	peak
11490	40.63	4.15	44.78	54.00	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.38	-4.59	56.79	74.00	-17.21	peak
3647	47.28	-4.59	42.69	54.00	-11.31	AVG
11490	54.36	4.15	58.51	74.00	-15.49	peak
11490	40.41	4.15	44.56	54.00	-9.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.63	-4.59	57.04	74.00	-16.96	peak
3647	46.76	-4.59	42.17	54.00	-11.83	AVG
11570	54.55	4.21	58.76	74.00	-15.24	peak
11570	39.91	4.21	44.12	54.00	-9.88	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	60.53	-4.59	55.94	74.00	-18.06	peak
3647	46.42	-4.59	41.83	54.00	-12.17	AVG
11570	53.45	4.21	57.66	74.00	-16.34	peak
11570	39.66	4.21	43.87	54.00	-10.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.64	-4.59	58.05	74.00	-15.95	peak
3647	47.09	-4.59	42.50	54.00	-11.50	AVG
11650	54.91	4.84	59.75	74.00	-14.25	peak
11650	42.23	4.84	47.07	54.00	-6.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.92	-4.59	57.33	74.00	-16.67	peak
3647	46.29	-4.59	41.70	54.00	-12.30	AVG
11650	54.58	4.84	59.42	74.00	-14.58	peak
11650	41.36	4.84	46.20	54.00	-7.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MIMO: ANT1+ANT2

LOW CH 36 [802.11 n(HT20) Mode with 5.2G]/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.14	-4.59	58.55	74.00	-15.45	peak
3647	49.44	-4.59	44.85	54.00	-9.15	AVG
10360	53.39	3.74	57.13	74.00	-16.87	peak
10360	41.46	3.74	45.20	54.00	-8.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.30	-4.59	58.71	74.00	-15.29	peak
3647	48.20	-4.59	43.61	54.00	-10.39	AVG
10360	54.51	3.74	58.25	74.00	-15.75	peak
10360	43.37	3.74	47.11	54.00	-6.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH40 [802.11 n(HT20) Mode with 5.2G]/5200

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	65.46	-4.59	60.87	74.00	-13.13	peak
3647	48.65	-4.59	44.06	54.00	-9.94	AVG
10400	56.54	3.74	60.28	74.00	-13.72	peak
10400	42.55	3.74	46.29	54.00	-7.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.37	-4.59	59.78	74.00	-14.22	peak
3647	48.77	-4.59	44.18	54.00	-9.82	AVG
10400	54.92	3.74	58.66	74.00	-15.34	peak
10400	42.04	3.74	45.78	54.00	-8.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 [802.11 n(HT20) Mode with 5.2G]/5240
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.15	-4.59	57.56	74.00	-16.44	peak
3647	49.06	-4.59	44.47	54.00	-9.53	AVG
10480	55.01	3.75	58.76	74.00	-15.24	peak
10480	43.06	3.75	46.81	54.00	-7.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.01	-4.59	57.42	74.00	-16.58	peak
3647	46.30	-4.59	41.71	54.00	-12.29	AVG
10480	53.05	3.75	56.80	74.00	-17.20	peak
10480	40.91	3.75	44.66	54.00	-9.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 [802.11 n(HT20) Mode with 5.8G]/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.98	-4.59	60.39	74.00	-13.61	peak
3647	49.76	-4.59	45.17	54.00	-8.83	AVG
11570	55.59	4.21	59.80	74.00	-14.20	peak
11570	41.38	4.21	45.59	54.00	-8.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.64	-4.59	59.05	74.00	-14.95	peak
3647	47.27	-4.59	42.68	54.00	-11.32	AVG
11570	54.74	4.21	58.95	74.00	-15.05	peak
11570	41.47	4.21	45.68	54.00	-8.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157 [802.11 n(HT20) Mode with 5.8G]/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.40	-4.59	59.81	74.00	-14.19	peak
3647	48.03	-4.59	43.44	54.00	-10.56	AVG
11570	57.47	4.21	61.68	74.00	-12.32	peak
11570	40.73	4.21	44.94	54.00	-9.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.56	-4.59	57.97	74.00	-16.03	peak
3647	48.28	-4.59	43.69	54.00	-10.31	AVG
11570	54.56	4.21	58.77	74.00	-15.23	peak
11570	40.93	4.21	45.14	54.00	-8.86	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 [802.11 n(HT20) Mode with 5.8G]/5825

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	63.40	-4.59	58.81	74.00	-15.19	
3647	49.11	-4.59	44.52	54.00	-9.48	AVG
11650	55.35	4.84	60.19	74.00	-13.81	peak
11650	44.27	4.84	49.11	54.00	-4.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	63.84	-4.59	59.25	74.00	-14.75	
3647	48.64	-4.59	44.05	54.00	-9.95	AVG
11650	56.61	4.84	61.45	74.00	-12.55	peak
11650	43.25	4.84	48.09	54.00	-5.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 36 [802.11 n(HT40) Mode with 5.2G]/5190

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	65.18	-4.59	60.59	74.00	-13.41	peak
3647	49.52	-4.59	44.93	54.00	-9.07	AVG
10380	52.79	3.76	56.55	74.00	-17.45	peak
10380	43.72	3.76	47.48	54.00	-6.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.31	-4.59	58.72	74.00	-15.28	peak
3647	47.55	-4.59	42.96	54.00	-11.04	AVG
10380	54.88	3.76	58.64	74.00	-15.36	peak
10380	41.21	3.76	44.97	54.00	-9.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 [802.11 n(HT40) Mode with 5.2G]/5230
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.78	-4.59	59.19	74.00	-14.81	peak
3647	46.73	-4.59	42.14	54.00	-11.86	AVG
10460	54.73	3.72	58.45	74.00	-15.55	peak
10460	42.92	3.72	46.64	54.00	-7.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.97	-4.59	58.38	74.00	-15.62	peak
3647	47.05	-4.59	42.46	54.00	-11.54	AVG
10460	55.10	3.72	58.82	74.00	-15.18	peak
10460	40.85	3.72	44.57	54.00	-9.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 [802.11 n(HT40) Mode with 5.8G]/5755

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.66	-4.59	59.07	74.00	-14.93	peak
3647	49.12	-4.59	44.53	54.00	-9.47	AVG
11510	55.57	4.18	59.75	74.00	-14.25	peak
11510	42.18	4.18	46.36	54.00	-7.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.77	-4.59	57.18	74.00	-16.82	peak
3647	47.60	-4.59	43.01	54.00	-10.99	AVG
11510	56.50	4.18	60.68	74.00	-13.32	peak
11510	41.23	4.18	45.41	54.00	-8.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 [802.11 n(HT40) Mode with 5.8G]/5795

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.99	-4.59	58.40	74.00	-15.60	peak
3647	49.62	-4.59	45.03	54.00	-8.97	AVG
11590	54.87	4.81	59.68	74.00	-14.32	peak
11590	43.90	4.81	48.71	54.00	-5.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.62	-4.59	59.03	74.00	-14.97	peak
3647	46.42	-4.59	41.83	54.00	-12.17	AVG
11590	56.24	4.81	61.05	74.00	-12.95	peak
11590	43.67	4.81	48.48	54.00	-5.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 36 [802.11 ac(HT20) Mode with 5.2G]/5180

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	65.08	-4.59	60.49	74.00	-13.51	peak
3647	50.00	-4.59	45.41	54.00	-8.59	AVG
10360	52.64	3.74	56.38	74.00	-17.62	peak
10360	42.75	3.74	46.49	54.00	-7.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.96	-4.59	58.37	74.00	-15.63	peak
3647	48.47	-4.59	43.88	54.00	-10.12	AVG
10360	52.65	3.74	56.39	74.00	-17.61	peak
10360	41.11	3.74	44.85	54.00	-9.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH40 [802.11 ac(HT20) Mode with 5.2G]/5200
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.92	-4.59	59.33	74.00	-14.67	peak
3647	48.12	-4.59	43.53	54.00	-10.47	AVG
10400	56.35	3.74	60.09	74.00	-13.91	peak
10400	43.79	3.74	47.53	54.00	-6.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.16	-4.59	58.57	74.00	-15.43	peak
3647	48.25	-4.59	43.66	54.00	-10.34	AVG
10400	55.81	3.74	59.55	74.00	-14.45	peak
10400	42.71	3.74	46.45	54.00	-7.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 [802.11 ac(HT20) Mode with 5.2G]/5240
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.94	-4.59	57.35	74.00	-16.65	peak
3647	48.18	-4.59	43.59	54.00	-10.41	AVG
10480	56.12	3.75	59.87	74.00	-14.13	peak
10480	43.16	3.75	46.91	54.00	-7.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	61.73	-4.59	57.14	74.00	-16.86	peak
3647	46.45	-4.59	41.86	54.00	-12.14	AVG
10480	55.32	3.75	59.07	74.00	-14.93	peak
10480	42.33	3.75	46.08	54.00	-7.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 [802.11 ac(HT20) Mode with 5.8G]/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.95	-4.59	60.36	74.00	-13.64	peak
3647	47.66	-4.59	43.07	54.00	-10.93	AVG
11570	56.00	4.21	60.21	74.00	-13.79	peak
11570	42.05	4.21	46.26	54.00	-7.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.02	-4.59	57.43	74.00	-16.57	peak
3647	47.45	-4.59	42.86	54.00	-11.14	AVG
11570	55.91	4.21	60.12	74.00	-13.88	peak
11570	41.67	4.21	45.88	54.00	-8.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



MID CH157 [802.11 ac(HT20) Mode with 5.8G]/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.99	-4.59	58.40	74.00	-15.60	peak
3647	48.44	-4.59	43.85	54.00	-10.15	AVG
11570	54.54	4.21	58.75	74.00	-15.25	peak
11570	41.39	4.21	45.60	54.00	-8.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.86	-4.59	58.27	74.00	-15.73	peak
3647	47.54	-4.59	42.95	54.00	-11.05	AVG
11570	54.55	4.21	58.76	74.00	-15.24	peak
11570	39.99	4.21	44.20	54.00	-9.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 [802.11 ac(HT20) Mode with 5.8G]/5825

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	63.87	-4.59	59.28	74.00	-14.72	
3647	49.08	-4.59	44.49	54.00	-9.51	AVG
11650	55.01	4.84	59.85	74.00	-14.15	peak
11650	43.95	4.84	48.79	54.00	-5.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	62.56	-4.59	57.97	74.00	-16.03	
3647	48.48	-4.59	43.89	54.00	-10.11	AVG
11650	56.15	4.84	60.99	74.00	-13.01	peak
11650	41.50	4.84	46.34	54.00	-7.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 36 [802.11 ac(HT40) Mode with 5.2G]/5190

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.19	-4.59	59.60	74.00	-14.40	peak
3647	48.05	-4.59	43.46	54.00	-10.54	AVG
10380	55.37	3.76	59.13	74.00	-14.87	peak
10380	43.54	3.76	47.30	54.00	-6.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.97	-4.59	60.38	74.00	-13.62	peak
3647	48.93	-4.59	44.34	54.00	-9.66	AVG
10380	53.07	3.76	56.83	74.00	-17.17	peak
10380	41.16	3.76	44.92	54.00	-9.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 48 [802.11 ac(HT40) Mode with 5.2G]/5230
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.46	-4.59	57.87	74.00	-16.13	peak
3647	47.19	-4.59	42.60	54.00	-11.40	AVG
10460	54.09	3.72	57.81	74.00	-16.19	peak
10460	40.92	3.72	44.64	54.00	-9.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.29	-4.59	58.70	74.00	-15.30	peak
3647	46.23	-4.59	41.64	54.00	-12.36	AVG
10460	54.25	3.72	57.97	74.00	-16.03	peak
10460	41.56	3.72	45.28	54.00	-8.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH 149 [802.11 ac(HT40) Mode with 5.8G]/5755

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.88	-4.59	60.29	74.00	-13.71	peak
3647	48.64	-4.59	44.05	54.00	-9.95	AVG
11510	54.88	4.18	59.06	74.00	-14.94	peak
11510	42.36	4.18	46.54	54.00	-7.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.77	-4.59	59.18	74.00	-14.82	peak
3647	49.97	-4.59	45.38	54.00	-8.62	AVG
11510	57.09	4.18	61.27	74.00	-12.73	peak
11510	40.35	4.18	44.53	54.00	-9.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



HIGH CH 165 [802.11 ac(HT40) Mode with 5.8G]/5795

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.72	-4.59	58.13	74.00	-15.87	peak
3647	48.69	-4.59	44.10	54.00	-9.90	AVG
11590	55.26	4.81	60.07	74.00	-13.93	peak
11590	42.93	4.81	47.74	54.00	-6.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	64.26	-4.59	59.67	74.00	-14.33	peak
3647	48.53	-4.59	43.94	54.00	-10.06	AVG
11590	56.80	4.81	61.61	74.00	-12.39	peak
11590	43.81	4.81	48.62	54.00	-5.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



CH 48 [802.11 ac(HT80) Mode with 5.2G]/5210
Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	63.51	-4.59	58.92	74.00	-15.08	
3647	48.97	-4.59	44.38	54.00	-9.62	AVG
10420	55.65	3.69	59.34	74.00	-14.66	peak
10420	43.22	3.69	46.91	54.00	-7.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3647	64.05	-4.59	59.46	74.00	-14.54	
3647	48.69	-4.59	44.10	54.00	-9.90	AVG
10420	52.67	3.69	56.36	74.00	-17.64	peak
10420	42.12	3.69	45.81	54.00	-8.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



CH 165 [802.11 ac(HT80) Mode with 5.8G]/5775

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	63.60	-4.59	59.01	74.00	-14.99	peak
3647	47.22	-4.59	42.63	54.00	-11.37	AVG
11550	55.87	4.78	60.65	74.00	-13.35	peak
11550	43.62	4.78	48.40	54.00	-5.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3647	62.23	-4.59	57.64	74.00	-16.36	peak
3647	47.19	-4.59	42.60	54.00	-11.40	AVG
11550	56.92	4.78	61.70	74.00	-12.30	peak
11550	43.11	4.78	47.89	54.00	-6.11	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	<pre>graph LR; SA[Spectrum Analyzer] --- EUT[EUT]; EUT --- TCh[Temperature Chamber]; TCh --- P[AC/DC Power supply];</pre>
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

**Test Result as follows:**

Remark: This Report only show the test plots of the ANT1 worst case.

Mode	Voltage (V)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	132 V	5179.987	13	5239.971	29
	120 V	5179.970	30	5239.967	33
	108 V	5179.978	22	5239.967	33

Mode	Temperature (°C)	FHL (5180MHz)	Deviation (KHz)	FHH (5240MHz)	Deviation (KHz)
5.2G Band	-30	5179.983	17	5239.976	24
	-20	5179.990	10	5239.984	16
	-10	5179.981	19	5239.968	32
	0	5179.976	24	5239.976	24
	10	5179.974	26	5239.972	28
	20	5179.970	30	5239.967	33
	30	5179.989	11	5239.972	28
	40	5179.979	21	5239.979	21
	50	5179.980	20	5239.974	26



Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	132 V	5744.967	33	5824.983	17
	120 V	5744.966	34	5824.965	35
	108 V	5744.977	23	5824.968	32

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5744.966	34	5824.979	21
	-20	5744.983	17	5824.976	24
	-10	5744.972	28	5824.976	24
	0	5744.975	25	5824.965	35
	10	5744.982	18	5824.979	21
	20	5744.966	34	5824.965	35
	30	5744.975	25	5824.984	16
	40	5744.976	24	5824.970	30
	50	5744.973	27	5824.977	23

4.9. Unwanted Emissions Measurement

4.9.1. Test Requirements


According to FCC Part15 Section 15.407(b) unwanted emission limits.

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 Bm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

4.9.2. Test Configuration

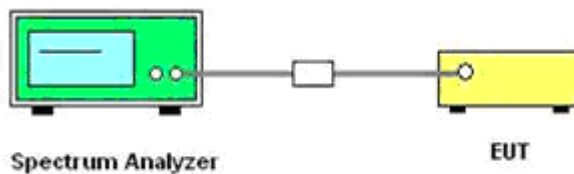

4.9.3. Test Procedure

According to KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section G: Unwanted Emission Measurement

1. Unwanted Emissions in the Restricted Bands

- a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."
- b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."
- c) At frequencies above 1000 MHz, measurements performed using the peak and average measurement procedures described in sections II.G.5. and II.G.6, respectively, must satisfy the respective peak and average limits. If all peak measurements satisfy the average limit, then average measurements are not required.
- d) For conducted measurements above 1000 MHz, EIRP shall be computed as specified in section II.G.3.b) and then field strength shall be computed as follows (see KDB Publication 412172):
 - i) $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$, where E = field strength and d = distance at which field strength limit is specified in the rules;
 - ii) $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters
- e) For conducted measurements below 1000 MHz, the field strength shall be computed as



specified in d), above, and then an additional 4.7 dB shall be added as an upper bound on the field strength that would be observed on a test range with a ground plane for frequencies between 30 MHz and 1000 MHz, or an additional 6 dB shall be added for frequencies below 30 MHz.

2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in section II.G.3. "General Requirements for Unwanted Emissions Measurements."
- b) At frequencies below 1000 MHz, use the procedure described in section II.G.4. "Procedure for Unwanted Emissions Measurements below 1000 MHz."
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in section II.G.5., "Procedure for Unwanted Maximum Unwanted Emissions Measurements Above 1000 MHz."
- d) Section 15.407(b) (1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz dBm/MHz peak emission limit.
- i) Section 15.407(b) (4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b) (4) (i). An alternative to the band emissions mask is specified in Section 15.407(b) (4) (ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the alternative limit.
- e) If radiated measurements are performed, field strength is then converted to EIRP as follows:
 - i) $EIRP = ((E \times d)^2) / 30$Where:
 - E is the field strength in V/m;
 - d is the measurement distance in meters;
 - EIRP is the equivalent isotopically radiated power in watts;- ii) Working in dB units, the above equation is equivalent to:
 $EIRP [dBm] = E [dB\mu V/m] + 20 \log (d [meters]) - 104.77$
- iii) Or, if d is 3 meters:
 $EIRP [dBm] = E [dB\mu V/m] - 95.23$

3) Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on radiated measurements; however, as an alternative, antenna-port conducted measurements in conjunction with cabinet emissions tests will be permitted to demonstrate compliance provided that the following steps are performed:

- (i) Cabinet emissions measurements. A radiated test shall be performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna may be replaced by a termination matching the nominal impedance of the antenna.
- (ii) Impedance matching. Conducted tests shall be performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.
- (iii) EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.³ However, for devices that operate in multiple bands using the same transmit antenna, the highest gain of the antenna within the operating band nearest to the out-of-band frequency being measured may be used in lieu of the overall highest gain when measuring emissions at frequencies within 20% of the absolute frequency at the nearest edge of that band, but in no case shall a value less than 2 dBi be selected.
- (iv) EIRP adjustments for multiple outputs. For devices with multiple outputs occupying the same or overlapping frequency ranges in the same band (e.g., MIMO or beamforming devices), compute the total EIRP as follows:
 - Compute EIRP for each output, as described in (iii), above.
 - Follow the procedures specified in KDB Publication 662911 for summing



emissions across the outputs or adjusting emission levels measured on individual outputs by $10 \log (N_{\text{ANT}})$, where N_{ANT} is the number of outputs.

- Add the array gain term specified in KDB Publication 662911 for out-of-band and spurious signals.

(v) Direction of maximum emission.


For all radiated emissions tests, measurements shall correspond to the direction of maximum emission level for each measured emission (see ANSI C63.10 for guidance).




Test Results of 5.2G

Remark: This Report only show the test plots of the ANT1 worst case.

IEEE 802.11a

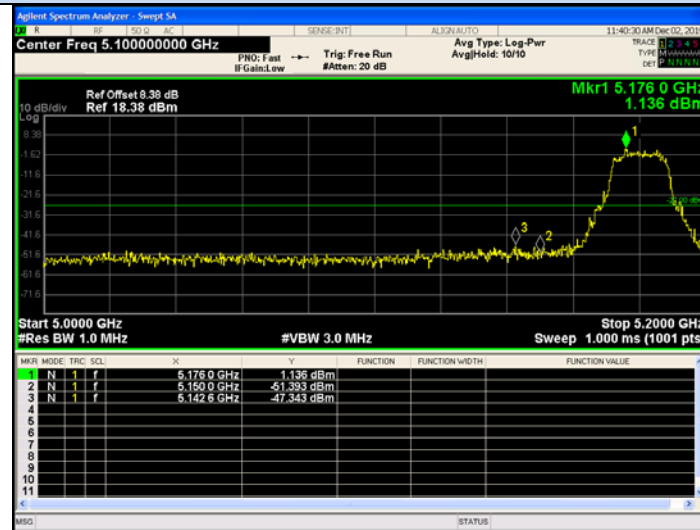


Channel 36 / 5180 MHz - Peak

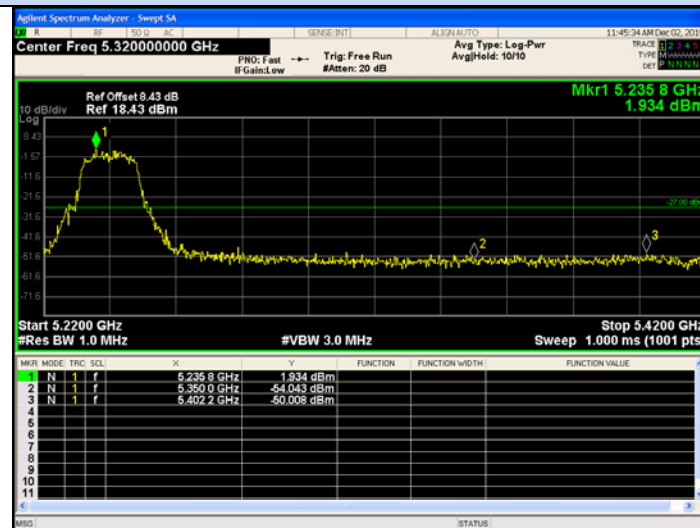

Channel 48 / 5240 MHz - Peak


IEEE 802.11n HT20

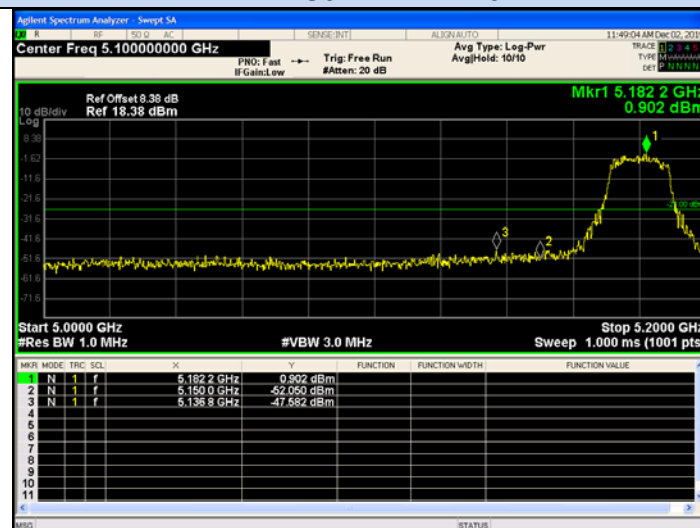

Channel 36 / 5180 MHz - Peak




IEEE 802.11n HT20

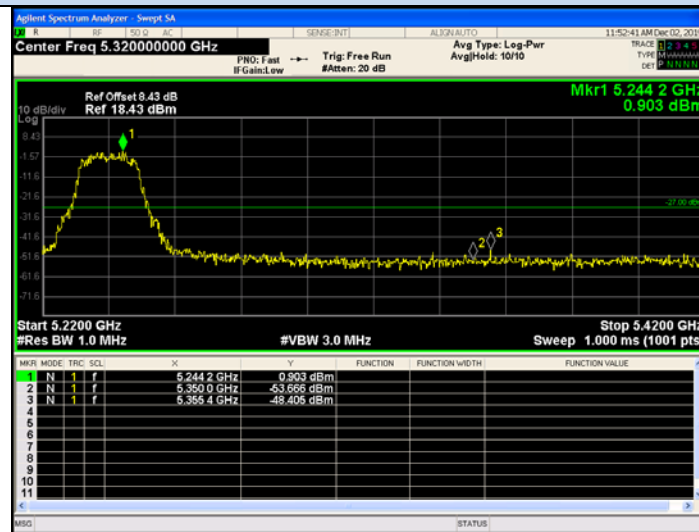


Channel 48 / 5240 MHz - Peak

IEEE 802.11ac VHT20

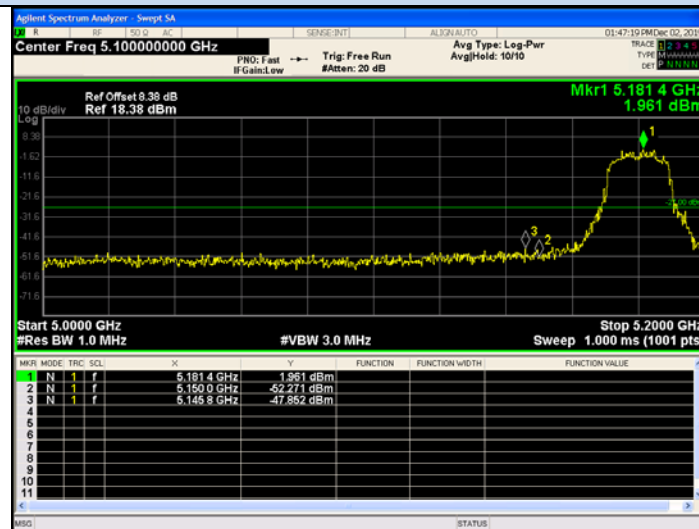


Channel 36 / 5180 MHz - Peak

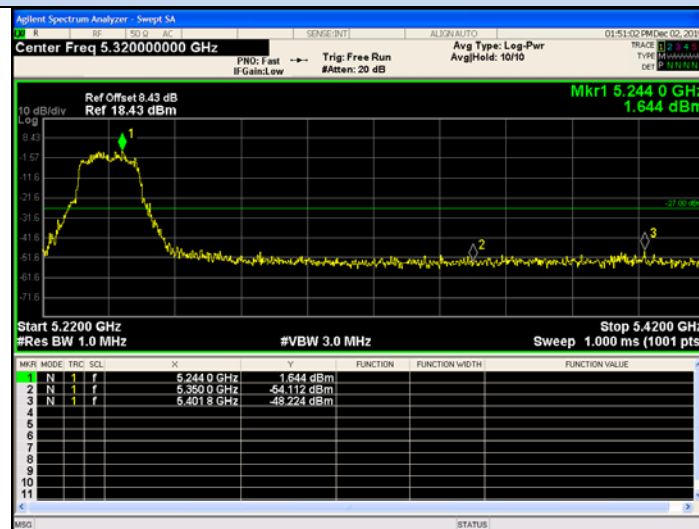


Channel 48 / 5240 MHz - Peak



IEEE 802.11n HT40

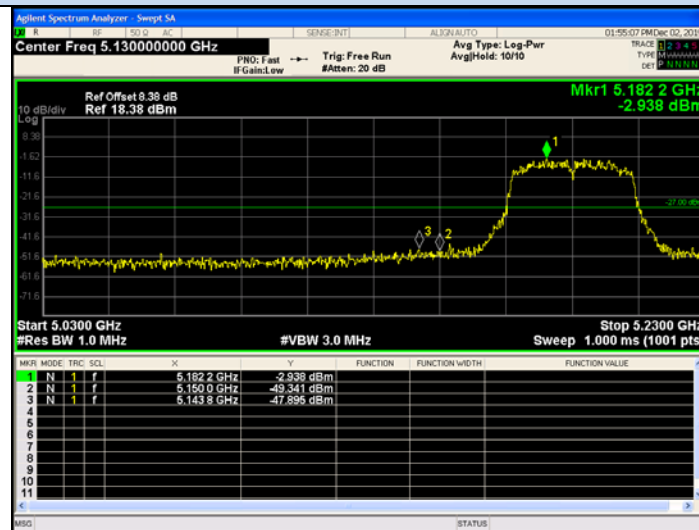


Channel 38 / 5190 MHz - Peak

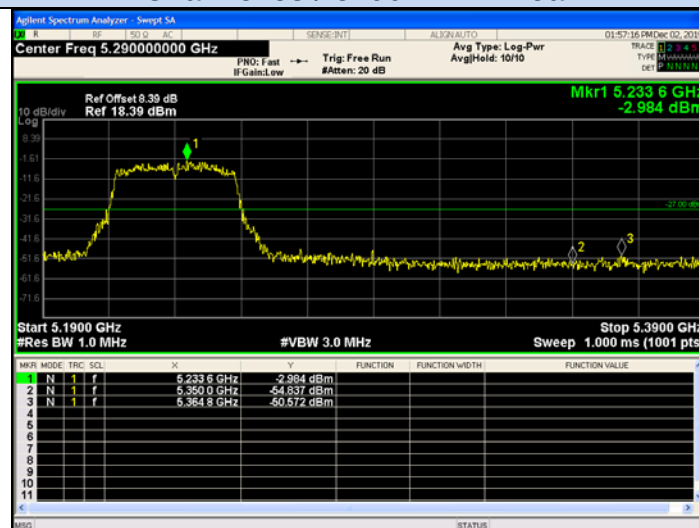

Channel 46 / 5230 MHz - Peak


IEEE 802.11ac VHT40

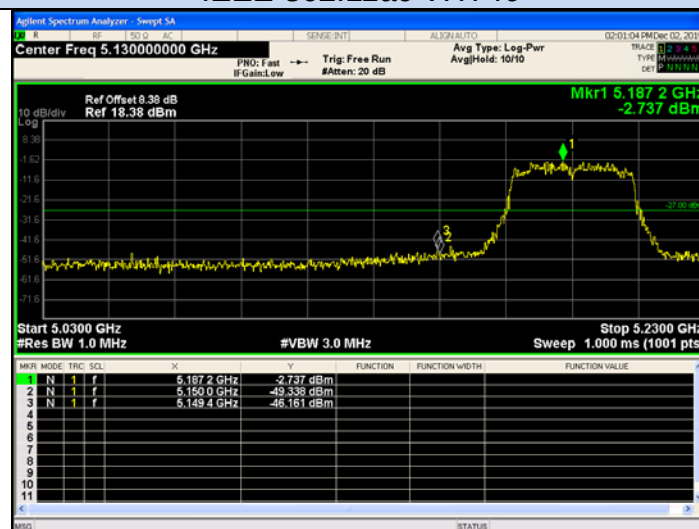

Channel 38 / 5190 MHz - Peak




IEEE 802.11ac VHT40

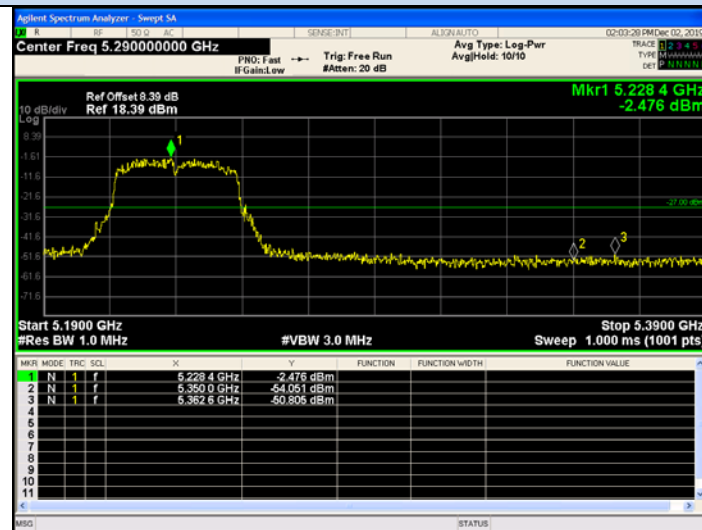


Channel 46 / 5230 MHz - Peak

IEEE 802.11ac VHT80

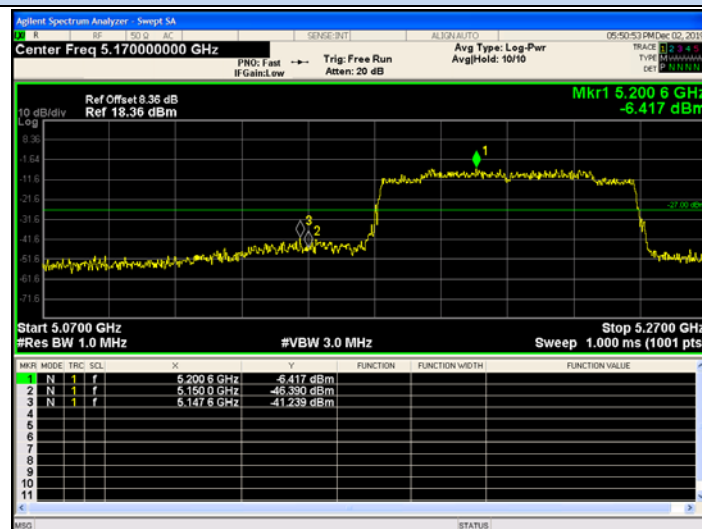

Channel 42 / 5210 MHz - Peak

IEEE 802.11ac VHT80

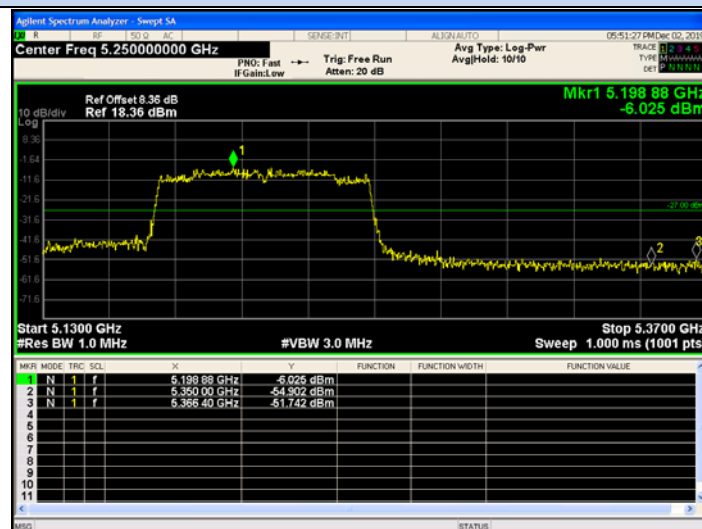


Channel 42 / 5210 MHz - Peak




Test Results of 5.8G

IEEE 802.11a

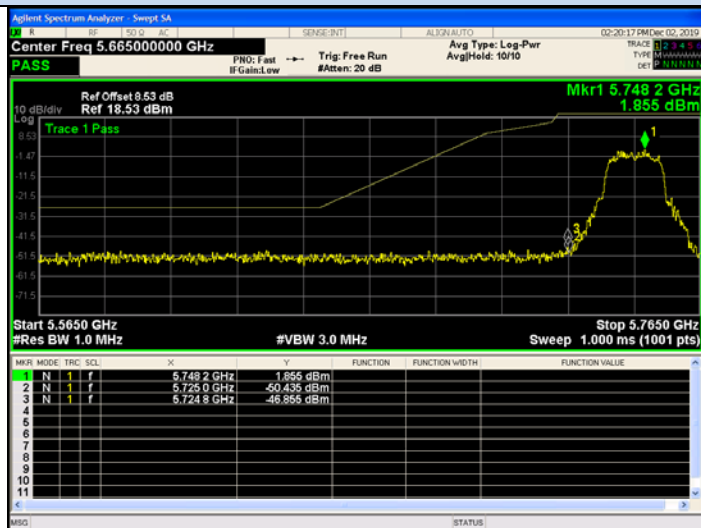


Channel 149 / 5745 MHz - Peak

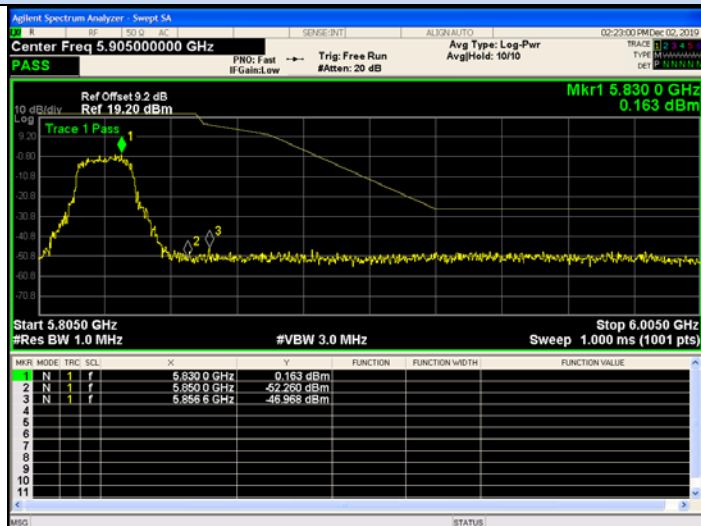

Channel 165 / 5825 MHz - Peak


IEEE 802.11n HT20

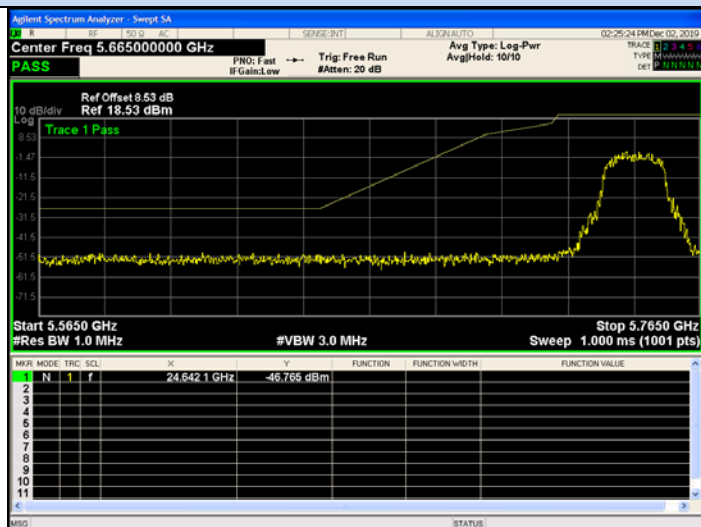

Channel 149 / 5745 MHz - Peak




IEEE 802.11n HT20

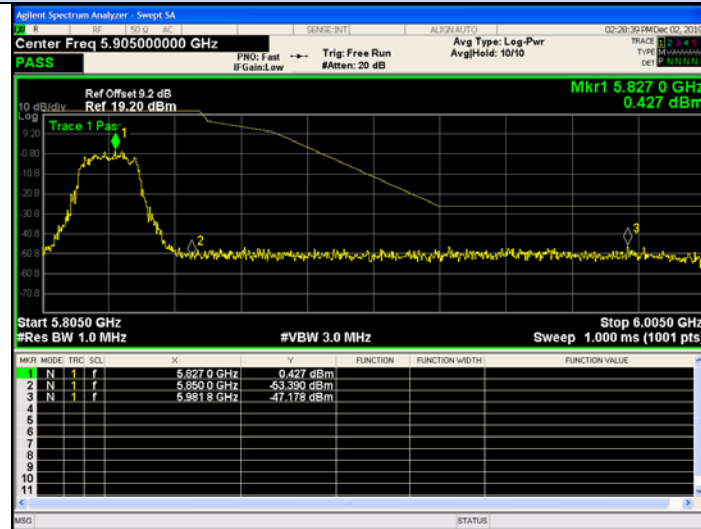

Channel 165 / 5825 MHz - Peak

IEEE 802.11ac VHT20

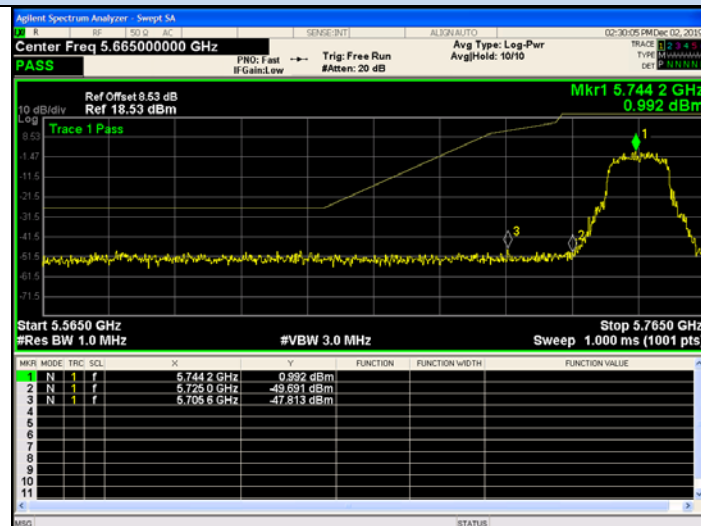


Channel 149 / 5745 MHz - Peak



Channel 165 / 5825 MHz - Peak



IEEE 802.11n HT40

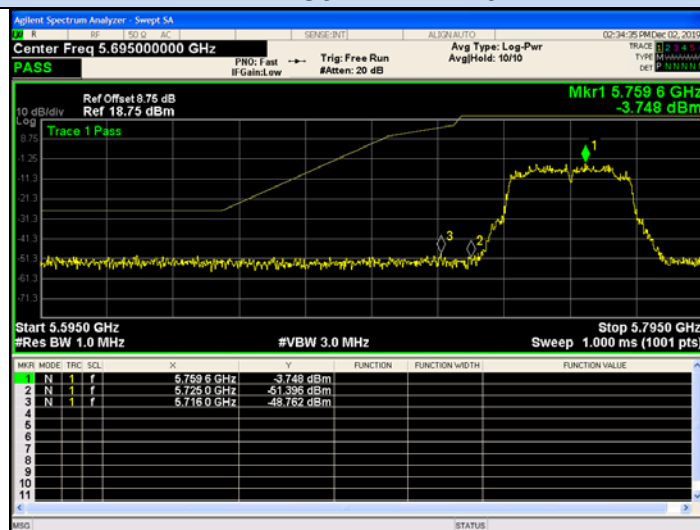


Channel 151 / 5755 MHz - Peak



Channel 159 / 5795 MHz - Peak


IEEE 802.11ac VHT40

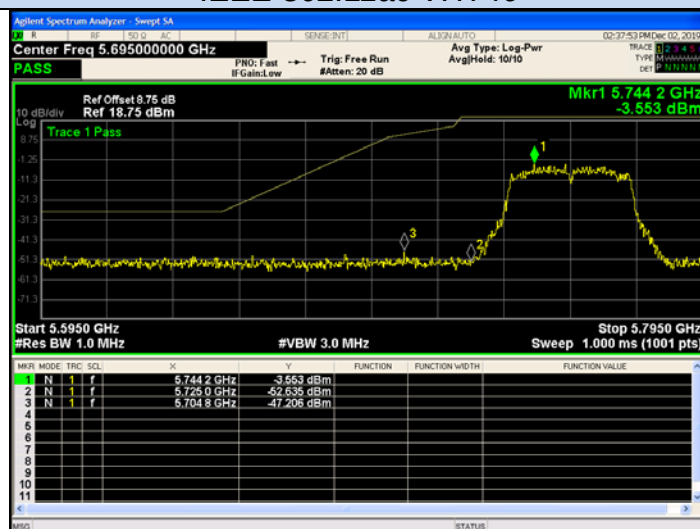

Channel 151 / 5755 MHz - Peak




IEEE 802.11ac VHT40

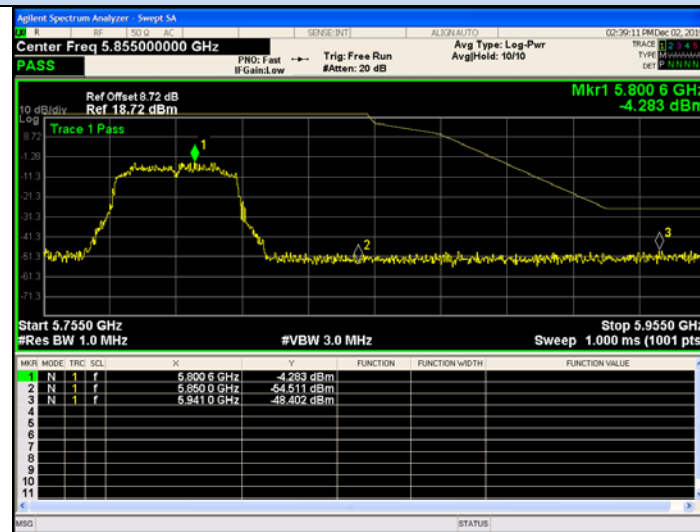

Channel 159 / 5795 MHz - Peak

IEEE 802.11ac VHT80

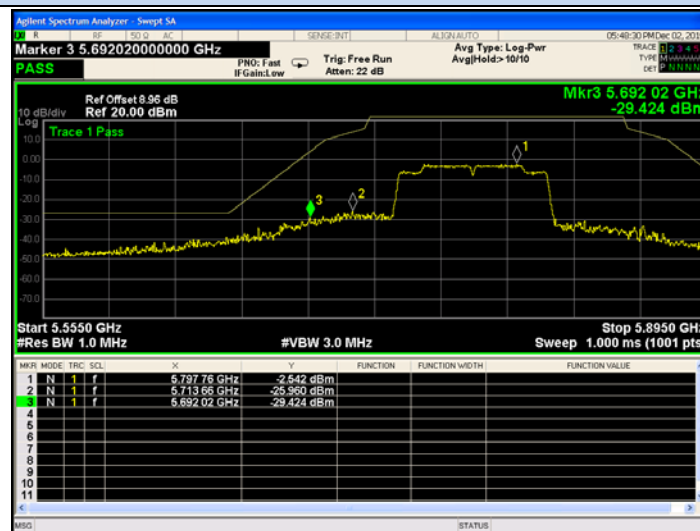

Channel 155 / 5775 MHz - Peak



Channel 155 / 5775 MHz - Peak

4.10. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Internal Antenna, The directional gains of antenna used for transmitting is 0.2dBi.



WIFI ANTENNA1

WIFI ANTENNA2

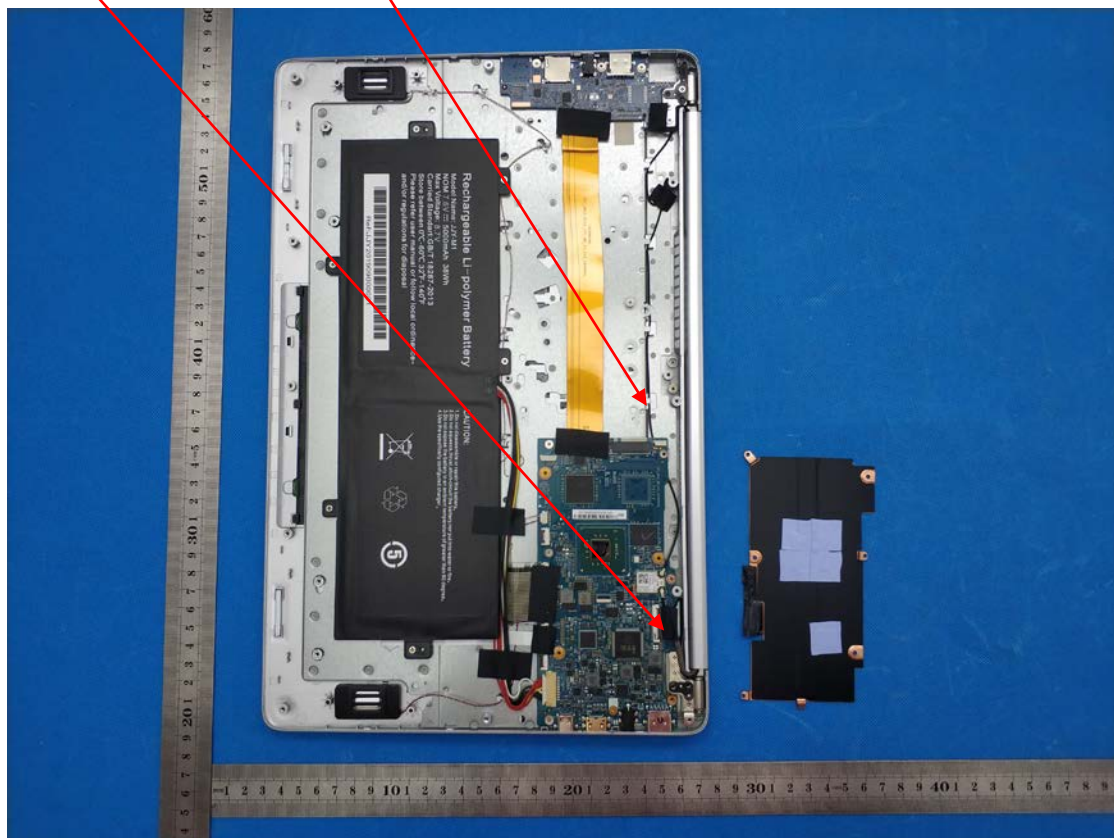

4.11. Photographs of Test Setup

Radiated Emission

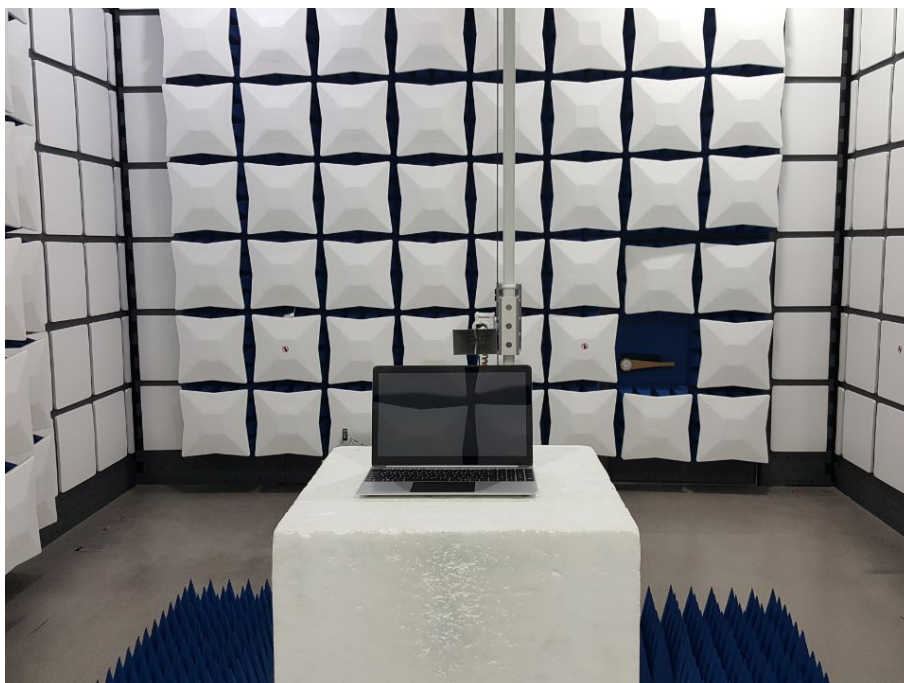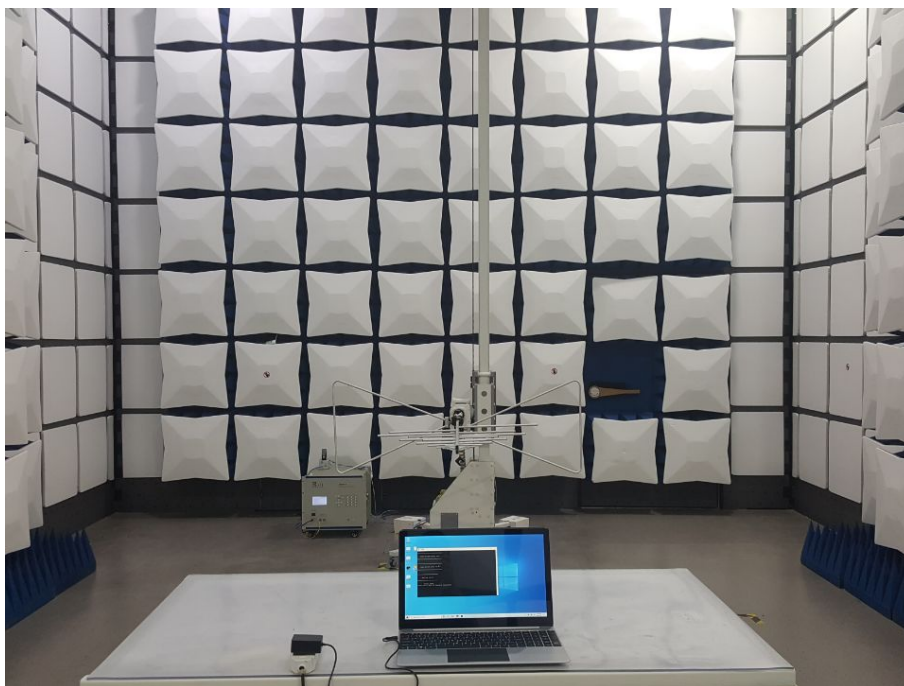



Conducted Emission



The end