


Product Specification

Product Type: Commercial LCD Display

Product Model: M65SAR

Version: V1.0

1. Product Features

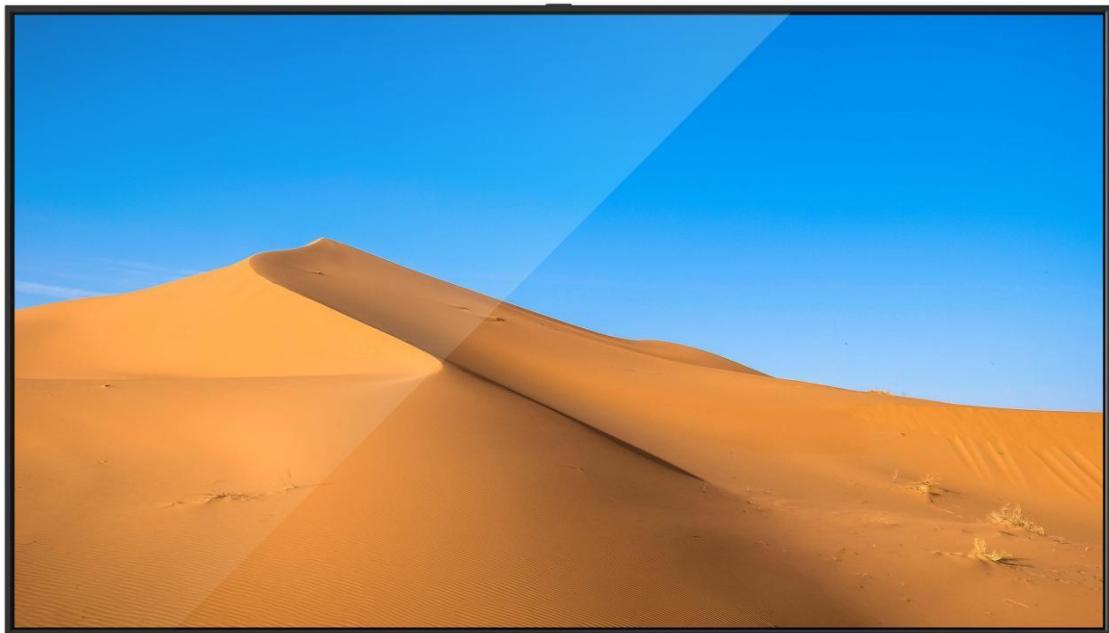

- Four equal-width borders
- 2 downward-facing USB ports
- Display modes: landscape and portrait (counterclockwise)
- Built-in speakers
- Wide temperature range and high brightness
- 4K resolution
- PWM dimming
- Screen brightness adaptive
- Not recommended for prolonged static images

2. Display Parameters

| | |
|-------------------|-----------------------------------|
| Size | 65 inches |
| Screen Type | IPS |
| Response Time | 9ms |
| Aspect Ratio | 16:9 |
| Max. Display Size | 1428.48mm(H) ×803.52(V)mm |
| Resolution | 3840(H) ×2160(V) |
| Pixel Pitch | 0.372mm×0.372mm |
| Refresh Rate | 60Hz |
| Color Depth | 1.07M(10bit) |
| Contrast (Typ) | 1200:1 |
| Viewing Angle | 178 °/178 °(H/V) |
| Backlight Type | DLED |
| Brightness (Typ) | 3500cd/m ² (WHITE BAL) |
| Lifespan | ≥30000 hours |

3. Operating System

| | |
|------------|---------------|
| OS Version | Android 11 |
| RAM | 4G |
| ROM | 32G |
| CPU | Quad-Core A17 |
| GPU | Mali-G52 2EE |

4. Speaker

| | |
|----------|------|
| Channels | 2.0 |
| Power | 2×5W |

5. Electrical Parameters

| | |
|------------------------|---|
| Power Input | 90~132VAC/180~264VAC (Selection through switch) 47~63Hz 6A |
| Max. Power Consumption | 430W |

6. I/O Interface

| | | |
|--------------------|---|--|
| RJ45 IN | 1 | 10/100Mbps |
| HDMI IN | 1 | Maximum support for 4K@60Hz |
| VGA IN | 1 | 1D-SUB 15pin |
| AUDIO IN | 1 | 3.5mm interface |
| USB | 3 | TYPE-A USB2.0*1(HOST) TYPE-A USB3.0*1(HOST) TYPE-C USB2.0*1(OTG) |
| LIGHT SENSOR | 3 | Ambient light remote control interface (top, right, and terminal socket) |
| Expandable Storage | 1 | Micro TF Card 128G (Max) |
| WIFI(2.4/5.8G) | 1 | 2412~2472MHz, Maximum power: 16.64dBm(EIRP) 5725-5850MHz, , Maximum power: 13.77dBm(EIRP) |
| UART | 2 | Communication protocol |

7. Size/Weight

| | |
|---------------------------------|---------------------|
| Dimensions (L×W×H) | 1454×828.7×83.6mm |
| Package Dimensions (L×W×H) | 1594×953×240mm |
| VESA Hole Size (L×W) | 400×400mm/400×600mm |
| Wall-mount Screw Specifications | M6 |
| Net Weight | 37.3kg |
| Gross Weight | 45.5kg |


8. Accessories

| | |
|-------------------------------------|----|
| Power Cord | ×1 |
| WIFI Antenna | ×1 |
| Remote Control | ×1 |
| AAA Battery | ×2 |
| Ambient light remote control module | ×1 |

9. Environmental Factors

| | |
|---------------------|------------|
| Working Temperature | 0°C~40°C |
| Working Humidity | 10%~80%RH |
| Storage Temperature | -10°C~55°C |
| Storage Humidity | 10%~80%RH |

10. Dimensions

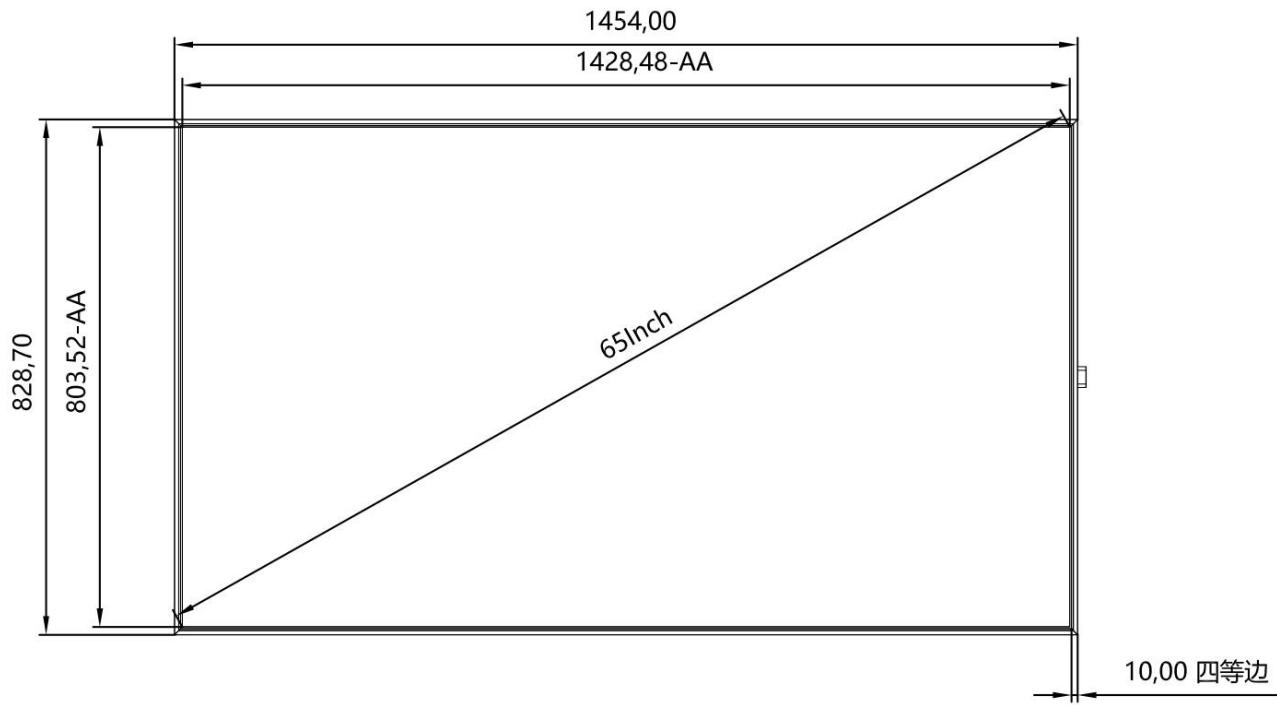

11. Disclaimer

The actual dimensions/weight of the device may vary due to product configuration and manufacturing process. Please refer to the physical product for accurate information.

The product images in this Specification are for illustration purposes only, and the actual product may have slight differences in appearance, color, and size. Please refer to the physical product for accurate details.

In order to provide as accurate specification parameters as possible, the text description, picture effects, etc. of this Specification may be adjusted and revised in real-time, so as to match the actual product performance, specifications, etc.

If it is necessary to make the above revision and adjustment, no special notification will be issued.

Hereby, [Shanghai Goodview Electronic Technology Co., Ltd] declares that the radio equipment type [M65SAR] is in compliance with Directive 2014/53/EU

The full Doc please refer to the DOC Letter

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

| | | | | | | | |
|--|----|----|----|----|----|----|----|
|  | AT | BE | BG | HR | CY | CZ | DK |
| | EE | FI | FR | DE | EL | HU | IE |
| | IT | LV | LT | LU | MT | NL | PL |
| | PT | RO | SK | SI | ES | SE | UK |

FCC Caution

§ 15.19 Labeling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in mobile exposure condition at least 20cm distance between the human body

Shanghai Goodview Electronic Technology Co., Ltd.

Address: No. 458 Jinwan Road, Pudong New District, Shanghai | www.goodview.com