
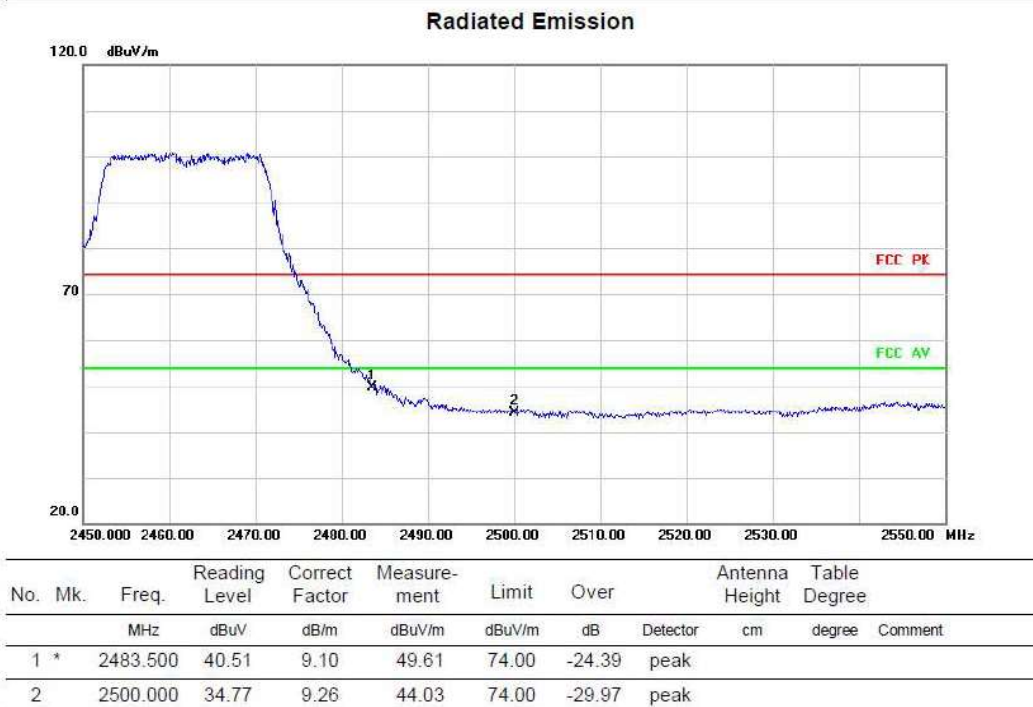


Above 1G (1GHz~18GHz)

Test mode: 11AX20SISO


Test Channel:11

VERTICAL

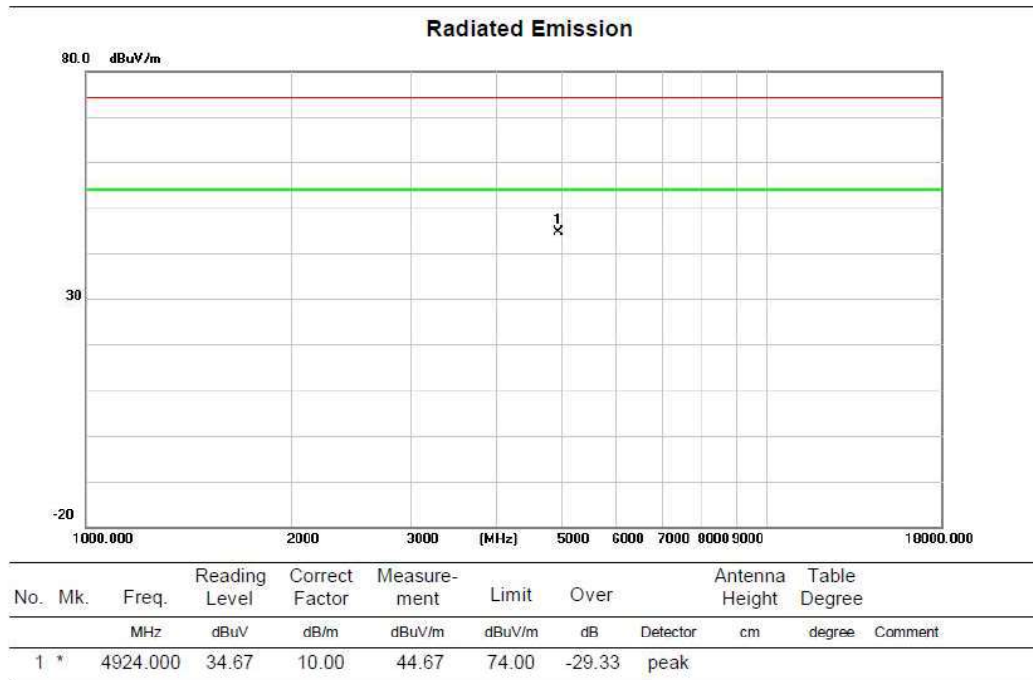


HORIZONTAL

Radiated Emission

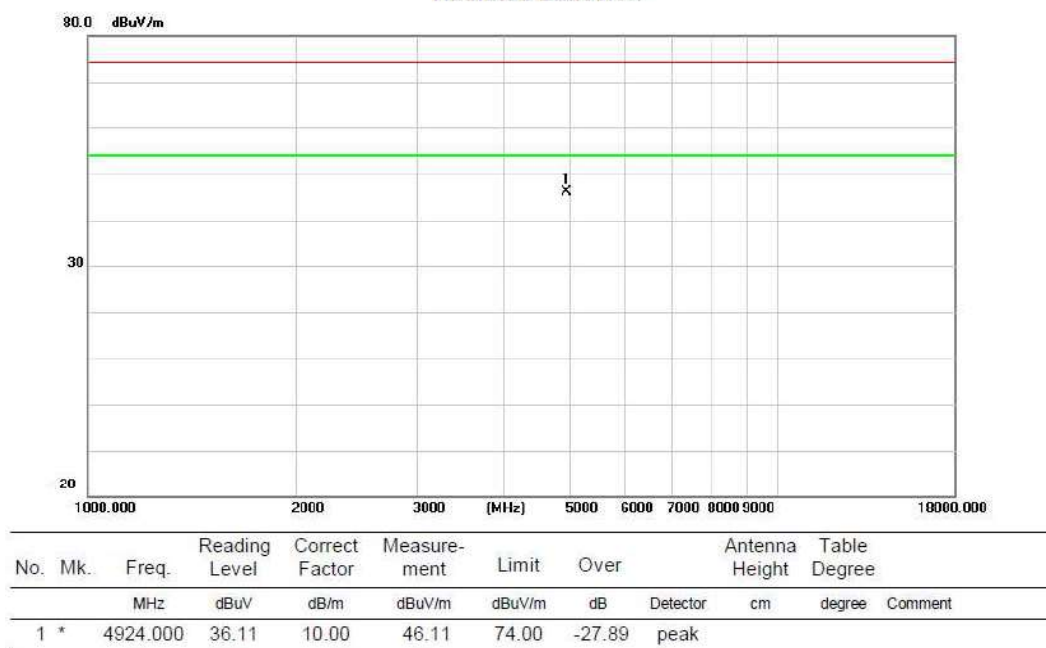

Radiated Emission


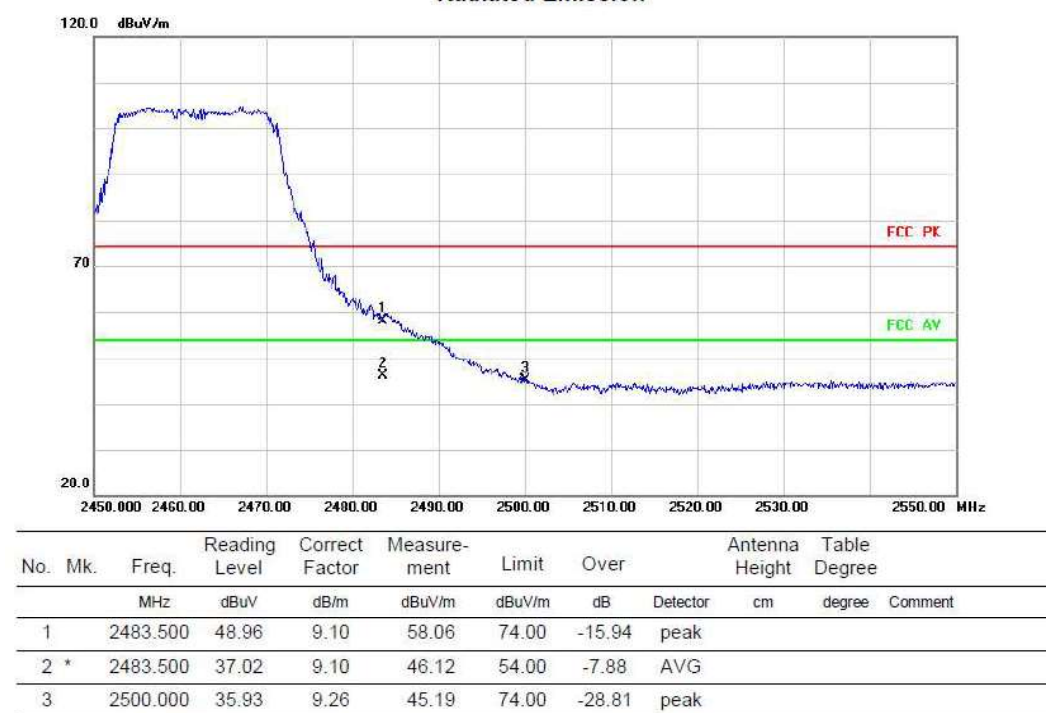


Above 1G (1GHz~18GHz)

Test mode: 11AX40SISO

Test Channel:3

VERTICAL

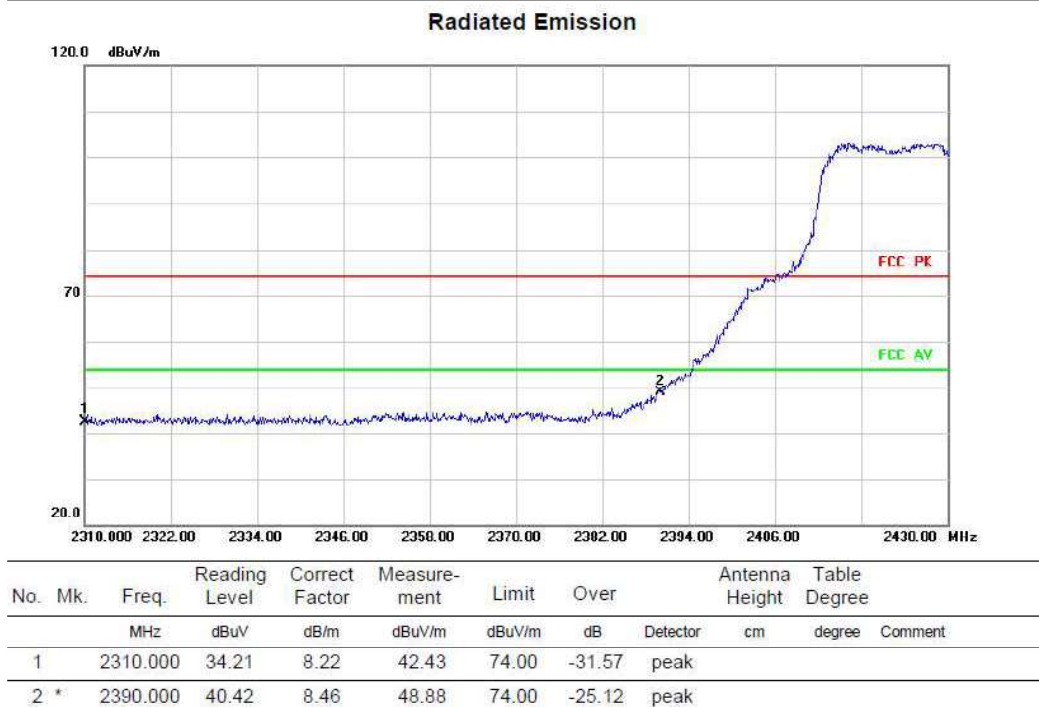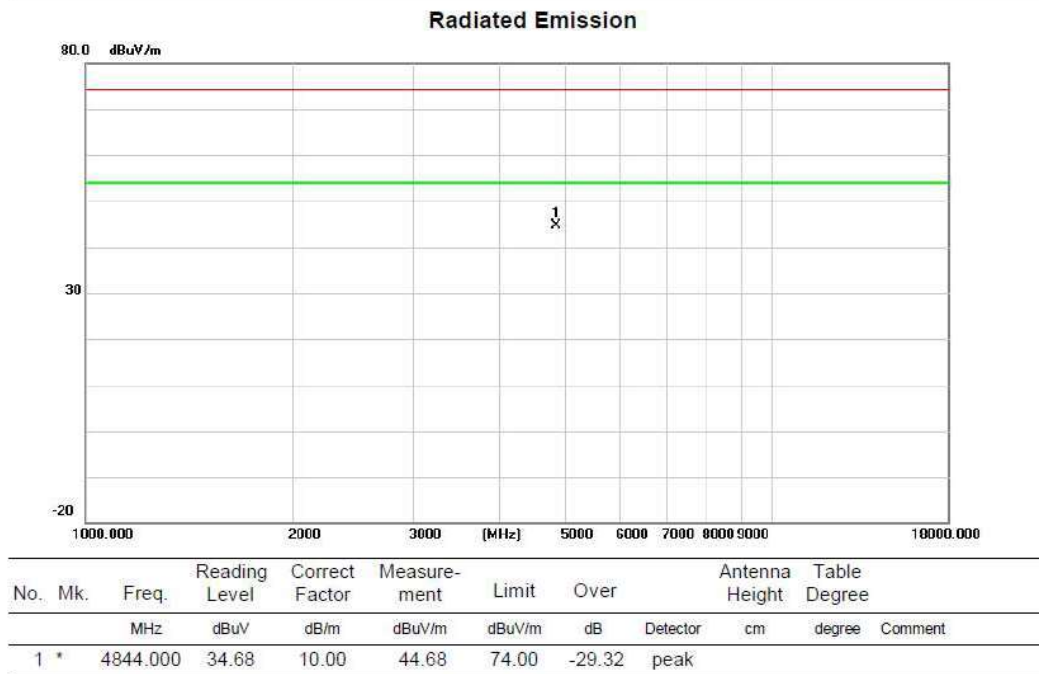


HORIZONTAL

Radiated Emission



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4844.000	35.25	10.00	45.25	74.00	-28.75 peak		

Radiated Emission

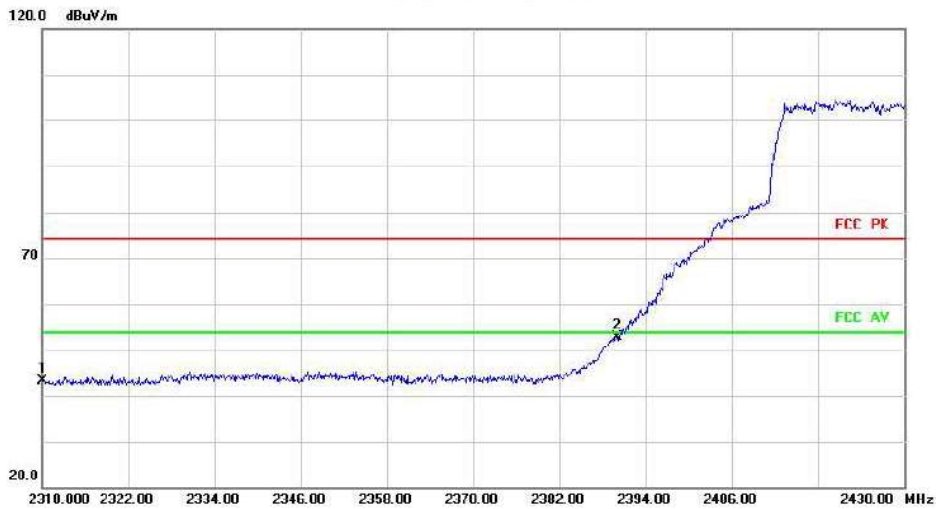


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2310.000	34.88	8.22	43.10	74.00	-30.90 peak		
2	*	2390.000	44.47	8.46	52.93	74.00	-21.07 peak		

Above 1G (1GHz~18GHz)


Test mode:11AX40SISO

Test Channel:6

VERTICAL

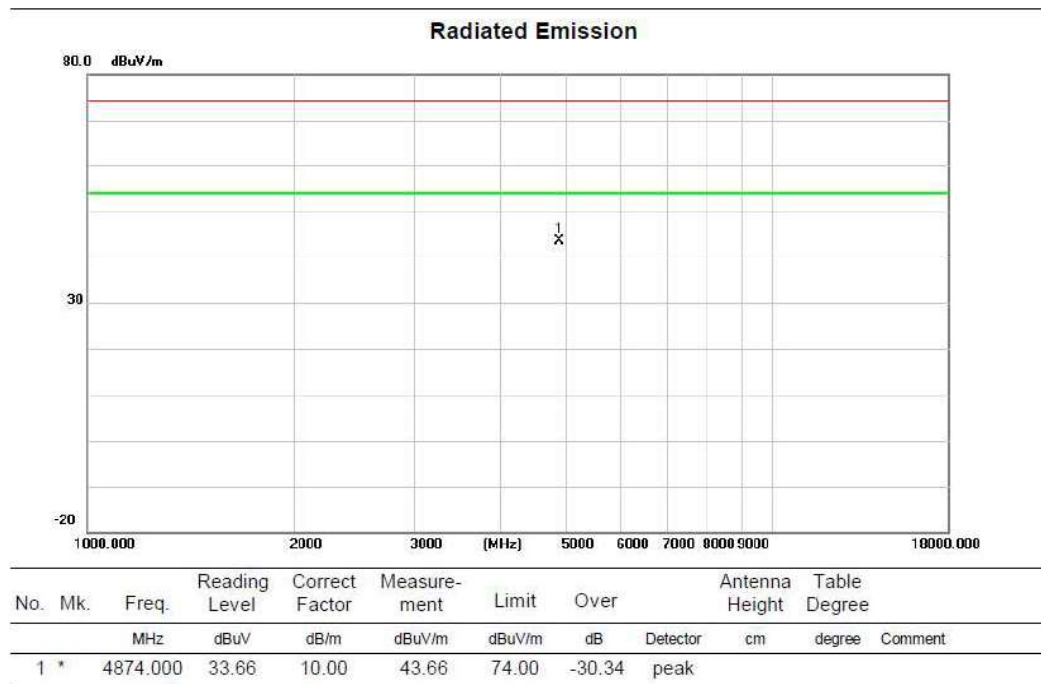

HORIZONTAL


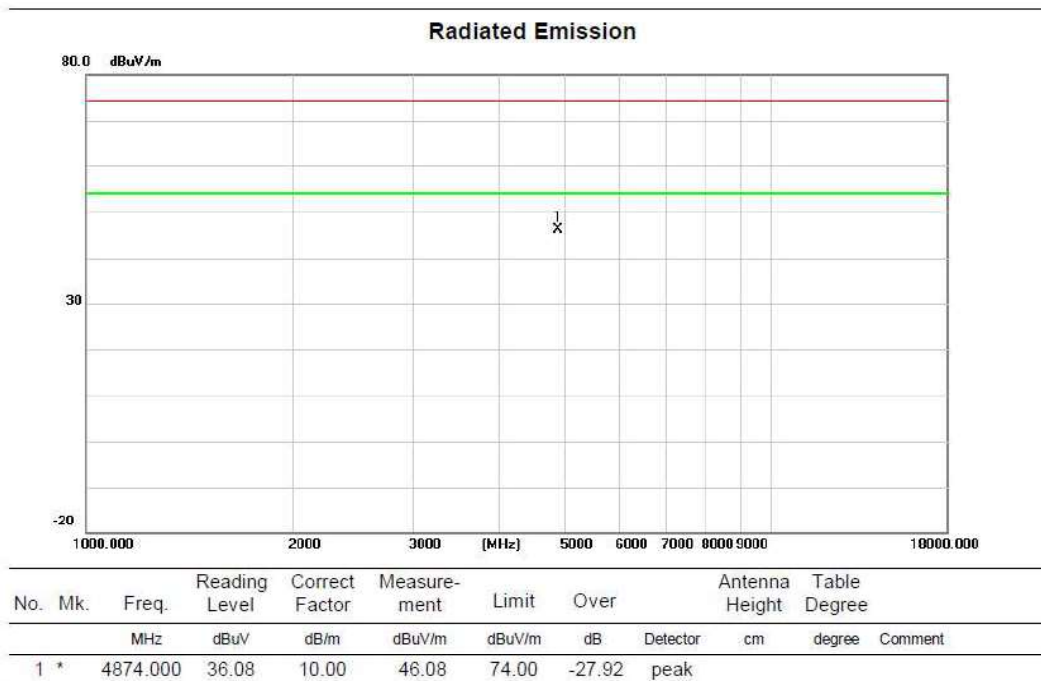


Above 1G (1GHz~18GHz)

Test mode: 11AX40SISO


Test Channel:9

VERTICAL

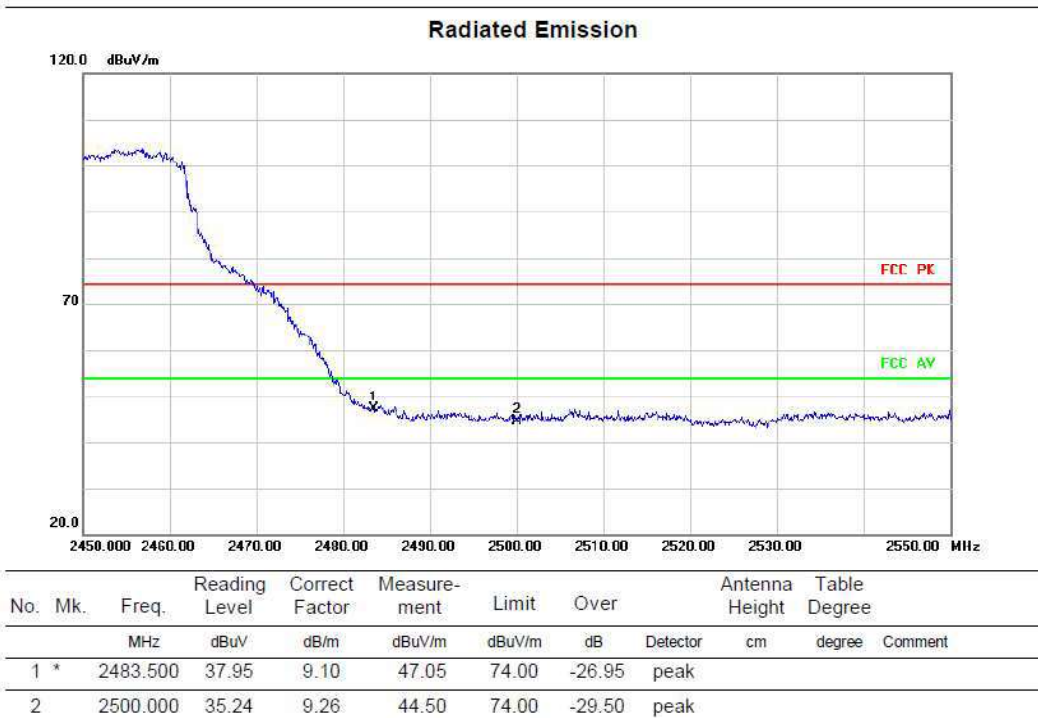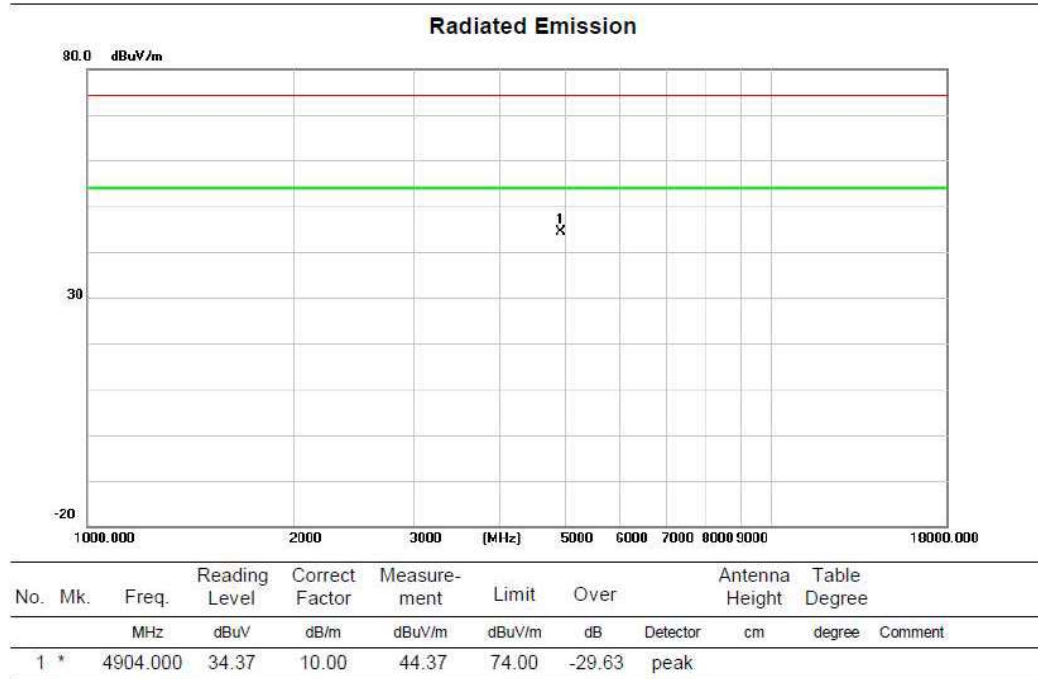


HORIZONTAL

Radiated Emission

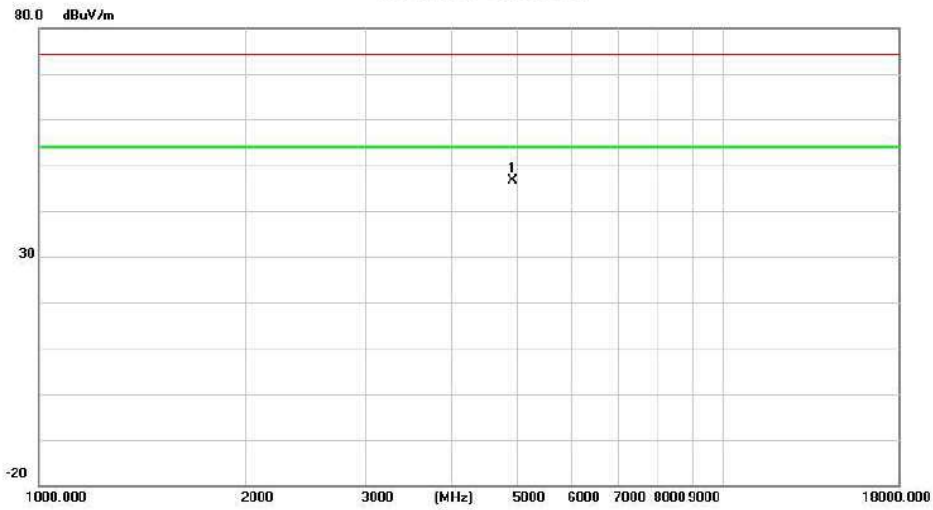

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4904.000	36.54	10.00	46.54	74.00	-27.46	peak	

Radiated Emission

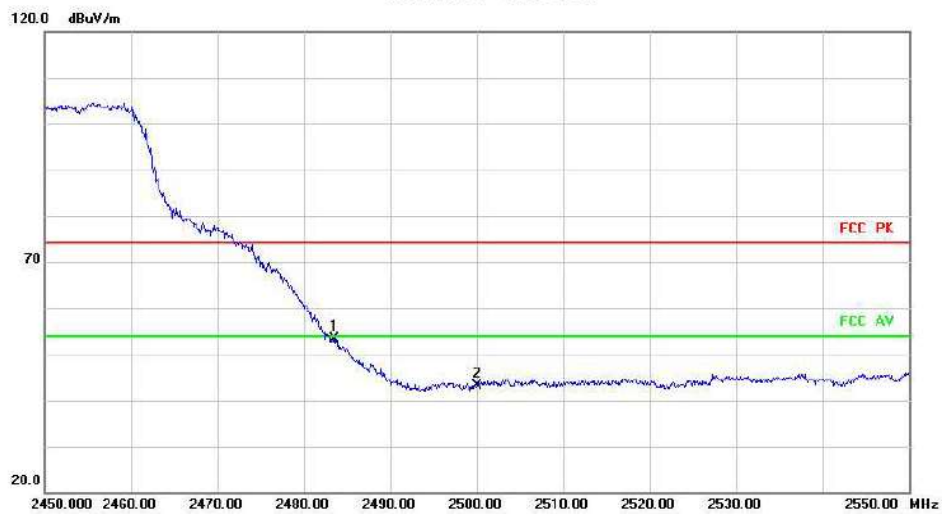

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	2483.500	44.30	9.10	53.40	74.00	-20.60	peak	
2		2500.000	33.80	9.26	43.06	74.00	-30.94	peak	

The high frequency, which started from 18GHz to 26.5GHz, was pre-scanned and the result which was 20dB lower than the limit line was not recorded in this report.

3.3 Spurious Emission at Antenna Port

3.3.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

3.3.2 Test Procedure


Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

a) The EUT was directly connected to the tonscond test system and antenna output port as show in the block diagram below.

b) Spectrum Setting as below:

Centre Frequency	The centre frequency of the channel under test
Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.3.3 Test Setup

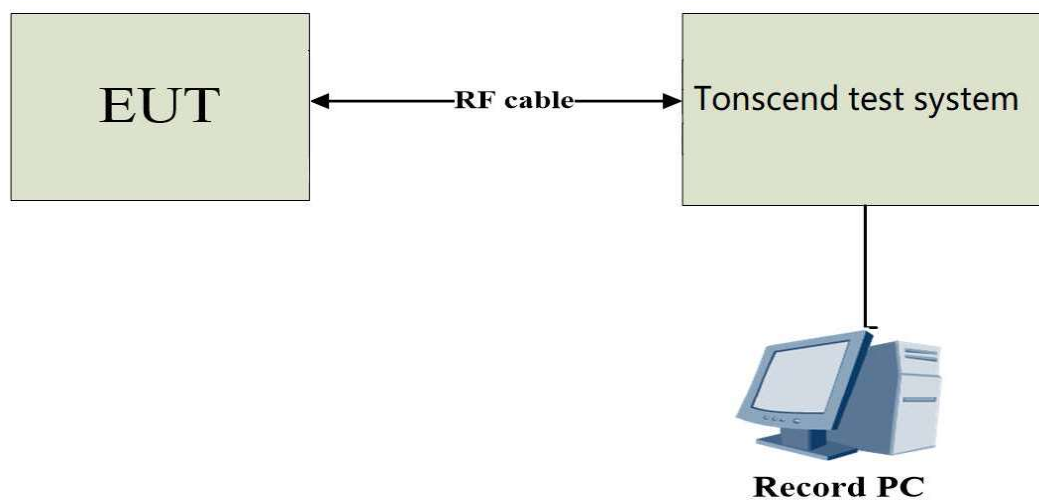

3.3.4 The Result

Conducted Spurious Emission



11B_Ant1_2412_1000~26500



11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000




11B_Ant1_2437_1000~26500



11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

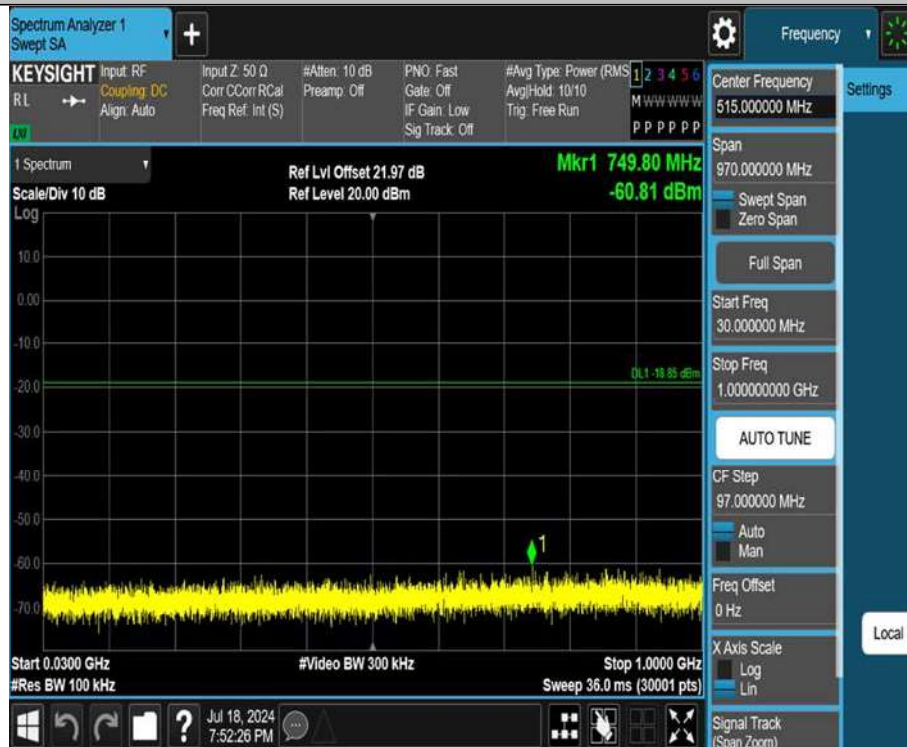

11B_Ant1_2462_1000~26500



11G_Ant1_2412_0~Reference

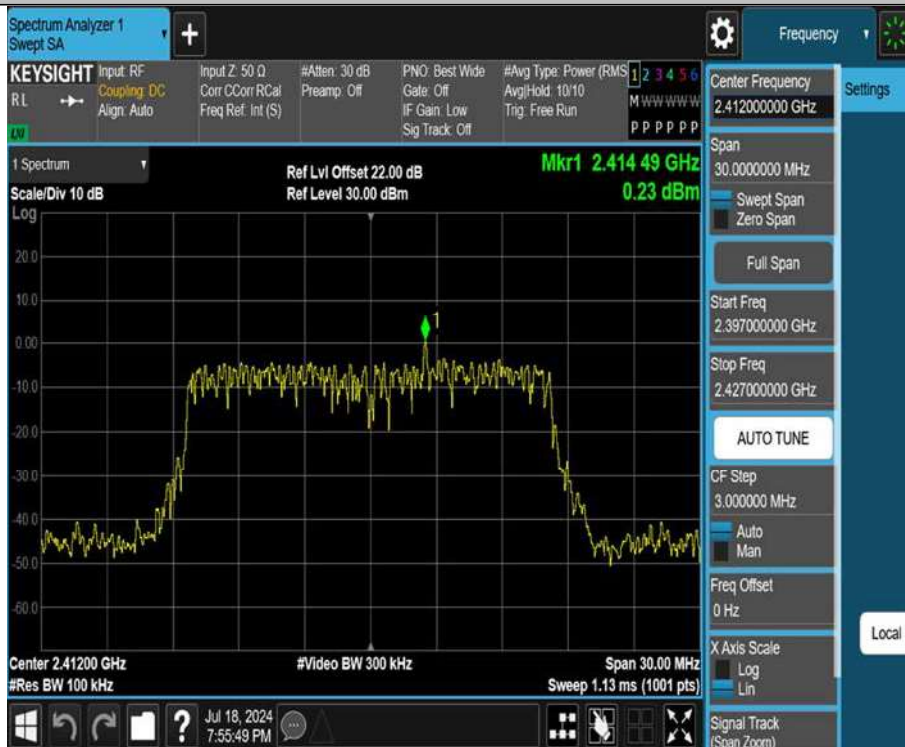

11G_Ant1_2412_30~1000




11G_Ant1_2412_1000~26500



11G_Ant1_2437_0~Reference



11G_Ant1_2437_30~1000

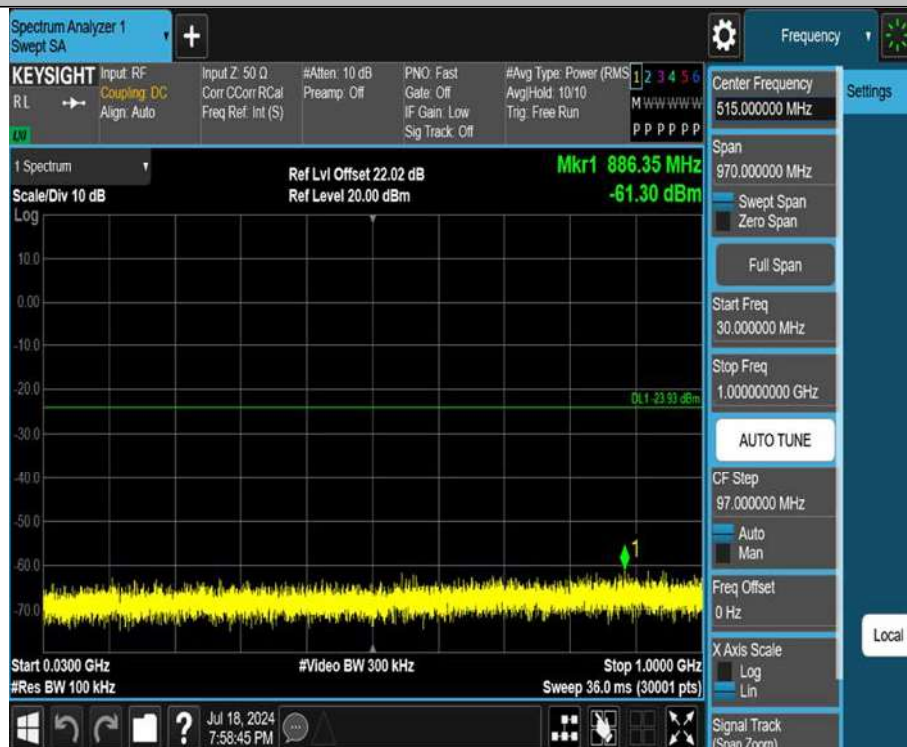

11G_Ant1_2437_1000~26500



11G_Ant1_2462_0~Reference




11G_Ant1_2462_30~1000




11G_Ant1_2462_1000~26500



11N20SISO_Ant1_2412_0~Reference

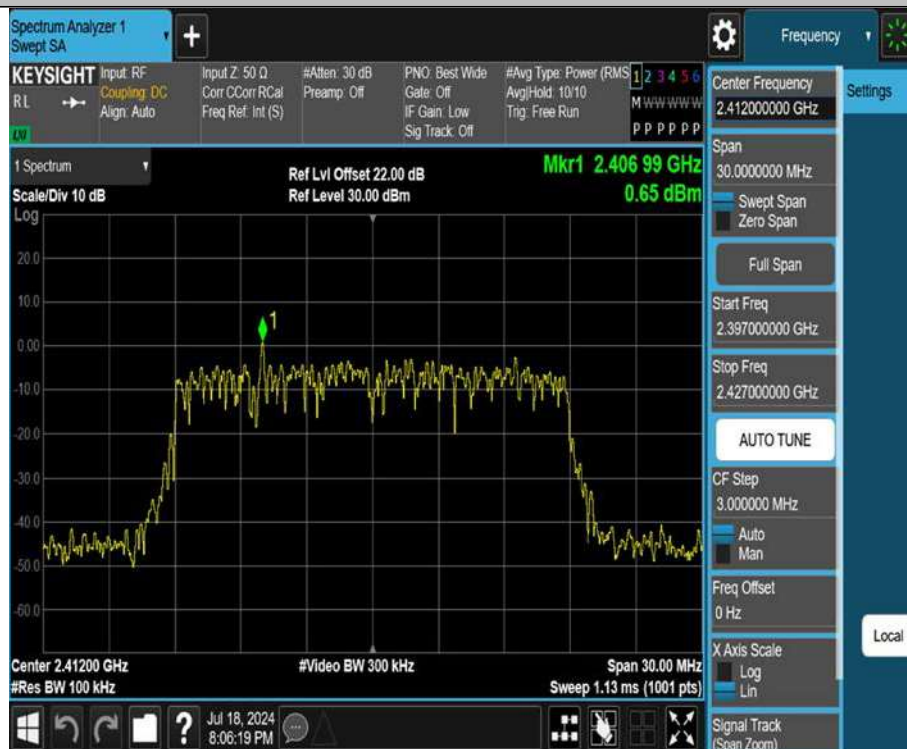


11N20SISO_Ant1_2412_30~1000

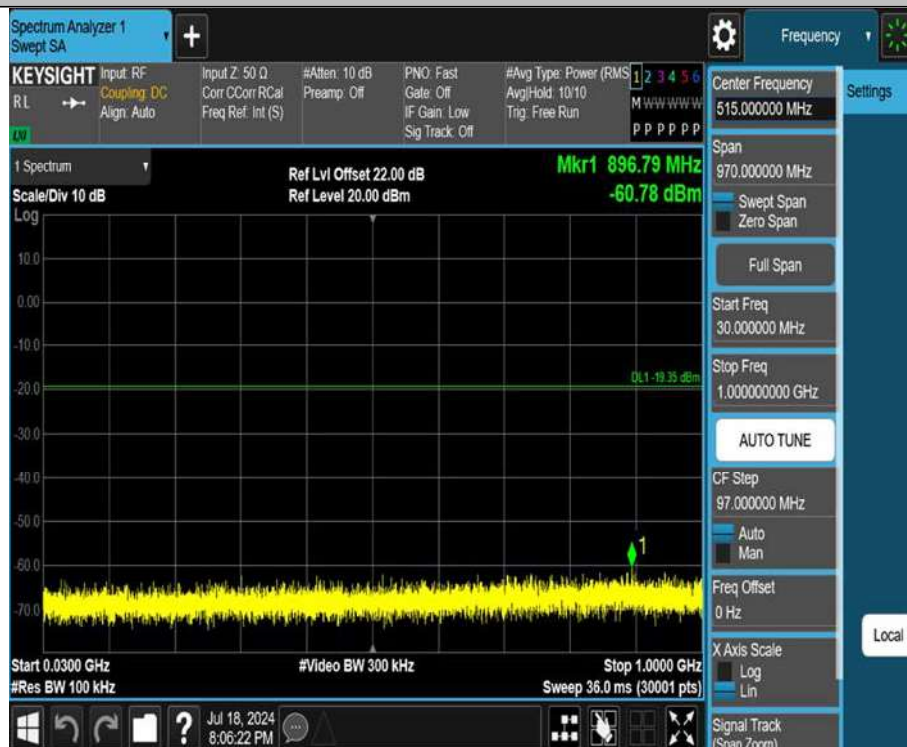


11N20SISO_Ant1_2412_1000~26500



11N20SISO_Ant1_2437_0~Reference

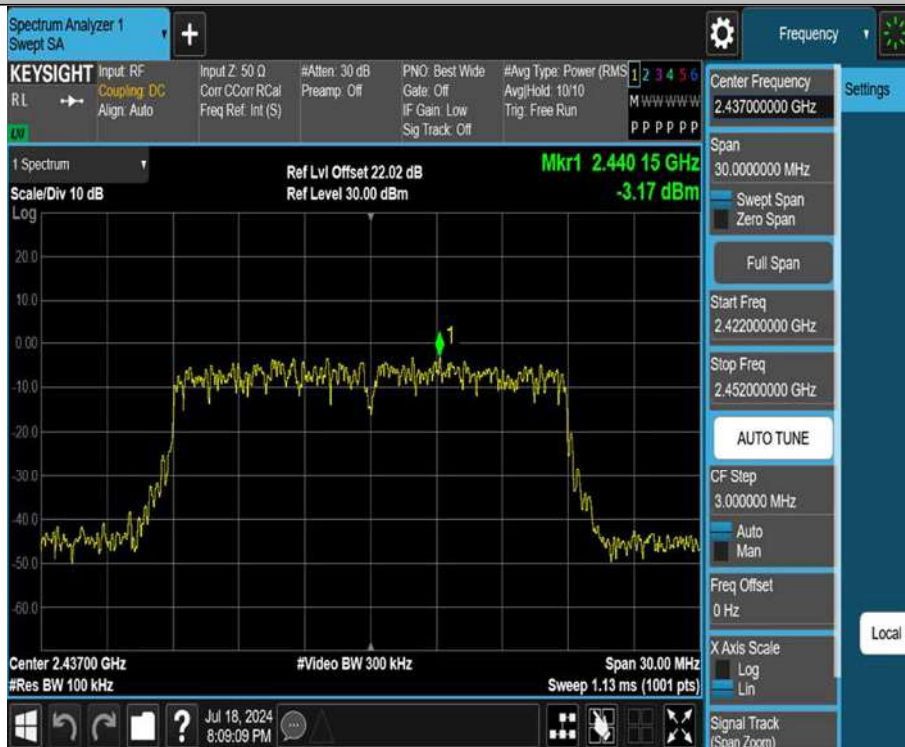


11N20SISO_Ant1_2437_30~1000

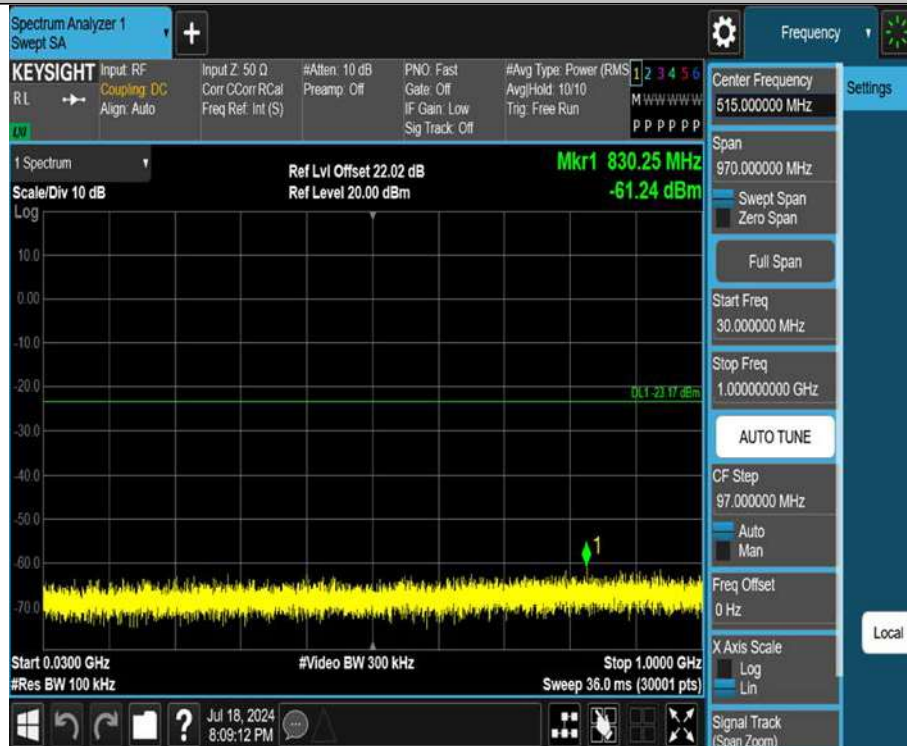

11N20SISO_Ant1_2437_1000~26500



11N20SISO_Ant1_2462_0~Reference

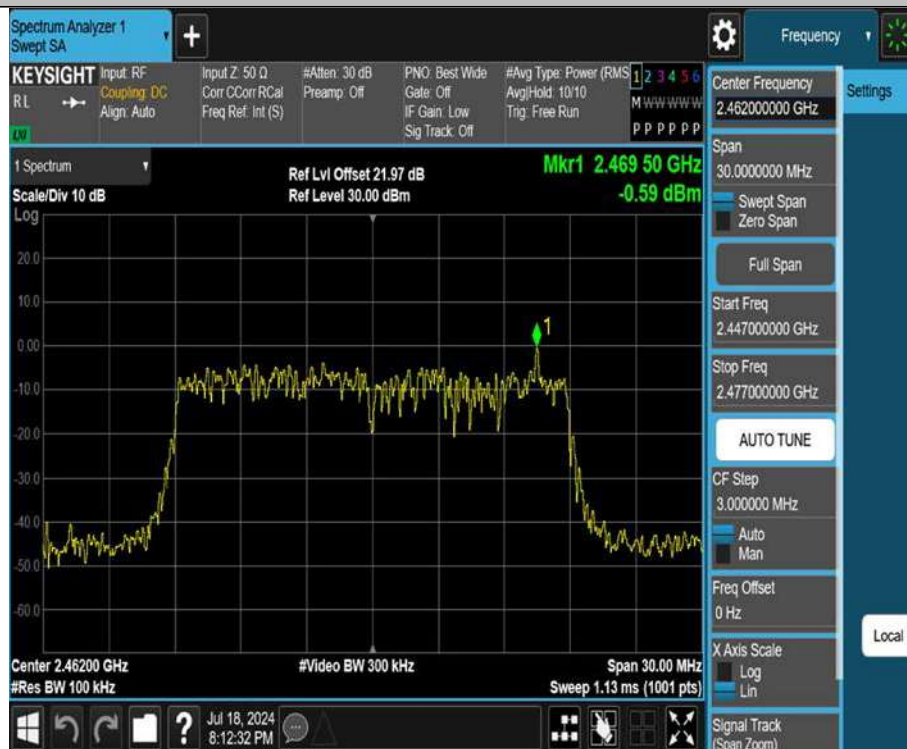

11N20SISO_Ant1_2462_30~1000



11N20SISO_Ant1_2462_1000~26500



11N40SISO_Ant1_2422_0~Reference




11N40SISO_Ant1_2422_30~1000



11N40SISO_Ant1_2422_1000~26500



11N40SISO_Ant1_2437_0~Reference

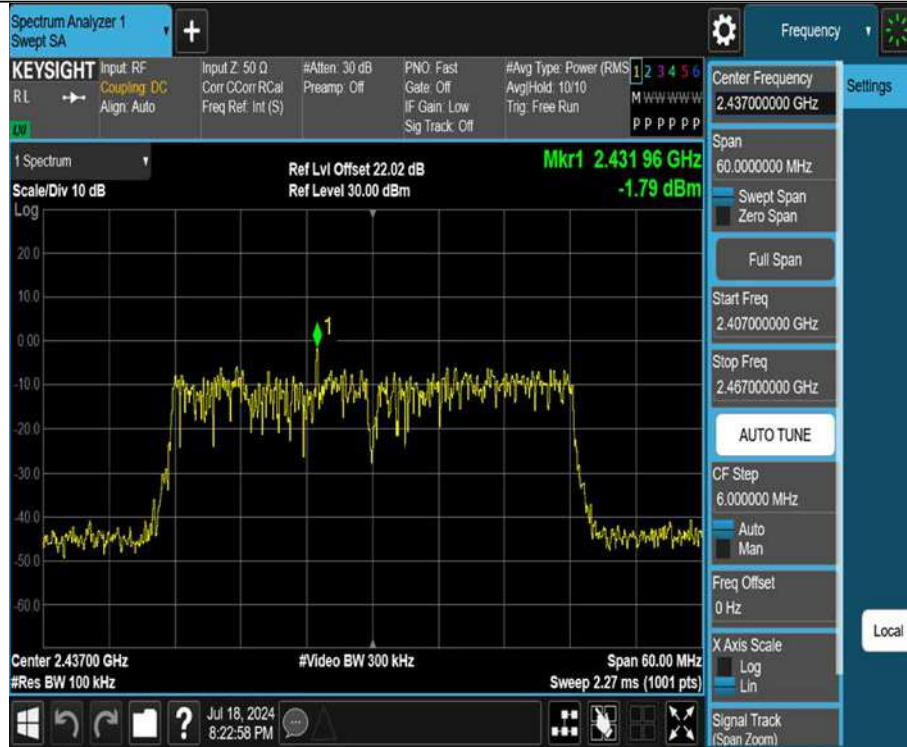

11N40SISO_Ant1_2437_30~1000




11N40SISO_Ant1_2437_1000~26500



11N40SISO_Ant1_2452_0~Reference




11N40SISO_Ant1_2452_30~1000

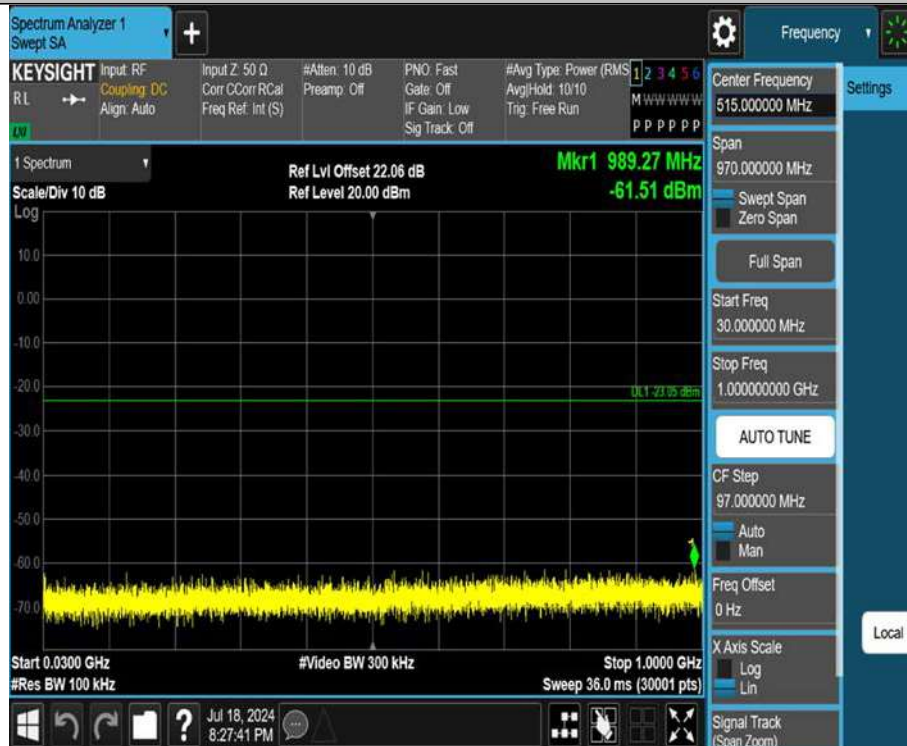

11N40SISO_Ant1_2452_1000~26500



11AX20SISO_Ant1_2412_0~Reference

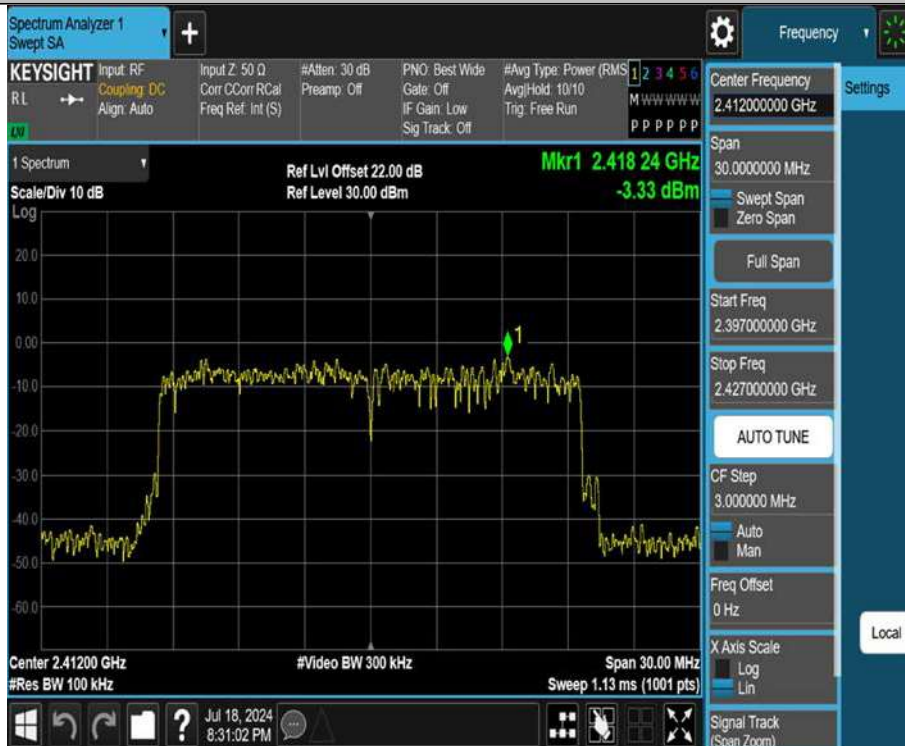

11AX20SISO_Ant1_2412_30~1000



11AX20SISO_Ant1_2412_1000~26500



11AX20SISO_Ant1_2437_0~Reference



11AX20SISO_Ant1_2437_30~1000



11AX20SISO_Ant1_2437_1000~26500



11AX20SISO_Ant1_2462_0~Reference



11AX20SISO_Ant1_2462_30~1000




11AX20SISO_Ant1_2462_1000~26500



11AX40SISO_Ant1_2422_0~Reference



11AX40SISO_Ant1_2422_30~1000

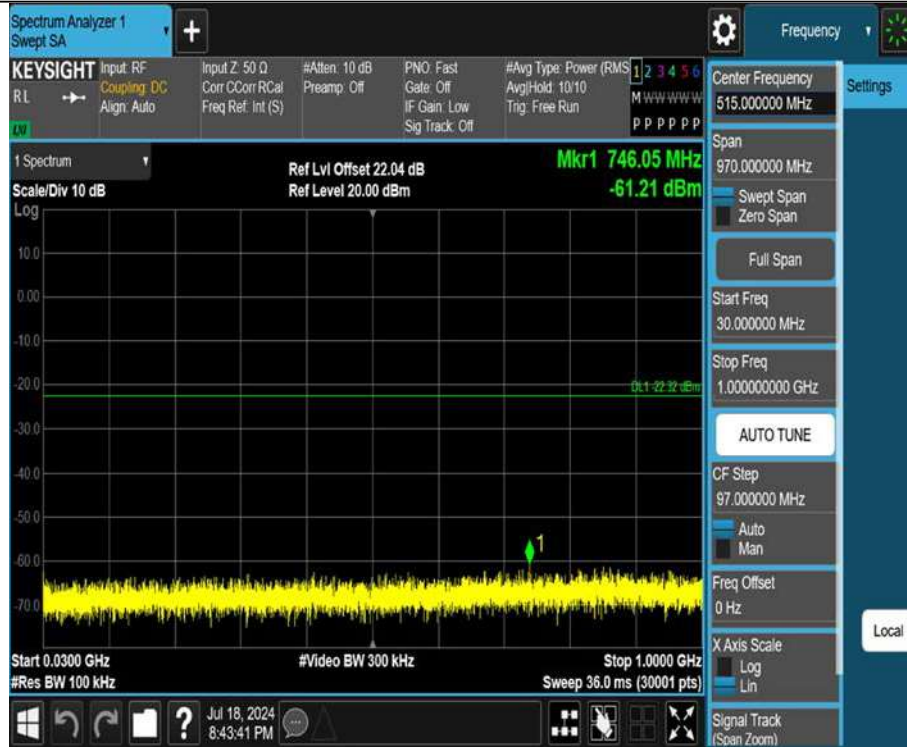


11AX40SISO_Ant1_2422_1000~26500



11AX40SISO_Ant1_2437_0~Reference



11AX40SISO_Ant1_2437_30~1000

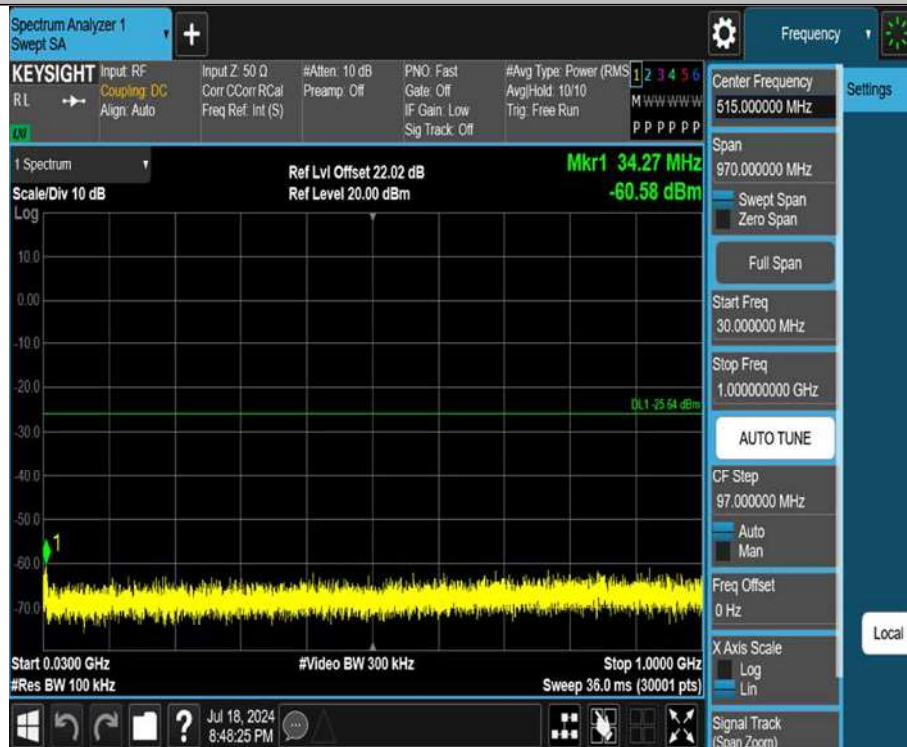

11AX40SISO_Ant1_2437_1000~26500



11AX40SISO_Ant1_2452_0~Reference



11AX40SISO_Ant1_2452_30~1000



11AX40SISO_Ant1_2452_1000~26500




Band edge

11B_Ant1_Low_2412



11B_Ant1_High_2462

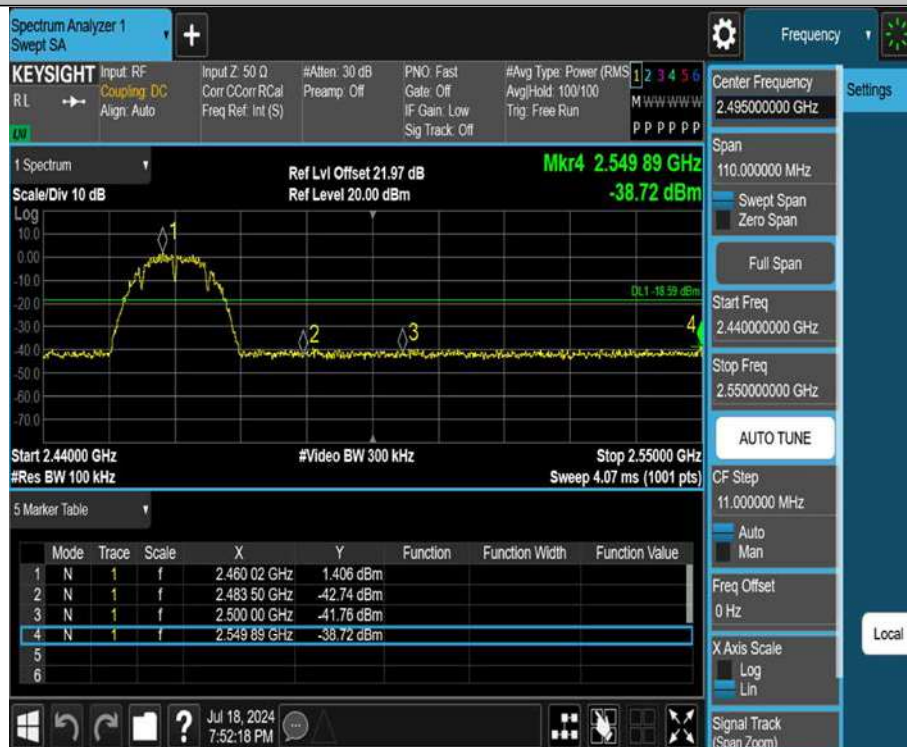

11G_Ant1_Low_2412



11G_Ant1_High_2462



11N20ISO_Ant1_Low_2412



11N20ISO_Ant1_High_2462



11N40ISO_Ant1_Low_2422



11N40ISO_Ant1_High_2452



11AX20SISO_Ant1_Low_2412



11AX20SISO_Ant1_High_2462



11AX40SISO_Ant1_Low_2422



11AX40SISO_Ant1_High_2452



3.4 6dB Bandwidth

3.4.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

3.4.2 Test Procedure

Test Method	
☒ Conducted Measurement	☐ Radiated Measurement
Test Channels	
☒ Lowest, Middle and Highest Channel	☐ Lowest and Highest Channel
Environmental conditions	
☒ Normal	☐ Normal and Extreme
Note: ☒ : Test ☐ : No Test	

a) The EUT was connected to the tonscond test system, and the spectrum analyser is set as follow:


Centre Frequency	The centre frequency of the channel under test
RBW	100kHz
VBW	300kHz
Frequency span	2x Nominal Channel Bandwidth
Detector Mode	Peak
Trace Mode	Max Hold
Sweep Time	Auto Couple

b) Wait for the trace to stabilize then find the peak value of the trace and place the analyser marker on this peak.

c) Use the -6dB bandwidth function of the spectrum analyser to measure the 6dB Bandwidth of the EUT. This value shall be recorded.

d) Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

3.4.3 Test Setup

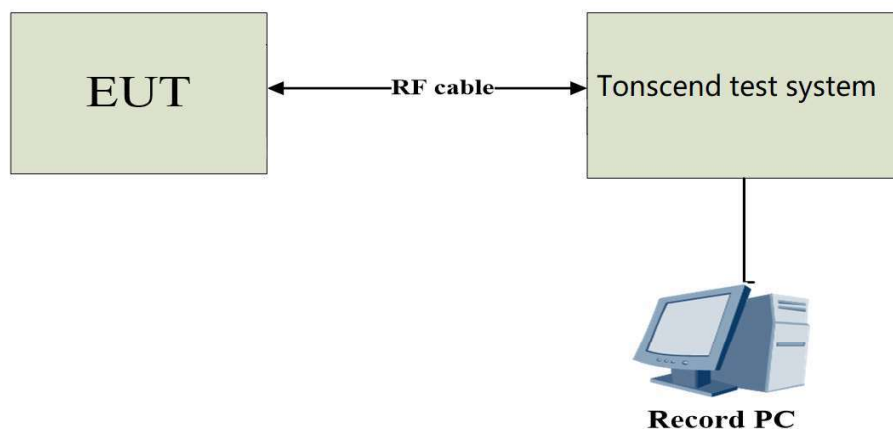

3.4.4 Test Result

DTS Bandwidth

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.080	2406.920	2418.000	0.5	PASS
		2437	11.080	2431.920	2443.000	0.5	PASS
		2462	10.120	2456.920	2467.040	0.5	PASS
11G	Ant1	2412	16.280	2403.840	2420.120	0.5	PASS
		2437	16.360	2428.800	2445.160	0.5	PASS
		2462	16.320	2453.840	2470.160	0.5	PASS
11N20SISO	Ant1	2412	16.400	2403.640	2420.040	0.5	PASS
		2437	16.720	2428.760	2445.480	0.5	PASS
		2462	17.520	2453.240	2470.760	0.5	PASS
11N40SISO	Ant1	2422	35.760	2404.000	2439.760	0.5	PASS
		2437	35.840	2418.920	2454.760	0.5	PASS
		2452	36.160	2433.920	2470.080	0.5	PASS
11AX20SISO	Ant1	2412	18.960	2402.520	2421.480	0.5	PASS
		2437	17.960	2428.160	2446.120	0.5	PASS
		2462	18.000	2452.600	2470.600	0.5	PASS
11AX40SISO	Ant1	2422	37.920	2403.120	2441.040	0.5	PASS
		2437	37.200	2418.840	2456.040	0.5	PASS
		2452	35.920	2434.720	2470.640	0.5	PASS

11B_Ant1_2412



11B_Ant1_2437

