


FCC SAR TEST REPORT

FCC ID : 2AVDZEM75
Equipment : Radio Module
Brand Name : LiveU
Model Name : EM7545
Applicant : LiveU, Inc
2 University Plaza Drive Suite 505, Hackensack, New Jersey
Manufacturer : LiveU Ltd.
5 Hagavish St, Kfar Saba 4442211, Israel
Standard : FCC 47 CFR Part 2 (2.1093)

The product was installed into Live Video Transmission System (Brand Name: LiveU, Model Name: LU800) during test.

The product was received on Mar. 11, 2022 and testing was started from Mar. 17, 2022 and completed on May. 02, 2022. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan



Table of Contents

1. Statement of Compliance	4
2. Guidance Applied.....	4
3. Equipment Under Test (EUT) Information.....	5
3.1 General Information	5
3.2 General LTE SAR Test and Reporting Considerations	7
4. RF Exposure Limits.....	9
4.1 Uncontrolled Environment.....	9
4.2 Controlled Environment.....	9
5. Specific Absorption Rate (SAR).....	10
5.1 Introduction	10
5.2 SAR Definition.....	10
6. System Description and Setup	11
6.1 Test Site Location.....	11
6.2 E-Field Probe	12
6.3 Data Acquisition Electronics (DAE)	12
6.4 Phantom.....	13
6.5 Device Holder.....	14
7. Measurement Procedures	15
7.1 Spatial Peak SAR Evaluation.....	15
7.2 Power Reference Measurement.....	16
7.3 Area Scan	16
7.4 Zoom Scan.....	17
7.5 Volume Scan Procedures.....	17
7.6 Power Drift Monitoring.....	17
8. Test Equipment List.....	18
9. System Verification.....	19
9.1 Tissue Verification	19
9.2 System Performance Check Results.....	20
10. UMTS/LTE Output Power (Unit: dBm)	21
11. SAR Test Results	85
11.1 Body SAR.....	86
12. Simultaneous Transmission Analysis	90
12.1 Body Exposure Conditions	90
13. Uncertainty Assessment	91
14. References.....	91
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



History of this test report

Report No.	Version	Description	Issued Date
FA220103002	01	Initial issue of report	Jul. 26, 2022

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for LiveU, Inc, Radio Module, EM7545, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary	Highest Simultaneous Transmission 1g SAR (W/kg)
			Body (Separation 0mm)	
			1g SAR (W/kg)	
Licensed	WCDMA	WCDMA II	0.06	0.66
		WCDMA IV	0.06	
		WCDMA V	0.03	
	LTE	LTE Band 2	0.07	
		LTE Band 7	0.13	
		LTE Band 12	0.03	
		LTE Band 13	0.02	
		LTE Band 5 / 26	0.03	
		LTE Band 41	0.08	
		LTE Band 4 / 66	0.05	
		Date of Testing:		

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation and the FCC designation No. TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Paula Chen

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



3. Equipment Under Test (EUT) Information

3.1 General Information

Product Feature & Specification	
Equipment Name	Radio Module
Brand Name	LiveU
Model Name	EM7545
FCC ID	2AVDZEM75
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM
Remark: 1. The device will integrated into below host and the host support four identical WWAN modules, these WWAN module will transmit simultaneous at the same time. 2. The host is a live broadcast product and the manufacturer provides a special backpack that the user can carry on their back, RF exposure evaluation is attach the backpack to be tested. 3. The other transmitter operation list below are also integrated into the same host, the Sim-Tx analysis was evaluation include this report section 12. 4. The two RILE910CXNF WWAN modules are integrated into this host. The WWAN SAR result referenced from Sporton SAR report, report No.:220103003 (FCC ID: 2AVDZTC4N) and the SAR results are used to perform simultaneous transmission analysis. 5. The two TLZ-CM389F WLAN/BT modules are integrated into this host. The WLAN 2.4GHz/5GHz maximum output power referenced from Sporton SAR report, report No.:210401 (FCC ID: 2AVDZCM27) and the SAR results are used to perform simultaneous transmission analysis.	



Host Information	
Equipment Name	Live Video Transmission System
Brand Name	LiveU
Model Name	LU800
Integrated WWAN Module	Brand Name: LiveU Model Name: RILE910CXNF FCC ID: 2AVDZTC4N
Integrated WLAN Module	Brand Name: LiveU Model Name: TLZ-CM389F FCC ID: 2AVDZCM27
Wireless Technology and Frequency Range	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz WLAN 2.4 GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2 GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3 GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6 GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8 GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM WLAN: 802.11a/b/g/n/ac/ax HT20/HT40/VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
EUT Stage	Production Unit

3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05												
FCC ID				2AVDZEM75								
Equipment Name				Radio Module								
Operating Frequency Range of each LTE transmission band				LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz								
Channel Bandwidth				LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz								
uplink modulations used				QPSK / 16QAM								
LTE Voice / Data requirements				Data only								
LTE MPR permanently built-in by design				Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3								
				Modulation		Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
						1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
				QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	
				16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	
				16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	
				64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	
				64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	
256 QAM		≥ 1						≤ 5				
LTE A-MPR				In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)								
Spectrum plots for RB configuration				A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.								
LTE Carrier Aggregation Additional Information				This device supports maximum of 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.								
Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745

LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									
LTE Band 26												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5		
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5		
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5		
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5. Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

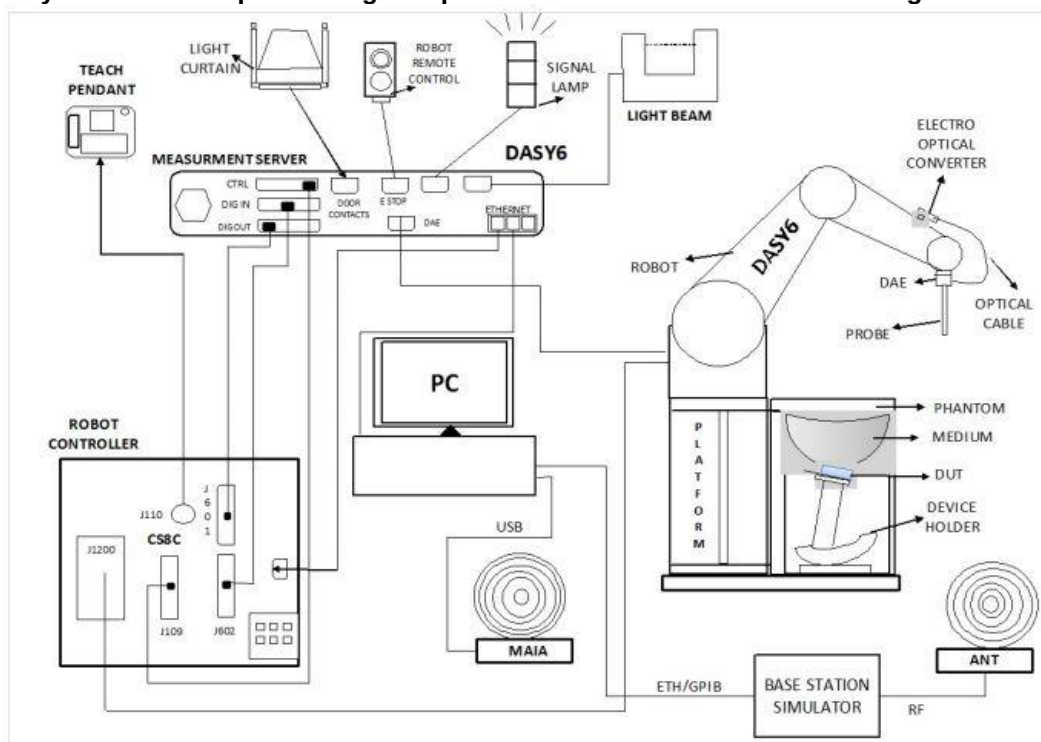

- The DASY system in SAR Configuration is shown above
- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running windows software and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6.1 Test Site Location

The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 3786) and the FCC designation No. TW1190 and TW3786 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	EMC & Wireless Communications Laboratory		Wensan Laboratory		
	TW1190		TW3786		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan		No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan		
Test Site No.	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY	SAR15-HY
	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY	
	SAR06-HY	SAR10-HY	SAR13-HY	SAR14-HY	

6.2 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<ES3DV3 Probe>

Construction	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – 4 GHz; Linearity: ± 0.2 dB (30 MHz – 4 GHz)	
Directivity	± 0.2 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g – >100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

6.3 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

6.4 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

6.5 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

7. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

7.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

7.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

7.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

7.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

7.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1012	Aug. 18, 2021	Aug. 17, 2022
SPEAG	835MHz System Validation Kit	D835V2	499	Aug. 18, 2021	Aug. 17, 2022
SPEAG	835MHz System Validation Kit ⁽²⁾	D835V2	4d167	Nov. 25, 2019	Nov. 22, 2022
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 25, 2021	Nov. 24, 2022
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Aug. 19, 2021	Aug. 18, 2022
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 17, 2021	Aug. 16, 2022
SPEAG	Data Acquisition Electronics	DAE4	1696	Nov. 03, 2021	Nov. 02, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 26, 2021	Jul. 25, 2022
SPEAG	Dosimetric E-Field Probe	EX3DV4	7694	Jan. 24, 2022	Jan. 23, 2023
RCPTWN	Thermometer	HTC-1	TM560-2	Oct. 28, 2021	Oct. 27, 2022
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 21, 2021	Oct. 20, 2022
Keysight	Wireless Communication Test Set	E5515C	MY50266977	May. 12, 2021	May. 11, 2022
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Oct. 24, 2021	Oct. 23, 2022
Keysight	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2021	Sep. 18, 2022
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 24, 2021	Sep. 23, 2022
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Oct. 26, 2021	Oct. 25, 2022
Anritsu	Power Meter	ML2495A	1419002	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2021	Aug. 17, 2022
Anritsu	Power Meter	ML2495A	1804003	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Power Sensor	MA2411B	1726150	Oct. 09, 2021	Oct. 08, 2022
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Jan. 12, 2022	Jan. 11, 2023
Agilent	Spectrum Analyzer	E4408B	MY44211028	Aug. 19, 2021	Aug. 18, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 12, 2021	Oct. 11, 2022
Mini-Circuits	Power Amplifier	ZVE-8G+	479102029	Sep. 06, 2021	Sep. 05, 2022
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Warison	Directional Coupler	WCOU-10-50S-10	WR889BMC4B1	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Verification

9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing.

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	22.5	0.899	41.865	0.89	41.90	1.01	-0.08	± 5	2022/3/17
750	22.2	0.882	43.039	0.89	41.90	-0.90	2.72	± 5	2022/3/18
750	22.4	0.893	42.757	0.89	41.90	0.34	2.05	± 5	2022/3/21
750	22.7	0.878	41.066	0.89	41.90	-1.35	-1.99	± 5	2022/3/22
835	22.5	0.916	43.143	0.90	41.50	1.78	3.96	± 5	2022/3/17
835	22.2	0.915	42.743	0.90	41.50	1.67	3.00	± 5	2022/3/18
835	22.4	0.927	42.460	0.90	41.50	3.00	2.31	± 5	2022/3/21
835	22.7	0.911	40.769	0.90	41.50	1.22	-1.76	± 5	2022/3/22
1750	22.5	1.336	39.001	1.37	40.10	-2.48	-2.74	± 5	2022/3/17
1750	22.2	1.368	40.343	1.37	40.10	-0.15	0.61	± 5	2022/3/18
1750	22.4	1.365	40.318	1.37	40.10	-0.36	0.54	± 5	2022/3/21
1750	22.7	1.355	40.406	1.37	40.10	-1.09	0.76	± 5	2022/3/22
1900	22.5	1.418	39.433	1.40	40.00	1.29	-1.42	± 5	2022/3/17
1900	22.2	1.445	38.795	1.40	40.00	3.21	-3.01	± 5	2022/3/18
1900	22.4	1.441	38.770	1.40	40.00	2.93	-3.07	± 5	2022/3/21
1900	22.7	1.430	38.858	1.40	40.00	2.14	-2.86	± 5	2022/3/22
2600	22.5	1.959	38.621	1.96	39.00	-0.05	-0.97	± 5	2022/3/17
2600	22.2	1.982	38.778	1.96	39.00	1.12	-0.57	± 5	2022/3/18
2600	22.4	1.958	38.611	1.96	39.00	-0.10	-1.00	± 5	2022/3/21
2600	22.7	2.012	39.224	1.96	39.00	2.65	0.57	± 5	2022/3/22
2600	22.8	1.956	37.588	1.96	39.00	-0.20	-3.62	± 5	2022/5/2

9.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Test Site	Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Power Drift (dB)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
SAR14	2022/3/17	750	250	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	2.210	8.56	8.84	3.27
SAR14	2022/3/18	750	250	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn1696	0.03	2.150	8.56	8.6	0.47
SAR14	2022/3/21	750	50	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn1696	-0.08	0.389	8.56	7.78	-9.11
SAR14	2022/3/22	750	250	D750V3-1012	EX3DV4 - SN7306	DAE4 Sn1696	-0.03	2.030	8.56	8.12	-5.14
SAR14	2022/3/17	835	250	D835V2-499	EX3DV4 - SN7306	DAE4 Sn1696	-0.07	2.380	9.68	9.52	-1.65
SAR14	2022/3/18	835	50	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1696	0	0.460	9.55	9.2	-3.66
SAR14	2022/3/21	835	250	D835V2-499	EX3DV4 - SN7306	DAE4 Sn1696	0.05	2.480	9.68	9.92	2.48
SAR14	2022/3/22	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1696	-0.03	2.560	9.55	10.24	7.23
SAR14	2022/3/17	1750	50	D1750V2-1068	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	1.760	36.60	35.2	-3.83
SAR14	2022/3/18	1750	50	D1750V2-1068	EX3DV4 - SN7306	DAE4 Sn1696	-0.07	1.800	36.60	36	-1.64
SAR14	2022/3/21	1750	50	D1750V2-1068	EX3DV4 - SN7306	DAE4 Sn1696	-0.19	1.800	36.60	36	-1.64
SAR14	2022/3/22	1750	50	D1750V2-1068	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	1.770	36.60	35.4	-3.28
SAR14	2022/3/17	1900	250	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1696	-0.14	10.400	40.60	41.6	2.46
SAR14	2022/3/18	1900	50	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	2.020	40.60	40.4	-0.49
SAR14	2022/3/21	1900	50	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	2.020	40.60	40.4	-0.49
SAR14	2022/3/22	1900	50	D1900V2-5d041	EX3DV4 - SN7306	DAE4 Sn1696	-0.09	2.000	40.60	40	-1.48
SAR14	2022/3/17	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1696	-0.08	14.000	58.00	56	-3.45
SAR14	2022/3/18	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1696	-0.14	13.100	58.00	52.4	-9.66
SAR14	2022/3/21	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1696	-0.04	14.400	58.00	57.6	-0.69
SAR14	2022/3/22	2600	250	D2600V2-1008	EX3DV4 - SN7306	DAE4 Sn1696	-0.14	13.300	58.00	53.2	-8.28
SAR14	2022/5/2	2600	250	D2600V2-1008	EX3DV4 - SN7694	DAE4 Sn1696	0.18	13.700	58.00	54.8	-5.52

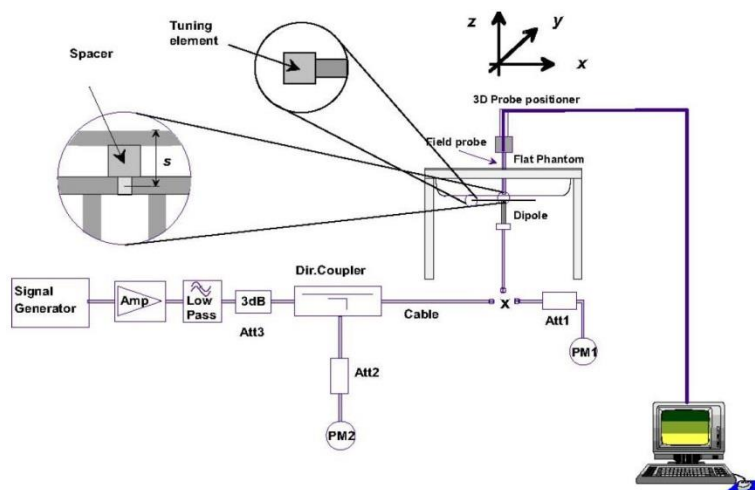


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

10. UMTS/LTE Output Power (Unit: dBm)

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_d/\beta_c = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

Sierra 5

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.83	23.63	24.06	24.50	22.67	22.84	22.80	24.00	22.56	22.67	22.70	24.00
3GPP Rel 6	HSDPA Subtest-1	22.97	22.81	23.12	23.50	22.94	22.75	23.03	23.50	22.46	22.39	22.38	23.00
3GPP Rel 6	HSDPA Subtest-2	22.75	22.84	23.04	23.50	22.76	22.78	22.85	23.50	22.49	22.46	22.44	23.00
3GPP Rel 6	HSDPA Subtest-3	22.28	22.41	22.39	23.00	22.21	22.39	22.44	23.00	21.99	22.15	21.85	22.50
3GPP Rel 6	HSDPA Subtest-4	22.55	22.34	22.52	23.00	22.26	22.37	22.39	23.00	21.96	21.81	21.94	22.50
3GPP Rel 6	HSUPA Subtest-1	22.82	23.07	22.85	23.50	22.89	22.87	22.90	23.50	22.48	22.79	22.59	23.00
3GPP Rel 6	HSUPA Subtest-2	21.01	20.65	21.08	21.50	21.05	21.04	20.64	21.50	20.60	20.62	20.66	21.00
3GPP Rel 6	HSUPA Subtest-3	21.85	22.05	21.88	22.50	21.69	21.89	22.04	22.50	21.45	21.59	21.28	22.00
3GPP Rel 6	HSUPA Subtest-4	20.73	20.79	20.86	21.50	20.80	21.02	21.06	21.50	20.47	20.50	20.41	21.00
3GPP Rel 6	HSUPA Subtest-5	22.64	22.61	22.64	23.50	22.35	22.98	22.74	23.50	22.56	22.58	22.16	23.00

Sierra 6

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.76	23.90	24.05	24.50	22.96	23.07	23.05	24.00	22.68	22.62	22.67	24.00
3GPP Rel 6	HSDPA Subtest-1	23.00	23.04	23.10	23.50	22.93	23.05	23.05	23.50	22.66	22.68	22.63	23.00
3GPP Rel 6	HSDPA Subtest-2	22.99	23.08	23.07	23.50	22.91	22.99	23.00	23.50	22.71	22.68	22.67	23.00
3GPP Rel 6	HSDPA Subtest-3	22.52	22.55	22.61	23.00	22.45	22.54	22.52	23.00	22.15	22.13	22.15	22.50
3GPP Rel 6	HSDPA Subtest-4	22.54	22.57	22.54	23.00	22.38	22.52	22.50	23.00	22.21	22.07	22.16	22.50
3GPP Rel 6	HSUPA Subtest-1	22.97	23.06	23.02	23.50	22.89	23.11	22.93	23.50	22.66	22.78	22.56	23.00
3GPP Rel 6	HSUPA Subtest-2	20.92	20.89	21.02	21.50	21.03	21.15	20.94	21.50	20.67	20.70	20.56	21.00
3GPP Rel 6	HSUPA Subtest-3	21.98	22.02	21.95	22.50	21.86	22.04	21.96	22.50	21.67	21.59	21.53	22.00
3GPP Rel 6	HSUPA Subtest-4	20.98	20.97	21.08	21.50	20.94	21.02	21.06	21.50	20.77	20.63	20.62	21.00
3GPP Rel 6	HSUPA Subtest-5	22.80	22.90	22.90	23.50	22.60	23.00	22.90	23.50	22.50	22.50	22.40	23.00



Sierra 7

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.71	23.69	23.93	24.50	22.85	23.07	23.00	24.00	22.44	22.37	22.74	24.00
3GPP Rel 6	HSDPA Subtest-1	22.87	23.14	22.98	23.50	22.88	23.09	23.12	23.50	22.72	22.68	22.64	23.00
3GPP Rel 6	HSDPA Subtest-2	23.03	22.92	22.81	23.50	22.69	22.69	23.02	23.50	22.45	22.69	22.62	23.00
3GPP Rel 6	HSDPA Subtest-3	22.41	22.30	22.39	23.00	22.54	22.58	22.61	23.00	22.06	22.07	22.07	22.50
3GPP Rel 6	HSDPA Subtest-4	22.33	22.64	22.56	23.00	22.25	22.38	22.22	23.00	22.19	21.84	22.07	22.50
3GPP Rel 6	HSUPA Subtest-1	22.92	22.80	22.75	23.50	22.88	23.19	23.00	23.50	22.66	22.52	22.36	23.00
3GPP Rel 6	HSUPA Subtest-2	20.95	20.68	20.88	21.50	21.11	20.91	21.03	21.50	20.68	20.68	20.49	21.00
3GPP Rel 6	HSUPA Subtest-3	21.74	21.97	21.97	22.50	21.83	21.76	21.74	22.50	21.46	21.33	21.40	22.00
3GPP Rel 6	HSUPA Subtest-4	20.87	21.03	20.91	21.50	20.90	21.01	20.86	21.50	20.57	20.54	20.47	21.00
3GPP Rel 6	HSUPA Subtest-5	22.75	22.96	22.69	23.50	22.41	22.77	22.71	23.50	22.20	22.56	22.30	23.00

Sierra 8

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	23.57	23.93	23.92	24.50	22.78	22.91	23.02	24.00	22.53	22.56	22.51	24.00
3GPP Rel 6	HSDPA Subtest-1	23.01	23.09	23.15	23.50	22.97	22.98	23.06	23.50	22.74	22.55	22.62	23.00
3GPP Rel 6	HSDPA Subtest-2	22.87	22.95	23.03	23.50	22.96	22.85	23.06	23.50	22.53	22.66	22.60	23.00
3GPP Rel 6	HSDPA Subtest-3	22.56	22.37	22.61	23.00	22.39	22.48	22.34	23.00	22.24	22.17	21.97	22.50
3GPP Rel 6	HSDPA Subtest-4	22.39	22.47	22.62	23.00	22.30	22.60	22.53	23.00	22.12	22.01	22.11	22.50
3GPP Rel 6	HSUPA Subtest-1	22.93	23.11	23.05	23.50	22.99	23.15	23.02	23.50	22.71	22.75	22.65	23.00
3GPP Rel 6	HSUPA Subtest-2	20.90	20.75	20.99	21.50	20.87	21.16	20.98	21.50	20.74	20.53	20.61	21.00
3GPP Rel 6	HSUPA Subtest-3	21.81	22.03	21.89	22.50	21.72	21.96	21.83	22.50	21.62	21.66	21.44	22.00
3GPP Rel 6	HSUPA Subtest-4	21.03	20.81	21.11	21.50	20.94	21.03	21.12	21.50	20.82	20.46	20.48	21.00
3GPP Rel 6	HSUPA Subtest-5	22.74	22.95	22.93	23.50	22.60	22.81	22.80	23.50	22.53	22.53	22.33	23.00

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4/5 SAR test was covered by Band 66/26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.59	22.64	23.21	24
20	QPSK	1	49	22.77	22.80	23.00	
20	QPSK	1	99	22.66	22.87	22.70	
20	QPSK	50	0	21.80	21.95	22.28	23
20	QPSK	50	24	21.79	21.63	22.18	
20	QPSK	50	50	21.68	21.94	21.88	
20	QPSK	100	0	21.64	21.56	21.91	
20	16QAM	1	0	21.95	22.22	22.35	23
20	16QAM	1	49	21.79	21.83	22.27	
20	16QAM	1	99	21.95	21.90	22.28	
20	16QAM	50	0	20.61	20.67	21.28	22
20	16QAM	50	24	20.78	20.69	20.88	
20	16QAM	50	50	20.68	20.80	20.84	
20	16QAM	100	0	20.56	20.76	21.19	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.77	22.99	22.94	24
15	QPSK	1	37	22.51	22.52	22.89	
15	QPSK	1	74	22.77	22.94	23.08	
15	QPSK	36	0	21.54	21.60	22.00	23
15	QPSK	36	20	21.76	21.69	21.94	
15	QPSK	36	39	21.34	21.80	22.04	
15	QPSK	75	0	21.45	21.80	22.04	
15	16QAM	1	0	21.94	22.23	22.55	23
15	16QAM	1	37	22.03	22.03	22.14	
15	16QAM	1	74	22.04	22.24	22.17	
15	16QAM	36	0	20.73	20.73	21.19	22
15	16QAM	36	20	20.79	20.62	21.00	
15	16QAM	36	39	20.67	20.63	21.05	
15	16QAM	75	0	20.72	20.72	20.92	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.54	22.78	23.31	24
10	QPSK	1	25	22.54	22.64	22.95	
10	QPSK	1	49	22.54	22.91	22.75	
10	QPSK	25	0	21.71	21.93	21.82	23
10	QPSK	25	12	21.50	21.56	21.89	
10	QPSK	25	25	21.67	21.93	21.92	
10	QPSK	50	0	21.77	21.56	22.04	
10	16QAM	1	0	21.77	22.19	22.37	23
10	16QAM	1	25	21.76	21.84	22.03	
10	16QAM	1	49	21.98	22.04	21.95	
10	16QAM	25	0	20.59	20.74	21.00	22
10	16QAM	25	12	20.57	20.92	20.81	
10	16QAM	25	25	20.71	20.77	21.01	
10	16QAM	50	0	20.62	20.89	21.01	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.69	22.76	22.91	24
5	QPSK	1	12	22.47	22.67	22.94	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	1	24	22.67	22.87	22.62	
5	QPSK	12	0	21.46	21.60	22.00	23
5	QPSK	12	7	21.69	21.63	21.75	
5	QPSK	12	13	21.73	21.70	21.72	
5	QPSK	25	0	21.68	21.80	21.97	
5	16QAM	1	0	22.04	22.17	22.33	23
5	16QAM	1	12	21.82	21.86	22.08	
5	16QAM	1	24	21.71	21.90	22.06	
5	16QAM	12	0	20.77	20.72	20.66	22
5	16QAM	12	7	20.53	20.62	20.93	
5	16QAM	12	13	20.67	20.75	20.94	
5	16QAM	25	0	20.56	20.70	20.81	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.46	22.77	22.85	24
3	QPSK	1	8	22.70	22.58	22.59	
3	QPSK	1	14	22.53	22.61	22.66	
3	QPSK	8	0	21.78	21.62	21.70	23
3	QPSK	8	4	21.43	21.82	21.97	
3	QPSK	8	7	21.71	21.60	21.69	
3	QPSK	15	0	21.66	21.79	21.70	
3	16QAM	1	0	21.95	21.95	22.16	23
3	16QAM	1	8	21.73	22.07	22.23	
3	16QAM	1	14	21.73	22.08	22.18	
3	16QAM	8	0	20.85	20.66	20.84	22
3	16QAM	8	4	20.47	20.73	20.97	
3	16QAM	8	7	20.46	20.52	20.70	
3	16QAM	15	0	20.50	20.67	20.96	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.35	22.71	22.54	24
1.4	QPSK	1	3	22.52	22.55	22.58	
1.4	QPSK	1	5	22.32	22.55	22.52	
1.4	QPSK	3	0	22.36	22.56	22.71	
1.4	QPSK	3	1	22.33	22.70	22.74	
1.4	QPSK	3	3	22.33	22.75	22.70	
1.4	QPSK	6	0	21.49	21.56	21.75	23
1.4	16QAM	1	0	21.50	21.83	21.93	23
1.4	16QAM	1	3	21.70	21.97	22.08	
1.4	16QAM	1	5	21.77	21.96	22.04	
1.4	16QAM	3	0	21.47	21.46	21.78	
1.4	16QAM	3	1	21.52	21.63	21.68	
1.4	16QAM	3	3	21.28	21.51	21.79	
1.4	16QAM	6	0	20.29	20.64	21.00	22



Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.88	22.94	23.29	
20	QPSK	1	49	22.69	22.76	23.02	24
20	QPSK	1	99	22.65	22.77	22.98	
20	QPSK	50	0	21.81	21.91	22.24	
20	QPSK	50	24	21.74	21.86	22.11	23
20	QPSK	50	50	21.78	21.89	22.06	
20	QPSK	100	0	21.77	21.84	22.14	
20	16QAM	1	0	22.18	22.24	22.61	23
20	16QAM	1	49	22.01	22.08	22.32	
20	16QAM	1	99	21.94	22.09	22.26	
20	16QAM	50	0	20.85	20.95	21.24	22
20	16QAM	50	24	20.74	20.84	21.13	
20	16QAM	50	50	20.79	20.90	21.07	
20	16QAM	100	0	20.74	20.86	21.13	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.90	22.94	23.22	
15	QPSK	1	37	22.70	22.76	23.01	24
15	QPSK	1	74	22.74	22.89	23.00	
15	QPSK	36	0	21.80	21.89	22.15	
15	QPSK	36	20	21.73	21.82	22.10	23
15	QPSK	36	39	21.64	21.89	22.06	
15	QPSK	75	0	21.74	21.81	22.13	
15	16QAM	1	0	22.19	22.28	22.53	23
15	16QAM	1	37	22.01	22.11	22.33	
15	16QAM	1	74	22.04	22.19	22.28	
15	16QAM	36	0	20.82	20.89	21.15	22
15	16QAM	36	20	20.72	20.88	21.11	
15	16QAM	36	39	20.66	20.89	21.05	
15	16QAM	75	0	20.74	20.85	21.11	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.75	22.85	23.02	
10	QPSK	1	25	22.68	22.76	22.91	24
10	QPSK	1	49	22.62	22.83	22.86	
10	QPSK	25	0	21.72	21.85	22.00	
10	QPSK	25	12	21.70	21.81	21.97	23
10	QPSK	25	25	21.66	21.88	21.95	
10	QPSK	50	0	21.69	21.82	21.98	
10	16QAM	1	0	22.07	22.11	22.31	23
10	16QAM	1	25	21.97	22.09	22.19	
10	16QAM	1	49	21.90	22.12	22.14	
10	16QAM	25	0	20.77	20.86	21.00	22
10	16QAM	25	12	20.75	20.83	20.98	
10	16QAM	25	25	20.67	20.90	20.93	
10	16QAM	50	0	20.74	20.80	21.00	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.72	22.76	22.92	
5	QPSK	1	12	22.65	22.76	22.88	24
5	QPSK	1	24	22.61	22.82	22.85	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	21.69	21.79	21.93	23
5	QPSK	12	7	21.69	21.83	21.96	
5	QPSK	12	13	21.65	21.77	21.93	
5	QPSK	25	0	21.67	21.77	21.94	
5	16QAM	1	0	22.02	22.09	22.24	23
5	16QAM	1	12	21.96	22.07	22.17	
5	16QAM	1	24	21.95	22.16	22.15	
5	16QAM	12	0	20.73	20.83	20.95	22
5	16QAM	12	7	20.73	20.81	20.98	
5	16QAM	12	13	20.67	20.78	20.93	
5	16QAM	25	0	20.70	20.79	20.95	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.66	22.74	22.89	24
3	QPSK	1	8	22.64	22.71	22.84	
3	QPSK	1	14	22.60	22.71	22.84	
3	QPSK	8	0	21.68	21.76	21.92	23
3	QPSK	8	4	21.69	21.79	21.91	
3	QPSK	8	7	21.64	21.77	21.88	
3	QPSK	15	0	21.65	21.75	21.88	
3	16QAM	1	0	21.98	22.06	22.17	23
3	16QAM	1	8	21.98	22.04	22.15	
3	16QAM	1	14	21.94	22.01	22.10	
3	16QAM	8	0	20.75	20.84	20.99	22
3	16QAM	8	4	20.77	20.84	21.00	
3	16QAM	8	7	20.73	20.81	20.93	
3	16QAM	15	0	20.70	20.78	20.90	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.48	22.66	22.77	24
1.4	QPSK	1	3	22.53	22.71	22.84	
1.4	QPSK	1	5	22.45	22.64	22.75	
1.4	QPSK	3	0	22.52	22.69	22.82	
1.4	QPSK	3	1	22.55	22.73	22.87	
1.4	QPSK	3	3	22.50	22.69	22.81	
1.4	QPSK	6	0	21.50	21.67	21.83	23
1.4	16QAM	1	0	21.78	21.94	22.04	23
1.4	16QAM	1	3	21.84	22.02	22.12	
1.4	16QAM	1	5	21.75	21.95	22.04	
1.4	16QAM	3	0	21.54	21.73	21.85	
1.4	16QAM	3	1	21.59	21.77	21.87	
1.4	16QAM	3	3	21.53	21.71	21.82	
1.4	16QAM	6	0	20.56	20.75	20.91	22



Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.94	22.89	23.11	
20	QPSK	1	49	22.73	22.58	22.87	24
20	QPSK	1	99	22.63	22.64	22.89	
20	QPSK	50	0	21.68	21.94	22.17	
20	QPSK	50	24	21.79	21.72	22.06	23
20	QPSK	50	50	21.69	21.93	21.98	
20	QPSK	100	0	21.77	21.88	22.00	
20	16QAM	1	0	22.14	22.31	22.54	23
20	16QAM	1	49	21.97	21.96	22.13	
20	16QAM	1	99	21.77	22.18	22.27	
20	16QAM	50	0	20.83	20.93	21.28	22
20	16QAM	50	24	20.61	20.69	21.19	
20	16QAM	50	50	20.70	20.74	20.88	
20	16QAM	100	0	20.62	20.81	21.07	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.84	23.00	23.25	
15	QPSK	1	37	22.51	22.57	22.86	24
15	QPSK	1	74	22.76	22.93	22.93	
15	QPSK	36	0	21.61	21.79	22.14	
15	QPSK	36	20	21.73	21.72	22.07	23
15	QPSK	36	39	21.70	21.94	22.09	
15	QPSK	75	0	21.62	21.76	21.96	
15	16QAM	1	0	22.03	22.13	22.60	23
15	16QAM	1	37	21.87	22.12	22.38	
15	16QAM	1	74	21.98	22.00	22.27	
15	16QAM	36	0	20.71	20.82	21.08	22
15	16QAM	36	20	20.52	20.85	20.92	
15	16QAM	36	39	20.46	20.80	20.86	
15	16QAM	75	0	20.79	20.71	21.19	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.81	22.70	22.98	
10	QPSK	1	25	22.52	22.74	22.94	24
10	QPSK	1	49	22.68	22.70	22.88	
10	QPSK	25	0	21.82	21.93	21.85	
10	QPSK	25	12	21.65	21.65	22.02	23
10	QPSK	25	25	21.49	21.82	22.02	
10	QPSK	50	0	21.66	21.83	21.98	
10	16QAM	1	0	21.89	22.08	22.35	23
10	16QAM	1	25	21.81	22.13	22.12	
10	16QAM	1	49	21.72	22.16	22.24	
10	16QAM	25	0	20.64	20.74	20.80	22
10	16QAM	25	12	20.71	20.78	21.04	
10	16QAM	25	25	20.63	20.88	20.80	
10	16QAM	50	0	20.82	20.89	20.98	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.65	22.83	22.92	
5	QPSK	1	12	22.50	22.76	22.72	24
5	QPSK	1	24	22.63	22.63	22.72	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	21.60	21.78	21.86	23
5	QPSK	12	7	21.56	21.79	21.91	
5	QPSK	12	13	21.49	21.84	21.95	
5	QPSK	25	0	21.51	21.57	22.03	
5	16QAM	1	0	21.87	22.04	22.19	23
5	16QAM	1	12	21.85	22.14	22.07	
5	16QAM	1	24	21.99	22.12	22.16	
5	16QAM	12	0	20.60	20.72	20.80	22
5	16QAM	12	7	20.79	20.77	20.96	
5	16QAM	12	13	20.67	20.82	20.82	
5	16QAM	25	0	20.79	20.61	20.76	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.70	22.63	22.96	24
3	QPSK	1	8	22.50	22.58	22.80	
3	QPSK	1	14	22.49	22.55	22.65	
3	QPSK	8	0	21.60	21.68	21.88	23
3	QPSK	8	4	21.72	21.80	21.74	
3	QPSK	8	7	21.65	21.61	21.76	
3	QPSK	15	0	21.62	21.57	21.96	
3	16QAM	1	0	21.80	22.06	22.07	23
3	16QAM	1	8	21.84	22.03	22.01	
3	16QAM	1	14	21.83	21.97	22.15	
3	16QAM	8	0	20.82	20.83	21.04	22
3	16QAM	8	4	20.67	20.86	20.82	
3	16QAM	8	7	20.76	20.81	20.73	
3	16QAM	15	0	20.70	20.85	20.88	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.46	22.51	22.77	24
1.4	QPSK	1	3	22.60	22.72	22.88	
1.4	QPSK	1	5	22.51	22.66	22.68	
1.4	QPSK	3	0	22.39	22.65	22.77	
1.4	QPSK	3	1	22.53	22.70	22.76	
1.4	QPSK	3	3	22.37	22.60	22.90	
1.4	QPSK	6	0	21.47	21.64	21.91	23
1.4	16QAM	1	0	21.70	22.03	22.02	23
1.4	16QAM	1	3	21.91	21.94	22.11	
1.4	16QAM	1	5	21.83	21.96	22.10	
1.4	16QAM	3	0	21.64	21.81	21.73	
1.4	16QAM	3	1	21.54	21.58	21.84	
1.4	16QAM	3	3	21.50	21.62	21.77	
1.4	16QAM	6	0	20.48	20.62	20.95	22



Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	22.91	22.91	22.96	
20	QPSK	1	49	22.61	22.83	22.84	24
20	QPSK	1	99	22.59	22.78	22.90	
20	QPSK	50	0	21.88	21.73	22.13	
20	QPSK	50	24	21.58	21.83	22.16	23
20	QPSK	50	50	21.59	21.87	21.99	
20	QPSK	100	0	21.71	21.86	22.13	
20	16QAM	1	0	22.02	22.31	22.43	23
20	16QAM	1	49	21.95	22.18	22.41	
20	16QAM	1	99	21.81	22.06	22.21	
20	16QAM	50	0	20.66	20.95	21.12	22
20	16QAM	50	24	20.56	20.85	20.94	
20	16QAM	50	50	20.87	20.85	21.07	
20	16QAM	100	0	20.56	20.79	21.21	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	22.93	22.90	23.22	
15	QPSK	1	37	22.62	22.65	22.95	24
15	QPSK	1	74	22.70	22.84	22.93	
15	QPSK	36	0	21.86	21.75	21.98	
15	QPSK	36	20	21.60	21.85	21.92	23
15	QPSK	36	39	21.45	21.88	21.90	
15	QPSK	75	0	21.71	21.77	22.13	
15	16QAM	1	0	22.08	22.16	22.63	23
15	16QAM	1	37	21.98	21.91	22.25	
15	16QAM	1	74	21.88	22.02	22.16	
15	16QAM	36	0	20.64	20.69	21.14	22
15	16QAM	36	20	20.79	20.95	21.09	
15	16QAM	36	39	20.55	20.73	20.96	
15	16QAM	75	0	20.81	20.80	21.16	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	22.56	22.89	22.86	
10	QPSK	1	25	22.65	22.84	22.82	24
10	QPSK	1	49	22.61	22.88	22.85	
10	QPSK	25	0	21.64	21.84	22.04	
10	QPSK	25	12	21.62	21.80	21.92	23
10	QPSK	25	25	21.61	21.89	21.86	
10	QPSK	50	0	21.54	21.72	21.87	
10	16QAM	1	0	22.15	22.19	22.18	23
10	16QAM	1	25	22.01	22.18	22.24	
10	16QAM	1	49	21.90	21.92	22.09	
10	16QAM	25	0	20.82	20.68	21.08	22
10	16QAM	25	12	20.56	20.87	21.01	
10	16QAM	25	25	20.74	20.91	20.92	
10	16QAM	50	0	20.62	20.63	21.00	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	22.64	22.74	22.96	
5	QPSK	1	12	22.45	22.68	22.70	24
5	QPSK	1	24	22.64	22.81	22.83	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	21.73	21.88	21.93	23
5	QPSK	12	7	21.53	21.84	21.85	
5	QPSK	12	13	21.66	21.59	21.77	
5	QPSK	25	0	21.76	21.64	21.75	
5	16QAM	1	0	21.83	22.13	22.28	23
5	16QAM	1	12	21.87	21.99	22.14	
5	16QAM	1	24	21.78	22.22	22.07	
5	16QAM	12	0	20.57	20.81	20.85	22
5	16QAM	12	7	20.67	20.62	20.97	
5	16QAM	12	13	20.57	20.85	20.98	
5	16QAM	25	0	20.64	20.69	20.94	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	22.71	22.80	22.91	24
3	QPSK	1	8	22.52	22.80	22.73	
3	QPSK	1	14	22.68	22.75	22.91	
3	QPSK	8	0	21.66	21.75	21.96	23
3	QPSK	8	4	21.65	21.68	21.80	
3	QPSK	8	7	21.62	21.70	21.95	
3	QPSK	15	0	21.69	21.68	21.73	
3	16QAM	1	0	21.84	21.99	21.98	23
3	16QAM	1	8	21.95	22.14	21.96	
3	16QAM	1	14	21.85	22.04	21.99	
3	16QAM	8	0	20.78	20.79	20.97	22
3	16QAM	8	4	20.65	20.94	21.08	
3	16QAM	8	7	20.70	20.91	21.00	
3	16QAM	15	0	20.73	20.86	20.93	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	22.51	22.71	22.59	24
1.4	QPSK	1	3	22.37	22.76	22.72	
1.4	QPSK	1	5	22.52	22.57	22.63	
1.4	QPSK	3	0	22.48	22.52	22.69	
1.4	QPSK	3	1	22.56	22.75	22.69	
1.4	QPSK	3	3	22.34	22.78	22.83	
1.4	QPSK	6	0	21.60	21.53	21.78	23
1.4	16QAM	1	0	21.59	21.79	22.01	23
1.4	16QAM	1	3	21.93	22.08	22.05	
1.4	16QAM	1	5	21.81	21.94	22.07	
1.4	16QAM	3	0	21.58	21.75	21.79	
1.4	16QAM	3	1	21.41	21.63	21.85	
1.4	16QAM	3	3	21.58	21.74	21.76	
1.4	16QAM	6	0	20.45	20.73	20.82	22



<LTE Band 4>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.30	23.31	23.27	24
20	QPSK	1	49	22.93	23.04	22.94	
20	QPSK	1	99	23.04	23.13	22.85	
20	QPSK	50	0	22.06	22.26	22.30	23
20	QPSK	50	24	22.09	22.09	22.19	
20	QPSK	50	50	22.28	22.16	22.08	
20	QPSK	100	0	22.15	22.29	22.19	23
20	16QAM	1	0	22.42	22.49	22.68	
20	16QAM	1	49	22.30	22.44	22.31	
20	16QAM	1	99	22.41	22.44	22.39	22
20	16QAM	50	0	21.28	21.32	21.28	
20	16QAM	50	24	21.17	21.11	21.27	
20	16QAM	50	50	21.23	21.02	21.11	22
20	16QAM	100	0	21.12	21.30	21.15	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.35	23.25	23.38	24
15	QPSK	1	37	22.86	23.01	23.08	
15	QPSK	1	74	23.13	23.18	23.15	
15	QPSK	36	0	22.22	22.32	22.32	23
15	QPSK	36	20	22.04	22.17	22.01	
15	QPSK	36	39	22.27	22.15	22.14	
15	QPSK	75	0	22.00	22.16	22.16	23
15	16QAM	1	0	22.61	22.44	22.65	
15	16QAM	1	37	22.25	22.48	22.38	
15	16QAM	1	74	22.45	22.31	22.26	22
15	16QAM	36	0	21.17	21.22	21.09	
15	16QAM	36	20	21.19	21.19	21.21	
15	16QAM	36	39	21.12	21.01	20.99	22
15	16QAM	75	0	21.03	21.08	21.26	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.24	23.07	23.23	24
10	QPSK	1	25	23.05	22.94	23.19	
10	QPSK	1	49	23.12	23.14	23.10	
10	QPSK	25	0	22.03	22.29	22.14	23
10	QPSK	25	12	22.20	22.07	22.15	
10	QPSK	25	25	21.90	22.20	22.10	
10	QPSK	50	0	22.02	22.13	22.16	23
10	16QAM	1	0	22.57	22.34	22.55	
10	16QAM	1	25	22.20	22.24	22.35	
10	16QAM	1	49	22.48	22.44	22.29	22
10	16QAM	25	0	21.04	21.11	21.03	
10	16QAM	25	12	20.97	21.14	21.24	
10	16QAM	25	25	21.08	20.95	21.16	22
10	16QAM	50	0	21.14	21.21	21.14	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	22.99	23.17	23.23	24
5	QPSK	1	12	23.18	23.15	22.91	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	1	24	22.86	23.10	23.06	
5	QPSK	12	0	21.96	22.03	22.07	23
5	QPSK	12	7	22.15	22.00	22.15	
5	QPSK	12	13	22.11	22.01	22.16	
5	QPSK	25	0	21.96	21.97	22.00	
5	16QAM	1	0	22.44	22.41	22.41	23
5	16QAM	1	12	22.41	22.34	22.20	
5	16QAM	1	24	22.42	22.39	22.26	
5	16QAM	12	0	21.04	21.22	21.18	22
5	16QAM	12	7	21.04	21.08	21.14	
5	16QAM	12	13	20.94	21.02	21.13	
5	16QAM	25	0	21.18	21.11	21.17	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.01	22.95	22.94	24
3	QPSK	1	8	22.97	23.20	23.09	
3	QPSK	1	14	22.94	22.96	23.08	
3	QPSK	8	0	21.87	22.06	22.09	23
3	QPSK	8	4	22.04	22.20	22.05	
3	QPSK	8	7	21.83	22.10	21.95	
3	QPSK	15	0	21.98	21.94	22.11	
3	16QAM	1	0	22.35	22.35	22.22	23
3	16QAM	1	8	22.29	22.44	22.46	
3	16QAM	1	14	22.24	22.37	22.34	
3	16QAM	8	0	20.92	21.01	21.22	22
3	16QAM	8	4	21.20	21.07	20.99	
3	16QAM	8	7	21.12	21.02	20.99	
3	16QAM	15	0	21.05	20.97	21.12	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	22.97	23.12	22.93	24
1.4	QPSK	1	3	22.90	22.98	23.00	
1.4	QPSK	1	5	23.00	22.85	22.86	
1.4	QPSK	3	0	22.88	23.03	23.02	
1.4	QPSK	3	1	22.82	22.99	23.13	
1.4	QPSK	3	3	22.92	22.92	23.00	
1.4	QPSK	6	0	21.79	21.90	22.01	23
1.4	16QAM	1	0	22.23	22.27	22.36	23
1.4	16QAM	1	3	22.29	22.28	22.34	
1.4	16QAM	1	5	22.03	22.17	22.30	
1.4	16QAM	3	0	21.81	21.98	22.12	
1.4	16QAM	3	1	21.92	21.97	22.19	
1.4	16QAM	3	3	21.89	21.97	22.01	
1.4	16QAM	6	0	20.87	20.98	21.17	22



Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.29	23.34	23.35	
20	QPSK	1	49	23.13	23.12	23.11	24
20	QPSK	1	99	23.09	23.08	23.04	
20	QPSK	50	0	22.21	22.28	22.31	
20	QPSK	50	24	22.25	22.21	22.19	23
20	QPSK	50	50	22.19	22.14	22.13	
20	QPSK	100	0	22.25	22.23	22.24	
20	16QAM	1	0	22.60	22.61	22.65	23
20	16QAM	1	49	22.47	22.42	22.43	
20	16QAM	1	99	22.41	22.38	22.36	
20	16QAM	50	0	21.22	21.30	21.31	22
20	16QAM	50	24	21.25	21.23	21.20	
20	16QAM	50	50	21.16	21.16	21.13	
20	16QAM	100	0	21.23	21.21	21.24	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.28	23.31	23.33	
15	QPSK	1	37	23.03	23.08	23.11	24
15	QPSK	1	74	23.14	23.11	23.07	
15	QPSK	36	0	22.19	22.23	22.26	
15	QPSK	36	20	22.11	22.19	22.18	23
15	QPSK	36	39	22.17	22.12	22.14	
15	QPSK	75	0	22.11	22.19	22.19	
15	16QAM	1	0	22.59	22.61	22.64	23
15	16QAM	1	37	22.39	22.43	22.43	
15	16QAM	1	74	22.49	22.43	22.38	
15	16QAM	36	0	21.19	21.26	21.26	22
15	16QAM	36	20	21.13	21.23	21.23	
15	16QAM	36	39	21.16	21.16	21.13	
15	16QAM	75	0	21.14	21.22	21.18	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.19	23.23	23.22	
10	QPSK	1	25	23.07	23.12	23.11	24
10	QPSK	1	49	23.11	23.07	23.08	
10	QPSK	25	0	22.14	22.21	22.20	
10	QPSK	25	12	22.12	22.15	22.19	23
10	QPSK	25	25	22.06	22.12	22.11	
10	QPSK	50	0	22.12	22.15	22.16	
10	16QAM	1	0	22.49	22.52	22.52	23
10	16QAM	1	25	22.35	22.40	22.43	
10	16QAM	1	49	22.45	22.38	22.36	
10	16QAM	25	0	21.13	21.20	21.20	22
10	16QAM	25	12	21.14	21.21	21.19	
10	16QAM	25	25	21.06	21.13	21.12	
10	16QAM	50	0	21.13	21.19	21.21	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.15	23.16	23.14	
5	QPSK	1	12	23.09	23.10	23.08	24
5	QPSK	1	24	23.06	23.12	23.07	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.14	22.18	22.13	23
5	QPSK	12	7	22.14	22.19	22.17	
5	QPSK	12	13	22.08	22.11	22.13	
5	QPSK	25	0	22.10	22.16	22.14	
5	16QAM	1	0	22.49	22.48	22.46	23
5	16QAM	1	12	22.38	22.41	22.38	
5	16QAM	1	24	22.40	22.41	22.37	
5	16QAM	12	0	21.14	21.16	21.15	22
5	16QAM	12	7	21.12	21.18	21.16	
5	16QAM	12	13	21.11	21.15	21.11	
5	16QAM	25	0	21.10	21.18	21.11	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.00	23.12	23.09	24
3	QPSK	1	8	22.96	23.11	23.04	
3	QPSK	1	14	22.93	23.09	23.03	
3	QPSK	8	0	22.00	22.16	22.08	23
3	QPSK	8	4	22.05	22.15	22.12	
3	QPSK	8	7	21.97	22.10	22.10	
3	QPSK	15	0	21.98	22.10	22.12	
3	16QAM	1	0	22.34	22.41	22.38	23
3	16QAM	1	8	22.32	22.40	22.38	
3	16QAM	1	14	22.26	22.37	22.36	
3	16QAM	8	0	21.07	21.21	21.15	22
3	16QAM	8	4	21.10	21.19	21.16	
3	16QAM	8	7	21.05	21.17	21.13	
3	16QAM	15	0	21.01	21.13	21.10	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	22.92	23.03	23.01	24
1.4	QPSK	1	3	23.00	23.10	23.05	
1.4	QPSK	1	5	22.92	23.02	22.97	
1.4	QPSK	3	0	22.96	23.08	23.03	
1.4	QPSK	3	1	23.00	23.11	23.06	
1.4	QPSK	3	3	22.97	23.04	23.01	
1.4	QPSK	6	0	21.92	22.07	22.01	23
1.4	16QAM	1	0	22.21	22.31	22.30	23
1.4	16QAM	1	3	22.29	22.38	22.37	
1.4	16QAM	1	5	22.20	22.31	22.27	
1.4	16QAM	3	0	22.01	22.12	22.08	
1.4	16QAM	3	1	22.02	22.17	22.13	
1.4	16QAM	3	3	21.98	22.10	22.06	
1.4	16QAM	6	0	21.01	21.13	21.08	22



Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.37	23.41	23.18	
20	QPSK	1	49	23.09	23.09	23.12	24
20	QPSK	1	99	23.15	23.07	23.13	
20	QPSK	50	0	22.03	22.38	22.18	
20	QPSK	50	24	22.25	22.30	22.08	23
20	QPSK	50	50	22.09	22.20	22.16	
20	QPSK	100	0	22.13	22.06	22.16	
20	16QAM	1	0	22.60	22.51	22.68	23
20	16QAM	1	49	22.55	22.49	22.27	
20	16QAM	1	99	22.49	22.46	22.23	
20	16QAM	50	0	21.30	21.36	21.23	22
20	16QAM	50	24	21.33	21.25	21.22	
20	16QAM	50	50	21.21	21.06	21.10	
20	16QAM	100	0	21.30	21.08	21.21	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.24	23.17	23.40	
15	QPSK	1	37	23.11	23.18	23.17	24
15	QPSK	1	74	23.11	23.03	22.92	
15	QPSK	36	0	22.26	22.17	22.25	
15	QPSK	36	20	22.02	22.24	22.05	23
15	QPSK	36	39	22.01	22.17	22.12	
15	QPSK	75	0	22.00	22.20	22.12	
15	16QAM	1	0	22.41	22.67	22.46	23
15	16QAM	1	37	22.45	22.40	22.29	
15	16QAM	1	74	22.32	22.45	22.22	
15	16QAM	36	0	21.10	21.08	21.23	22
15	16QAM	36	20	21.12	21.09	21.29	
15	16QAM	36	39	21.14	21.00	20.96	
15	16QAM	75	0	21.13	21.18	21.24	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.04	23.07	23.08	
10	QPSK	1	25	23.03	22.94	23.01	24
10	QPSK	1	49	23.10	22.90	22.98	
10	QPSK	25	0	22.21	22.27	22.14	
10	QPSK	25	12	22.05	22.00	22.04	23
10	QPSK	25	25	22.08	21.99	21.97	
10	QPSK	50	0	22.20	22.23	22.24	
10	16QAM	1	0	22.29	22.41	22.57	23
10	16QAM	1	25	22.33	22.47	22.41	
10	16QAM	1	49	22.43	22.43	22.44	
10	16QAM	25	0	21.06	21.06	21.28	22
10	16QAM	25	12	21.17	21.26	21.23	
10	16QAM	25	25	21.05	21.14	21.22	
10	16QAM	50	0	21.18	21.14	21.15	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.03	23.09	23.15	
5	QPSK	1	12	23.12	23.18	22.97	24
5	QPSK	1	24	23.05	23.17	22.93	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.11	22.24	22.14	23
5	QPSK	12	7	22.08	22.02	22.13	
5	QPSK	12	13	21.93	22.01	22.16	
5	QPSK	25	0	22.04	22.11	22.00	
5	16QAM	1	0	22.42	22.46	22.28	23
5	16QAM	1	12	22.35	22.44	22.45	
5	16QAM	1	24	22.45	22.38	22.45	
5	16QAM	12	0	21.07	21.04	21.08	22
5	16QAM	12	7	20.92	21.19	21.13	
5	16QAM	12	13	21.16	21.12	21.14	
5	16QAM	25	0	21.10	21.18	21.08	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	22.87	22.94	23.02	24
3	QPSK	1	8	22.79	23.09	23.03	
3	QPSK	1	14	22.78	22.90	23.01	
3	QPSK	8	0	21.92	22.09	21.95	23
3	QPSK	8	4	21.96	22.02	22.11	
3	QPSK	8	7	21.99	22.08	22.00	
3	QPSK	15	0	22.08	21.92	22.17	
3	16QAM	1	0	22.42	22.30	22.31	23
3	16QAM	1	8	22.23	22.48	22.19	
3	16QAM	1	14	22.16	22.40	22.20	
3	16QAM	8	0	21.10	21.30	21.03	22
3	16QAM	8	4	21.08	21.17	21.01	
3	16QAM	8	7	21.07	21.05	21.00	
3	16QAM	15	0	20.89	21.04	21.09	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	23.01	23.01	23.11	24
1.4	QPSK	1	3	22.89	22.93	22.90	
1.4	QPSK	1	5	22.98	22.94	22.99	
1.4	QPSK	3	0	22.92	22.91	22.96	
1.4	QPSK	3	1	22.91	23.10	23.13	
1.4	QPSK	3	3	22.97	23.03	22.82	
1.4	QPSK	6	0	21.76	21.97	22.08	23
1.4	16QAM	1	0	22.04	22.29	22.25	23
1.4	16QAM	1	3	22.28	22.35	22.43	
1.4	16QAM	1	5	22.22	22.25	22.29	
1.4	16QAM	3	0	22.00	22.00	22.13	
1.4	16QAM	3	1	21.96	22.19	22.11	
1.4	16QAM	3	3	21.85	21.96	22.14	
1.4	16QAM	6	0	21.07	20.96	21.03	22



Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	23.38	23.35	23.24	
20	QPSK	1	49	23.09	23.21	23.18	24
20	QPSK	1	99	23.12	22.91	23.03	
20	QPSK	50	0	22.23	22.19	22.37	
20	QPSK	50	24	22.13	22.21	22.18	23
20	QPSK	50	50	22.19	22.14	22.19	
20	QPSK	100	0	22.24	22.07	22.29	
20	16QAM	1	0	22.49	22.61	22.50	23
20	16QAM	1	49	22.33	22.49	22.24	
20	16QAM	1	99	22.42	22.28	22.43	
20	16QAM	50	0	21.10	21.28	21.37	22
20	16QAM	50	24	21.27	21.30	21.28	
20	16QAM	50	50	21.00	21.09	21.05	
20	16QAM	100	0	21.23	21.21	21.17	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	23.26	23.29	23.26	
15	QPSK	1	37	23.02	23.16	23.16	24
15	QPSK	1	74	23.11	23.17	23.07	
15	QPSK	36	0	22.03	22.10	22.27	23
15	QPSK	36	20	22.06	22.05	22.06	
15	QPSK	36	39	21.98	22.01	22.22	
15	QPSK	75	0	22.18	22.28	22.12	
15	16QAM	1	0	22.67	22.44	22.52	23
15	16QAM	1	37	22.39	22.36	22.50	
15	16QAM	1	74	22.52	22.44	22.32	
15	16QAM	36	0	21.15	21.33	21.07	22
15	16QAM	36	20	21.14	21.19	21.08	
15	16QAM	36	39	21.24	21.07	21.12	
15	16QAM	75	0	21.03	21.29	21.22	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	23.10	23.28	23.09	
10	QPSK	1	25	23.07	22.98	23.18	24
10	QPSK	1	49	23.04	23.14	22.91	
10	QPSK	25	0	22.01	22.01	22.17	23
10	QPSK	25	12	22.21	22.12	22.04	
10	QPSK	25	25	22.05	22.03	22.01	
10	QPSK	50	0	22.17	22.13	22.21	
10	16QAM	1	0	22.50	22.52	22.47	23
10	16QAM	1	25	22.41	22.29	22.28	
10	16QAM	1	49	22.53	22.47	22.42	
10	16QAM	25	0	21.13	21.21	21.24	22
10	16QAM	25	12	20.95	21.25	21.12	
10	16QAM	25	25	21.00	21.12	21.21	
10	16QAM	50	0	21.12	21.03	21.23	
Channel				19975	20175	20375	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	23.03	23.26	22.96	
5	QPSK	1	12	23.14	23.08	23.00	24
5	QPSK	1	24	23.02	23.06	23.08	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.20	22.16	22.16	23
5	QPSK	12	7	22.00	22.20	22.15	
5	QPSK	12	13	21.95	22.09	22.19	
5	QPSK	25	0	22.16	22.14	22.04	
5	16QAM	1	0	22.49	22.32	22.50	23
5	16QAM	1	12	22.48	22.45	22.42	
5	16QAM	1	24	22.27	22.42	22.46	
5	16QAM	12	0	21.06	20.98	21.13	22
5	16QAM	12	7	21.14	21.17	21.02	
5	16QAM	12	13	21.13	20.97	21.08	
5	16QAM	25	0	21.14	21.05	21.02	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	23.09	23.16	23.06	24
3	QPSK	1	8	23.05	23.02	23.07	
3	QPSK	1	14	22.78	22.92	22.90	
3	QPSK	8	0	21.83	22.19	21.95	23
3	QPSK	8	4	21.95	22.12	21.96	
3	QPSK	8	7	21.82	22.02	22.01	
3	QPSK	15	0	21.90	22.19	22.03	
3	16QAM	1	0	22.28	22.27	22.38	23
3	16QAM	1	8	22.34	22.41	22.43	
3	16QAM	1	14	22.17	22.37	22.25	
3	16QAM	8	0	20.97	21.11	21.06	22
3	16QAM	8	4	21.08	21.09	21.19	
3	16QAM	8	7	21.00	21.22	21.09	
3	16QAM	15	0	20.99	21.09	20.92	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	22.94	22.93	22.89	24
1.4	QPSK	1	3	23.05	23.05	22.85	
1.4	QPSK	1	5	22.99	22.98	22.89	
1.4	QPSK	3	0	22.91	22.99	22.85	
1.4	QPSK	3	1	22.92	23.17	22.86	
1.4	QPSK	3	3	22.89	23.14	23.09	
1.4	QPSK	6	0	21.87	22.00	22.04	23
1.4	16QAM	1	0	22.27	22.27	22.38	23
1.4	16QAM	1	3	22.17	22.31	22.17	
1.4	16QAM	1	5	22.01	22.18	22.16	
1.4	16QAM	3	0	22.11	22.17	21.98	
1.4	16QAM	3	1	21.97	22.17	22.00	
1.4	16QAM	3	3	22.02	22.03	21.98	
1.4	16QAM	6	0	20.98	21.15	21.05	22



<LTE Band 5>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	22.65	22.65	22.60	24
10	QPSK	1	25	22.51	22.74	22.57	
10	QPSK	1	49	22.41	22.68	22.70	
10	QPSK	25	0	21.60	21.57	21.55	23
10	QPSK	25	12	21.76	21.76	21.80	
10	QPSK	25	25	21.66	21.70	21.90	
10	QPSK	50	0	21.71	21.69	21.67	23
10	16QAM	1	0	22.10	22.06	22.06	
10	16QAM	1	25	21.95	21.93	21.90	
10	16QAM	1	49	22.03	21.79	21.85	22
10	16QAM	25	0	20.83	20.82	20.55	
10	16QAM	25	12	20.85	20.57	20.72	
10	16QAM	25	25	20.75	20.71	20.64	22
10	16QAM	50	0	20.54	20.73	20.81	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.52	22.78	22.80	24
5	QPSK	1	12	22.68	22.76	22.64	
5	QPSK	1	24	22.63	22.67	22.56	
5	QPSK	12	0	21.74	21.78	21.72	23
5	QPSK	12	7	21.80	21.74	21.90	
5	QPSK	12	13	21.54	21.58	21.78	
5	QPSK	25	0	21.75	21.73	21.91	23
5	16QAM	1	0	21.93	22.01	21.99	
5	16QAM	1	12	21.85	21.86	22.09	
5	16QAM	1	24	21.91	21.84	22.00	22
5	16QAM	12	0	20.64	20.60	20.79	
5	16QAM	12	7	20.50	20.78	20.73	
5	16QAM	12	13	20.44	20.61	20.67	22
5	16QAM	25	0	20.65	20.61	20.66	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.67	22.52	22.67	24
3	QPSK	1	8	22.73	22.52	22.74	
3	QPSK	1	14	22.47	22.61	22.81	
3	QPSK	8	0	21.58	21.63	21.73	23
3	QPSK	8	4	21.57	21.68	21.80	
3	QPSK	8	7	21.67	21.70	21.77	
3	QPSK	15	0	21.73	21.55	21.75	23
3	16QAM	1	0	22.06	21.94	21.82	
3	16QAM	1	8	21.76	21.94	21.94	
3	16QAM	1	14	22.04	21.82	21.87	22
3	16QAM	8	0	20.79	20.82	20.75	
3	16QAM	8	4	20.78	20.76	20.78	
3	16QAM	8	7	20.58	20.65	20.66	22
3	16QAM	15	0	20.60	20.69	20.77	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	22.71	22.51	22.61	24
1.4	QPSK	1	3	22.74	22.55	22.75	



FCC SAR TEST REPORT

Report No. : FA220103002

1.4	QPSK	1	5	22.63	22.68	22.54	
1.4	QPSK	3	0	22.46	22.72	22.80	
1.4	QPSK	3	1	22.75	22.60	22.84	
1.4	QPSK	3	3	22.60	22.62	22.58	
1.4	QPSK	6	0	21.44	21.57	21.79	23
1.4	16QAM	1	0	21.91	22.08	21.81	23
1.4	16QAM	1	3	21.87	22.03	22.15	
1.4	16QAM	1	5	21.96	21.99	21.95	
1.4	16QAM	3	0	21.66	21.77	21.80	
1.4	16QAM	3	1	21.55	21.81	21.84	
1.4	16QAM	3	3	21.47	21.56	21.71	
1.4	16QAM	6	0	20.60	20.83	20.72	22

Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	22.80	22.70	22.71	24
10	QPSK	1	25	22.70	22.70	22.71	
10	QPSK	1	49	22.61	22.61	22.73	
10	QPSK	25	0	21.80	21.76	21.69	23
10	QPSK	25	12	21.76	21.74	21.80	
10	QPSK	25	25	21.70	21.68	21.82	
10	QPSK	50	0	21.75	21.72	21.75	
10	16QAM	1	0	22.08	22.01	22.04	23
10	16QAM	1	25	22.03	22.04	21.99	
10	16QAM	1	49	21.95	21.92	22.03	
10	16QAM	25	0	20.77	20.78	20.69	22
10	16QAM	25	12	20.77	20.77	20.79	
10	16QAM	25	25	20.68	20.70	20.80	
10	16QAM	50	0	20.74	20.75	20.79	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.68	22.74	22.70	24
5	QPSK	1	12	22.62	22.70	22.78	
5	QPSK	1	24	22.59	22.68	22.74	
5	QPSK	12	0	21.70	21.76	21.72	23
5	QPSK	12	7	21.70	21.75	21.82	
5	QPSK	12	13	21.62	21.71	21.80	
5	QPSK	25	0	21.69	21.74	21.83	
5	16QAM	1	0	21.96	22.08	22.00	23
5	16QAM	1	12	21.94	22.03	22.07	
5	16QAM	1	24	21.90	21.97	22.03	
5	16QAM	12	0	20.70	20.78	20.75	22
5	16QAM	12	7	20.70	20.77	20.84	
5	16QAM	12	13	20.64	20.75	20.81	
5	16QAM	25	0	20.66	20.73	20.81	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.68	22.72	22.71	24
3	QPSK	1	8	22.63	22.71	22.76	
3	QPSK	1	14	22.60	22.69	22.74	
3	QPSK	8	0	21.67	21.74	21.81	23
3	QPSK	8	4	21.71	21.74	21.84	
3	QPSK	8	7	21.67	21.71	21.78	



FCC SAR TEST REPORT

Report No. : FA220103002

3	QPSK	15	0	21.66	21.73	21.82	23
3	16QAM	1	0	21.98	22.08	21.99	
3	16QAM	1	8	21.95	22.04	22.09	
3	16QAM	1	14	21.95	22.01	22.04	22
3	16QAM	8	0	20.73	20.80	20.87	
3	16QAM	8	4	20.75	20.80	20.89	
3	16QAM	8	7	20.71	20.77	20.84	
3	16QAM	15	0	20.68	20.77	20.82	Tune-up limit (dBm)
Channel				20407	20525	20643	
Frequency (MHz)				824.7	836.5	848.3	24
1.4	QPSK	1	0	22.61	22.67	22.71	
1.4	QPSK	1	3	22.65	22.71	22.76	
1.4	QPSK	1	5	22.57	22.68	22.70	
1.4	QPSK	3	0	22.63	22.70	22.75	
1.4	QPSK	3	1	22.67	22.74	22.80	
1.4	QPSK	3	3	22.64	22.71	22.76	23
1.4	QPSK	6	0	21.63	21.67	21.74	
1.4	16QAM	1	0	21.91	21.99	22.00	23
1.4	16QAM	1	3	21.97	22.06	22.06	
1.4	16QAM	1	5	21.89	21.99	21.98	
1.4	16QAM	3	0	21.70	21.74	21.80	
1.4	16QAM	3	1	21.74	21.78	21.82	
1.4	16QAM	3	3	21.66	21.73	21.78	22
1.4	16QAM	6	0	20.70	20.76	20.83	

Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	24
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	22.88	22.64	22.59	23
10	QPSK	1	25	22.67	22.60	22.62	
10	QPSK	1	49	22.51	22.65	22.83	
10	QPSK	25	0	21.79	21.77	21.61	23
10	QPSK	25	12	21.60	21.64	21.61	
10	QPSK	25	25	21.74	21.59	21.64	
10	QPSK	50	0	21.57	21.81	21.64	23
10	16QAM	1	0	21.97	21.97	21.90	
10	16QAM	1	25	21.89	21.99	22.03	
10	16QAM	1	49	21.82	21.94	21.88	22
10	16QAM	25	0	20.61	20.58	20.65	
10	16QAM	25	12	20.60	20.59	20.85	
10	16QAM	25	25	20.66	20.68	20.71	23
10	16QAM	50	0	20.61	20.66	20.79	
Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.69	22.66	22.79	24
5	QPSK	1	12	22.66	22.72	22.59	
5	QPSK	1	24	22.51	22.73	22.64	
5	QPSK	12	0	21.72	21.85	21.59	23
5	QPSK	12	7	21.55	21.65	21.65	
5	QPSK	12	13	21.53	21.65	21.60	
5	QPSK	25	0	21.78	21.64	21.72	23
5	16QAM	1	0	21.77	22.18	21.88	
5	16QAM	1	12	21.82	22.01	22.15	
5	16QAM	1	24	21.71	22.00	21.98	



FCC SAR TEST REPORT

Report No. : FA220103002

5	16QAM	12	0	20.69	20.64	20.66	22
5	16QAM	12	7	20.50	20.75	20.65	
5	16QAM	12	13	20.62	20.79	20.79	
5	16QAM	25	0	20.64	20.65	20.81	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.64	22.81	22.53	24
3	QPSK	1	8	22.69	22.61	22.72	
3	QPSK	1	14	22.56	22.60	22.54	
3	QPSK	8	0	21.54	21.76	21.72	23
3	QPSK	8	4	21.61	21.69	21.85	
3	QPSK	8	7	21.75	21.74	21.82	
3	QPSK	15	0	21.50	21.77	21.77	
3	16QAM	1	0	21.86	22.05	21.87	23
3	16QAM	1	8	21.77	22.02	21.98	
3	16QAM	1	14	22.01	22.02	22.11	
3	16QAM	8	0	20.74	20.77	20.89	22
3	16QAM	8	4	20.59	20.66	20.81	
3	16QAM	8	7	20.75	20.71	20.80	
3	16QAM	15	0	20.49	20.62	20.89	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	22.70	22.48	22.58	24
1.4	QPSK	1	3	22.71	22.69	22.60	
1.4	QPSK	1	5	22.45	22.62	22.72	
1.4	QPSK	3	0	22.44	22.58	22.63	
1.4	QPSK	3	1	22.58	22.67	22.69	
1.4	QPSK	3	3	22.62	22.53	22.83	
1.4	QPSK	6	0	21.70	21.76	21.56	23
1.4	16QAM	1	0	21.80	21.85	21.84	23
1.4	16QAM	1	3	22.06	21.88	21.88	
1.4	16QAM	1	5	21.80	21.95	22.00	
1.4	16QAM	3	0	21.72	21.57	21.69	
1.4	16QAM	3	1	21.68	21.69	21.65	
1.4	16QAM	3	3	21.70	21.71	21.83	
1.4	16QAM	6	0	20.70	20.81	20.93	22

Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20450	20525	20600	Tune-up limit (dBm)
Frequency (MHz)				829	836.5	844	
10	QPSK	1	0	22.60	22.78	22.56	24
10	QPSK	1	25	22.51	22.50	22.57	
10	QPSK	1	49	22.53	22.57	22.53	
10	QPSK	25	0	21.71	21.69	21.71	23
10	QPSK	25	12	21.56	21.62	21.69	
10	QPSK	25	25	21.72	21.62	21.81	
10	QPSK	50	0	21.58	21.61	21.82	
10	16QAM	1	0	22.08	21.85	21.85	23
10	16QAM	1	25	21.90	22.03	22.04	
10	16QAM	1	49	21.76	22.01	22.11	
10	16QAM	25	0	20.65	20.82	20.65	22
10	16QAM	25	12	20.58	20.85	20.82	
10	16QAM	25	25	20.76	20.63	20.79	
10	16QAM	50	0	20.56	20.70	20.67	



FCC SAR TEST REPORT

Report No. : FA220103002

Channel				20425	20525	20625	Tune-up limit (dBm)
Frequency (MHz)				826.5	836.5	846.5	
5	QPSK	1	0	22.69	22.75	22.78	24
5	QPSK	1	12	22.62	22.79	22.60	
5	QPSK	1	24	22.66	22.64	22.76	
5	QPSK	12	0	21.54	21.61	21.81	23
5	QPSK	12	7	21.51	21.84	21.85	
5	QPSK	12	13	21.53	21.67	21.76	
5	QPSK	25	0	21.72	21.65	21.72	
5	16QAM	1	0	22.02	22.16	22.06	23
5	16QAM	1	12	21.94	22.10	22.04	
5	16QAM	1	24	21.98	21.83	22.02	
5	16QAM	12	0	20.66	20.58	20.78	22
5	16QAM	12	7	20.52	20.78	20.86	
5	16QAM	12	13	20.71	20.65	20.64	
5	16QAM	25	0	20.53	20.64	20.75	
Channel				20415	20525	20635	Tune-up limit (dBm)
Frequency (MHz)				825.5	836.5	847.5	
3	QPSK	1	0	22.59	22.64	22.75	24
3	QPSK	1	8	22.49	22.54	22.56	
3	QPSK	1	14	22.64	22.57	22.60	
3	QPSK	8	0	21.50	21.63	21.61	23
3	QPSK	8	4	21.73	21.76	21.69	
3	QPSK	8	7	21.70	21.59	21.68	
3	QPSK	15	0	21.49	21.62	21.64	
3	16QAM	1	0	22.00	21.90	21.89	23
3	16QAM	1	8	21.76	21.85	22.15	
3	16QAM	1	14	22.05	22.09	22.09	
3	16QAM	8	0	20.77	20.66	20.81	22
3	16QAM	8	4	20.77	20.65	20.81	
3	16QAM	8	7	20.53	20.58	20.67	
3	16QAM	15	0	20.64	20.58	20.71	
Channel				20407	20525	20643	Tune-up limit (dBm)
Frequency (MHz)				824.7	836.5	848.3	
1.4	QPSK	1	0	22.62	22.70	22.80	24
1.4	QPSK	1	3	22.52	22.74	22.62	
1.4	QPSK	1	5	22.61	22.53	22.71	
1.4	QPSK	3	0	22.47	22.66	22.65	
1.4	QPSK	3	1	22.51	22.77	22.61	
1.4	QPSK	3	3	22.52	22.57	22.59	
1.4	QPSK	6	0	21.62	21.66	21.71	23
1.4	16QAM	1	0	21.97	21.90	21.93	23
1.4	16QAM	1	3	21.81	22.00	22.15	
1.4	16QAM	1	5	21.70	22.00	21.85	
1.4	16QAM	3	0	21.55	21.66	21.61	
1.4	16QAM	3	1	21.73	21.80	21.66	
1.4	16QAM	3	3	21.69	21.76	21.67	
1.4	16QAM	6	0	20.75	20.82	20.74	22



<LTE Band 7>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	22.05	21.76	21.85	23
20	QPSK	1	49	21.77	21.61	21.48	
20	QPSK	1	99	21.66	21.65	21.74	
20	QPSK	50	0	20.82	20.95	20.70	22
20	QPSK	50	24	20.82	20.81	20.52	
20	QPSK	50	50	20.69	20.81	20.63	
20	QPSK	100	0	20.69	20.88	20.65	
20	16QAM	1	0	21.38	21.17	21.19	22
20	16QAM	1	49	21.06	21.13	20.87	
20	16QAM	1	99	20.93	20.95	20.91	
20	16QAM	50	0	19.77	19.94	19.74	21
20	16QAM	50	24	19.66	19.82	19.68	
20	16QAM	50	50	19.67	19.90	19.41	
20	16QAM	100	0	19.54	19.76	19.53	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	22.02	21.63	21.72	23
15	QPSK	1	37	21.65	21.60	21.61	
15	QPSK	1	74	21.53	21.59	21.78	
15	QPSK	36	0	20.79	20.92	20.72	22
15	QPSK	36	20	20.71	20.80	20.48	
15	QPSK	36	39	20.76	20.79	20.73	
15	QPSK	75	0	20.59	20.76	20.61	
15	16QAM	1	0	21.37	21.09	20.88	22
15	16QAM	1	37	20.99	21.14	20.99	
15	16QAM	1	74	20.97	21.16	21.00	
15	16QAM	36	0	19.92	19.81	19.57	21
15	16QAM	36	20	19.76	19.80	19.46	
15	16QAM	36	39	19.70	19.95	19.56	
15	16QAM	75	0	19.69	19.72	19.43	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	21.73	21.70	21.53	23
10	QPSK	1	25	21.58	21.74	21.77	
10	QPSK	1	49	21.71	21.78	21.73	
10	QPSK	25	0	20.75	20.78	20.54	22
10	QPSK	25	12	20.59	20.69	20.61	
10	QPSK	25	25	20.66	20.71	20.60	
10	QPSK	50	0	20.75	20.61	20.86	
10	16QAM	1	0	21.12	21.03	20.89	22
10	16QAM	1	25	21.17	20.95	20.98	
10	16QAM	1	49	21.03	21.07	21.03	
10	16QAM	25	0	19.74	19.70	19.68	21
10	16QAM	25	12	19.66	19.68	19.44	
10	16QAM	25	25	19.72	19.76	19.52	
10	16QAM	50	0	19.87	19.75	19.70	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.91	21.51	21.53	23
5	QPSK	1	12	21.68	21.69	21.42	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	1	24	21.55	21.62	21.46	22
5	QPSK	12	0	20.68	20.86	20.61	
5	QPSK	12	7	20.71	20.81	20.58	
5	QPSK	12	13	20.89	20.59	20.66	
5	QPSK	25	0	20.91	20.86	20.52	22
5	16QAM	1	0	20.98	21.10	20.78	
5	16QAM	1	12	21.22	21.09	20.86	
5	16QAM	1	24	20.92	21.09	20.94	21
5	16QAM	12	0	19.75	19.64	19.46	
5	16QAM	12	7	19.88	19.89	19.50	
5	16QAM	12	13	19.68	19.80	19.59	
5	16QAM	25	0	19.81	19.72	19.63	

Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	21.96	21.83	21.76	23
20	QPSK	1	49	21.73	21.76	21.57	
20	QPSK	1	99	21.66	21.75	21.69	
20	QPSK	50	0	20.82	20.88	20.65	22
20	QPSK	50	24	20.78	20.88	20.66	
20	QPSK	50	50	20.70	20.87	20.63	
20	QPSK	100	0	20.72	20.85	20.62	
20	16QAM	1	0	21.30	21.21	21.10	22
20	16QAM	1	49	21.09	21.15	20.89	
20	16QAM	1	99	21.00	21.13	21.01	
20	16QAM	50	0	19.85	19.89	19.67	21
20	16QAM	50	24	19.84	19.88	19.66	
20	16QAM	50	50	19.68	19.91	19.61	
20	16QAM	100	0	19.71	19.86	19.65	
Channel				20825	21100	21375	
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	21.94	21.81	21.74	23
15	QPSK	1	37	21.72	21.76	21.64	
15	QPSK	1	74	21.65	21.74	21.79	
15	QPSK	36	0	20.89	20.86	20.65	22
15	QPSK	36	20	20.79	20.84	20.63	
15	QPSK	36	39	20.75	20.86	20.68	
15	QPSK	75	0	20.77	20.84	20.61	
15	16QAM	1	0	21.32	21.15	20.95	22
15	16QAM	1	37	21.05	21.12	20.91	
15	16QAM	1	74	20.96	21.07	21.01	
15	16QAM	36	0	19.93	19.84	19.64	21
15	16QAM	36	20	19.84	19.88	19.62	
15	16QAM	36	39	19.75	19.86	19.69	
15	16QAM	75	0	19.79	19.86	19.61	
Channel				20800	21100	21400	
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	21.88	21.78	21.70	23
10	QPSK	1	25	21.74	21.78	21.74	
10	QPSK	1	49	21.72	21.79	21.73	
10	QPSK	25	0	20.87	20.81	20.68	22
10	QPSK	25	12	20.77	20.84	20.71	
10	QPSK	25	25	20.74	20.82	20.77	



FCC SAR TEST REPORT

Report No. : FA220103002

10	QPSK	50	0	20.86	20.80	20.78	22
10	16QAM	1	0	21.23	21.12	20.94	
10	16QAM	1	25	21.11	21.13	21.09	
10	16QAM	1	49	21.11	21.11	21.04	
10	16QAM	25	0	19.88	19.81	19.60	21
10	16QAM	25	12	19.81	19.84	19.62	
10	16QAM	25	25	19.75	19.82	19.67	
10	16QAM	50	0	19.90	19.84	19.79	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.81	21.70	21.71	23
5	QPSK	1	12	21.81	21.73	21.61	
5	QPSK	1	24	21.69	21.75	21.58	
5	QPSK	12	0	20.87	20.77	20.62	22
5	QPSK	12	7	20.86	20.82	20.66	
5	QPSK	12	13	20.84	20.77	20.64	
5	QPSK	25	0	20.86	20.77	20.62	
5	16QAM	1	0	21.18	21.02	20.96	22
5	16QAM	1	12	21.16	21.04	20.93	
5	16QAM	1	24	21.02	21.05	20.91	
5	16QAM	12	0	19.89	19.81	19.64	21
5	16QAM	12	7	19.92	19.86	19.69	
5	16QAM	12	13	19.85	19.82	19.64	
5	16QAM	25	0	19.86	19.81	19.65	

Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	Tune-up limit (dBm)
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	21.90	21.80	21.65	23
20	QPSK	1	49	21.74	21.79	21.47	
20	QPSK	1	99	21.63	21.66	21.78	
20	QPSK	50	0	20.89	20.78	20.45	22
20	QPSK	50	24	20.58	20.96	20.69	
20	QPSK	50	50	20.59	20.87	20.71	
20	QPSK	100	0	20.55	20.85	20.58	
20	16QAM	1	0	21.18	21.26	21.06	22
20	16QAM	1	49	21.11	21.04	20.72	
20	16QAM	1	99	20.86	21.05	21.08	
20	16QAM	50	0	19.74	19.83	19.70	21
20	16QAM	50	24	19.83	19.95	19.72	
20	16QAM	50	50	19.50	19.86	19.64	
20	16QAM	100	0	19.56	19.77	19.59	
Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	22.00	21.71	21.66	23
15	QPSK	1	37	21.54	21.72	21.74	
15	QPSK	1	74	21.73	21.66	21.63	
15	QPSK	36	0	20.95	20.77	20.61	22
15	QPSK	36	20	20.80	20.76	20.56	
15	QPSK	36	39	20.85	20.79	20.68	
15	QPSK	75	0	20.84	20.72	20.43	
15	16QAM	1	0	21.29	21.06	20.80	22
15	16QAM	1	37	20.98	20.97	20.96	
15	16QAM	1	74	21.06	21.01	21.10	



FCC SAR TEST REPORT

Report No. : FA220103002

15	16QAM	36	0	19.78	19.82	19.51	21
15	16QAM	36	20	19.85	19.95	19.66	
15	16QAM	36	39	19.62	19.81	19.76	
15	16QAM	75	0	19.61	19.81	19.64	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	21.89	21.62	21.75	23
10	QPSK	1	25	21.76	21.79	21.81	
10	QPSK	1	49	21.79	21.59	21.64	
10	QPSK	25	0	20.88	20.83	20.49	22
10	QPSK	25	12	20.81	20.68	20.56	
10	QPSK	25	25	20.54	20.66	20.80	
10	QPSK	50	0	20.69	20.83	20.62	
10	16QAM	1	0	21.26	21.06	20.81	22
10	16QAM	1	25	20.96	21.23	21.00	
10	16QAM	1	49	21.17	21.10	20.86	
10	16QAM	25	0	19.88	19.80	19.41	21
10	16QAM	25	12	19.81	19.77	19.47	
10	16QAM	25	25	19.79	19.85	19.60	
10	16QAM	50	0	19.72	19.67	19.76	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.77	21.67	21.75	23
5	QPSK	1	12	21.89	21.62	21.44	
5	QPSK	1	24	21.75	21.78	21.52	
5	QPSK	12	0	20.89	20.66	20.60	22
5	QPSK	12	7	20.73	20.82	20.65	
5	QPSK	12	13	20.74	20.61	20.56	
5	QPSK	25	0	20.72	20.67	20.56	
5	16QAM	1	0	21.15	21.09	20.87	22
5	16QAM	1	12	21.20	21.10	20.92	
5	16QAM	1	24	20.96	21.15	20.83	
5	16QAM	12	0	19.70	19.86	19.72	21
5	16QAM	12	7	19.72	19.84	19.55	
5	16QAM	12	13	19.83	19.65	19.49	
5	16QAM	25	0	19.74	19.77	19.59	

Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20850	21100	21350	
Frequency (MHz)				2510	2535	2560	
20	QPSK	1	0	21.82	21.72	21.60	23
20	QPSK	1	49	21.69	21.62	21.47	
20	QPSK	1	99	21.51	21.59	21.74	
20	QPSK	50	0	20.70	20.70	20.67	22
20	QPSK	50	24	20.74	20.90	20.64	
20	QPSK	50	50	20.74	20.91	20.69	
20	QPSK	100	0	20.70	20.84	20.52	
20	16QAM	1	0	21.34	21.10	20.98	22
20	16QAM	1	49	21.14	21.04	20.98	
20	16QAM	1	99	20.83	21.16	21.03	
20	16QAM	50	0	19.76	19.76	19.64	21
20	16QAM	50	24	19.73	19.91	19.68	
20	16QAM	50	50	19.74	19.85	19.50	
20	16QAM	100	0	19.77	19.91	19.56	

Channel				20825	21100	21375	Tune-up limit (dBm)
Frequency (MHz)				2507.5	2535	2562.5	
15	QPSK	1	0	21.94	21.86	21.65	23
15	QPSK	1	37	21.80	21.57	21.69	
15	QPSK	1	74	21.58	21.71	21.78	
15	QPSK	36	0	20.72	20.88	20.64	22
15	QPSK	36	20	20.72	20.77	20.55	
15	QPSK	36	39	20.58	20.82	20.73	
15	QPSK	75	0	20.84	20.86	20.70	
15	16QAM	1	0	21.20	21.16	20.78	22
15	16QAM	1	37	21.08	21.12	20.90	
15	16QAM	1	74	20.92	20.88	21.04	
15	16QAM	36	0	19.92	19.72	19.68	21
15	16QAM	36	20	19.85	19.68	19.54	
15	16QAM	36	39	19.67	19.69	19.57	
15	16QAM	75	0	19.80	19.85	19.43	
Channel				20800	21100	21400	Tune-up limit (dBm)
Frequency (MHz)				2505	2535	2565	
10	QPSK	1	0	21.71	21.87	21.75	23
10	QPSK	1	25	21.60	21.81	21.81	
10	QPSK	1	49	21.59	21.69	21.63	
10	QPSK	25	0	20.96	20.74	20.54	22
10	QPSK	25	12	20.59	20.70	20.76	
10	QPSK	25	25	20.72	20.79	20.66	
10	QPSK	50	0	20.88	20.72	20.79	
10	16QAM	1	0	21.22	21.08	20.86	22
10	16QAM	1	25	21.10	21.04	21.12	
10	16QAM	1	49	20.92	21.11	20.88	
10	16QAM	25	0	19.94	19.69	19.45	21
10	16QAM	25	12	19.76	19.83	19.70	
10	16QAM	25	25	19.71	19.68	19.57	
10	16QAM	50	0	19.91	19.68	19.88	
Channel				20775	21100	21425	Tune-up limit (dBm)
Frequency (MHz)				2502.5	2535	2567.5	
5	QPSK	1	0	21.91	21.67	21.73	23
5	QPSK	1	12	21.86	21.64	21.50	
5	QPSK	1	24	21.65	21.57	21.45	
5	QPSK	12	0	20.82	20.58	20.57	22
5	QPSK	12	7	20.79	20.86	20.46	
5	QPSK	12	13	20.85	20.61	20.68	
5	QPSK	25	0	20.67	20.63	20.70	
5	16QAM	1	0	21.20	20.91	21.05	22
5	16QAM	1	12	21.20	21.00	20.75	
5	16QAM	1	24	21.08	20.99	20.87	
5	16QAM	12	0	19.96	19.80	19.57	21
5	16QAM	12	7	19.80	19.68	19.74	
5	16QAM	12	13	19.66	19.77	19.60	
5	16QAM	25	0	19.77	19.85	19.64	



<LTE Band 12>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.70	22.80	22.92	24
10	QPSK	1	25	22.71	22.67	22.70	
10	QPSK	1	49	22.68	22.80	23.01	
10	QPSK	25	0	21.91	21.89	21.65	23
10	QPSK	25	12	21.98	21.89	21.76	
10	QPSK	25	25	21.90	21.85	21.78	
10	QPSK	50	0	21.90	21.86	21.78	
10	16QAM	1	0	21.99	22.19	22.18	23
10	16QAM	1	25	21.95	22.16	22.19	
10	16QAM	1	49	22.07	22.21	22.18	
10	16QAM	25	0	20.74	20.71	20.87	22
10	16QAM	25	12	20.85	20.79	20.80	
10	16QAM	25	25	20.98	20.85	20.95	
10	16QAM	50	0	20.93	20.71	21.08	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.86	22.85	22.92	24
5	QPSK	1	12	22.73	22.82	22.71	
5	QPSK	1	24	22.96	22.85	22.74	
5	QPSK	12	0	21.70	21.78	21.97	23
5	QPSK	12	7	21.78	21.71	21.88	
5	QPSK	12	13	21.74	21.89	21.87	
5	QPSK	25	0	21.66	21.75	21.92	
5	16QAM	1	0	21.86	22.12	22.16	23
5	16QAM	1	12	21.85	21.92	22.16	
5	16QAM	1	24	22.23	22.04	22.19	
5	16QAM	12	0	20.86	20.88	20.90	22
5	16QAM	12	7	20.91	20.80	20.98	
5	16QAM	12	13	21.04	20.81	20.95	
5	16QAM	25	0	20.81	20.66	20.79	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.79	22.68	22.88	24
3	QPSK	1	8	22.91	22.63	22.79	
3	QPSK	1	14	22.74	22.86	22.88	
3	QPSK	8	0	21.78	21.82	21.91	23
3	QPSK	8	4	21.98	21.98	21.94	
3	QPSK	8	7	21.75	21.71	21.95	
3	QPSK	15	0	21.80	21.83	21.96	
3	16QAM	1	0	21.94	21.95	21.98	23
3	16QAM	1	8	21.86	21.92	22.21	
3	16QAM	1	14	21.98	21.97	22.22	
3	16QAM	8	0	20.91	20.74	20.87	22
3	16QAM	8	4	20.80	20.91	21.12	
3	16QAM	8	7	20.83	20.72	21.07	
3	16QAM	15	0	20.79	20.95	20.97	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	22.73	22.81	22.65	24
1.4	QPSK	1	3	22.60	22.83	22.84	



FCC SAR TEST REPORT

Report No. : FA220103002

1.4	QPSK	1	5	22.71	22.68	22.88	
1.4	QPSK	3	0	22.74	22.64	22.73	
1.4	QPSK	3	1	22.76	22.79	23.01	
1.4	QPSK	3	3	22.68	22.62	22.79	
1.4	QPSK	6	0	21.83	21.72	21.99	23
1.4	16QAM	1	0	21.99	21.99	22.04	23
1.4	16QAM	1	3	22.07	22.18	22.06	
1.4	16QAM	1	5	21.86	21.88	22.12	
1.4	16QAM	3	0	21.77	21.83	21.78	
1.4	16QAM	3	1	21.78	21.88	21.82	
1.4	16QAM	3	3	21.64	21.84	21.80	22
1.4	16QAM	6	0	20.68	20.72	20.82	

Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.83	22.81	22.82	24
10	QPSK	1	25	22.87	22.81	22.85	
10	QPSK	1	49	22.83	22.84	22.93	
10	QPSK	25	0	21.83	21.89	21.82	23
10	QPSK	25	12	21.96	21.88	21.94	
10	QPSK	25	25	21.94	21.96	21.88	
10	QPSK	50	0	21.92	21.87	21.93	23
10	16QAM	1	0	22.04	22.09	22.09	
10	16QAM	1	25	22.14	22.08	22.13	
10	16QAM	1	49	22.12	22.15	22.20	22
10	16QAM	25	0	20.86	20.88	20.83	
10	16QAM	25	12	20.98	20.91	20.98	
10	16QAM	25	25	20.90	20.95	20.93	22
10	16QAM	50	0	20.98	20.86	20.98	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.80	22.78	22.83	24
5	QPSK	1	12	22.79	22.77	22.81	
5	QPSK	1	24	22.89	22.89	22.90	
5	QPSK	12	0	21.87	21.83	21.90	23
5	QPSK	12	7	21.90	21.88	21.92	
5	QPSK	12	13	21.93	21.82	21.97	
5	QPSK	25	0	21.82	21.83	21.85	23
5	16QAM	1	0	22.02	22.07	22.10	
5	16QAM	1	12	22.04	22.08	22.07	
5	16QAM	1	24	22.14	22.15	22.16	22
5	16QAM	12	0	20.94	20.85	20.94	
5	16QAM	12	7	20.93	20.87	20.94	
5	16QAM	12	13	20.95	20.88	20.99	23
5	16QAM	25	0	20.89	20.85	20.90	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.82	22.80	22.79	24
3	QPSK	1	8	22.82	22.80	22.87	
3	QPSK	1	14	22.81	22.77	22.90	
3	QPSK	8	0	21.86	21.83	21.96	23
3	QPSK	8	4	21.88	21.88	22.00	
3	QPSK	8	7	21.83	21.87	21.99	



FCC SAR TEST REPORT

Report No. : FA220103002

3	QPSK	15	0	21.85	21.85	21.97	23
3	16QAM	1	0	22.03	22.08	22.07	
3	16QAM	1	8	22.05	22.09	22.16	
3	16QAM	1	14	22.00	22.06	22.16	
3	16QAM	8	0	20.97	20.90	21.02	22
3	16QAM	8	4	20.96	20.94	21.04	
3	16QAM	8	7	20.90	20.91	21.05	
3	16QAM	15	0	20.92	20.87	21.01	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	22.76	22.76	22.81	24
1.4	QPSK	1	3	22.78	22.78	22.90	
1.4	QPSK	1	5	22.76	22.73	22.80	
1.4	QPSK	3	0	22.88	22.76	22.87	
1.4	QPSK	3	1	22.92	22.82	22.94	
1.4	QPSK	3	3	22.85	22.79	22.87	
1.4	QPSK	6	0	21.80	21.77	21.92	23
1.4	16QAM	1	0	21.96	22.01	22.08	23
1.4	16QAM	1	3	22.02	22.09	22.15	
1.4	16QAM	1	5	21.96	21.99	22.11	
1.4	16QAM	3	0	21.81	21.83	21.92	
1.4	16QAM	3	1	21.86	21.85	21.96	
1.4	16QAM	3	3	21.81	21.80	21.92	
1.4	16QAM	6	0	20.87	20.88	21.00	22

Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	Tune-up limit (dBm)
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.76	22.81	22.65	24
10	QPSK	1	25	22.95	22.71	22.75	
10	QPSK	1	49	22.64	22.90	23.00	
10	QPSK	25	0	21.72	21.91	21.64	23
10	QPSK	25	12	21.88	21.75	21.81	
10	QPSK	25	25	21.91	21.97	21.68	
10	QPSK	50	0	21.76	21.89	21.97	
10	16QAM	1	0	21.85	22.13	22.02	23
10	16QAM	1	25	22.08	21.92	22.21	
10	16QAM	1	49	21.92	22.19	22.09	
10	16QAM	25	0	20.82	20.96	20.83	22
10	16QAM	25	12	20.82	20.98	20.91	
10	16QAM	25	25	20.81	20.95	20.73	
10	16QAM	50	0	21.02	20.96	20.82	
Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.88	22.65	22.78	24
5	QPSK	1	12	22.61	22.86	22.86	
5	QPSK	1	24	22.91	22.87	22.79	
5	QPSK	12	0	21.86	21.79	21.77	23
5	QPSK	12	7	21.70	21.76	21.91	
5	QPSK	12	13	21.83	21.84	22.04	
5	QPSK	25	0	21.88	21.88	21.76	
5	16QAM	1	0	22.00	21.87	21.96	23
5	16QAM	1	12	21.85	21.97	21.93	
5	16QAM	1	24	22.06	22.12	22.06	



FCC SAR TEST REPORT

Report No. : FA220103002

5	16QAM	12	0	21.02	20.76	20.85	22
5	16QAM	12	7	20.83	20.71	20.92	
5	16QAM	12	13	20.77	20.70	20.91	
5	16QAM	25	0	20.90	20.78	20.77	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	23.03	22.64	22.65	24
3	QPSK	1	8	22.89	22.71	22.79	
3	QPSK	1	14	22.76	22.77	22.84	
3	QPSK	8	0	21.86	21.82	21.95	23
3	QPSK	8	4	21.81	21.82	22.04	
3	QPSK	8	7	21.69	21.86	22.07	
3	QPSK	15	0	21.70	21.67	21.98	
3	16QAM	1	0	22.03	22.11	21.92	23
3	16QAM	1	8	21.99	21.97	22.24	
3	16QAM	1	14	22.08	21.94	22.04	
3	16QAM	8	0	20.92	20.82	20.98	22
3	16QAM	8	4	20.95	20.99	20.91	
3	16QAM	8	7	20.76	20.87	21.02	
3	16QAM	15	0	20.85	20.73	20.88	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	22.82	22.63	22.85	24
1.4	QPSK	1	3	22.82	22.71	22.74	
1.4	QPSK	1	5	22.60	22.67	22.79	
1.4	QPSK	3	0	22.71	22.77	22.68	
1.4	QPSK	3	1	22.93	22.65	22.77	
1.4	QPSK	3	3	22.92	22.83	22.85	
1.4	QPSK	6	0	21.64	21.84	21.77	23
1.4	16QAM	1	0	21.81	21.89	22.05	23
1.4	16QAM	1	3	21.94	22.17	21.97	
1.4	16QAM	1	5	21.81	21.85	22.10	
1.4	16QAM	3	0	21.65	21.84	21.88	
1.4	16QAM	3	1	21.85	21.84	21.84	
1.4	16QAM	3	3	21.78	21.68	21.85	
1.4	16QAM	6	0	20.70	20.96	21.03	22

Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23060	23095	23130	Tune-up limit (dBm)
Frequency (MHz)				704	707.5	711	
10	QPSK	1	0	22.73	22.63	22.75	24
10	QPSK	1	25	22.77	22.86	22.85	
10	QPSK	1	49	22.77	22.72	22.86	
10	QPSK	25	0	21.70	21.80	21.83	23
10	QPSK	25	12	21.95	21.95	21.79	
10	QPSK	25	25	21.75	22.00	21.89	
10	QPSK	50	0	21.77	21.92	22.00	
10	16QAM	1	0	21.92	22.08	22.10	23
10	16QAM	1	25	22.16	22.01	22.03	
10	16QAM	1	49	22.19	22.09	22.06	
10	16QAM	25	0	20.95	20.93	20.77	22
10	16QAM	25	12	21.00	20.84	21.05	
10	16QAM	25	25	20.72	21.04	20.74	
10	16QAM	50	0	20.82	20.68	21.03	

Channel				23035	23095	23155	Tune-up limit (dBm)
Frequency (MHz)				701.5	707.5	713.5	
5	QPSK	1	0	22.85	22.65	22.79	24
5	QPSK	1	12	22.82	22.84	22.71	
5	QPSK	1	24	22.74	22.73	22.83	
5	QPSK	12	0	21.93	21.65	21.82	23
5	QPSK	12	7	21.72	21.91	21.77	
5	QPSK	12	13	21.95	21.80	21.92	
5	QPSK	25	0	21.83	21.76	21.83	
5	16QAM	1	0	22.10	22.16	21.96	23
5	16QAM	1	12	22.06	21.89	22.03	
5	16QAM	1	24	22.01	22.02	22.09	
5	16QAM	12	0	20.79	20.83	20.86	22
5	16QAM	12	7	20.80	20.74	20.98	
5	16QAM	12	13	20.76	20.76	21.06	
5	16QAM	25	0	20.97	20.79	20.74	
Channel				23025	23095	23165	Tune-up limit (dBm)
Frequency (MHz)				700.5	707.5	714.5	
3	QPSK	1	0	22.89	22.79	22.84	24
3	QPSK	1	8	22.86	22.82	22.68	
3	QPSK	1	14	22.89	22.73	22.95	
3	QPSK	8	0	21.88	21.92	22.04	23
3	QPSK	8	4	21.69	21.87	21.96	
3	QPSK	8	7	21.93	21.89	21.95	
3	QPSK	15	0	21.80	21.68	21.98	
3	16QAM	1	0	22.04	22.02	21.97	23
3	16QAM	1	8	22.05	22.13	22.10	
3	16QAM	1	14	21.84	22.09	22.11	
3	16QAM	8	0	20.96	20.87	21.11	22
3	16QAM	8	4	20.94	20.87	20.96	
3	16QAM	8	7	20.76	20.81	20.96	
3	16QAM	15	0	21.02	20.81	20.82	
Channel				23017	23095	23173	Tune-up limit (dBm)
Frequency (MHz)				699.7	707.5	715.3	
1.4	QPSK	1	0	23.21	22.59	22.83	24
1.4	QPSK	1	3	22.66	22.63	22.80	
1.4	QPSK	1	5	22.84	22.79	22.67	
1.4	QPSK	3	0	22.71	22.73	22.86	
1.4	QPSK	3	1	22.79	22.89	23.01	
1.4	QPSK	3	3	22.77	22.79	22.76	
1.4	QPSK	6	0	21.88	21.83	21.88	23
1.4	16QAM	1	0	21.84	22.03	21.97	23
1.4	16QAM	1	3	21.87	21.94	21.95	
1.4	16QAM	1	5	21.85	22.02	21.99	
1.4	16QAM	3	0	21.88	21.63	21.76	
1.4	16QAM	3	1	21.94	21.88	21.90	
1.4	16QAM	3	3	21.74	21.87	21.98	
1.4	16QAM	6	0	20.89	20.69	20.97	22



<LTE Band 13>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		22.89		24
10	QPSK	1	25		22.69		
10	QPSK	1	49		22.62		
10	QPSK	25	0		21.70		23
10	QPSK	25	12		21.83		
10	QPSK	25	25		21.80		
10	QPSK	50	0		21.70		
10	16QAM	1	0		22.04		23
10	16QAM	1	25		22.21		
10	16QAM	1	49		21.88		
10	16QAM	25	0		20.80		22
10	16QAM	25	12		20.96		
10	16QAM	25	25		20.92		
10	16QAM	50	0		20.85		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.88	22.79	22.76	24
5	QPSK	1	12	22.95	22.88	22.90	
5	QPSK	1	24	22.87	22.63	22.76	
5	QPSK	12	0	21.87	21.71	21.71	23
5	QPSK	12	7	21.89	21.76	21.69	
5	QPSK	12	13	21.98	21.79	21.79	
5	QPSK	25	0	21.88	21.85	21.66	
5	16QAM	1	0	22.10	22.05	22.03	23
5	16QAM	1	12	21.98	22.20	22.13	
5	16QAM	1	24	22.18	22.17	22.05	
5	16QAM	12	0	20.88	20.85	20.83	22
5	16QAM	12	7	20.88	20.80	20.83	
5	16QAM	12	13	20.80	20.84	20.73	
5	16QAM	25	0	20.77	20.69	20.68	



Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		22.81		24
10	QPSK	1	25		22.84		
10	QPSK	1	49		22.75		
10	QPSK	25	0		21.88		23
10	QPSK	25	12		21.90		
10	QPSK	25	25		21.85		
10	QPSK	50	0		21.88		23
10	16QAM	1	0		22.09		
10	16QAM	1	25		22.16		
10	16QAM	1	49		22.07		22
10	16QAM	25	0		20.92		
10	16QAM	25	12		20.93		
10	16QAM	25	25		20.84		22
10	16QAM	50	0		20.91		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.81	22.86	22.84	24
5	QPSK	1	12	22.87	22.81	22.80	
5	QPSK	1	24	22.85	22.80	22.78	
5	QPSK	12	0	21.83	21.90	21.86	23
5	QPSK	12	7	21.94	21.91	21.85	
5	QPSK	12	13	21.89	21.82	21.81	
5	QPSK	25	0	21.88	21.86	21.85	
5	16QAM	1	0	22.08	22.16	22.14	23
5	16QAM	1	12	22.16	22.16	22.11	
5	16QAM	1	24	22.15	22.09	22.09	
5	16QAM	12	0	20.87	20.95	20.85	22
5	16QAM	12	7	20.98	20.89	20.86	
5	16QAM	12	13	20.90	20.82	20.81	
5	16QAM	25	0	20.91	20.89	20.84	



Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		22.84		24
10	QPSK	1	25		22.77		
10	QPSK	1	49		22.67		
10	QPSK	25	0		21.97		23
10	QPSK	25	12		21.99		
10	QPSK	25	25		21.85		
10	QPSK	50	0		21.95		
10	16QAM	1	0		21.97		23
10	16QAM	1	25		22.06		
10	16QAM	1	49		22.13		
10	16QAM	25	0		20.99		22
10	16QAM	25	12		20.88		
10	16QAM	25	25		20.67		
10	16QAM	50	0		20.80		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.82	22.87	22.74	24
5	QPSK	1	12	22.79	22.81	22.83	
5	QPSK	1	24	22.71	22.89	22.66	
5	QPSK	12	0	21.80	21.88	21.80	23
5	QPSK	12	7	22.00	21.83	21.73	
5	QPSK	12	13	21.95	21.86	21.66	
5	QPSK	25	0	21.76	21.89	21.76	
5	16QAM	1	0	22.18	22.12	21.99	23
5	16QAM	1	12	22.03	22.03	21.93	
5	16QAM	1	24	22.09	21.90	22.18	
5	16QAM	12	0	20.71	20.78	20.72	22
5	16QAM	12	7	21.01	20.82	20.83	
5	16QAM	12	13	20.76	20.92	20.63	
5	16QAM	25	0	20.88	20.70	20.86	



Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				23230			
Frequency (MHz)				782			
10	QPSK	1	0		22.75		24
10	QPSK	1	25		22.65		
10	QPSK	1	49		22.84		
10	QPSK	25	0		21.82		23
10	QPSK	25	12		21.85		
10	QPSK	25	25		21.70		
10	QPSK	50	0		21.91		
10	16QAM	1	0		22.12		23
10	16QAM	1	25		22.19		
10	16QAM	1	49		22.02		
10	16QAM	25	0		20.94		22
10	16QAM	25	12		21.02		
10	16QAM	25	25		20.91		
10	16QAM	50	0		20.88		
Channel				23205	23230	23255	Tune-up limit (dBm)
Frequency (MHz)				779.5	782	784.5	
5	QPSK	1	0	22.89	22.69	22.79	24
5	QPSK	1	12	22.76	22.70	22.79	
5	QPSK	1	24	22.83	22.86	22.82	
5	QPSK	12	0	21.66	21.78	21.79	23
5	QPSK	12	7	22.00	21.73	21.73	
5	QPSK	12	13	21.71	21.89	21.82	
5	QPSK	25	0	21.93	21.86	21.87	
5	16QAM	1	0	21.94	22.12	22.24	23
5	16QAM	1	12	22.06	22.19	21.94	
5	16QAM	1	24	22.19	22.14	22.07	
5	16QAM	12	0	20.75	20.98	20.91	22
5	16QAM	12	7	21.03	20.93	20.69	
5	16QAM	12	13	20.70	20.83	20.67	
5	16QAM	25	0	20.74	20.83	20.72	



<LTE Band 26>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.67	22.57	22.89	24
15	QPSK	1	37	22.58	22.63	22.72	
15	QPSK	1	74	22.71	22.55	22.81	
15	QPSK	36	0	21.54	21.84	21.82	23
15	QPSK	36	20	21.81	21.77	21.65	
15	QPSK	36	39	21.68	21.88	21.81	
15	QPSK	75	0	21.70	21.80	21.77	23
15	16QAM	1	0	22.07	21.82	22.25	
15	16QAM	1	37	22.03	21.95	21.94	
15	16QAM	1	74	21.98	22.07	22.07	22
15	16QAM	36	0	20.62	20.60	20.87	
15	16QAM	36	20	20.61	20.78	20.81	
15	16QAM	36	39	20.74	20.68	20.69	22
15	16QAM	75	0	20.79	20.79	20.80	
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	22.60	22.57	22.74	24
10	QPSK	1	25	22.54	22.61	22.63	
10	QPSK	1	49	22.69	22.54	22.82	
10	QPSK	25	0	21.52	21.75	21.77	23
10	QPSK	25	12	21.74	21.69	21.65	
10	QPSK	25	25	21.66	21.80	21.80	
10	QPSK	50	0	21.69	21.76	21.70	23
10	16QAM	1	0	22.07	21.82	22.16	
10	16QAM	1	25	22.01	21.93	21.93	
10	16QAM	1	49	21.94	22.03	22.04	22
10	16QAM	25	0	20.58	20.60	20.79	
10	16QAM	25	12	20.59	20.78	20.72	
10	16QAM	25	25	20.70	20.64	20.59	22
10	16QAM	50	0	20.72	20.76	20.70	
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.67	22.68	22.75	24
5	QPSK	1	12	22.68	22.62	22.55	
5	QPSK	1	24	22.75	22.56	22.73	
5	QPSK	12	0	21.65	21.77	21.75	23
5	QPSK	12	7	21.58	21.81	21.77	
5	QPSK	12	13	21.49	21.76	21.67	
5	QPSK	25	0	21.57	21.66	21.57	23
5	16QAM	1	0	22.07	22.08	21.95	
5	16QAM	1	12	21.84	22.03	21.82	
5	16QAM	1	24	21.88	21.87	22.09	22
5	16QAM	12	0	20.53	20.82	20.79	
5	16QAM	12	7	20.51	20.75	20.85	
5	16QAM	12	13	20.63	20.77	20.92	22
5	16QAM	25	0	20.60	20.84	20.73	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.49	22.65	22.78	24
3	QPSK	1	8	22.55	22.76	22.76	



FCC SAR TEST REPORT

Report No. : FA220103002

3	QPSK	1	14	22.42	22.75	22.62	23
3	QPSK	8	0	21.62	21.50	21.75	
3	QPSK	8	4	21.59	21.68	21.63	
3	QPSK	8	7	21.51	21.78	21.57	
3	QPSK	15	0	21.64	21.57	21.82	23
3	16QAM	1	0	21.95	21.92	21.82	
3	16QAM	1	8	21.77	22.13	21.91	
3	16QAM	1	14	21.81	22.03	21.91	
3	16QAM	8	0	20.52	20.77	20.77	22
3	16QAM	8	4	20.53	20.82	20.86	
3	16QAM	8	7	20.69	20.76	20.82	
3	16QAM	15	0	20.65	20.77	20.64	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.32	22.53	22.50	24
1.4	QPSK	1	3	22.40	22.74	22.82	
1.4	QPSK	1	5	22.52	22.45	22.67	
1.4	QPSK	3	0	22.37	22.58	22.80	
1.4	QPSK	3	1	22.67	22.80	22.88	
1.4	QPSK	3	3	22.49	22.60	22.69	
1.4	QPSK	6	0	21.47	21.46	21.62	23
1.4	16QAM	1	0	21.84	21.87	21.82	23
1.4	16QAM	1	3	21.78	21.93	21.88	
1.4	16QAM	1	5	21.60	21.85	21.97	
1.4	16QAM	3	0	21.62	21.54	21.72	
1.4	16QAM	3	1	21.58	21.60	21.67	
1.4	16QAM	3	3	21.42	21.56	21.60	
1.4	16QAM	6	0	20.43	20.61	20.67	22

Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	Tune-up limit (dBm)
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.89	22.85	22.83	24
15	QPSK	1	37	22.76	22.63	22.76	
15	QPSK	1	74	22.82	22.67	22.81	
15	QPSK	36	0	21.88	21.80	21.77	23
15	QPSK	36	20	21.82	21.70	21.85	
15	QPSK	36	39	21.89	21.72	21.79	
15	QPSK	75	0	21.78	21.74	21.77	
15	16QAM	1	0	22.22	22.11	22.12	23
15	16QAM	1	37	22.08	21.93	22.06	
15	16QAM	1	74	22.18	22.04	22.10	
15	16QAM	36	0	20.90	20.77	20.81	22
15	16QAM	36	20	20.84	20.77	20.85	
15	16QAM	36	39	20.92	20.75	20.79	
15	16QAM	75	0	20.86	20.71	20.84	
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	22.82	22.79	22.74	24
10	QPSK	1	25	22.76	22.63	22.73	
10	QPSK	1	49	22.75	22.60	22.74	
10	QPSK	25	0	21.81	21.72	21.73	23
10	QPSK	25	12	21.81	21.64	21.81	
10	QPSK	25	25	21.83	21.69	21.76	



FCC SAR TEST REPORT

Report No. : FA220103002

10	QPSK	50	0	21.77	21.68	21.76	
10	16QAM	1	0	22.14	22.10	22.07	23
10	16QAM	1	25	22.07	21.93	21.99	
10	16QAM	1	49	22.08	21.94	22.08	
10	16QAM	25	0	20.80	20.69	20.73	22
10	16QAM	25	12	20.81	20.68	20.81	
10	16QAM	25	25	20.84	20.70	20.73	
10	16QAM	50	0	20.80	20.67	20.79	
Channel				26715	26865	27015	Tune-up limit (dBm)
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.80	22.65	22.73	24
5	QPSK	1	12	22.75	22.59	22.68	
5	QPSK	1	24	22.74	22.66	22.79	
5	QPSK	12	0	21.83	21.67	21.73	23
5	QPSK	12	7	21.84	21.63	21.76	
5	QPSK	12	13	21.80	21.58	21.78	
5	QPSK	25	0	21.77	21.65	21.73	
5	16QAM	1	0	22.14	21.98	22.02	23
5	16QAM	1	12	22.07	21.94	21.99	
5	16QAM	1	24	22.07	21.97	22.05	
5	16QAM	12	0	20.86	20.69	20.74	22
5	16QAM	12	7	20.84	20.70	20.76	
5	16QAM	12	13	20.80	20.64	20.83	
5	16QAM	25	0	20.81	20.63	20.73	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.76	22.62	22.69	24
3	QPSK	1	8	22.75	22.60	22.77	
3	QPSK	1	14	22.74	22.56	22.75	
3	QPSK	8	0	21.78	21.64	21.74	23
3	QPSK	8	4	21.83	21.62	21.81	
3	QPSK	8	7	21.76	21.58	21.76	
3	QPSK	15	0	21.76	21.63	21.79	
3	16QAM	1	0	22.07	21.94	21.97	23
3	16QAM	1	8	22.10	21.90	22.08	
3	16QAM	1	14	22.07	21.88	22.03	
3	16QAM	8	0	20.83	20.68	20.77	22
3	16QAM	8	4	20.87	20.71	20.89	
3	16QAM	8	7	20.83	20.65	20.85	
3	16QAM	15	0	20.82	20.64	20.80	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.66	22.50	22.68	24
1.4	QPSK	1	3	22.70	22.54	22.74	
1.4	QPSK	1	5	22.65	22.50	22.67	
1.4	QPSK	3	0	22.71	22.55	22.73	
1.4	QPSK	3	1	22.77	22.60	22.78	
1.4	QPSK	3	3	22.70	22.54	22.73	
1.4	QPSK	6	0	21.66	21.53	21.66	23
1.4	16QAM	1	0	21.95	21.81	21.99	23
1.4	16QAM	1	3	22.01	21.88	22.04	
1.4	16QAM	1	5	21.96	21.79	21.95	
1.4	16QAM	3	0	21.75	21.55	21.76	
1.4	16QAM	3	1	21.80	21.61	21.81	
1.4	16QAM	3	3	21.75	21.57	21.75	
1.4	16QAM	6	0	20.79	20.58	20.78	22



Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.92	22.70	22.72	
15	QPSK	1	37	22.75	22.65	22.90	24
15	QPSK	1	74	22.82	22.68	22.60	
15	QPSK	36	0	21.87	21.72	21.59	
15	QPSK	36	20	21.98	21.62	21.87	23
15	QPSK	36	39	21.77	21.56	21.65	
15	QPSK	75	0	21.79	21.64	21.88	
15	16QAM	1	0	22.25	22.22	21.95	23
15	16QAM	1	37	22.17	21.86	22.06	
15	16QAM	1	74	22.21	22.07	22.10	
15	16QAM	36	0	20.71	20.71	20.87	22
15	16QAM	36	20	20.82	20.67	20.86	
15	16QAM	36	39	20.66	20.70	20.72	
15	16QAM	75	0	20.67	20.66	20.87	
Channel				26740	26865	26990	
Frequency (MHz)				819	831.5	844	Tune-up limit (dBm)
10	QPSK	1	0	22.90	22.67	22.64	24
10	QPSK	1	25	22.75	22.59	22.81	
10	QPSK	1	49	22.82	22.65	22.57	
10	QPSK	25	0	21.83	21.65	21.55	23
10	QPSK	25	12	21.89	21.61	21.78	
10	QPSK	25	25	21.74	21.54	21.61	
10	QPSK	50	0	21.71	21.56	21.82	
10	16QAM	1	0	22.15	22.16	21.93	23
10	16QAM	1	25	22.11	21.78	22.01	
10	16QAM	1	49	22.18	21.99	22.07	
10	16QAM	25	0	20.63	20.61	20.83	22
10	16QAM	25	12	20.82	20.61	20.79	
10	16QAM	25	25	20.64	20.68	20.69	
10	16QAM	50	0	20.64	20.59	20.81	
Channel				26715	26865	27015	
Frequency (MHz)				816.5	831.5	846.5	Tune-up limit (dBm)
5	QPSK	1	0	22.61	22.63	22.69	24
5	QPSK	1	12	22.70	22.63	22.74	
5	QPSK	1	24	22.62	22.57	22.89	
5	QPSK	12	0	21.87	21.74	21.56	23
5	QPSK	12	7	21.70	21.64	21.75	
5	QPSK	12	13	21.80	21.58	21.60	
5	QPSK	25	0	21.85	21.59	21.70	
5	16QAM	1	0	22.06	22.07	21.96	23
5	16QAM	1	12	21.88	21.79	21.94	
5	16QAM	1	24	21.99	22.00	22.05	
5	16QAM	12	0	20.77	20.73	20.62	22
5	16QAM	12	7	20.68	20.57	20.57	
5	16QAM	12	13	20.87	20.53	20.88	
5	16QAM	25	0	20.70	20.51	20.65	
Channel				26705	26865	27025	Tune-up limit (dBm)
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.59	22.49	22.66	
3	QPSK	1	8	22.73	22.64	22.78	24
3	QPSK	1	14	22.80	22.43	22.82	



FCC SAR TEST REPORT

Report No. : FA220103002

3	QPSK	8	0	21.74	21.53	21.76	23
3	QPSK	8	4	21.68	21.71	21.73	
3	QPSK	8	7	21.75	21.57	21.84	
3	QPSK	15	0	21.59	21.53	21.68	
3	16QAM	1	0	22.05	21.99	21.89	23
3	16QAM	1	8	22.06	21.77	21.92	
3	16QAM	1	14	21.98	21.72	22.05	
3	16QAM	8	0	20.65	20.53	20.80	22
3	16QAM	8	4	20.90	20.66	20.89	
3	16QAM	8	7	20.89	20.66	20.81	
3	16QAM	15	0	20.68	20.66	20.66	
Channel				26697	26865	27033	Tune-up limit (dBm)
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.52	22.58	22.67	24
1.4	QPSK	1	3	22.51	22.35	22.54	
1.4	QPSK	1	5	22.47	22.43	22.50	
1.4	QPSK	3	0	22.67	22.58	22.83	
1.4	QPSK	3	1	22.76	22.62	22.71	
1.4	QPSK	3	3	22.64	22.46	22.68	
1.4	QPSK	6	0	21.65	21.36	21.64	23
1.4	16QAM	1	0	21.83	21.69	21.83	23
1.4	16QAM	1	3	21.94	21.70	21.88	
1.4	16QAM	1	5	21.99	21.60	21.96	
1.4	16QAM	3	0	21.65	21.42	21.66	
1.4	16QAM	3	1	21.60	21.68	21.71	
1.4	16QAM	3	3	21.66	21.48	21.71	
1.4	16QAM	6	0	20.89	20.46	20.79	22

Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26765	26865	26965	Tune-up limit (dBm)
Frequency (MHz)				821.5	831.5	841.5	
15	QPSK	1	0	22.85	22.69	22.65	24
15	QPSK	1	37	22.64	22.61	22.74	
15	QPSK	1	74	22.61	22.57	22.71	
15	QPSK	36	0	21.79	21.75	21.78	23
15	QPSK	36	20	21.63	21.52	21.71	
15	QPSK	36	39	21.93	21.54	21.87	
15	QPSK	75	0	21.63	21.75	21.71	
15	16QAM	1	0	22.18	21.98	22.01	23
15	16QAM	1	37	22.17	21.95	21.81	
15	16QAM	1	74	21.99	22.04	22.19	
15	16QAM	36	0	20.76	20.71	20.78	22
15	16QAM	36	20	20.85	20.69	20.81	
15	16QAM	36	39	20.81	20.84	20.91	
15	16QAM	75	0	20.94	20.75	20.89	
Channel				26740	26865	26990	Tune-up limit (dBm)
Frequency (MHz)				819	831.5	844	
10	QPSK	1	0	22.82	22.68	22.61	24
10	QPSK	1	25	22.57	22.58	22.74	
10	QPSK	1	49	22.58	22.50	22.70	
10	QPSK	25	0	21.70	21.66	21.74	23
10	QPSK	25	12	21.62	21.52	21.62	
10	QPSK	25	25	21.87	21.53	21.83	
10	QPSK	50	0	21.60	21.67	21.69	



FCC SAR TEST REPORT

Report No. : FA220103002

10	16QAM	1	0	22.15	21.94	21.95	23
10	16QAM	1	25	22.13	21.94	21.80	
10	16QAM	1	49	21.92	22.00	22.15	
10	16QAM	25	0	20.74	20.63	20.72	22
10	16QAM	25	12	20.76	20.63	20.73	
10	16QAM	25	25	20.80	20.75	20.82	
10	16QAM	50	0	20.89	20.73	20.89	
Channel				26715	26865	27015	Tune-up limit
Frequency (MHz)				816.5	831.5	846.5	
5	QPSK	1	0	22.68	22.53	22.77	24
5	QPSK	1	12	22.84	22.45	22.76	
5	QPSK	1	24	22.76	22.73	22.65	
5	QPSK	12	0	21.73	21.58	21.68	23
5	QPSK	12	7	21.68	21.63	21.74	
5	QPSK	12	13	21.78	21.63	21.73	
5	QPSK	25	0	21.60	21.48	21.54	
5	16QAM	1	0	21.95	21.99	21.94	23
5	16QAM	1	12	22.12	22.00	21.83	
5	16QAM	1	24	21.89	21.87	22.08	
5	16QAM	12	0	20.71	20.59	20.60	22
5	16QAM	12	7	20.86	20.60	20.60	
5	16QAM	12	13	20.70	20.50	20.78	
5	16QAM	25	0	20.70	20.45	20.82	
Channel				26705	26865	27025	Tune-up limit
Frequency (MHz)				815.5	831.5	847.5	
3	QPSK	1	0	22.68	22.50	22.59	24
3	QPSK	1	8	22.63	22.49	22.61	
3	QPSK	1	14	22.82	22.37	22.59	
3	QPSK	8	0	21.64	21.50	21.75	23
3	QPSK	8	4	21.69	21.52	21.70	
3	QPSK	8	7	21.85	21.66	21.77	
3	QPSK	15	0	21.85	21.48	21.66	
3	16QAM	1	0	21.89	21.80	21.78	23
3	16QAM	1	8	22.13	21.77	22.16	
3	16QAM	1	14	22.02	21.78	22.12	
3	16QAM	8	0	20.89	20.50	20.77	22
3	16QAM	8	4	20.68	20.53	20.97	
3	16QAM	8	7	20.73	20.61	20.70	
3	16QAM	15	0	20.87	20.55	20.75	
Channel				26697	26865	27033	Tune-up limit
Frequency (MHz)				814.7	831.5	848.3	
1.4	QPSK	1	0	22.60	22.45	22.48	24
1.4	QPSK	1	3	22.70	22.39	22.64	
1.4	QPSK	1	5	22.62	22.47	22.64	
1.4	QPSK	3	0	22.64	22.60	22.82	
1.4	QPSK	3	1	22.72	22.41	22.74	
1.4	QPSK	3	3	22.66	22.39	22.65	
1.4	QPSK	6	0	21.54	21.34	21.74	23
1.4	16QAM	1	0	21.79	21.68	21.94	23
1.4	16QAM	1	3	21.91	21.73	22.07	
1.4	16QAM	1	5	22.00	21.67	21.79	
1.4	16QAM	3	0	21.61	21.58	21.63	
1.4	16QAM	3	1	21.75	21.51	21.75	
1.4	16QAM	3	3	21.82	21.41	21.82	
1.4	16QAM	6	0	20.82	20.46	20.75	22



<LTE Band 66>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	23.21	23.32	23.34	24
20	QPSK	1	49	23.09	23.24	23.01	
20	QPSK	1	99	23.24	23.06	23.03	
20	QPSK	50	0	22.34	22.43	22.19	23
20	QPSK	50	24	22.18	22.13	22.10	
20	QPSK	50	50	22.21	22.13	21.98	
20	QPSK	100	0	22.11	22.19	22.11	23
20	16QAM	1	0	22.62	22.74	22.73	
20	16QAM	1	49	22.36	22.59	22.22	
20	16QAM	1	99	22.53	22.50	22.37	22
20	16QAM	50	0	21.13	21.23	21.18	
20	16QAM	50	24	21.07	21.30	21.23	
20	16QAM	50	50	21.20	21.28	21.18	22
20	16QAM	100	0	21.22	21.35	21.25	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	23.58	23.42	23.30	24
15	QPSK	1	37	23.24	23.32	22.93	
15	QPSK	1	74	23.06	23.10	22.85	
15	QPSK	36	0	22.36	22.42	22.08	23
15	QPSK	36	20	22.13	22.22	21.99	
15	QPSK	36	39	22.19	22.32	21.98	
15	QPSK	75	0	22.08	22.17	22.18	23
15	16QAM	1	0	22.77	22.82	22.44	
15	16QAM	1	37	22.43	22.42	22.39	
15	16QAM	1	74	22.54	22.38	22.36	22
15	16QAM	36	0	21.20	21.44	21.16	
15	16QAM	36	20	21.31	21.18	21.16	
15	16QAM	36	39	21.28	21.14	21.11	22
15	16QAM	75	0	21.24	21.23	20.95	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	23.12	23.34	23.11	24
10	QPSK	1	25	23.09	23.28	23.08	
10	QPSK	1	49	23.20	23.16	22.94	
10	QPSK	25	0	22.26	22.17	22.04	23
10	QPSK	25	12	22.29	22.27	21.93	
10	QPSK	25	25	22.04	22.15	22.12	
10	QPSK	50	0	22.19	22.13	22.21	23
10	16QAM	1	0	22.53	22.58	22.35	
10	16QAM	1	25	22.30	22.44	22.36	
10	16QAM	1	49	22.42	22.38	22.27	22
10	16QAM	25	0	21.14	21.17	21.20	
10	16QAM	25	12	21.18	21.38	21.17	
10	16QAM	25	25	21.09	21.23	21.19	22
10	16QAM	50	0	21.36	21.36	21.03	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	23.03	23.13	22.91	24
5	QPSK	1	12	23.02	23.31	22.81	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	1	24	22.92	23.19	22.81	
5	QPSK	12	0	22.22	22.36	21.82	23
5	QPSK	12	7	21.97	22.18	21.83	
5	QPSK	12	13	22.11	22.10	21.89	
5	QPSK	25	0	22.06	22.31	21.80	
5	16QAM	1	0	22.47	22.50	22.14	23
5	16QAM	1	12	22.42	22.57	22.03	
5	16QAM	1	24	22.46	22.47	22.14	
5	16QAM	12	0	21.21	21.12	20.89	22
5	16QAM	12	7	20.96	21.18	20.93	
5	16QAM	12	13	21.10	21.10	20.80	
5	16QAM	25	0	20.95	21.27	20.92	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	23.04	23.30	22.87	24
3	QPSK	1	8	22.86	23.27	22.77	
3	QPSK	1	14	22.94	23.06	22.80	
3	QPSK	8	0	22.07	22.20	21.99	23
3	QPSK	8	4	21.97	22.09	21.86	
3	QPSK	8	7	21.94	22.25	21.84	
3	QPSK	15	0	22.11	22.03	21.96	
3	16QAM	1	0	22.25	22.59	22.16	23
3	16QAM	1	8	22.47	22.56	22.06	
3	16QAM	1	14	22.37	22.45	21.92	
3	16QAM	8	0	21.08	21.11	20.90	22
3	16QAM	8	4	21.09	21.29	21.03	
3	16QAM	8	7	21.15	21.17	20.83	
3	16QAM	15	0	21.05	21.28	20.99	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	23.09	23.01	22.74	24
1.4	QPSK	1	3	23.11	23.09	22.82	
1.4	QPSK	1	5	22.88	23.17	22.71	
1.4	QPSK	3	0	22.84	22.95	22.63	
1.4	QPSK	3	1	22.90	23.06	22.87	
1.4	QPSK	3	3	22.90	22.98	22.69	
1.4	QPSK	6	0	21.96	21.96	21.71	23
1.4	16QAM	1	0	22.30	22.36	21.97	23
1.4	16QAM	1	3	22.16	22.33	22.08	
1.4	16QAM	1	5	22.21	22.41	22.04	
1.4	16QAM	3	0	22.10	21.98	21.83	
1.4	16QAM	3	1	21.99	22.02	21.93	
1.4	16QAM	3	3	21.98	21.99	21.72	
1.4	16QAM	6	0	21.06	21.10	20.78	22



Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	23.40	23.47	23.38	
20	QPSK	1	49	23.15	23.24	23.07	24
20	QPSK	1	99	23.21	23.15	22.99	
20	QPSK	50	0	22.36	22.43	22.27	
20	QPSK	50	24	22.29	22.32	22.18	23
20	QPSK	50	50	22.32	22.24	22.09	
20	QPSK	100	0	22.29	22.36	22.18	
20	16QAM	1	0	22.72	22.81	22.69	23
20	16QAM	1	49	22.51	22.57	22.42	
20	16QAM	1	99	22.54	22.51	22.28	
20	16QAM	50	0	21.26	21.42	21.28	22
20	16QAM	50	24	21.18	21.37	21.20	
20	16QAM	50	50	21.21	21.30	21.09	
20	16QAM	100	0	21.15	21.34	21.20	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	23.38	23.45	23.29	
15	QPSK	1	37	23.17	23.22	23.02	24
15	QPSK	1	74	23.24	23.21	23.02	
15	QPSK	36	0	22.32	22.39	22.19	
15	QPSK	36	20	22.26	22.29	22.15	23
15	QPSK	36	39	22.21	22.23	22.07	
15	QPSK	75	0	22.27	22.31	22.12	
15	16QAM	1	0	22.69	22.76	22.60	23
15	16QAM	1	37	22.49	22.57	22.35	
15	16QAM	1	74	22.60	22.52	22.31	
15	16QAM	36	0	21.33	21.40	21.25	22
15	16QAM	36	20	21.25	21.31	21.15	
15	16QAM	36	39	21.19	21.26	21.04	
15	16QAM	75	0	21.26	21.33	21.14	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	23.31	23.34	23.17	
10	QPSK	1	25	23.17	23.25	23.03	24
10	QPSK	1	49	23.14	23.18	22.96	
10	QPSK	25	0	22.29	22.33	22.13	
10	QPSK	25	12	22.25	22.32	22.08	23
10	QPSK	25	25	22.22	22.24	22.06	
10	QPSK	50	0	22.23	22.30	22.12	
10	16QAM	1	0	22.58	22.63	22.46	23
10	16QAM	1	25	22.45	22.53	22.31	
10	16QAM	1	49	22.44	22.49	22.26	
10	16QAM	25	0	21.28	21.33	21.14	22
10	16QAM	25	12	21.25	21.29	21.10	
10	16QAM	25	25	21.19	21.23	21.02	
10	16QAM	50	0	21.26	21.32	21.10	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	23.15	23.27	22.97	
5	QPSK	1	12	23.10	23.22	22.92	24
5	QPSK	1	24	23.06	23.21	22.89	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.15	22.30	21.95	23
5	QPSK	12	7	22.14	22.25	21.95	
5	QPSK	12	13	22.08	22.22	21.90	
5	QPSK	25	0	22.11	22.23	21.94	
5	16QAM	1	0	22.49	22.57	22.27	23
5	16QAM	1	12	22.38	22.49	22.16	
5	16QAM	1	24	22.40	22.48	22.19	
5	16QAM	12	0	21.14	21.28	20.97	22
5	16QAM	12	7	21.13	21.31	20.98	
5	16QAM	12	13	21.10	21.25	20.94	
5	16QAM	25	0	21.12	21.27	20.98	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	23.09	23.21	22.89	24
3	QPSK	1	8	23.04	23.17	22.85	
3	QPSK	1	14	23.03	23.17	22.84	
3	QPSK	8	0	22.08	22.21	21.90	23
3	QPSK	8	4	22.14	22.25	21.92	
3	QPSK	8	7	22.04	22.23	21.90	
3	QPSK	15	0	22.06	22.19	21.92	
3	16QAM	1	0	22.41	22.52	22.18	23
3	16QAM	1	8	22.39	22.51	22.14	
3	16QAM	1	14	22.35	22.45	22.10	
3	16QAM	8	0	21.16	21.30	20.96	22
3	16QAM	8	4	21.17	21.29	20.97	
3	16QAM	8	7	21.11	21.26	20.96	
3	16QAM	15	0	21.10	21.26	20.93	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	23.10	23.10	22.78	24
1.4	QPSK	1	3	23.10	23.18	22.85	
1.4	QPSK	1	5	22.99	23.10	22.77	
1.4	QPSK	3	0	23.02	23.13	22.82	
1.4	QPSK	3	1	23.09	23.19	22.87	
1.4	QPSK	3	3	23.02	23.12	22.80	
1.4	QPSK	6	0	21.99	22.11	21.80	23
1.4	16QAM	1	0	22.30	22.43	22.07	23
1.4	16QAM	1	3	22.36	22.46	22.16	
1.4	16QAM	1	5	22.27	22.41	22.07	
1.4	16QAM	3	0	22.07	22.17	21.86	
1.4	16QAM	3	1	22.11	22.22	21.88	
1.4	16QAM	3	3	22.04	22.16	21.82	
1.4	16QAM	6	0	21.07	21.20	20.87	22



Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	23.37	23.36	23.44	
20	QPSK	1	49	23.04	23.22	22.92	24
20	QPSK	1	99	23.02	22.97	22.86	
20	QPSK	50	0	22.32	22.49	22.12	
20	QPSK	50	24	22.13	22.32	22.26	23
20	QPSK	50	50	22.41	22.15	21.93	
20	QPSK	100	0	22.21	22.46	22.11	
20	16QAM	1	0	22.70	22.64	22.62	23
20	16QAM	1	49	22.36	22.56	22.36	
20	16QAM	1	99	22.44	22.60	22.15	
20	16QAM	50	0	21.13	21.23	21.27	22
20	16QAM	50	24	21.27	21.26	21.21	
20	16QAM	50	50	21.02	21.15	20.91	
20	16QAM	100	0	21.03	21.20	21.03	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	23.46	23.38	23.30	
15	QPSK	1	37	23.11	23.31	22.97	24
15	QPSK	1	74	23.31	23.22	22.95	
15	QPSK	36	0	22.14	22.19	22.13	
15	QPSK	36	20	22.20	22.30	21.97	23
15	QPSK	36	39	22.10	22.17	22.04	
15	QPSK	75	0	22.15	22.28	22.15	
15	16QAM	1	0	22.52	22.57	22.45	23
15	16QAM	1	37	22.55	22.53	22.26	
15	16QAM	1	74	22.65	22.50	22.35	
15	16QAM	36	0	21.33	21.27	21.08	22
15	16QAM	36	20	21.06	21.22	21.22	
15	16QAM	36	39	21.12	21.16	20.88	
15	16QAM	75	0	21.33	21.31	21.06	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	23.32	23.26	22.97	
10	QPSK	1	25	22.98	23.29	23.06	24
10	QPSK	1	49	23.15	23.09	23.01	
10	QPSK	25	0	22.26	22.24	22.01	
10	QPSK	25	12	22.08	22.14	22.14	23
10	QPSK	25	25	22.18	22.10	21.87	
10	QPSK	50	0	22.06	22.21	21.94	
10	16QAM	1	0	22.47	22.54	22.37	23
10	16QAM	1	25	22.39	22.44	22.33	
10	16QAM	1	49	22.28	22.40	22.11	
10	16QAM	25	0	21.35	21.24	21.20	22
10	16QAM	25	12	21.15	21.17	21.12	
10	16QAM	25	25	21.26	21.19	20.93	
10	16QAM	50	0	21.22	21.24	21.16	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	23.06	23.29	22.87	
5	QPSK	1	12	22.91	23.08	22.99	24
5	QPSK	1	24	23.06	23.24	22.94	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.09	22.12	21.94	23
5	QPSK	12	7	22.19	22.31	21.85	
5	QPSK	12	13	21.91	22.32	21.85	
5	QPSK	25	0	21.99	22.08	21.95	
5	16QAM	1	0	22.33	22.61	22.30	23
5	16QAM	1	12	22.35	22.44	22.01	
5	16QAM	1	24	22.29	22.49	22.26	
5	16QAM	12	0	21.14	21.36	21.01	22
5	16QAM	12	7	21.19	21.17	20.78	
5	16QAM	12	13	20.90	21.15	20.99	
5	16QAM	25	0	21.13	21.09	21.06	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	23.14	23.05	22.81	24
3	QPSK	1	8	23.08	23.15	22.76	
3	QPSK	1	14	22.91	23.20	22.66	
3	QPSK	8	0	22.14	22.03	21.87	23
3	QPSK	8	4	22.10	22.09	21.81	
3	QPSK	8	7	21.91	22.32	21.74	
3	QPSK	15	0	21.95	22.19	21.72	
3	16QAM	1	0	22.47	22.58	22.14	23
3	16QAM	1	8	22.34	22.54	22.12	
3	16QAM	1	14	22.26	22.27	22.12	
3	16QAM	8	0	20.98	21.14	20.80	22
3	16QAM	8	4	21.11	21.19	20.98	
3	16QAM	8	7	21.10	21.13	21.05	
3	16QAM	15	0	21.16	21.13	20.90	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	23.01	23.03	22.84	24
1.4	QPSK	1	3	22.97	23.03	22.82	
1.4	QPSK	1	5	23.04	23.03	22.58	
1.4	QPSK	3	0	22.90	23.21	22.73	
1.4	QPSK	3	1	23.07	23.22	22.80	
1.4	QPSK	3	3	22.92	23.12	22.82	
1.4	QPSK	6	0	22.03	22.04	21.89	23
1.4	16QAM	1	0	22.22	22.40	22.14	23
1.4	16QAM	1	3	22.36	22.51	22.00	
1.4	16QAM	1	5	22.30	22.41	21.93	
1.4	16QAM	3	0	21.98	22.13	21.71	
1.4	16QAM	3	1	22.12	22.11	21.87	
1.4	16QAM	3	3	21.95	22.09	21.83	
1.4	16QAM	6	0	20.89	21.17	20.86	22



Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				132072	132322	132572	
Frequency (MHz)				1720	1745	1770	
20	QPSK	1	0	23.23	23.33	23.30	
20	QPSK	1	49	23.19	23.05	22.89	24
20	QPSK	1	99	23.22	23.00	22.81	
20	QPSK	50	0	22.39	22.53	22.20	
20	QPSK	50	24	22.18	22.26	22.26	23
20	QPSK	50	50	22.36	22.08	22.18	
20	QPSK	100	0	22.17	22.20	22.20	
20	16QAM	1	0	22.58	22.83	22.74	23
20	16QAM	1	49	22.36	22.40	22.43	
20	16QAM	1	99	22.52	22.51	22.17	
20	16QAM	50	0	21.07	21.41	21.19	22
20	16QAM	50	24	21.22	21.36	21.26	
20	16QAM	50	50	21.03	21.34	20.99	
20	16QAM	100	0	21.20	21.44	21.02	
Channel				132047	132322	132597	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1745	1772.5	
15	QPSK	1	0	23.45	23.47	23.39	
15	QPSK	1	37	23.08	23.21	22.88	24
15	QPSK	1	74	23.21	23.19	23.00	
15	QPSK	36	0	22.15	22.30	22.02	
15	QPSK	36	20	22.31	22.35	21.97	23
15	QPSK	36	39	22.07	22.25	22.16	
15	QPSK	75	0	22.35	22.15	22.11	
15	16QAM	1	0	22.72	22.70	22.67	23
15	16QAM	1	37	22.44	22.38	22.42	
15	16QAM	1	74	22.69	22.32	22.36	
15	16QAM	36	0	21.37	21.25	21.27	22
15	16QAM	36	20	21.05	21.35	21.07	
15	16QAM	36	39	21.01	21.27	20.87	
15	16QAM	75	0	21.18	21.34	21.09	
Channel				132022	132322	132622	Tune-up limit (dBm)
Frequency (MHz)				1715	1745	1775	
10	QPSK	1	0	23.28	23.31	22.99	
10	QPSK	1	25	22.99	23.23	23.06	24
10	QPSK	1	49	23.03	23.14	23.01	
10	QPSK	25	0	22.20	22.17	21.97	
10	QPSK	25	12	22.22	22.20	22.12	23
10	QPSK	25	25	22.02	22.17	21.98	
10	QPSK	50	0	22.24	22.12	21.98	
10	16QAM	1	0	22.60	22.61	22.54	23
10	16QAM	1	25	22.27	22.56	22.16	
10	16QAM	1	49	22.52	22.55	22.08	
10	16QAM	25	0	21.24	21.21	21.04	22
10	16QAM	25	12	21.12	21.18	21.14	
10	16QAM	25	25	21.27	21.26	20.91	
10	16QAM	50	0	21.35	21.29	20.94	
Channel				131997	132322	132647	Tune-up limit (dBm)
Frequency (MHz)				1712.5	1745	1777.5	
5	QPSK	1	0	23.15	23.15	22.84	
5	QPSK	1	12	23.02	23.19	23.02	24
5	QPSK	1	24	23.00	23.13	22.79	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	12	0	22.08	22.27	21.98	23
5	QPSK	12	7	22.10	22.05	21.94	
5	QPSK	12	13	22.14	22.31	21.76	
5	QPSK	25	0	22.19	22.27	21.97	
5	16QAM	1	0	22.37	22.59	22.25	23
5	16QAM	1	12	22.43	22.57	22.00	
5	16QAM	1	24	22.37	22.45	22.01	
5	16QAM	12	0	21.15	21.16	20.97	22
5	16QAM	12	7	21.09	21.34	20.98	
5	16QAM	12	13	21.14	21.34	21.04	
5	16QAM	25	0	20.94	21.10	20.79	
Channel				131987	132322	132657	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1745	1778.5	
3	QPSK	1	0	23.07	23.09	22.97	24
3	QPSK	1	8	22.88	23.20	22.93	
3	QPSK	1	14	22.90	23.22	22.64	
3	QPSK	8	0	22.14	22.23	21.98	23
3	QPSK	8	4	22.03	22.32	21.89	
3	QPSK	8	7	21.93	22.16	21.84	
3	QPSK	15	0	21.91	22.22	21.82	
3	16QAM	1	0	22.42	22.35	22.06	23
3	16QAM	1	8	22.26	22.40	22.16	
3	16QAM	1	14	22.39	22.52	22.01	
3	16QAM	8	0	21.00	21.33	20.81	22
3	16QAM	8	4	21.11	21.12	20.94	
3	16QAM	8	7	21.06	21.10	21.05	
3	16QAM	15	0	21.10	21.10	20.89	
Channel				131979	132322	132665	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1745	1779.3	
1.4	QPSK	1	0	23.13	23.04	22.65	24
1.4	QPSK	1	3	22.91	23.00	22.75	
1.4	QPSK	1	5	22.85	22.91	22.74	
1.4	QPSK	3	0	23.01	23.13	22.73	
1.4	QPSK	3	1	23.17	23.28	22.93	
1.4	QPSK	3	3	22.84	23.03	22.85	
1.4	QPSK	6	0	21.89	22.04	21.63	23
1.4	16QAM	1	0	22.35	22.33	22.16	23
1.4	16QAM	1	3	22.35	22.42	22.23	
1.4	16QAM	1	5	22.10	22.27	21.95	
1.4	16QAM	3	0	22.04	22.19	21.92	
1.4	16QAM	3	1	22.12	22.21	21.86	
1.4	16QAM	3	3	21.97	22.14	21.73	
1.4	16QAM	6	0	20.97	21.06	20.97	22

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

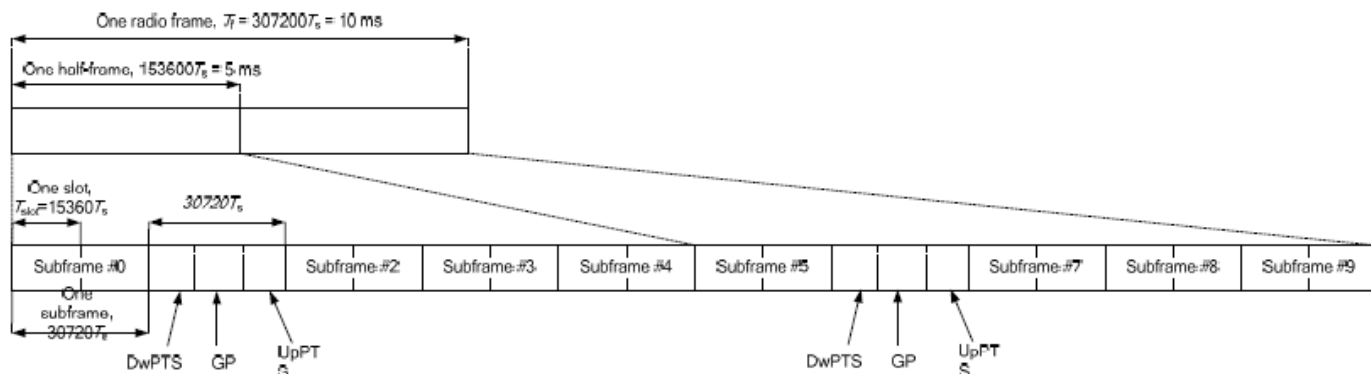


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.



<LTE Band 41>

Sierra 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	21.51	21.55	21.62	21.55	21.36	22.5
20	QPSK	1	49	21.32	21.33	21.34	21.29	21.11	
20	QPSK	1	99	21.49	21.40	21.26	21.24	20.92	
20	QPSK	50	0	20.46	20.68	20.58	20.44	20.27	21.5
20	QPSK	50	24	20.68	20.57	20.50	20.51	20.22	
20	QPSK	50	50	20.59	20.49	20.42	20.47	19.93	
20	QPSK	100	0	20.67	20.61	20.58	20.39	20.07	21.5
20	16QAM	1	0	21.05	20.96	21.02	20.80	20.94	
20	16QAM	1	49	20.82	20.88	20.76	20.69	20.34	
20	16QAM	1	99	20.73	21.08	20.89	20.70	20.45	20.5
20	16QAM	50	0	19.57	19.73	19.69	19.40	19.33	
20	16QAM	50	24	19.70	19.51	19.45	19.48	19.07	
20	16QAM	50	50	19.46	19.49	19.58	19.53	19.07	
20	16QAM	100	0	19.62	19.63	19.54	19.58	19.27	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	21.70	21.81	21.80	21.49	21.37	22.5
15	QPSK	1	37	21.55	21.71	21.55	21.58	21.17	
15	QPSK	1	74	21.73	21.88	21.66	21.51	21.30	
15	QPSK	36	0	20.66	20.57	20.54	20.40	20.19	21.5
15	QPSK	36	20	20.61	20.52	20.59	20.42	20.27	
15	QPSK	36	39	20.64	20.48	20.57	20.36	20.20	
15	QPSK	75	0	20.46	20.70	20.61	20.56	20.08	21.5
15	16QAM	1	0	21.17	20.89	21.18	20.98	20.71	
15	16QAM	1	37	20.96	20.87	20.74	20.76	20.58	
15	16QAM	1	74	20.96	21.00	20.81	20.58	20.40	20.5
15	16QAM	36	0	19.63	19.47	19.64	19.46	19.09	
15	16QAM	36	20	19.59	19.57	19.62	19.57	19.05	
15	16QAM	36	39	19.45	19.66	19.35	19.28	19.02	
15	16QAM	75	0	19.71	19.70	19.55	19.55	19.30	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	21.56	21.53	21.44	21.31	21.04	22.5
10	QPSK	1	25	21.64	21.54	21.58	21.51	21.12	
10	QPSK	1	49	21.49	21.43	21.52	21.32	21.12	
10	QPSK	25	0	20.51	20.71	20.44	20.47	20.33	21.5
10	QPSK	25	12	20.63	20.73	20.67	20.39	20.20	
10	QPSK	25	25	20.63	20.47	20.42	20.31	20.26	
10	QPSK	50	0	20.50	20.73	20.59	20.58	20.20	21.5
10	16QAM	1	0	20.87	21.00	21.06	20.70	20.69	
10	16QAM	1	25	21.12	21.13	20.92	20.77	20.45	
10	16QAM	1	49	20.95	20.95	20.91	20.80	20.46	20.5
10	16QAM	25	0	19.60	19.72	19.60	19.46	19.40	
10	16QAM	25	12	19.75	19.78	19.67	19.65	19.14	
10	16QAM	25	25	19.53	19.68	19.49	19.44	19.33	
10	16QAM	50	0	19.62	19.54	19.48	19.48	19.19	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	21.69	21.52	21.48	21.53	21.33	22.5
5	QPSK	1	12	21.72	21.63	21.44	21.40	21.19	



FCC SAR TEST REPORT

Report No. : FA220103002

5	QPSK	1	24	21.42	21.67	21.52	21.43	21.14	21.5
5	QPSK	12	0	20.68	20.61	20.76	20.57	20.26	
5	QPSK	12	7	20.71	20.71	20.48	20.63	20.42	
5	QPSK	12	13	20.55	20.61	20.57	20.56	20.16	
5	QPSK	25	0	20.81	20.82	20.59	20.69	20.16	
5	16QAM	1	0	20.94	21.17	21.10	20.82	20.64	21.5
5	16QAM	1	12	20.98	21.07	20.82	20.94	20.56	
5	16QAM	1	24	21.11	21.04	20.93	20.84	20.52	
5	16QAM	12	0	19.84	19.82	19.66	19.75	19.33	20.5
5	16QAM	12	7	19.76	19.94	19.84	19.71	19.52	
5	16QAM	12	13	19.62	19.68	19.79	19.58	19.40	
5	16QAM	25	0	19.84	19.90	19.60	19.62	19.39	

Sierra 6

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	22.5
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	21.59	21.64	21.64	21.48	21.35	22.5
20	QPSK	1	49	21.49	21.46	21.39	21.38	21.03	
20	QPSK	1	99	21.49	21.53	21.45	21.30	21.04	
20	QPSK	50	0	20.65	20.68	20.69	20.53	20.23	21.5
20	QPSK	50	24	20.61	20.64	20.56	20.46	20.14	
20	QPSK	50	50	20.52	20.58	20.47	20.44	20.07	
20	QPSK	100	0	20.61	20.63	20.53	20.46	20.19	21.5
20	16QAM	1	0	21.09	20.98	21.14	20.90	20.85	
20	16QAM	1	49	20.88	20.96	20.89	20.80	20.42	
20	16QAM	1	99	20.92	21.05	20.80	20.70	20.39	20.5
20	16QAM	50	0	19.66	19.70	19.70	19.51	19.27	
20	16QAM	50	24	19.63	19.65	19.58	19.50	19.22	
20	16QAM	50	50	19.61	19.65	19.53	19.49	19.21	20.5
20	16QAM	100	0	19.65	19.66	19.57	19.51	19.20	
Channel				39725	40173	40620	41068	41515	22.5
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	21.74	21.79	21.83	21.67	21.40	22.5
15	QPSK	1	37	21.68	21.74	21.63	21.58	21.26	
15	QPSK	1	74	21.68	21.80	21.65	21.46	21.22	
15	QPSK	36	0	20.64	20.62	20.66	20.50	20.24	21.5
15	QPSK	36	20	20.64	20.69	20.56	20.49	20.19	
15	QPSK	36	39	20.62	20.60	20.53	20.34	20.15	
15	QPSK	75	0	20.61	20.65	20.56	20.47	20.19	21.5
15	16QAM	1	0	21.10	21.04	21.09	20.96	20.75	
15	16QAM	1	37	21.01	20.99	20.93	20.80	20.52	
15	16QAM	1	74	20.94	21.03	20.91	20.69	20.54	20.5
15	16QAM	36	0	19.69	19.66	19.70	19.53	19.25	
15	16QAM	36	20	19.64	19.65	19.56	19.50	19.22	
15	16QAM	36	39	19.63	19.62	19.52	19.32	19.16	20.5
15	16QAM	75	0	19.66	19.68	19.56	19.51	19.22	
Channel				39700	40160	40620	41080	41540	22.5
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	21.61	21.60	21.61	21.51	21.20	22.5
10	QPSK	1	25	21.59	21.59	21.51	21.48	21.13	
10	QPSK	1	49	21.56	21.59	21.50	21.33	21.14	
10	QPSK	25	0	20.70	20.67	20.60	20.57	20.24	21.5
10	QPSK	25	12	20.67	20.66	20.59	20.57	20.25	
10	QPSK	25	25	20.63	20.67	20.56	20.41	20.19	



FCC SAR TEST REPORT

Report No. : FA220103002

10	QPSK	50	0	20.70	20.68	20.57	20.55	20.22	21.5
10	16QAM	1	0	21.04	21.06	21.10	20.87	20.67	
10	16QAM	1	25	21.08	21.06	20.96	20.89	20.52	
10	16QAM	1	49	21.04	21.05	20.94	20.76	20.57	
10	16QAM	25	0	19.72	19.75	19.64	19.56	19.31	20.5
10	16QAM	25	12	19.75	19.74	19.64	19.60	19.27	
10	16QAM	25	25	19.67	19.67	19.57	19.42	19.26	
10	16QAM	50	0	19.73	19.72	19.63	19.57	19.29	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	21.65	21.67	21.60	21.59	21.24	22.5
5	QPSK	1	12	21.62	21.66	21.58	21.54	21.22	
5	QPSK	1	24	21.60	21.61	21.53	21.42	21.18	
5	QPSK	12	0	20.69	20.74	20.66	20.65	20.29	21.5
5	QPSK	12	7	20.72	20.76	20.67	20.64	20.33	
5	QPSK	12	13	20.70	20.71	20.65	20.46	20.27	
5	QPSK	25	0	20.73	20.74	20.65	20.62	20.32	
5	16QAM	1	0	21.09	21.12	21.03	20.97	20.70	21.5
5	16QAM	1	12	21.03	21.03	21.01	20.93	20.66	
5	16QAM	1	24	21.08	21.08	21.00	20.81	20.68	
5	16QAM	12	0	19.79	19.80	19.75	19.73	19.40	20.5
5	16QAM	12	7	19.82	19.84	19.74	19.71	19.42	
5	16QAM	12	13	19.79	19.79	19.72	19.57	19.38	
5	16QAM	25	0	19.77	19.80	19.72	19.65	19.33	

Sierra 7

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	Tune-up limit (dBm)
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	21.65	21.52	21.49	21.56	21.43	22.5
20	QPSK	1	49	21.40	21.42	21.31	21.41	20.85	
20	QPSK	1	99	21.57	21.59	21.31	21.37	20.87	
20	QPSK	50	0	20.52	20.74	20.50	20.57	20.09	21.5
20	QPSK	50	24	20.46	20.57	20.58	20.54	19.99	
20	QPSK	50	50	20.58	20.66	20.55	20.42	20.16	
20	QPSK	100	0	20.51	20.72	20.53	20.45	20.05	
20	16QAM	1	0	21.17	20.92	21.18	20.90	20.68	21.5
20	16QAM	1	49	20.73	21.02	20.73	20.71	20.34	
20	16QAM	1	99	20.77	20.95	20.64	20.69	20.28	
20	16QAM	50	0	19.64	19.63	19.58	19.55	19.16	20.5
20	16QAM	50	24	19.57	19.51	19.47	19.51	19.17	
20	16QAM	50	50	19.59	19.54	19.48	19.43	19.11	
20	16QAM	100	0	19.66	19.51	19.39	19.36	19.26	
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	21.75	21.59	21.85	21.49	21.50	22.5
15	QPSK	1	37	21.77	21.63	21.62	21.56	21.35	
15	QPSK	1	74	21.70	21.86	21.58	21.38	21.07	
15	QPSK	36	0	20.48	20.43	20.63	20.56	20.14	21.5
15	QPSK	36	20	20.68	20.77	20.38	20.42	20.26	
15	QPSK	36	39	20.53	20.47	20.49	20.25	20.04	
15	QPSK	75	0	20.71	20.51	20.38	20.29	20.00	
15	16QAM	1	0	21.17	20.89	21.00	20.93	20.73	21.5
15	16QAM	1	37	20.82	20.99	20.74	20.81	20.43	
15	16QAM	1	74	20.87	20.98	20.84	20.53	20.43	



FCC SAR TEST REPORT

Report No. : FA220103002

15	16QAM	36	0	19.61	19.67	19.64	19.45	19.31	20.5
15	16QAM	36	20	19.57	19.71	19.51	19.30	19.31	
15	16QAM	36	39	19.57	19.46	19.40	19.23	19.24	
15	16QAM	75	0	19.73	19.74	19.55	19.38	19.18	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	21.57	21.53	21.66	21.48	21.18	22.5
10	QPSK	1	25	21.46	21.39	21.41	21.34	21.10	
10	QPSK	1	49	21.61	21.65	21.56	21.40	21.17	
10	QPSK	25	0	20.64	20.77	20.55	20.41	20.15	21.5
10	QPSK	25	12	20.62	20.54	20.43	20.54	20.14	
10	QPSK	25	25	20.44	20.49	20.59	20.44	20.03	
10	QPSK	50	0	20.60	20.54	20.67	20.62	20.03	
10	16QAM	1	0	21.08	21.03	20.91	20.73	20.51	21.5
10	16QAM	1	25	21.11	20.88	20.85	20.85	20.42	
10	16QAM	1	49	21.12	21.04	20.99	20.80	20.49	
10	16QAM	25	0	19.79	19.81	19.45	19.60	19.38	20.5
10	16QAM	25	12	19.61	19.74	19.74	19.58	19.37	
10	16QAM	25	25	19.49	19.49	19.42	19.26	19.27	
10	16QAM	50	0	19.76	19.79	19.65	19.49	19.38	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	21.65	21.50	21.56	21.59	20.97	22.5
5	QPSK	1	12	21.62	21.55	21.47	21.56	21.13	
5	QPSK	1	24	21.57	21.51	21.36	21.29	21.12	
5	QPSK	12	0	20.74	20.60	20.41	20.42	20.19	21.5
5	QPSK	12	7	20.80	20.59	20.67	20.63	20.25	
5	QPSK	12	13	20.57	20.81	20.72	20.48	20.24	
5	QPSK	25	0	20.73	20.76	20.79	20.49	20.06	
5	16QAM	1	0	21.12	20.98	21.21	20.96	20.83	21.5
5	16QAM	1	12	20.84	20.96	21.13	20.78	20.35	
5	16QAM	1	24	20.89	21.04	20.82	20.63	20.56	
5	16QAM	12	0	19.72	19.72	19.92	19.67	19.31	20.5
5	16QAM	12	7	19.83	19.91	19.59	19.59	19.39	
5	16QAM	12	13	19.83	19.83	19.78	19.54	19.14	
5	16QAM	25	0	19.60	19.80	19.73	19.49	19.18	

Sierra 8

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				39750	40185	40620	41055	41490	Tune-up limit (dBm)
Frequency (MHz)				2506	2549.5	2593	2636.5	2680	
20	QPSK	1	0	21.52	21.47	21.64	21.48	21.35	22.5
20	QPSK	1	49	21.29	21.47	21.39	21.38	21.03	
20	QPSK	1	99	21.37	21.45	21.45	21.30	21.04	
20	QPSK	50	0	20.56	20.52	20.69	20.53	20.23	21.5
20	QPSK	50	24	20.47	20.50	20.56	20.46	20.14	
20	QPSK	50	50	20.54	20.66	20.47	20.44	20.07	
20	QPSK	100	0	20.43	20.51	20.53	20.46	20.19	
20	16QAM	1	0	21.01	20.92	21.14	20.90	20.85	21.5
20	16QAM	1	49	20.77	20.81	20.89	20.80	20.42	
20	16QAM	1	99	20.99	20.91	20.80	20.70	20.39	
20	16QAM	50	0	19.46	19.73	19.70	19.51	19.27	20.5
20	16QAM	50	24	19.64	19.63	19.58	19.50	19.22	
20	16QAM	50	50	19.57	19.67	19.53	19.49	19.21	
20	16QAM	100	0	19.53	19.47	19.57	19.51	19.20	

Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5	
15	QPSK	1	0	21.66	21.66	21.87	21.53	21.41	22.5
15	QPSK	1	37	21.57	21.80	21.45	21.52	21.10	
15	QPSK	1	74	21.72	21.85	21.49	21.37	21.17	
15	QPSK	36	0	20.73	20.54	20.69	20.36	20.23	21.5
15	QPSK	36	20	20.63	20.55	20.48	20.42	20.09	
15	QPSK	36	39	20.64	20.43	20.43	20.18	20.24	
15	QPSK	75	0	20.66	20.67	20.64	20.44	20.26	
15	16QAM	1	0	21.07	21.05	21.15	20.81	20.62	21.5
15	16QAM	1	37	20.92	20.91	20.95	20.79	20.43	
15	16QAM	1	74	20.75	20.95	20.86	20.67	20.44	
15	16QAM	36	0	19.67	19.71	19.72	19.62	19.06	20.5
15	16QAM	36	20	19.68	19.73	19.64	19.37	19.21	
15	16QAM	36	39	19.43	19.70	19.34	19.22	19.09	
15	16QAM	75	0	19.47	19.62	19.64	19.52	19.29	
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)
Frequency (MHz)				2501	2547	2593	2639	2685	
10	QPSK	1	0	21.57	21.63	21.45	21.56	21.30	22.5
10	QPSK	1	25	21.49	21.52	21.31	21.32	21.21	
10	QPSK	1	49	21.42	21.41	21.48	21.29	20.98	
10	QPSK	25	0	20.67	20.60	20.45	20.57	20.24	21.5
10	QPSK	25	12	20.71	20.73	20.58	20.40	20.25	
10	QPSK	25	25	20.47	20.66	20.42	20.44	20.27	
10	QPSK	50	0	20.54	20.77	20.53	20.45	20.26	
10	16QAM	1	0	20.92	20.99	20.99	20.71	20.76	21.5
10	16QAM	1	25	21.13	20.99	20.77	20.88	20.58	
10	16QAM	1	49	21.09	21.14	20.81	20.83	20.61	
10	16QAM	25	0	19.55	19.83	19.58	19.60	19.40	20.5
10	16QAM	25	12	19.81	19.68	19.71	19.57	19.29	
10	16QAM	25	25	19.64	19.69	19.39	19.40	19.13	
10	16QAM	50	0	19.80	19.80	19.53	19.52	19.32	
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5	
5	QPSK	1	0	21.57	21.73	21.43	21.56	21.17	22.5
5	QPSK	1	12	21.47	21.62	21.57	21.35	21.18	
5	QPSK	1	24	21.46	21.60	21.62	21.45	21.26	
5	QPSK	12	0	20.71	20.57	20.51	20.67	20.33	21.5
5	QPSK	12	7	20.82	20.75	20.56	20.50	20.38	
5	QPSK	12	13	20.55	20.79	20.51	20.49	20.25	
5	QPSK	25	0	20.81	20.56	20.48	20.54	20.16	
5	16QAM	1	0	21.17	21.18	21.00	20.97	20.75	21.5
5	16QAM	1	12	20.98	21.02	21.06	20.92	20.69	
5	16QAM	1	24	21.04	20.95	21.04	20.76	20.59	
5	16QAM	12	0	19.69	19.76	19.82	19.54	19.40	20.5
5	16QAM	12	7	19.69	19.89	19.65	19.58	19.35	
5	16QAM	12	13	19.79	19.63	19.68	19.58	19.32	
5	16QAM	25	0	19.81	19.67	19.68	19.58	19.28	

<LTE Uplink carrier aggregation>

2CC Uplink Carrier Aggregation	
Number	Combination
1	7C
2	41C

<Intra-band>
General Note:

- The device supports intra-band uplink carrier aggregation for LTE B7/B41 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<7C>
Sierra 5

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.01	23
21100	20902	QPSK	1	0	1	99	2	0	21.07	23
21350	21152	QPSK	1	0	1	99	2	0	21.17	23

Sierra 6

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.08	23
21100	20902	QPSK	1	0	1	99	2	0	21.13	23
21350	21152	QPSK	1	0	1	99	2	0	21.35	23

Sierra 7

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.05	23
21100	20902	QPSK	1	0	1	99	2	0	21.06	23
21350	21152	QPSK	1	0	1	99	2	0	21.22	23

Sierra 8

CA_7C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	0	0	0	1	0	21.04	23
21100	20902	QPSK	1	0	1	99	2	0	21.08	23
21350	21152	QPSK	1	0	1	99	2	0	21.10	23

<41C>
Sierra 5

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	20.52	22.5
40185	39987	QPSK	1	0	1	99	2	0	20.91	22.5
40620	40422	QPSK	1	0	1	99	2	0	21.04	22.5
41055	40857	QPSK	1	0	1	99	2	0	20.72	22.5
41490	41292	QPSK	1	0	1	99	2	0	20.74	22.5

Sierra 6

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	20.54	22.5
40185	39987	QPSK	1	0	1	99	2	0	20.87	22.5
40620	40422	QPSK	1	0	1	99	2	0	21.03	22.5
41055	40857	QPSK	1	0	1	99	2	0	20.64	22.5
41490	41292	QPSK	1	0	1	99	2	0	20.68	22.5

Sierra 7

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	20.55	22.5
40185	39987	QPSK	1	0	1	99	2	0	20.84	22.5
40620	40422	QPSK	1	0	1	99	2	0	21.07	22.5
41055	40857	QPSK	1	0	1	99	2	0	20.61	22.5
41490	41292	QPSK	1	0	1	99	2	0	20.65	22.5

**Sierra 8**

CA_41C										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Total RB Size	Target MPR Level (dB)	Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset				
39750	39948	QPSK	1	0	0	0	1	0	20.52	22.5
40185	39987	QPSK	1	0	1	99	2	0	20.84	22.5
40620	40422	QPSK	1	0	1	99	2	0	20.99	22.5
41055	40857	QPSK	1	0	1	99	2	0	20.56	22.5
41490	41292	QPSK	1	0	1	99	2	0	20.56	22.5

11. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - c. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA /to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA , and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B12/B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4/5 SAR test was covered by Band 66/26; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**11.1 Body SAR****<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Module	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	Sierra 5	9538	1907.6	24.06	24.50	1.107	0.15	0.053	0.059
	WCDMA II	RMC 12.2Kbps	Back	0mm	Sierra 5	9538	1907.6	24.06	24.50	1.107	0.05	0.016	0.018
	WCDMA II	RMC 12.2Kbps	Front	0mm	Sierra 6	9538	1907.6	24.05	24.50	1.109	0.02	0.028	0.031
	WCDMA II	RMC 12.2Kbps	Back	0mm	Sierra 6	9538	1907.6	24.05	24.50	1.109	0.09	0.041	0.045
	WCDMA II	RMC 12.2Kbps	Front	0mm	Sierra 7	9538	1907.6	23.93	24.50	1.140	-0.06	0.048	0.055
	WCDMA II	RMC 12.2Kbps	Back	0mm	Sierra 7	9538	1907.6	23.93	24.50	1.140	-0.15	0.019	0.022
	WCDMA II	RMC 12.2Kbps	Front	0mm	Sierra 8	9400	1880	23.93	24.50	1.140	-0.03	0.027	0.031
01	WCDMA II	RMC 12.2Kbps	Back	0mm	Sierra 8	9400	1880	23.93	24.50	1.140	-0.13	0.055	0.063
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Sierra 5	1413	1732.6	22.84	24.00	1.306	0.15	0.019	0.025
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Sierra 5	1413	1732.6	22.84	24.00	1.306	-0.03	0.018	0.024
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Sierra 6	1413	1732.6	23.07	24.00	1.239	0.15	0.037	0.046
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Sierra 6	1413	1732.6	23.07	24.00	1.239	0.03	0.029	0.036
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Sierra 7	1413	1732.6	23.07	24.00	1.239	-0.06	0.019	0.024
	WCDMA IV	RMC 12.2Kbps	Back	0mm	Sierra 7	1413	1732.6	23.07	24.00	1.239	0.09	0.026	0.032
	WCDMA IV	RMC 12.2Kbps	Front	0mm	Sierra 8	1513	1752.6	23.02	24.00	1.253	0.01	0.033	0.041
02	WCDMA IV	RMC 12.2Kbps	Back	0mm	Sierra 8	1513	1752.6	23.02	24.00	1.253	-0.03	0.050	0.063
	WCDMA V	RMC 12.2Kbps	Front	0mm	Sierra 5	4233	846.6	22.70	24.00	1.349	-0.04	0.013	0.018
	WCDMA V	RMC 12.2Kbps	Back	0mm	Sierra 5	4233	846.6	22.70	24.00	1.349	0.08	0.010	0.013
	WCDMA V	RMC 12.2Kbps	Front	0mm	Sierra 6	4132	826.4	22.68	24.00	1.355	-0.15	0.017	0.023
	WCDMA V	RMC 12.2Kbps	Back	0mm	Sierra 6	4132	826.4	22.68	24.00	1.355	-0.16	0.014	0.019
	WCDMA V	RMC 12.2Kbps	Front	0mm	Sierra 7	4233	846.6	22.74	24.00	1.337	0.01	0.011	0.015
	WCDMA V	RMC 12.2Kbps	Back	0mm	Sierra 7	4233	846.6	22.74	24.00	1.337	0.05	0.013	0.017
03	WCDMA V	RMC 12.2Kbps	Front	0mm	Sierra 8	4182	836.4	22.56	24.00	1.393	-0.14	0.023	0.032
	WCDMA V	RMC 12.2Kbps	Back	0mm	Sierra 8	4182	836.4	22.56	24.00	1.393	-0.04	0.010	0.013

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Module	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Sierra 5	19100	1900	23.21	24.00	1.199	0.08	0.050	0.060
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Sierra 5	19100	1900	22.28	23.00	1.180	0.1	0.038	0.045
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Sierra 5	19100	1900	23.21	24.00	1.199	0.04	0.016	0.019
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Sierra 5	19100	1900	22.28	23.00	1.180	-0.17	0.013	0.015
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Sierra 6	19100	1900	23.29	24.00	1.178	0.16	0.023	0.027
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Sierra 6	19100	1900	22.24	23.00	1.191	0.07	0.018	0.021
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Sierra 6	19100	1900	23.29	24.00	1.178	0.06	0.042	0.049
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Sierra 6	19100	1900	22.24	23.00	1.191	0.08	0.031	0.037
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Sierra 7	19100	1900	23.11	24.00	1.227	-0.03	0.039	0.048
	LTE Band 2	20M	QPSK	50	0	Front	0mm	Sierra 7	19100	1900	22.17	23.00	1.211	-0.08	0.030	0.037
	LTE Band 2	20M	QPSK	1	0	Back	0mm	Sierra 7	19100	1900	23.11	24.00	1.227	0.02	0.018	0.022
	LTE Band 2	20M	QPSK	50	0	Back	0mm	Sierra 7	19100	1900	22.17	23.00	1.211	-0.04	0.014	0.017
	LTE Band 2	20M	QPSK	1	0	Front	0mm	Sierra 8	19100	1900	22.96	24.00	1.271	-0.15	0.030	0.038
	LTE Band 2	20M	QPSK	50	24	Front	0mm	Sierra 8	19100	1900	22.16	23.00	1.213	-0.03	0.025	0.030
04	LTE Band 2	20M	QPSK	1	0	Back	0mm	Sierra 8	19100	1900	22.96	24.00	1.271	-0.1	0.053	0.067
	LTE Band 2	20M	QPSK	50	24	Back	0mm	Sierra 8	19100	1900	22.16	23.00	1.213	-0.15	0.041	0.050
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Sierra 5	20850	2510	22.05	23.00	1.245	-0.13	0.097	0.121
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Sierra 5	21100	2535	20.95	22.00	1.274	0.14	0.068	0.087
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Sierra 5	20850	2510	22.05	23.00	1.245	-0.04	0.018	0.022
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Sierra 5	21100	2535	20.95	22.00	1.274	0.15	0.015	0.019
	LTE Band 7C	20M	QPSK	1	0	Front	0mm	Sierra 5	21350	2560	21.17	23.00	1.524	-0.01	0.079	0.120
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Sierra 6	20850	2510	21.96	23.00	1.271	-0.15	0.014	0.018
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Sierra 6	21100	2535	20.88	22.00	1.294	-0.06	0.014	0.018
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Sierra 6	20850	2510	21.96	23.00	1.271	0.08	0.065	0.083
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Sierra 6	21100	2535	20.88	22.00	1.294	-0.07	0.055	0.071
	LTE Band 7C	20M	QPSK	1	0	Back	0mm	Sierra 6	21350	2560	21.35	23.00	1.462	0.01	0.056	0.082
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Sierra 7	20850	2510	21.90	23.00	1.288	-0.04	0.061	0.079
	LTE Band 7	20M	QPSK	50	24	Front	0mm	Sierra 7	21100	2535	20.96	22.00	1.271	-0.08	0.048	0.061
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Sierra 7	20850	2510	21.90	23.00	1.288	-0.13	0.014	0.018
	LTE Band 7	20M	QPSK	50	24	Back	0mm	Sierra 7	21100	2535	20.96	22.00	1.271	-0.09	0.011	0.014
	LTE Band 7C	20M	QPSK	1	0	Front	0mm	Sierra 7	21350	2560	21.22	23.00	1.507	-0.03	0.052	0.078
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Sierra 8	20850	2510	21.82	23.00	1.312	0.17	0.018	0.024
	LTE Band 7	20M	QPSK	50	50	Front	0mm	Sierra 8	21100	2535	20.91	22.00	1.285	0.17	0.011	0.014
05	LTE Band 7	20M	QPSK	1	0	Back	0mm	Sierra 8	20850	2510	21.82	23.00	1.312	-0.13	0.099	0.130
	LTE Band 7	20M	QPSK	50	50	Back	0mm	Sierra 8	21100	2535	20.91	22.00	1.285	-0.06	0.071	0.091
	LTE Band 7C	20M	QPSK	1	0	Back	0mm	Sierra 8	21350	2560	21.10	23.00	1.549	-0.13	0.077	0.119
	LTE Band 12	10M	QPSK	1	0	Front	0mm	Sierra 5	23095	707.5	22.80	24.00	1.318	0.15	0.013	0.017
	LTE Band 12	10M	QPSK	25	12	Front	0mm	Sierra 5	23095	707.5	21.89	23.00	1.291	0.05	0.009	0.012
	LTE Band 12	10M	QPSK	1	0	Back	0mm	Sierra 5	23095	707.5	22.80	24.00	1.318	0.01	0.006	0.008
	LTE Band 12	10M	QPSK	25	12	Back	0mm	Sierra 5	23095	707.5	21.89	23.00	1.291	-0.03	0.005	0.006
	LTE Band 12	10M	QPSK	1	49	Front	0mm	Sierra 6	23095	707.5	22.84	24.00	1.306	0.13	0.010	0.013
	LTE Band 12	10M	QPSK	25	25	Front	0mm	Sierra 6	23095	707.5	21.96	23.00	1.271	-0.18	0.009	0.011
06	LTE Band 12	10M	QPSK	1	49	Back	0mm	Sierra 6	23095	707.5	22.84	24.00	1.306	0.01	0.025	0.033
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Sierra 6	23095	707.5	21.96	23.00	1.271	0.11	0.018	0.023
	LTE Band 12	10M	QPSK	1	49	Front	0mm	Sierra 7	23095	707.5	22.90	24.00	1.288	-0.1	0.017	0.022
	LTE Band 12	10M	QPSK	25	25	Front	0mm	Sierra 7	23095	707.5	21.97	23.00	1.268	-0.03	0.012	0.015
	LTE Band 12	10M	QPSK	1	49	Back	0mm	Sierra 7	23095	707.5	22.90	24.00	1.288	-0.17	0.008	0.011
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Sierra 7	23095	707.5	21.97	23.00	1.268	-0.15	0.006	0.007
	LTE Band 12	10M	QPSK	1	25	Front	0mm	Sierra 8	23095	707.5	22.86	24.00	1.300	-0.14	0.010	0.013
	LTE Band 12	10M	QPSK	25	25	Front	0mm	Sierra 8	23095	707.5	22.00	23.00	1.259	0.06	0.010	0.012
	LTE Band 12	10M	QPSK	1	25	Back	0mm	Sierra 8	23095	707.5	22.86	24.00	1.300	-0.08	0.019	0.025
	LTE Band 12	10M	QPSK	25	25	Back	0mm	Sierra 8	23095	707.5	22.00	23.00	1.259	-0.18	0.017	0.021



FCC SAR TEST REPORT

Report No. : FA220103002

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Module	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 13	10M	QPSK	1	0	Front	0mm	Sierra 5	23230	782	22.89	24.00	1.291	0.18	0.008	0.010
	LTE Band 13	10M	QPSK	25	12	Front	0mm	Sierra 5	23230	782	21.83	23.00	1.309	0.18	0.004	0.006
	LTE Band 13	10M	QPSK	1	0	Back	0mm	Sierra 5	23230	782	22.89	24.00	1.291	-0.17	0.013	0.017
	LTE Band 13	10M	QPSK	25	12	Back	0mm	Sierra 5	23230	782	21.83	23.00	1.309	-0.05	0.010	0.013
	LTE Band 13	10M	QPSK	1	25	Front	0mm	Sierra 6	23230	782	22.84	24.00	1.306	0.09	0.013	0.017
	LTE Band 13	10M	QPSK	25	12	Front	0mm	Sierra 6	23230	782	21.90	23.00	1.288	0.13	0.010	0.013
	LTE Band 13	10M	QPSK	1	25	Back	0mm	Sierra 6	23230	782	22.84	24.00	1.306	0.07	0.009	0.011
	LTE Band 13	10M	QPSK	25	12	Back	0mm	Sierra 6	23230	782	21.90	23.00	1.288	0.12	0.007	0.009
	LTE Band 13	10M	QPSK	1	0	Front	0mm	Sierra 7	23230	782	22.84	24.00	1.306	0.05	0.007	0.010
	LTE Band 13	10M	QPSK	25	12	Front	0mm	Sierra 7	23230	782	21.99	23.00	1.262	0.02	0.005	0.007
	LTE Band 13	10M	QPSK	1	0	Back	0mm	Sierra 7	23230	782	22.84	24.00	1.306	-0.18	0.017	0.022
	LTE Band 13	10M	QPSK	25	12	Back	0mm	Sierra 7	23230	782	21.99	23.00	1.262	-0.01	0.013	0.016
07	LTE Band 13	10M	QPSK	1	49	Front	0mm	Sierra 8	23230	782	22.84	24.00	1.306	-0.07	0.018	0.024
	LTE Band 13	10M	QPSK	25	12	Front	0mm	Sierra 8	23230	782	21.85	23.00	1.303	0	0.009	0.011
	LTE Band 13	10M	QPSK	1	49	Back	0mm	Sierra 8	23230	782	22.84	24.00	1.306	-0.06	0.010	0.013
	LTE Band 13	10M	QPSK	25	12	Back	0mm	Sierra 8	23230	782	21.85	23.00	1.303	-0.02	0.010	0.013
	LTE Band 26	15M	QPSK	1	37	Front	0mm	Sierra 5	26865	831.5	22.63	24.00	1.371	0.15	0.011	0.015
	LTE Band 26	15M	QPSK	36	39	Front	0mm	Sierra 5	26865	831.5	21.88	23.00	1.294	0.17	0.008	0.011
	LTE Band 26	15M	QPSK	1	37	Back	0mm	Sierra 5	26865	831.5	22.63	24.00	1.371	-0.01	0.011	0.015
	LTE Band 26	15M	QPSK	36	39	Back	0mm	Sierra 5	26865	831.5	21.88	23.00	1.294	0.15	0.008	0.010
	LTE Band 26	15M	QPSK	1	0	Front	0mm	Sierra 6	26865	831.5	22.85	24.00	1.303	0.18	0.016	0.021
	LTE Band 26	15M	QPSK	36	0	Front	0mm	Sierra 6	26865	831.5	21.80	23.00	1.318	-0.09	0.013	0.017
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Sierra 6	26865	831.5	22.85	24.00	1.303	0.05	0.012	0.016
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Sierra 6	26865	831.5	21.80	23.00	1.318	0.1	0.010	0.013
	LTE Band 26	15M	QPSK	1	0	Front	0mm	Sierra 7	26865	831.5	22.70	24.00	1.349	0.08	0.010	0.013
	LTE Band 26	15M	QPSK	36	0	Front	0mm	Sierra 7	26865	831.5	21.72	23.00	1.343	0.15	0.008	0.011
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Sierra 7	26865	831.5	22.70	24.00	1.349	0	0.016	0.022
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Sierra 7	26865	831.5	21.72	23.00	1.343	-0.1	0.012	0.016
08	LTE Band 26	15M	QPSK	1	0	Front	0mm	Sierra 8	26865	831.5	22.69	24.00	1.352	-0.04	0.020	0.027
	LTE Band 26	15M	QPSK	36	0	Front	0mm	Sierra 8	26865	831.5	21.75	23.00	1.334	0.03	0.011	0.015
	LTE Band 26	15M	QPSK	1	0	Back	0mm	Sierra 8	26865	831.5	22.69	24.00	1.352	-0.03	0.009	0.012
	LTE Band 26	15M	QPSK	36	0	Back	0mm	Sierra 8	26865	831.5	21.75	23.00	1.334	0.01	0.007	0.010
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Sierra 5	132572	1770	23.34	24.00	1.164	-0.06	0.022	0.026
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Sierra 5	132322	1745	22.43	23.00	1.140	-0.03	0.015	0.017
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Sierra 5	132572	1770	23.34	24.00	1.164	-0.09	0.025	0.029
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Sierra 5	132322	1745	22.43	23.00	1.140	0.03	0.017	0.019
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Sierra 6	132322	1745	23.47	24.00	1.130	0.17	0.038	0.043
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Sierra 6	132322	1745	22.43	23.00	1.140	0.18	0.031	0.035
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Sierra 6	132322	1745	23.47	24.00	1.130	0.08	0.028	0.032
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Sierra 6	132322	1745	22.43	23.00	1.140	0.06	0.022	0.025
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Sierra 7	132572	1770	23.44	24.00	1.138	0.08	0.024	0.027
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Sierra 7	132322	1745	22.49	23.00	1.125	-0.05	0.017	0.019
	LTE Band 66	20M	QPSK	1	0	Back	0mm	Sierra 7	132572	1770	23.44	24.00	1.138	0	0.028	0.032
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Sierra 7	132322	1745	22.49	23.00	1.125	-0.12	0.019	0.021
	LTE Band 66	20M	QPSK	1	0	Front	0mm	Sierra 8	132322	1745	23.33	24.00	1.167	-0.05	0.035	0.041
	LTE Band 66	20M	QPSK	50	0	Front	0mm	Sierra 8	132322	1745	22.53	23.00	1.114	-0.11	0.028	0.031
09	LTE Band 66	20M	QPSK	1	0	Back	0mm	Sierra 8	132322	1745	23.33	24.00	1.167	-0.08	0.045	0.053
	LTE Band 66	20M	QPSK	50	0	Back	0mm	Sierra 8	132322	1745	22.53	23.00	1.114	-0.05	0.035	0.039



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Module	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Sierra 5	40620	2593	21.62	22.50	1.225	62.9	1.006	-0.1	0.054	0.067
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Sierra 5	40185	2549.5	20.68	21.50	1.208	62.9	1.006	-0.1	0.040	0.049
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Sierra 5	40620	2593	21.62	22.50	1.225	62.9	1.006	0	0.010	0.012
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Sierra 5	40185	2549.5	20.68	21.50	1.208	62.9	1.006	0	0.006	0.007
	LTE Band 41C	20M	QPSK	1	0	Front	0mm	Sierra 5	40620	2593	21.04	22.50	1.400	62.9	1.006	0.08	0.042	0.059
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Sierra 6	40620	2593	21.64	22.50	1.219	62.9	1.006	0.14	0.016	0.020
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Sierra 6	40620	2593	20.69	21.50	1.205	62.9	1.006	0.09	0.013	0.015
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Sierra 6	40620	2593	21.64	22.50	1.219	62.9	1.006	0.05	0.043	0.053
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Sierra 6	40620	2593	20.69	21.50	1.205	62.9	1.006	-0.02	0.031	0.038
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Sierra 6	40620	2593	21.03	22.50	1.403	62.9	1.006	0.01	0.035	0.049
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Sierra 7	39750	2506	21.65	22.50	1.216	62.9	1.006	0.01	0.037	0.045
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Sierra 7	40185	2549.5	20.74	21.50	1.191	62.9	1.006	0.05	0.026	0.031
	LTE Band 41	20M	QPSK	1	0	Back	0mm	Sierra 7	39750	2506	21.65	22.50	1.216	62.9	1.006	0.15	0.006	0.008
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Sierra 7	40185	2549.5	20.74	21.50	1.191	62.9	1.006	0.01	0.006	0.007
	LTE Band 41C	20M	QPSK	1	0	Front	0mm	Sierra 7	40620	2593	21.07	22.50	1.390	62.9	1.006	0.1	0.031	0.043
	LTE Band 41	20M	QPSK	1	0	Front	0mm	Sierra 8	40620	2593	21.64	22.50	1.219	62.9	1.006	0.04	0.011	0.013
	LTE Band 41	20M	QPSK	50	0	Front	0mm	Sierra 8	40620	2593	20.69	21.50	1.205	62.9	1.006	0.04	0.008	0.010
10	LTE Band 41	20M	QPSK	1	0	Back	0mm	Sierra 8	40620	2593	21.64	22.50	1.219	62.9	1.006	-0.04	0.066	0.081
	LTE Band 41	20M	QPSK	50	0	Back	0mm	Sierra 8	40620	2593	20.69	21.50	1.205	62.9	1.006	-0.12	0.050	0.061
	LTE Band 41C	20M	QPSK	1	0	Back	0mm	Sierra 8	40620	2593	20.99	22.50	1.416	62.9	1.006	-0.03	0.048	0.068

**12. Simultaneous Transmission Analysis**

EM7545 + RILE910CXNF + TLZ-CM389F		
NO.	Simultaneous Transmission Configurations	Body
1.	NimbeLink1 + NimbeLink3 + Sierra 5 + Sierra6 + Sierra7 + Sierra8 + Module 1 WLAN2.4GHz + Module 1 WLAN5GHz + Module 1 Bluetooth	Yes
2.	NimbeLink1 + NimbeLink3 + Sierra 5 + Sierra6 + Sierra7 + Sierra8 + Module 2 WLAN2.4GHz + Module 2 WLAN5GHz + Module 2 Bluetooth	Yes

General Note:

- The RILE910CXNF WWAN module is integrated into this host. The WWAN maximum output power referenced from Sporton SAR report, report No.:210403 (FCC ID: 2AVDZTC4N) and the SAR results are used to perform simultaneous transmission analysis.
- The TLZ-CM389F WLAN/BT module is integrated into this host. The WLAN 2.4GHz/5GHz maximum output power referenced from Sporton SAR report, report No.:210401 (FCC ID: 2AVDZCM27) and the SAR results are used to perform simultaneous transmission analysis.
- The worst case WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6 \text{ W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{ W/kg}$.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) $\cdot [\sqrt{f(\text{GHz})}/x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is $< 5 \text{ mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

WLAN Module 1/2	Bluetooth Max Power	Exposure Position	All Positions
	7dBm	Estimated SAR (W/kg)	0.21 W/kg

12.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	1+2+3+4+5+6+7+9+11 Summed 1g SAR (W/kg)	1+2+3+4+5+6+8+10+12 Summed 1g SAR (W/kg)
	NimbeLink 1 WWAN	NimbeLink 3 WWAN	Sierra 5 WWAN	Sierra 6 WWAN	Sierra 7 WWAN	Sierra 8 WWAN	Module 1 WLAN2.4GHz	Module 2 WLAN2.4GHz	Module 1 WLAN5GHz	Module 2 WLAN5GHz	Module 1 Bluetooth	Module 2 Bluetooth		
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	Estimated 1g SAR (W/kg)		
Front	0.010	0.011	0.121	0.046	0.079	0.041	0.010	0.017	0.135	0.093	0.210	0.210	0.663	0.628
Back	0.012	0.014	0.029	0.083	0.032	0.130	0.007	0.013	0.108	0.044	0.210	0.210	0.625	0.567

Test Engineer : Hoodie HuZeng and Kells Chen

13. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [6] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [7] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [8] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [9] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.