

# RADIO TEST REPORT

## FCC ID: 2AVE2JB-P03

**Product:** SWIMMING POOL ALARM

**Trade Mark:** N/A

**Model No.:** JB-P03

**Famliy Model:** JB-P03S

**Report No.:** S19052700502001

**Issue Date:** 17 Dec. 2019

### Prepared for

Ningbo Tolion Security Technology Co.,Ltd  
No.8, Sanjiang Road, Wuxiang Industry Zone, Yinzhou District,  
Ningbo, China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China  
Tel.: +86-755-6115 9388  
Fax.: +86-755-6115 6599  
Website:<http://www.ntek.org.cn>

## Table of Contents

## Page

<b>1. TEST RESULT CERTIFICATION</b>	<b>4</b>
<b>2. SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATIONS</b>	<b>6</b>
<b>3.1 FACILITIES</b>	<b>6</b>
<b>3.2 LABORATORY ACCREDITATIONS AND LISTINGS</b>	<b>6</b>
<b>3.3 MEASUREMENT UNCERTAINTY</b>	<b>6</b>
<b>4. GENERAL DESCRIPTION OF EUT</b>	<b>7</b>
<b>5. DESCRIPTION OF TEST MODES</b>	<b>9</b>
<b>6. SETUP OF EQUIPMENT UNDER TEST</b>	<b>10</b>
<b>6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM</b>	<b>10</b>
<b>6.2 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)</b>	<b>11</b>
<b>6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>12</b>
<b>7. ANTENNA REQUIREMENT</b>	<b>13</b>
<b>7.1 STANDARD REQUIREMENT</b>	<b>13</b>
<b>7.2 EUT ANTENNA</b>	<b>13</b>
<b>8. CONDUCTED EMISSION MEASUREMENT</b>	<b>14</b>
<b>8.1 APPLICABLE STANDARD</b>	<b>14</b>
<b>8.2 CONFORMANCE LIMIT</b>	<b>14</b>
<b>8.3 MEASURING INSTRUMENTS</b>	<b>14</b>
<b>8.4 TEST CONFIGURATION</b>	<b>14</b>
<b>8.5 TEST PROCEDURE</b>	<b>14</b>
<b>8.6 TEST RESULTS</b>	<b>15</b>
<b>9. RADIATED EMISSION MEASUREMENT</b>	<b>16</b>
<b>9.1 APPLICABLE STANDARD</b>	<b>16</b>
<b>9.2 RADIATED EMISSION LIMITS</b>	<b>16</b>
<b>9.3 TEST PROCEDURE</b>	<b>17</b>
<b>9.4 TEST SETUP</b>	<b>19</b>
<b>9.5 TEST RESULTS</b>	<b>20</b>
<b>10. BANDWIDTH TEST</b>	<b>25</b>
<b>10.1 TEST PROCEDURE</b>	<b>25</b>
<b>10.2 DEVIATION FROM STANDARD</b>	<b>25</b>
<b>10.3 TEST SETUP</b>	<b>25</b>
<b>10.4 TEST RESULTS</b>	<b>26</b>
<b>11. TRANSMITTER TIMEOUT</b>	<b>27</b>

Table of Contents	Page
<b>11.1 REQUIREMENTS</b>	<b>27</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

## 1. TEST RESULT CERTIFICATION

Applicant's name .....	Ningbo Tolion Security Technology Co.,Ltd
Address .....	No.8, Sanjiang Road, Wuxiang Industry Zone, Yinzhou District, Ningbo, China
Manufacturer's Name .....	Ningbo Tolion Security Technology Co.,Ltd
Address .....	No.8, Sanjiang Road, Wuxiang Industry Zone, Yinzhou District, Ningbo, China
Product description	
Product name .....	SWIMMING POOL ALARM
Model and/or type reference .....	JB-P03
Family Model .....	JB-P03S

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
FCC 47 CFR Part 15, Subpart C KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013	Complied

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd. personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.


Date of Test : 12 Nov 2019 ~ 17 Dec. 2019



Testing Engineer : \_\_\_\_\_  
(Mary Hu)



Technical Manager : \_\_\_\_\_  
(Jason Chen)



Authorized Signatory : \_\_\_\_\_  
(Sam Chen)

## 2. SUMMARY OF TEST RESULTS

FCC Part15 (15.231a), Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	Note(1)
15.203	Antenna Requirement	Pass	
15.231	Radiated Spurious Emission	Pass	
15.231	Occupied Bandwidth	Pass	
15.231	Transmitter Timeout	Pass	

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The EUT is using a new battery

### 3. FACILITIES AND ACCREDITATIONS

#### 3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

#### 3.2 LABORATORY ACCREDITATIONS AND LISTINGS

##### Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.  
Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01  
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District Shenzhen, Guangdong, China

#### 3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(>6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

#### 4. GENERAL DESCRIPTION OF EUT

Equipment	SWIMMING POOL ALARM												
Trade Name	N/A												
Model Name	JB-P03												
Famliy Model	JB-P03S												
Model Difference	All models are the same circuit and RF module, except the model name.												
Product Description	<p>The EUT is a SWIMMING POOL ALARM</p> <table border="1"> <tr> <td>Operation Frequency:</td> <td>433.837MHz</td> </tr> <tr> <td>Modulation Type:</td> <td>OOK</td> </tr> <tr> <td>Number Of Channel</td> <td>1CH</td> </tr> <tr> <td>Antenna Designation:</td> <td>Cable Antenna</td> </tr> <tr> <td>Antenna Gain:</td> <td>0dBi</td> </tr> <tr> <td>Field Strength:</td> <td>84.49 dBuV/m</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specifications, please refer to the User's Manual.</p>	Operation Frequency:	433.837MHz	Modulation Type:	OOK	Number Of Channel	1CH	Antenna Designation:	Cable Antenna	Antenna Gain:	0dBi	Field Strength:	84.49 dBuV/m
Operation Frequency:	433.837MHz												
Modulation Type:	OOK												
Number Of Channel	1CH												
Antenna Designation:	Cable Antenna												
Antenna Gain:	0dBi												
Field Strength:	84.49 dBuV/m												
Channel List	Refer to below												
Power supply	DC 9V From 6 x 1.5V AAA alkaline batteries												
Adapter	N/A												
Battery	N/A												
HW Version	N/A												
SW Version	N/A												

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel	Frequency (MHz)
01	433.837MHz
--	--

## Revision History

## 5. DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX

## 6. SETUP OF EQUIPMENT UNDER TEST


### 6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

For Radiated Test Cases



E-1  
EUT

For Conducted Test Cases



Measurement  
Instrument

C1

EUT

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6.2 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	SWIMMING POOL ALARM	N/A	JB-P03	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	NO	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

### 6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2019.05.13	2020.05.12	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2019.05.13	2020.05.12	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2019.05.13	2020.05.12	1 year
4	Test Receiver	R&S	ESPI	101318	2019.05.13	2020.05.12	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2019.04.15	2020.04.14	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2019.05.13	2020.05.12	1 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2019.04.15	2020.04.14	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.04.15	2020.04.14	1 year
9	Amplifier	EMC	EMC051835 SE	980246	2019.08.04	2020.08.05	1 year
10	Amplifier	MITEQ	TTA1840-35-HG	177156	2019.08.04	2020.08.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2019.05.13	2020.05.12	1 year
12	Power Meter	DARE	RPR3006W	15I00041SN084	2019.08.04	2020.08.05	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

#### Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The EUT antenna is permanent attached Cable Antenna (Gain: 0dBi ). It comply with the standard requirement.

## 8. CONDUCTED EMISSION MEASUREMENT

### 8.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

### 8.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. \*Decreases with the logarithm of the frequency  
 2. The lower limit shall apply at the transition frequencies  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

### 8.4 Test Configuration

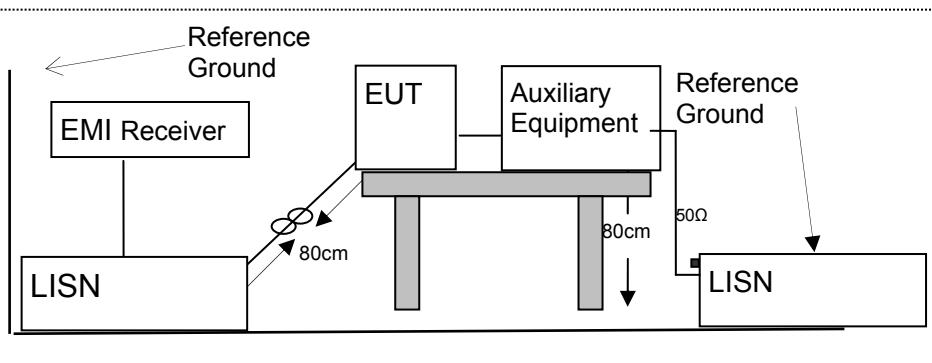

### 8.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**8.6 Test Results**

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N/A
Test Voltage :	N/A	Test Mode :	N/A

Note: Not applicable

## 9. RADIATED EMISSION MEASUREMENT

### 9.1 Applicable Standard

According to 15.209 and ANSI C63.10-2013

### 9.2 Radiated Emission Limits ( FCC 15.209 )

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission level (dBuV/m)=20log Emission level (uV/m).

### LIMITS OF RADIATED EMISSION MEASUREMENT ( FCC 15.231)

Fundamental Frequency (MHz)	Field Strength of fundamental (microvolts/meter)	Field Strength of Unwanted Emissions (microvolts/meter)
40.66 - 40.70	1,000	100
70 - 130	500	50
130 - 174	500 to 1,500 **	50 to 150**
174 - 260	1,500	150
260 - 470	1,500 to 5,000**	150 to 500 **
Above 470	5,000	500

Notes:

- (1) \*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $uV/m$  at 3 meters =  $22.72727(F) - 7407.273$ ; for the band 260-470 MHz,  $uV/m$  at 3 meters =  $16.66667(F) - 4398.667$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in 93 Section 15.209, whichever limit permits a higher field strength.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 90kHz for QP

### 9.3 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

## Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz


Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

#### 9.4 TEST SETUP


(A) For radiated emissions below 30MHz

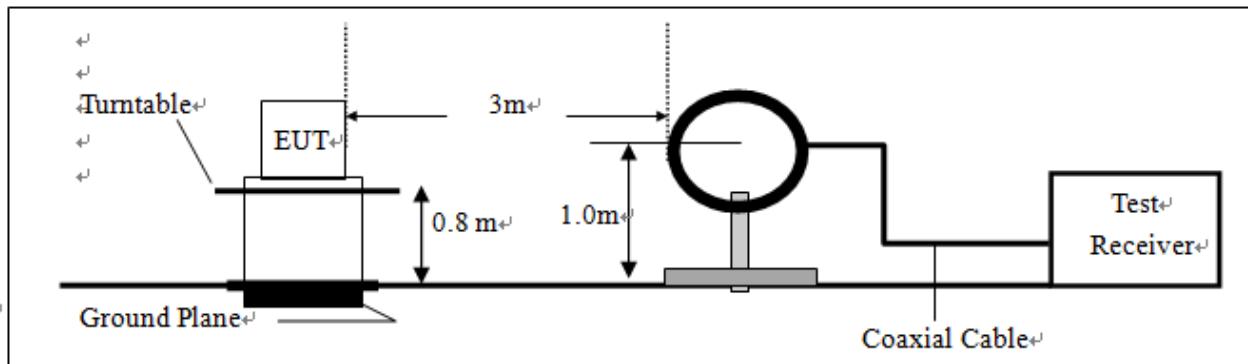

(B) For radiated emissions from 30MHz to 1000MHz

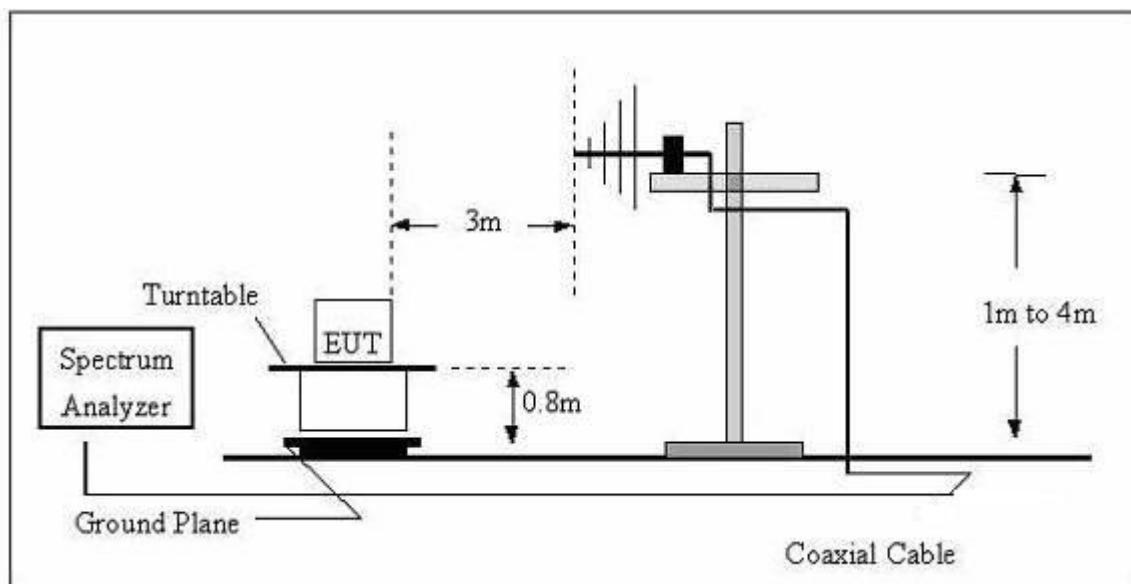

(C) For radiated emissions above 1000MHz

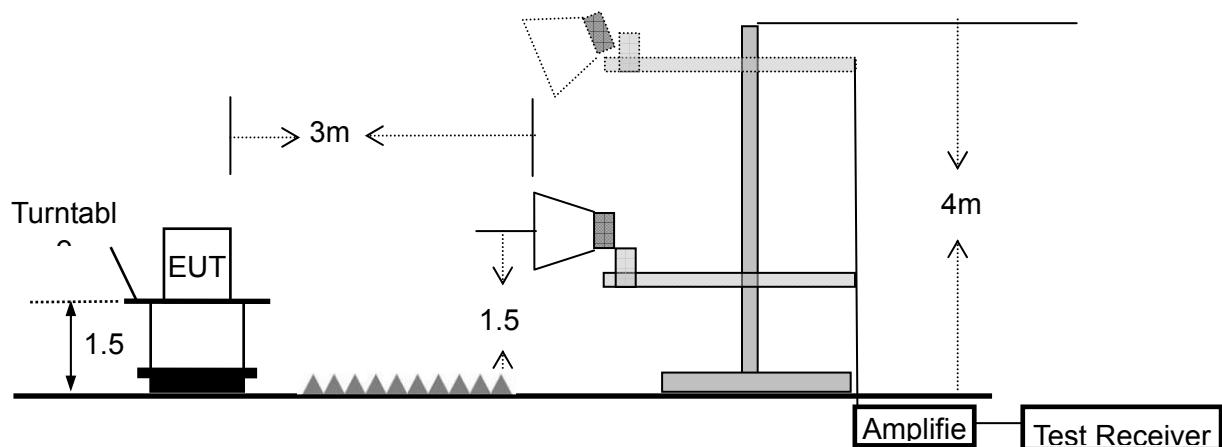

## 9.5 TEST RESULTS

### Emission below 30MHz (9KHz to 30MHz)

EUT:	SWIMMING POOL ALARM	Model No.:	JB-P03
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode 1	Test By:	Mary Hu


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

## ■ Emission below 1GHz (30MHz to 1GHz)

All the modulation modes have been tested, and the worst result was report as below:

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	Mode 1
Test Voltage :	DC 9V		

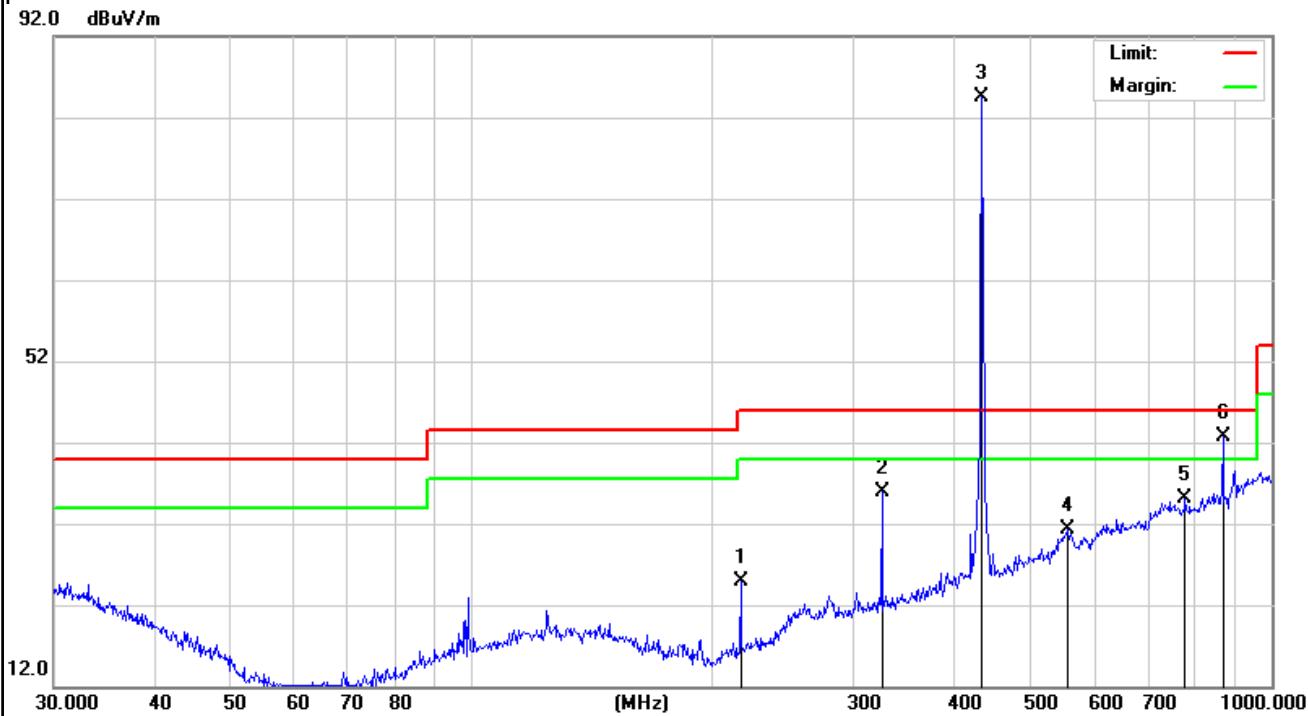


Polar (H/V)	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Remark
H	216.7828	13.62	11.28	24.90	46.00	-21.10	QP
H	325.5958	19.30	16.66	35.96	46.00	-10.04	QP
H	433.8370	64.34	20.15	84.49	92.86	-8.37	Peak
H	433.8370	-	-	51.85	72.86	-21.01	AVG
H	554.8253	6.77	24.48	31.25	46.00	-14.75	QP
H	779.6068	7.71	27.46	35.17	46.00	-10.83	QP
H	867.6740	14.09	28.63	42.72	72.86	-30.14	Peak
H	867.6740	-	-	10.08	52.86	-42.78	AVG

Note: The average value of fundamental frequency is:

Average= Peak Value+ 20log(Duty cycle), Final Average=Peak-32.64

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	Mode 1
Test Voltage :	DC 9V		

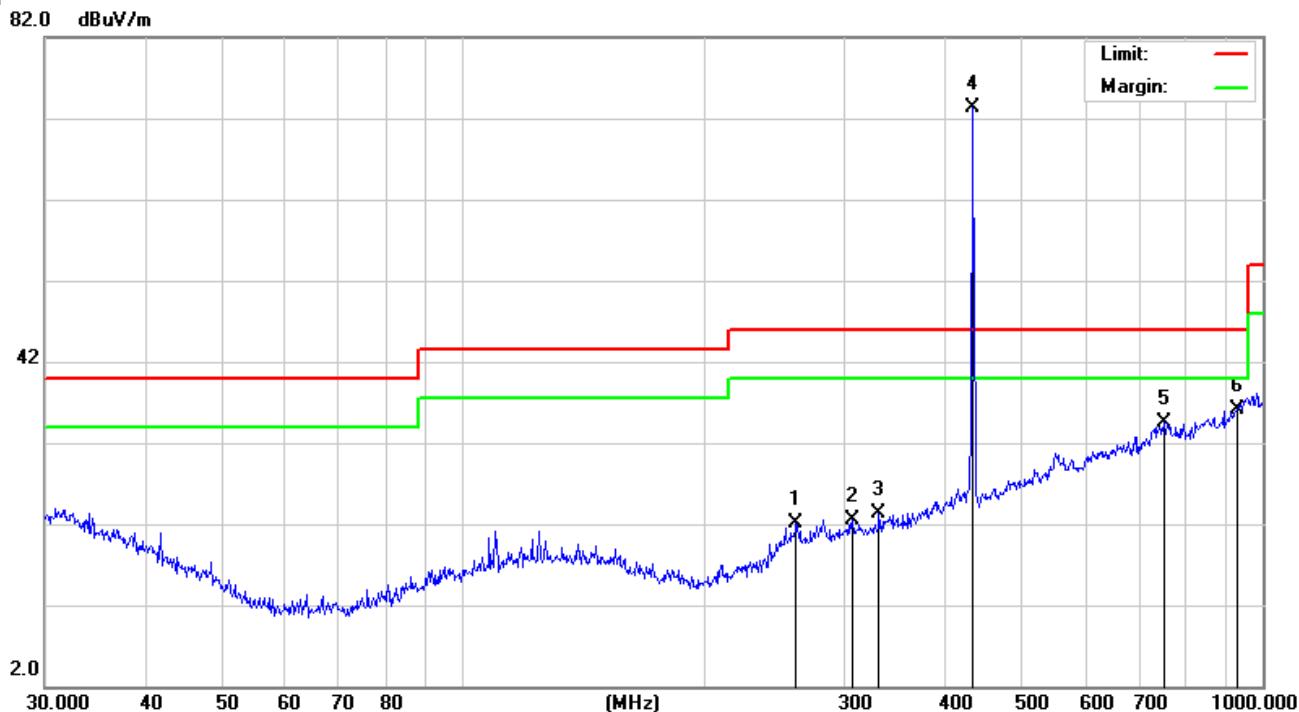

Polar (H/V)	Frequency (MHz)	Reading (dB <sub>UV</sub> /m)	Correct dB/m	Result (dB <sub>UV</sub> /m)	Limit (dB <sub>UV</sub> /m)	Over Limit (dB)	Remark
V	306.7536	6.19	16.25	22.44	46.00	-23.56	QP
V	331.3546	6.34	16.87	23.21	46.00	-22.79	QP
V	433.8370	53.16	20.15	73.31	92.86	-19.55	Peak
V	433.8370	-	-	40.67	72.86	-32.19	AVG
V	752.7432	7.08	27.51	34.59	46.00	-11.41	QP
V	867.6740	6.44	28.63	35.07	72.86	-37.79	Peak
V	867.6740	-	-	2.43	52.86	-50.43	AVG
V	929.0081	5.44	30.57	36.01	46.00	-9.99	QP

Note: The average value of fundamental frequency is:

Average= Peak Value+ 20log(Duty cycle), Final Average= Peak -32.64

## ■ Emission Above 1GHz (1GHz to 25GHz)

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 9V
Test Mode :	Mode 1	Polarization :	Horizontal

No.	Frequency	Reading	Correct Factor	Dutycycle Factor	Result	Limit	Over Limit	Remark
1	1301.511	41.36	-2.59	-	38.77	74	-35.23	Peak
2	1735.348	48.01	-1.26	-	46.75	74	-27.25	Peak
3	2410.307	39.78	1.20	-	40.98	74	-33.02	Peak
4	1301.511	-	-	-32.64	6.13	54	-47.87	AVG
5	1735.348	-	-	-32.64	14.11	54	-39.89	AVG
6	2410.307	-	-	-32.64	8.34	54	-45.66	AVG

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 9V
Test Mode :	Mode 1	Polarization :	Vertical

No.	Frequency	Reading	Correct Factor	Dutycycle Factor	Result	Limit	Over Limit	Remark
1	1301.511	41.55	-2.59	-	38.84	74	-35.16	Peak
2	1735.348	41.48	-1.28	-	39.42	74	-34.58	Peak
3	2164.628	39.63	1.94	-	43.65	74	-30.35	Peak
4	1301.511	-	-	-32.64	6.20	54	-47.80	AVG
5	1735.348	-	-	-32.64	6.78	54	-47.22	AVG
6	2164.628	-	-	-32.64	11.01	54	-42.99	AVG

**Note:** 1. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report(Y orientation).

2. \*Calculate Average value based on Duty Cycle correction factor:

$$\text{Duty Cycle} = \text{Ton}/(\text{Ton} + \text{Toff}) = (0.933)/40 = 0.023325 = 2.3325\%$$

$$\text{Duty Cycle factor} = 20\lg(\text{Duty Cycle}) = 20\lg(0.023325) = -32.64$$

$$\text{Average} = \text{Peak} + \text{Duty Cycle factor}$$

$$\text{2. FCC Limit for Average Measurement} = 16.6667(433.837) - 2833.342 = 4397.2891279 \text{ uV/m} \\ = 72.86 \text{ dBuV/m}$$

3. Pulse Desensitization Correction Factor

$$\text{Pulse Width(PW)} = 40\text{s} \quad 2/\text{PW} = 2/40000\text{ms} = 0.00005\text{kHz}$$

$$\text{RBW}(100\text{kHz}) > 2/\text{PW} (0.02\text{kHz}),$$

Therefore PDCF is not needed.

## Duty Cycle:

The duty cycle is simply the on time divided by the period:



The duration of one cycle = 40s

$T_{ON(\text{one hop})1} = 0.933\text{s}$

Effective period of the cycle = 0.933s,

Duty Cycle =  $0.933\text{s}/40\text{s} = 0.023325 = 2.3325\%$

## The duration of one cycle

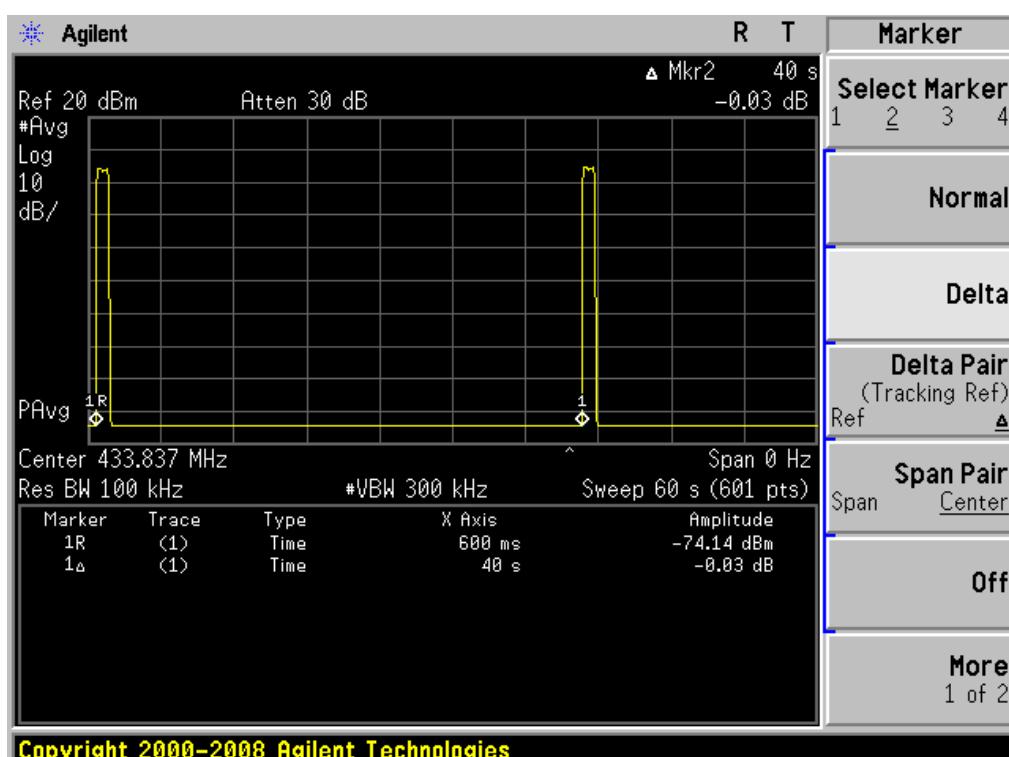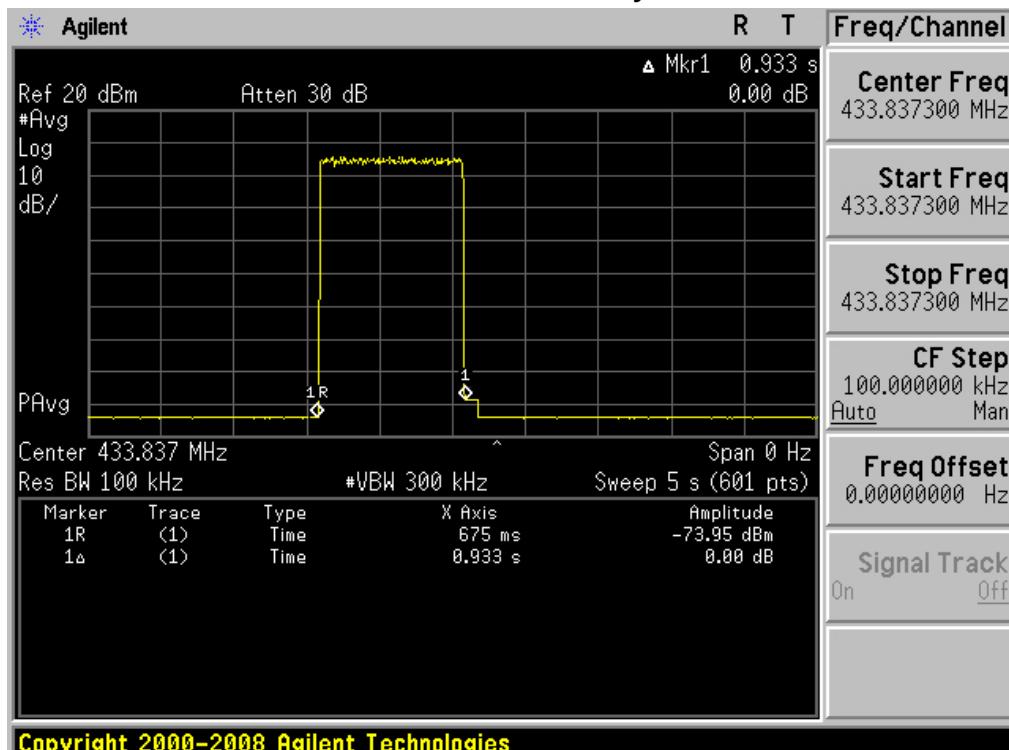

## 10. BANDWIDTH TEST

### 10.1 TEST PROCEDURE

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Limit:  $433.837\text{MHz} \times 0.25\% = 1084.5925\text{KHz}$

### 10.2 DEVIATION FROM STANDARD

No deviation.


### 10.3 TEST SETUP



## 10.4 TEST RESULTS

EUT :	SWIMMING POOL ALARM	Model Name :	JB-P03
Temperature :	26 °C	Relative Humidity :	53%
Pressure :	1020 hPa	Test Power :	DC 9V
Test Mode :	TX CH 1		

Test Channel	Frequency (MHz)	20 dBc Bandwidth (kHz)	<Limit (kHz)
CH01	433.837	6.711	1084.5925

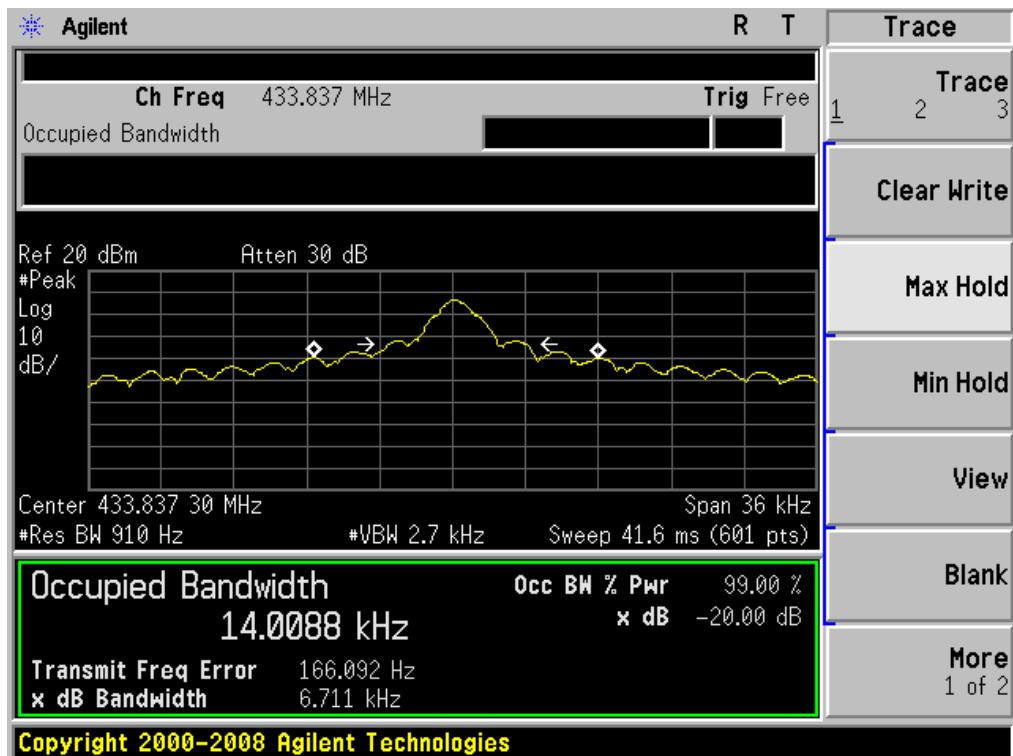



## 11. TRANSMITTER TIMEOUT

### 11.1 REQUIREMENTS

DEVICES OPERATED UNDER THE PROVISIONS OF THIS PARAGRAPH SHALL BE PROVIDED WITH A MEANS FOR AUTOMATICALLY LIMITING OPERATION SO THAT THE DURATION OF EACH TRANSMISSION SHALL NOT BE GREATER THAN ONE SECOND AND THE SILENT PERIOD BETWEEN TRANSMISSIONS SHALL BE AT LEAST 30 TIMES THE DURATION OF THE TRANSMISSION BUT IN NO CASE LESS THAN 10 SECONDS.

Test data

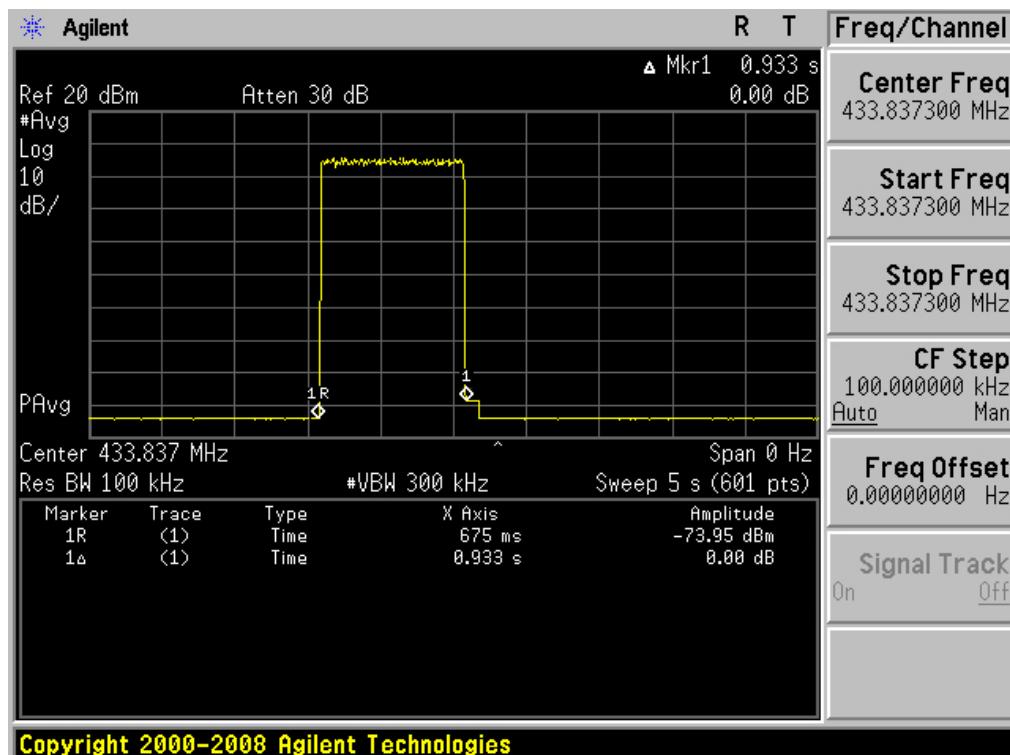

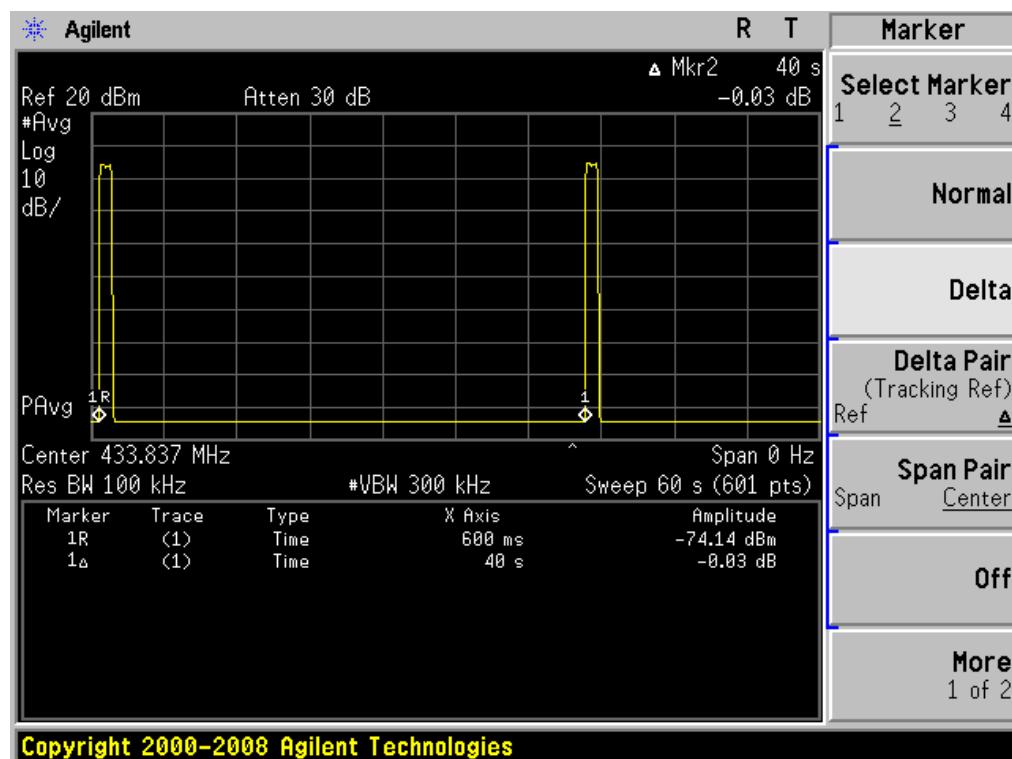

Test Item	Time	LIMIT	RESULT
The time of stopping transmission after activation (s)	39.067s	Silent period>10s	PASS
Transmission Time	0.933s	Duration of each transmission<=1s	PASS

END OF REPORT