



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GTS20220215005-1-3

FCC ID.....: 2AVE7-D042A

Compiled by

(position+printed name+signature)...: File administrators Peter Xiao

Peter Xiao


Supervised by

(position+printed name+signature)...: Test Engineer Oliver Ou

Oliver Ou

Approved by

(position+printed name+signature)...: Manager Simon Hu

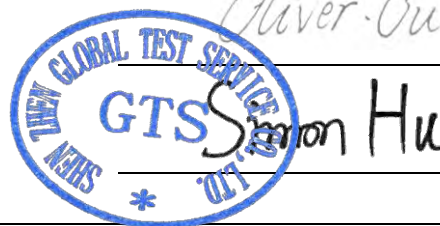

Date of issue.....: Feb. 22, 2022

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

Applicant's name.....: Shenzhen Hotack Technology Co.,Ltd

Address: Floor 4,Building A1,130 Silicon Valley Power Third Park, Si Li Road,guanlan street,Longhua District, Shenzhen China 518000

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description Smart Projector

Trade Mark: N/A

Manufacturer: Shenzhen Hotack Technology Co.,Ltd

Model/Type reference.....: D042

Listed Models: D042A, D042S, D042H, D042T, BW-VT2

Operation Frequency.....: From 2412MHz to 2462MHz

Hardware Version: N/A

Software Version: N/A

Rating: DC 12.0V/2.0A by Adapter

Result.....: **PASS**

TEST REPORT

Test Report No. : GTS20220215005-1-3	Feb. 22, 2022 Date of issue
--	--------------------------------

Equipment under Test : Smart Projector

Model /Type : D042

Listed model : D042A, D042S, D042H, D042T, BW-VT2

Applicant : **Shenzhen Hotack Technology Co.,Ltd**

Address : Floor 4,Building A1,130 Silicon Valley Power Third Park, Si Li Road,guanlan street,Longhua District, Shenzhen China 518000

Manufacturer : **Shenzhen Hotack Technology Co.,Ltd**

Address : Floor 4,Building A1,130 Silicon Valley Power Third Park, Si Li Road,guanlan street,Longhua District, Shenzhen China 518000

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks	5
2.2. Product Description	5
2.3. Product Difference Description	6
2.4. Equipment Under Test	7
2.5. Short description of the Equipment under Test (EUT)	7
2.6. EUT operation mode	7
2.7. Block Diagram of Test Setup	7
2.8. Related Submittal(s) / Grant (s)	8
2.9. EUT Exercise Software	8
2.10. Special Accessories	8
2.11. External I/O Cable	8
2.12. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Test Description	10
3.6. Equipments Used during the Test.....	11
4. TEST CONDITIONS AND RESULTS	12
4.1. AC Power Conducted Emission	12
4.2. Radiated Emission	15
4.3. Maximum Peak Output Power	26
4.4. Power Spectral Density	27
4.5. 6dB Bandwidth	30
4.6. Band Edge Compliance of RF Emission	33
4.7. Antenna Requirement	38
5. TEST SETUP PHOTOS OF THE EUT.....	39
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	39

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 DTS Meas Guidance v05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Feb. 17, 2022
	:	
Testing commenced on	:	Feb. 17, 2022
	:	
Testing concluded on	:	Feb. 22, 2022

2.2. Product Description

Product Name	Smart Projector
Trade Mark	N/A
Model/Type reference	D042
List Models	D042A, D042S, D042H, D042T, BW-VT2
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name different , So no additional models were tested.
Power supply:	DC 12.0V/2.0A by Adapter
Sample ID	GTS20220215005-1-1# & GTS20220215005-1-2#
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz) 7 Channel for 40MHz bandwidth(2422~2452MHz)
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
WIFI(5.2G Band)	
Frequency Range	5180MHz ~ 5240MHz
Channel Number	4 channels for 20MHz bandwidth(5180-5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	802.11a/n/ac: OFDM
WIFI (5.8G Band)	
Frequency Range	5745MHz ~ 5825MHz
Channel Number	5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5775MHz)
Modulation Type	802.11a/n/ac: OFDM
Antenna Description	Internal Antenna, 4.62dBi(Max.) for 2.4G Band and 3.33dBi(Max.) for 5G Band

2.3. Product Difference Description

The difference between D042 is show in the below table:

main information	D042 (with Type-c port)	D042 (without Type-c port)
Main board	with Type-c port	without Type-c port
Frequency bands	support Wi-Fi2.4G&5G support BT;	The same
BT/ Wi-Fi module	EWN-UWE56221AA	The same
BT/ Wi-Fi antenna	2.4G+5G built-in FPC antenna	The same
Appearance	The same	The same
Dimension	72X72X106mm	The same
CPU	RK3228A 4 cores, A7 core, 1.2G	The same
GPU	support	The same
Memory	2GB DDR3	The same
SSD/EMMC	16GB	The same
Adapter	CW1202000US	The same

2.4. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☒ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

DC 12.0V

2.5. Short description of the Equipment under Test (EUT)

This is a Smart Projector .

For more details, refer to the user's manual of the EUT.

2.6. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Antenna	Chain 0		Chain 1		Simultaneously
Bandwidth Mode	20MHz	40MHz	20MHz	40MHz	/
IEEE 802.11b	☒	☐	☐	☐	☐
IEEE 802.11g	☒	☐	☐	☐	☐
IEEE 802.11n	☒	☒	☐	☐	☐

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

The EUT has been tested under operating condition.


AC main conducted emission pre-test voltage at both AC 120V/60Hz and AC 240V/60Hz, recorded worst case;

AC main conducted emission pre-test at charge from PC modes, recorded worst case;

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be IEEE 802.11g mode (MCH).

2.7. Block Diagram of Test Setup

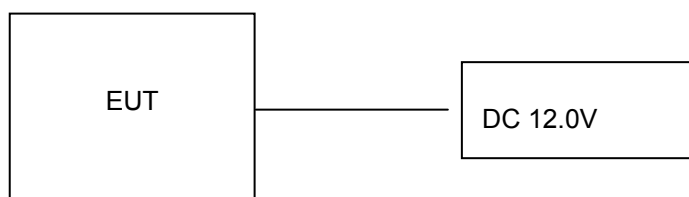

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AVE7-D042A** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.9. EUT Exercise Software

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

2.10. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Canwell Technology Co, Ltd	Adapter	CW1202000US	--	SDOC

2.11. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	1.0M, Unscreened Cable
USB Port	2	N/A
HDMI Port	1	1.0M, Unscreened Cable
AUX Port	1	N/A
Earphone Port	1	N/A
Type-C Port	1	N/A

2.12. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1234.

FCC Registered Test Site Number is 165725.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Test Description

Applied Standard: FCC Part 15 Subpart C				
ISED Rules	Description of Test	Test Sample	Result	Remark
/	On Time and Duty Cycle	GTS20220215005-1-1#	/	/
§15.247(b)	Maximum Conducted Output Power	GTS20220215005-1-1#	Compliant	Note 1
§15.247(e)	Power Spectral Density	GTS20220215005-1-1#	Compliant	Note 1
§15.247(a)(2)	6dB Bandwidth	GTS20220215005-1-1#	Compliant	Note 1
§2.1047	99% Occupied Bandwidth	/	N/A	N/A
§15.209, §15.247(d)	Conducted Spurious Emissions	GTS20220215005-1-1#	Compliant	Note 1
§15.209, §15.247(d)	Radiated Spurious Emissions	GTS20220215005-1-1# GTS20220215005-1-2#	Compliant	Note 1
§15.205	Emissions at Restricted Band	GTS20220215005-1-1# GTS20220215005-1-2#	Compliant	Note 1
§15.207(a)	AC Conducted Emissions	GTS20220215005-1-2#	Compliant	Note 1
§15.203 §15.247(c)	Antenna Requirements	GTS20220215005-1-1#	Compliant	Note 1
§15.247(i)§2.1091	RF Exposure	/	Compliant	Note 2

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

Pre/N/Aary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power	11b/DSSS	1 Mbps	1/6/11
Power Spectral Density	11g/OFDM	6 Mbps	1/6/11
6dB Bandwidth	11n(20MHz)/OFDM	6.5Mbps	1/6/11
Spurious RF conducted emission	11n(40MHz)/OFDM	13.5Mbps	3/6/09
Radiated Emission 9kHz~1GHz&			
Radiated Emission 1GHz~10 th Harmonic			
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5Mbps	3/9

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	CYBERTEK	EM5040A	E1850400105	2021/07/17	2022/07/16
LISN	R&S	ESH2-Z5	893606/008	2021/07/17	2022/07/16
EMI Test Receiver	R&S	ESPI3	101841-cd	2021/07/17	2022/07/16
EMI Test Receiver	R&S	ESCI7	101102	2021/09/19	2022/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2021/09/19	2022/09/18
Spectrum Analyzer	R&S	FSV40	100019	2021/07/17	2022/07/16
Vector Signal generator	Agilent	N5181A	MY49060502	2021/07/17	2022/07/16
Signal generator	Agilent	N5182A	3610AO1069	2021/09/19	2022/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2021/09/19	2022/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2021/11/07	2022/11/06
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2021/10/10	2022/11/09
Bilog Antenna	Schwarzbeck	VULB9163	000976	2021/07/23	2022/07/22
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2021/11/07	2022/11/06
Amplifier	Schwarzbeck	BBV 9743	#202	2021/08/08	2022/08/07
Amplifier	Schwarzbeck	BBV9179	9719-025	2021/07/17	2022/07/16
Amplifier	EMCI	EMC051845B	980355	2021/07/17	2022/07/16
Temperature/Humidity Meter	Gangxing	CTH-608	02	2021/07/17	2022/07/16
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2021/07/17	2022/07/16
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2021/07/17	2022/07/16
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2021/07/17	2022/07/16
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2021/07/17	2022/07/16
Data acquisition card	Agilent	U2531A	TW53323507	2021/07/17	2022/07/16
Power Sensor	Agilent	U2021XA	MY5365004	2021/07/17	2022/07/16
Test Control Unit	Tonscend	JS0806-1	178060067	2021/07/17	2022/07/16
Automated filter bank	Tonscend	JS0806-F	19F8060177	2021/07/17	2022/07/16
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

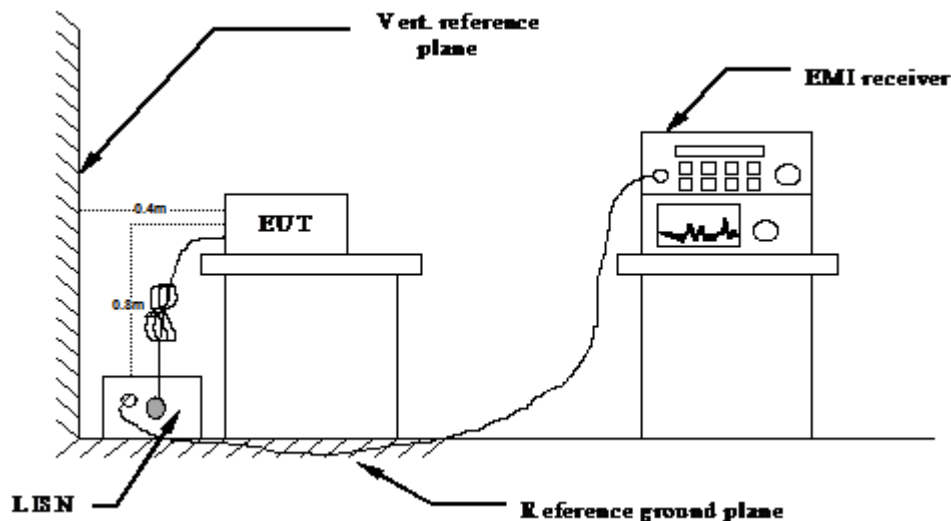

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
- 4 The EUT received DC 12.0V power, the adapter received AC120V/60Hz or AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 150 KHz to 30MHz in AC120V and the worst case was recorded.

Temperature	25°C	Humidity	60%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11g (MCH)

Mode 1(With TYPE-C port)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1717	48.62	27.87	9.60	58.22	37.47	64.88	54.88	6.66	17.41	L1	PASS
2	0.2001	50.56	28.76	9.55	60.11	38.31	63.61	53.61	3.50	15.30	L1	PASS
3	0.3532	43.64	23.09	9.43	53.07	32.52	58.89	48.89	5.82	16.37	L1	PASS
4	0.4780	41.41	28.88	9.41	50.82	38.29	56.37	46.37	5.55	8.08	L1	PASS
5	0.6119	42.28	25.89	9.66	51.94	35.55	56.00	46.00	4.06	10.45	L1	PASS
6	10.2629	37.35	26.90	9.18	46.53	36.08	60.00	50.00	13.47	13.92	L1	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1676	36.44	23.51	9.59	46.03	33.10	65.08	55.08	19.05	21.98	N	PASS
2	0.6425	32.12	24.36	9.40	41.52	33.76	56.00	46.00	14.48	12.24	N	PASS
3	0.8887	33.40	22.97	9.36	42.76	32.33	56.00	46.00	13.24	13.67	N	PASS
4	1.5856	43.01	30.23	9.36	52.37	39.59	56.00	46.00	3.63	6.41	N	PASS
5	3.5356	34.97	18.84	9.37	44.34	28.21	56.00	46.00	11.66	17.79	N	PASS
6	10.0982	36.74	25.85	9.28	46.02	35.13	60.00	50.00	13.98	14.87	N	PASS

Note: 1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Mode 2(Without TYPE-C port)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.4521	32.22	25.37	9.42	41.64	34.79	56.84	46.84	15.20	12.05	L1	PASS
2	0.8285	30.47	20.72	9.40	39.87	30.12	56.00	46.00	16.13	15.88	L1	PASS
3	1.3563	30.87	22.12	9.39	40.26	31.51	56.00	46.00	15.74	14.49	L1	PASS
4	4.1765	32.72	20.91	9.40	42.12	30.31	56.00	46.00	13.88	15.69	L1	PASS
5	7.2363	33.23	21.95	9.28	42.51	31.23	60.00	50.00	17.49	18.77	L1	PASS
6	10.6235	35.16	24.24	9.18	44.34	33.42	60.00	50.00	15.66	16.58	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List


NO.	Frequency [MHz]	QP Reading [dBμV]	AVG. Reading [dBμV]	Factor [dB]	QP Result [dBμV]	AVG. Result [dBμV]	QP Limit [dBμV]	AVG. Limit [dBμV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1540	42.09	24.50	9.61	51.70	34.11	65.78	55.78	14.08	21.67	N	PASS
2	0.2317	36.38	22.43	9.55	45.93	31.98	62.39	52.39	16.46	20.41	N	PASS
3	0.6830	32.79	23.33	9.39	42.18	32.72	56.00	46.00	13.82	13.28	N	PASS
4	1.5542	41.24	28.21	9.37	50.61	37.58	56.00	46.00	5.39	8.42	N	PASS
5	2.9233	33.98	20.19	9.33	43.31	29.52	56.00	46.00	12.69	16.48	N	PASS
6	10.4102	35.35	26.05	9.28	44.63	35.33	60.00	50.00	15.37	14.67	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

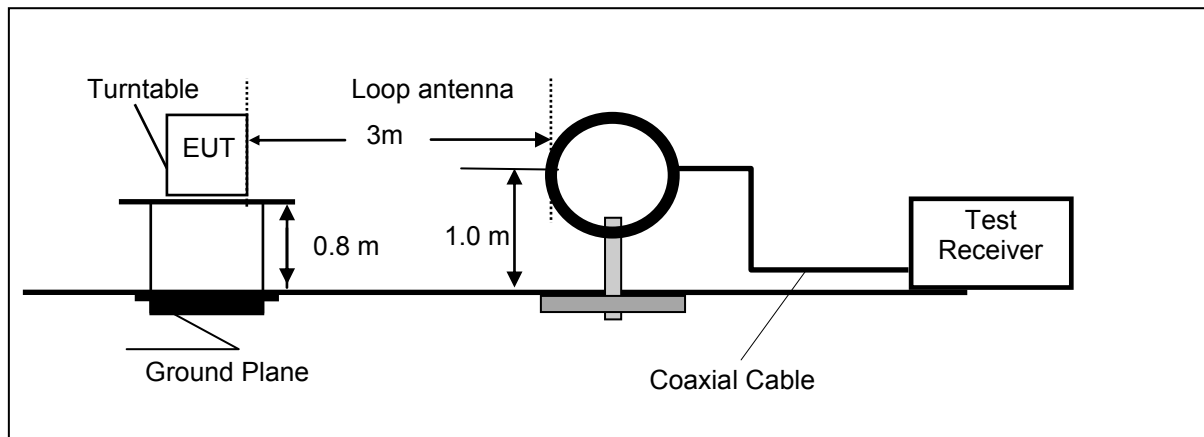

Frequency range 30MHz – 1000MHz

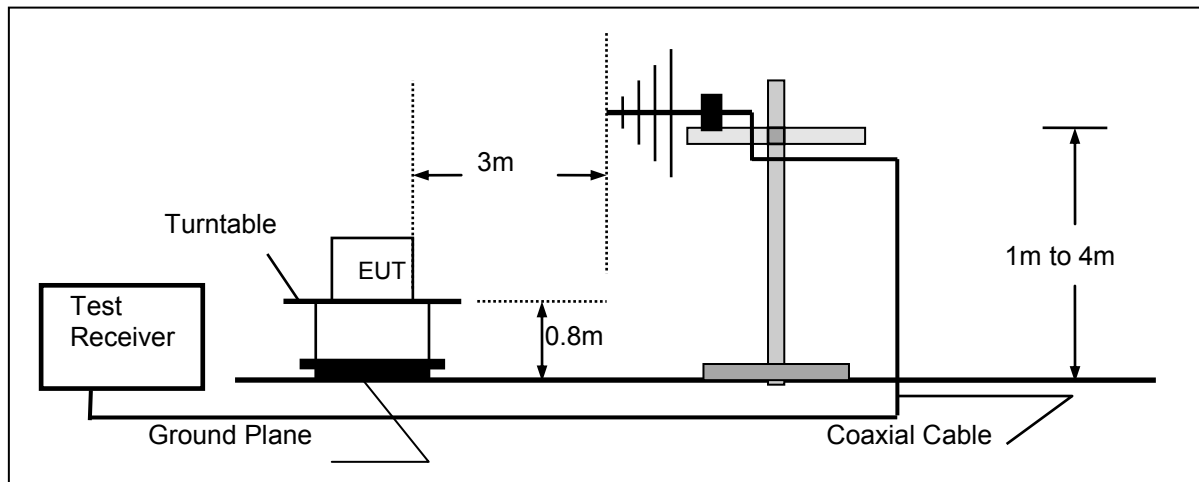

Frequency range above 1GHz-25GHz

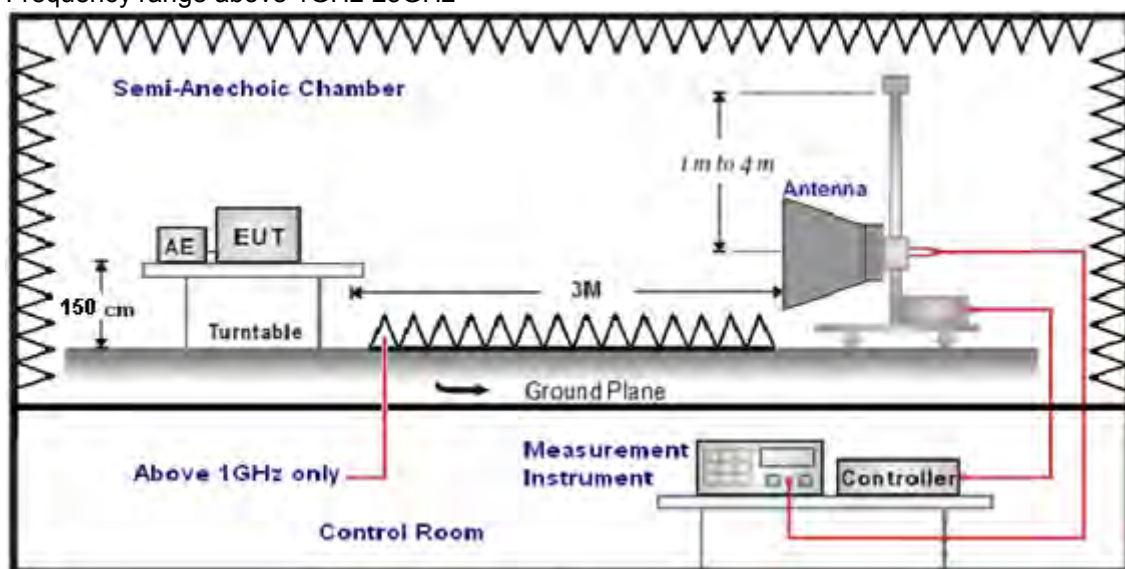

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 30MHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 30MHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at 802.11b/802.11g/802.11n HT20/802.11n HT40 mode from 30 MHz to 25GHz in AC120V and the worst case was recorded.

Temperature	25°C	Humidity	60%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11g (MCH)

For 9 KHz~30MHz

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

For 30MHz-1GHz
Mode 1(With TYPE-C port)

Horizontal

Test Graph

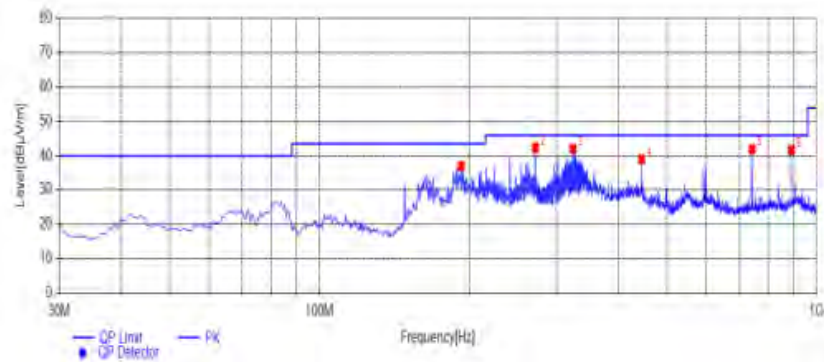

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	192.9600	47.02	-9.96	37.06	43.50	6.44	100	2	PK	Horizontal	PASS
2	272.0150	50.65	-8.28	42.37	46.00	3.63	100	285	PK	Horizontal	PASS
3	323.9100	49.08	-7.00	42.08	46.00	3.92	100	42	PK	Horizontal	PASS
4	445.1600	43.53	-4.48	39.05	46.00	6.95	100	285	PK	Horizontal	PASS
5	741.9800	41.41	0.49	41.90	46.00	4.10	100	329	PK	Horizontal	PASS
6	890.3900	39.29	2.39	41.68	46.00	4.32	100	77	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

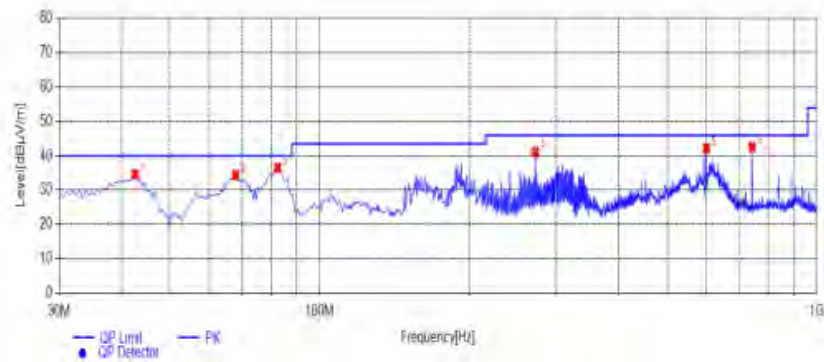

Suspected List

NO	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	42.6100	41.64	-6.99	34.65	40.00	5.35	100	286	PK	Vertical	PASS
2	67.8300	43.80	-9.41	34.39	40.00	5.61	100	111	PK	Vertical	PASS
3	82.3800	48.65	-12.19	36.46	40.00	3.54	100	81	PK	Vertical	PASS
4	272.0150	49.47	-8.28	41.19	46.00	4.81	100	156	PK	Vertical	PASS
5	600.3600	43.75	-1.63	42.12	46.00	3.88	100	165	PK	Vertical	PASS
6	741.9800	42.15	0.49	42.64	46.00	3.36	100	186	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Mode 2(Without TYPE-C port)

Horizontal

Test Graph

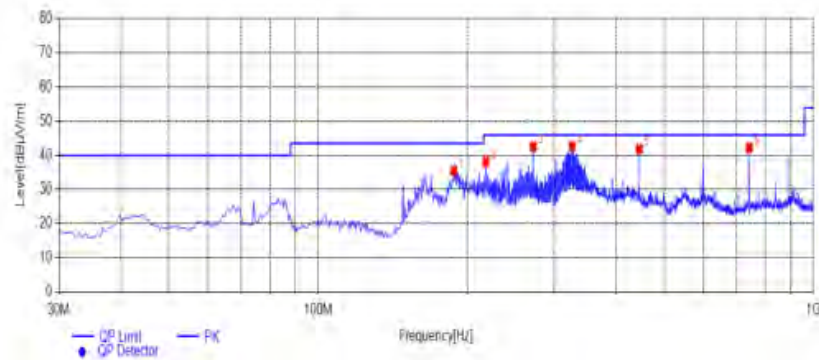

Suspected List


NO	Frequency (MHz)	Reading (dBμV/m)	Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarization	Polarity	Remark
1	188.1100	45.43	-10.07	35.36	43.50	8.14	100	43	PK	Horizontal	PASS
2	218.1800	47.51	-9.36	38.15	46.00	7.85	100	76	PK	Horizontal	PASS
3	272.0150	50.90	-8.28	42.62	46.00	3.38	100	280	PK	Horizontal	PASS
4	325.8500	49.61	-6.96	42.65	46.00	3.35	100	27	PK	Horizontal	PASS
5	445.1600	46.39	-4.48	41.91	46.00	4.09	100	307	PK	Horizontal	PASS
6	741.9800	41.77	0.49	42.26	46.00	3.74	100	6	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

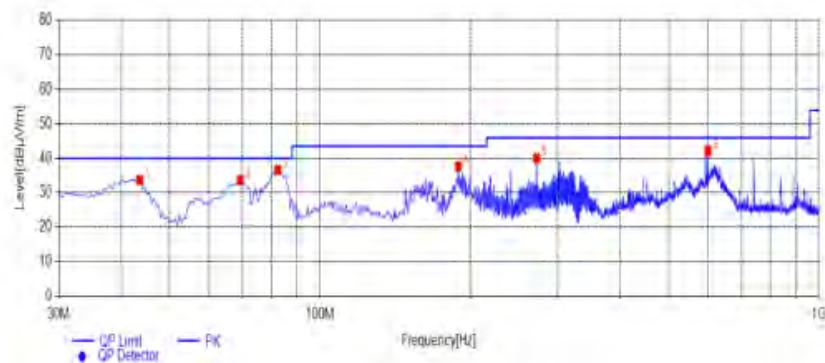

Suspected List

NO	Frequency (MHz)	Reading (dBμV/m)	Factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarization	Polarity	Remark
1	43.5800	40.44	-6.73	33.71	40.00	6.29	100	335	PK	Vertical	PASS
2	69.2850	43.69	-10.06	33.63	40.00	6.37	100	177	PK	Vertical	PASS
3	82.3800	48.89	-12.19	36.70	40.00	3.30	100	88	PK	Vertical	PASS
4	189.5650	47.88	-10.17	37.71	43.50	5.79	100	189	PK	Vertical	PASS
5	272.0150	48.35	-8.28	40.07	46.00	5.93	100	156	PK	Vertical	PASS
6	600.3600	43.76	-1.63	42.13	46.00	3.87	100	167	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

For 1GHz to 25GHz
Mode 1(With TYPE-C port)

IEEE 802.11b

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.43	32.44	30.25	7.95	60.57	74.00	-13.43	Peak	Horizontal
4824.00	34.83	32.44	30.25	7.95	44.97	54.00	-9.03	Average	Horizontal
4824.00	54.39	32.44	30.25	7.95	64.53	74.00	-9.47	Peak	Vertical
4824.00	35.90	32.44	30.25	7.95	46.04	54.00	-7.96	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.45	32.52	30.31	8.12	60.78	74.00	-13.22	Peak	Horizontal
4874.00	37.06	32.52	30.31	8.12	47.39	54.00	-6.61	Average	Horizontal
4874.00	52.62	32.52	30.31	8.12	62.95	74.00	-11.05	Peak	Vertical
4874.00	36.11	32.52	30.31	8.12	46.44	54.00	-7.56	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.08	32.68	30.27	7.88	61.37	74.00	-12.63	Peak	Horizontal
4924.00	36.42	32.68	30.27	7.88	46.71	54.00	-7.29	Average	Horizontal
4924.00	50.03	32.68	30.27	7.88	60.32	74.00	-13.68	Peak	Vertical
4924.00	30.95	32.68	30.27	7.88	41.24	54.00	-12.76	Average	Vertical

IEEE 802.11g

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.77	32.44	30.25	7.95	60.91	74.00	-13.09	Peak	Horizontal
4824.00	36.64	32.44	30.25	7.95	46.78	54.00	-7.22	Average	Horizontal
4824.00	54.21	32.44	30.25	7.95	64.35	74.00	-9.65	Peak	Vertical
4824.00	36.27	32.44	30.25	7.95	46.41	54.00	-7.59	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.81	32.52	30.31	8.12	60.14	74.00	-13.86	Peak	Horizontal
4874.00	37.28	32.52	30.31	8.12	47.61	54.00	-6.39	Average	Horizontal
4874.00	51.03	32.52	30.31	8.12	61.36	74.00	-12.64	Peak	Vertical
4874.00	35.59	32.52	30.31	8.12	45.92	54.00	-8.08	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.53	32.68	30.27	7.88	61.82	74.00	-12.18	Peak	Horizontal
4924.00	35.32	32.68	30.27	7.88	45.61	54.00	-8.39	Average	Horizontal
4924.00	49.42	32.68	30.27	7.88	59.71	74.00	-14.29	Peak	Vertical
4924.00	30.80	32.68	30.27	7.88	41.09	54.00	-12.91	Average	Vertical

IEEE802.11 n HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.55	32.44	30.25	7.95	59.69	74.00	-14.31	Peak	Horizontal
4824.00	35.78	32.44	30.25	7.95	45.92	54.00	-8.08	Average	Horizontal
4824.00	54.44	32.44	30.25	7.95	64.58	74.00	-9.42	Peak	Vertical
4824.00	34.44	32.44	30.25	7.95	44.58	54.00	-9.42	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.81	32.52	30.31	8.12	60.14	74.00	-13.86	Peak	Horizontal
4874.00	36.30	32.52	30.31	8.12	46.63	54.00	-7.37	Average	Horizontal
4874.00	51.77	32.52	30.31	8.12	62.10	74.00	-11.90	Peak	Vertical
4874.00	36.64	32.52	30.31	8.12	46.97	54.00	-7.03	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.69	32.68	30.27	7.88	61.98	74.00	-12.02	Peak	Horizontal
4924.00	36.72	32.68	30.27	7.88	47.01	54.00	-6.99	Average	Horizontal
4924.00	48.44	32.68	30.27	7.88	58.73	74.00	-15.27	Peak	Vertical
4924.00	30.85	32.68	30.27	7.88	41.14	54.00	-12.86	Average	Vertical

IEEE802.11 n HT40

Channel 3 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	50.38	32.44	30.25	7.95	60.52	74.00	-13.48	Peak	Horizontal
4844.00	36.18	32.44	30.25	7.95	46.32	54.00	-7.68	Average	Horizontal
4844.00	52.90	32.44	30.25	7.95	63.04	74.00	-10.96	Peak	Vertical
4844.00	34.99	32.44	30.25	7.95	45.13	54.00	-8.87	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.49	32.52	30.31	8.12	59.82	74.00	-14.18	Peak	Horizontal
4874.00	36.12	32.52	30.31	8.12	46.45	54.00	-7.55	Average	Horizontal
4874.00	51.53	32.52	30.31	8.12	61.86	74.00	-12.14	Peak	Vertical
4874.00	36.87	32.52	30.31	8.12	47.20	54.00	-6.80	Average	Vertical

Channel 09/ 2452 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	51.01	32.68	30.27	7.88	61.30	74.00	-12.70	Peak	Horizontal
4904.00	36.36	32.68	30.27	7.88	46.65	54.00	-7.35	Average	Horizontal
4904.00	49.42	32.68	30.27	7.88	59.71	74.00	-14.29	Peak	Vertical
4904.00	30.70	32.68	30.27	7.88	40.99	54.00	-13.01	Average	Vertical

For 1GHz to 25GHz
Mode 2(Without TYPE-C port)

IEEE 802.11b

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	49.37	32.44	30.25	7.95	59.51	74.00	-14.49	Peak	Horizontal
4824.00	35.90	32.44	30.25	7.95	46.04	54.00	-7.96	Average	Horizontal
4824.00	54.46	32.44	30.25	7.95	64.60	74.00	-9.40	Peak	Vertical
4824.00	35.46	32.44	30.25	7.95	45.60	54.00	-8.40	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.89	32.52	30.31	8.12	60.22	74.00	-13.78	Peak	Horizontal
4874.00	36.20	32.52	30.31	8.12	46.53	54.00	-7.47	Average	Horizontal
4874.00	51.92	32.52	30.31	8.12	62.25	74.00	-11.75	Peak	Vertical
4874.00	35.80	32.52	30.31	8.12	46.13	54.00	-7.87	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.95	32.68	30.27	7.88	62.24	74.00	-11.76	Peak	Horizontal
4924.00	36.99	32.68	30.27	7.88	47.28	54.00	-6.72	Average	Horizontal
4924.00	49.38	32.68	30.27	7.88	59.67	74.00	-14.33	Peak	Vertical
4924.00	31.40	32.68	30.27	7.88	41.69	54.00	-12.31	Average	Vertical

IEEE 802.11g

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	51.28	32.44	30.25	7.95	61.42	74.00	-12.58	Peak	Horizontal
4824.00	35.89	32.44	30.25	7.95	46.03	54.00	-7.97	Average	Horizontal
4824.00	53.12	32.44	30.25	7.95	63.26	74.00	-10.74	Peak	Vertical
4824.00	35.89	32.44	30.25	7.95	46.03	54.00	-7.97	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	50.65	32.52	30.31	8.12	60.98	74.00	-13.02	Peak	Horizontal
4874.00	37.98	32.52	30.31	8.12	48.31	54.00	-5.69	Average	Horizontal
4874.00	51.92	32.52	30.31	8.12	62.25	74.00	-11.75	Peak	Vertical
4874.00	35.21	32.52	30.31	8.12	45.54	54.00	-8.46	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	50.30	32.68	30.27	7.88	60.59	74.00	-13.41	Peak	Horizontal
4924.00	36.09	32.68	30.27	7.88	46.38	54.00	-7.62	Average	Horizontal
4924.00	49.34	32.68	30.27	7.88	59.63	74.00	-14.37	Peak	Vertical
4924.00	31.24	32.68	30.27	7.88	41.53	54.00	-12.47	Average	Vertical

IEEE802.11 n HT20

Channel 1 / 2412 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.00	50.63	32.44	30.25	7.95	60.77	74.00	-13.23	Peak	Horizontal
4824.00	35.74	32.44	30.25	7.95	45.88	54.00	-8.12	Average	Horizontal
4824.00	54.71	32.44	30.25	7.95	64.85	74.00	-9.15	Peak	Vertical
4824.00	36.31	32.44	30.25	7.95	46.45	54.00	-7.55	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.80	32.52	30.31	8.12	60.13	74.00	-13.87	Peak	Horizontal
4874.00	37.30	32.52	30.31	8.12	47.63	54.00	-6.37	Average	Horizontal
4874.00	51.77	32.52	30.31	8.12	62.10	74.00	-11.90	Peak	Vertical
4874.00	35.35	32.52	30.31	8.12	45.68	54.00	-8.32	Average	Vertical

Channel 11 / 2462 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.00	51.42	32.68	30.27	7.88	61.71	74.00	-12.29	Peak	Horizontal
4924.00	35.74	32.68	30.27	7.88	46.03	54.00	-7.97	Average	Horizontal
4924.00	49.88	32.68	30.27	7.88	60.17	74.00	-13.83	Peak	Vertical
4924.00	31.20	32.68	30.27	7.88	41.49	54.00	-12.51	Average	Vertical

IEEE802.11 n HT40

Channel 3 / 2422 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.00	50.18	32.44	30.25	7.95	60.32	74.00	-13.68	Peak	Horizontal
4844.00	34.85	32.44	30.25	7.95	44.99	54.00	-9.01	Average	Horizontal
4844.00	54.16	32.44	30.25	7.95	64.30	74.00	-9.70	Peak	Vertical
4844.00	35.36	32.44	30.25	7.95	45.50	54.00	-8.50	Average	Vertical

Channel 6 / 2437 MHz

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.00	49.57	32.52	30.31	8.12	59.90	74.00	-14.10	Peak	Horizontal
4874.00	37.45	32.52	30.31	8.12	47.78	54.00	-6.22	Average	Horizontal
4874.00	51.33	32.52	30.31	8.12	61.66	74.00	-12.34	Peak	Vertical
4874.00	35.76	32.52	30.31	8.12	46.09	54.00	-7.91	Average	Vertical

Channel 09/ 2452 MHz


Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.00	50.13	32.68	30.27	7.88	60.42	74.00	-13.58	Peak	Horizontal
4904.00	36.99	32.68	30.27	7.88	47.28	54.00	-6.72	Average	Horizontal
4904.00	48.77	32.68	30.27	7.88	59.06	74.00	-14.94	Peak	Vertical
4904.00	31.56	32.68	30.27	7.88	41.85	54.00	-12.15	Average	Vertical

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2. and Average conducted output power, 9.2.3.1.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple detector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS


Temperature	23.4℃	Humidity	52.7%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11b/g/n

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	20.18	17.09	30.00	Pass
	06	21.74	18.59		
	11	22.60	19.22		
802.11g	01	22.78	19.41	30.00	Pass
	06	24.19	20.78		
	11	25.27	21.84		
802.11n(HT20)	01	22.41	17.91	30.00	Pass
	06	23.77	19.44		
	11	24.55	20.42		
802.11n(HT40)	03	23.51	18.44	30.00	Pass
	06	24.06	18.84		
	09	25.09	19.67		

Note: 1.The test results including the cable lose.
Duty cycle used in all test items: 100%

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS


Temperature	23.4°C	Humidity	52.7%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11b/g/n

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-5.16	8.00	Pass
	06	-3.07		
	11	-2.96		
802.11g	01	-9.62	8.00	Pass
	06	-8.89		
	11	-7.71		
802.11n(HT20)	01	-9.71	8.00	Pass
	06	-7.83		
	11	-7.33		
802.11n(HT40)	03	-12.48	8.00	Pass
	06	-11.12		
	09	-10.11		

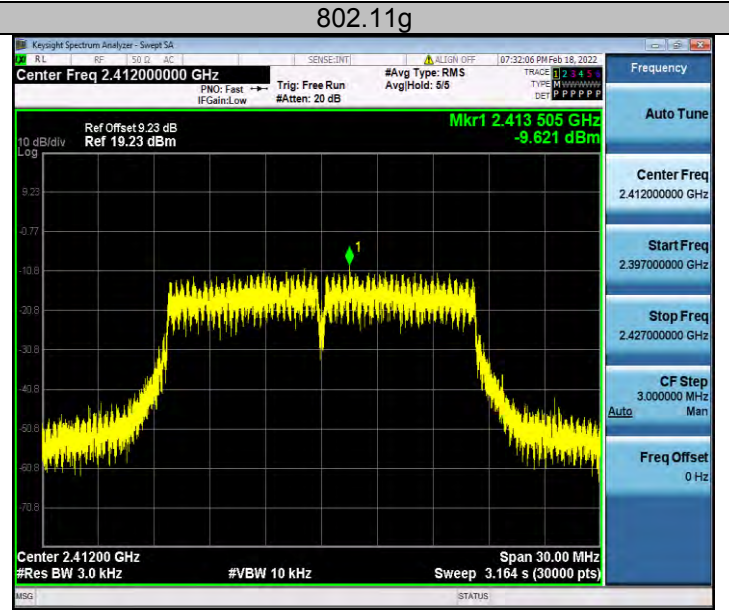


CH01

CH01

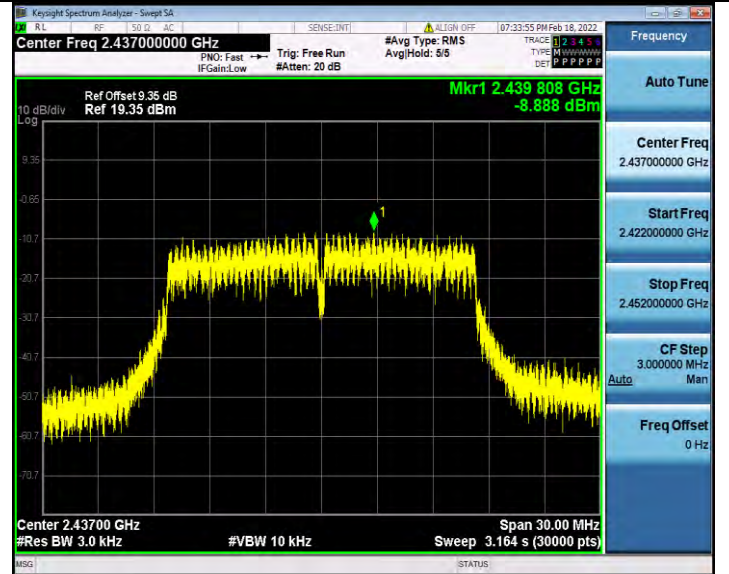


CH06

CH06

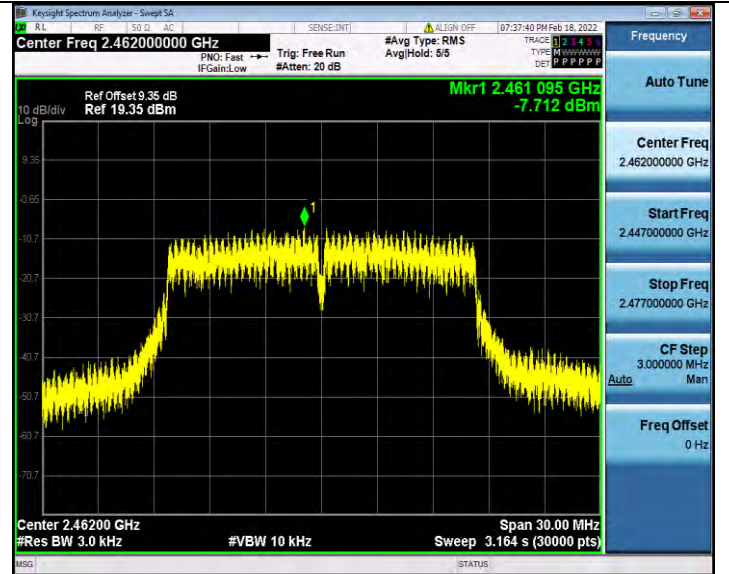


CH11


CH11

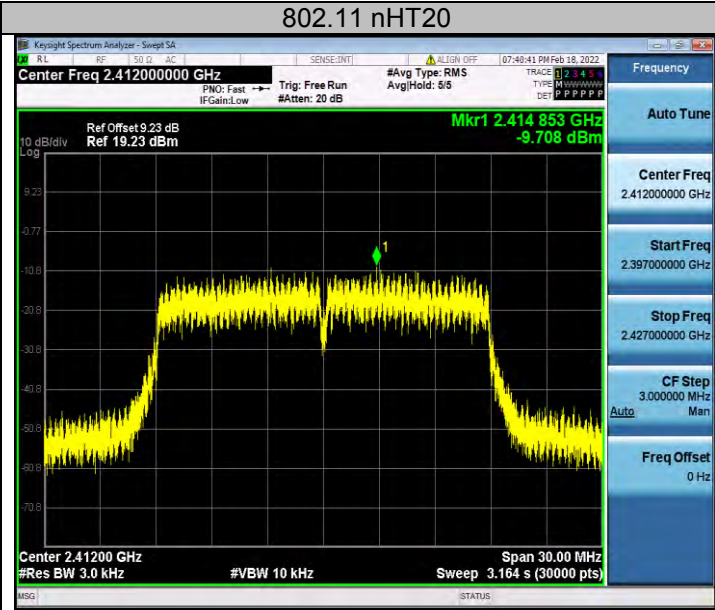


CH01

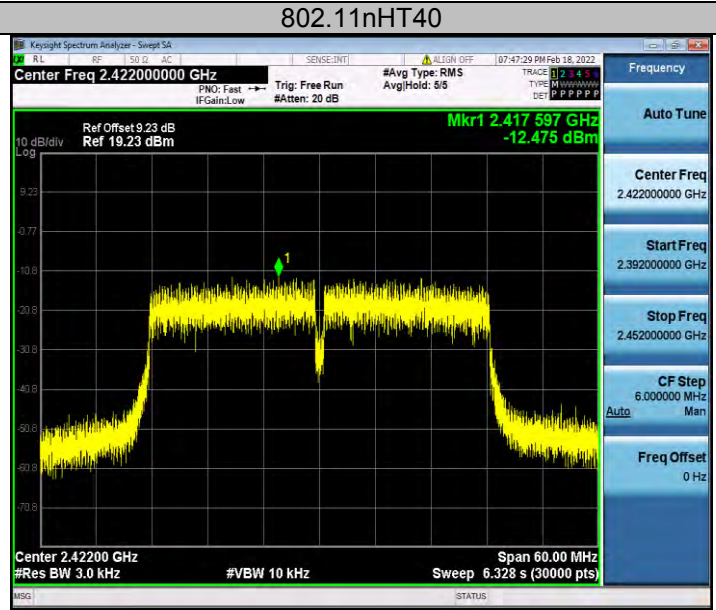


CH03

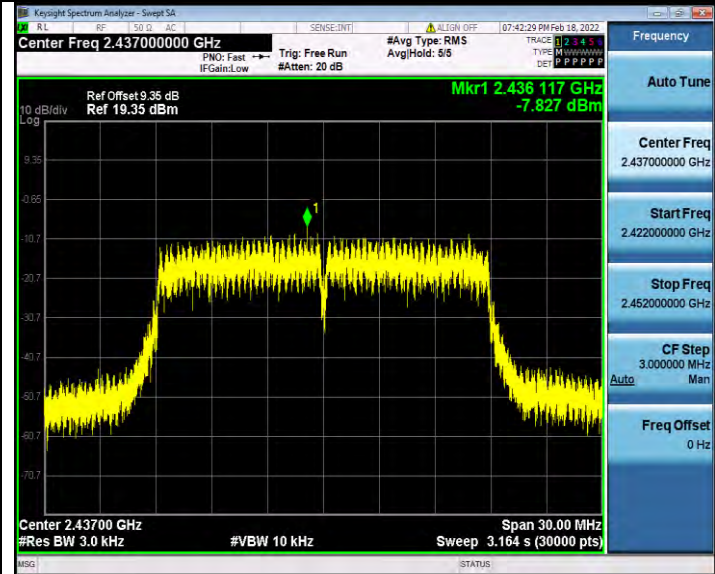


CH06

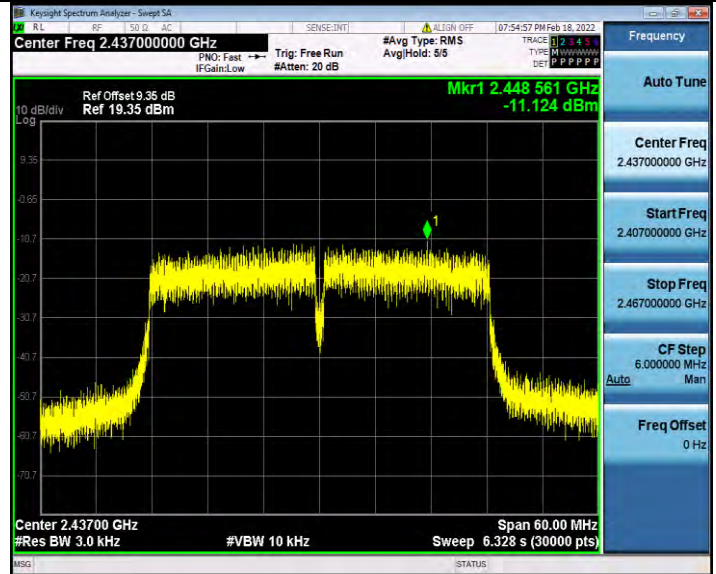

CH06

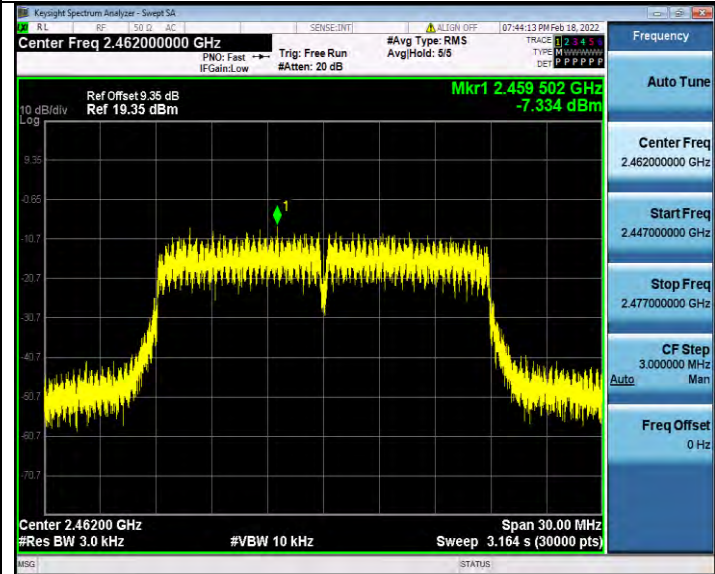


CH11

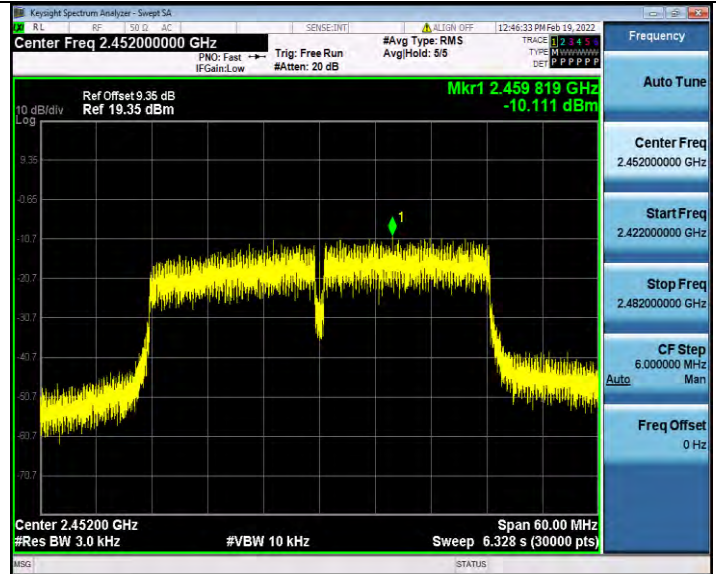

CH09

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz.

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz


TEST RESULTS

Temperature	23.4°C	Humidity	52.7%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11b/g/n

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.200	≥ 500	Pass
	06	8.080		
	11	8.080		
802.11g	01	16.120	≥ 500	Pass
	06	16.160		
	11	15.520		
802.11nHT20	01	16.760	≥ 500	Pass
	06	16.720		
	11	17.040		
802.11nHT40	03	35.440	≥ 500	Pass
	06	35.840		
	09	34.320		



CH01

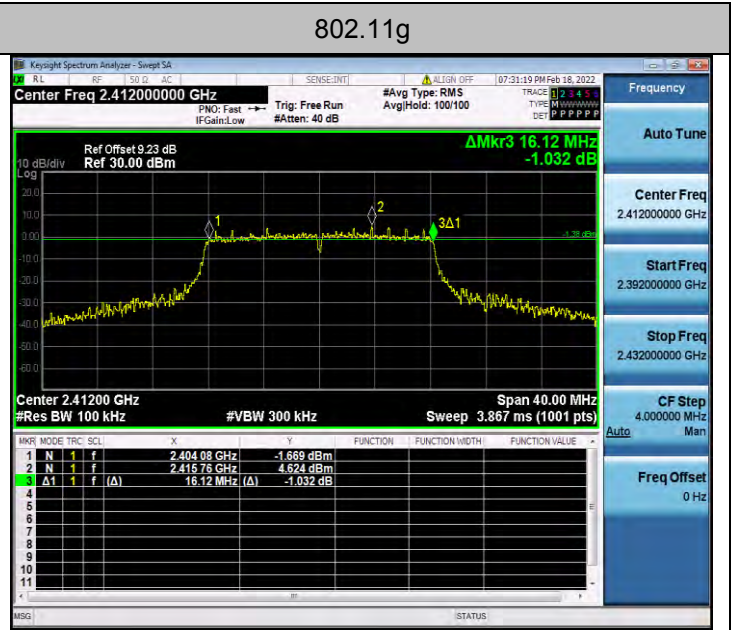

CH01



CH06



CH06





CH11



CH11



802.11n HT20

802.11n HT40

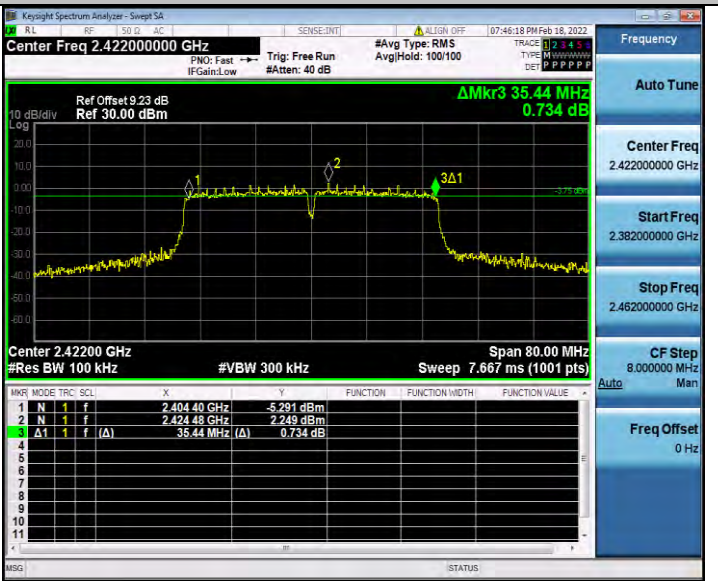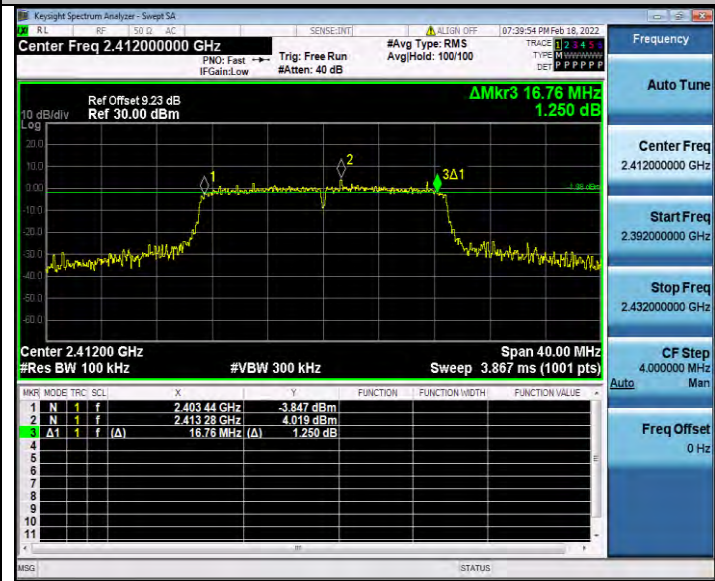


CH01

CH03

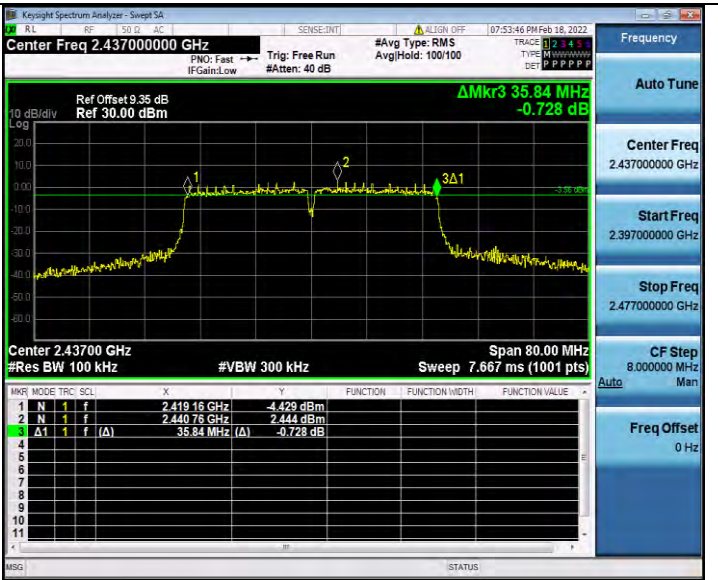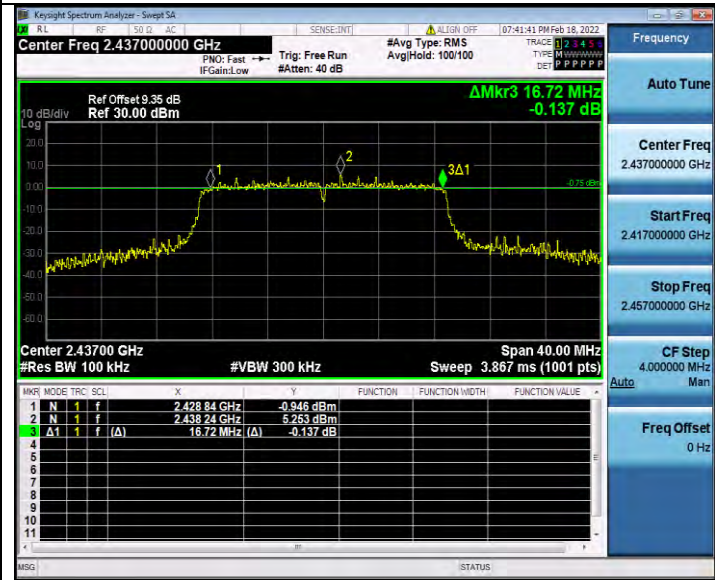

CH06

CH06

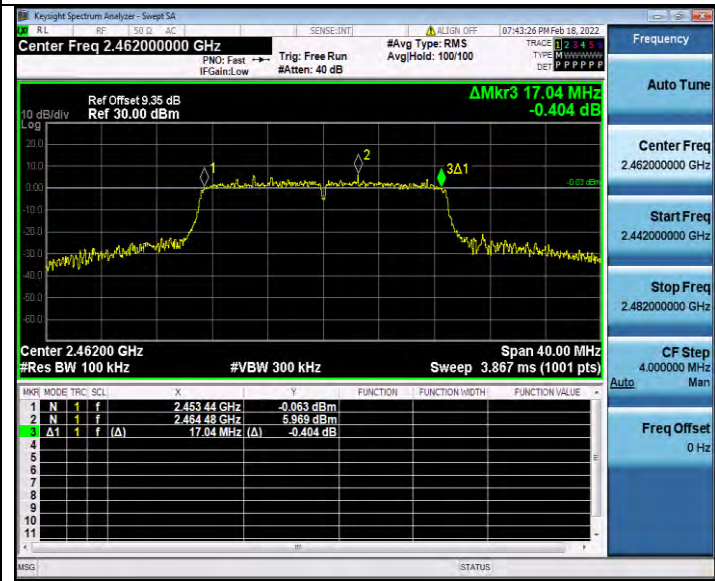

CH11

CH09

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

TEST RESULTS**4.6.1 For Radiated Bandedge Measurement**

Temperature	23.8℃	Humidity	53.7%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11b/g/n

802.11b

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.99	PK	74	-28.01	1	283	51.30	27.49	3.32	36.12	-5.31
2390.00	34.72	AV	54	-19.28	1	283	40.03	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.32	PK	74	-28.68	1	119	50.63	27.49	3.32	36.12	-5.31
2390.00	34.19	AV	54	-19.81	1	119	39.50	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.62	PK	74	-25.38	1	126	54.34	27.45	3.38	36.55	-5.72
2483.50	36.08	AV	54	-17.92	1	126	41.80	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.62	PK	74	-25.38	1	45	54.34	27.45	3.38	36.55	-5.72
2483.50	36.01	AV	54	-17.99	1	45	41.73	27.45	3.38	36.55	-5.72

802.11g

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.01	PK	74	-27.99	1	87	51.32	27.49	3.32	36.12	-5.31
2390.00	35.33	AV	54	-18.67	1	87	40.64	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.62	PK	74	-27.38	1	301	51.93	27.49	3.32	36.12	-5.31
2390.00	33.85	AV	54	-20.15	1	301	39.16	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.13	PK	74	-25.87	1	316	53.85	27.45	3.38	36.55	-5.72
2483.50	35.15	AV	54	-18.85	1	316	40.87	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.20	PK	74	-25.80	1	177	53.92	27.45	3.38	36.55	-5.72
2483.50	36.32	AV	54	-17.68	1	177	42.04	27.45	3.38	36.55	-5.72

802.11n HT20



Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.70	PK	74	-27.30	1	231	52.01	27.49	3.32	36.12	-5.31
2390.00	33.87	AV	54	-20.13	1	231	39.18	27.49	3.32	36.12	-5.31
Frequency(MHz):			2412			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	45.47	PK	74	-28.53	1	242	50.78	27.49	3.32	36.12	-5.31
2390.00	35.54	AV	54	-18.46	1	242	40.85	27.49	3.32	36.12	-5.31
Frequency(MHz):			2462			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.96	PK	74	-25.04	1	83	54.68	27.45	3.38	36.55	-5.72
2483.50	34.95	AV	54	-19.05	1	83	40.67	27.45	3.38	36.55	-5.72
Frequency(MHz):			2462			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	48.86	PK	74	-25.14	1	292	54.58	27.45	3.38	36.55	-5.72
2483.50	35.61	AV	54	-18.39	1	292	41.33	27.45	3.38	36.55	-5.72



802.11n HT40

Frequency(MHz):			2422			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.05	PK	74	-27.95	1	260	51.36	27.49	3.32	36.12	-5.31
2390.00	35.15	AV	54	-18.85	1	260	40.46	27.49	3.32	36.12	-5.31
Frequency(MHz):			2422			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	46.87	PK	74	-27.13	1	116	52.18	27.49	3.32	36.12	-5.31
2390.00	34.02	AV	54	-19.98	1	116	39.33	27.49	3.32	36.12	-5.31
Frequency(MHz):			2452			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	50.03	PK	74	-23.97	1	71	55.75	27.45	3.38	36.55	-5.72
2483.50	36.10	AV	54	-17.90	1	71	41.82	27.45	3.38	36.55	-5.72
Frequency(MHz):			2452			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	49.03	PK	74	-24.97	1	318	54.75	27.45	3.38	36.55	-5.72
2483.50	36.16	AV	54	-17.84	1	318	41.88	27.45	3.38	36.55	-5.72

4.6.2 For Conducted Bandedge Measurement

Temperature	23.4°C	Humidity	52.7%
Test Engineer	Oliver Ou	Configurations	IEEE 802.11b/g/n

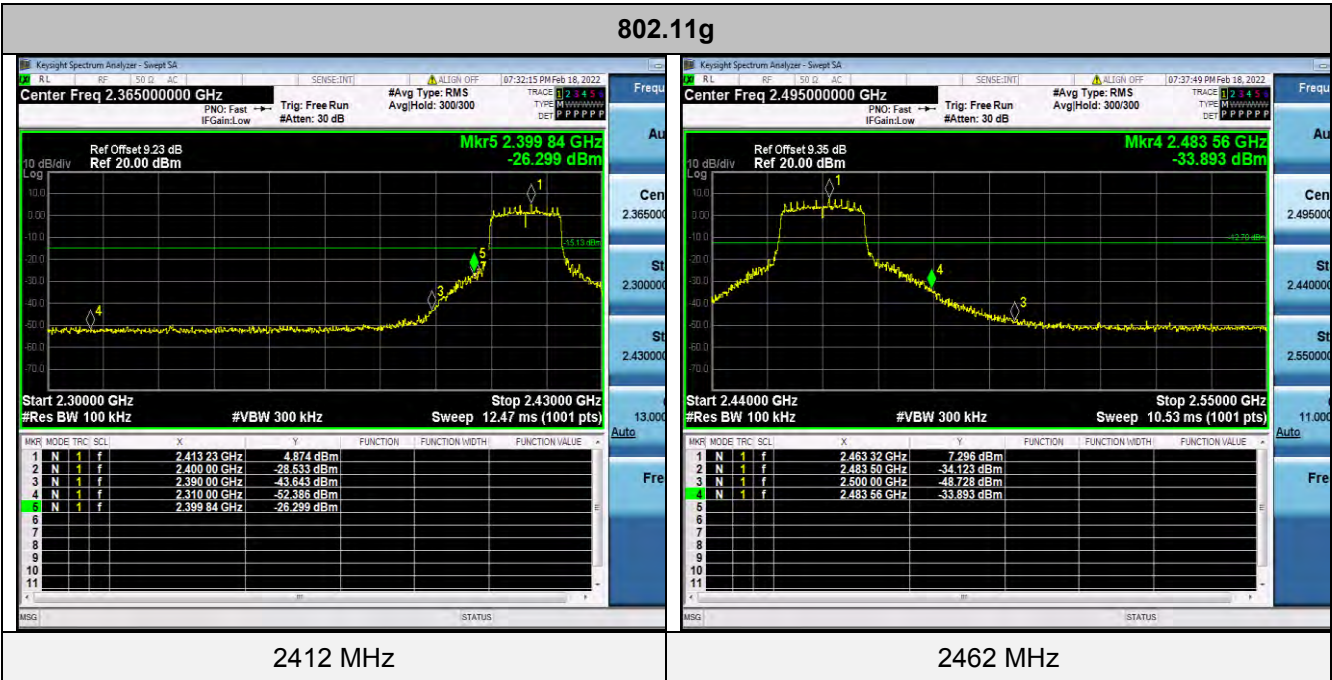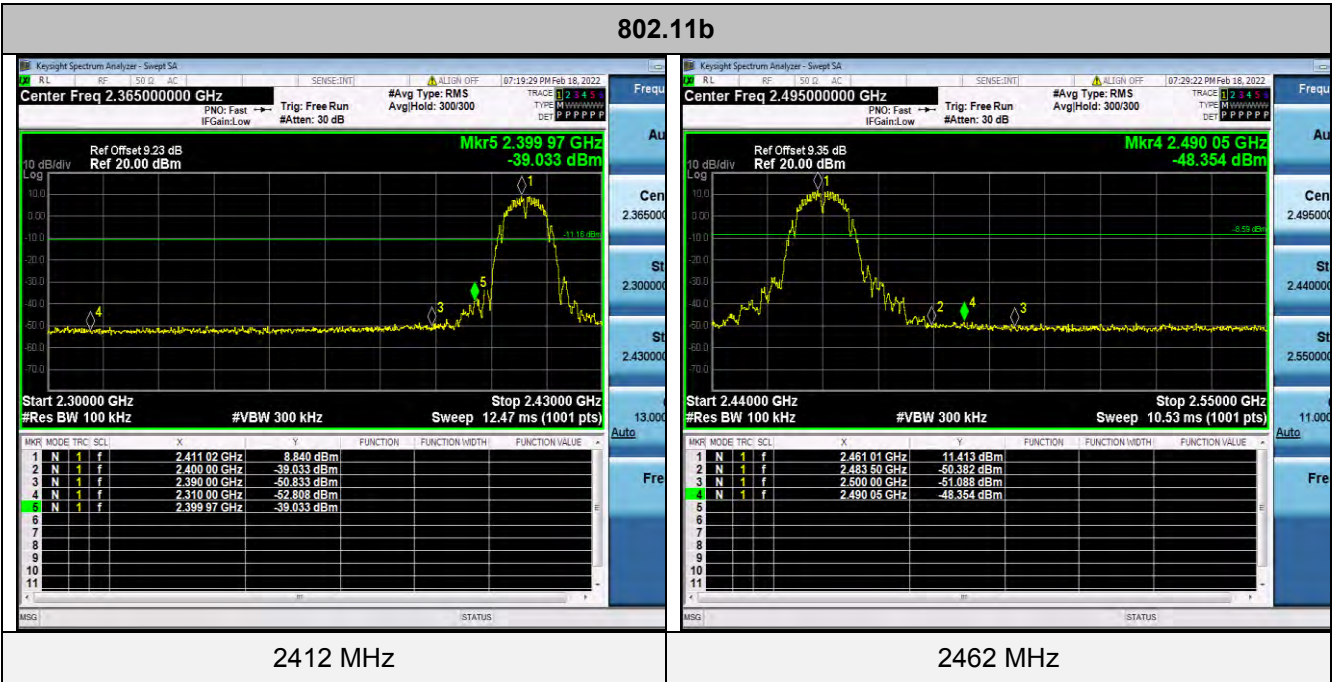

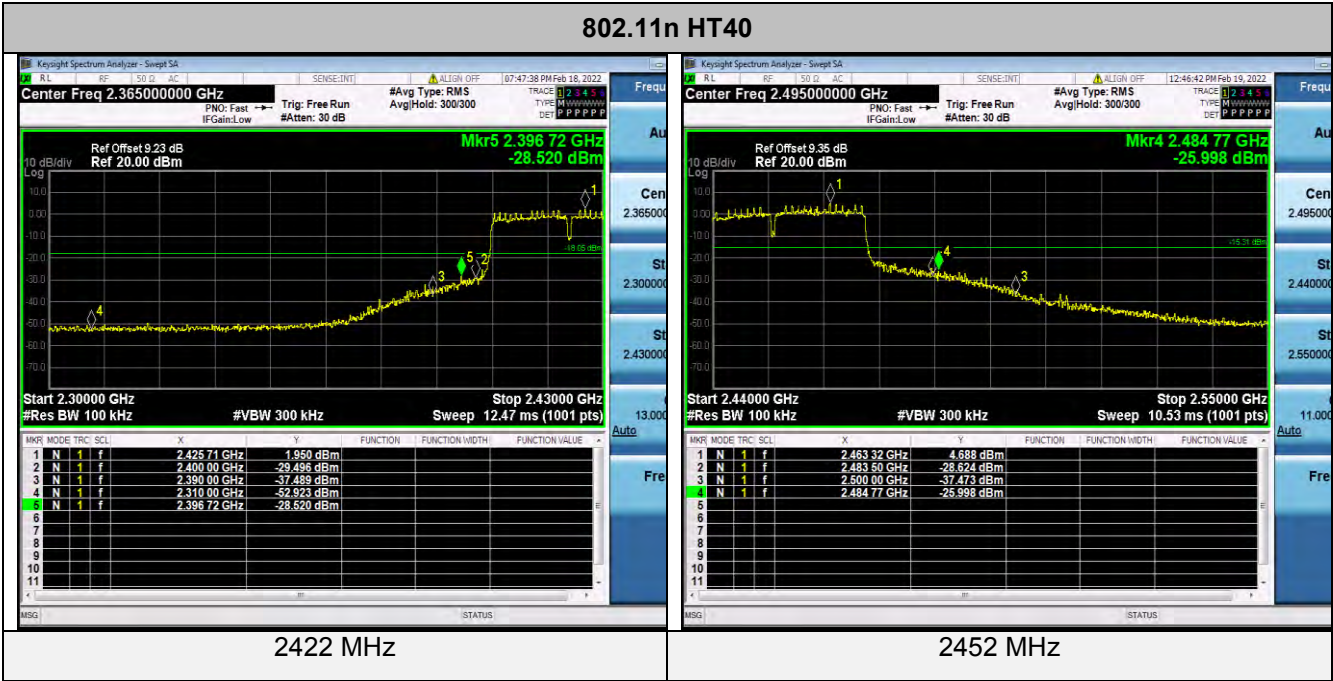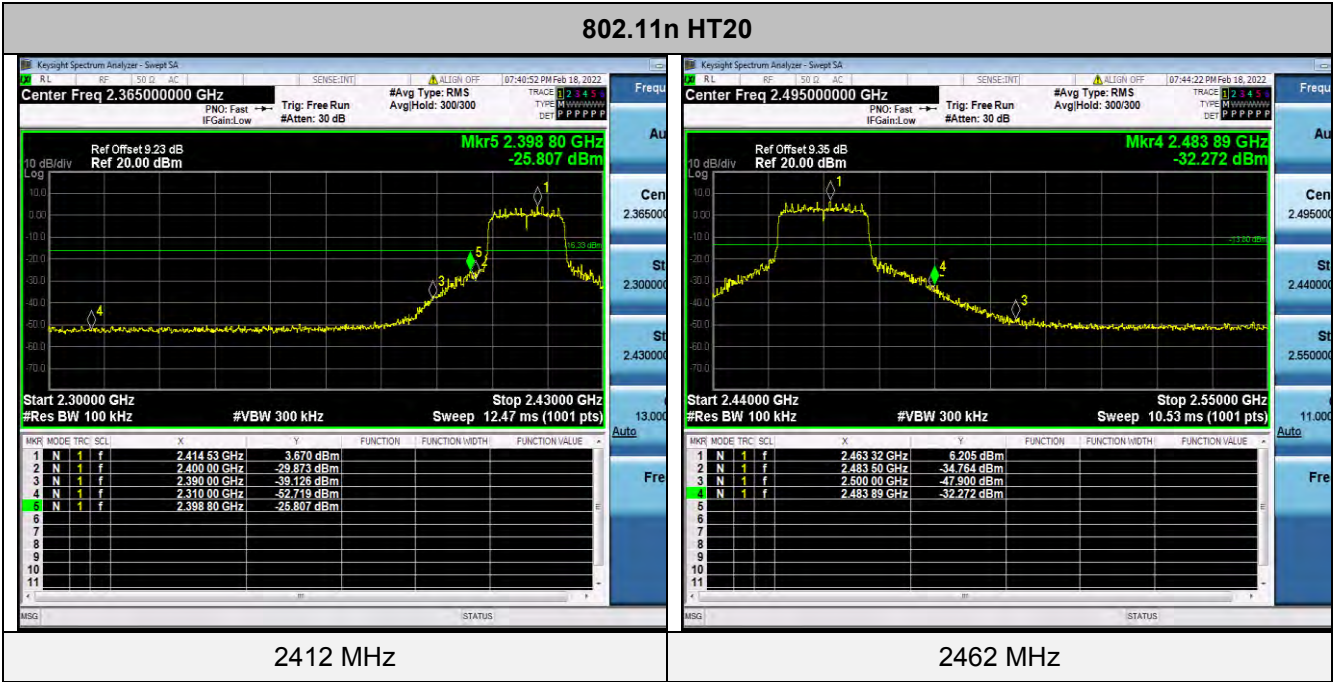

4.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Information

The antenna is Internal Aantenna, through the buckle stretched out, The directional gains of antenna used for transmitting is 4.62dBi.

Reference to the Test Report: **GTS20220215005-1-1**.

5. TEST SETUP PHOTOS OF THE EUT

Reference to the test report No. **GTS20220215005-1-1.**

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No. **GTS20220215005-1-1.**

.....**End of Report**.....