

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25AHSZ 001	Auftrags-Nr.: <i>Order no.:</i>	180334780	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025.05.26	
Auftraggeber: <i>Client:</i>	ORIENTAL RECREATIONAL PRODUCTS (SHANGHAI) CO., LTD. No. 1699 Da Ye Road, Wu Qiao Fengxian 201402 Shanghai P.R. China			
Prüfgegenstand: <i>Test item:</i>	Remote Control			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	RC-26BZRAY			
Auftrags-Inhalt: <i>Order content:</i>	TÜV Rheinland – FCC Service			
Prüfgrundlage: <i>Test specification:</i>	FCC 47 CFR Part 15.203 FCC 47 CFR Part 15.231			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025.05.26	Refer to Photo Documentation		
Prüfmuster-Nr.: <i>Test sample no:</i>	A004011982-001			
Prüfzeitraum: <i>Testing period:</i>	2025.07.31 - 2025.08.14			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 1.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland / CCIC (Ningbo) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	2025.09.15	Ausstelldatum: <i>Issue date:</i>	2025.09.15	
Stellung / Position:	Keda Zhou/PE	Stellung / Position:	Chonghai Liang/Authorizer	
Sonstiges / Other:	FCC ID: 2AVFRRRC-26BZRAY			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25AHSZ 001
Test report no.:

Seite 2 von 16
Page 2 of 16

Anmerkungen
Remarks

Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.

Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.

The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.

Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.

Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature

As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature

Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.

*Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.*

Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.

Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.

The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.

Prüfbericht - Nr.: CN25AHSZ 001
Test Report No.:

Seite 3 von 16
Page 3 of 16

Test Summary

4.1.1 ANTENNA REQUIREMENT

Result:

Pass

4.1.2 DEACTIVATION OF THE TRANSMISSION

Result:

Pass

4.1.3 20DB EMISSION BANDWIDTH

Result:

Pass

4.1.4 FIELD STRENGTH OF FUNDAMENTAL AND UNWANTED EMISSIONS

Result:

Pass

Contents

1. TEST SITES	5
1.1 TEST FACILITIES.....	5
1.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
1.3 UNCERTAINTY OF MEASUREMENT	5
2. GENERAL PRODUCT INFORMATION.....	6
2.1 PRODUCT FUNCTION AND INTENDED USE	6
2.2 RATINGS AND SYSTEM DETAILS	6
2.3 INDEPENDENT OPERATION MODES	6
2.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	6
2.5 SUBMITTED DOCUMENTS	6
3. TEST SET-UP AND OPERATION MODES.....	7
3.1 PRINCIPLE OF CONFIGURATION SELECTION	7
3.2 TEST OPERATION AND TEST SOFTWARE	7
3.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.4 COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE.....	7
3.5 TEST SET-UP.....	8
4. TEST RESULTS	9
4.1 TRANSMITTER REQUIREMENT & TEST SUITES	9
4.1.1 Antenna Requirement.....	9
4.1.2 Deactivation of the Transmission	10
4.1.3 20dB Emission Bandwidth.....	11
4.1.4 Field strength of fundamental and Unwanted Emissions.....	12
5. LIST OF TABLES	16
6. LIST OF FIGURES	16

Prüfbericht - Nr.: CN25AHSZ 001

Test Report No.:

Seite 5 von 16

Page 5 of 16

1. Test Sites

1.1 Test Facilities

Laboratory: TÜV Rheinland /CCIC (Ningbo) Co., Ltd.

1st Floor, Building 11, Scholar Innovation Park, No.1188 Zhongguan Road, Zhenhai District, Ningbo 315200 P.R. China

FCC Designation Number: CN1237

FCC Test Firm Registration Number: 647754

IC Company Number: 24297

CAB identifier: CN0047

The test equipment used is in accordance with CISPR 16-1 series standards.

1.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment, Laboratory

Kind of Equipment	Type	Serial No.	Last cal. date	Cal. due date
EMI test receiver	ESR7	101929	2024.10.29	2025.10.28
Spectrum analyzer	FSV40	101412	2024.10.29	2025.10.28
Bilog Antenna	CBL6112D	49033	2024.03.17	2027.03.16
Horn antenna	HF907	102653	2023.07.20	2026.07.19
Pre-amplifier	SCU-18F	180051	2024.10.29	2025.10.28

1.3 Uncertainty of Measurement

Table 2: Measurement Uncertainty

Test Item	Expanded Measurement Uncertainty (k=2)
Conducted Emission (9-150kHz)	3.70 dB
Conducted Emission (150k-30MHz)	3.30 dB
Radiated Emission (30-1000MHz)	4.39 dB
Radiated Emission (1-18GHz)	4.67 dB

2. General Product Information

2.1 Product Function and Intended Use

The EUT (equipment under test) is a Remote Control operating at 433.05 - 434.79MHz.

For more detailed information, refer to the user's manual.

2.2 Ratings and System Details

Table 3: General Description of EUT

General Description of EUT	
FCC ID:	2AVFRR-26BZRAY
Rated Voltage:	DC 3V
Protection Class:	Class III
Technical Specification of SRD (433MHz)	
Operating Frequency band	433.05 - 434.79MHz
Modulation	ASK
Antenna Type	PCB Antenna
Antenna Gain	5 dBi

2.3 Independent Operation Modes

There are some modes:

Mode A: Transmitting on Operating Frequency Band: 433.05 - 434.79MHz

Mode B: Off

Refer to the user's manual for further information.

2.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram for further information.

2.5 Submitted Documents

Circuit diagram, Schematics, PCB Layout, Label, User Manual etc.

3. Test Set-up and Operation Modes

3.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

3.2 Test Operation and Test Software

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

All testing were performed according to the procedures in ANSI C63.10: 2013.

Test Software EMC32 V10.30 was used in the radiated emission test.

More details refer to the related paragraph of this report.

3.3 Special Accessories and Auxiliary Equipment

None.

3.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Circuit Diagram. No additional measures were employed to achieve compliance.

3.5 Test set-up

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

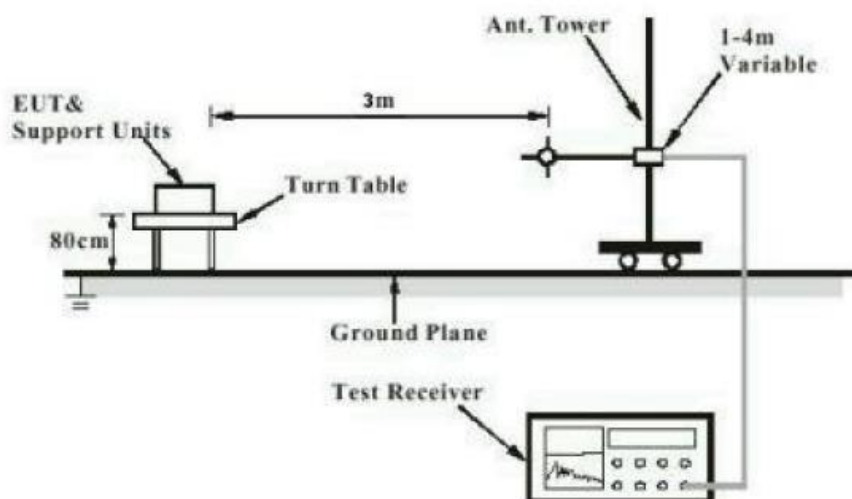


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


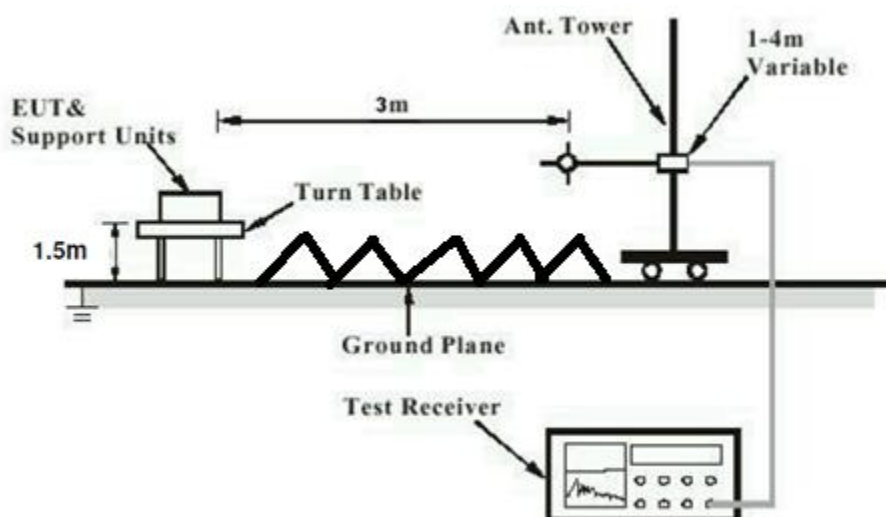


Diagram of Measurement Configuration for Conducted Transmitter Measurement

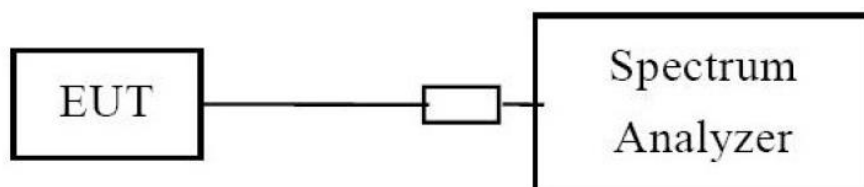

Prüfbericht - Nr.: CN25AHSZ 001
Test Report No.:

Seite 9 von 16
Page 9 of 16

4. Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

Result:

Pass

Test Specification

Test standard

Limit

: FCC 47 CFR Part 15.203

: the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an integral antenna (PCB antenna, Antenna Gain: 5 dBi), and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore, the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN25AHSZ 001
Test Report No.:

Seite 10 von 16
Page 10 of 16

4.1.2 Deactivation of the Transmission

Result:

Pass

Test Specification

Test standard : FCC 47 CFR Part 15.231

Basic standard : ANSI C63.10: 2013

Test requirement : CFR47 FCC Part 15.231 (a)(1)

Limits : A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test suite : Shielded Room

Test Setup

Date of testing : 2025.08.14

Test environment: : Normal test conditions

Operational mode : Mode A


Temperature : 23°C

Relative humidity : 56%

Atmospheric pressure : 101.2 kPa

Figure 1: Test Results of Deactivation of the Transmission

Activated mode	Duration Time (S)	Limit (S)
Manually	0.478	≤5

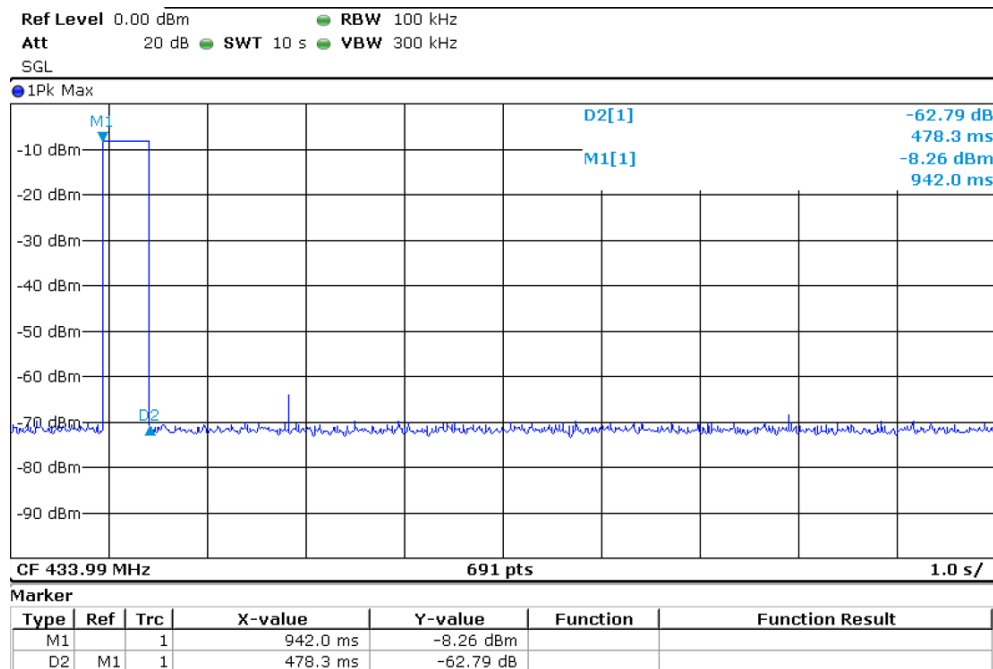

4.1.3 20dB Emission Bandwidth

Result: Pass


Test Specification	
Test standard	: FCC 47 CFR Part 15.231
Basic standard	: ANSI C63.10: 2013
Test requirement	: CFR47 FCC Part 15.231 (c)
Limit	: CFR47 FCC Part 15.231 (c)
Test suite	: Shielded Room

Test Setup

Date of testing	: 2025.08.14
Test environment	: Normal test conditions
Operational mode	: Mode A
Temperature	: 23°C
Relative humidity	: 56%
Atmospheric pressure	: 101.2 kPa

Figure 2: Test Results of 20dB Emission Bandwidth

Bandwidth (kHz) Limit (kHz)
 7.64 ≤1085

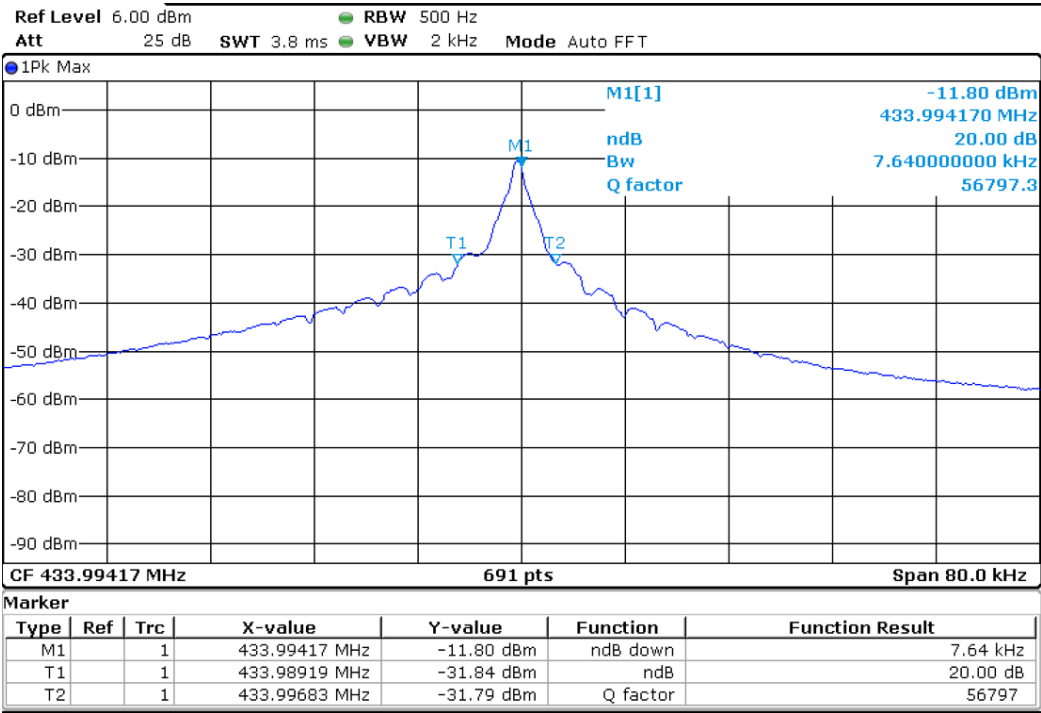

Prüfbericht - Nr.: CN25AHSZ 001

Test Report No.:

Seite 12 von 16

Page 12 of 16

4.1.4 Field strength of fundamental and Unwanted Emissions

Result:

Pass

Test Specification

Test standard

: FCC 47 CFR Part 15.231

CFR47 FCC Part 15.205

CFR47 FCC Part 15.209

Basic standard

: ANSI C63.10: 2013

Test requirement

: CFR47 FCC Part 15.231 (b)(1)(2)(3)

Limits

: CFR47 FCC Part 15.231 (b)

Test suite

: 3m Semi Anechoic Room

Test Setup

Date of testing

: 2025.07.31 - 2025.08.05

Test environment

: Normal test conditions

Operational mode

: Mode A

Temperature

: 21°C

Relative humidity


: 68%

Atmospheric pressure

: 101.2 kPa

Figure 3: Field strength of fundamental

Fundamental, Horizontal

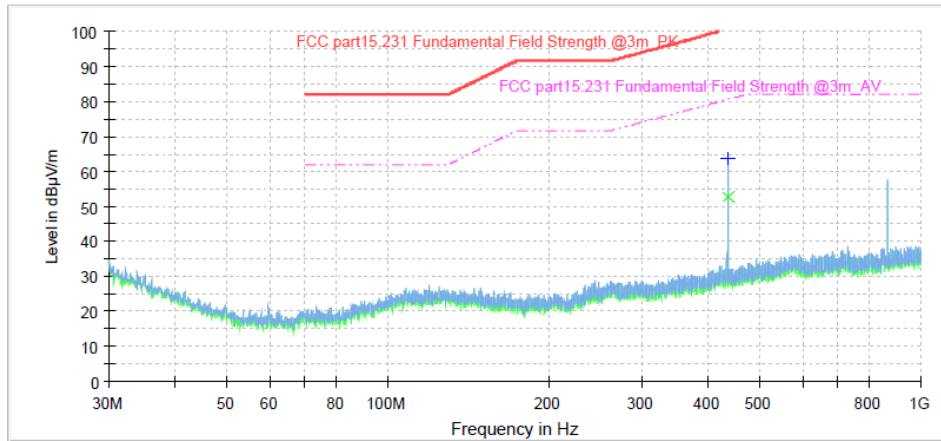


Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
433.950000	63.5	1000.0	120.000	100.0	H	11.0	24.2	37.1	100.6

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
433.950000	52.7	1000.0	120.000	100.0	H	11.0	24.2	27.9	80.6

Fundamental, Vertical

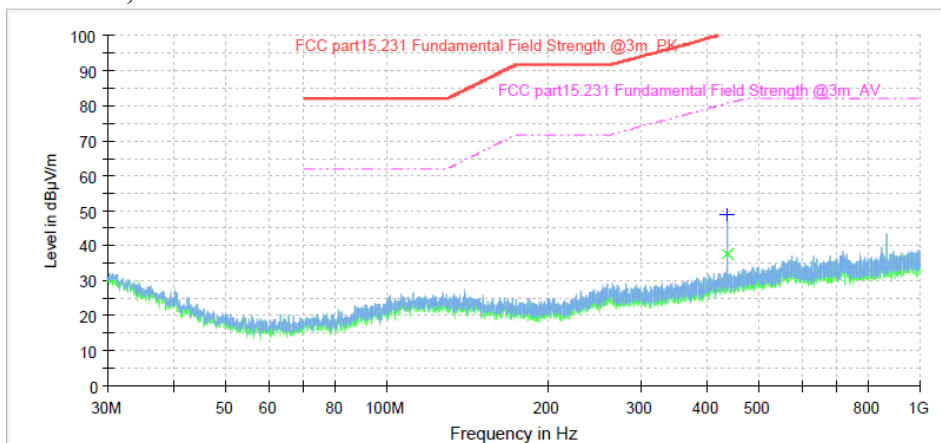

Limit and Margin-PK


Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
433.950000	49.0	1000.0	120.000	100.0	V	11.0	24.2	51.6	100.6

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
433.950000	37.6	1000.0	120.000	100.0	V	11.0	24.2	43.0	80.6

Figure 4: Spectral Diagrams, Radiated Spurious Emission

30MHz-1000MHz, Horizontal

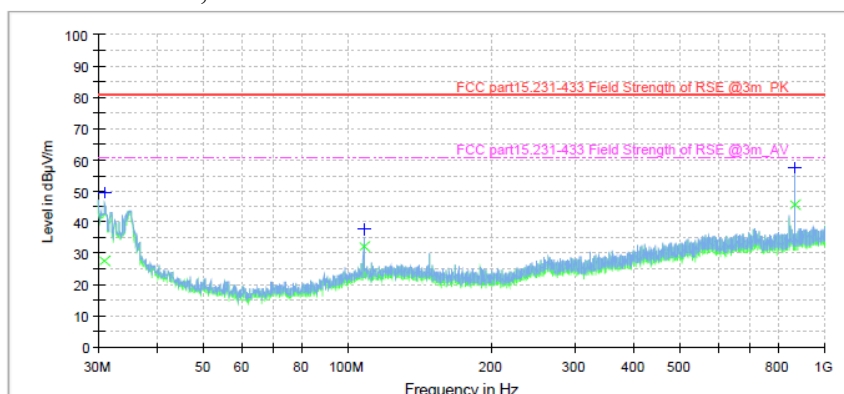

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
30.970000	49.3	1000.0	120.000	100.0	H	11.0	24.9	31.3	80.6
107.980000	37.5	1000.0	120.000	100.0	H	11.0	18.5	43.1	80.6
867.920000	57.4	1000.0	120.000	100.0	H	11.0	28.7	23.2	80.6

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
30.970000	27.6	1000.0	120.000	100.0	H	11.0	24.9	33.0	60.6
107.980000	32.2	1000.0	120.000	100.0	H	11.0	18.5	28.4	60.6
867.920000	45.7	1000.0	120.000	100.0	H	11.0	28.7	14.9	60.6

30MHz-1000MHz, Vertical

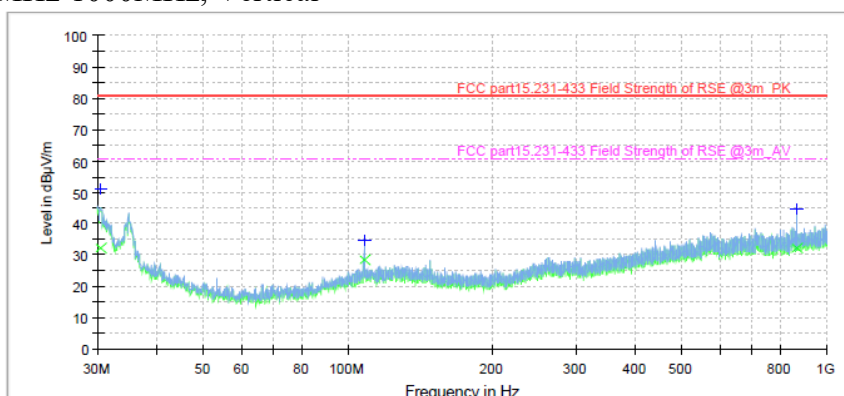

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
30.430000	51.2	1000.0	120.000	100.0	V	11.0	25.2	29.4	80.6
107.980000	34.6	1000.0	120.000	100.0	V	11.0	18.5	46.0	80.6
867.970000	44.6	1000.0	120.000	100.0	V	11.0	28.7	36.0	80.6

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
30.430000	32.1	1000.0	120.000	100.0	V	11.0	25.2	28.6	60.6
107.980000	28.5	1000.0	120.000	100.0	V	11.0	18.5	32.1	60.6
867.970000	32.1	1000.0	120.000	100.0	V	11.0	28.7	28.5	60.6

Above 1GHz, Horizontal

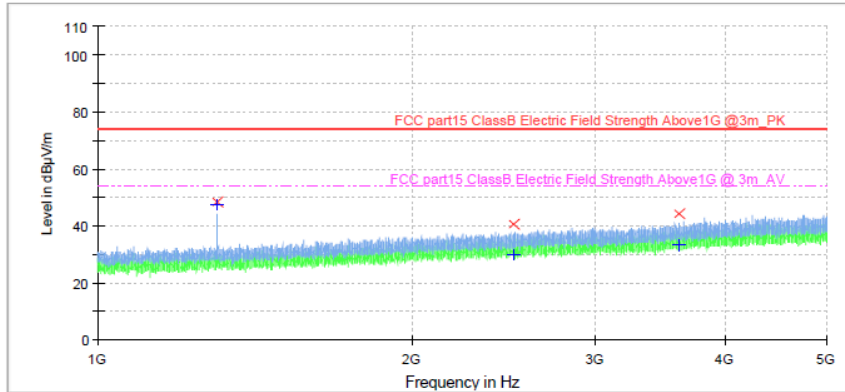


Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1302.000000	48.5	1000.0	1000.000	150.0	H	0.0	-11.5	25.5	74.0
2502.000000	40.4	1000.0	1000.000	150.0	H	0.0	-4.4	33.6	74.0
3604.750000	44.3	1000.0	1000.000	150.0	H	0.0	0.6	29.7	74.0

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1302.000000	47.3	1000.0	1000.000	150.0	H	0.0	-11.5	6.7	54.0
2502.000000	29.8	1000.0	1000.000	150.0	H	0.0	-4.4	24.2	54.0
3604.750000	33.3	1000.0	1000.000	150.0	H	0.0	0.6	20.7	54.0

Above 1GHz, Vertical

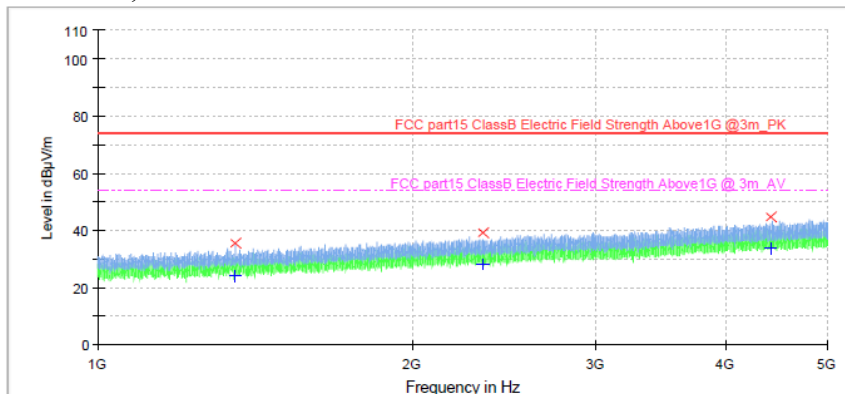

Limit and Margin-PK

Frequency (MHz)	MaxPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1354.875000	35.3	1000.0	1000.000	150.0	V	0.0	-11.2	38.7	74.0
2335.500000	39.2	1000.0	1000.000	150.0	V	0.0	-5.3	34.8	74.0
4416.750000	44.8	1000.0	1000.000	150.0	V	0.0	2.7	29.2	74.0

Limit and Margin-AV

Frequency (MHz)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1354.875000	24.0	1000.0	1000.000	150.0	V	0.0	-11.2	30.0	54.0
2335.500000	28.2	1000.0	1000.000	150.0	V	0.0	-5.3	25.8	54.0
4416.750000	33.6	1000.0	1000.000	150.0	V	0.0	2.7	20.4	54.0

5. List of Tables

Table 1: List of Test and Measurement Equipment, Laboratory	5
Table 2: Measurement Uncertainty	5
Table 3: General Description of EUT	6

6. List of Figures

Figure 1: Test Results of Deactivation of the Transmission	10
Figure 2: Test Results of 20dB Emission Bandwidth	11
Figure 3: Field strength of fundamental.....	13
Figure 4: Spectral Diagrams, Radiated Spurious Emission	14

-- The END --