

承 認 書



SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	Shenzhen Bolaide Technology Co.,Ltd
客 戶 料 號: CUST P/N:	10.0110.1259 Heat shrinkable tube
松 島 料 號: FINE P/N:	G45-6.5UH monooil 0.08*24P*2-10TS
產 品 型 號: DESC:	Φ 43.7MMX5.0MMX0.8MM
日 期: DATE:	2021/11/29
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Huang Mingning	Yuan Zhou	Zhou Wentao	

Shenzhen Bolaide Technology Co.,Ltd

Contact:sheng quan

TPhone:0755-33616363

Fax:0755-33065865

Address:Room 922,Hongyu Building ,Longguan Road,

Longhua,Shenzhen

City,China


Version Change History

[illegible]

SPECIFICATION


產品型號: DESC	Φ20.5x40-6.5uH-0.08x24PX2P-150mm	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	XXX
---------------	----------------------------------	----------------	----------------------------	-----

一、尺寸 DIMENSION:(mm)

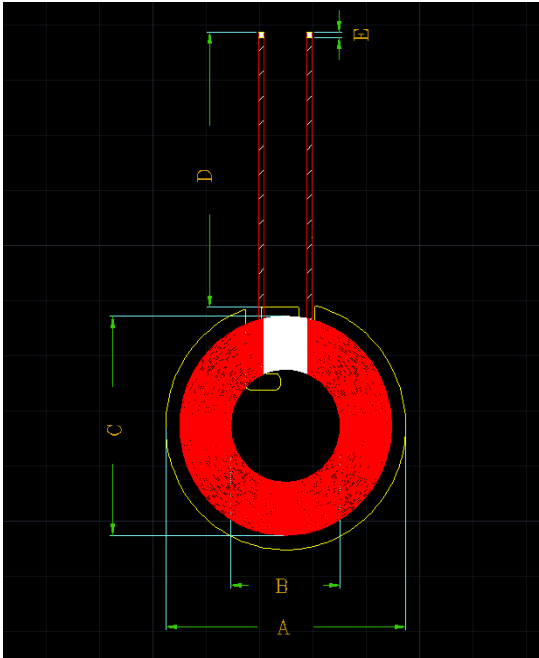

Operating frequency: 113kHz-205kHz Antenna gain:0dBi

二、原理图 SCHEMATIC DIAGRAM:

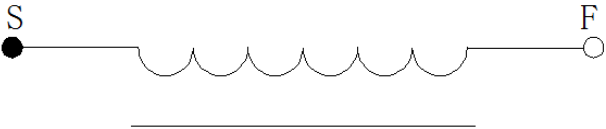

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	丝包线 0.08*24PX2	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤90mΩ	100KHz/1.0V	LCZ METER 502B
4	Q	S-F	≥39	100KHz/1.0V	LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
黃燕銘 2021/11/29	黃錦華 2021/11/29

Note:
1. Cross out wire;
2. Wrap 8mm(ref) width high-temperature adhesive paper 1-2Ts around the outlet position;
3. The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 43.5±0.23mm, and the inner hole 5.0mm, thickness 0.8±0.1mm.
4. Lead heating tube