

Product Name: Bluetooth remote control	Report No:ITEZA2-202400274RF
Product Model: ERF6A82, ERF6xy80pqrstuvw, x: A-Z; y: A-Z, Blank; p: A-Z, Blank; q: A-Z, Blank; r: (, Blank; s:0-9, Blank; t: 0-9, Blank; u: 0-9, Blank; v: 0-9, Blank; w:), Blank	Security Classification: Open
Version: V1.0	Total Page:53

## TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
			

# FCC Radio Test Report

**FCC ID: 2AVIGBR0019**

According to

**47 CFR FCC Part 15, Subpart C(Section 15.247)**

**ANSI C63.10:2013**

Applicant:	Hisense Visual Technology Co., Ltd.
Address:	No.218 Qianwangang Road, Economy and Technology Development Zone, Qingdao, China
Manufacturer:	Wuxi Funide Digital Co.,Ltd.
Address:	NO.55 You Shen Road, Xishan Zone Wuxi. China
Sample No:	1000041514
Product Name:	Bluetooth remote control
Brand Name:	N/A
Model No.:	ERF6A82, ERF6xy80pqrstuvw, x: A-Z; y: A-Z, Blank; p: A-Z, Blank; q: A-Z, Blank; r: (, Blank; s: 0-9, Blank; t: 0-9, Blank; u: 0-9, Blank; v: 0-9, Blank; w:), Blank
Test No.:	ERF6A82

Date of Receipt:	2024/07/22
Date of Test:	2024/07/22~2024/07/30
Issued Date:	2024/07/30
Testing Lab:	TIRT

**Note:** This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.

Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>6</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	9
<b>2 . GENERAL INFORMATION</b>	<b>10</b>
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4. ACCESSORIES OF DEVICE (EUT)	12
2.5 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	12
2.6 SUPPORT UNITS	12
<b>3 .AC POWER LINE CONDUCTED EMISSIONS</b>	<b>13</b>
3.1 LIMIT	13
3.2 TEST PROCEDURE	13
3.3 DEVIATIONFROMTESTSTANDARD	13
3.4 TESTSETUP	14
3.5 EUT OPERATING CONDITIONS	14
3.6 TEST RESULTS	14
<b>4 . RADIATED EMISSIONS</b>	<b>15</b>
4.1 LIMIT	15
4.2 TEST PROCEDURE	16
4.3 DEVIATIONFROMTESTSTANDARD	17
4.4 TESTSETUP	17
4.5 EUT OPERATING CONDITIONS	19
4.6 TEST RESULT- 9KHZ TO 30MHZ	19
4.7 TEST RESULT- 30MHZ TO 1000MHZ	19
4.8 TEST RESULT- ABOVE 1000MHZ	19
<b>5 .BANDWIDTH</b>	<b>20</b>
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	20
5.6 TESTRESULTS	20
<b>6 .MAXIMUM OUTPUT POWER</b>	<b>21</b>
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TESTRESULTS	21
<b>7 .CONDUCTED SPURIOUS EMISSION</b>	<b>22</b>
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
<b>8 .POWER SPECTRAL DENSITY</b>	<b>23</b>
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
<b>9. ANTENNA REQUIREMENT</b>	<b>24</b>
9.1STANDARD REQUIREMENT	24
9.2ANTENNA CONNECTED CONSTRUCTION	24
9.3RESULTS	24
<b>10. MEASUREMENT INSTRUMENTS LIST</b>	<b>25</b>
<b>11. PHOTOS OF TEST SETUP</b>	<b>26</b>
<b>12. PHOTOS OF EUT</b>	<b>28</b>
<b>APPENDIX A - RADIATED EMISSION -9 KHZ TO 30 MHZ</b>	<b>33</b>
<b>APPENDIX B - RADIATED EMISSION-30 MHZ TO 1000 MHZ</b>	<b>34</b>

<b>Table of Contents</b>	<b>Page</b>
<b>APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>36</b>
<b>APPENDIX D - BANDWIDTH</b>	<b>38</b>
<b>APPENDIX E - MAXIMUM OUTPUT POWER</b>	<b>42</b>
<b>APPENDIX F - CONDUCTED SPURIOUS EMISSION</b>	<b>44</b>
<b>APPENDIX G - POWER SPECTRAL DENSITY</b>	<b>50</b>
<b>APPENDIX H: DUTY CYCLE</b>	<b>52</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400274RF	V1.0	Original Report.	2024.07.30	Valid

**1. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

## 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The measurement uncertainty as below table:

Uncertainty	Parameter	Uncertainty
	Occupied Channel Bandwidth	±142.12 KHz
	RF power conducted	±0.74 dB
	RF power radiated	±3.25dB
	Spurious emissions, conducted	±1.78dB
	Spurious emissions, radiated (30MHz~1GHz)	±4.6dB
	Spurious emissions, radiated (1GHz ~ 18GHz)	±4.9dB
	Conduction Emissions(150kHz~30MHz)	±3.1 dB
	Humidity	±4.6%
	Temprature	±0.7°C
	Time	±1.25%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	N/A	N/A	N/A	N/A
Radiated Emissions-9 kHz to 30 MHz	24.5°C	50%	DC 3V from battery	Stone Tang
Radiated Emissions-30 MHz to 1000 MHz	24°C	53%	DC 3V from battery	Stone Tang
Radiated Emissions-Above 1000 MHz	26°C	53%	DC 3V from battery	Stone Tang
Bandwidth	25°C	56%	DC 3V from battery	Stone Tang
Maximum Output Power	24°C	54%	DC 3V from battery	Stone Tang
ConductedSpurious Emission	25°C	62%	DC 3V from battery	Stone Tang
Power Spectral Density	26°C	60%	DC 3V from battery	Stone Tang

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Bluetooth remote control
Brand Name	N/A
Test Model	ERF6A82
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1.0
Hardware Version	V1.0
Power Rating	DC 3V from battery (2*AAA battery)
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	1Mbps
Max. Output Power	1Mbps: 3.67dBm (0.002328W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

## 2.2 DESCRIPTION OF TEST MODES

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK (1M)	CH00	2402
	CH20	2442
	CH39	2480

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

Table for Filed Antenna:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	PCB Antenna	N/A	-1.76

Note: Antenna information is provided by applicant.

The antenna is for fixed use

### 2.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	Button frequency setting		
Frequency (MHz)	2402	2442	2480
1Mbps	default	default	default

### 2.4. ACCESSORIES OF DEVICE (EUT)

Accessories	/
Manufacturer	/
Model	/
Ratings	/
	/

### 2.5 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOF SYSTEMTESTED



### 2.6 SUPPORT UNITS

No.	Description	Manufacturer	Model	Note
1	/	/	/	/
2	/	/	/	/

### 3.AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.5-5.0	56	6
5.0 -30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation.

### 3.4 TEST SETUP

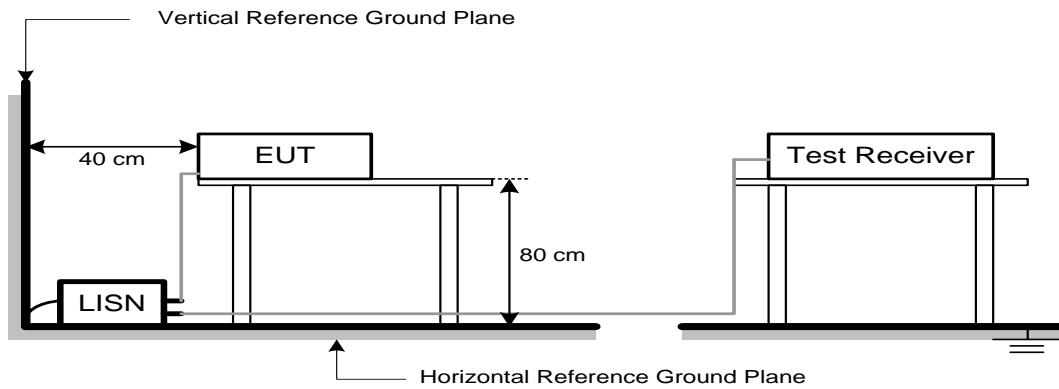

The LISN edge is arranged parallel to the edge of the test table

The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT

### 3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.6 TEST RESULTS

N/A

The EUT is supplied by Battery, so this item does not applicable.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a)limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:



Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz


Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for PK value 1MHz / 1/THz for AVG value

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5GHz for PK/AVG detector

**4.3 DEVIATION FROM TEST STANDARD**

No deviation.

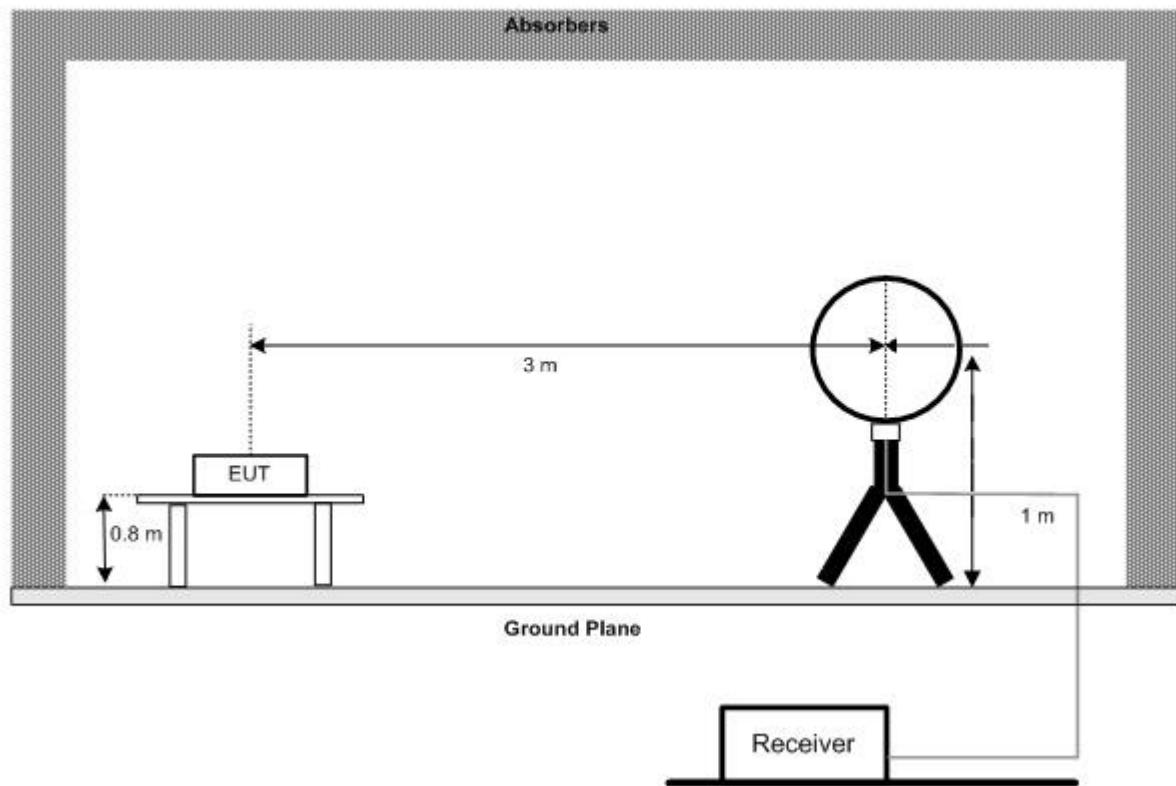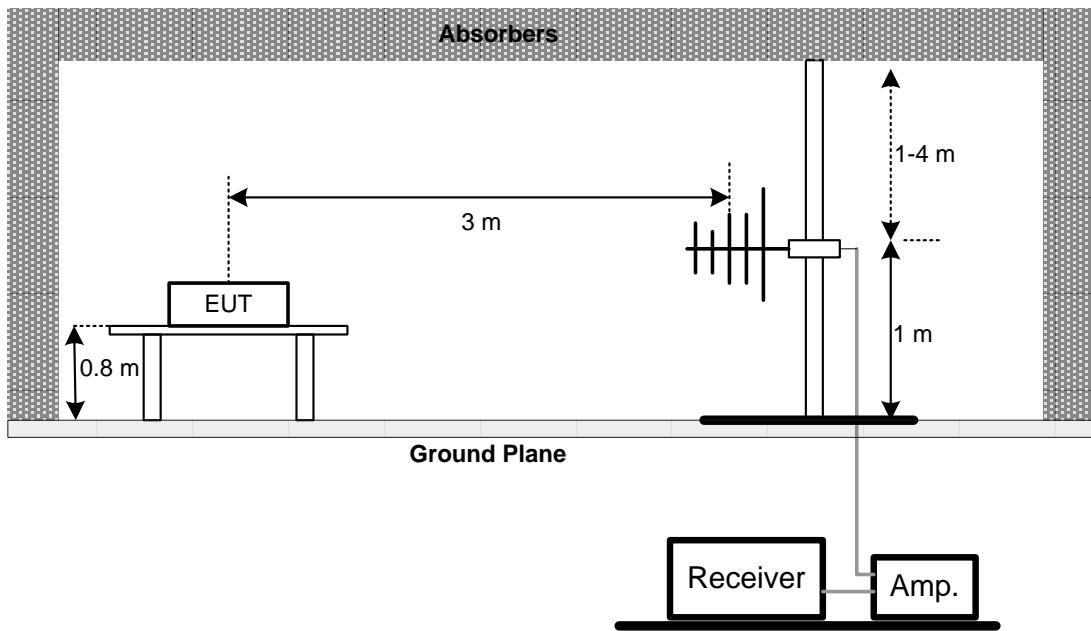**4.4 TEST SETUP****9 kHz to 30 MHz****30 MHz to 1 GHz**

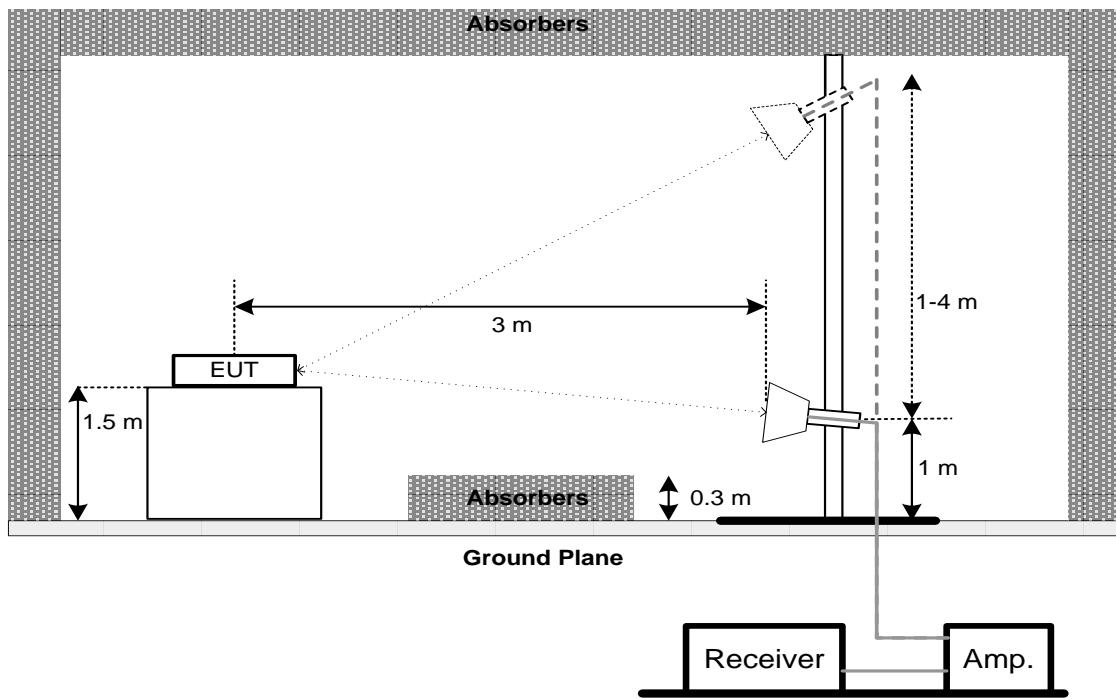**Above 1 GHz**

**4.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**4.6 TEST RESULT- 9kHz TO 30MHz**

Please refer to the APPENDIX-A

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.7 TEST RESULT- 30MHz TO 1000MHz**

Please refer to the APPENDIX-B

**4.8 TEST RESULT- ABOVE 1000MHz**

Please refer to the APPENDIX-C

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5.BANDWIDTH

### 5.1LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

### 5.2TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	50 kHz
VBW	200kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.3DEVIATION FROM STANDARD

No deviation.

### 5.4TEST SETUP

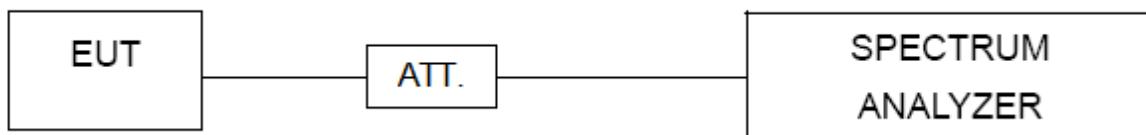

### 5.5EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 5.6TESTRESULTS

Please refer to the APPENDIX-D

## 6. MAXIMUM OUTPUT POWER

### 6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00dBm

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	$\geq 3 \times \text{RBW}$
RBW	2 MHz
VBW	5 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX-E

## 7.CONDUCTED SPURIOUS EMISSION

### 7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

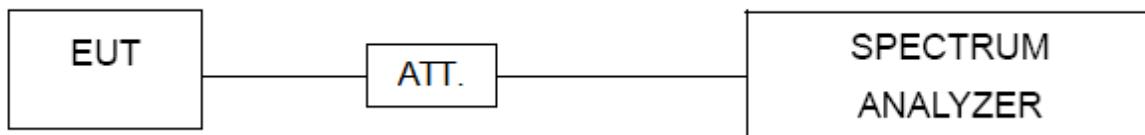

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX-F

## 8. POWER SPECTRAL DENSITY

### 8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	2 MHz (1 Mbps) / 4 MHz (2 Mbps)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX-G

## **9. ANTENNA REQUIREMENT**

### **9.1 STANDARD REQUIREMENT**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **9.2 ANTENNA CONNECTED CONSTRUCTION**


The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

### **9.3 RESULTS**

The EUT antenna is PCB antenna. It complies with the standard requirement.

**10. MEASUREMENT INSTRUMENTS LIST**


Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Receiver	Rohde&Schwarz	ESIB 40	YH-TIRT-SAC-966-20220911	2024/01/05	2025/01/04
Integral Antenna	Schwarzbeck	VULB 9163	01314	2022.12.11	2024.12.10
Integral Antenna	Rohde&Schwarz	HF907	RSM2991424	2022.12.11	2024.12.10
Preamplifier	Emtrace	RP01A	'02017	2024/01/05	2025/01/04
Preamplifier	Schwarzbeck	BBV9744	00143	2024/01/05	2025/01/04
Loop Antenna	ZHINAN	ZN30900A	12024	2024/01/05	2025/01/04
Exposure Level Tester	narda	ELT-400	N-0925	2024/01/05	2025/01/04
Horn Antenna	Schwarzbeck	BBHA9170	00956	2024/01/05	2025/01/04
RF Cable	/	LMR400UF-NMNM-7.0M	/	2024/01/05	2025/01/04
RF Cable	/	SFT2050PUR-NMNM-7.0M	/	2024/01/05	2025/01/04
EMI Receiver	Rohde&Schwarz	ESR7	1316.3003K07-10 2611-mk	2023/11/02	2024/11/01
LISN	Rohde&Schwarz	ENV216	3560.655.12-1029 15-Bp	2023/11/02	2024/11/01
ISN	Schwarzbeck	ENY81	1309.8510.03	2024/01/05	2025/01/04
ISN	Schwarzbeck	ENY81-CAT6	1309.8526.03-101 976-kh	2024/01/05	2025/01/04
RF Cable	\	SFT2050PUR-NMNM-2.0M	\	2024/01/05	2025/01/04
CMW500	ROHDE&SCHWARZ	CMW500	120434	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSU26	200732	2024/01/05	2025/01/04
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	101722	2024/01/05	2025/01/04
vector Signal Generator	KEYSIGHT	N5182B	MY56200458	2024/01/05	2025/01/04
vector Signal Generator	HEWLETT PACKARD	83752A	3610A02458	2024/01/05	2025/01/04
Filter	HEWLETT PACKARD	JS0806-F	19K8060209	2024/01/05	2025/01/04
Wireless comprehensive tester	ANRISTU	MT8821C	SN6262170409	2024/01/05	2025/01/04
Wireless comprehensive tester	ANRISTU	MT8000A	SN6262166782	2024/01/05	2025/01/04

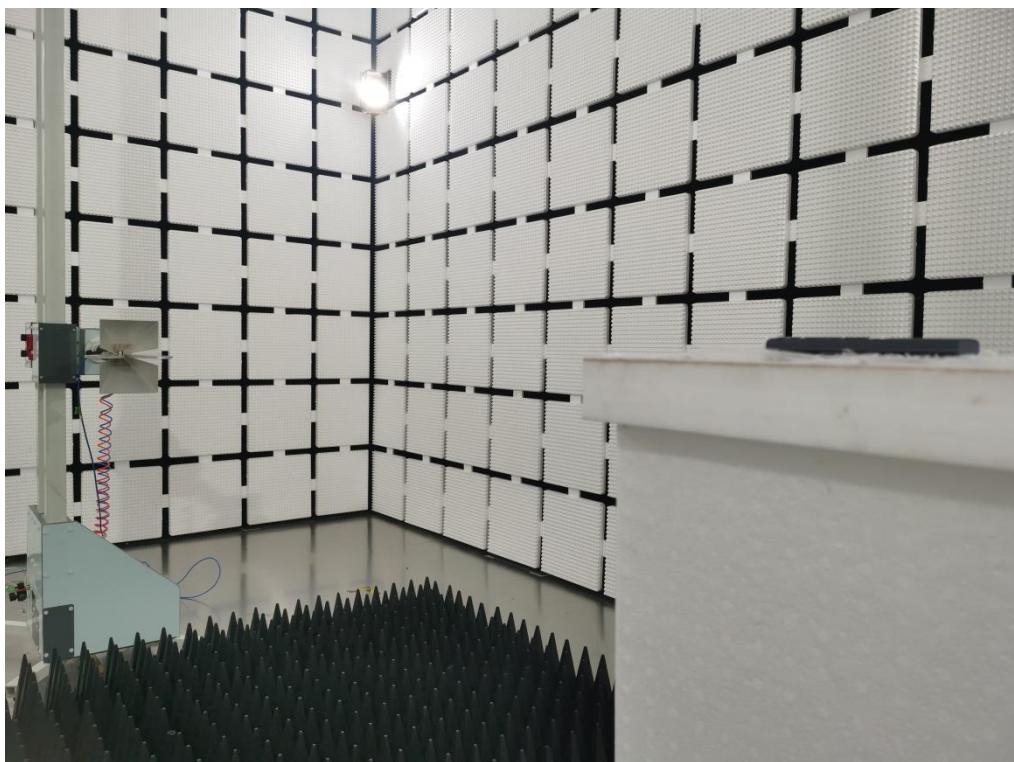**11. PHOTOS OF TEST SETUP****Radiated Emissions Test Photos****30 MHz to 1 GHz****Radiated Emissions Test Photos****Above 1 GHz**



**Conducted Test Photos**

**12. PHOTOS OF EUT**



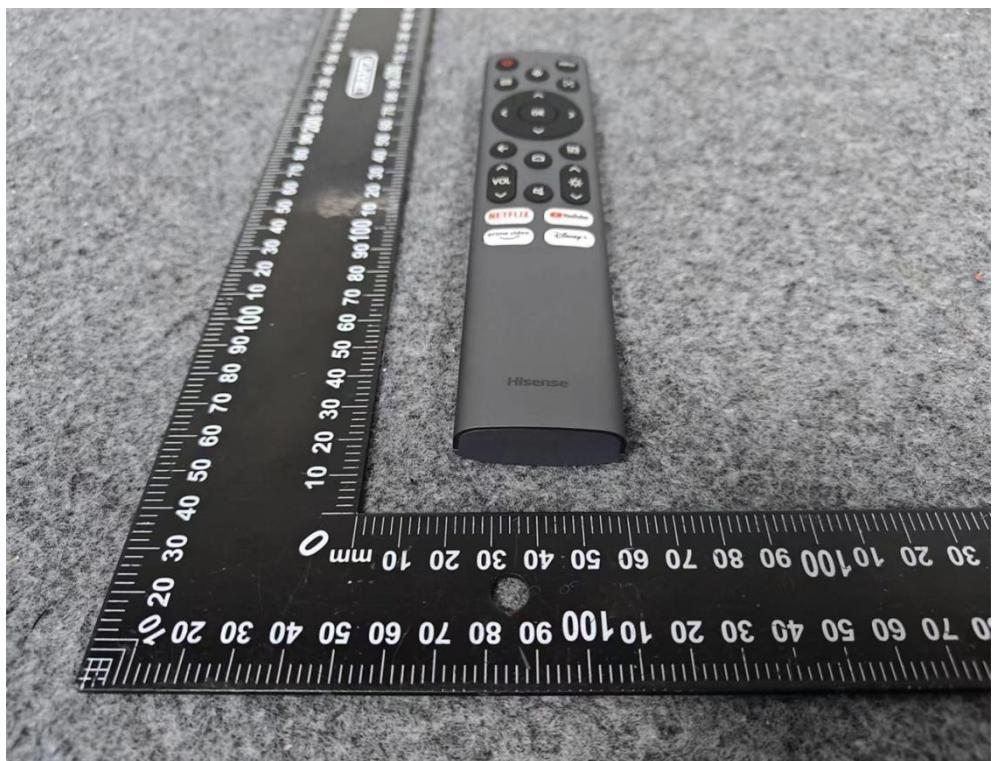



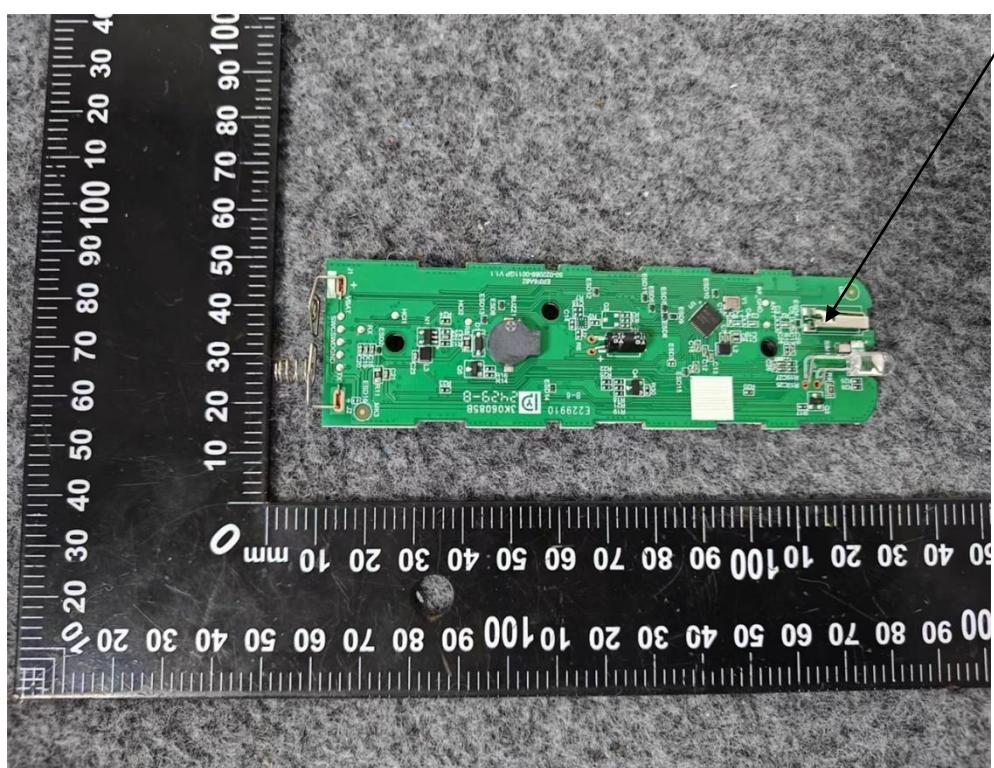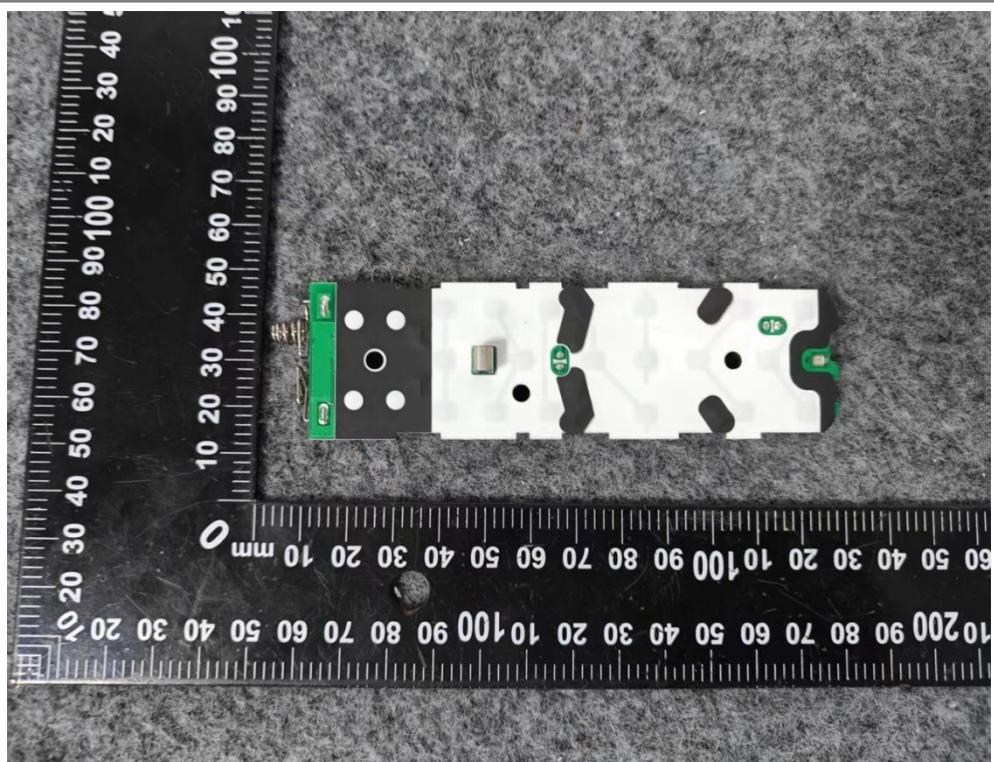

## APPENDIX A - RADIATED EMISSION -9 KHZ TO 30 MHZ


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

**APPENDIX B - RADIATED EMISSION-30 MHZ TO 1000 MHZ**

Only show the worst mode:

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

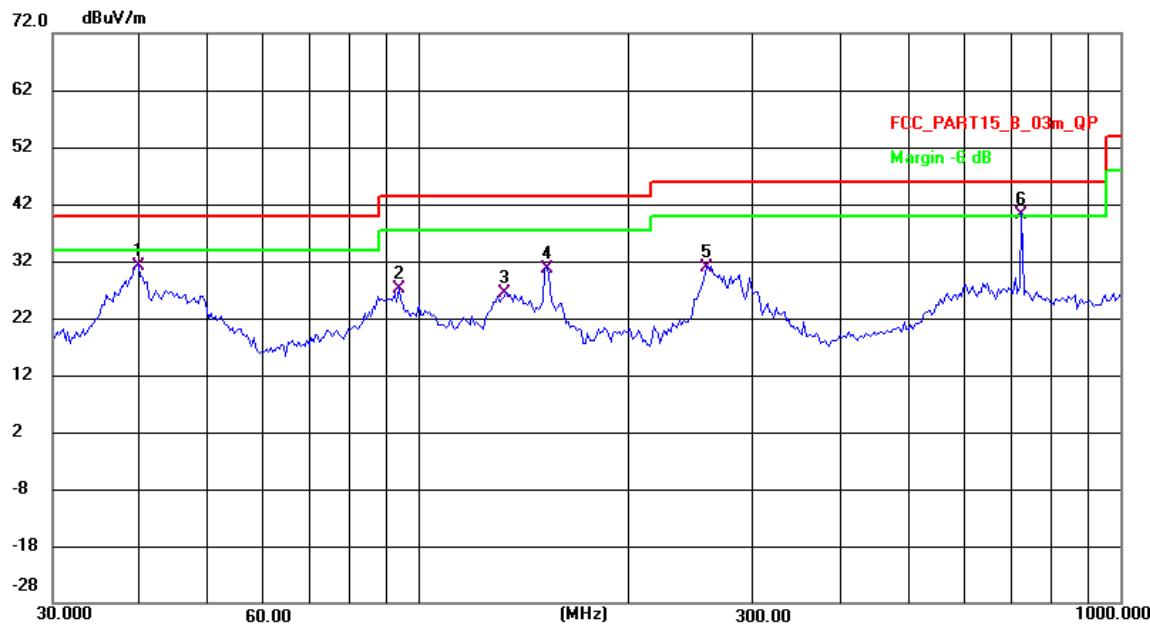

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	39.7371	53.32	-22.11	31.21	40.00	-8.79	QP	200	349	P	
2	93.6532	52.44	-25.42	27.02	43.50	-16.48	QP	200	301	P	
3	133.0809	48.28	-21.93	26.35	43.50	-17.15	QP	100	254	P	
4	152.0902	51.49	-20.76	30.73	43.50	-12.77	QP	200	22	P	
5	257.6266	54.05	-23.24	30.81	46.00	-15.19	QP	100	179	P	
6 *	723.7930	51.65	-11.41	40.24	46.00	-5.76	QP	100	343	P	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	38.9081	54.08	-22.26	31.82	40.00	-8.18	QP	100	218	P	
2	67.7856	47.87	-23.70	24.17	40.00	-15.83	QP	200	89	P	
3	118.9285	56.63	-22.90	33.73	43.50	-9.77	QP	200	332	P	
4	137.8400	47.90	-21.72	26.18	43.50	-17.32	QP	100	27	P	
5	744.4265	43.70	-10.69	33.01	46.00	-12.99	QP	200	349	P	
6	899.9577	39.20	-8.38	30.82	46.00	-15.18	QP	200	315	P	

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Result of RADIATED EMISSION-1000MHz TO 25GHz

Test Mode : GFSK TX Low

No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	88.25	-27.15	61.1	74.00	-12.9	Peak
2	4804	V	68.36	-27.15	41.21	54.00	-12.79	Avg
3	7206	--	--	--		--		--
4	9608	--	--	--		--		--
5	4804	H	89.61	-27.15	62.46	74.00	-11.54	Peak
6	4804	H	68.31	-27.15	41.16	54.00	-12.84	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--

Test Mode : GFSK TX Mid

1	4880	V	90.34	-27.83	62.51	74.00	-11.49	Peak
2	4880	V	70.21	-27.83	42.38	54.00	-11.62	Avg
3	7320	--	--	--		--		--
4	9760	--	--	--		--		--
5	4880	H	89.61	-27.83	61.78	74.00	-12.22	Peak
6	4880	H	68.94	-27.83	41.11	54.00	-12.89	Avg
7	7320	--	--	--	--	--	--	--
8	9760	--	--	--	--	--	--	--

Test Mode : GFSK TX High

1	4960	V	91.04	-28.45	62.59	74.00	-11.41	Peak
2	4960	V	70.01	-28.45	41.56	54.00	-12.44	Avg
3	7440	--	--	--		--		--
4	9920	--	--	--		--		--
5	4960	H	89.61	-28.45	61.16	74.00	-12.84	Peak
6	4960	H	68.32	-28.45	39.87	54.00	-14.13	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--

Note :


- Means other frequency and mode comply with standard requirements and at least have 20dB margin.
- Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.  
Result=Reading + Correct Factor. Margin= Result-Limit.

## Test Result of Radiated Spurious at Band edges

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				1Mbps: GFSK TX 2402MHz				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.25	-21.47	52.78	74.00	-21.22	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	75.03	-26.12	48.91	74.00	-25.09	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
<hr/>								
1	2390	V	73.98	-21.47	52.51	74.00	-21.49	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	74.97	-26.12	48.85	74.00	-25.15	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
<hr/>								
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				1Mbps: GFSK TX 2480MHz				
1	2483.5	H	77.52	-25.29	52.23	74.00	-21.77	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
<hr/>								
1	2483.5	V	77.14	-25.29	51.85	74.00	-22.15	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
<p>Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.</p> <p>Result=Reading + Correct Factor.</p> <p>Margin= Result-Limit.</p> <p>3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p>								


**APPENDIX D - BANDWIDTH****-6dB Bandwidth**

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.73	2401.63	2402.36	0.5	PASS
		2442	0.72	2441.63	2442.35	0.5	PASS
		2480	0.73	2479.63	2480.36	0.5	PASS

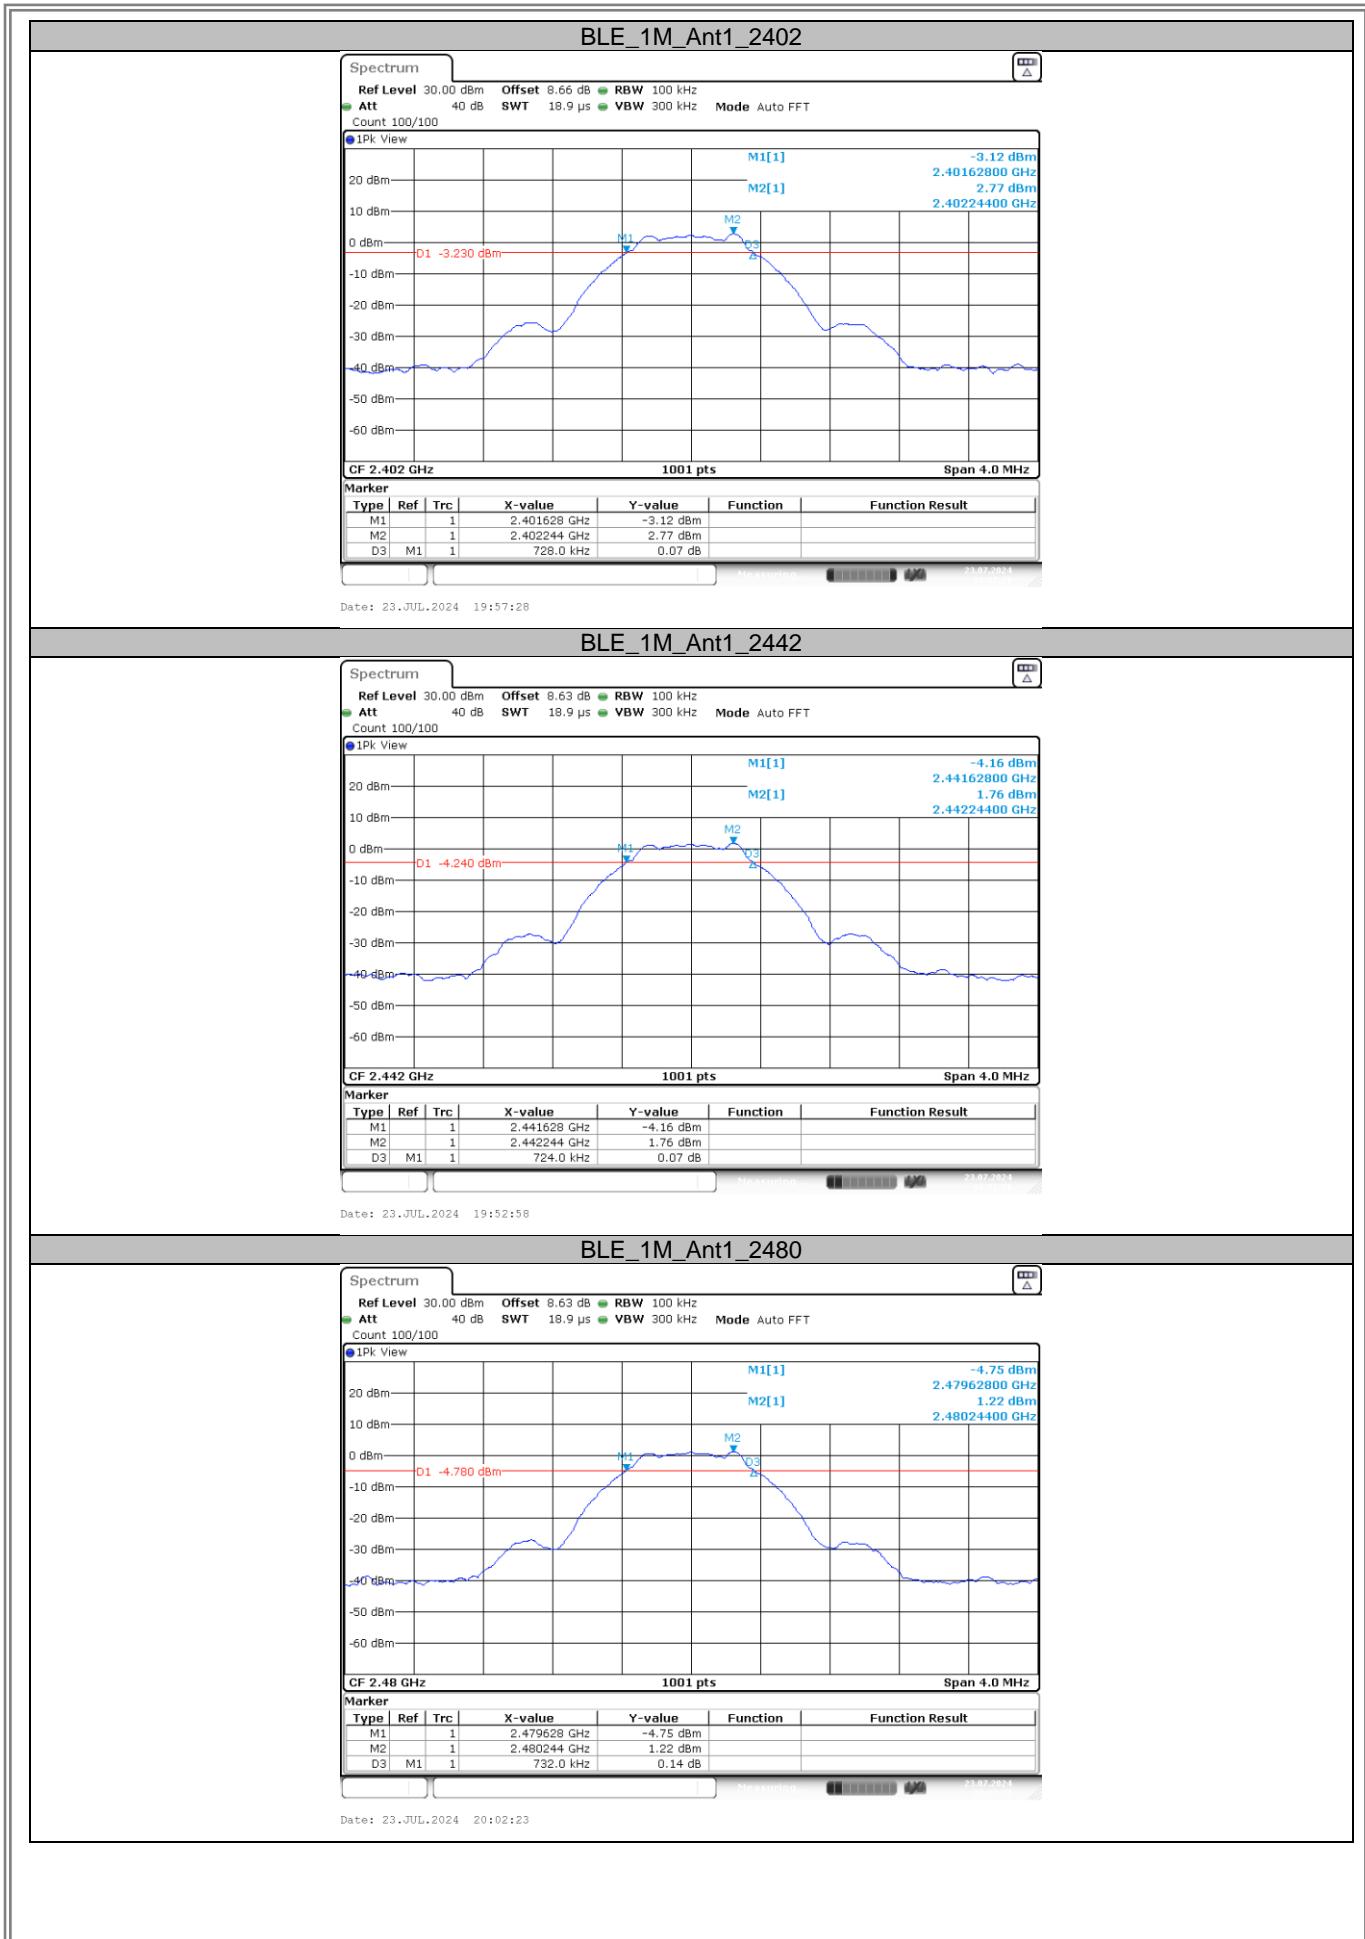


**99% Occupied Bandwidth**

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.063	2401.4645	2402.5275	---	---
		2442	1.055	2441.4685	2442.5235	---	---
		2480	1.055	2479.4685	2480.5235	---	---

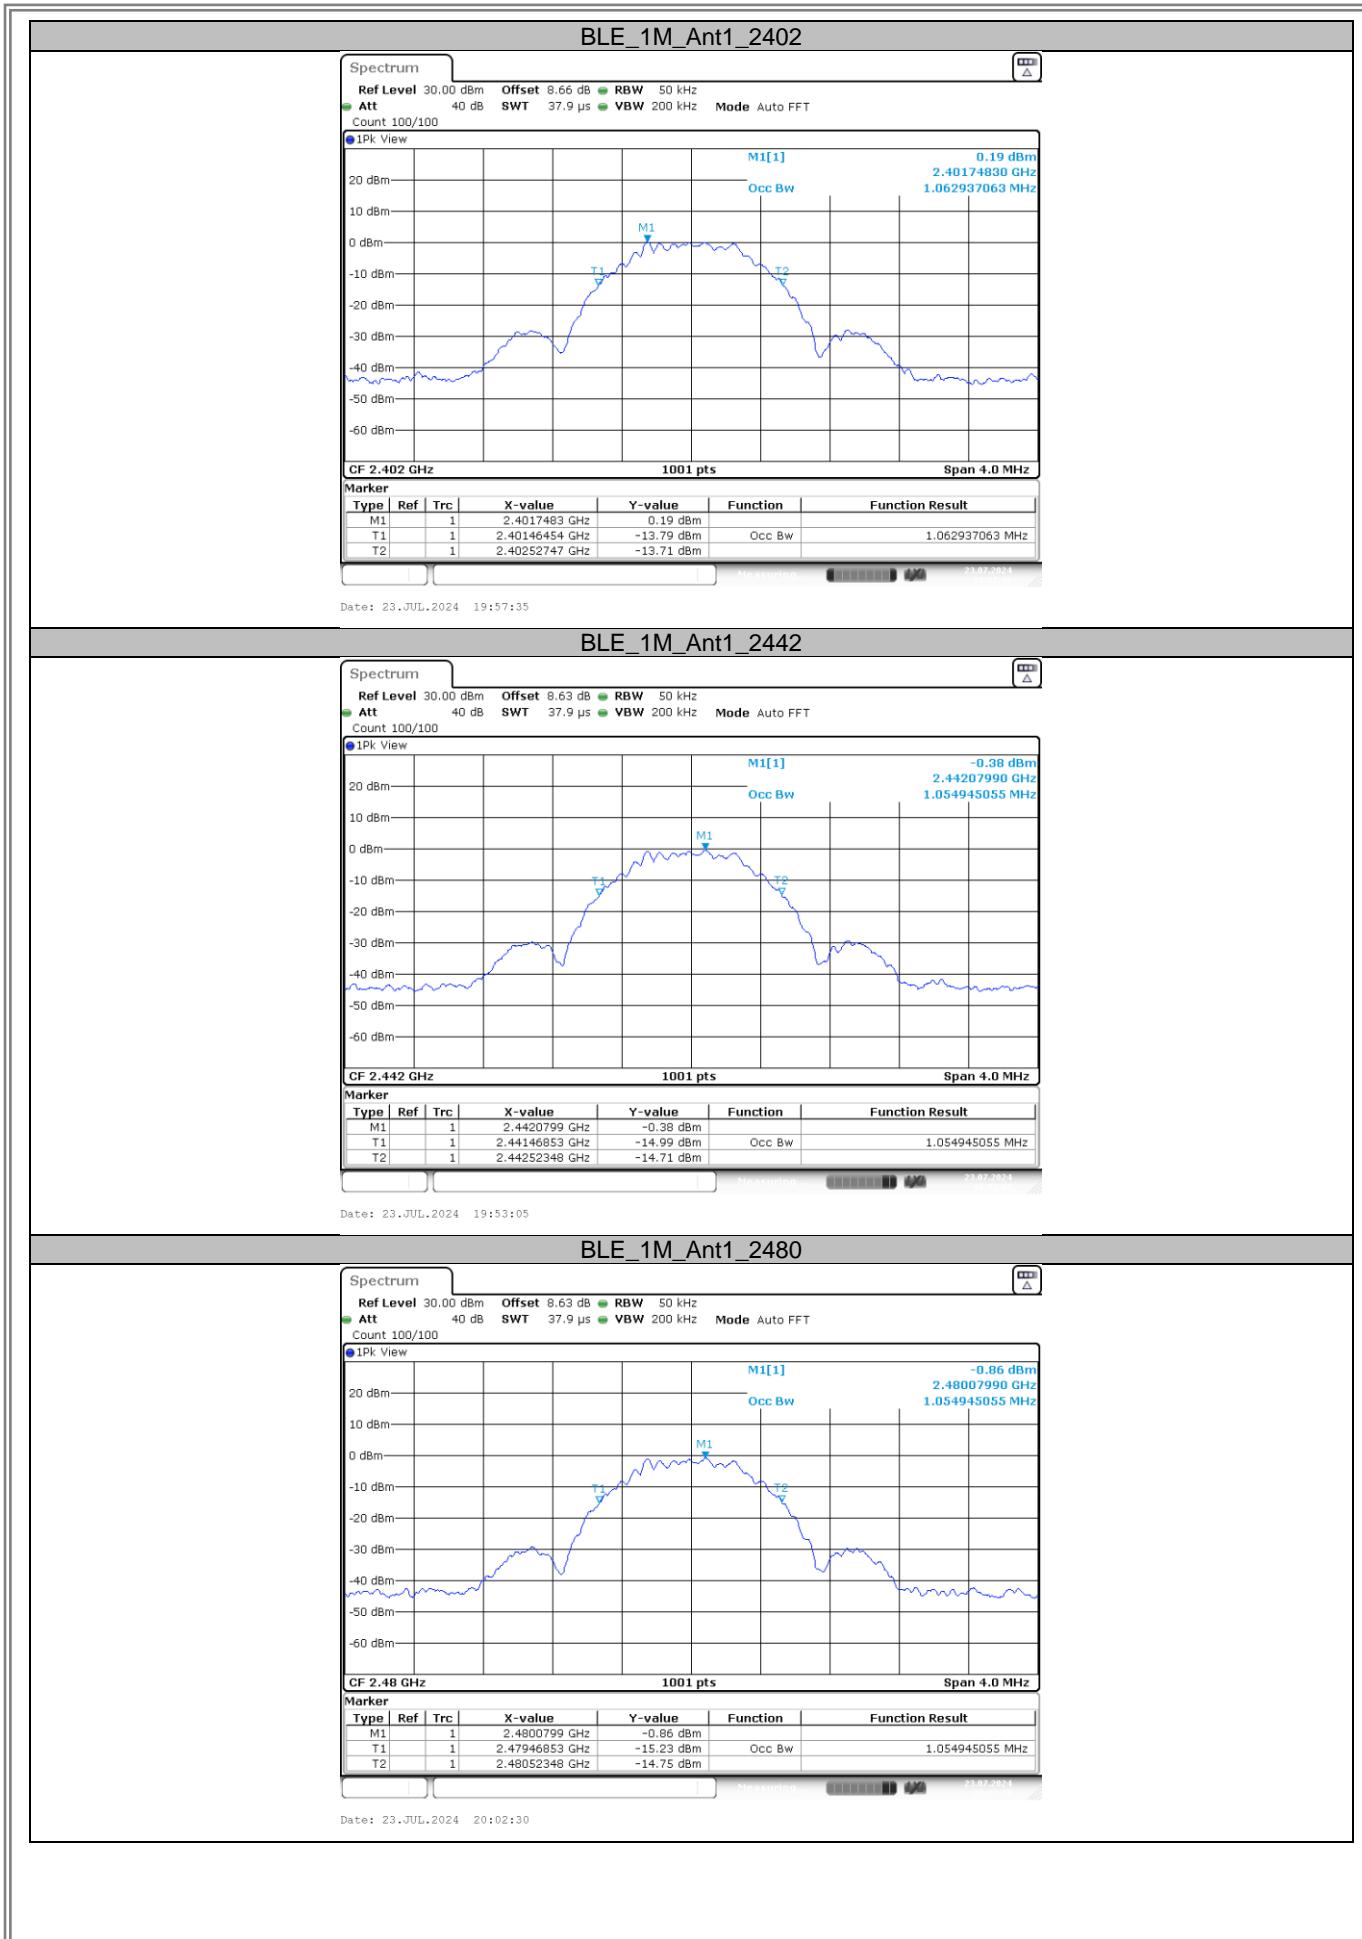


**APPENDIX E - MAXIMUM OUTPUT POWER**


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	3.67	≤30	PASS
		2442	2.83	≤30	PASS
		2480	2.40	≤30	PASS

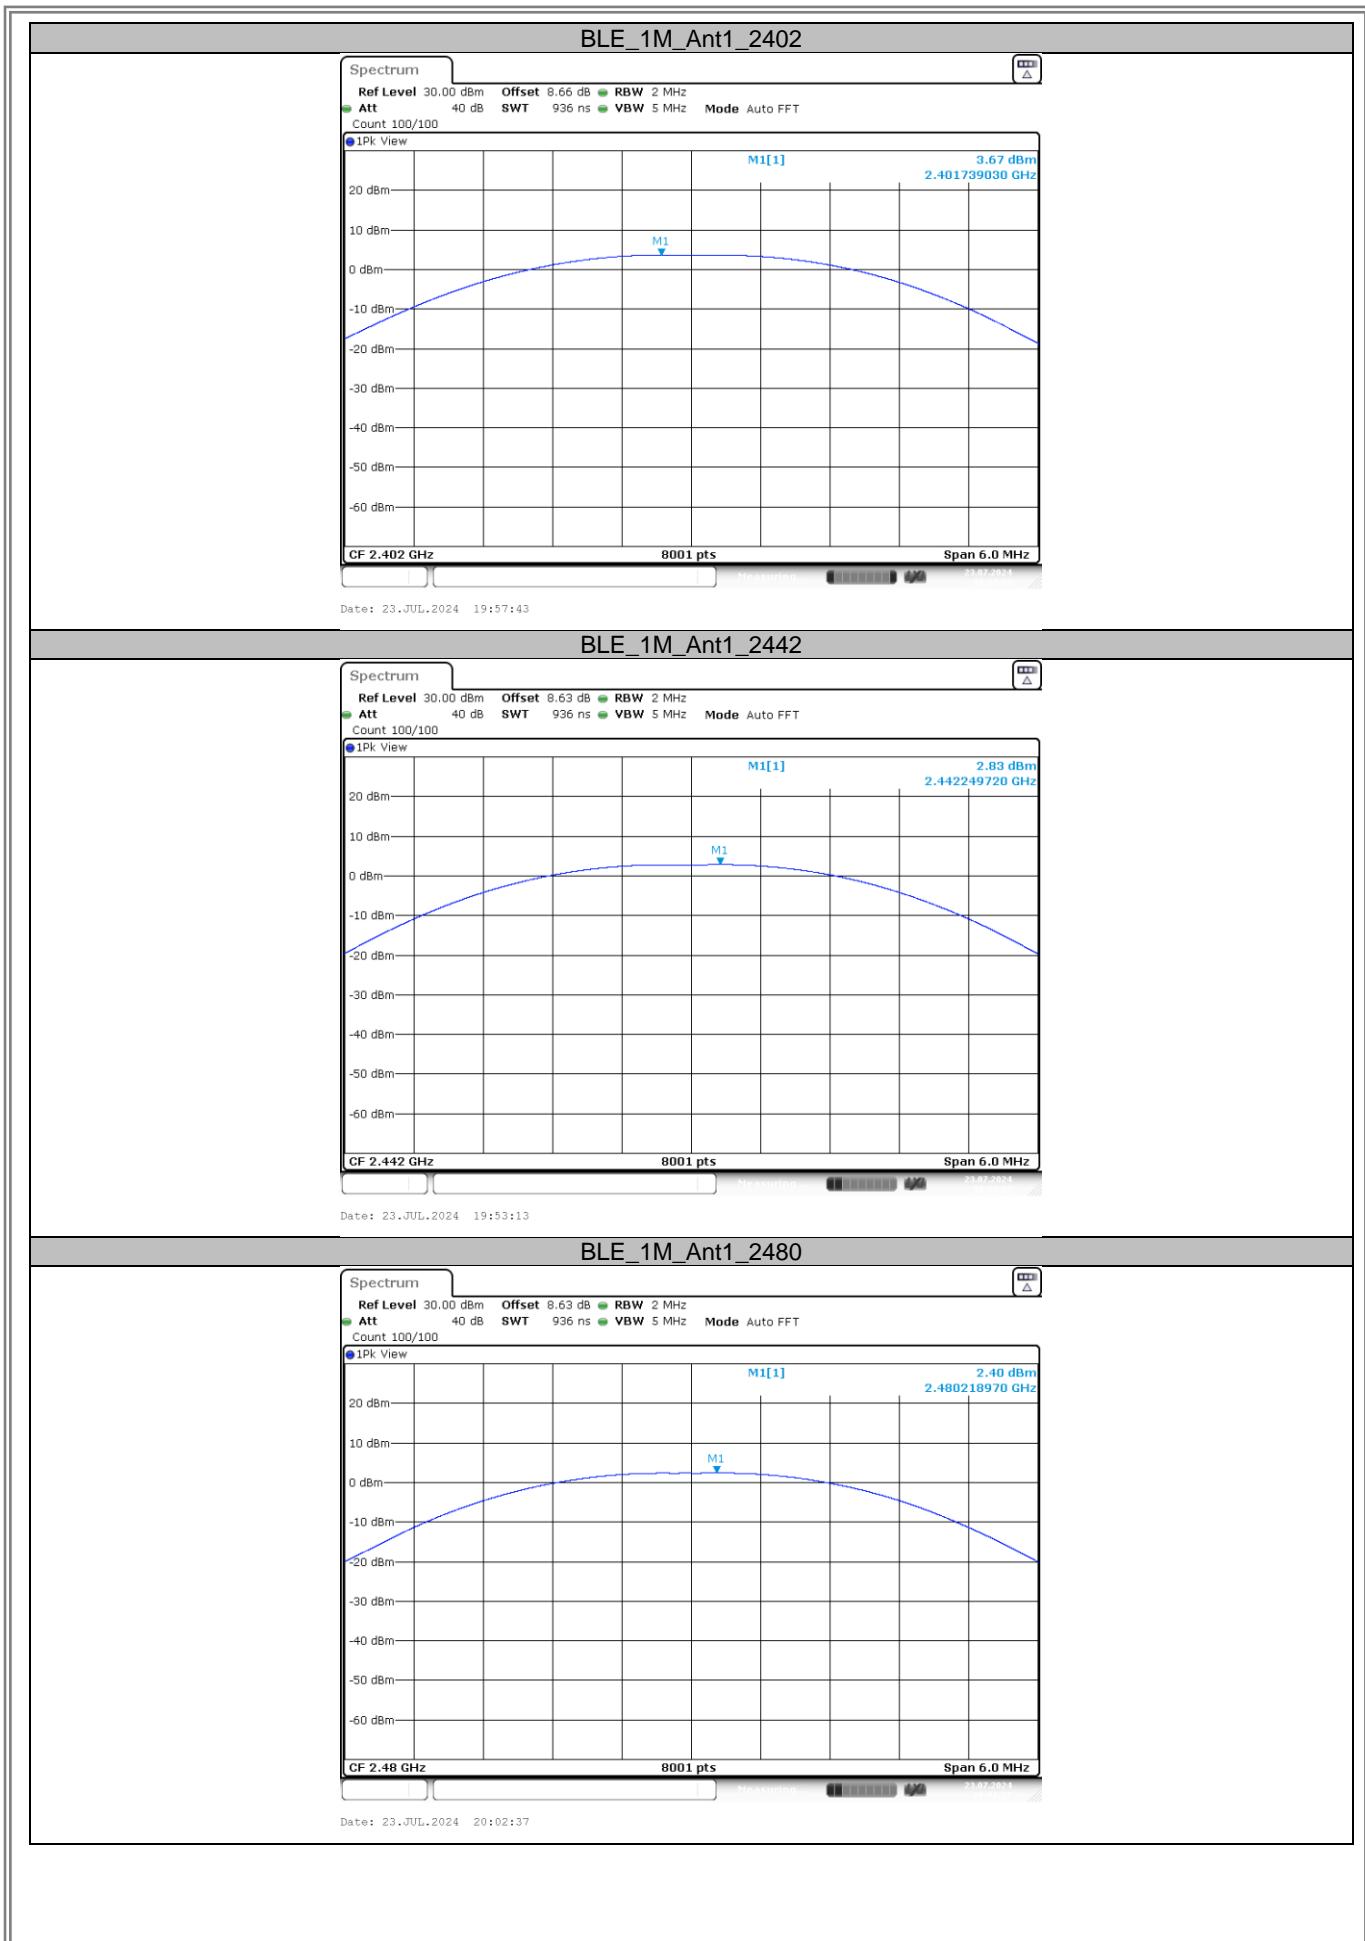

**APPENDIX F - CONDUCTED SPURIOUS EMISSION****Spurious Emission**



TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	2.82	-58.01	≤-17.18	PASS
			1000~26500	2.82	-45.21	≤-17.18	PASS
		2442	30~1000	1.91	-58	≤-18.09	PASS
			1000~26500	1.91	-45.45	≤-18.09	PASS
		2480	30~1000	1.45	-59.86	≤-18.55	PASS
			1000~26500	1.45	-45.01	≤-18.55	PASS

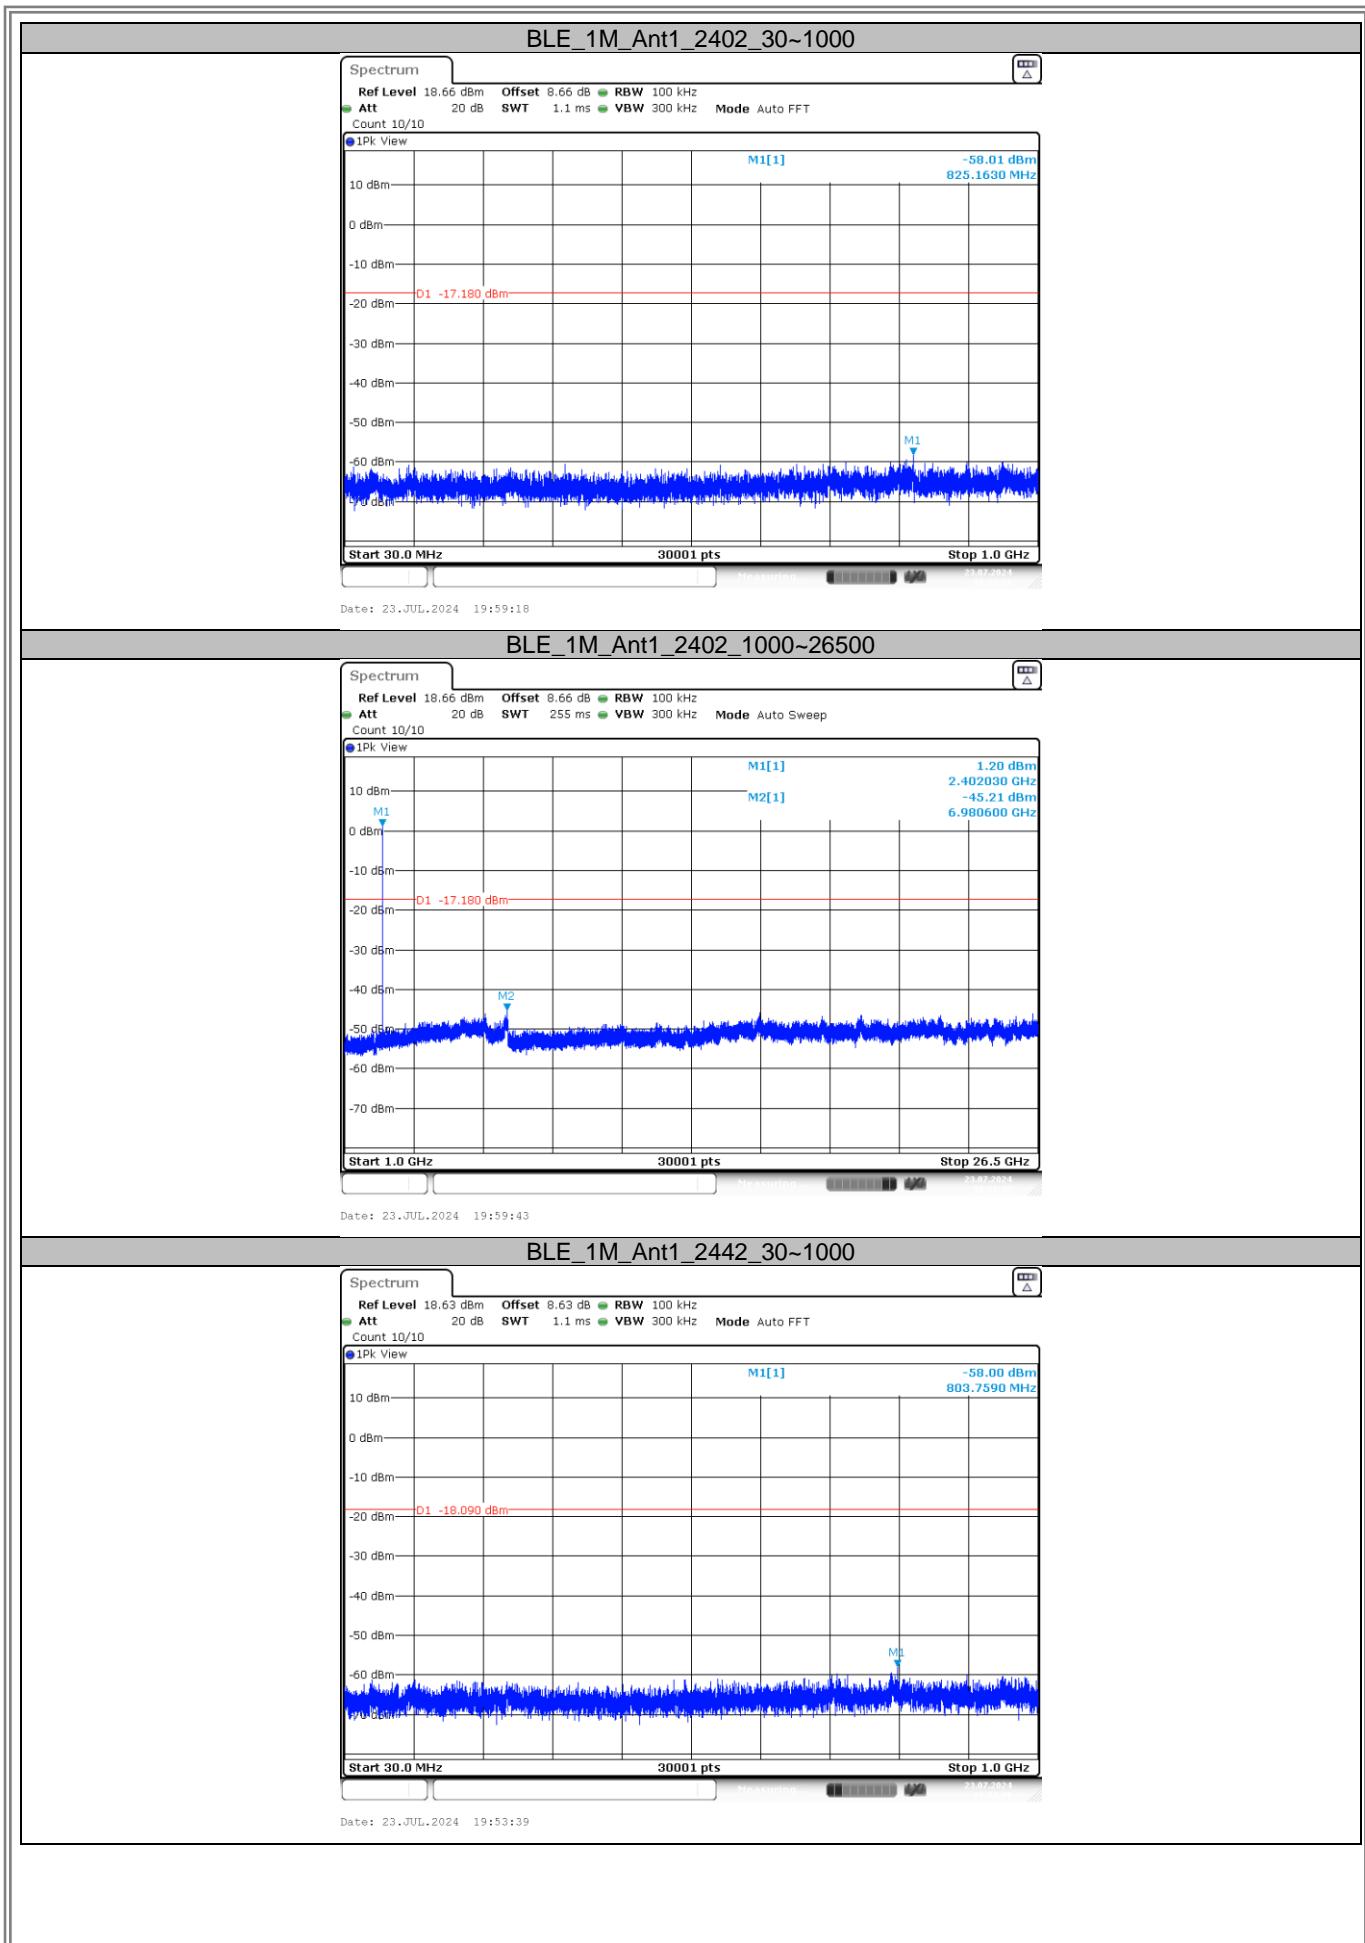


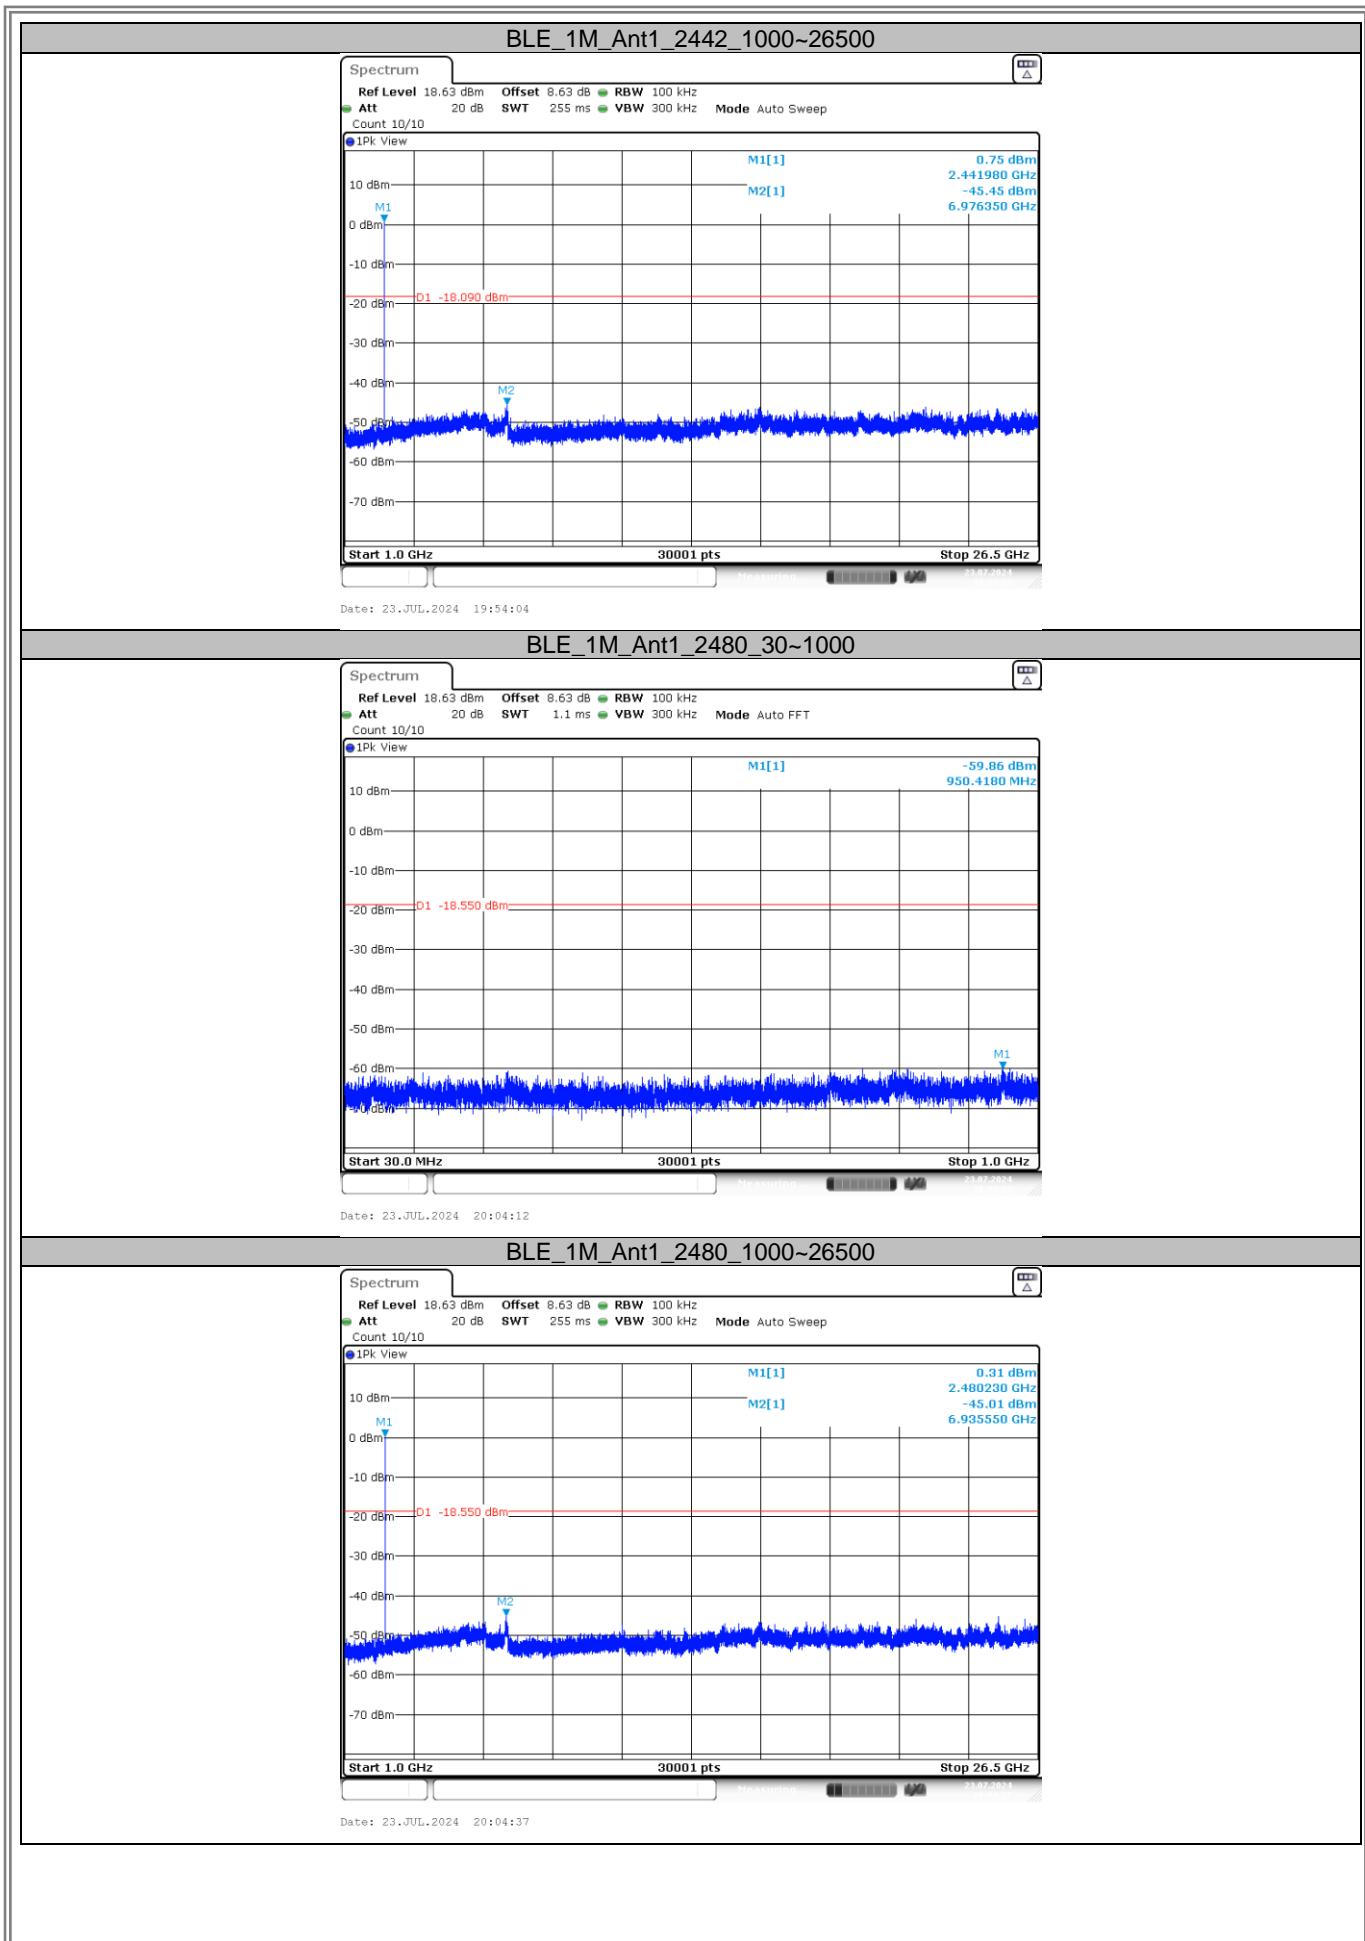


**Bandedge**

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2402.24	2.82
		2442	2442.25	1.91
		2480	2480.24	1.45

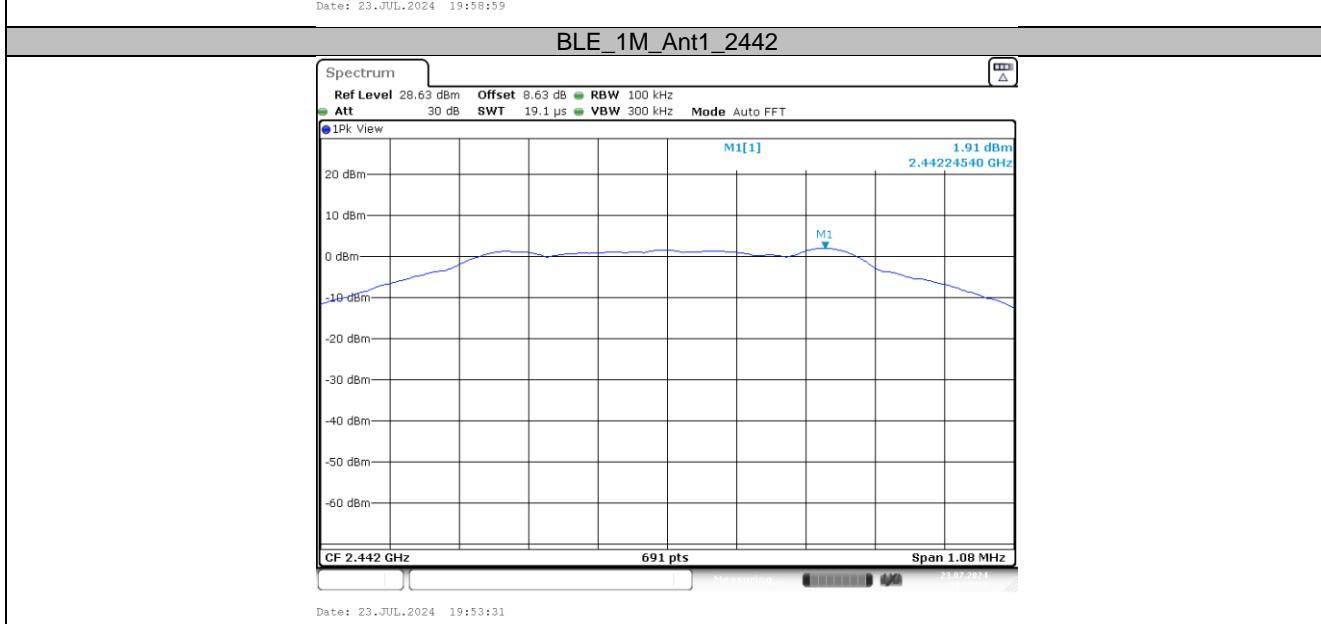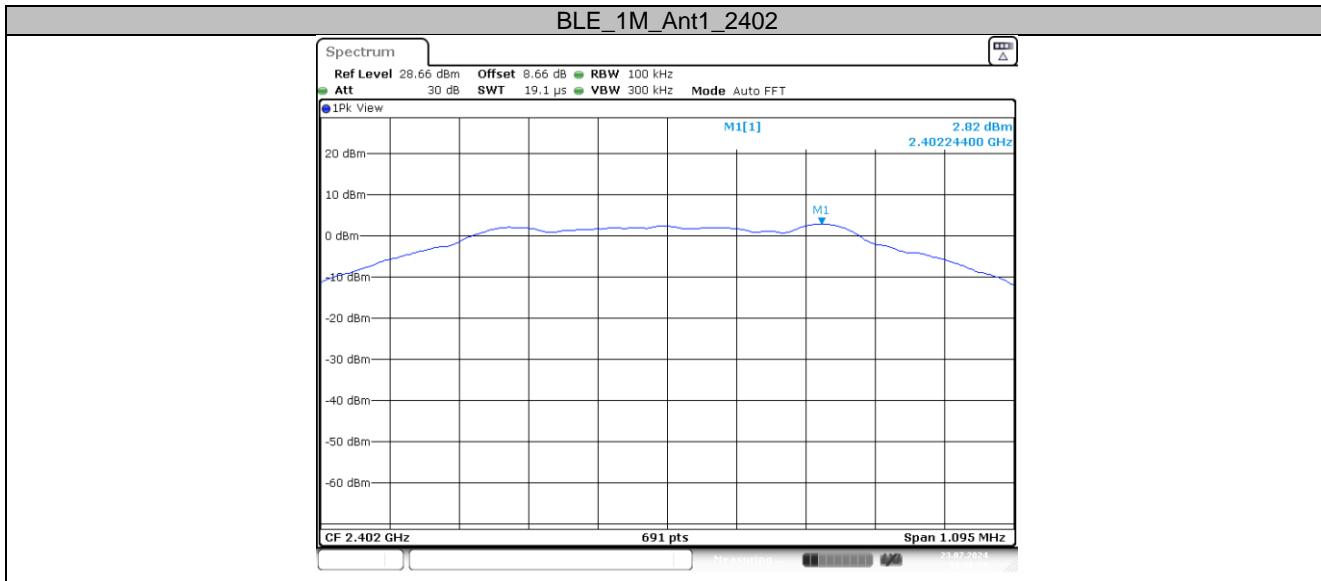


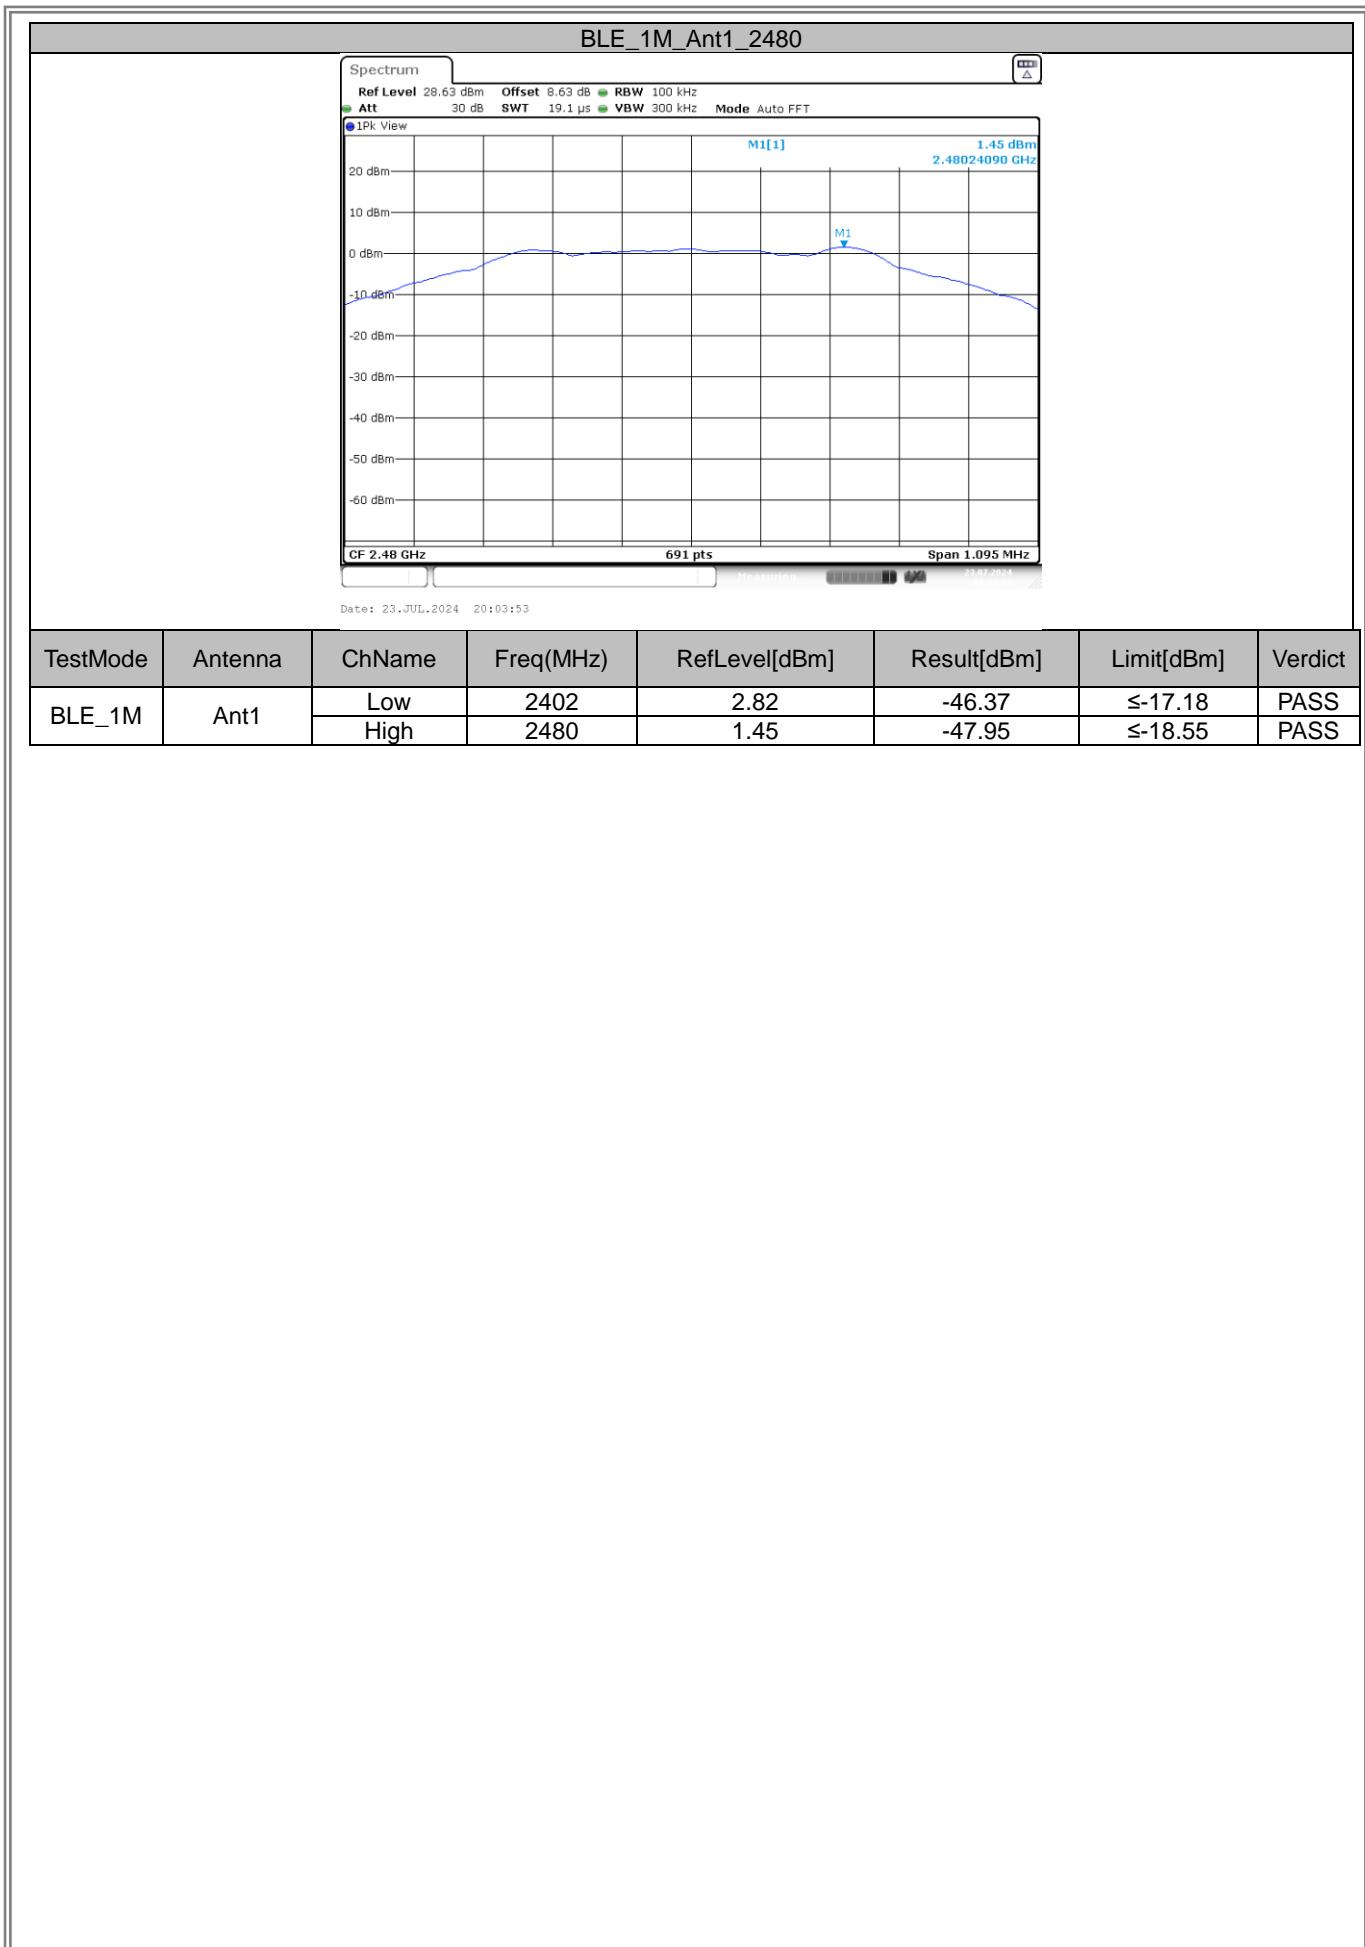

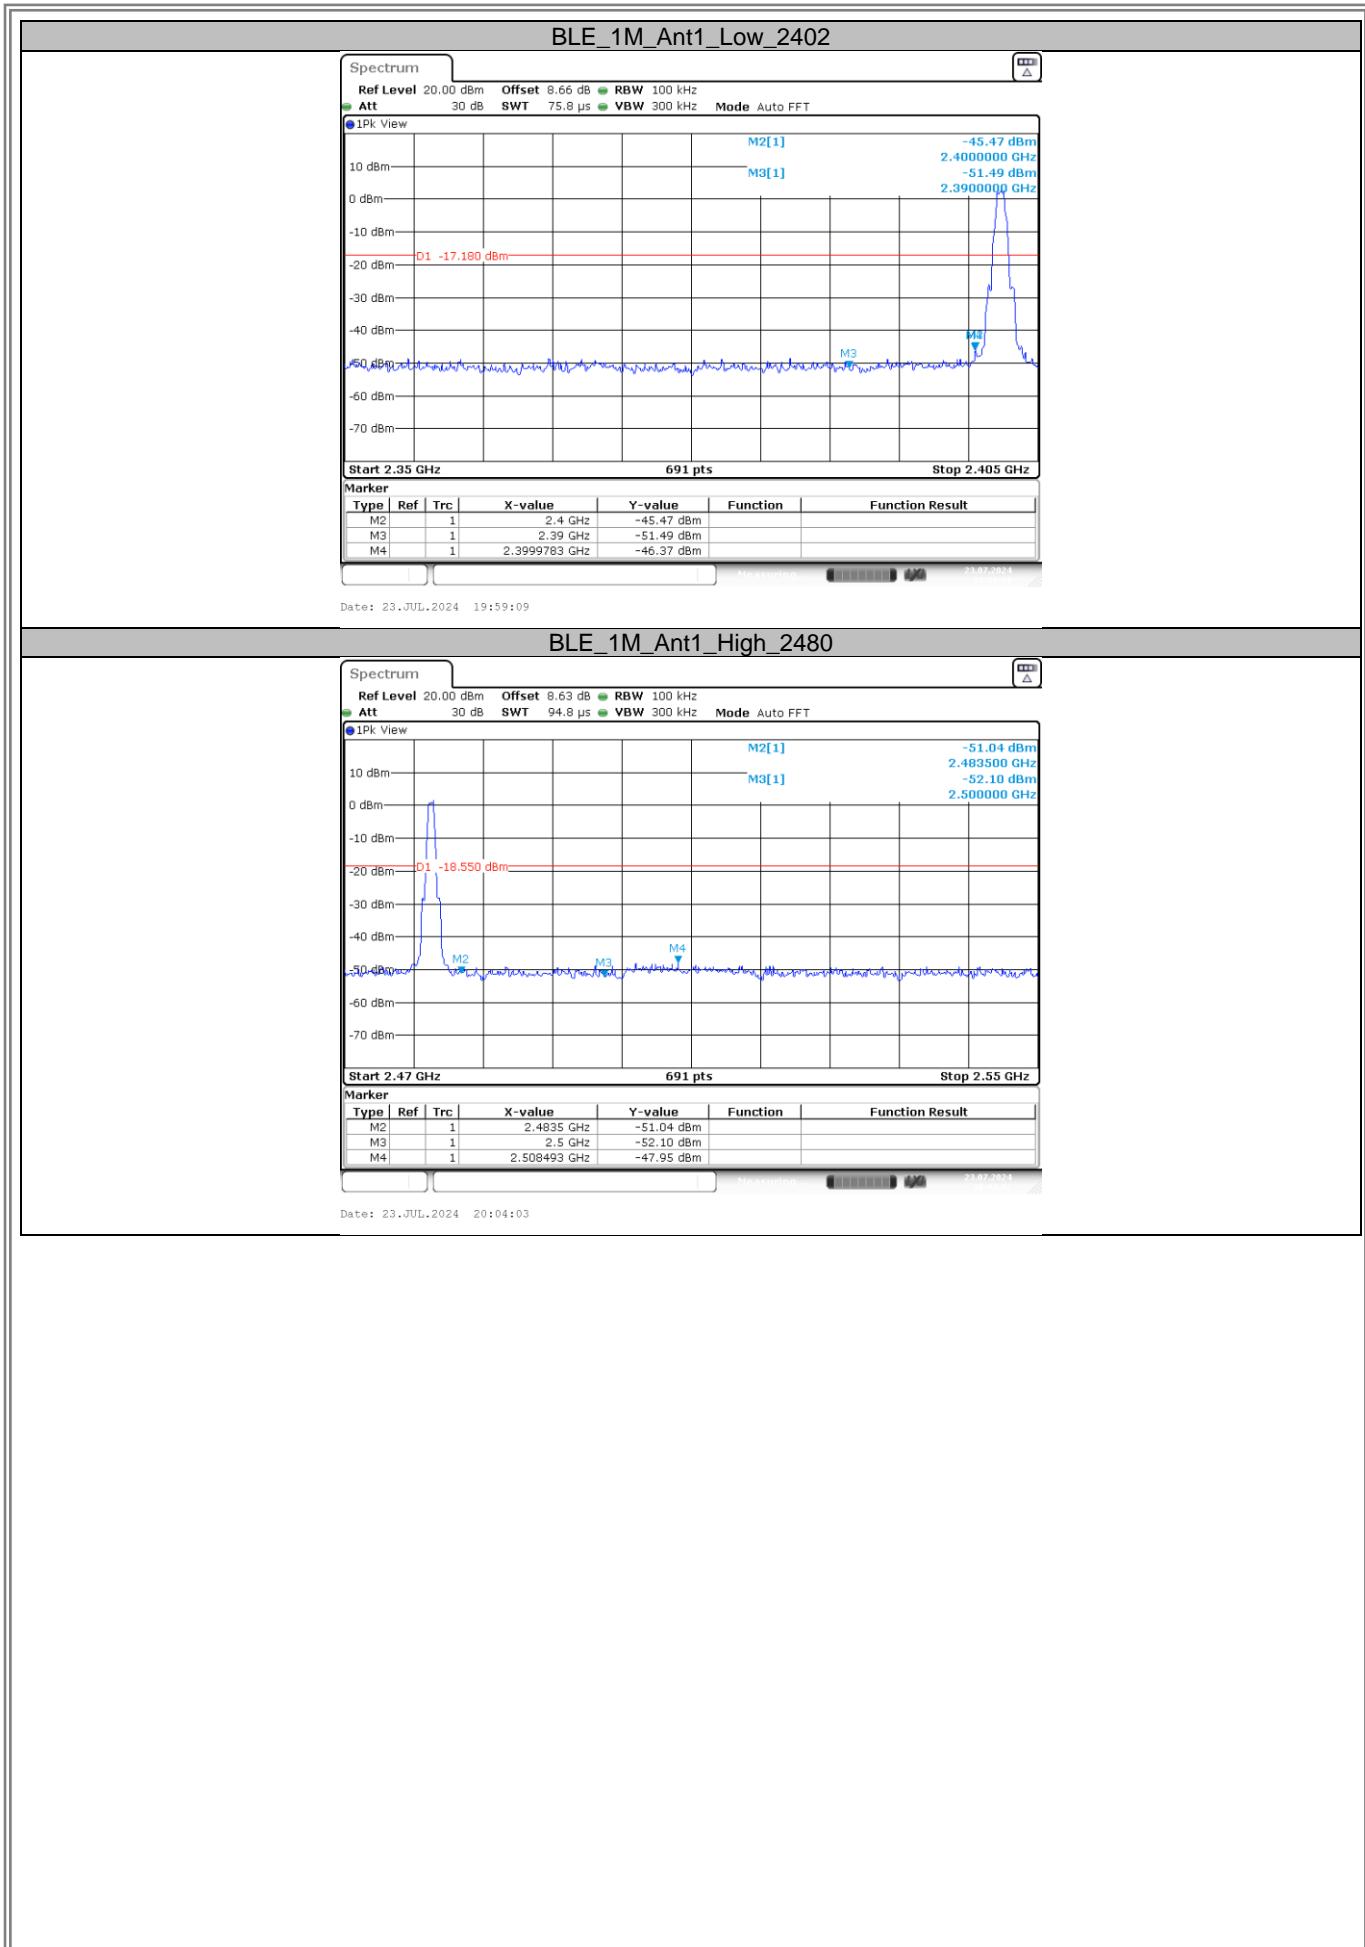


**APPENDIX G - POWER SPECTRAL DENSITY****Power Spectral Density**

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-13.96	≤8.00	PASS
		2442	-14.89	≤8.00	PASS
		2480	-15.44	≤8.00	PASS

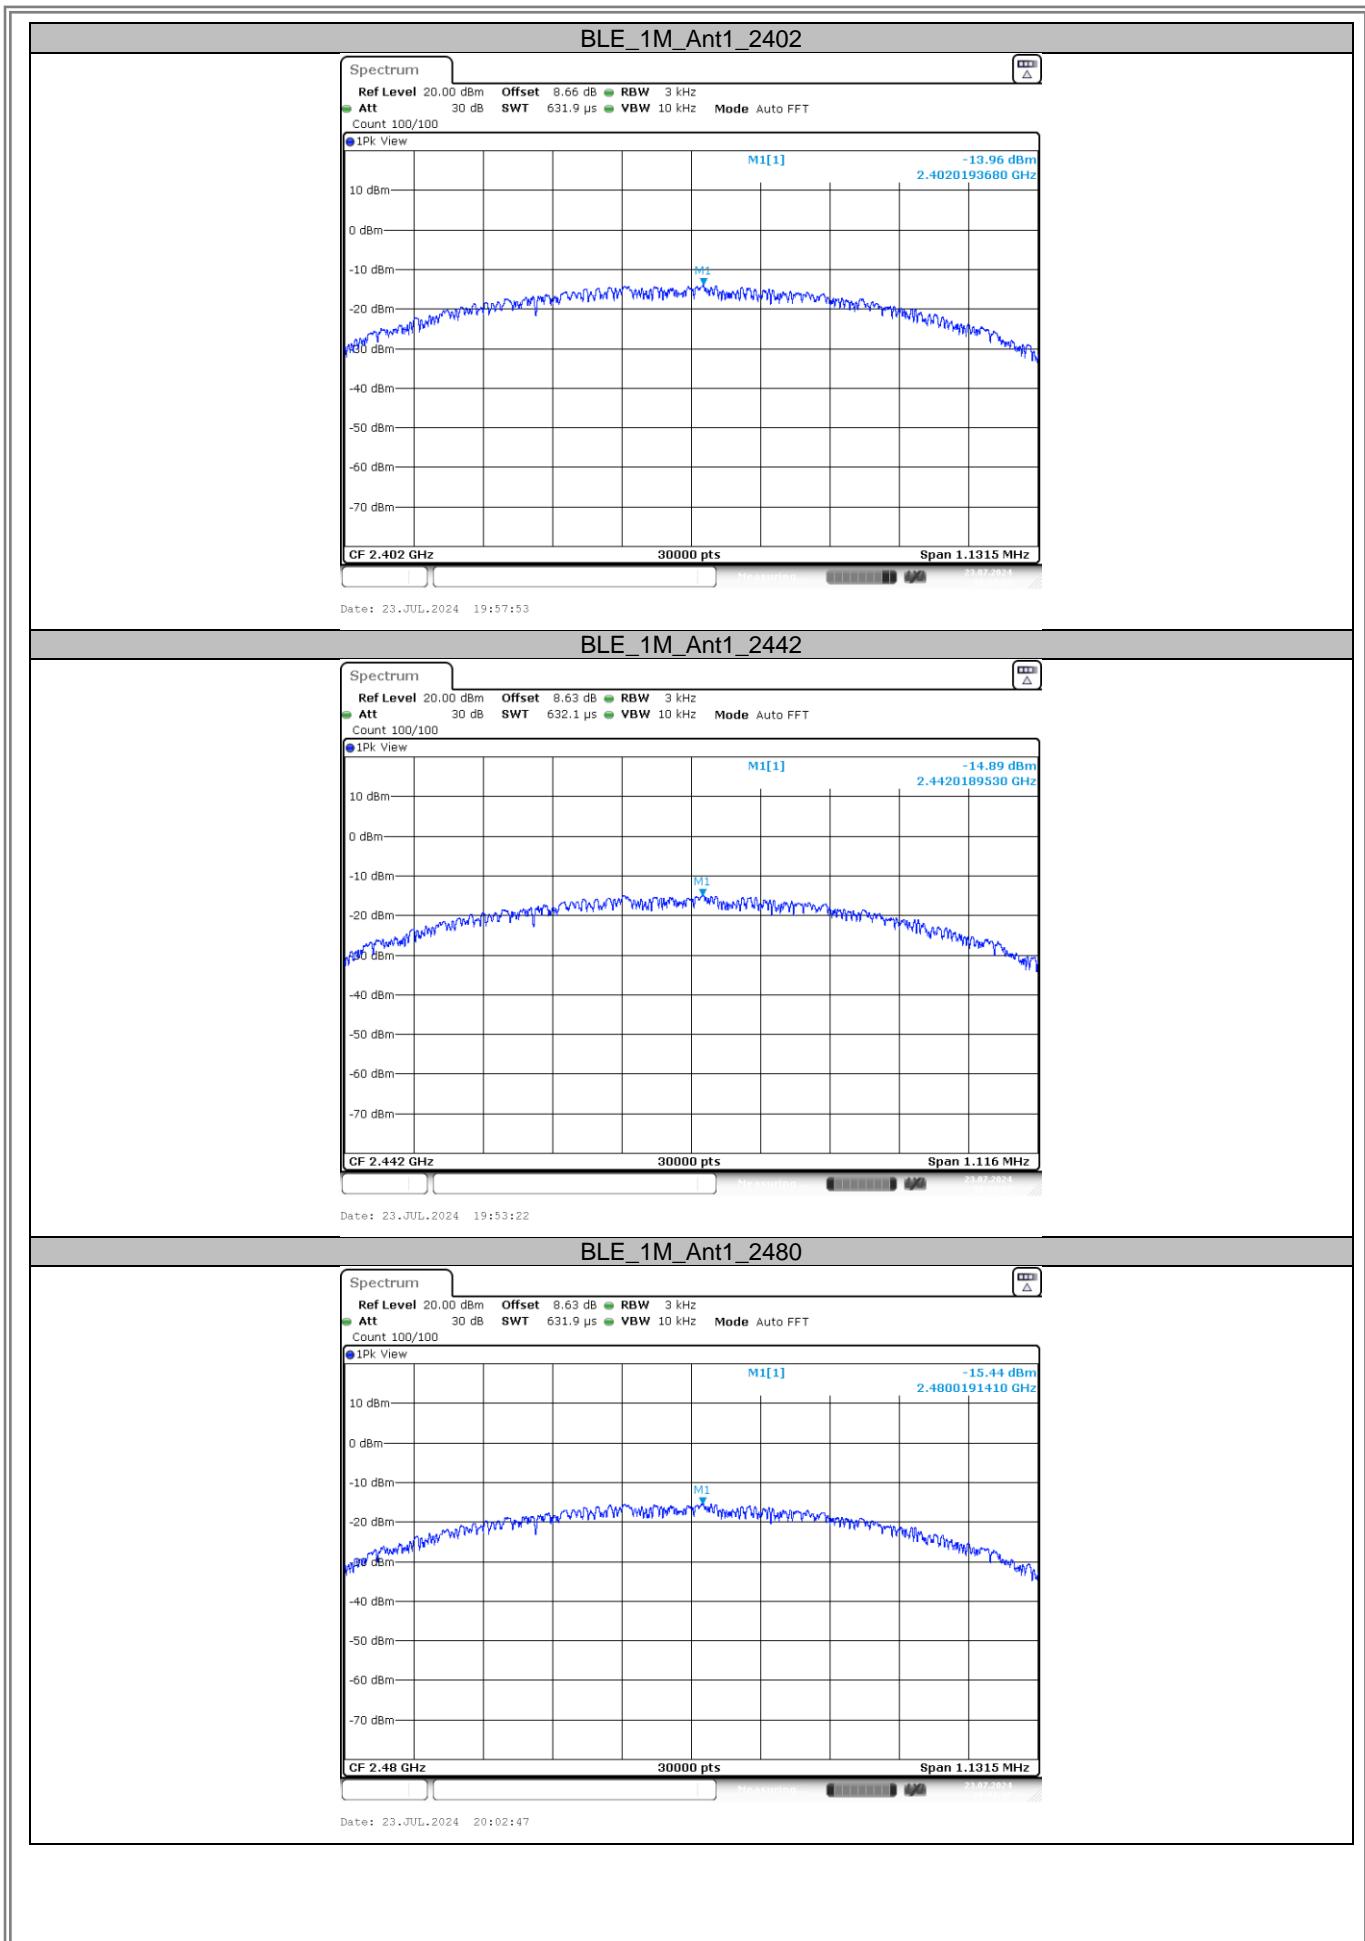

**APPENDIX H: DUTY CYCLE**

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	Limit	Verdict
BLE_1M	Ant1	2402	0.00	0.00	NaN	100	NaN	---	---
		2442	0.00	0.00	NaN	100	NaN	---	---
		2480	0.00	0.00	NaN	100	NaN	---	---

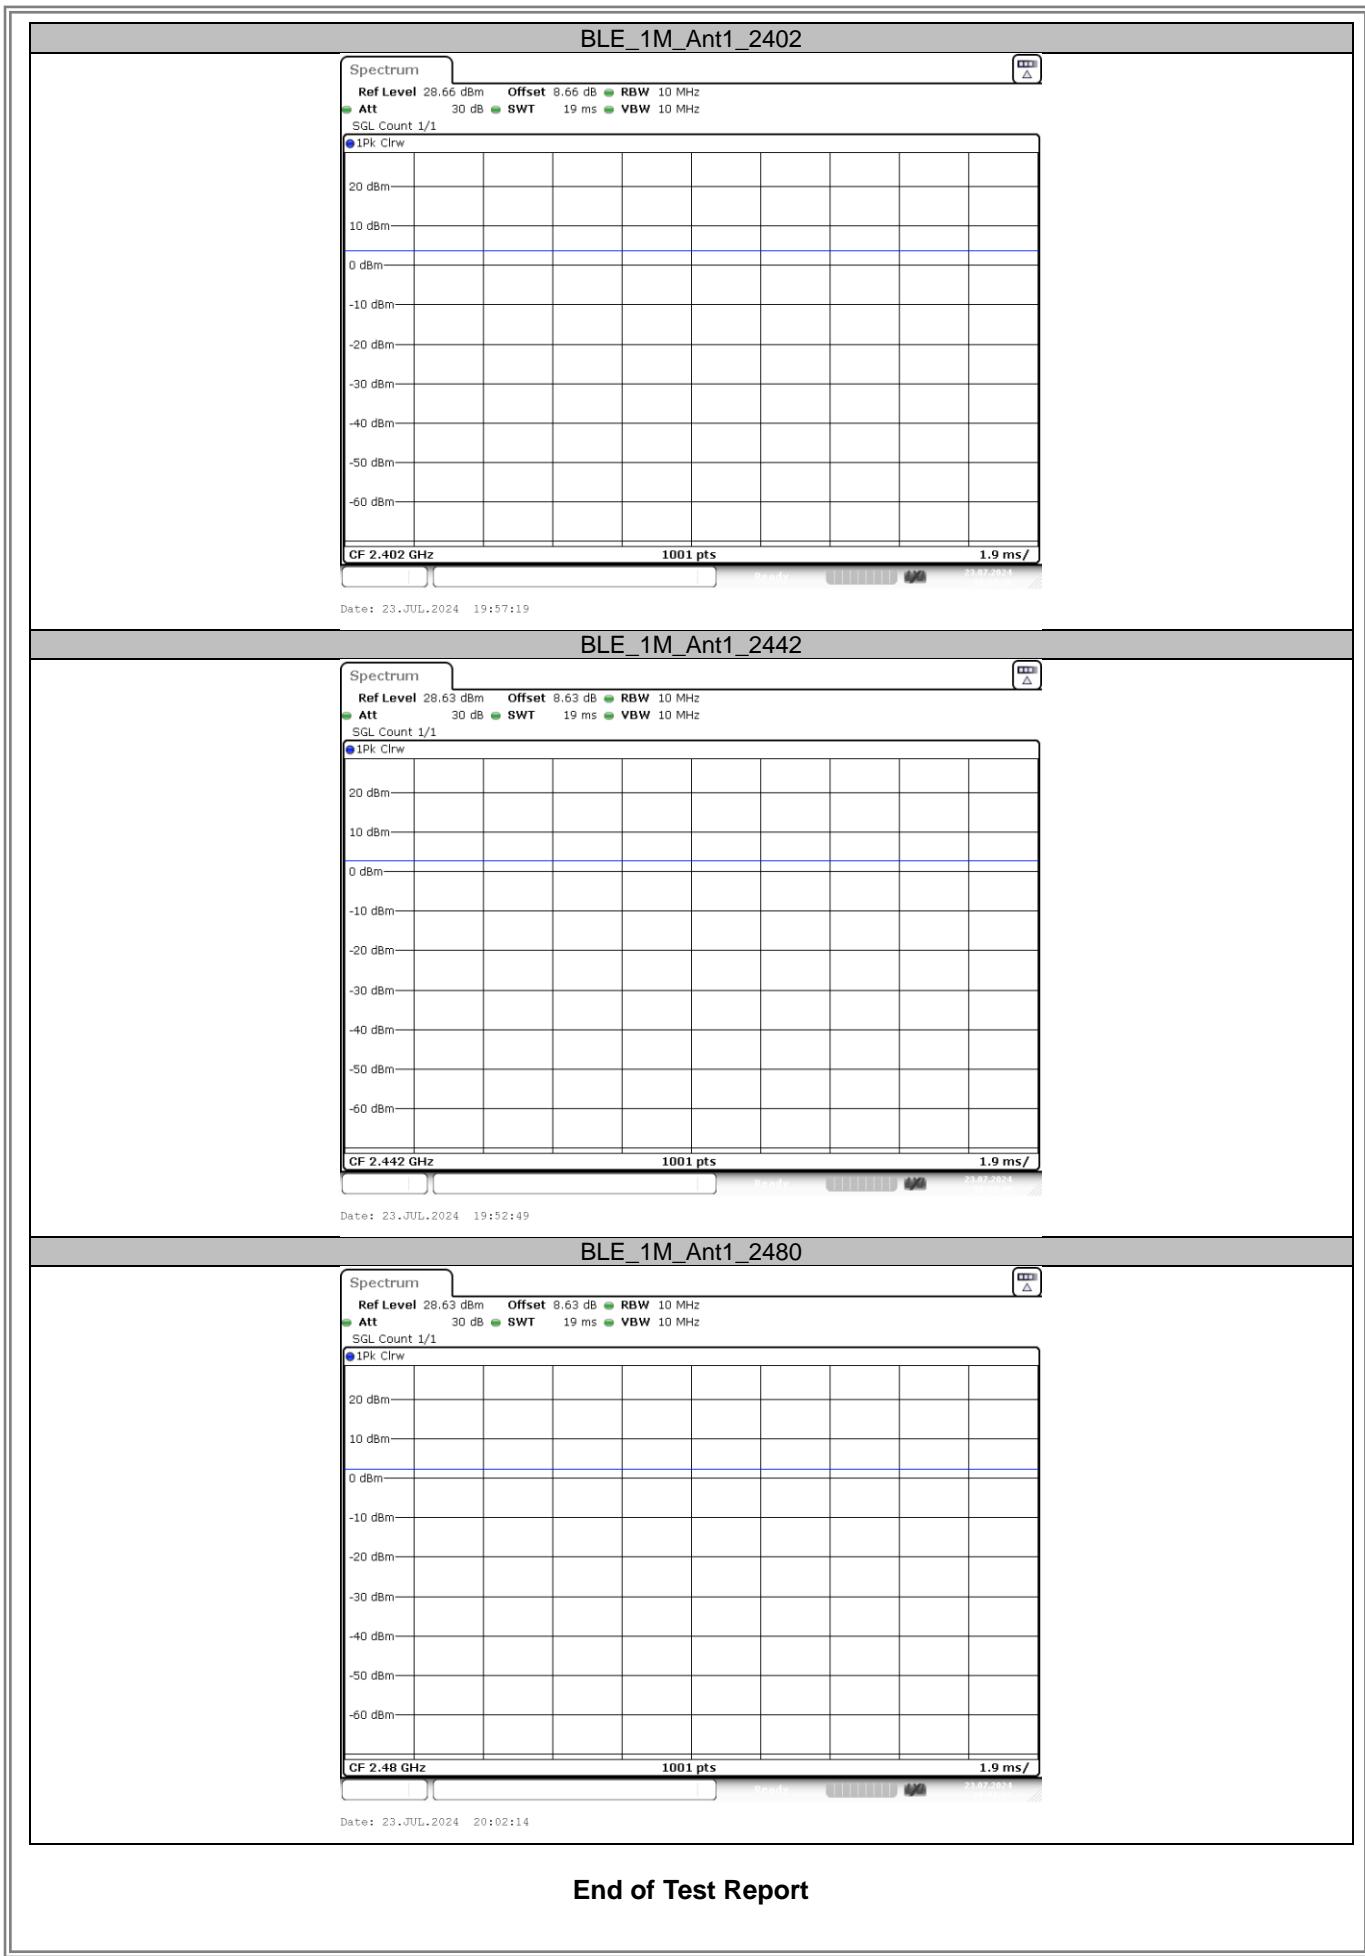**End of Test Report**