



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

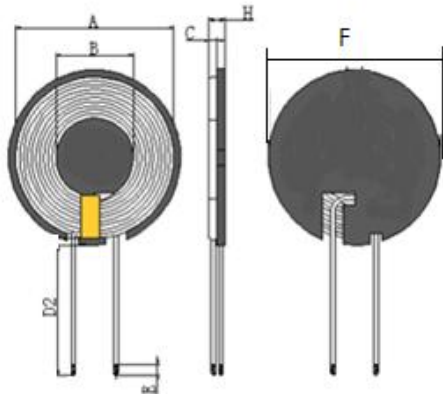

2. SCHEMATICS:



F	B	A	D2	E	H				
40±1	13. 5. 5±0.	39±0. 1	130±3	3±2	2. 5MAX				

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Silk Covered Wire 0.08*105 2UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L		HI-POT
TEST	Coil and magnetic plate	S-F			
COND	100KHz, 0. 25V	AT 25℃			
SPEC	6. 5uH±10%	50m Ω Max			

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Silk Covered Wire	Silk Covered Wire 0.08*105 2UEW	NANJINGJINNINGCO,LTD	
2	Solder Bar	Solder Bar	QIAODO	
3	Magnetic Sheet	L slot on L slot on Ø 40 manganese zinc hard magnetic sheet	TAIYI CO.,LTD	
4	Glue	Yellow glue 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	8mm wide high-temperature adhesive paper	CUDAK CO.,LTD	
6	Adhesive backing	No adhesive added	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G40 Slotting 38long
DRAWN BY	CHECKED BY	APPROVED BY	

何伟华	韦立红	韦立红
-----	-----	-----

深圳市鸿日昇威科 技 有 限 公 司
HRSW ELECTRONICS CO.,LTD
ADD: 深圳市龙华新区观澜环观中路48号1栋2楼
TEL: +86-15112254520 FAX: +86-0755-28015170