

TEST REPORT

Product : Wearable watch
Trade mark : SenScan
Model/Type reference : SF-1xx, SF-110, SF-120, SF-130, SF-131
Serial Number : N/A
Report Number : EED32L00349803
FCC ID : 2AVLV-SPS-20190001
Date of Issue : Aug.19, 2020
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

SPS, Inc.

70, Techno 8-ro, Yuseong-gu, Daejeon, Korea (34028)

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Smile Zhong

Reviewed by:

Jok Yang

Approved by:

Smile Zhong

Date:

Jok Yang

Aug.19, 2020

Sam Chuang

Check No.: 4038852739



Report No. : EED32L00349803

Page 2 of 105

2 Version

Version No.	Date	Description
00	Aug.19, 2020	Original



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Duty cycle	N/A	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

Model No.:SF-1xx, SF-110, SF-120, SF-130, SF-131

Only the model SF-120 was tested, Their electrical circuit design, layout, components used and internal wiring are identical, only the model name and appearance color are different.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION	8
6.2 GENERAL DESCRIPTION OF EUT	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	8
6.4 DESCRIPTION OF SUPPORT UNITS	10
6.5 TEST LOCATION	10
6.6 DEVIATION FROM STANDARDS	10
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	10
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Conducted Peak Output Power	16
Appendix B): 6dB Occupied Bandwidth	22
Appendix C): Band-edge for RF Conducted Emissions	32
Appendix D): RF Conducted Spurious Emissions	37
Appendix E): Power Spectral Density	51
Appendix F): Antenna Requirement	57
Appendix G): AC Power Line Conducted Emission	58
Appendix H): Restricted bands around fundamental frequency (Radiated)	61
Appendix I): Radiated Spurious Emissions	94
PHOTOGRAPHS OF TEST SETUP	102
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	105

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

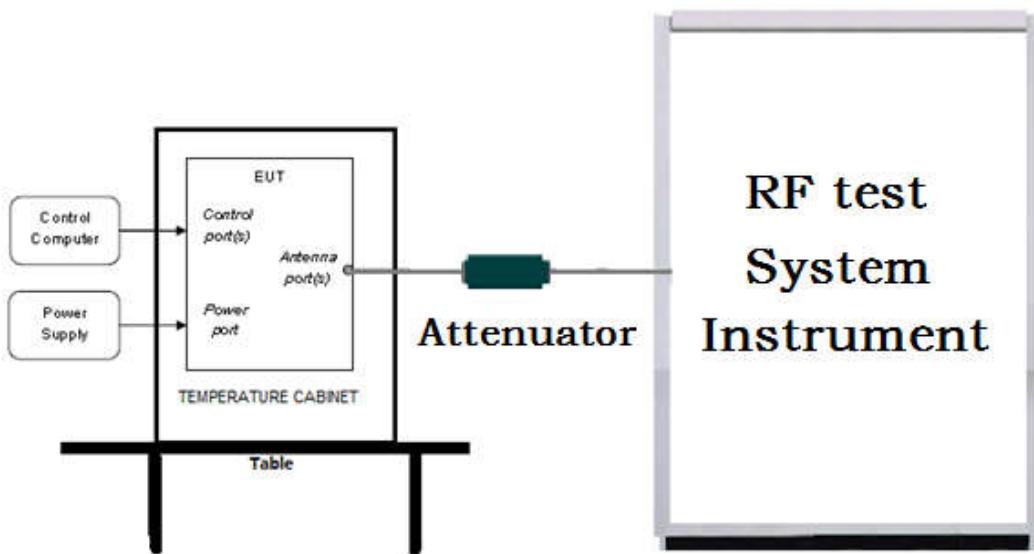

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

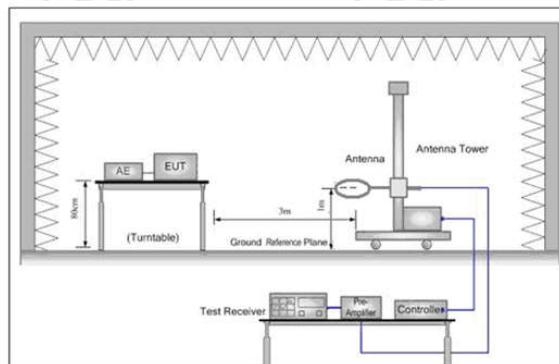


Figure 1. Below 30MHz

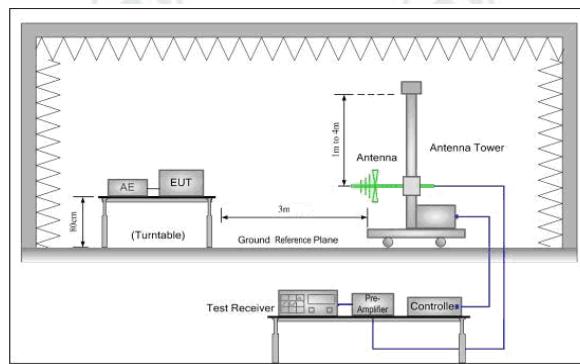


Figure 2. 30MHz to 1GHz


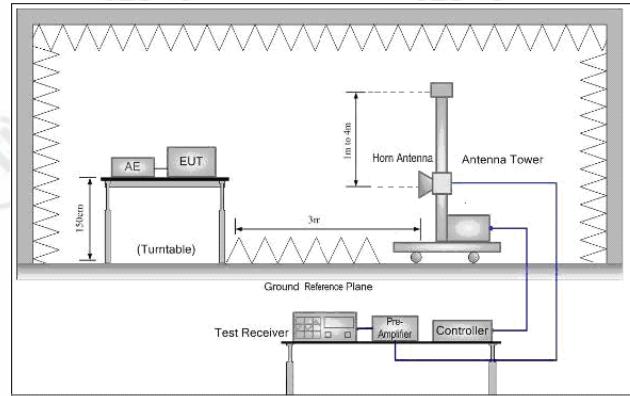


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

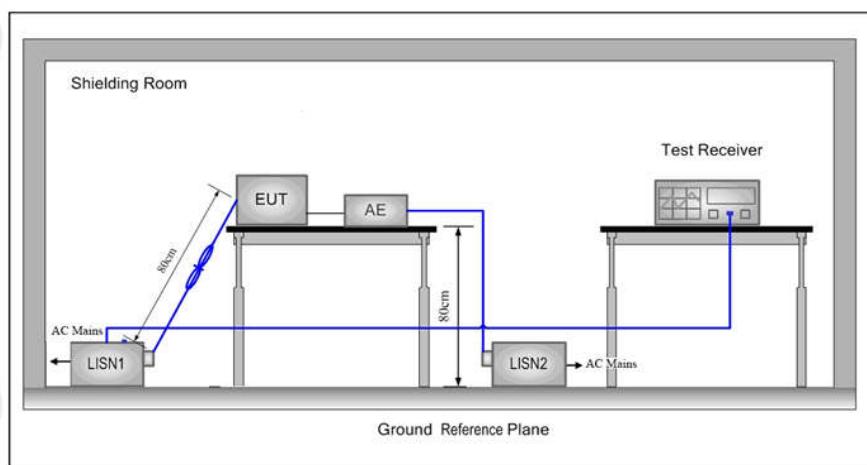

5.2 Test Environment

Operating Environment:

Temperature:	23.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 3	Channel 6	Channel 9
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel 1

Mode	802.11b								
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power(dBm)	17.14	17.16	17.18	17.2					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power(dBm)	16.33	16.31	16.29	16.27	16.25	16.23	16.21	16.19	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power(dBm)	15.38	15.36	15.34	15.32	15.30	15.28	15.26	15.24	
Mode	802.11n (HT40)								
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
Power(dBm)	14.23	14.21	14.19	14.17	14.15	14.13	14.11	14.09	

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	SPS, Inc.
Address of Applicant:	70, Techno 8-ro, Yuseong-gu, Daejeon, Korea (34028)
Manufacturer:	Shenzhen Skinod Technology Co. Ltd
Address of Manufacturer:	Building 28, No.9, Chuangxin Road, Jiangyang District, Luzhou City, Sichuan Province, China
Factory:	Shenzhen Skinod Technology Co. Ltd
Address of Factory:	Building 28, No.9, Chuangxin Road, Jiangyang District, Luzhou City, Sichuan Province, China

6.2 General Description of EUT

Product Name:	Wearable watch	
Model No.(EUT):	SF-1xx, SF-110, SF-120, SF-130, SF-131	
Test Model No.:	SF-120	
Trade mark:	SenScan	
EUT Supports Radios application:	IEEE 802.11 b/g/n(HT20)(HT40): 2412MHz to 2462MHz	
Power Supply:	Battery	DC 3.8V 1500mAh
Sample Received Date:	Nov. 22, 2019	
Sample tested Date:	Nov. 22, 2019 to Dec. 25, 2019	

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Test Power Grade:	IEEE for 802.11b: 19/18/19 IEEE for 802.11g : 13/12/13 IEEE for 802.11n(HT20) : 12/11/12 IEEE for 802.11n(HT40) : 10/11/11
Test Software of EUT:	Default
Antenna Type and Gain:	Type: FPC antenna Gain: 0.33dBi
Test Voltage:	DC 3.8V

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz
4	2427MHz	7	2442MHz		
5	2432MHz	8	2447MHz		

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	07-26-2019	07-25-2020
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY56376072	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	158060006	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	03-01-2019	02-29-2020

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	maturo	NCD/070/107 11112	---	01-09-2019	01-08-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	07-26-2019	07-25-2020
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-16-2019	01-15-2020
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM- 2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM- 2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM- 2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM- 2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM- 1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM- 3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM- 1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM- 7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM- 3.00M	393493-0001	01-09-2019	01-08-2020

8 Radio Technical Requirements Specification

Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
802.11b	1.000	1.000	100%
802.11g	1.000	1.000	100%
802.11n HT20	1.000	1.000	100%
802.11n HT40	1.000	1.000	100%

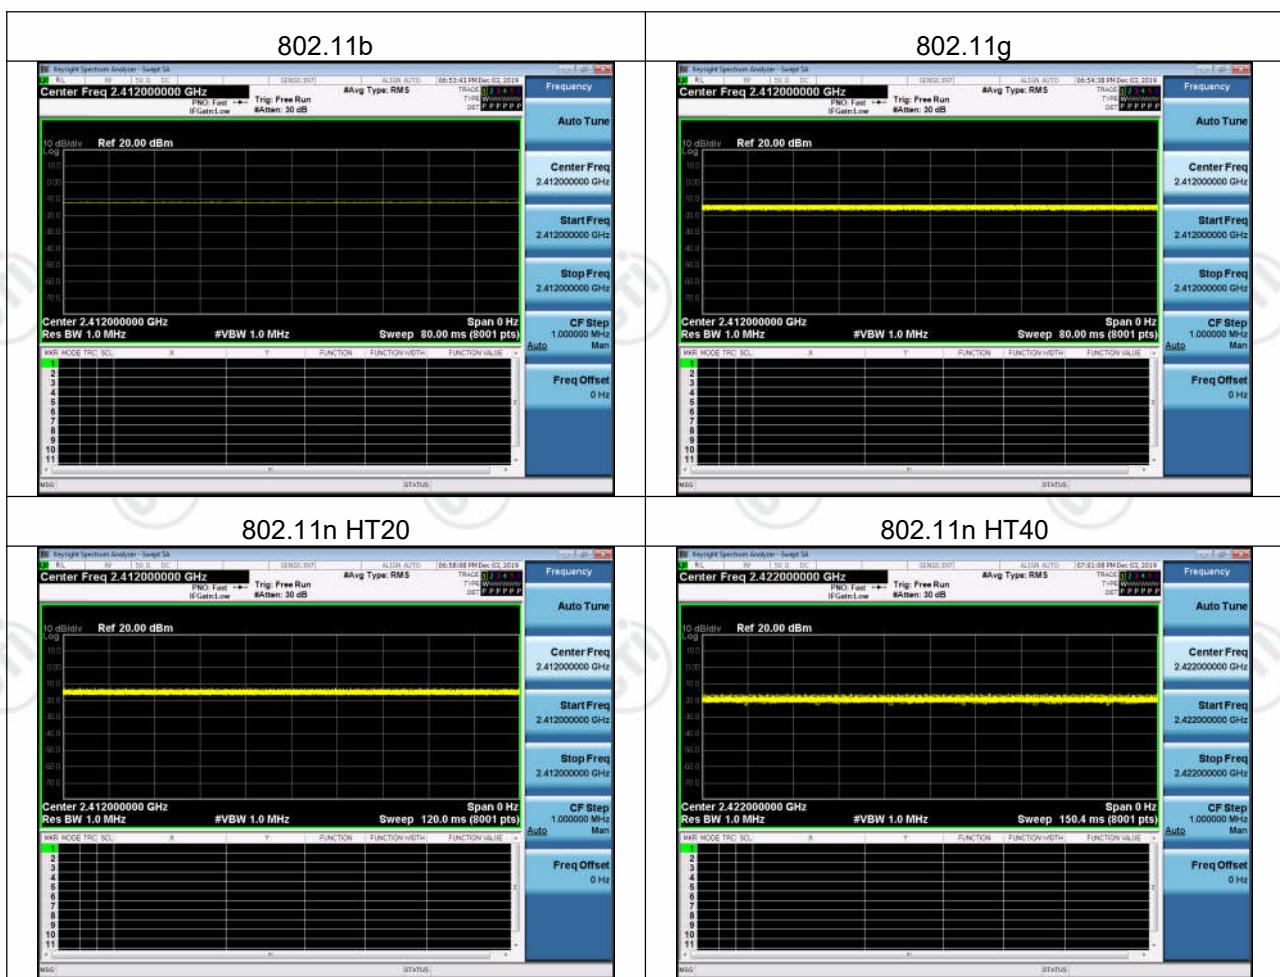

Appendix A): Conducted Peak Output Power

Test Limit

According to §15.247(b)(3),

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : $[\text{Limit} = 30 - (\text{DG} - 6)]$ <input type="checkbox"/> Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

Test Setup

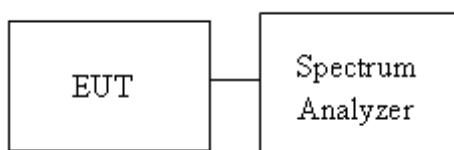


Result Table



Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	17.2	PASS
11B	MCH	17.47	PASS
11B	HCH	17.41	PASS
11G	LCH	16.33	PASS
11G	MCH	16.04	PASS
11G	HCH	16.56	PASS
11N20SISO	LCH	15.38	PASS
11N20SISO	MCH	15.33	PASS
11N20SISO	HCH	15.52	PASS
11N40SISO	LCH	14.23	PASS
11N40SISO	MCH	14.67	PASS
11N40SISO	HCH	14.68	PASS

Test Graph

Graphs	
11B/LCH	 <p>Channel Power: 17.20 dBm / 20 MHz Power Spectral Density: -55.81 dBm / Hz</p>
11B/MCH	 <p>Channel Power: 17.47 dBm / 20 MHz Power Spectral Density: -55.54 dBm / Hz</p>
11B/HCH	 <p>Channel Power: 17.41 dBm / 20 MHz Power Spectral Density: -55.60 dBm / Hz</p>

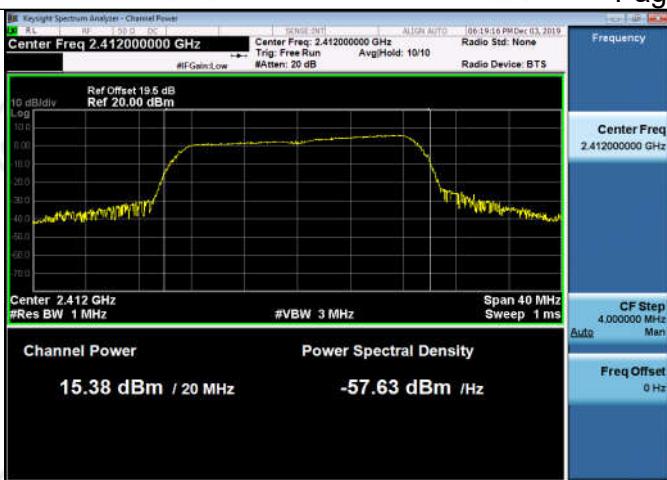

11N20SISO/LCH	 <p>Channel Power: 15.38 dBm / 20 MHz Power Spectral Density: -57.63 dBm / Hz</p>
11N20SISO/MCH	 <p>Channel Power: 15.33 dBm / 20 MHz Power Spectral Density: -57.68 dBm / Hz</p>
11N20SISO/HCH	 <p>Channel Power: 15.52 dBm / 20 MHz Power Spectral Density: -57.49 dBm / Hz</p>

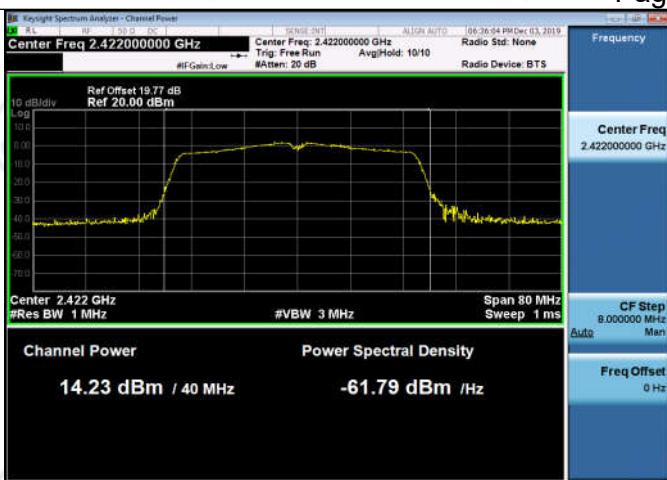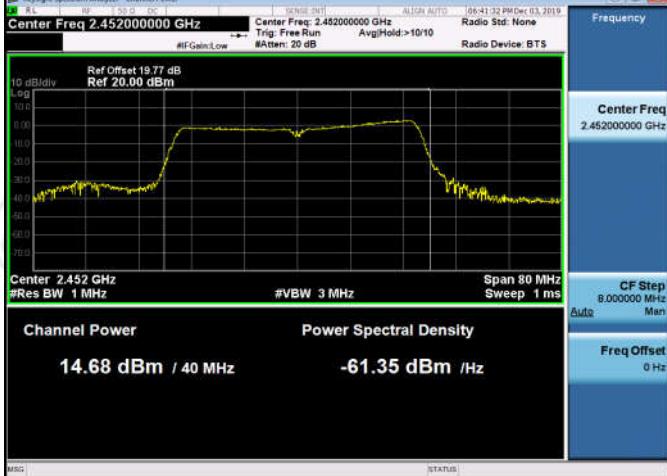11N40SISO/LCH	
11N40SISO/MCH	
11N40SISO/HCH	

Appendix B): 6dB Occupied Bandwidth

Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

Test Setup



Result Table


6 dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Verdict
11B	LCH	9.062	PASS
11B	MCH	9.552	PASS
11B	HCH	9.053	PASS
11G	LCH	15.72	PASS
11G	MCH	15.76	PASS
11G	HCH	15.72	PASS
11N20SISO	LCH	16.33	PASS
11N20SISO	MCH	17.40	PASS
11N20SISO	HCH	16.28	PASS
11N40SISO	LCH	35.02	PASS
11N40SISO	MCH	35.67	PASS
11N40SISO	HCH	35.72	PASS




99% Bandwidth




Mode	Channel	99% OBW [MHz]	Verdict
11B	LCH	12.473	PASS
11B	MCH	12.747	PASS
11B	HCH	12.389	PASS
11G	LCH	16.470	PASS
11G	MCH	16.673	PASS
11G	HCH	16.427	PASS
11N20SISO	LCH	17.679	PASS
11N20SISO	MCH	17.707	PASS
11N20SISO	HCH	17.489	PASS
11N40SISO	LCH	35.363	PASS
11N40SISO	MCH	36.100	PASS
11N40SISO	HCH	36.275	PASS


Test Graph

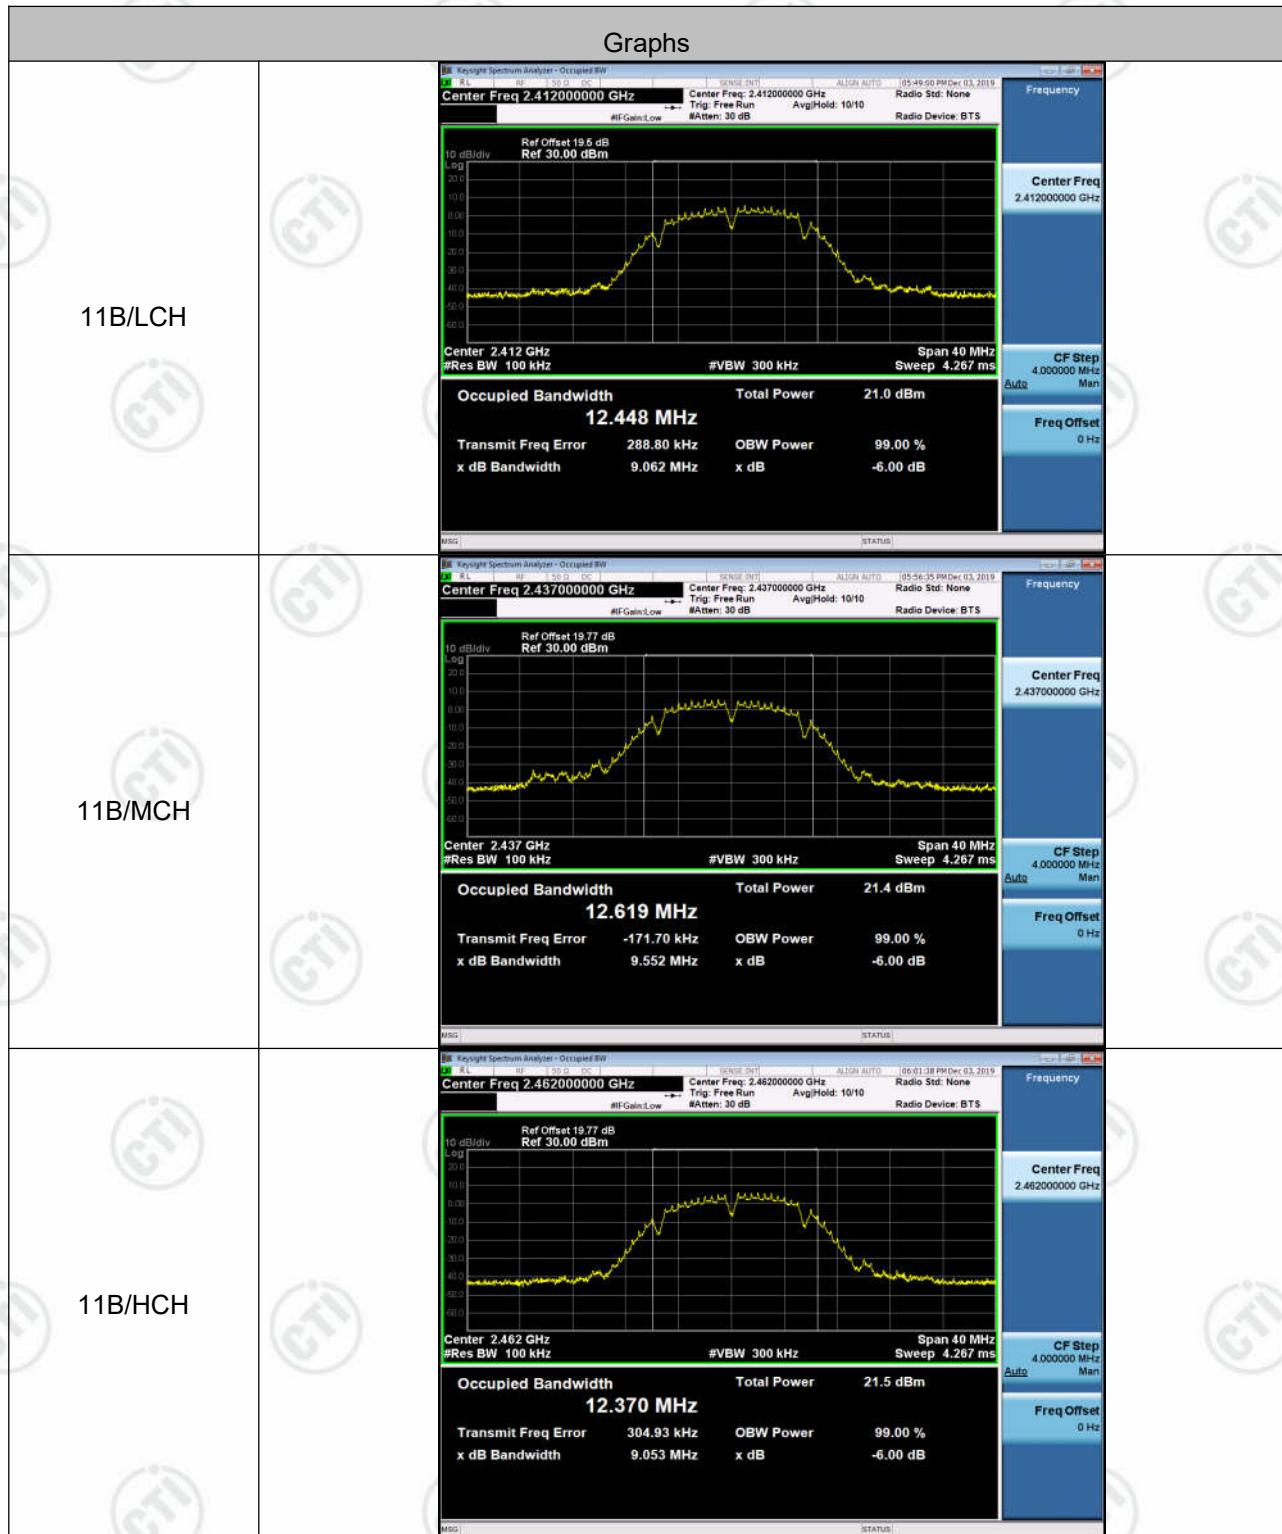

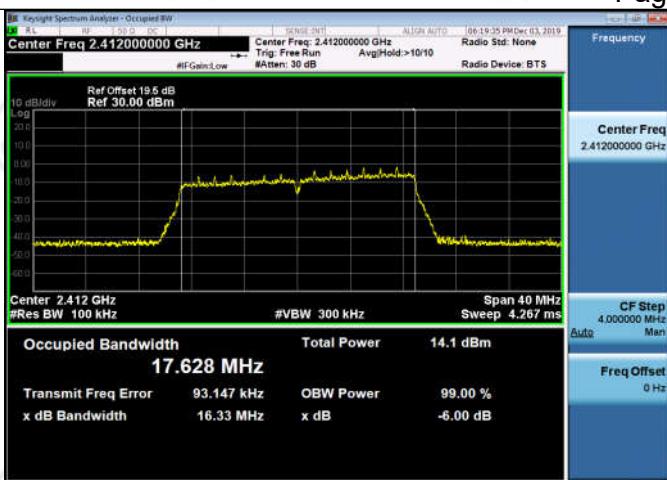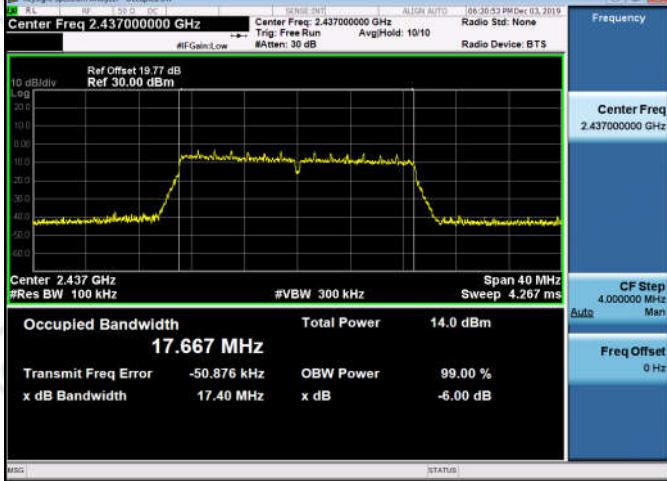
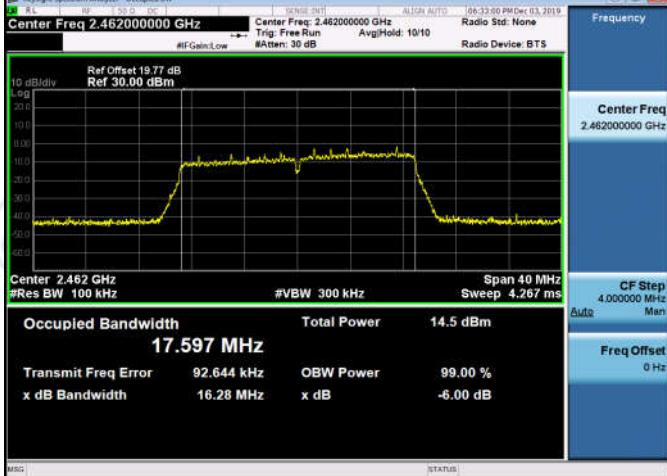





11N20SISO/LCH	 <p>Occupied Bandwidth 17.628 MHz</p> <p>Transmit Freq Error 93.147 kHz OBW Power 99.00 % x dB Bandwidth 16.33 MHz x dB -6.00 dB</p>
11N20SISO/MCH	 <p>Occupied Bandwidth 17.667 MHz</p> <p>Transmit Freq Error -50.876 kHz OBW Power 99.00 % x dB Bandwidth 17.40 MHz x dB -6.00 dB</p>
11N20SISO/HCH	 <p>Occupied Bandwidth 17.597 MHz</p> <p>Transmit Freq Error 92.644 kHz OBW Power 99.00 % x dB Bandwidth 16.28 MHz x dB -6.00 dB</p>

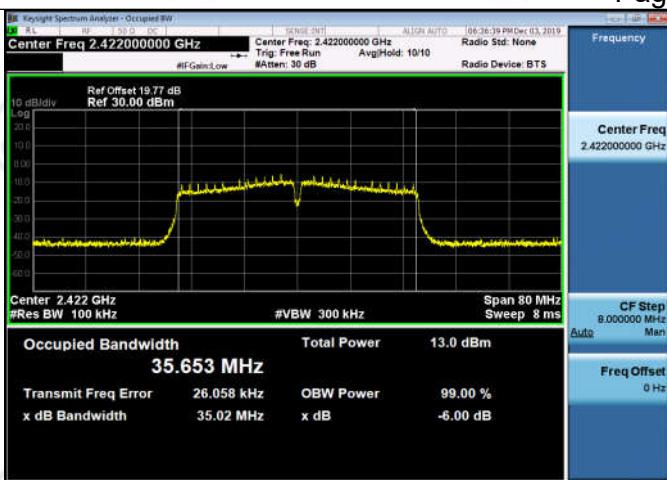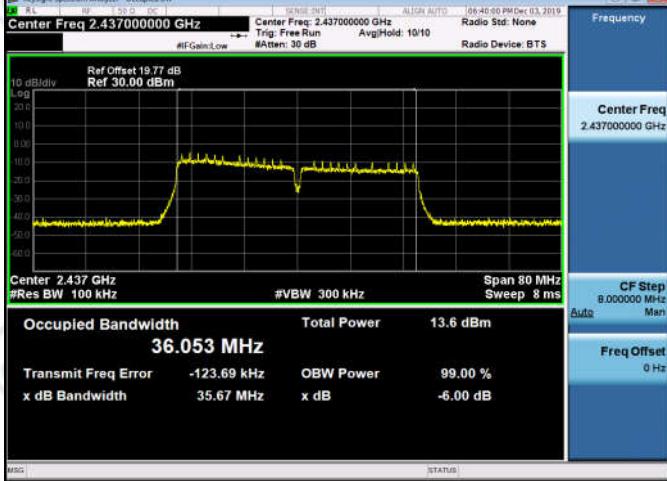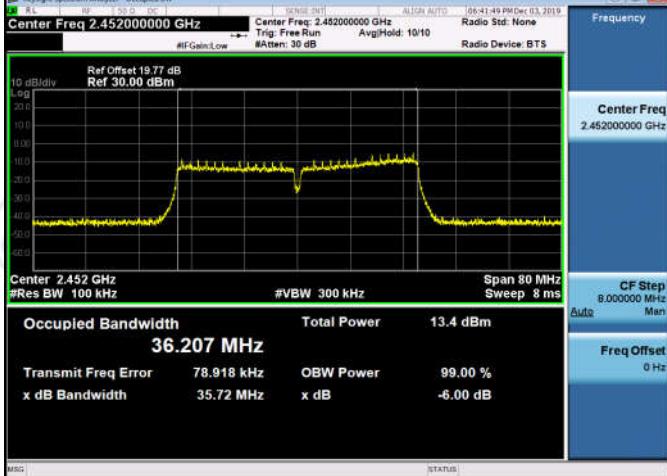11N40SISO/LCH	 <p>Occupied Bandwidth 35.653 MHz</p> <p>Transmit Freq Error 26.058 kHz OBW Power 99.00 % x dB Bandwidth 35.02 MHz x dB -6.00 dB</p>
11N40SISO/MCH	 <p>Occupied Bandwidth 36.053 MHz</p> <p>Transmit Freq Error -123.69 kHz OBW Power 99.00 % x dB Bandwidth 35.67 MHz x dB -6.00 dB</p>
11N40SISO/HCH	 <p>Occupied Bandwidth 36.207 MHz</p> <p>Transmit Freq Error 78.918 kHz OBW Power 99.00 % x dB Bandwidth 35.72 MHz x dB -6.00 dB</p>

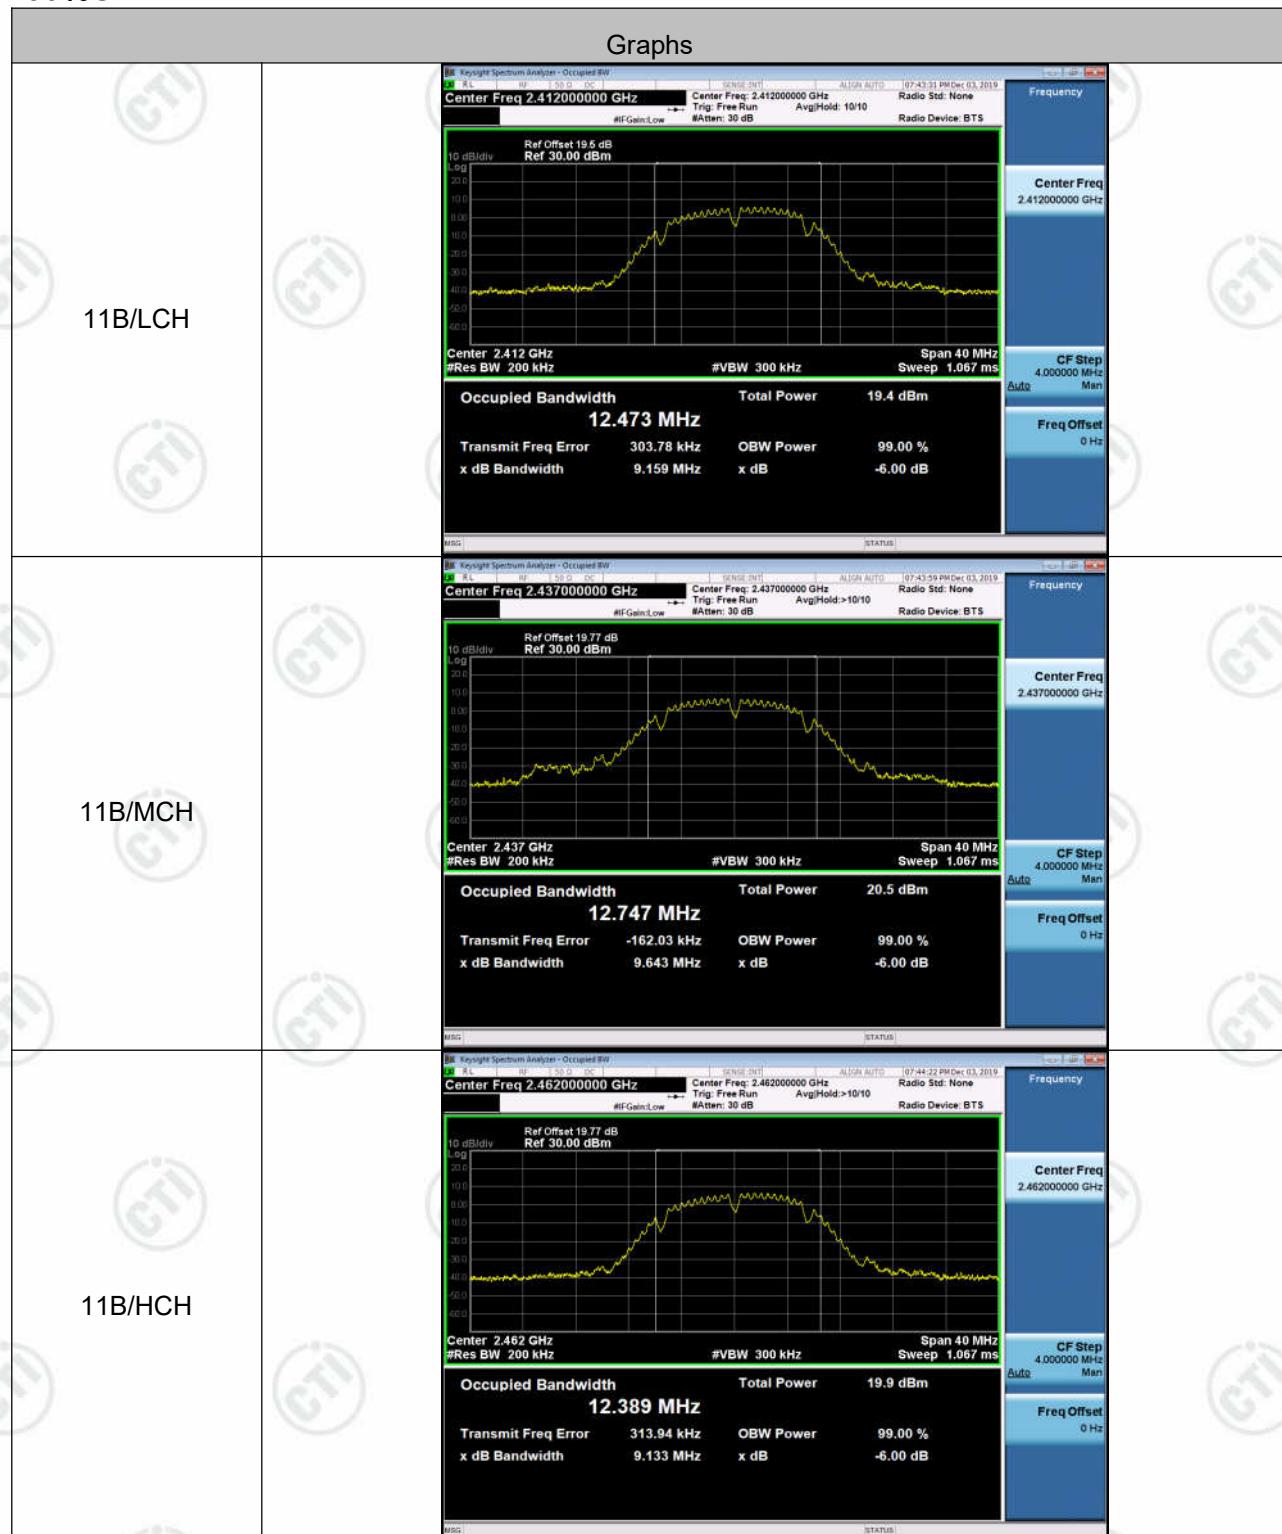

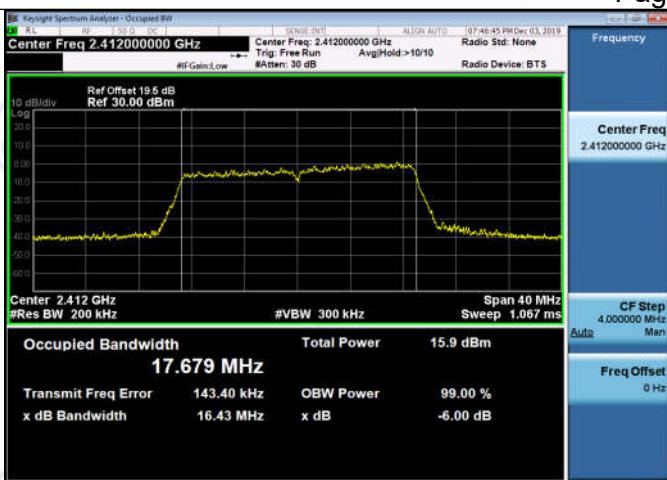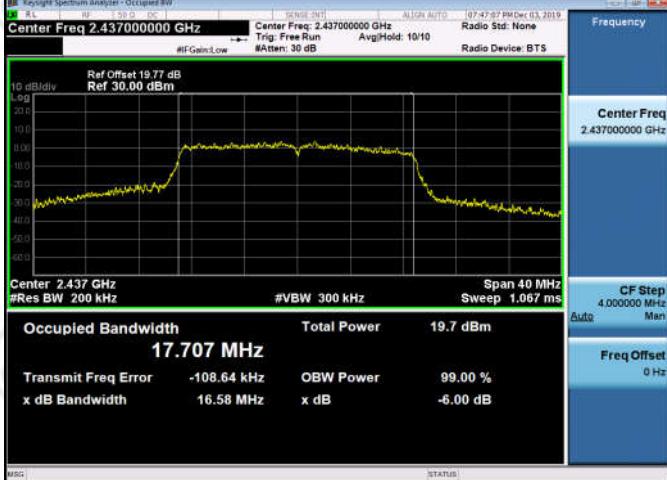

11N20SISO/LCH	 <p>Occupied Bandwidth 17.679 MHz Transmit Freq Error 143.40 kHz x dB Bandwidth 16.43 MHz</p>
11N20SISO/MCH	 <p>Occupied Bandwidth 17.707 MHz Transmit Freq Error -108.64 kHz x dB Bandwidth 16.58 MHz</p>
11N20SISO/HCH	 <p>Occupied Bandwidth 17.489 MHz Transmit Freq Error 163.52 kHz x dB Bandwidth 16.28 MHz</p>

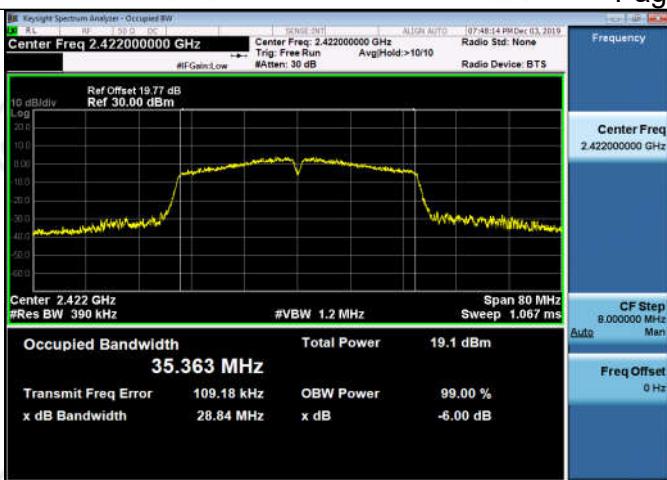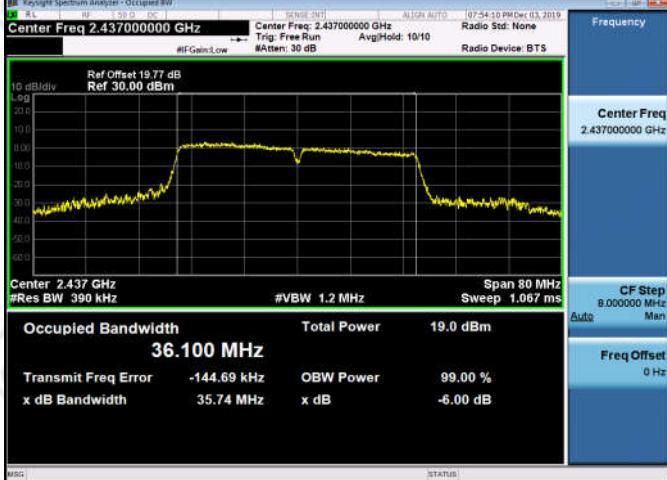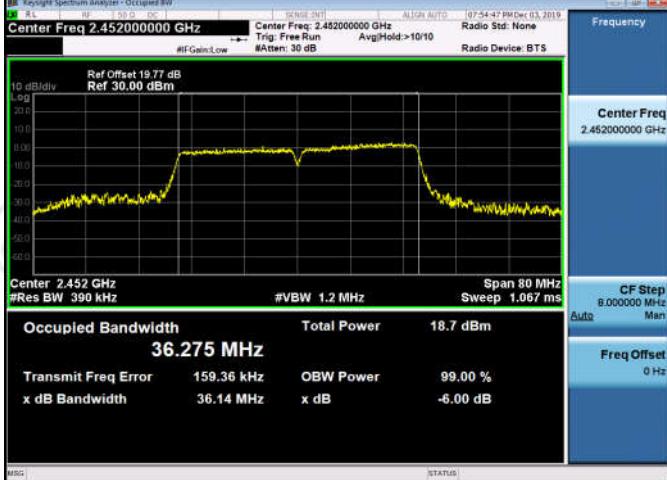11N40SISO/LCH	 <p>Occupied Bandwidth 35.363 MHz Total Power 19.1 dBm Transmit Freq Error 109.18 kHz OBW Power 99.00 % x dB Bandwidth 28.84 MHz x dB -6.00 dB</p>
11N40SISO/MCH	 <p>Occupied Bandwidth 36.100 MHz Total Power 19.0 dBm Transmit Freq Error -144.69 kHz OBW Power 99.00 % x dB Bandwidth 35.74 MHz x dB -6.00 dB</p>
11N40SISO/HCH	 <p>Occupied Bandwidth 36.275 MHz Total Power 18.7 dBm Transmit Freq Error 159.36 kHz OBW Power 99.00 % x dB Bandwidth 36.14 MHz x dB -6.00 dB</p>

Appendix C): Band-edge for RF Conducted Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


Test Setup

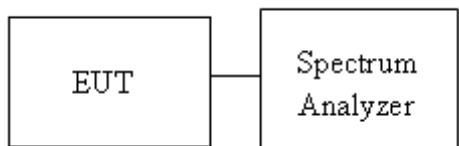


Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	5.841	-50.754	-24.16	PASS
11B	HCH	5.658	-49.022	-24.34	PASS
11G	LCH	-0.775	-50.469	-30.78	PASS
11G	HCH	-1.212	-48.918	-31.21	PASS
11N20SISO	LCH	-1.651	-50.241	-31.65	PASS
11N20SISO	HCH	-1.840	-49.070	-31.84	PASS
11N40SISO	LCH	-5.523	-50.098	-35.52	PASS
11N40SISO	HCH	-4.826	-49.618	-34.83	PASS

Test Graph

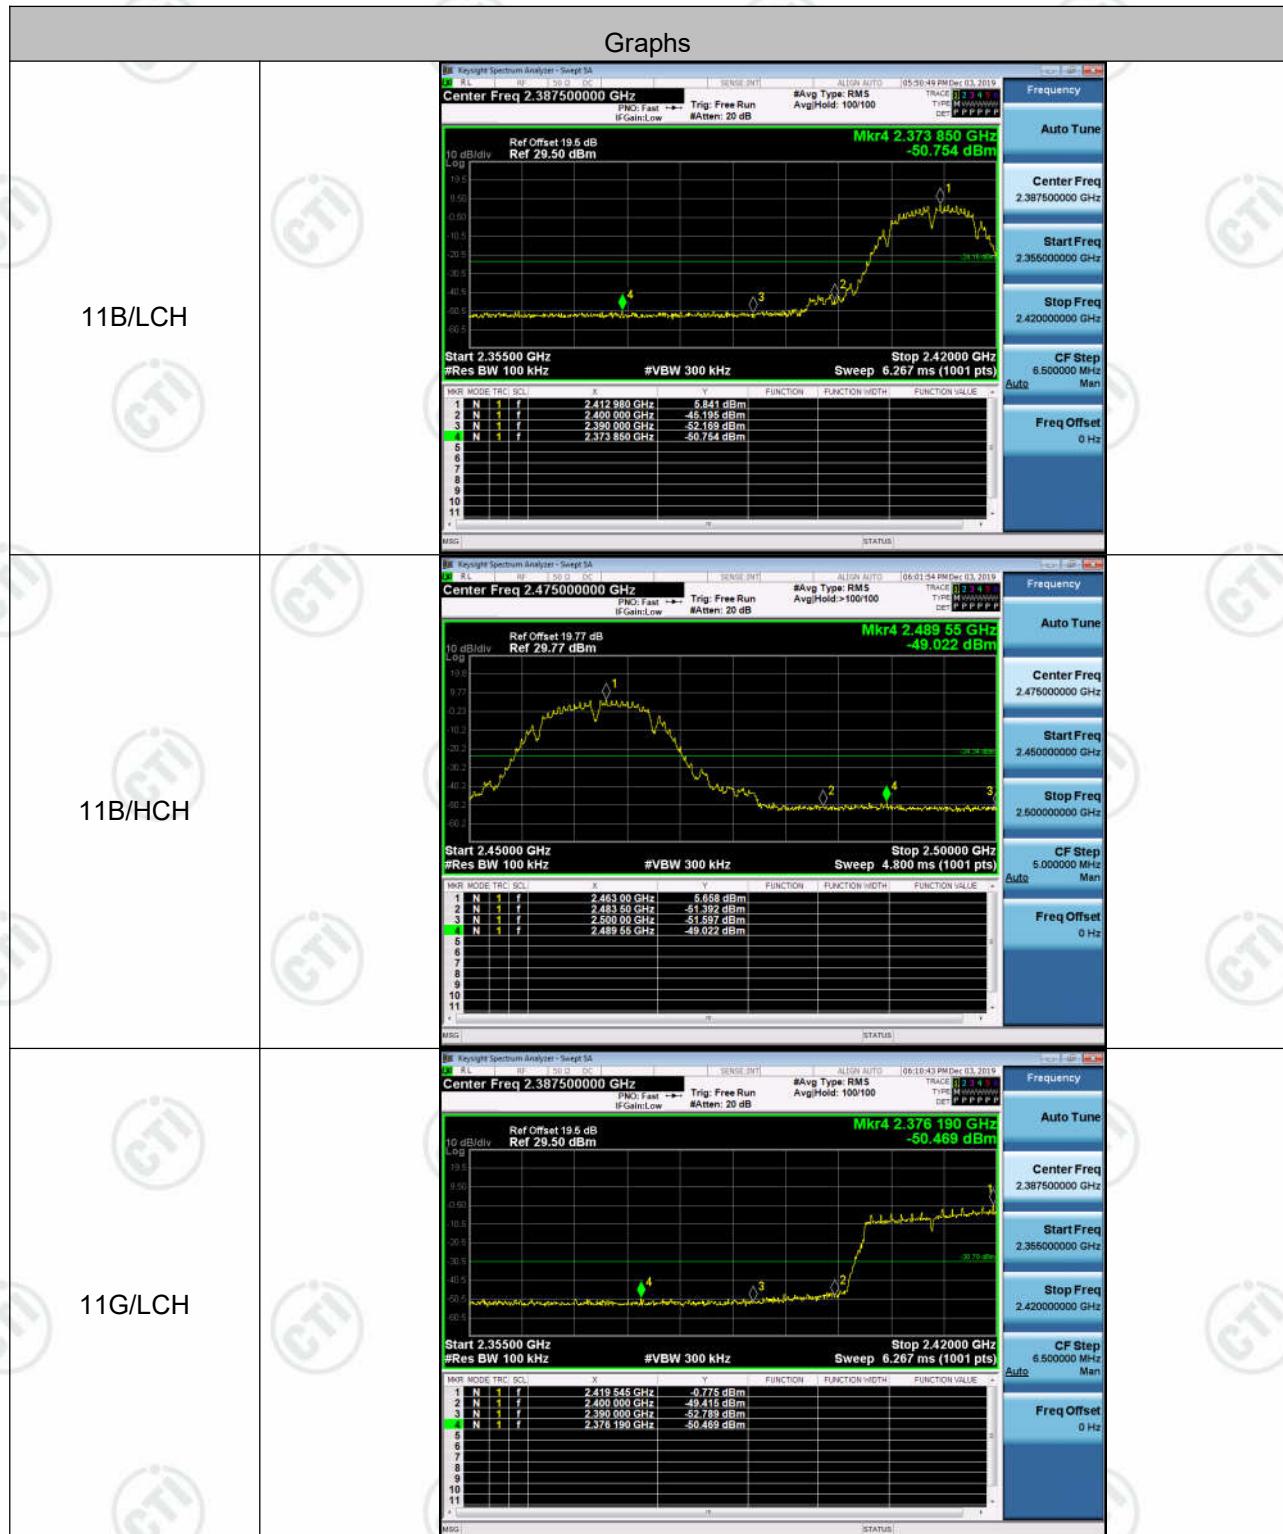

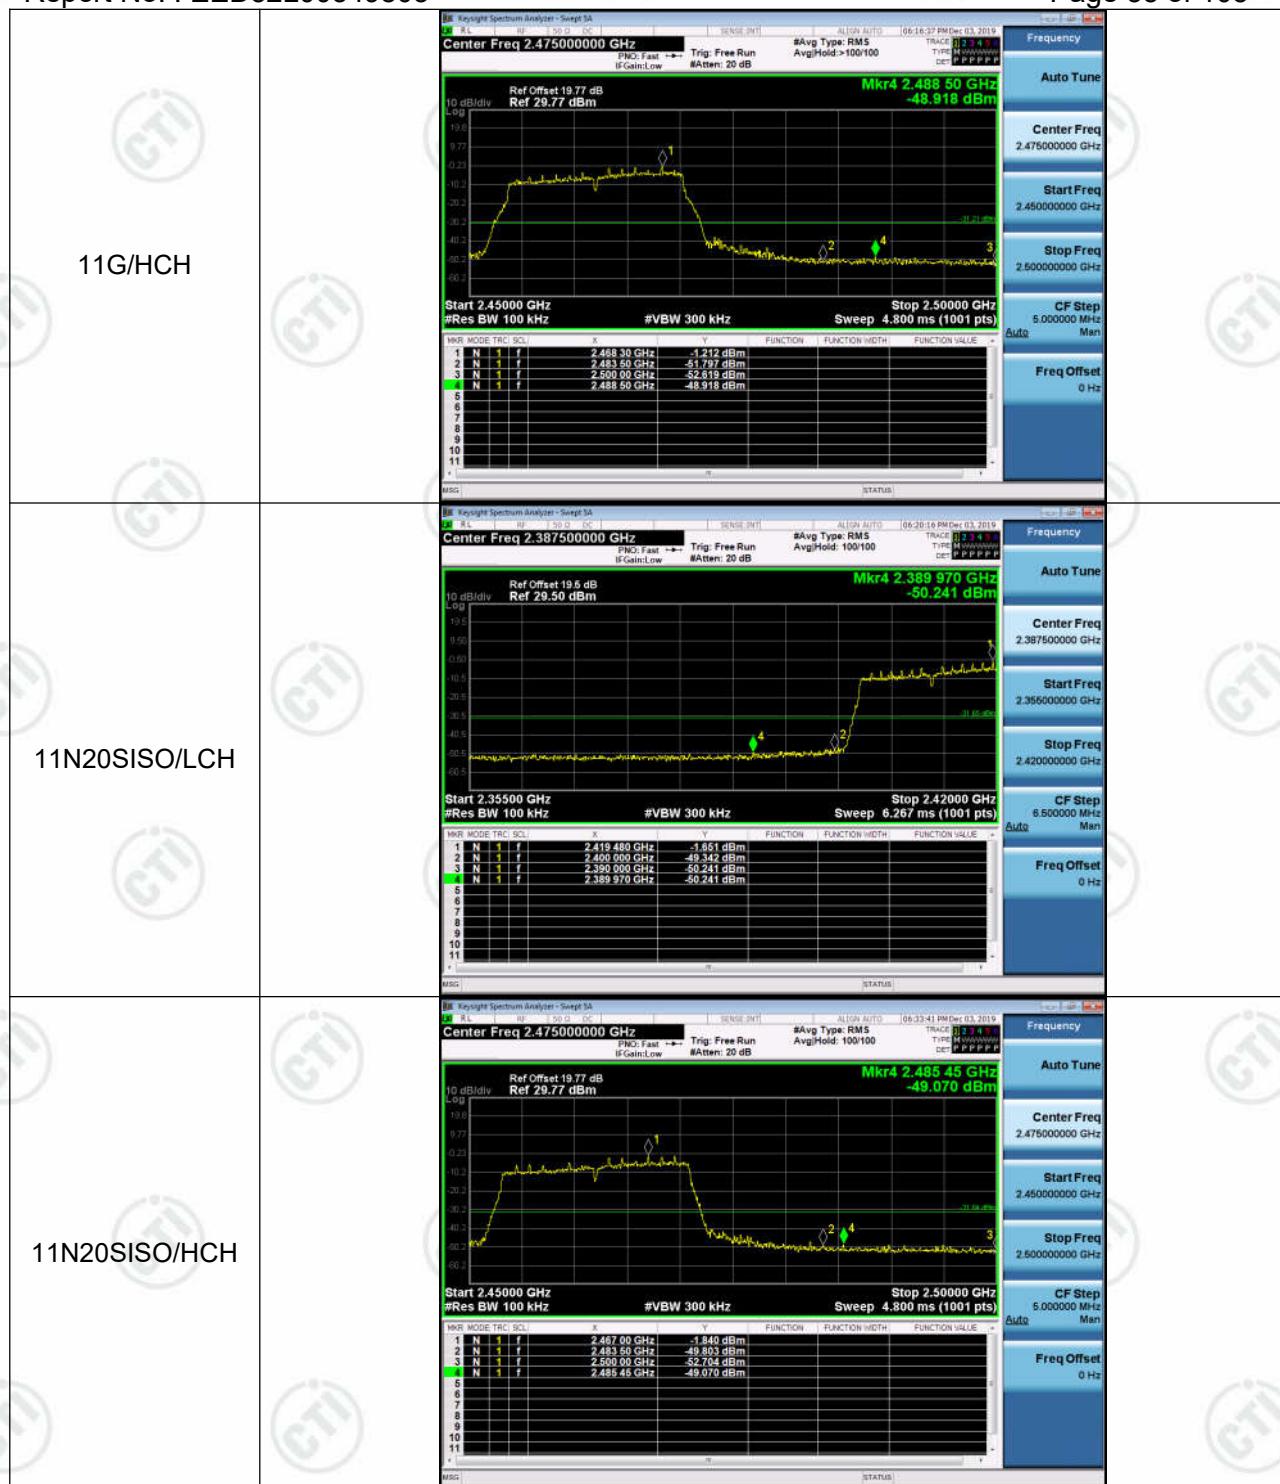



Appendix D): RF Conducted Spurious Emissions

Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Setup

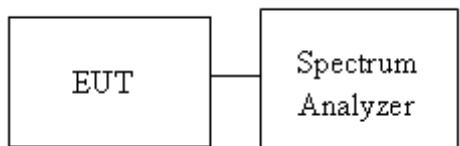


Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	5.887	<Limit	PASS
11B	MCH	5.636	<Limit	PASS
11B	HCH	6.107	<Limit	PASS
11G	LCH	-1.001	<Limit	PASS
11G	MCH	-1.935	<Limit	PASS
11G	HCH	-0.844	<Limit	PASS
11N20SISO	LCH	-2.339	<Limit	PASS
11N20SISO	MCH	-3.343	<Limit	PASS
11N20SISO	HCH	-1.854	<Limit	PASS
11N40SISO	LCH	-5.918	<Limit	PASS
11N40SISO	MCH	-4.713	<Limit	PASS
11N40SISO	HCH	-4.805	<Limit	PASS

Test Graph






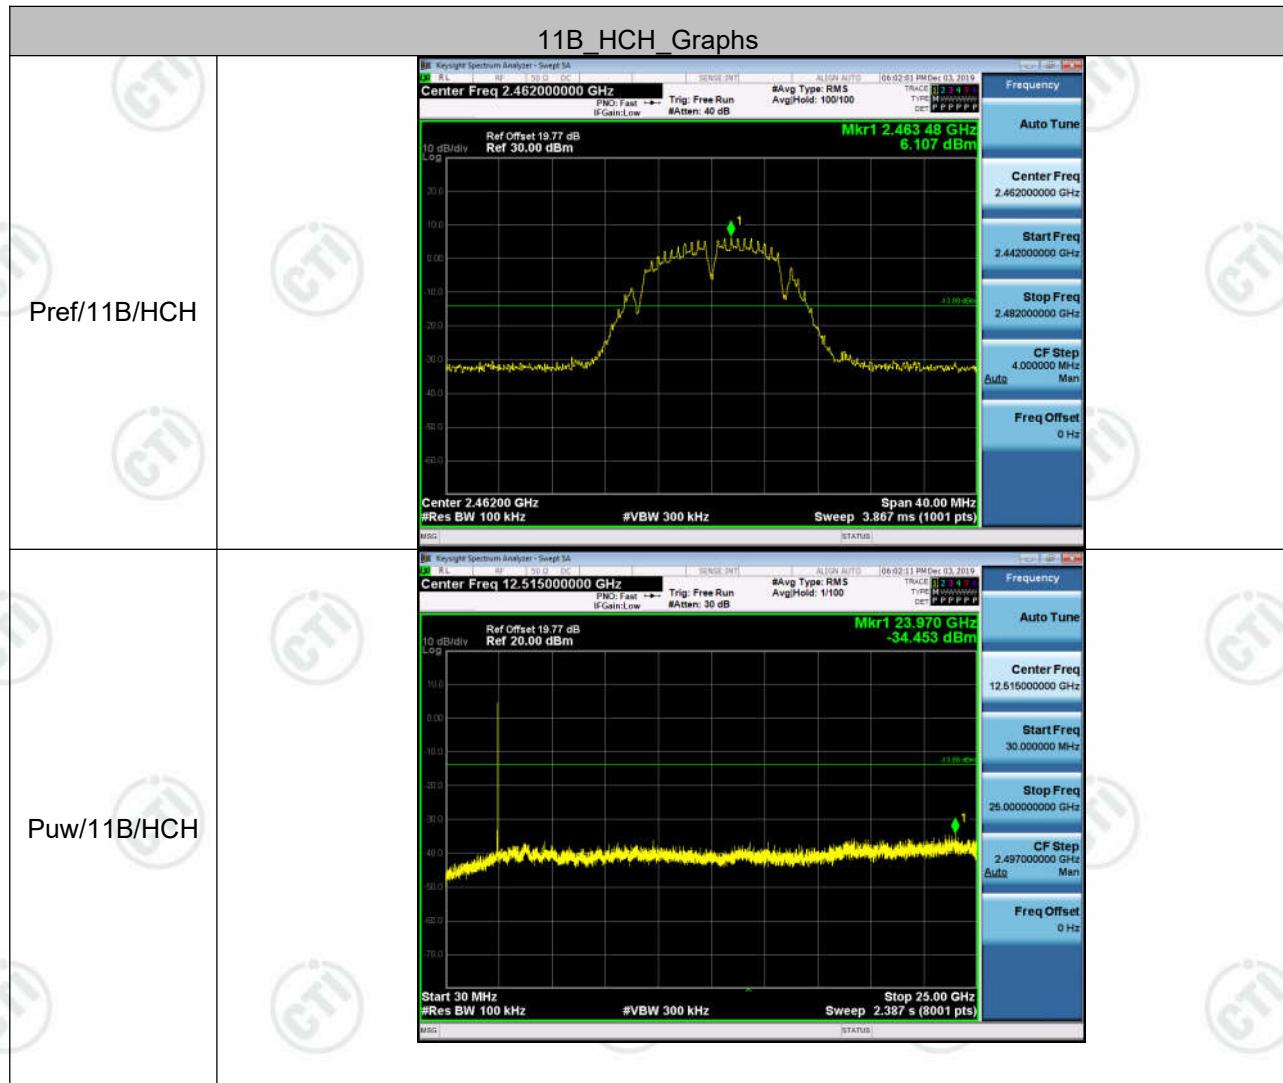


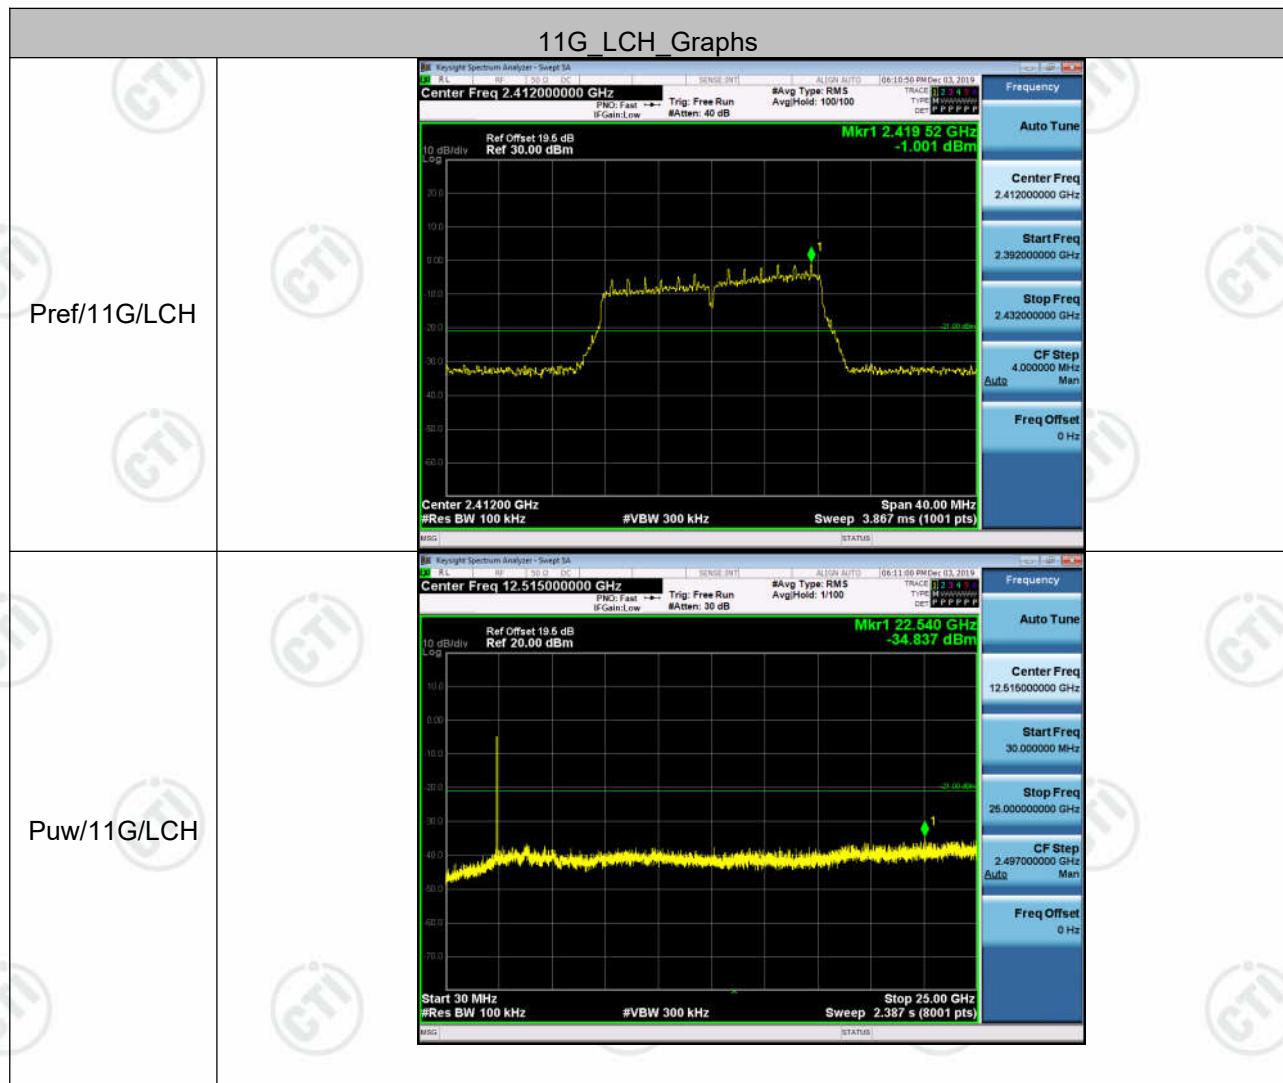








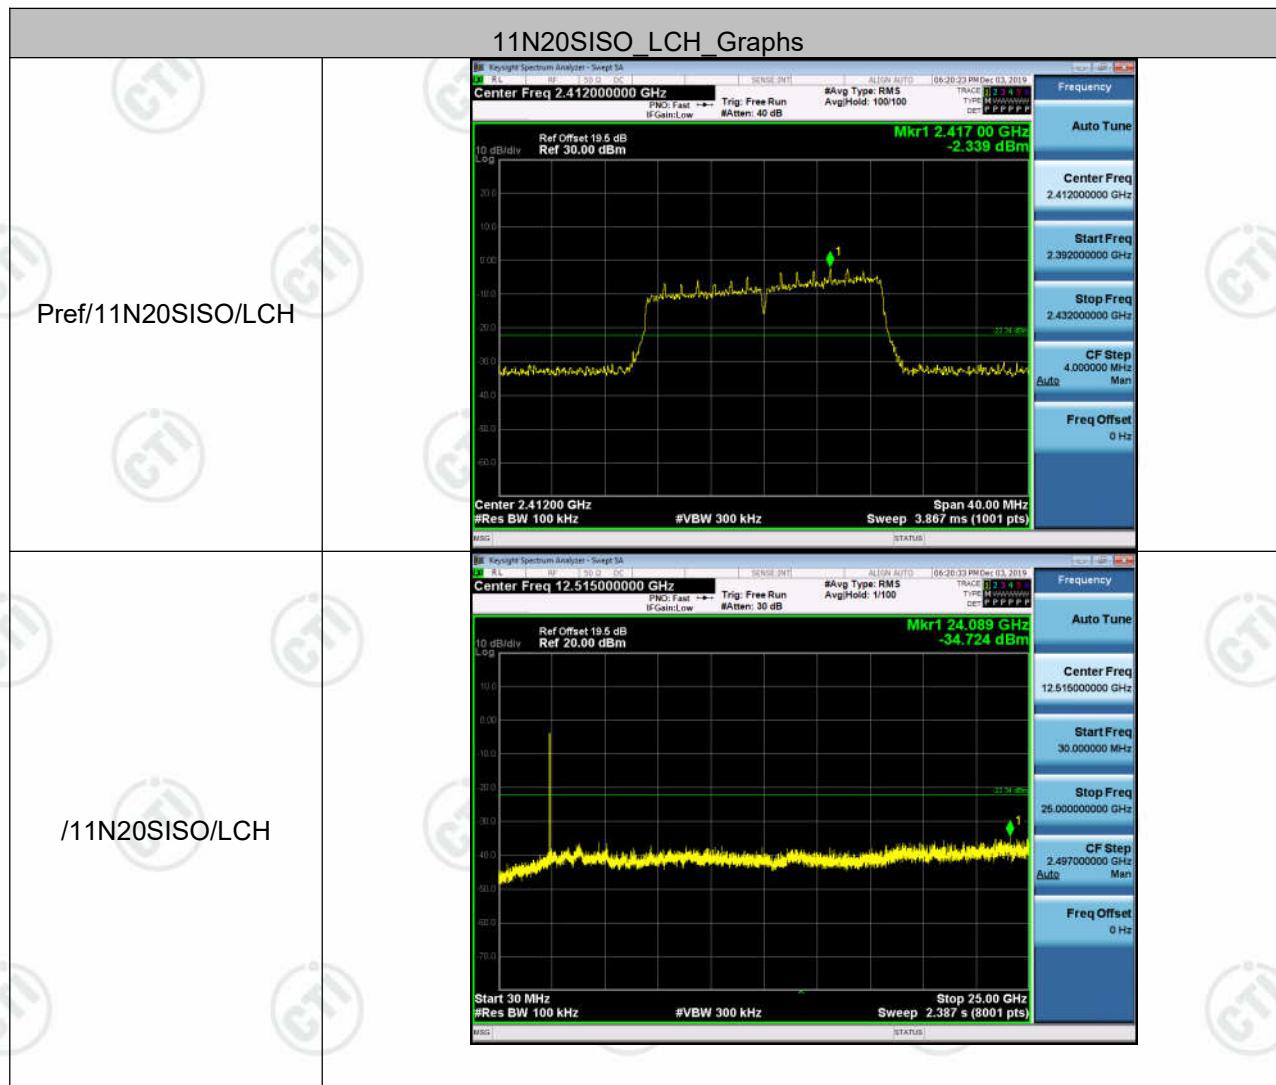


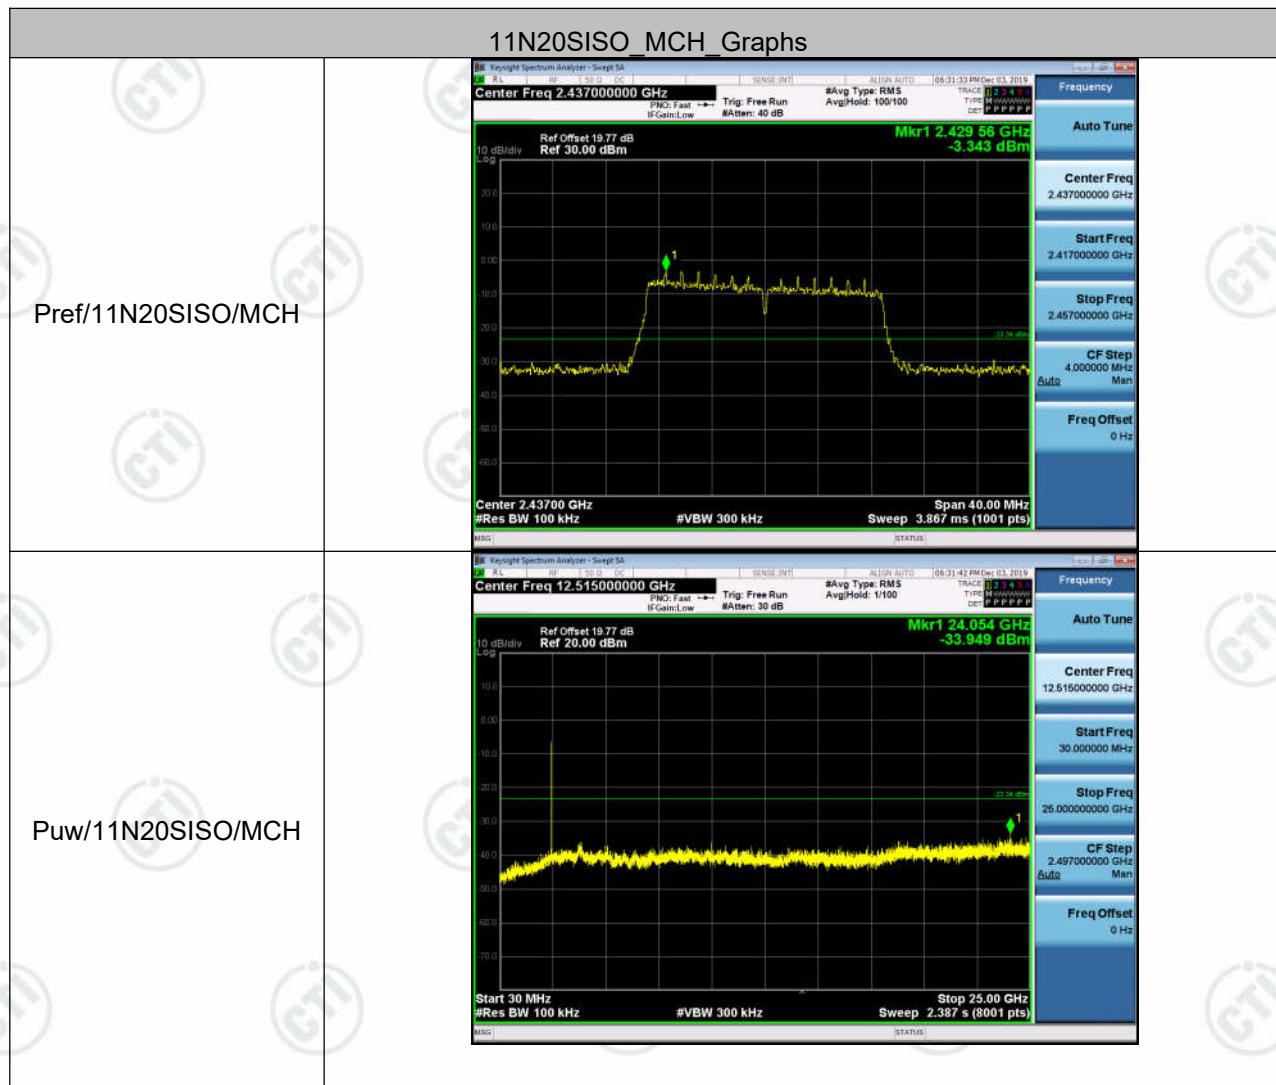

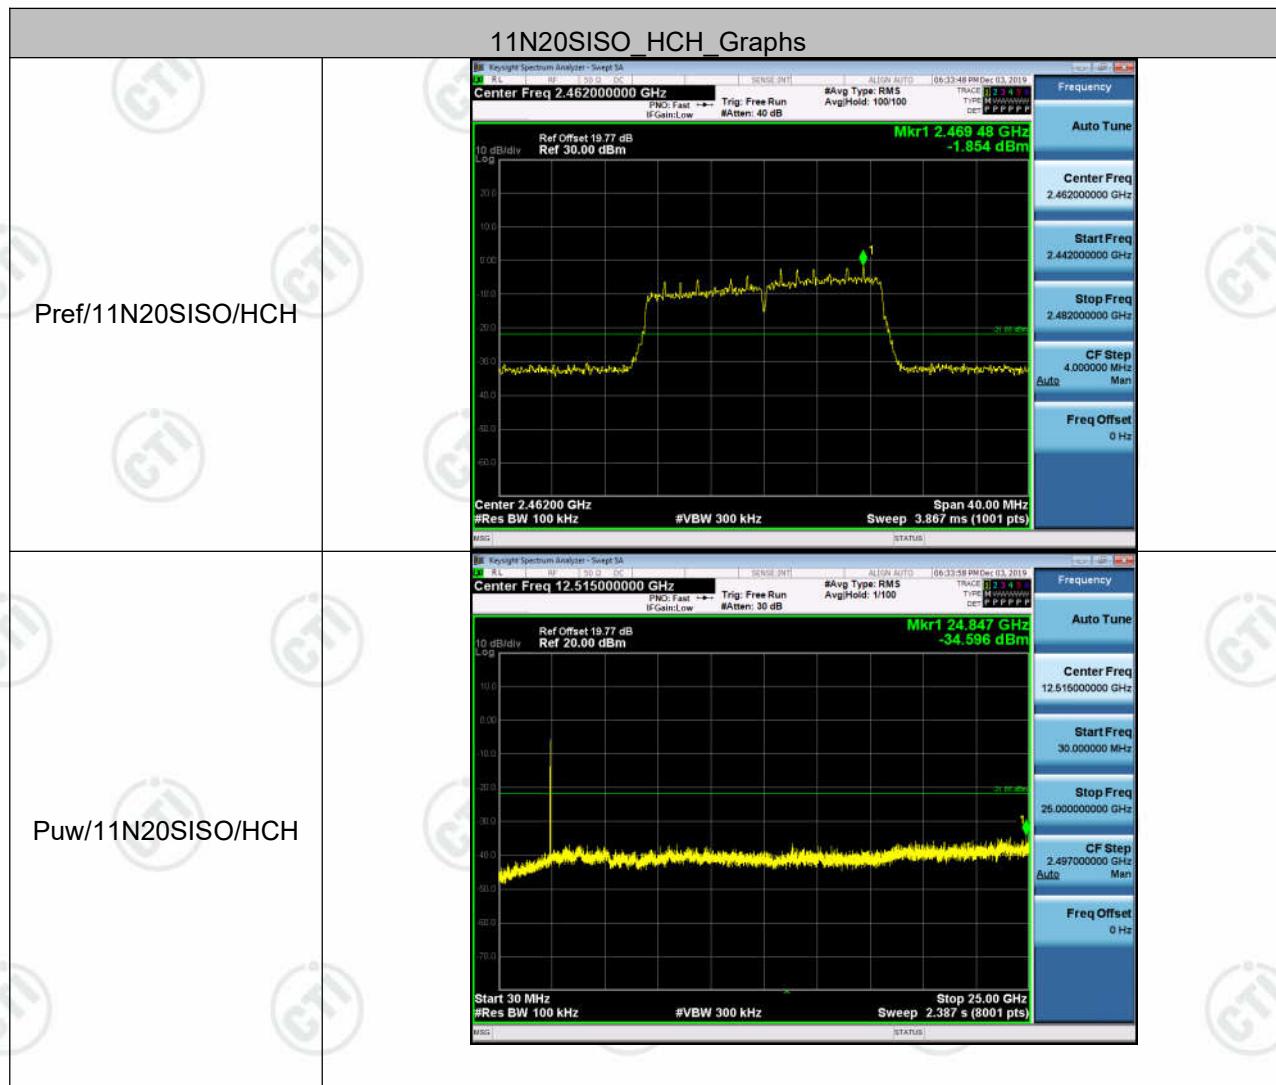

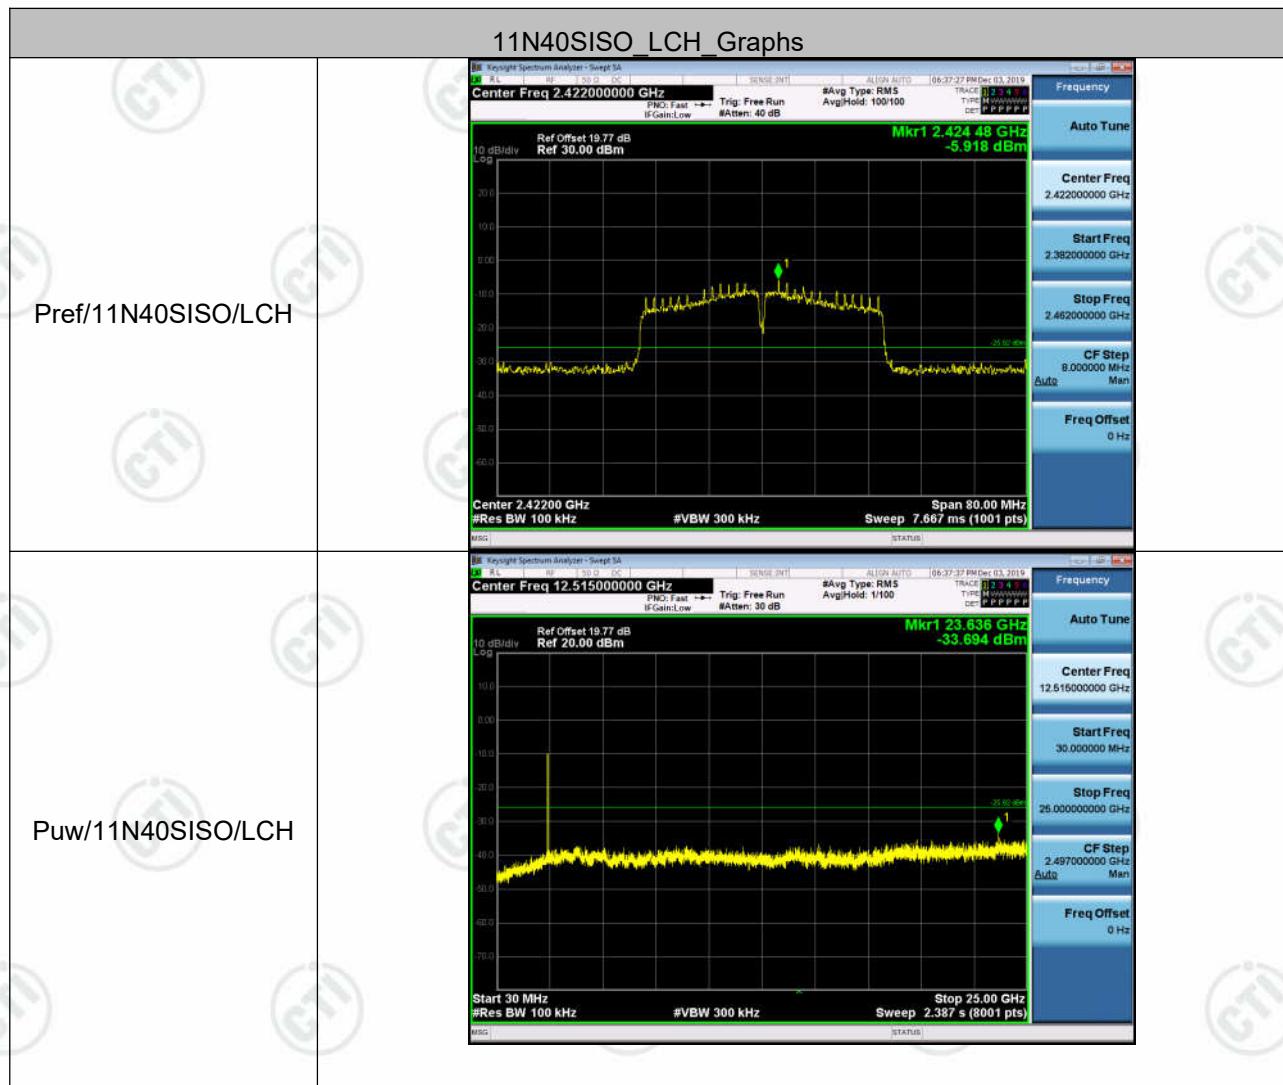

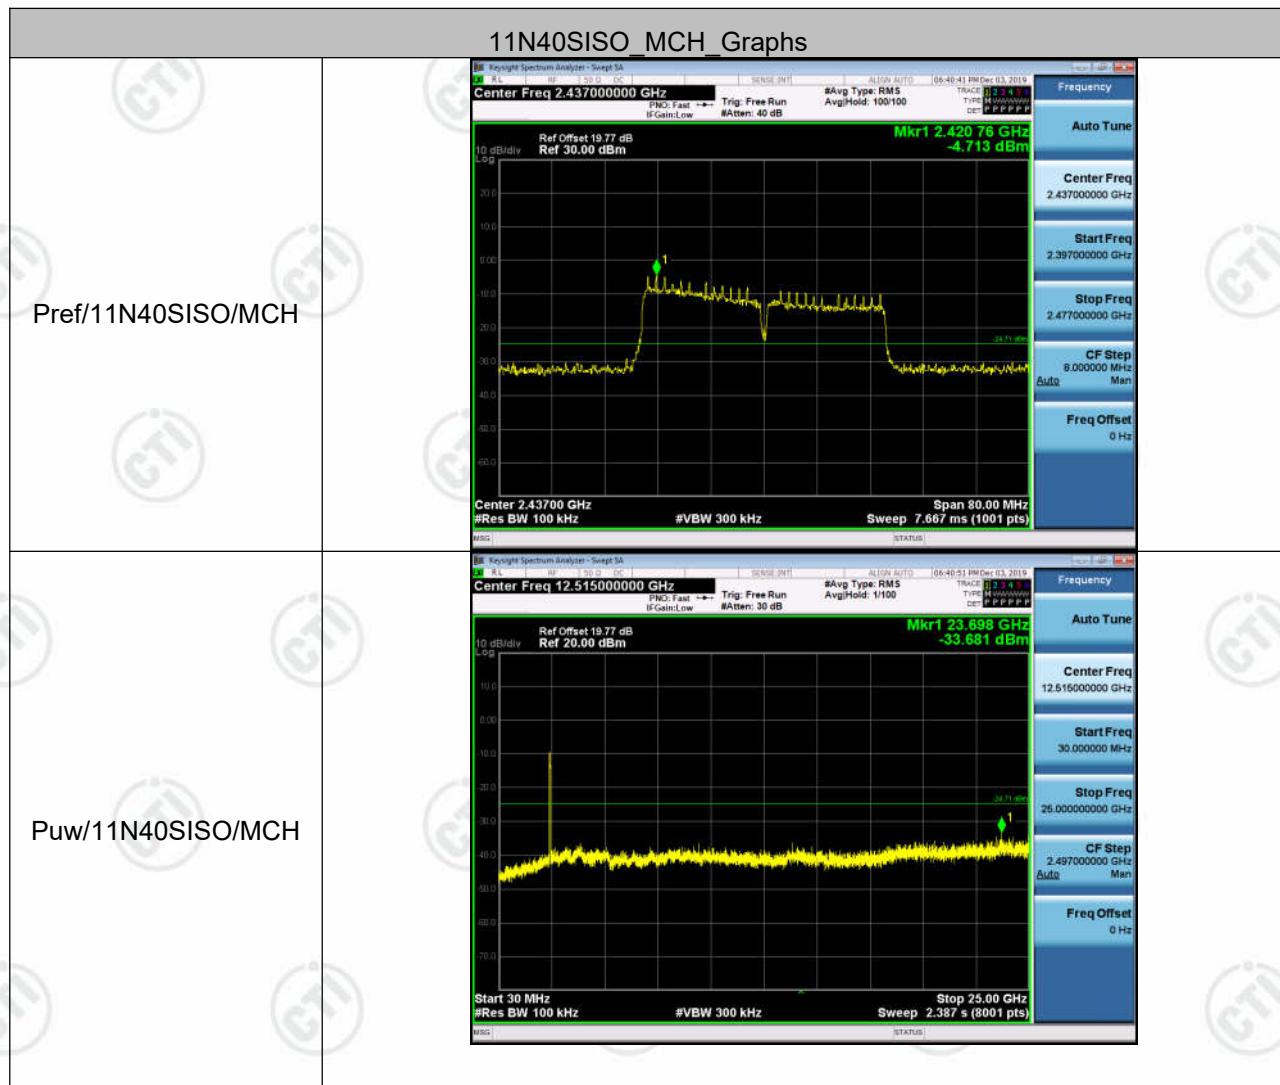

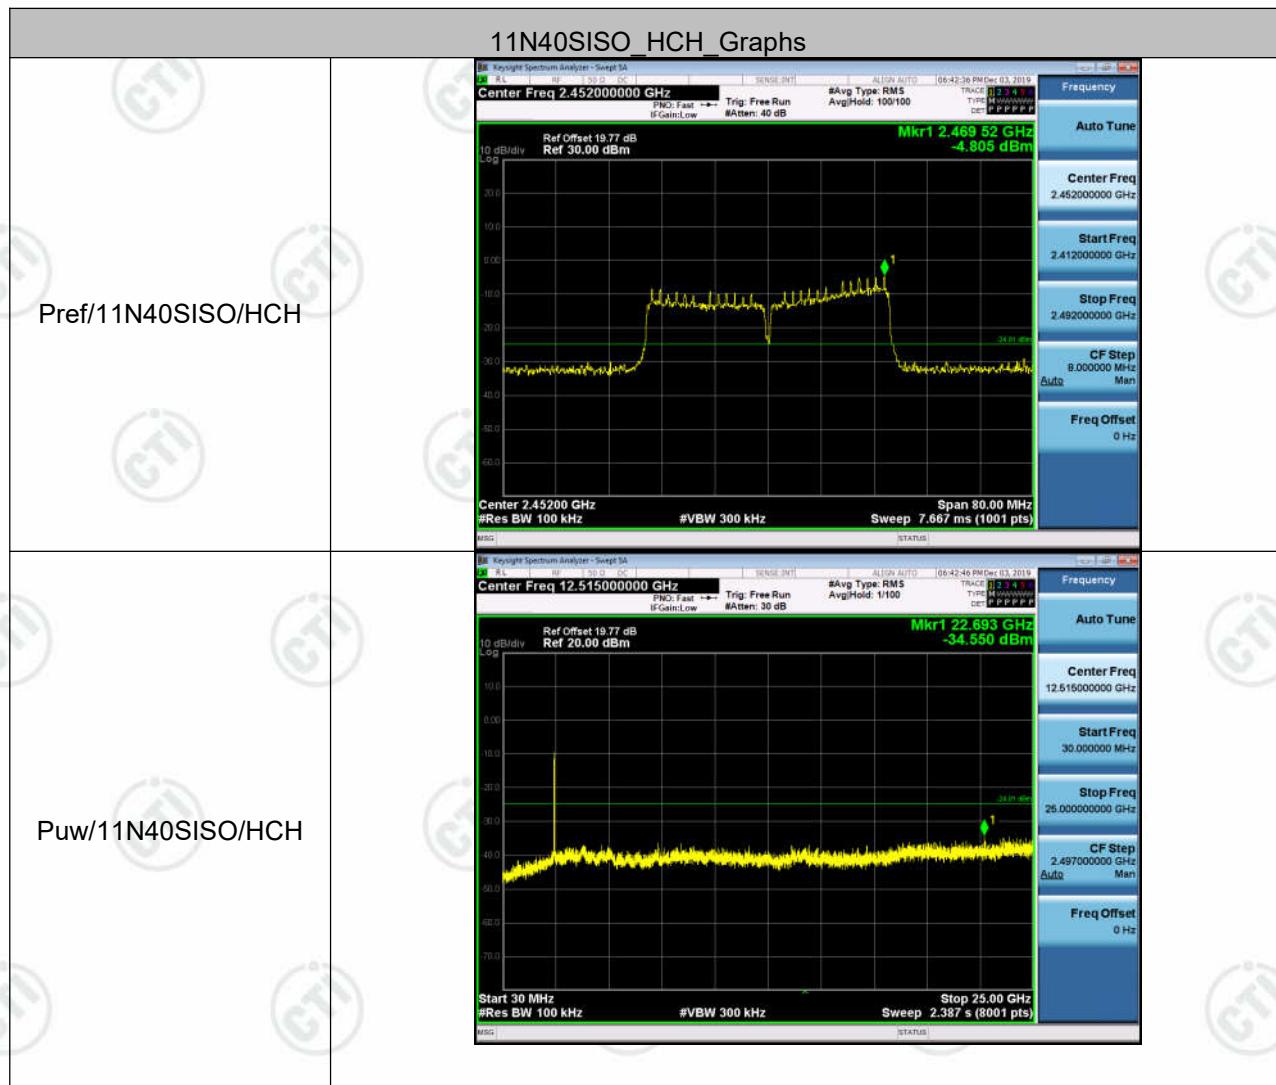

Appendix E): Power Spectral Density

Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] <input type="checkbox"/> Point-to-point operation :
-------	---

Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

Test Setup

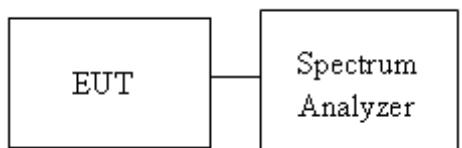


Result Table


Mode	Channel	Power Spectral Density [dBm/3kHz]	Verdict
11B	LCH	-8.490	PASS
11B	MCH	-9.225	PASS
11B	HCH	-8.765	PASS
11G	LCH	-14.138	PASS
11G	MCH	-16.378	PASS
11G	HCH	-14.597	PASS
11N20SISO	LCH	-14.103	PASS
11N20SISO	MCH	-16.884	PASS
11N20SISO	HCH	-15.764	PASS
11N40SISO	LCH	-19.246	PASS
11N40SISO	MCH	-19.704	PASS
11N40SISO	HCH	-19.450	PASS

Test Graph




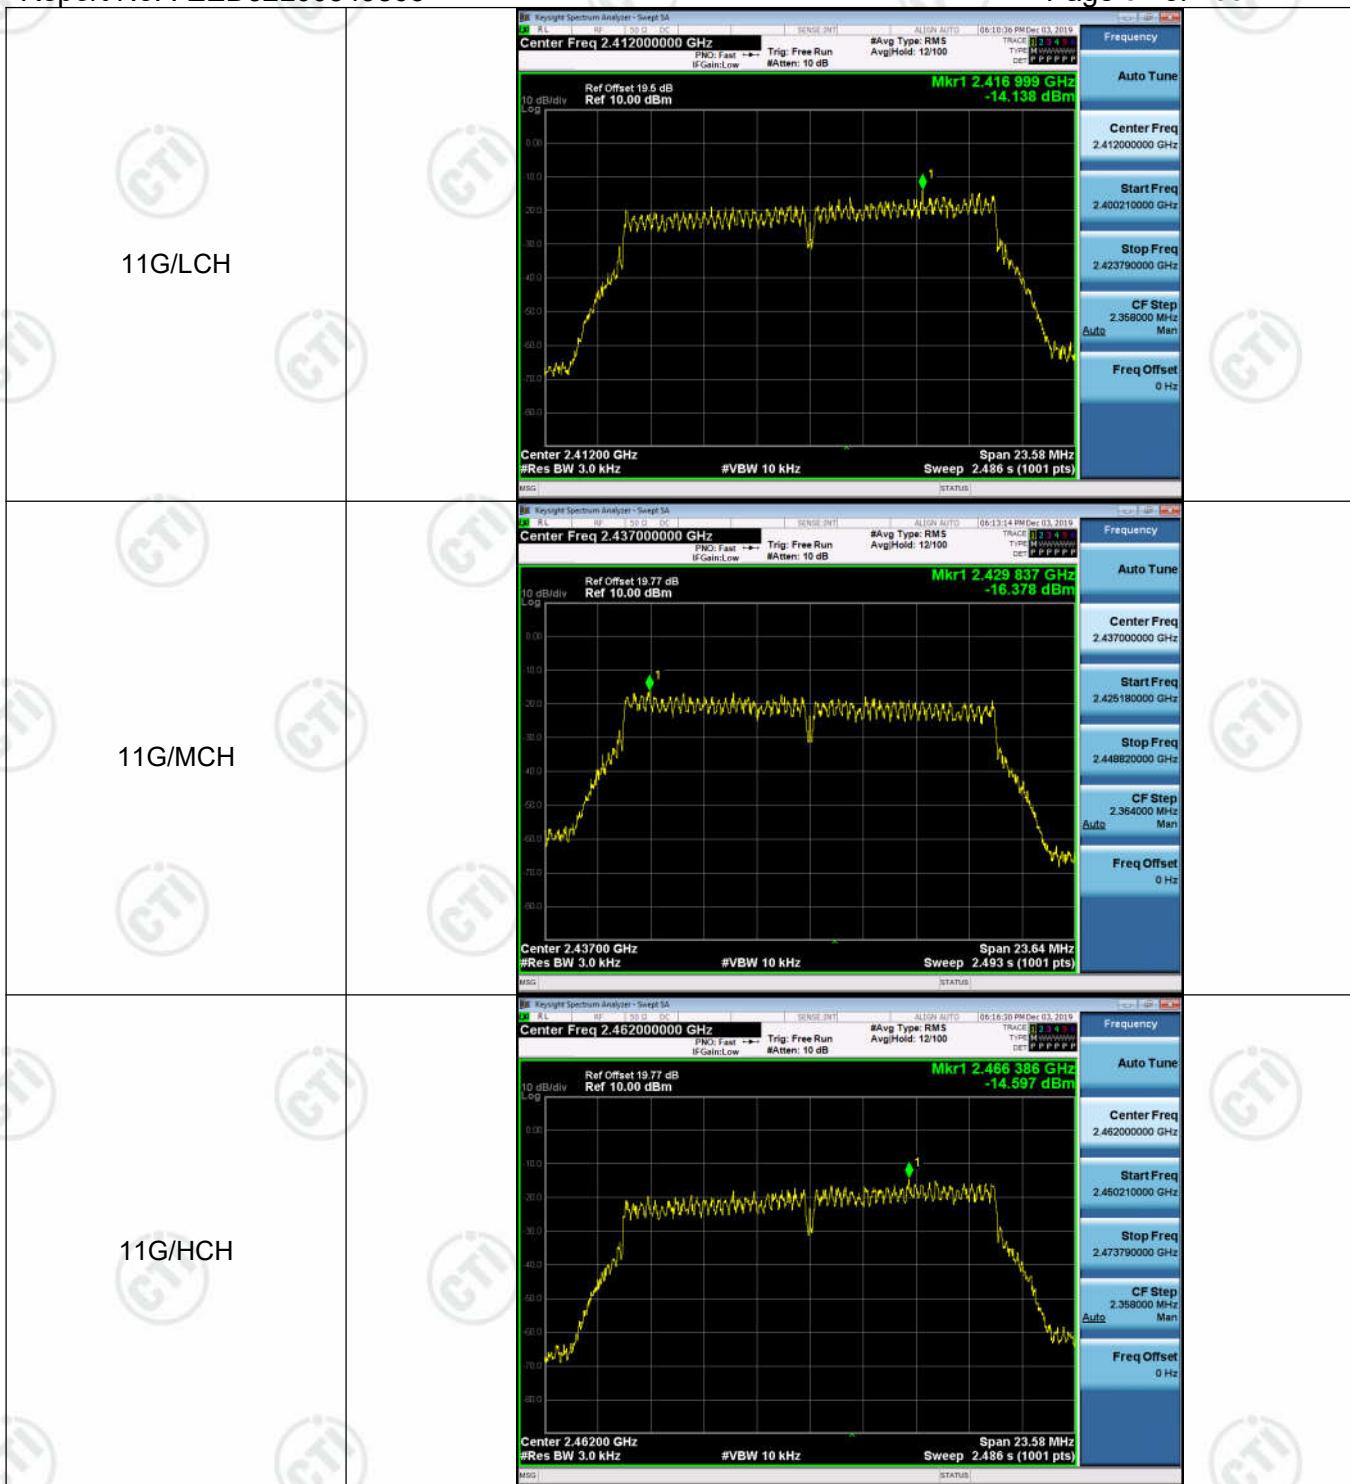

11N20SISO/LCH

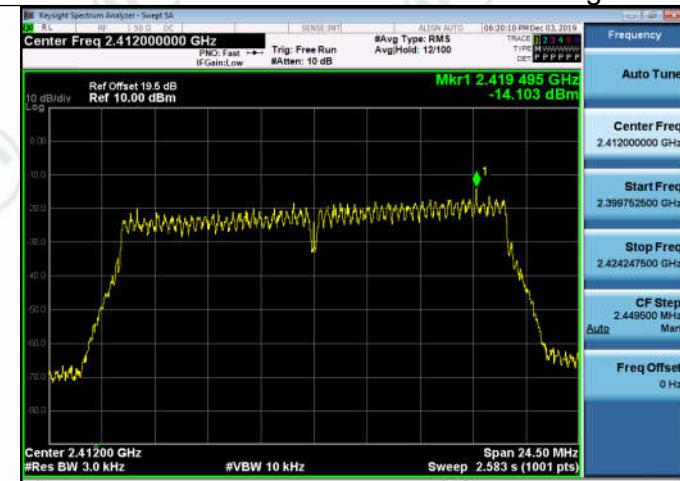


11N20SISO/MCH

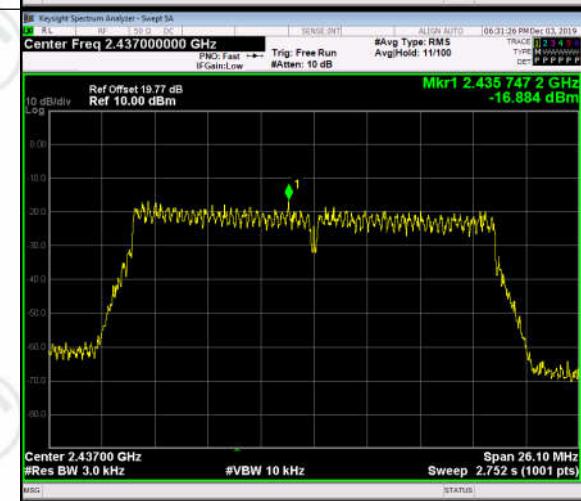


11N20SISO/HCH




11N40SISO/LCH

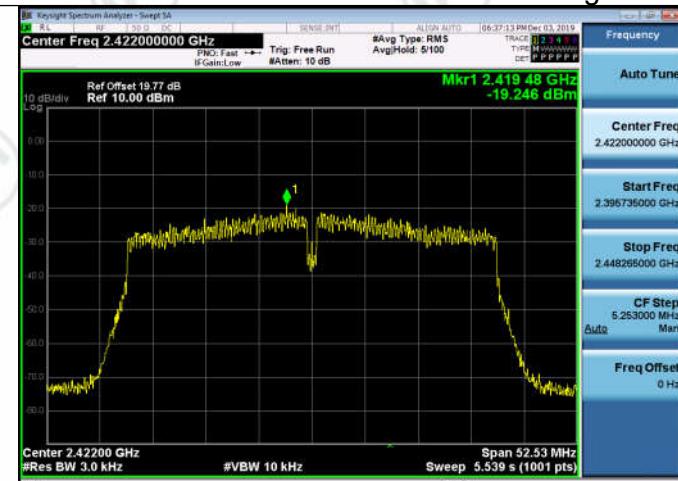

11N40SISO/MCH

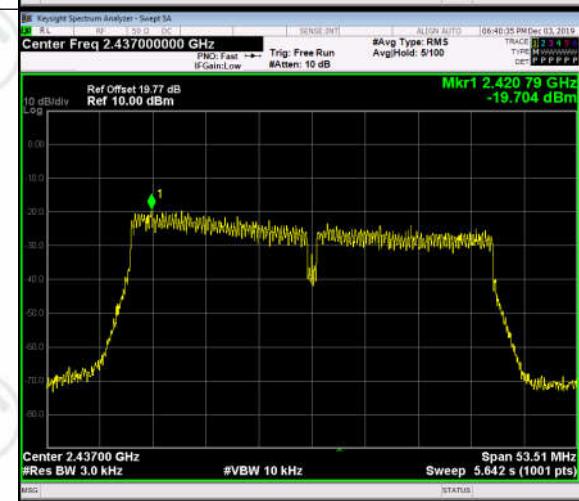

11N40SISO/HCH

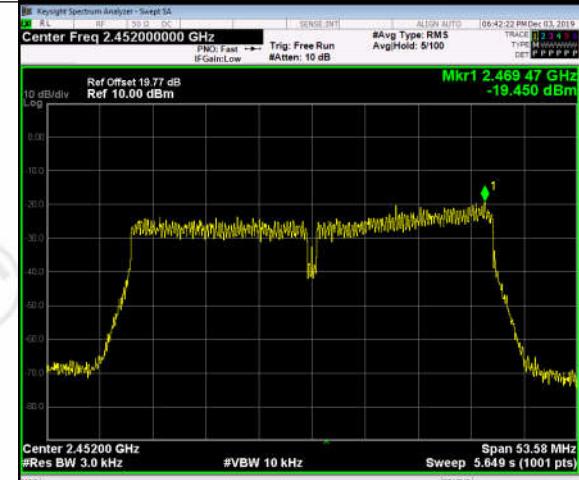

Appendix F): Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

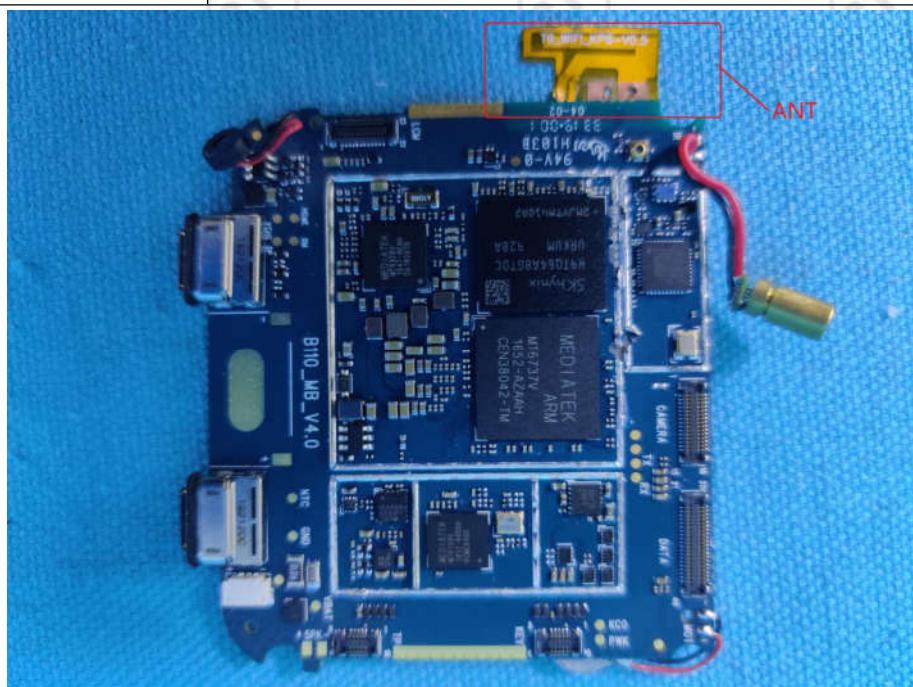

The antenna type is FPC with I-PEX connector, that is a unique connector and compliant with the requirement for 15.203. The best case gain of the antenna is 0.33dBi.

Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Product : Wearable watch
Temperature : 24°C


Model/Type reference : SF-120
Humidity : 52%

Live line:

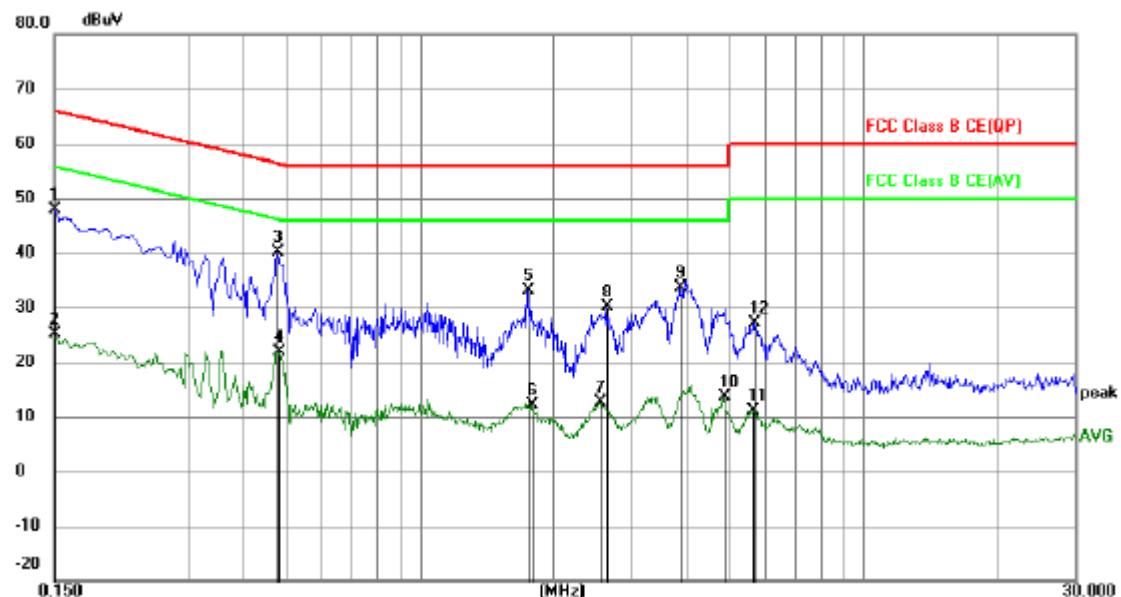

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	37.91	9.97	47.88	66.00	-18.12	QP	
2		0.1500	15.10	9.97	25.07	56.00	-30.93	AVG	
3 *		0.4785	30.21	10.00	40.21	56.37	-16.16	QP	
4		0.4830	11.98	10.00	21.98	46.29	-24.31	AVG	
5		1.7475	23.31	9.85	33.16	56.00	-22.84	QP	
6		1.7835	2.26	9.85	12.11	46.00	-33.89	AVG	
7		2.5485	2.89	9.83	12.72	46.00	-33.28	AVG	
8		2.6475	20.29	9.83	30.12	56.00	-25.88	QP	
9		3.8715	23.90	9.83	33.73	56.00	-22.27	QP	
10		4.8300	3.83	9.83	13.66	46.00	-32.34	AVG	
11		5.6400	1.31	9.84	11.15	50.00	-38.85	AVG	
12		5.6715	17.21	9.84	27.05	60.00	-32.95	QP	

Neutral line:

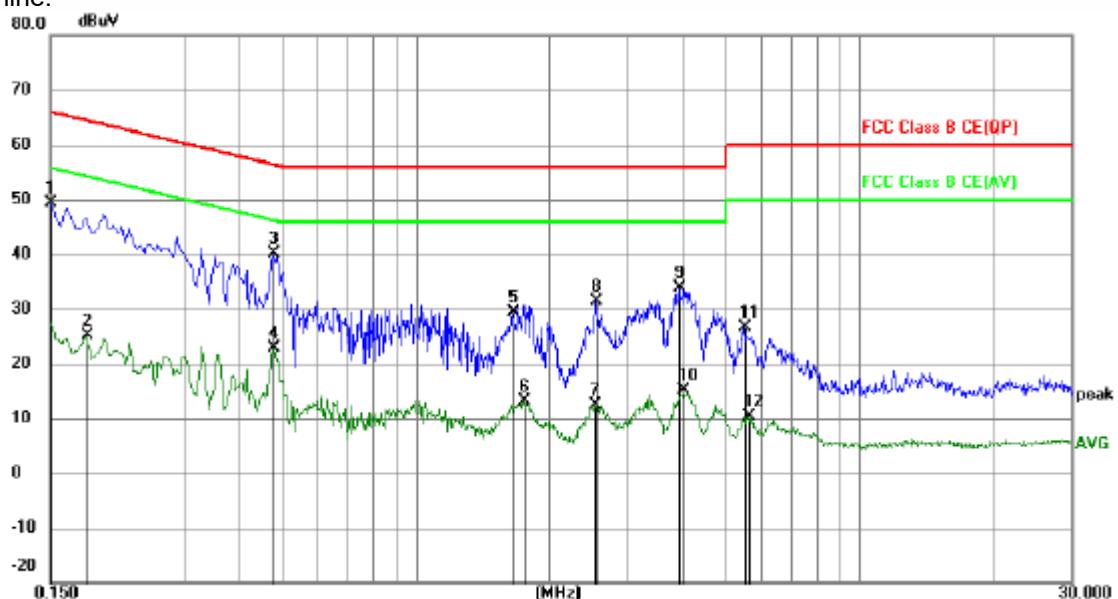

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector		Comment
								Detector	Comment	
1		0.1500	39.53	9.97	49.50	66.00	-16.50	QP		
2		0.1815	15.04	10.00	25.04	54.42	-29.38	AVG		
3 *		0.4785	30.02	10.00	40.02	56.37	-16.35	QP		
4		0.4785	12.78	10.00	22.78	46.37	-23.59	AVG		
5		1.6620	19.47	9.86	29.33	56.00	-26.67	QP		
6		1.7475	3.18	9.85	13.03	46.00	-32.97	AVG		
7		2.5305	2.57	9.83	12.40	46.00	-33.60	AVG		
8		2.5530	21.45	9.83	31.28	56.00	-24.72	QP		
9		3.9255	23.97	9.83	33.80	56.00	-22.20	QP		
10		4.0155	5.35	9.83	15.18	46.00	-30.82	AVG		
11		5.4915	16.75	9.83	26.58	60.00	-33.42	QP		
12		5.6175	0.42	9.84	10.26	50.00	-39.74	AVG		

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark																				
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																				
	Above 1GHz	Peak	1MHz	3MHz	Peak																				
		Peak	1MHz	10Hz	Average																				
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <p>Test method Refer as KDB 558074 D01</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 																								
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBμV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr> <tr> <td>74.0</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		


Test Graph

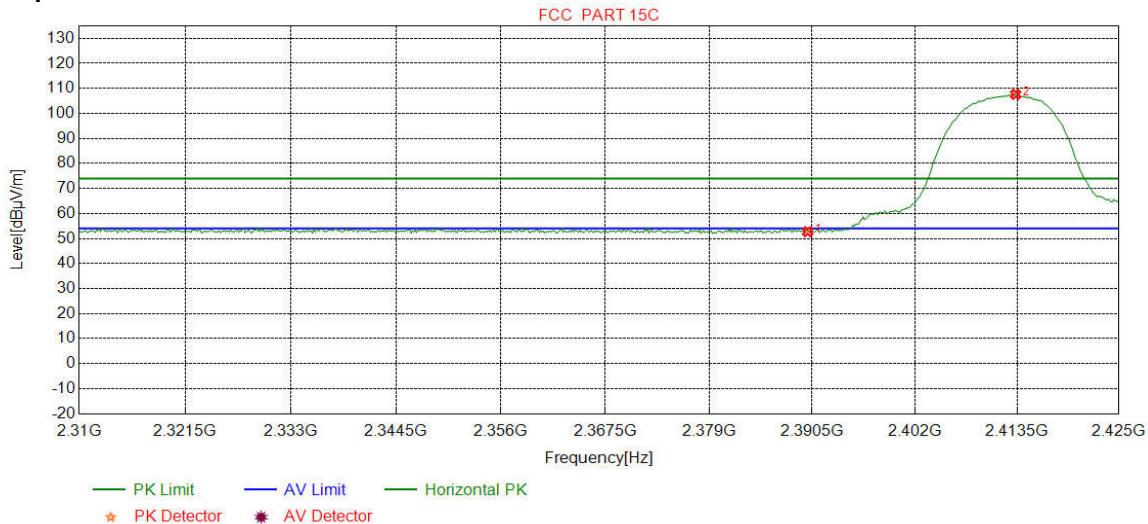

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.56	52.74	74.00	21.26	Pass	Horizontal
2	2413.3417	32.28	13.36	-42.43	104.40	107.61	74.00	-33.61	Pass	Horizontal

Mode:	802.11 b(11Mbps) Transmitting	Channel:	2412
Remark:	PK		

Test Graph

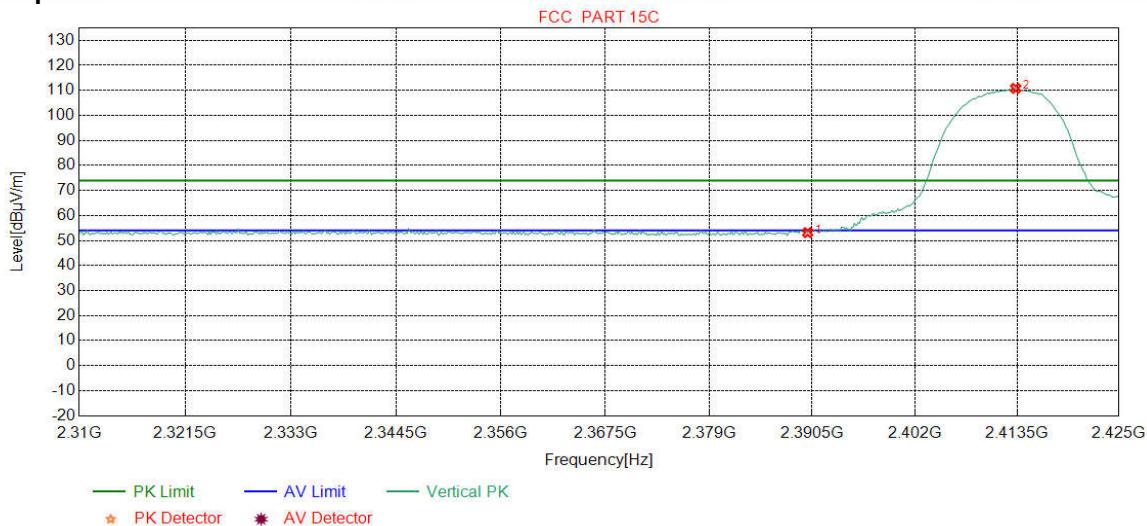

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-42.44	49.98	53.16	74.00	20.84	Pass	Vertical
2	2413.3417	32.28	13.36	-42.43	107.59	110.80	74.00	-36.80	Pass	Vertical