



TEST REPORT

Test Report No. : UL-RPT-RP-13406598-416-FCC

Applicant : wh Münzprüfer Dietmar Trenner GmbH

Model No. : BLK 100

FCC ID : 2AVM3BLK100

Technology : NFC – 13.56 MHz

Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.225

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. **Test Report Version 1.1 supersede Version 1.0 with immediate effect**
Test Report No. UL-RPT-RP-13406598-416-FCC Version 1.1, Issue Date 14 JANUARY 2021 replaces
Test Report No. UL-RPT-RP-13406598-416-FCC Version 1.0, Issue Date 11 JANUARY 2021, which is no longer valid.
5. Result of the tested sample: **PASS**

Prepared by: Sercan, Usta
Title: Laboratory Engineer
Date: 14 January 2021

Approved by: Bernd, Woerl
Title: Operations Leader
Date: 14 January 2021



Deutsche
Akkreditierungsstelle
D-PL-19381-02-00

This laboratory is accredited by DAkkS.
The tests reported herein have been performed in
accordance with its' terms of accreditation.

UL INTERNATIONAL GERMANY GMBH

Hedelfinger Str. 61
70327 Stuttgart, Germany
STU.CTECHLab@ul.com

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
1.1. Applicant Information	4
1.2. Manufacturer Information	4
2. Summary of Testing.....	5
2.1. General Information	5
Applied Standards	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	8
A. Support Equipment (In-house)	8
B. Support Equipment (Manufacturer supplied)	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results.....	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter AC Conducted Spurious Emissions	11
5.2.2. Transmitter 20 dB Bandwidth	17
5.2.3. Transmitter Fundamental Field Strength	20
5.2.4. Transmitter Radiated Spurious Emissions	23
5.2.5. Transmitter Frequency Stability (Temperature & Voltage Variation)	29
6. Measurement Uncertainty	33
7. Used equipment.....	34
8. Open-Area-Test Site comparison.....	35
9. Report Revision History	39

1. Customer Information

1.1. Applicant Information

Company Name:	wh Münzprüfer Dietmar Trenner GmbH
Company Address:	Teltower Damm 276, 14167 Berlin
Company Phone No.:	+49 30 8457230
Company E-Mail:	info@whberlin.de
Contact Person:	Christian Trenner
Contact E-Mail Address:	Ch.trenner@whberlin.de
Contact Phone No.:	+49 30 84572394

1.2. Manufacturer Information

Company Name:	wh Münzprüfer Dietmar Trenner GmbH
Company Address 1:	Teltower Damm 276, 14167 Berlin
Company Address 2:	+49 30 8457230
Company Phone No.:	info@whberlin.de
Company E-Mail:	Christian Trenner
Contact Person:	Ch.trenner@whberlin.de
Contact E-Mail Address:	+49 30 84572394
Contact Phone No.:	wh Münzprüfer Dietmar Trenner GmbH

2. Summary of Testing

2.1. General Information

Applied Standards

Specification Reference:	47CFR15.225
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209

Location

Location of Testing:	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
Test Firm Registration:	399704

Date information

Order Date:	24 June 2020
EUT arrived:	14 November 2020
Test Dates:	19 November 2020 to 13 January 2021
EUT returned:	-/-

2.2. Summary of Test Results

Clause	Measurement	Complied	Did not comply	Not performed	Not applicable
Part 15.207	Transmitter AC Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.215(c)	Transmitter 20 dB Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.209(a)/15.225(d)	Transmitter Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note(s):

2.3. Methods and Procedures

Reference:	ANSI C63.4-2014
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 414788 D01 Radiated Test Site V01r01
Title:	Test Sites for Radiated Emission Measurements, June,12,2018
Reference:	KDB 174176 D01 Line Conducted FAQ v01r01
Title:	AC Power-Line Conducted Emissions Frequently Asked Questions, June,03,2015

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	wh Münzprüfer
Model Name or Number:	BLK 100
Serial Number:	16 T 0385429 46/20
Hardware Version Number:	BLK100E5.1
Software Version Number:	V7.50.31
FCC ID:	2AVM3BLK100

Brand Name:	wh Münzprüfer
Model Name or Number:	BLK 100
Serial Number:	16 T 0385429 46/20 & 50 Ohm Abschluss 49/20
Hardware Version Number:	BLK100E5.1
Firmware Version Number:	V7.50.31
Additional Details:	2AVM3BLK100

3.2. Description of EUT

The BLK 100 is a NFC card reader. It can be used to pay with a preformatted NFC 13.56 MHz tag.

The serial interface between the BLK 100 and the machine controller transfers the price to charge to the BLK 100 and the price is deducted from the Pay Key upon presentation. The machine gets told the successful payment via serial interface.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	NFC	
Category of Equipment:	Transceiver	
Channel Spacing:	Single channel device	
Operating Frequency Range:	13.56 MHz	
Nominal Transmit Frequency:	13.56 MHz	
Modulation Type:	ASK	
Power Supply Type 1:	AC-DC Adapter- Switching Mode Power Supply	
Power Supply Requirement(s):	100-240 V AC / 0.6 A / 50/60Hz to 12 V DC / 2 A	
Tested Temperature Range:	T_{nom}	20°C
	T_{min}	10°C
	T_{max}	70°C

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	-/-	-/-	-/-	-/-

B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Passive NFC Key-13.56 MHz	wh Münzprüfer	NFC Card	Not stated
2	AC-DC Adapter- Switching Adapter	Shenzen Fujia Appliance CO., LTD.	FJ-SW1202000E	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuous transmitting modulated carrier at maximum power in NFC -13.56 MHz test mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The customer supplied a document which name is "Technical Manual BLK100 eng version 1.5.pdf", issue date 01 September 2020 containing the setup instructions was used.

EUT Power Supply:

- The EUT can powered via AC/DC power adapter.
- All radiated tests were with EUT powered via AC/DC power adapter 120 VAC / 60 Hz.
- All conducted tests were performed with laboratory power supply.

Test Mode Activations:

- For NFC 13.56 MHz test mode, the NFC Card was placed on the EUT & activates the NFC communication.

Radiated Measurements:

- Before starting final radiated spurious emission measurements "worst case verification" with the EUT in Standing-position & Laying-position was performed by Lab.
- The EUT in Standing-position was found to be the worst case therefore this report includes relevant results.
- Radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set to 80 cm.
- The fundamental field strength, bandwidth and radiated spurious emissions above 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- EMC32 V10.6.0 Software was used for the Radiated spurious emission measurement.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineer:	Asim Shahzad	Test Date:	03 December 2020
Test Sample Serial Number:	16 T 0385429 46/20 & 50 Ohm Abschluss 49/20		
Test Site Identification	SR 7/8		

FCC Reference:	Part 15.207
Test Method Used:	ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below

Environmental Conditions:

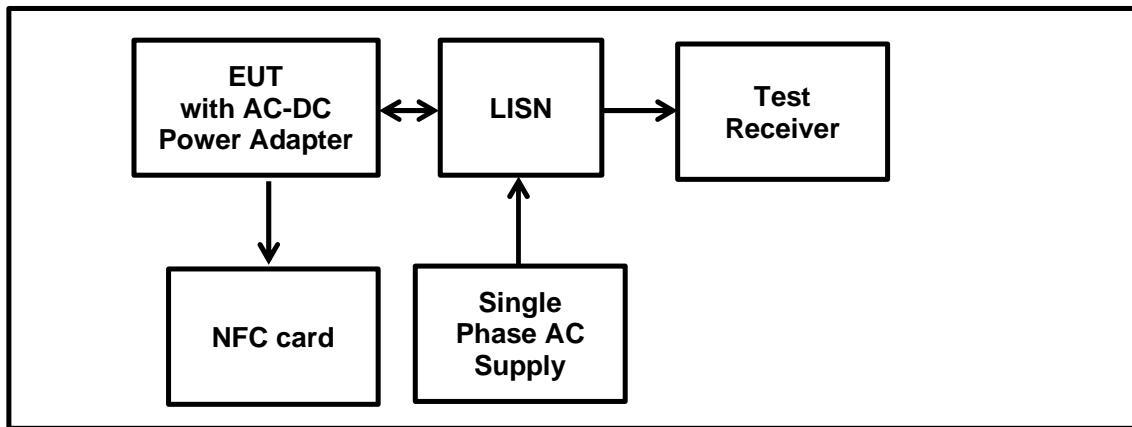
Temperature (°C):	23
Relative Humidity (%):	48

Settings of the Instrument

Detector	Quasi Peak/ Average Peak
-----------------	--------------------------

Note(s):

1. The EUT was plugged into an AC/DC Power supply. The Power supply was connected to 120 VAC / 60 Hz single phase supply via a LISN.
2. In accordance with FCC KDB 174176 Q4, tests were also performed with a 240 VAC 60 Hz single phase supply as this was within the voltage range marked on the 100-240 VAC~50/60 Hz power supply. The EUT was configured on NFC 13.56 MHz : Single Channel.
3. The EUT was initially tested with the standard antenna connected (test sample serial number 16 T 0385429 46/20). An emission at the approximate carrier frequency of 13.56 MHz was found to be non-compliant as it exceeded the test limit. The customer supplied a modified sample (test sample serial number 50 Ohm Abschluss 49/20) with the standard antenna disconnected and a dummy load fitted in accordance with FCC KDB 174176 Q5. The test was repeated and the EUT was found to be compliant.
4. The EUT's NFC 13.56 MHz output port was terminated 50 Ω termination (dummy load).
5. Pre-scans were performed, and markers placed on the highest live and neutral measured levels. Final measurements were performed on the marker frequencies and the results entered into the tables below.
6. The final measured value, for the given emission, in the table below incorporates the cable loss.
7. All other emissions shown on the pre-scan plot were investigated. Only the highest 6 emissions have been reported in the tables below in accordance with ANSI C63.10 section 6.2.5.
8. Measurements were performed in shielded room (SR7/ 8 Asset Number 1603671). The EUT was placed at a height of 80 cm above the reference ground plane and in a distance of 40 cm from the vertical ground plane at the edge of the table.
9. Measurement software used: Toyo EMI Software; CE measurement software EP5/CE Ver 4.0.1.

Transmitter AC Conducted Spurious Emissions (continued)**Test setup:**

Transmitter AC Conducted Spurious Emissions (continued)**Results: Live / Quasi Peak / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1608	Live	38.70	65.40	26.70	Complied
0.1866	Live	37.50	64.20	26.70	Complied
0.2933	Live	35.10	60.40	25.30	Complied
0.3996	Live	37.60	57.90	20.30	Complied
0.6685	Live	28.00	56.00	28.00	Complied
13.6222	Live	28.60	60.00	31.40	Complied

Results: Live / Average / 120 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1608	Live	17.80	55.40	37.60	Complied
0.1866	Live	18.10	54.20	36.10	Complied
0.2933	Live	17.70	50.40	32.70	Complied
0.3996	Live	19.80	47.90	28.10	Complied
0.6685	Live	13.10	46.00	32.90	Complied
13.6222	Live	13.20	50.00	36.80	Complied

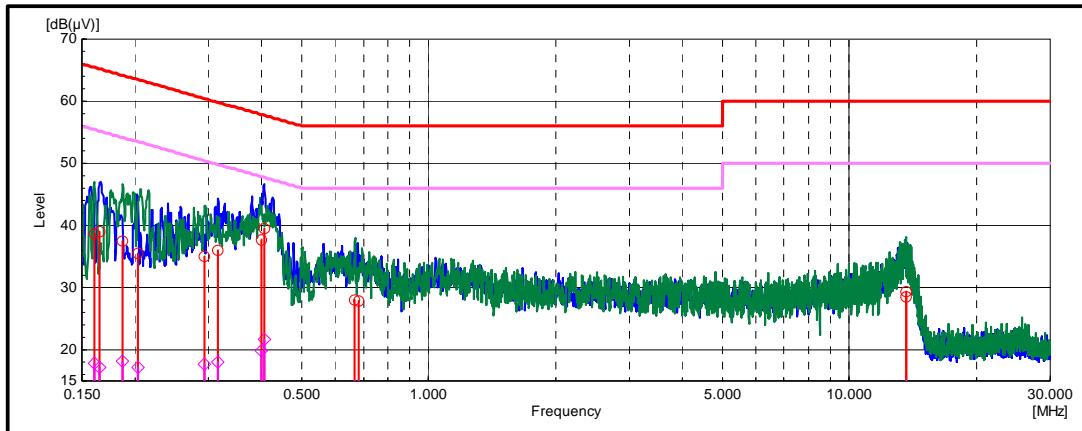
Results: Neutral / Quasi Peak / 120 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1656	Neutral	38.90	65.20	26.30	Complied
0.2037	Neutral	35.50	63.50	28.00	Complied
0.3157	Neutral	36.00	59.80	23.80	Complied
0.4072	Neutral	39.50	57.70	18.20	Complied
0.6802	Neutral	27.90	56.00	28.10	Complied
13.6602	Neutral	29.30	60.00	30.70	Complied

Results: Neutral / Average / 120 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1656	Neutral	17.20	55.20	38.00	Complied
0.2037	Neutral	17.20	53.50	36.30	Complied
0.3157	Neutral	18.00	49.80	31.80	Complied
0.4072	Neutral	21.70	47.70	26.00	Complied
0.6802	Neutral	13.70	46.00	32.30	Complied
13.6602	Neutral	14.10	50.00	35.90	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 120 VAC 60 Hz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter AC Conducted Spurious Emissions (continued)**Results: Live / Quasi Peak / 240 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.2024	Live	38.10	63.50	25.40	Complied
0.2473	Live	36.30	61.80	25.50	Complied
0.3908	Live	36.20	58.00	21.80	Complied
0.6929	Live	31.70	56.00	24.30	Complied
2.3570	Live	28.40	56.00	27.60	Complied
13.7771	Live	27.30	60.00	32.70	Complied

Results: Live / Average / 240 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.2024	Live	18.70	53.50	34.80	Complied
0.2473	Live	17.70	51.80	34.10	Complied
0.3908	Live	16.80	48.00	31.20	Complied
0.6929	Live	13.70	46.00	32.30	Complied
2.3570	Live	11.60	46.00	34.40	Complied
13.7771	Live	11.80	50.00	38.20	Complied

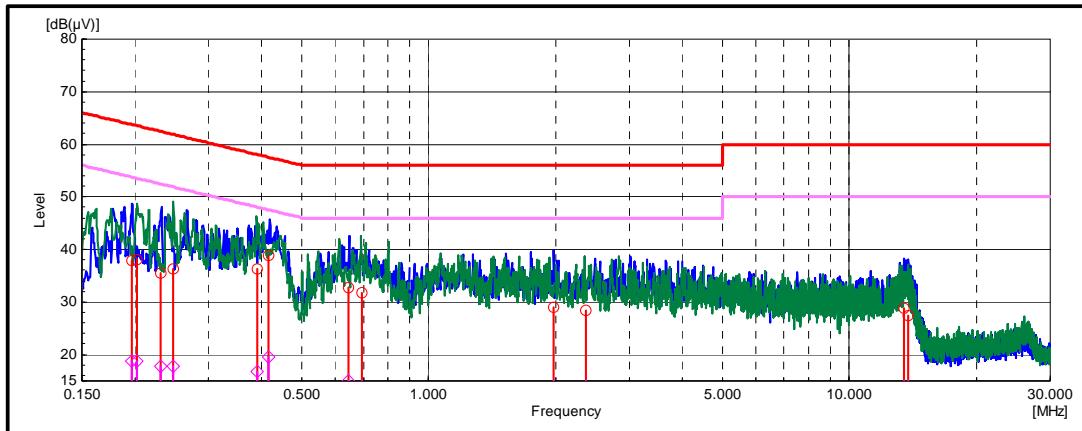
Results: Neutral / Quasi Peak / 240 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1967	Neutral	37.80	63.70	25.90	Complied
0.2304	Neutral	35.40	62.40	27.00	Complied
0.4173	Neutral	38.70	57.50	18.80	Complied
0.6462	Neutral	32.70	56.00	23.30	Complied
1.9842	Neutral	28.90	56.00	27.10	Complied
13.5026	Neutral	28.80	60.00	31.20	Complied

Results: Neutral / Average / 240 VAC 60 Hz

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1967	Neutral	18.80	53.70	34.90	Complied
0.2304	Neutral	17.80	52.40	34.60	Complied
0.4173	Neutral	19.60	47.50	27.90	Complied
0.6462	Neutral	15.10	46.00	30.90	Complied
1.9842	Neutral	11.90	46.00	34.10	Complied
13.5026	Neutral	13.20	50.00	36.80	Complied

Result: Pass

Transmitter AC Conducted Spurious Emissions (continued)**Plot: Live and Neutral Line / 240 VAC 60 Hz**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Transmitter 20 dB Bandwidth**Test Summary:**

Test Engineer:	Sercan, Usta	Test Dates:	13 January 2021
Test Sample Serial Number:	16 T 0385429 46/20		
Test Site Identification	SR 9		

FCC Reference:	Part 15.215(c)
Test Method Used:	ANSI C63.10 Section 6.9.2 deviations in accordance with FCC Inquiry

Environmental Conditions:

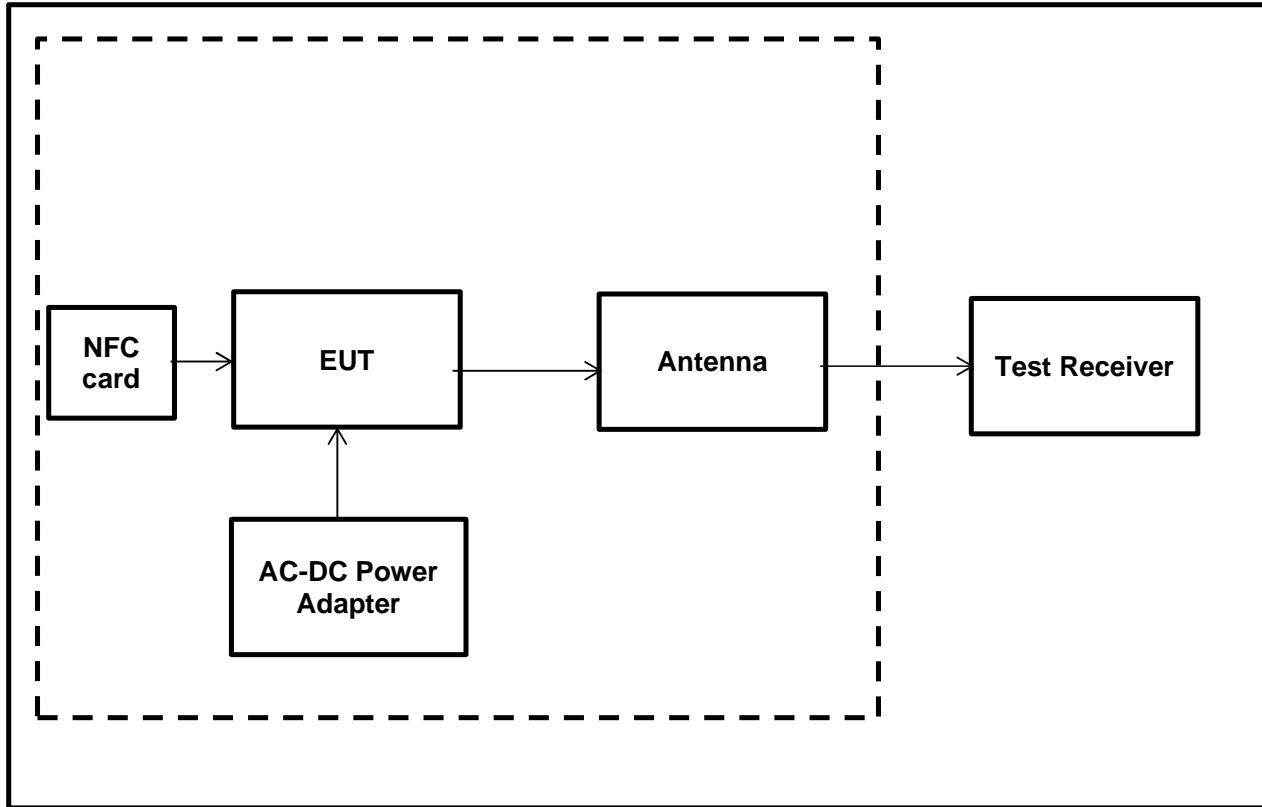
Temperature (°C):	27.1
Relative Humidity (%):	26.7

Settings of the Instrument:

RBW/VBW	3 kHz / 10 kHz
Span	40 kHz
Sweep time	Auto
Detector	MaxPeak

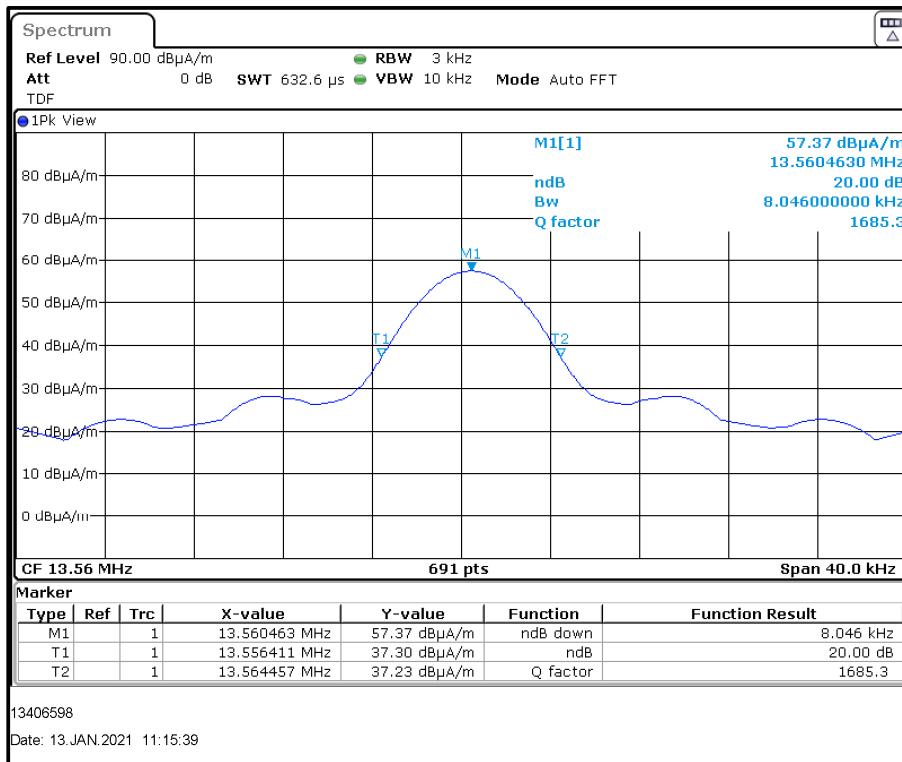
Notes:

1. In response to an FCC inquiry; reasonable deviations to test method ANSI C63.10 Section 6.9.2 were made to satisfy following requirements:
 - a. Larger values of RBW than those mentioned in ANSI C63.10 Section 6.9.2
 - b. Frequency span wide enough to capture all side bands of the signal
2. The n dB down function of the spectrum analyzer was set to 20 dB.
3. The emission shown on 20 dB Bandwidth plots show the single NFC channel at the frequency 13.56 MHz is the fundamental emission.

Test Setup:**Transmitter 20 dB Bandwidth (continued)**

Transmitter 20 dB Bandwidth (continued)**Results: Power Supply / NFC 13.56 MHz**

NFC Channel	20 dB Bandwidth (kHz)
13.56 MHz	8.046

**NFC 13.56 MHz****Result: Pass**

5.2.3. Transmitter Fundamental Field Strength**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	19 November 2020
Test Sample Serial Number:	16 T 0385429 46/20		
Test Site Identification	SR 1/2		

FCC Reference:	Part 15.225(a)(b)(c)(d)
Test Method Used:	ANSI C63.10 Section 6.4

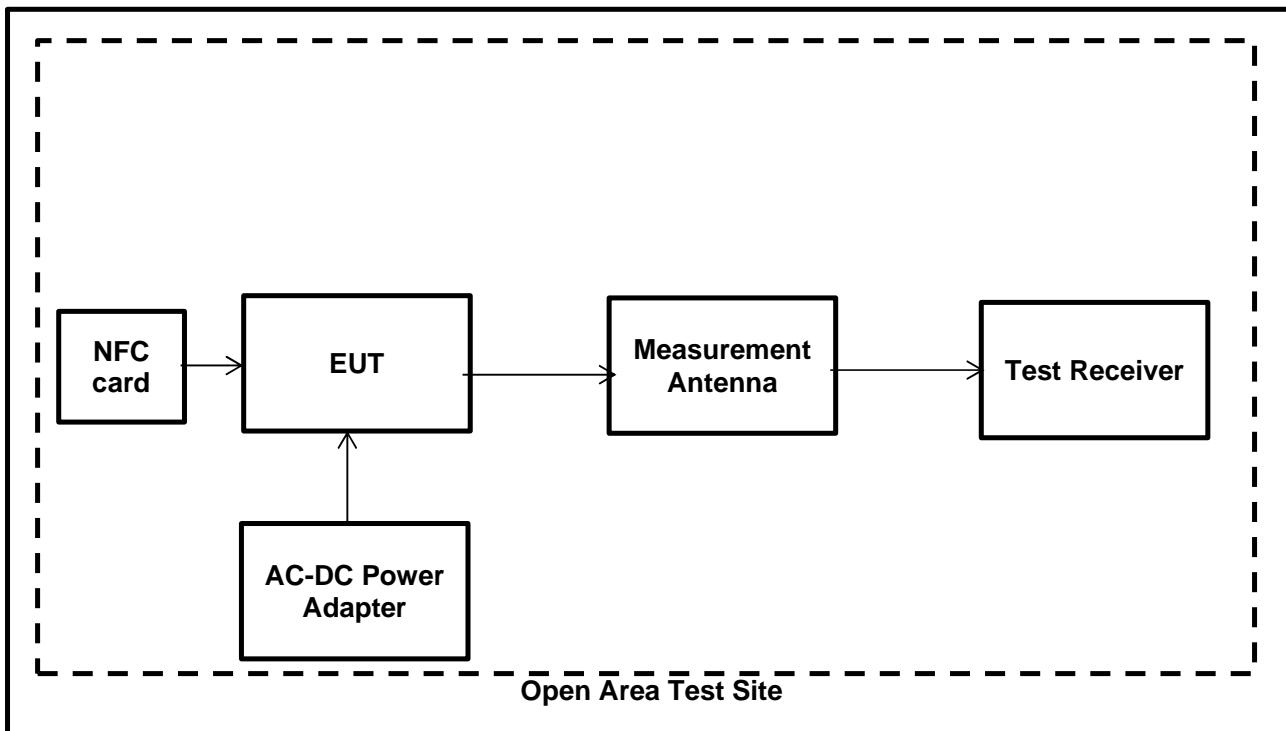
Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	36

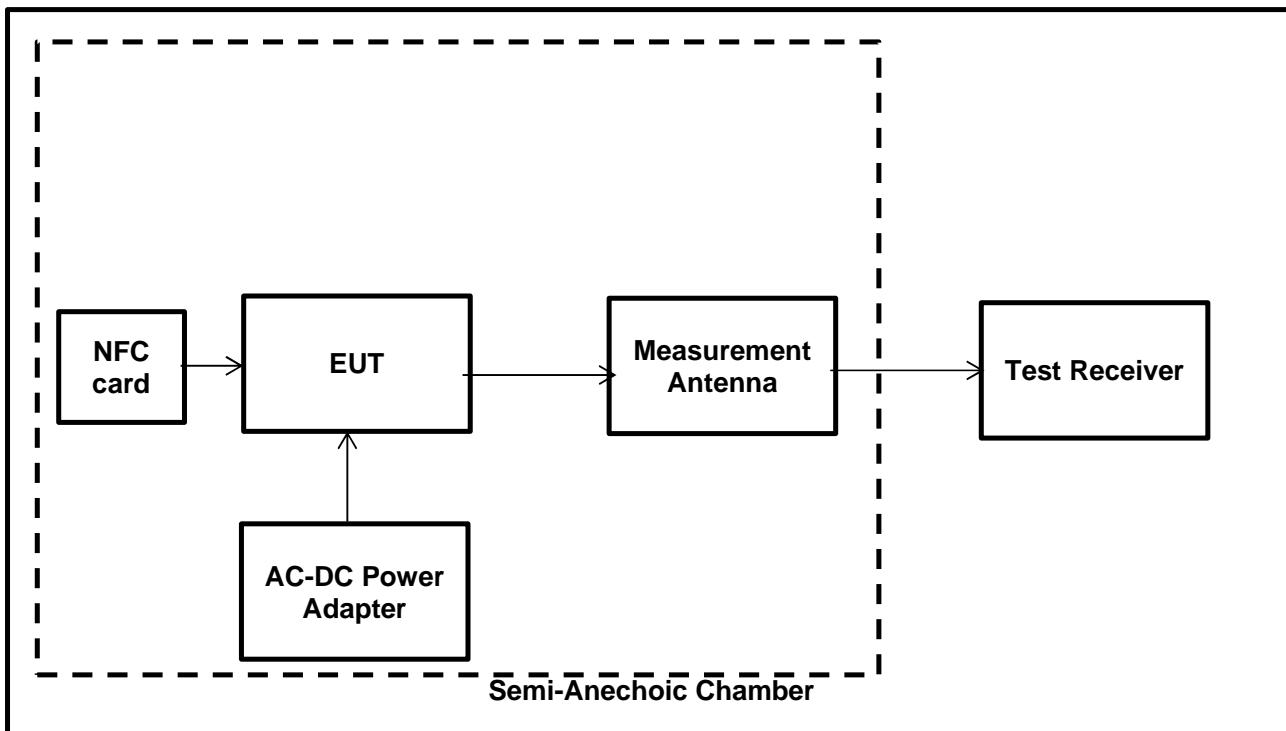
Note(s):

1. The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
2. In accordance with 414788 D01 Radiated Test Site v01 an alternative Test Site was used. Instead of an OATS a Semi Anechoic Chamber was used where evidence was shown that the behaviour is the same. A maximum deviation of 1.38 dB for 13.56 MHz could be determined. This deviation is also taken into account to the result.
3. The measurement was performed at a measurement distance of 3 m. This value was later extrapolated to a distance of 30 m by subtracting 40 dB from the result.
4. Pre-scan measurements were performed using a spectrum analyser with a peak detector and measurement bandwidth of 10 kHz. The fundamental field strength was maximized by rotating the measurement antenna and EUT. The spectrum analyser was then switched to test receiver mode and the final measurement on the maximized level was performed. In accordance with ANSI C63.10 Clause 4.1.4.2.1 a quasi-peak detector was used in conjunction with a measurement bandwidth of 9 kHz and 0.2 second sweep time.
5. Compliance with the spectrum mask is shown by final measurements performed in a semi-anechoic chamber. For the field strength measurements in a semi-anechoic chamber, a transducer factor on the measuring instrument was used to extrapolate the results at 3 m to a distance of 30 m. A distance extrapolation factor of 40 dB was used.
6. A transducer factor was used on the spectrum analyser during measurement. This factor includes correction between the fixed gain of the magnetic loop antenna and the calibration values. It also includes the value of the RF cable used to connect the antenna to the spectrum analyser which was incorporated into the annual calibration of the magnetic loop antenna.

Transmitter Fundamental Field Strength(continued)
Open Area Test Site

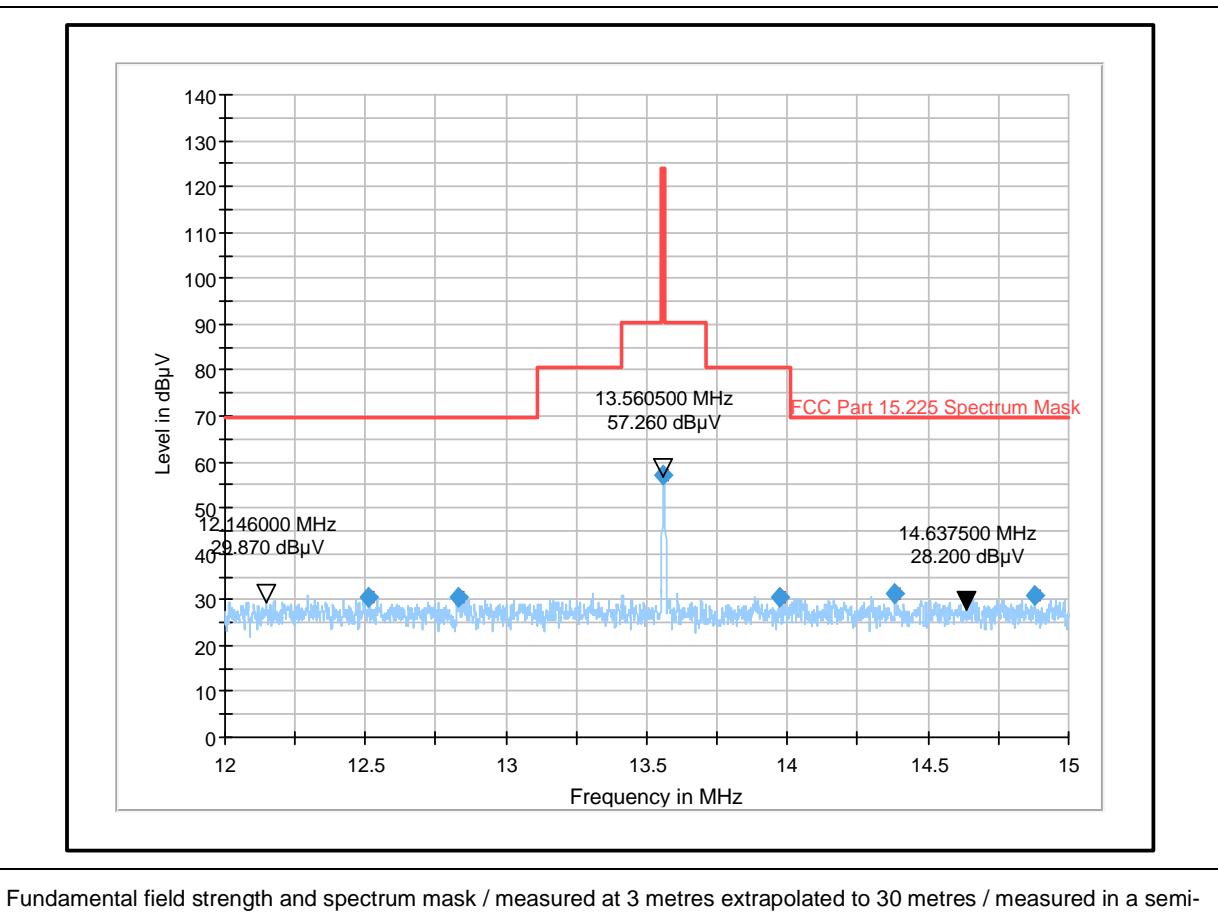


Semi Anechoic Chamber



Transmitter Fundamental Field Strength(continued)**Results: AC-DC Power supply / NFC 13.56 MHz**

Frequency (MHz)	Loop Antenna Orientation	Level at 3 m (dB μ V/m)	Level at 30 m (dB μ V/m)	Deviation from OATS to SAC	Level at 30 m (dB μ V/m) with deviation added	Limit at 30 m (dB μ V/m)	Margin (dB)	Result
13.56	90° to EUT	57.26	17.26	1.38	18.64	84.0	65.36	Complied

Result: Pass

5.2.4. Transmitter Radiated Spurious Emissions

Test Summary:

Test Engineer:	Sercan Usta	Test Date:	19 November 2020
Test Sample Serial Number:	16 T 0385429 46/20		
Test Site Identification	SR 1/2		

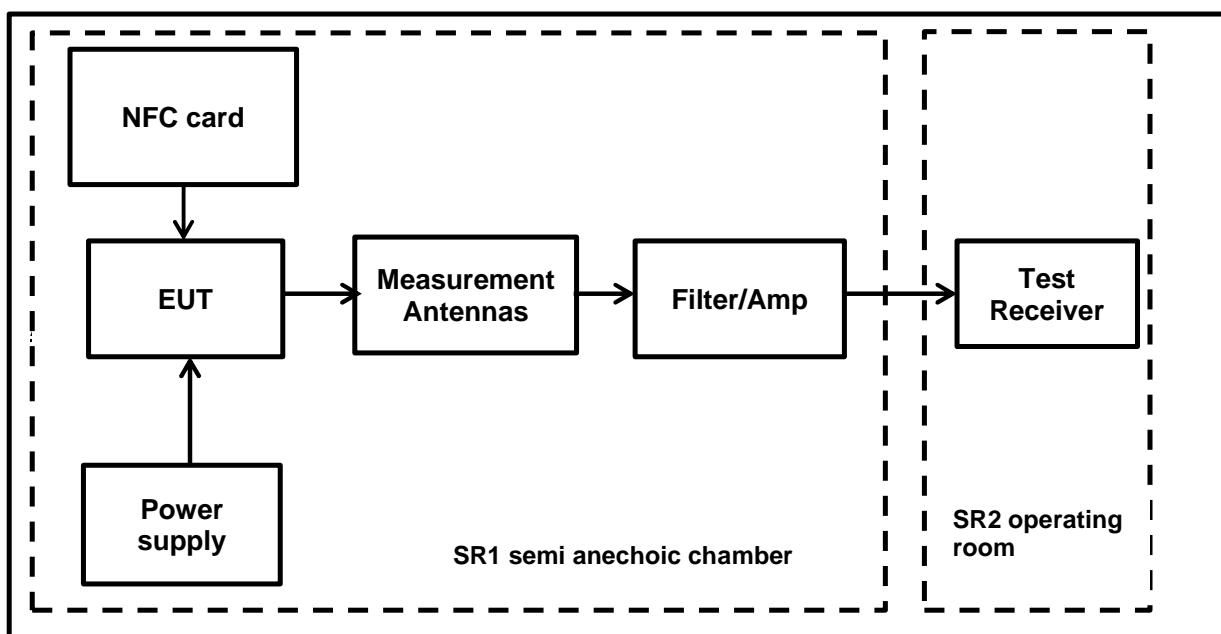
FCC Reference:	Parts 15.225(d) & 15.209(a)
Test Method Used:	ANSI C63.10:2013 Sections 6.3 and 6.4
Frequency Range:	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	22.2
Relative Humidity (%):	40.3

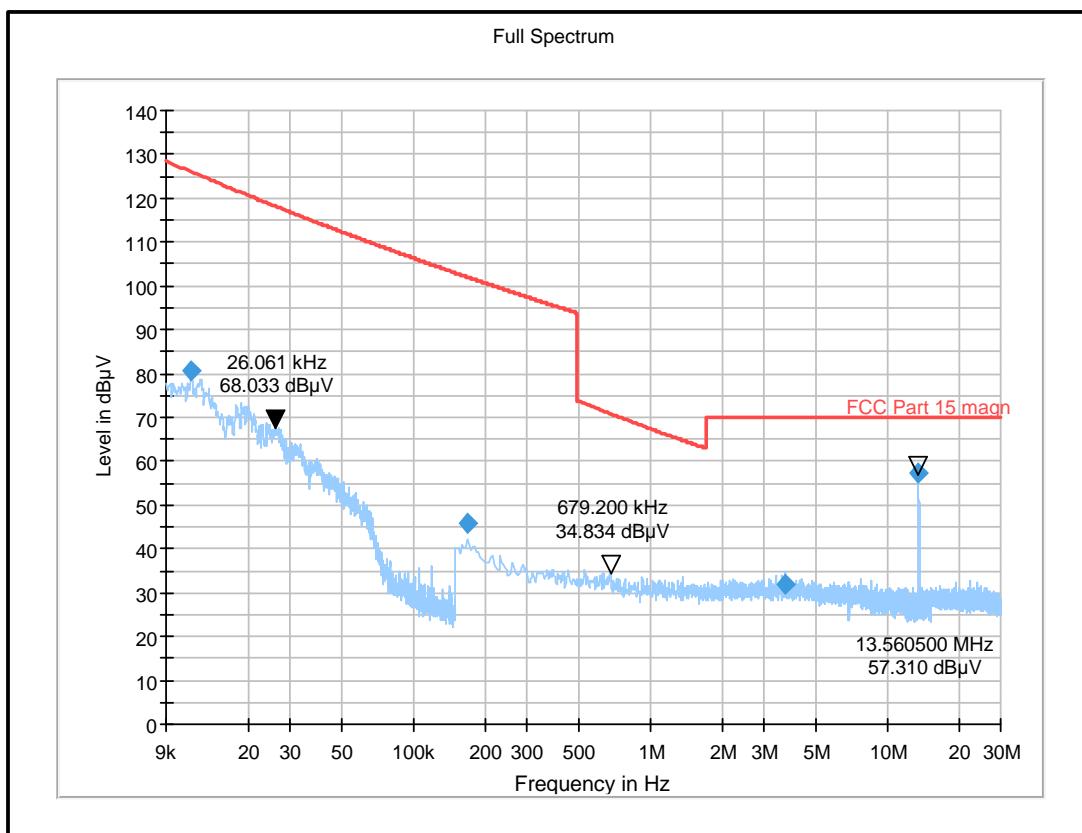
Note(s):

1. In accordance with FCC KDB 414788, an alternative test site may be used for the measurement below 30 MHz (The OATS / SAC comparison data is available upon request). Therefore the result from the semi-anechoic chamber tests is shown in this section of the test report.
2. The limits are specified at a test distance of 30 m & 300 m. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor.
3. Therefore the limit values are extrapolated to a measurement distance of 3 m where field strength of X dB μ V/m was measured.
 - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m adding 80 dB at 40 dB /decade.
 - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB at 40 dB /decade.
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
5. All emissions shown on the pre-scan plots were investigated and found to be ambient or > 20 dB below the appropriate limit.
6. Measurements below 30 MHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The measurement loop antenna height was 1 m.
7. Pre-scans were performed and markers placed on the highest measured levels. The test receiver was set to:
 - Frequency range: 9 kHz-150 kHz : RBW: 300 Hz /VBW: 1 kHz
 - Frequency range: 150 kHz – 30 MHz: RBW: 10 kHz /VBW: 30 kHz
 - Detector: Max-Peak detector
 - Trace Mode: Max Hold
8. Final measurements were performed on the marker frequencies and the results entered into the table below.
9. The emissions shown at frequencies approximately 13.56 MHz on the 9 kHz to 30 MHz plots are the EUT NFC 13.56 MHz fundamental for the tested channel.

Transmitter Radiated Spurious Emission test setup**Test Setup:**

Transmitter Radiated Emissions (continued)**Results: AC-DC Power supply / NFC 13.56 MHz**

Frequency (MHz)	Loop Antenna Orientation	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
0.01	0° to EUT	80.76	126.01	45.25	Complied
0.17	90° to EUT	45.75	101.96	56.21	Complied
3.68	0° to EUT	31.97	70.00	38.03	Complied

**Result: Pass**

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	19 November 2020
Test Sample Serial Number:	16 T 0385429 46/20		
Test Site Identification	SR 1/2		

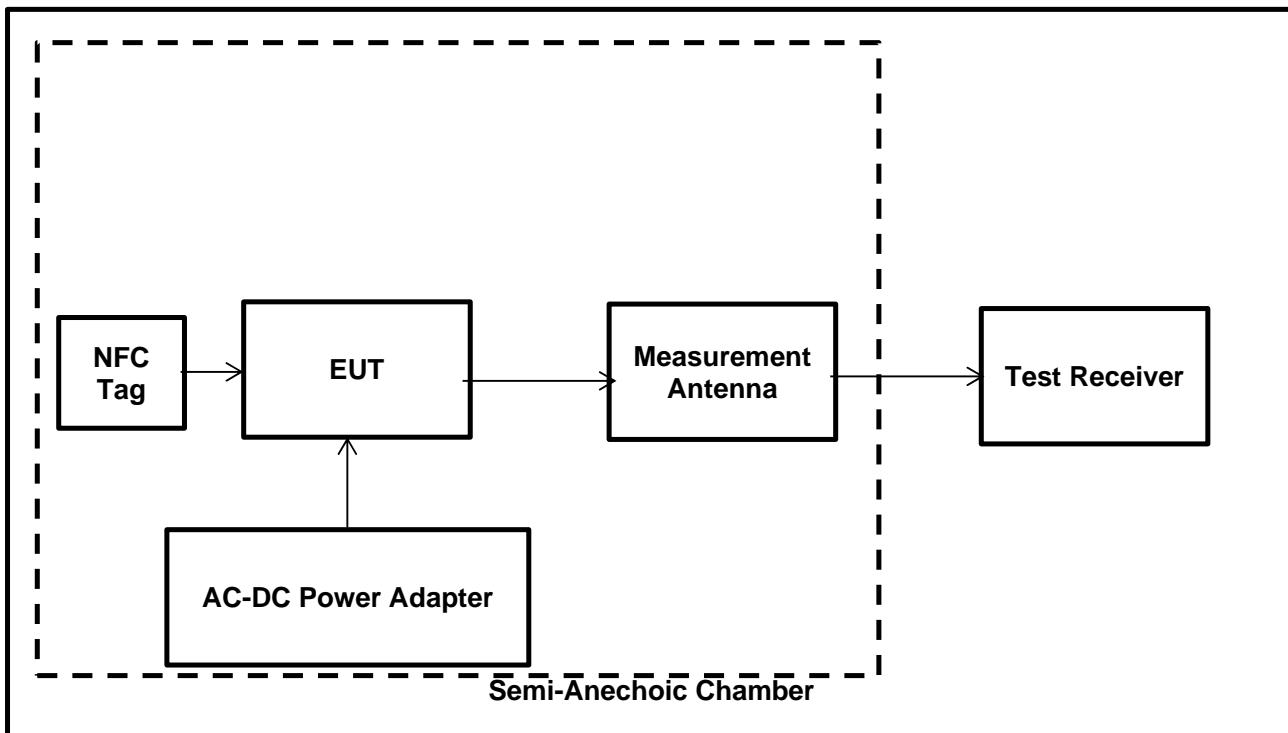
FCC Reference:	Parts 15.225(d) & 15.209(a)
Test Method Used:	ANSI C63.10:2013 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	22.2
Relative Humidity (%):	40.3

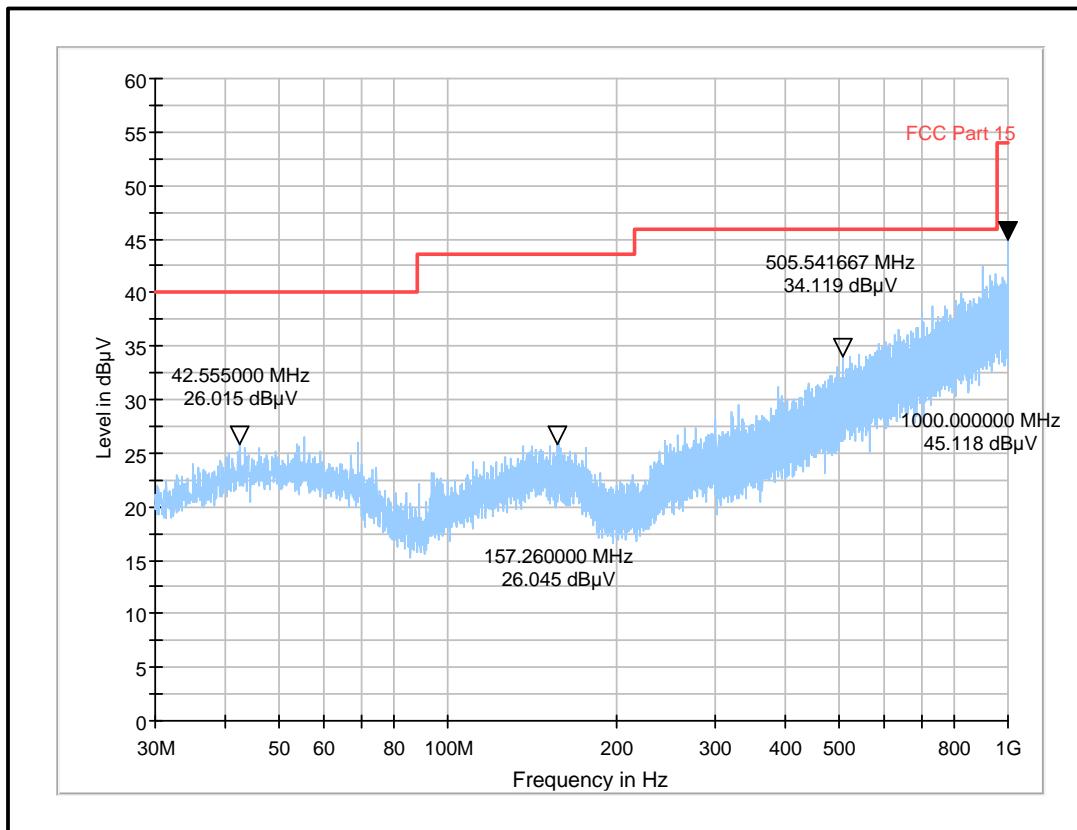
Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the appropriate limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
4. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
5. Final measurements were performed on the marker frequencies and the results entered into the table below.

Transmitter Radiated Spurious Emission test setup**Test setup:**

Transmitter Radiated Emissions (continued)**Results: AC-DC Power supply / NFC 13.56 MHz**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No critical spurious emissions were found					

**Result: Pass**

5.2.5. Transmitter Frequency Stability (Temperature & Voltage Variation)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	04 November 2020
Test Sample Serial Number:	16 T 0385429 46/20		
Test Site Identification	SR 9		

FCC Reference:	Part 15.225(e)
Test Method Used:	ANSI C63.10 Sections 6.8.1 and 6.8.2

Environmental Conditions:

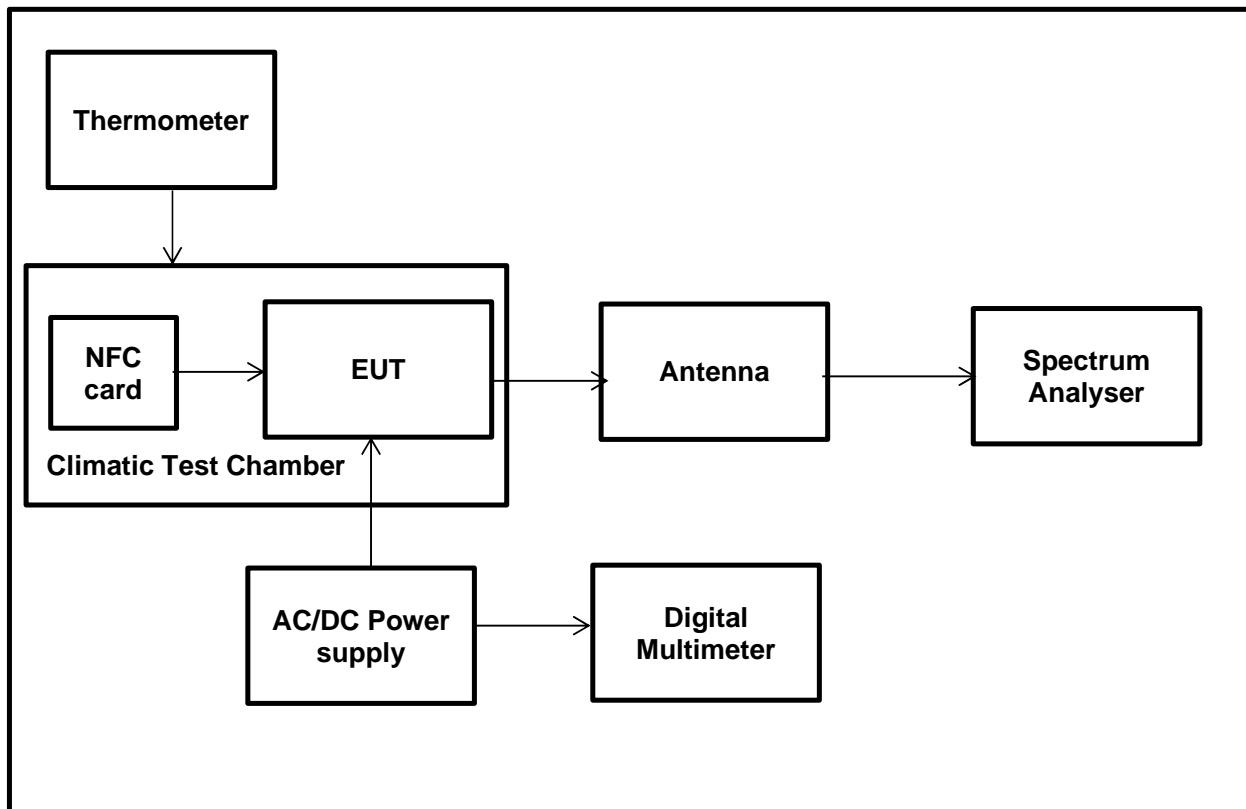
Ambient Temperature (°C):	23
Ambient Relative Humidity (%):	29

Settings of the Instrument

RBW/VBW	30 Hz/30 kHz
Span	4 kHz
Sweep Time	Auto
Sweep Mode	Single Sweep
Detector	Peak
Marker Function	Signal Count

Note(s):

1. The EUT was kept inside the environmental/climatic test chamber. The tests were performed with extreme temperature & extreme voltage variations.
2. The temperature variations were monitored throughout the tests using a calibrated digital thermometer. The voltage variations were monitored throughout the tests using a calibrated digital multimeter.
3. For accurate measurement of frequency deviations, Signal Count / frequency counter function was activated on the spectrum analyser.
4. The applicant's declared operating frequency 13.560 MHz was used as reference frequency.
5. The difference between operating /reference frequency & measured frequency was reported as a frequency error.
6. The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ or 100 ppm of the operating frequency

Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)**Test Setup: Frequency Stability Tests - Temperature & Voltage Variations**

Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)**Results: Power supply / NFC 13.56 MHz / Temperature Variations**

Extreme Temperature (°C)	Time after EUT Power-up	Measured Frequency (MHz)	Frequency Error		Frequency Error Limits		Result
			%	ppm	%	ppm	
-20	at 0 minutes	13.560476137	0.003511	35.11	± 0.01	± 100	Complied
	at 2 minutes	13.560480967	0.003547	35.47	± 0.01	± 100	Complied
	at 5 minutes	13.560482621	0.003559	35.59	± 0.01	± 100	Complied
	at 10 minutes	13.560482304	0.003557	35.57	± 0.01	± 100	Complied
-10	at 0 minutes	13.560504756	0.003722	37.22	± 0.01	± 100	Complied
	at 2 minutes	13.560504655	0.003722	37.22	± 0.01	± 100	Complied
	at 5 minutes	13.560503973	0.003717	37.17	± 0.01	± 100	Complied
	at 10 minutes	13.560503119	0.003710	37.10	± 0.01	± 100	Complied
0	at 0 minutes	13.560499263	0.003682	36.82	± 0.01	± 100	Complied
	at 2 minutes	13.560498464	0.003676	36.76	± 0.01	± 100	Complied
	at 5 minutes	13.560499724	0.003685	36.85	± 0.01	± 100	Complied
	at 10 minutes	13.560500775	0.003693	36.93	± 0.01	± 100	Complied
+10	at 0 minutes	13.560488649	0.003604	36.04	± 0.01	± 100	Complied
	at 2 minutes	13.560488833	0.003605	36.05	± 0.01	± 100	Complied
	at 5 minutes	13.560489499	0.003610	36.10	± 0.01	± 100	Complied
	at 10 minutes	13.560488798	0.003605	36.05	± 0.01	± 100	Complied
+20	at 0 minutes	13.560450563	0.003323	33.23	± 0.01	± 100	Complied
	at 2 minutes	13.560447891	0.003303	33.03	± 0.01	± 100	Complied
	at 5 minutes	13.560447003	0.003296	32.96	± 0.01	± 100	Complied
	at 10 minutes	13.560446279	0.003291	32.91	± 0.01	± 100	Complied
+30	at 0 minutes	13.560455206	0.003357	33.57	± 0.01	± 100	Complied
	at 2 minutes	13.560449086	0.003312	33.12	± 0.01	± 100	Complied
	at 5 minutes	13.560444274	0.003276	32.76	± 0.01	± 100	Complied
	at 10 minutes	13.560441850	0.003258	32.58	± 0.01	± 100	Complied
+40	at 0 minutes	13.560446498	0.003293	32.93	± 0.01	± 100	Complied
	at 2 minutes	13.560436777	0.003221	32.21	± 0.01	± 100	Complied
	at 5 minutes	13.560430091	0.003172	31.72	± 0.01	± 100	Complied
	at 10 minutes	13.560429470	0.003167	31.67	± 0.01	± 100	Complied
+50	at 0 minutes	13.560429156	0.003165	31.65	± 0.01	± 100	Complied
	at 2 minutes	13.560427600	0.003153	31.53	± 0.01	± 100	Complied
	at 5 minutes	13.560428733	0.003162	31.62	± 0.01	± 100	Complied
	at 10 minutes	13.560430995	0.003178	31.78	± 0.01	± 100	Complied

Transmitter Frequency Stability (Temperature & Voltage Variation) (continued)**Results: Power supply / NFC 13.56 MHz / Temperature Variations**

+60	at 0 minutes	13.560434496	0.003204	32.04	± 0.01	± 100	Complied
	at 2 minutes	13.560442931	0.003266	32.66	± 0.01	± 100	Complied
	at 5 minutes	13.560453601	0.003345	33.45	± 0.01	± 100	Complied
	at 10 minutes	13.560459582	0.003389	33.89	± 0.01	± 100	Complied
+70	at 0 minutes	13.560518196	0.003822	38.22	± 0.01	± 100	Complied
	at 2 minutes	13.560522787	0.003855	38.55	± 0.01	± 100	Complied
	at 5 minutes	13.560526188	0.003880	38.80	± 0.01	± 100	Complied
	at 10 minutes	13.560529131	0.003902	39.02	± 0.01	± 100	Complied

Result: Pass**Results: Power supply / NFC 13.56 MHz / Voltage Variations**

Extreme Voltage Conditions	Extreme AC Voltage (V)	Measured Frequency (MHz)	Frequency Error		Frequency Error Limits		Result
			%	ppm	%	ppm	
85% of Rated Voltage	102	13.560446461	0.003292	32.92	± 0.01	± 100	Complied
Rated Voltage	120	13.560445713	0.003287	32.87	± 0.01	± 100	Complied
115% of Rated Voltage	138	13.560445671	0.003287	32.87	± 0.01	± 100	Complied

Result: Pass

6. Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	95%	±2.49 dB
20 dB Bandwidth	95%	±0.87 %
Transmitter Fundamental Field Strength	95%	±3.10 dB
Radiated Spurious Emissions	95%	±3.10 dB
Frequency Stability	95%	±92 Hz

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Used equipment

Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	10/07/2020	36
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	02/09/2020	24
460	Deisl	Turntable	DT 4250 S	n/a	n/a	n/a
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	07/07/2020	12
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	01	lab verification	n/a
1603665	Siemens Matsushita Components	semi-anechoic chamber SR1/ 2		B83117-A1421-T161	n/a	n/a

Test site: SR 7/8

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
23	Rohde & Schwarz	Artificial Mains Network	ESH3-Z5	831767/013	07/07/2020	12
349	Rohde & Schwarz	Receiver, EMI Test	ESIB7	836697/009	07/09/2020	12
-/-	Testo	Thermo-Hygrometer	608-H1	08	lab verification	n/a
327	SPS	AC/DC power distribution system	PAS 5000	A2464 00/1 0200	lab verification	n/a

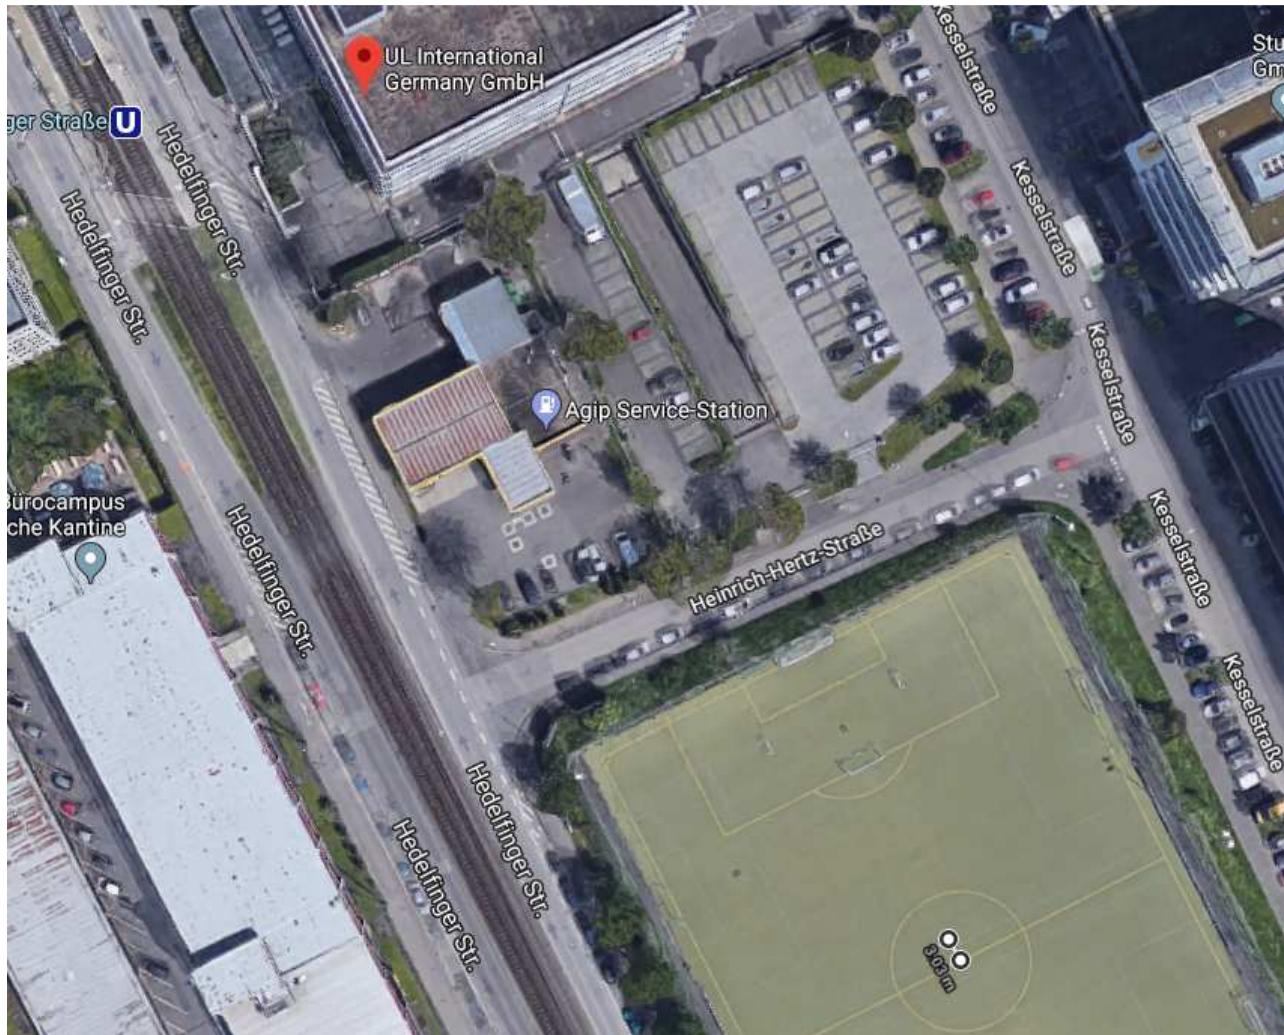
Test site: SR 9

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
621	Ahlborn-Almemo	Temperatur-/ Feuchtemessgerät	MA2470-S2	H16080099	07/07/2020	12
637	Rohde & Schwarz	Spectrum Analyzer	FSV40	101587	08/07/2020	12
645	Weiss Umwelttechnik	Climatic Chamber	LabEvent T/110/70/3	5822619794 0010	lab verification	n/a
625	Schwarzbeck	Antenna, H-field	HFSL 7101	109	lab verification only relative measurements	n/a
-/-	Conrad Electronic	Laboratory Power supply	PS-2403D	-/-	lab verification	n/a
-/-	Fluke	Multimeter	15B+	-/-	lab verification	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	07	lab verification	n/a
1603668	Siemens Matsushita Components	shielded room	-/-	B83117-B1422-T161	n/a	n/a

8. Open-Area-Test Site comparison

GPS coordinates

Latitude: 48.765746, Longitude: 9.250684



Open-Area-Test Site comparison (continued)

The following listed equipment was used for the measurement:

Manufacturer	Type	Model	Frequency Range
Rohde & Schwarz	Signal generator	SML03	9 kHz – 30 MHz
Rohde & Schwarz	Receiver, EMI Test	ESIB7	20 Hz – 7 GHz
Rohde & Schwarz	Antenna, Loop	HFH2-Z2	1 kHz – 30 MHz
ETS LINDGREN	Antenna, Loop	6512	1 kHz – 30 MHz
HUBER+SUHNER	RF Cable	-/-	-/-
Elspec	BNC Cable	-/-	-/-

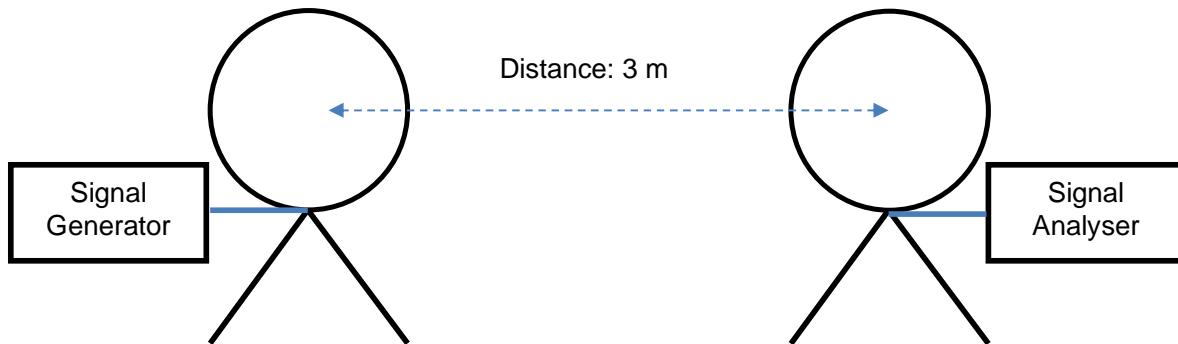
The transmit signal to the ETS Lindgren loop antenna is supplied by the SML signal generator.

The distance of the transmit and receive antenna was 3 m. No other distances can be achieved in SR1 so 10 m and 30 m distances are not possible. Due to this no comparison is possible.

The Results are valid for equipment which is not larger as the loop antenna which represents in the comparison the EUT.

If an EUT is bigger measurements on an OATS are needed.

The measurement was performed on the lowest frequency 9 kHz and was increased by 10 kHz Steps up to 100 kHz. Then the step size was 100 kHz up to 1000 kHz. From 1 MHz up to the last frequency of 30 MHz the step size was 1 MHz. The HFH2-Z2 loop antenna placed at 80 cm height was used as the receive antenna. The intercepted RF signal from this antenna was measured with the ESIB7 Test Receiver and the values were recorded accordingly.



Open-Area-Test Site comparison (continued)

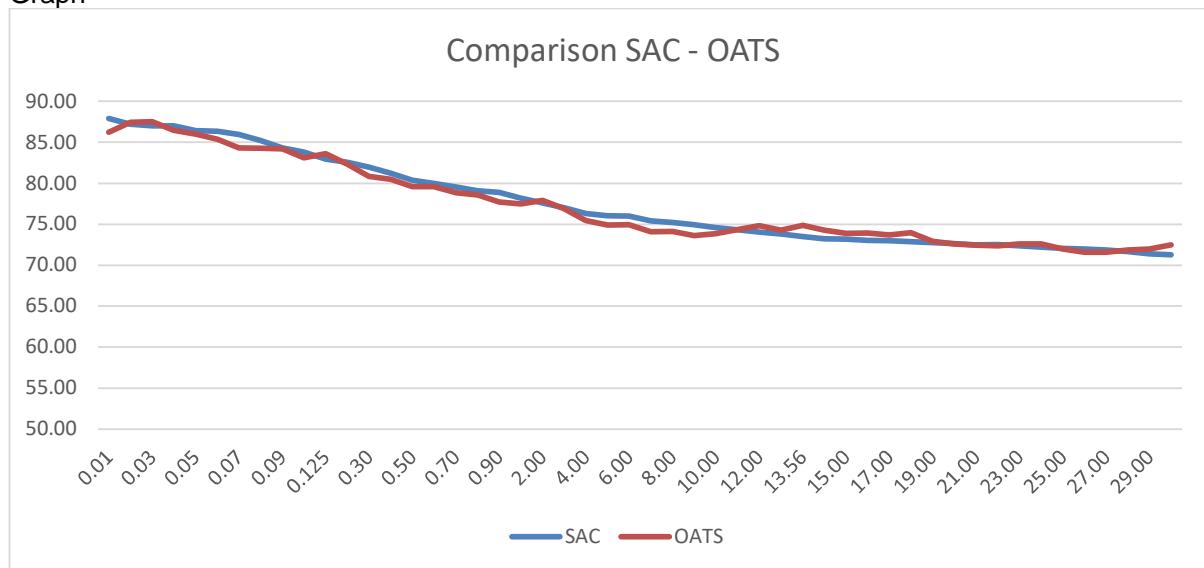
Numeric values:

Frequency (MHz)	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.125	0.20
SR1 Measured power (dB μ V)	87.91	87.22	87.01	86.98	86.40	86.32	85.98	85.20	84.30	83.80	82.96	82.55
OATS Measured power (dB μ V)	86.22	87.42	87.50	86.49	86.01	85.39	84.32	84.29	84.20	83.10	83.60	82.32
Delta (dB)	-1.69	0.20	0.49	-0.49	-0.39	-0.93	-1.66	-0.91	-0.10	-0.70	0.64	-0.23

Frequency (MHz)	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	2.00	3.00	4.00	5.00
SR1 Measured power (dB μ V)	81.98	81.23	80.39	80.00	79.53	79.10	78.87	78.20	77.60	77.01	76.32	76.04
OATS Measured power (dB μ V)	80.84	80.49	79.58	79.58	78.85	78.59	77.69	77.50	77.91	76.90	75.45	74.90
Delta (dB)	-1.14	-0.74	-0.81	-0.42	-0.68	-0.51	-1.18	-0.70	0.31	-0.11	-0.87	-1.14

Frequency (MHz)	6.00	7.00	8.00	9.00	10.00	11.00	12.00	13.00	13.56	14.00	15.00	16.00
SR1 Measured power (dB μ V)	75.98	75.43	75.20	74.97	74.59	74.32	74.05	73.83	73.50	73.22	73.20	73.05
OATS Measured power (dB μ V)	74.94	74.09	74.11	73.58	73.87	74.38	74.84	74.31	74.88	74.29	73.90	73.93
Delta (dB)	-1.04	-1.34	-1.09	-1.39	-0.72	0.06	0.79	0.48	1.38	1.07	0.70	0.88

Frequency (MHz)	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00	26.00	27.00	28.00	29.00	30.00
SR1 Measured power (dB μ V)	73.00	72.86	72.74	72.64	72.50	72.52	72.39	72.20	72.04	71.97	71.86	71.64	71.41	71.27
OATS Measured power (dB μ V)	73.70	73.98	72.90	72.60	72.45	72.34	72.59	72.59	71.97	71.59	71.58	71.88	71.98	72.49
Delta (dB)	0.70	1.12	0.16	-0.04	-0.05	-0.18	0.20	0.39	-0.07	-0.38	-0.28	0.24	0.57	1.22

Open-Area-Test Site comparison (continued)**Graph**

Conclusion: Maximum difference is 1.69 dB @ 9 kHz

9. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	39	-	Initial Version
Test Report Version 1.1 supersedes Version 1.0 with immediate effect			
Test Report No. UL-RPT-RP-13406598-416-FCC Version 1.0, Issue Date 11 January 2021, which is no longer valid.			
1.1	as below	as below	
	7	3	EUT listing format changed
	9	4.2	Note 4.2 wording updated
	12, 18, 21, 24, 30	5.2.1	Test set up diagram updated
	11	5.2.1	Note 2 wording updated
	11	5.2.1	Note added
	34	7	Used equipment list updated.