



MEASUREMENT REPORT
FCC Part 15C

Applicant Name:
ClearTrac Technologies, LLC
730 Quail Hollow Drive
Elizabethton, CO 37643
United States

Date of Testing:
7/31/2020 to 8/20/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2009170149-02.2AVN9

FCC ID:	2AVN910633
APPLICANT:	ClearTrac Technologies, LLC

Application Type: Certification
EUT Type: Wireless Base Charger
Model: Base-001
Operating Frequency: 131.3kHz
FCC Rule Part(s): FCC Part 15 Subpart C (15.209)
FCC Classification: Part 15 Low Power Transmitter Below 1705kHz (DCD)
Test Procedure: ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President



FCC ID: 2AVN910633	 PCTEST® Proud to be part of 		FCC Pt. 15C MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 1 of 21

T A B L E O F C O N T E N T S

1.0	Introduction	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Test Configuration	4
2.3	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS.....	5
3.1	Evaluation Procedure	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	SAMPLE CALCULATIONS	7
4.1	Conducted Emission Measurement Sample Calculation	7
4.2	Radiated Emission Measurement Sample Calculation	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	Test Support Equipment	10
7.3	Radiated Measurement Data.....	11
7.4	Line Conducted Measurement Data	18
8.0	CONCLUSION	21

FCC ID: 2AVN910633	 Proud to be part of 	FCC Pt. 15C MEASUREMENT REPORT	
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger	Approved by: Quality Manager Page 2 of 21

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS)."
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: 2AVN910633	 PCTEST [®] Proud to be part of element			FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger				Page 3 of 21

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **ClearTrac Technologies, LLC Wireless Base Charger** **FCC ID: 2AVN910633**. The test data contained in this report pertains only to the emissions due to the digital circuitry of the EUT.

Test Device Serial No.: 00009


2.2 Test Configuration

The ClearTrac Wireless Base Charging System FCC ID: 2AVN910633 is a power transfer device, capable of charging 4 Urine Flow Devices (FCC ID: 2AVN910632) at the same time. It was connected to a 120VAC power source. Four modified wireless power receiver handsets (dummy loads) were used for testing with the base charging system. The Four modified wireless power receiver handsets were compliant with the WPC charging protocol. Output power of the Base charging system is 1W in WPC mode.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.10-2013. For more information please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2AVN910633	 PCTEST® Proud to be part of  FCC Pt. 15C MEASUREMENT REPORT			 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of radiated and conducted emissions from the ClearTrac Wireless Base Charging System FCC ID: 2AVN910633.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.4. EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: 2AVN910633	PCTEST [®] Proud to be part of element		FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 5 of 21

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT			 Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger	Page 6 of 21	

4.0 SAMPLE CALCULATIONS

4.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

Class B limit	= 60.0 dB μ V (Quasi-peak limit)
Reading	= - 57.8 dBm (calibrated quasi-peak level)
Convert to dB μ V	= - 57.8 + 107 = 49.2 dB μ V
Margin	= 49.2 - 60.0 = - 10.8 dB
	= 10.8 dB below limit

4.2 Radiated Emission Measurement Sample Calculation

@ 66.7 MHz

Class B limit	= 100 μ V/m = 40.0 dB μ V/m
Reading	= - 76.0 dBm (calibrated level)
Convert to dB μ V	= - 76.0 + 107 = 31.0 dB μ V
Antenna Factor + Cable Loss	= 5.8 dB/m
Total	= 36.8 dB μ V/m
Margin	= 36.8 - 40.0 = - 3.2 dB
	= 3.2 dB below limit

Note:

Level [dB μ V] = $20 \log_{10}$ (Level [μ V/m])

Level [dB μ V] = Level [dBm] + 107

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT				Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 7 of 21

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07

FCC ID: 2AVN910633	 PCTEST[®] Proud to be part of element		FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 8 of 21

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	8/4/2020	Annual	8/4/2021	US46470561
Com-Power	AL-130R	9kHz - 30MHz Loop Antenna	8/22/2019	Biennial	8/22/2021	121085
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/9/2020	Annual	1/9/2021	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	10/1/2019	Biennial	10/1/2021	0310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT			Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger	Page 9 of 21	

7.0 TEST DATA

7.1 Summary

Test Date(s): 7/31/2020 to 8/20/2020

Test Engineer: John Reidell

FCC Part 15 Section	Description	Result
15.107	Conducted Emissions	PASS
15.109	Radiated Emissions	PASS

Table 7-1. Summary of Test Results

7.2 Test Support Equipment

Support Equipment						
XP Power Adapter	Model:	VEL24US120-US-JA	S/N:	N/A	Length:	59cm
Handset dummy load	Model:	N/A	S/N:	FIT2	Length:	N/A
Handset dummy load	Model:	N/A	S/N:	FIT14	Length:	N/A
Handset dummy load	Model:	N/A	S/N:	FIT22	Length:	N/A
Handset dummy load	Model:	N/A	S/N:	FIT31	Length:	N/A

Table 7-2. Test Support Equipment Used

Note: See test setup photographs for actual system test setup.

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT			Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger	Page 10 of 21	

7.3 Radiated Measurement Data

§15.209, ICES-003 (6.2)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and ICES-003 (6.2) must not exceed the limits shown in

Frequency [MHz]	Field Strength Limit [μ V/m]	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
> 960	500	3

Table 7-3 *per Section 15.109 and ICES-003 (6.2)*.

Frequency [MHz]	Field Strength Limit [μ V/m]	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
> 960	500	3

Table 7-3. 3-Meter Radiated Limits (Section 15.109)

Test Procedures Used

ANSI C63.10-2013

Test Settings

FCC ID: 2AVN910633	 PCTEST® Proud to be part of 		FCC Pt. 15C MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 11 of 21

Quasi-Peak Field Strength Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. Per the CISPR 16-1-1 standard, the RBW's are as follows:
 - 9kHz – 150kHz (Band A): 200Hz
 - 150kHz – 30MHz (Band B): 9kHz
 - 30MHz – 1GHz (Band C): 120kHz
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2AVN910633	 PCTEST® <small>Proud to be part of element</small>			FCC Pt. 15C MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger				Page 12 of 21

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

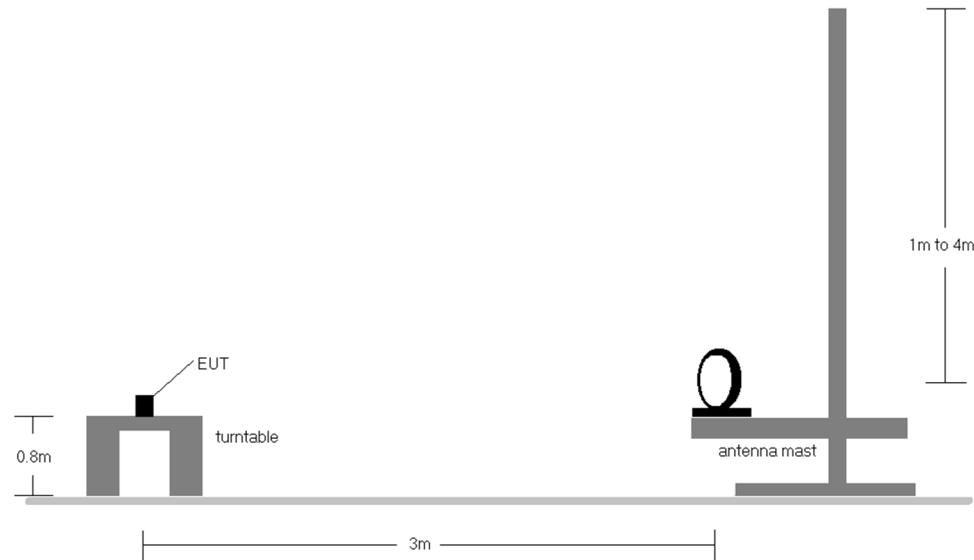


Figure 7-1. Radiated Test Setup < 30MHz

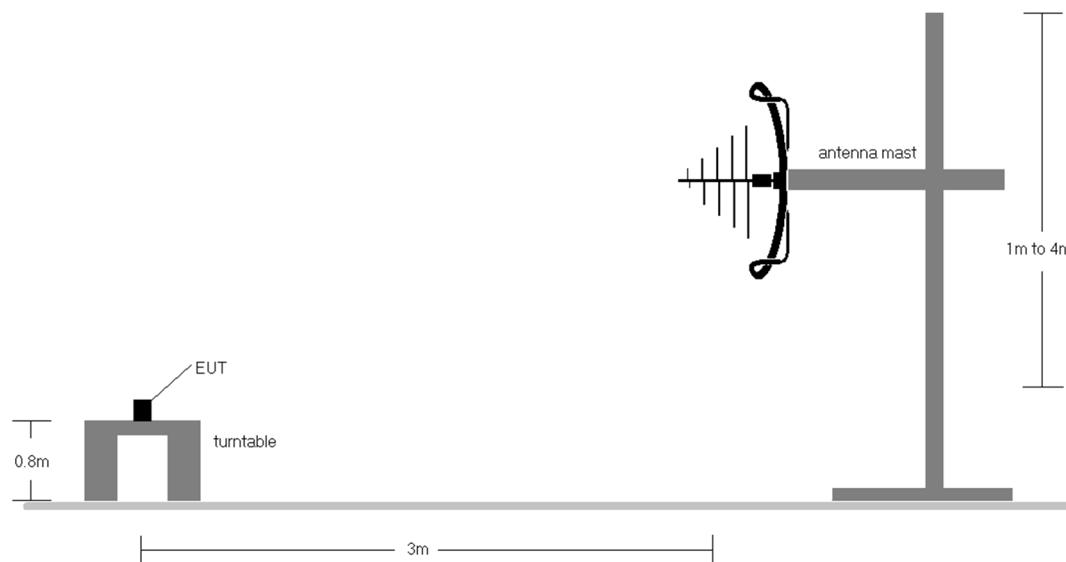


Figure 7-2. Radiated Test Setup < 1GHz

FCC ID: 2AVN910633	 PCTEST® Proud to be part of 	FCC Pt. 15C MEASUREMENT REPORT		 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 13 of 21

Sample Calculation:

- Field Strength Level [$\text{dB}\mu\text{V}/\text{m}$] = Analyzer Level [dBm] + 107 + AFCL [dB]

Notes:

- AFCL = Antenna Factor [dB] + Cable Loss [dB]


Notes:

1. All modes of operation were investigated and the worst-case emissions are reported.
2. Radiated emissions were measured from 9kHz –1GHz.
3. The radiated limits for intentional radiators are shown in Table 7-3.
4. All readings are calibrated by a signal generator with accuracy traceable to the National Institute of Standards and Technology (NIST).
5. AFCL (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
6. Level ($\text{dB}\mu\text{V}/\text{m}$) = Analyzer Reading (dBm) + AFCL (dB/m) + 107
7. Margin (dB) = Field strength ($\text{dB}\mu\text{V}/\text{m}$) – Limit ($\text{dB}\mu\text{V}/\text{m}$)
8. Radiated measurements below 30MHz were measured using a loop antenna. The antenna was positioned in three orthogonal planes (X front, Y side, Z top) and the position with the highest emission level is reported above.
9. For measurements made below 1GHz, the results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antennas was found to be less than 2:1.
10. Calibrated low-loss microwaves cables are used.
11. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. These plots were taken without using any correction factors. Any emissions found to be within 20dB of the limit (after applying the correction factor) are fully investigated and the results are shown in Table 7-3.
12. The “-“ shown in the tables below are used to denote noise floor measurements.
13. No significant emissions were found in the 90 – 110kHz restricted band.

FCC ID: 2AVN910633	 PCTEST[®] Proud to be part of element		FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac[®] TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 14 of 21

Trace: MAXH
Detector: PK


RBW: 10 kHz
VBW: 30 kHz
SWT: 1.18ms

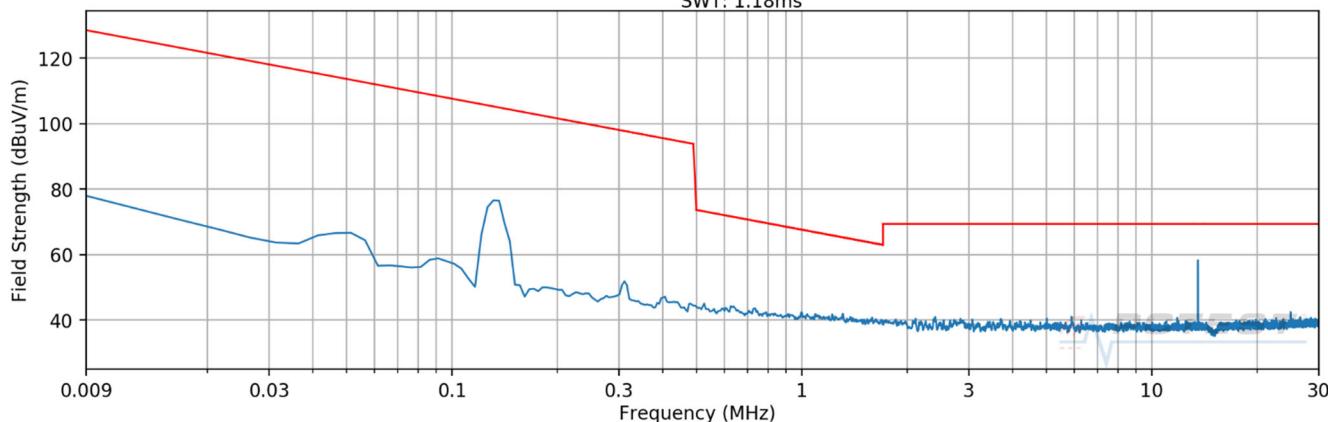

Plot 7-1. Radiated Spurious Plot from 9kHz – 30MHz (Pol. X)

Trace: MAXH
Detector: PK


RBW: 10 kHz
VBW: 30 kHz
SWT: 1.18ms

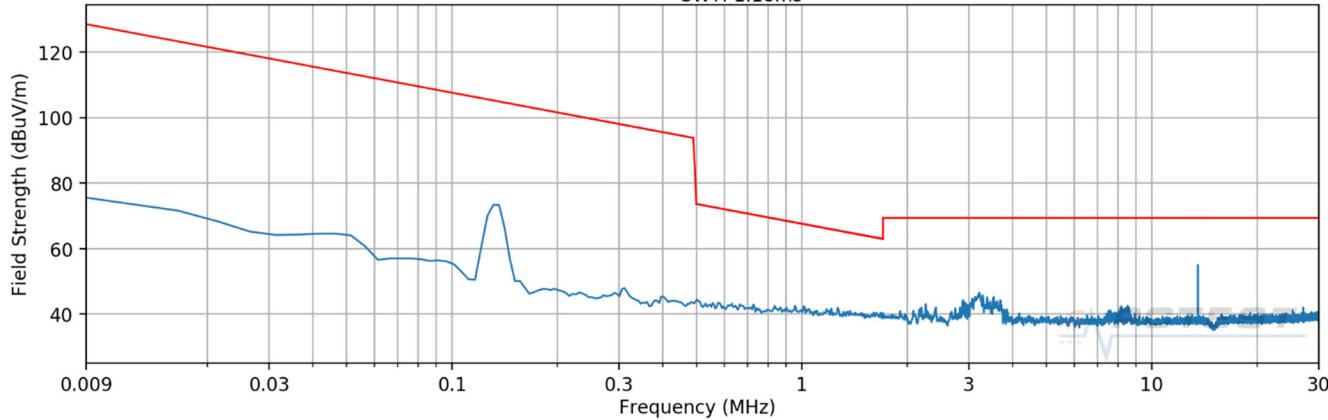

Plot 7-2. Radiated Spurious Plot from 9kHz – 30MHz (Pol. Y)

Trace: MAXH
Detector: PK

RBW: 10 kHz
VBW: 30 kHz
SWT: 1.18ms

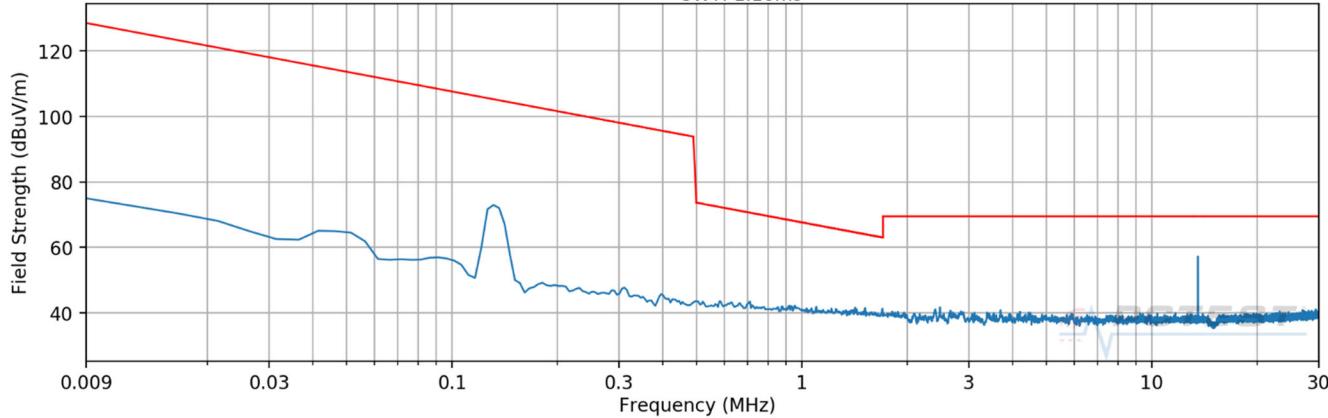


Plot 7-3. Radiated Spurious Plot from 9kHz – 30MHz (Pol. Z)


FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT			Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger		Page 15 of 21

Radiated Spurious Emissions Measurements

§15.209

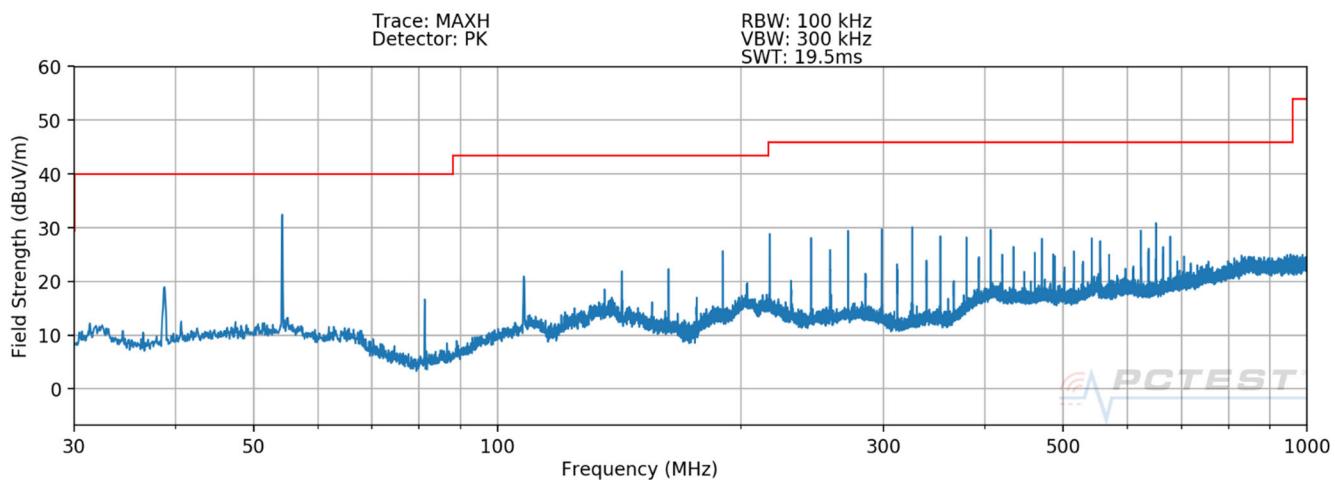

Plot 7-4. Radiated Spurious Plot above 30MHz (Pol. H)

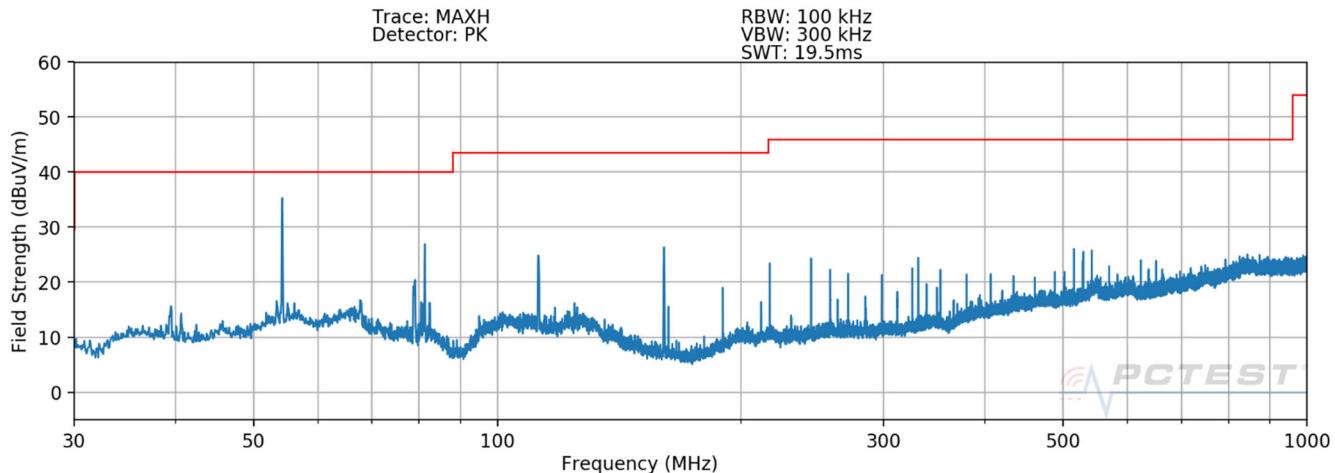

Plot 7-5. Radiated Spurious Plot above 30MHz (Pol. V)

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger	Page 16 of 21

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dB μ V/m]	Distance Correction Factor [dB]	Corrected Field Strength [dB μ V/m]	Limit [μ V/m]	Limit [dB μ V/m]	Margin [dB]
0.132	X	100	231	-50.98	20.31	76.33	-80.00	-3.67	18.25	25.23	-28.89
0.309	X	100	12	-76.62	20.23	50.61	-80.00	-29.39	7.77	17.81	-47.21
0.404	Z	100	176	-81.87	20.23	45.36	-80.00	-34.64	5.94	15.48	-50.12
2.256	Y	100	316	-85.13	20.90	42.77	-40.00	2.77	30.00	29.54	-26.77
3.231	Y	100	179	-80.74	19.87	46.13	-40.00	6.13	30.00	29.54	-23.41
13.560	X	100	231	-68.73	20.29	58.56	-40.00	18.56	30.00	29.54	-10.98
27.12	X	100	27	-98.00	12.58	35.46	-40.00	-4.54	30.00	29.54	-34.08
38.14	H	102	314	-75.38	-13.96	17.66			100.00	40.00	-22.34
54.24	V	101	268	-60.11	-14.39	32.50			100.00	40.00	-7.50
82.73	V	105	116	-61.29	-18.11	27.60			100.00	40.00	-12.40
118.51	V	121	32	-69.37	-14.73	22.90			150.00	43.52	-20.62
171.28	V	135	251	-74.24	-9.47	23.29			150.00	43.52	-20.23
274.72	H	212	173	-64.82	-12.25	29.93			200.00	46.02	-16.09
324.13	H	228	339	-65.27	-10.65	31.08			200.00	46.02	-14.94
651.28	H	278	282	-71.89	-4.07	31.04			200.00	46.02	-14.98

Table 7-4. Radiated Measurements at 3-meters

FCC ID: 2AVN910633	 PCTEST® Proud to be part of 	FCC Pt. 15C MEASUREMENT REPORT				Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger				Page 17 of 21

7.4 Line Conducted Measurement Data

§15.207; ICES-003 (6.1)

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and ICES-003 (6.1).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-5. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2AVN910633	 PCTEST® Proud to be part of 		FCC Pt. 15C MEASUREMENT REPORT		Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 18 of 21


Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 and ICES-003.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dB μ V) = QP/AV Reading (dB μ V) + Factor (dB)
6. Margin (dB) = QP/AV Limit (dB μ V) – QP/AV Level (dB μ V)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: 2AVN910633	 PCTEST [®] Proud to be part of element		FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger			Page 19 of 21

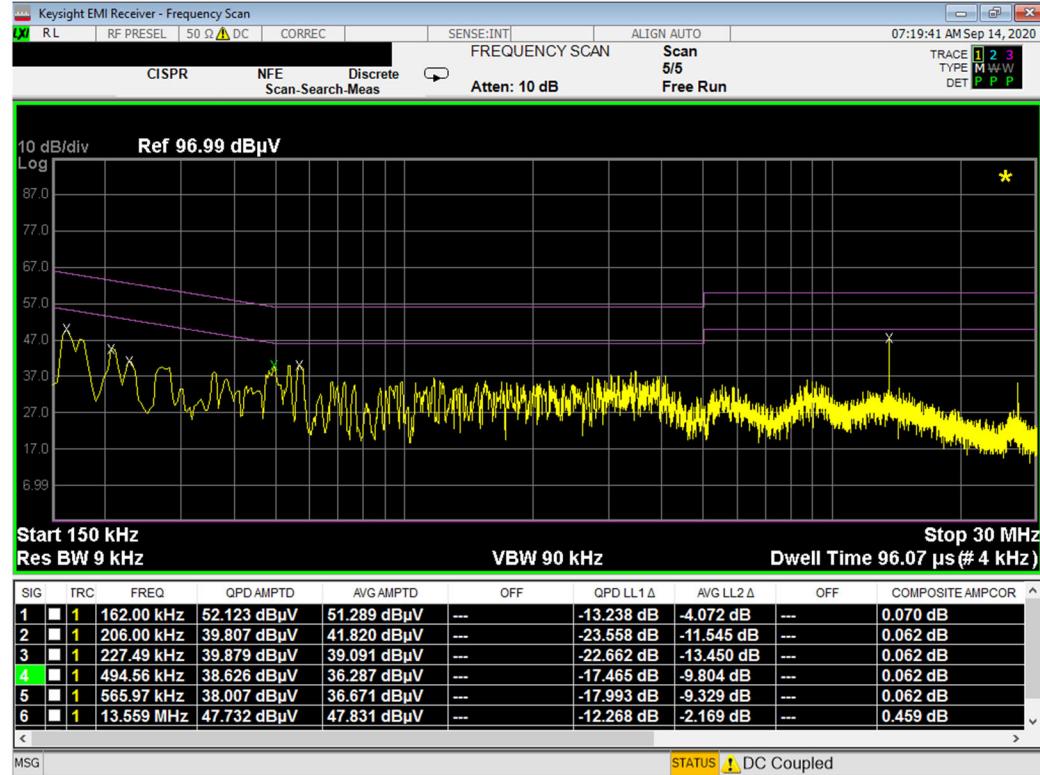

Plot 7-6. Line Conducted Plot (L1)

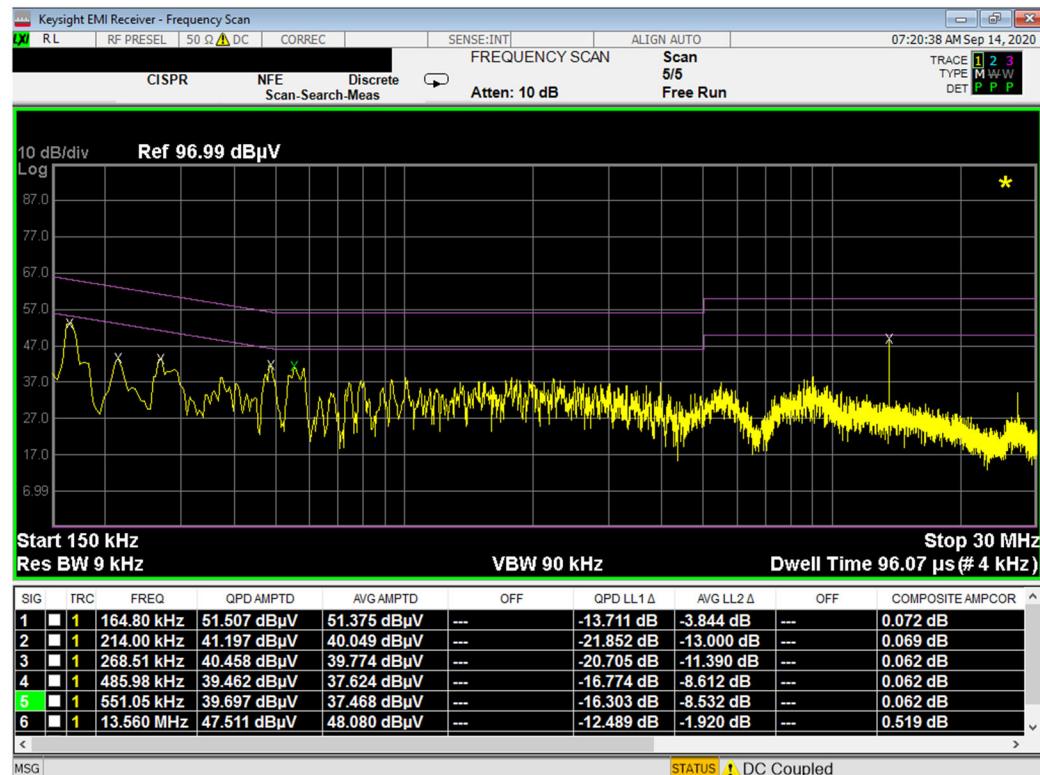

Plot 7-7. Line Conducted Plot (N)

FCC ID: 2AVN910633	 FCC Pt. 15C MEASUREMENT REPORT					Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger				

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **ClearTrac Technologies, LLC** **Wireless Base Charger FCC ID: 2AVN910633** has been tested to comply with the requirements specified in §15.207 and §15.209 of the FCC rules and ICES-003 of the Innovation, Science, and Economic Development Canada rules.

FCC ID: 2AVN910633	 PCTEST [®] Proud to be part of element			FCC Pt. 15C MEASUREMENT REPORT	 ClearTrac TECHNOLOGIES	Approved by: Quality Manager
Test Report S/N: 1M2009170149-02.2AVN9	Test Dates: 7/31/2020 to 8/20/2020	EUT Type: Wireless Base Charger				Page 21 of 21