



RF TEST REPORT

Applicant Xiamen Intretech Automotive
Electronics Co., Ltd.

FCC ID 2AVNN-OBD11

Product 4G OBD

Brand vyncs

Model OBD-11

Report No. R2002A0108-R1

Issue Date March 11, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR 47 Part 22H (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	4
2. General Description of Equipment under Test	5
2.3. Applicant and Manufacturer Information	5
2.4. General Information	5
3. Applied Standards	6
4. Test Configuration	7
5. Test Case Results	8
5.1. RF Power Output and Effective Radiated Power	8
5.2. Radiates Spurious Emission	12
6. Main Test Instruments	17



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Radiated Power	2.1046 22.913(a)(5)	PASS
2	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: March 3, 2020~ March 9, 2020			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

Conducted items except for RF Power Output and Effective Radiated Power refer to BG96, BG96 MINIPCIE module report (Report No.: R1811A0536-R1).



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

2.3. Applicant and Manufacturer Information

Applicant	Xiamen Intretech Automotive Electronics Co., Ltd.
Applicant address	No. 100 Dongfu West Road, Intretech Innovative Industrial Park ,Haicang District,Xiamen,Fujian,China
Manufacturer	Xiamen Intretech Automotive Electronics Co., Ltd.
Manufacturer address	No. 100 Dongfu West Road, Intretech Innovative Industrial Park ,Haicang District,Xiamen,Fujian,China

2.4. General Information

EUT Description			
Model	OBD-11		
IMEI	865284040083788		
Hardware Version	V1.0		
Software Version	V1.0		
Power Supply	External Power Supply		
Antenna Type	Internal Antenna		
Antenna Gain	-1.0dBi		
Test Mode(s)	GSM 850;LTE Band 5;		
Test Modulation	(GSM)GMSK,8PSK; (LTE)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
LTE Category	M1		
Maximum E.R.P.	GSM 850:	29.49dBm	
	LTE Band 5:	18.89dBm	
Rated Power Supply Voltage	12V		
Extreme Voltage	Minimum: 9V Maximum: 16V		
Extreme Temperature	Lowest:-20°C Highest: +70°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR 47 Part 22H (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, Horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM /LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation
	GSM 850
RF Power Output and Effective Radiated power	GPRS EGPRS
Radiates Spurious Emission	GPRS

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output and Effective Radiated power	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output and Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$

f) The maximum ERP is the maximum value determined in the preceding step.

g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


$$EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.


$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test Setup

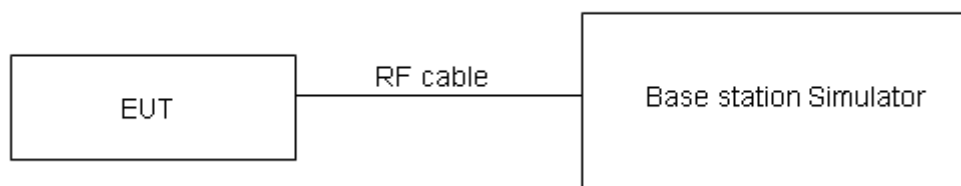

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

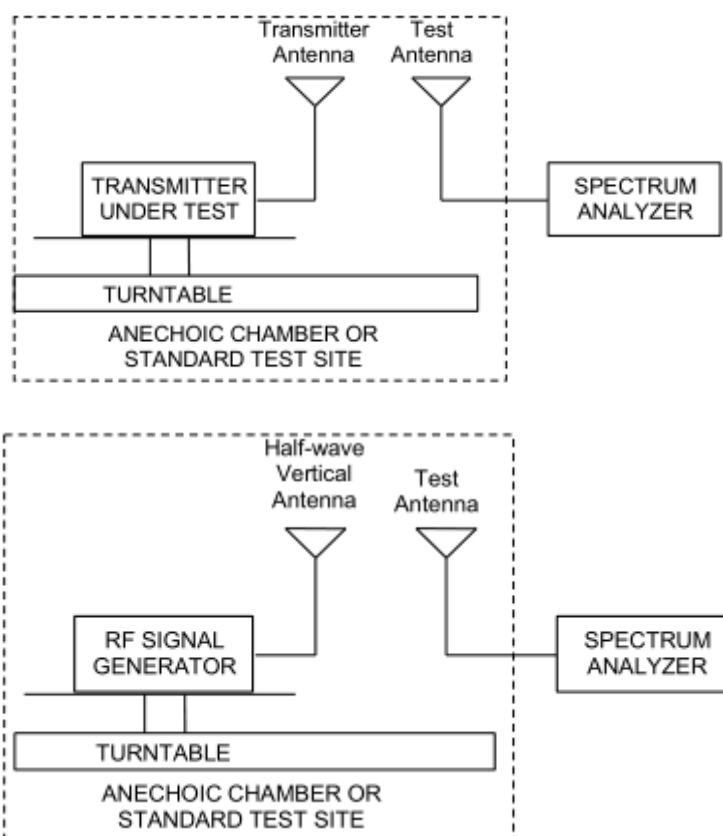

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4 \text{ dB}$ for RF power output, $k = 2$, $U = 1.19 \text{ dB}$ for ERP .



Test Results

GSM 850		Conducted Power (dBm)			ERP(dBm)		
		Channel/Frenqucy(MHz)			Channel/Frenqucy(MHz)		
		128/824.2	190/836.6	251/848.8	128/824.2	190/836.6	251/848.8
GPRS(GMSK)	1 Tx Slot	32.64	32.07	31.98	29.49	28.92	28.83
	2 Tx Slots	32.28	31.75	31.62	29.13	28.60	28.47
	3 Tx Slots	30.37	29.74	29.67	27.22	26.59	26.52
	4 Tx Slots	27.98	27.53	27.59	24.83	24.38	24.44
EGPRS (8PSK)	1 Tx Slot	23.98	23.68	23.55	20.83	20.53	20.40
	2 Tx Slots	23.67	23.34	23.31	20.52	20.19	20.16
	3 Tx Slots	23.24	23.04	23.04	20.09	19.89	19.89
	4 Tx Slots	22.73	22.61	22.41	19.58	19.46	19.26

Band5	Channel/ Frequency(MHz)	Index	RB# RBstart	Conducted Power (dBm)		ERP(dBm)	
				QPSK	16QAM	QPSK	16QAM
1.4MHz	20407/824.7	0	1#0	21.83	21.60	18.68	18.45
		0	6#0	21.80	21.83	18.65	18.68
	20525/836.5	0	1#0	21.73	21.38	18.58	18.23
		0	6#0	21.69	21.72	18.54	18.57
	20643/848.3	0	1#5	21.82	22.04	18.67	18.89
		0	6#0	21.81	22.02	18.66	18.87
3MHz	20415/825.5	0	1#0	21.64	21.73	18.49	18.58
		0	6#0	21.64	21.78	18.49	18.63
	20525/836.5	0	1#0	21.67	21.38	18.52	18.23
		0	6#0	21.66	21.62	18.51	18.47
	20635/847.5	1	1#5	21.65	21.42	18.5	18.27
		1	6#0	21.68	21.70	18.53	18.55
5MHz	20425/826.5	0	1#0	21.69	21.61	18.54	18.46
		0	6#0	21.52	21.66	18.37	18.51
	20525/836.5	0	1#0	21.44	21.36	18.29	18.21
		0	6#0	21.46	21.58	18.31	18.43
	20625/846.5	3	1#5	21.48	21.49	18.33	18.34
		3	6#0	21.46	21.56	18.31	18.41



10MHz	20450/829	0	1#0	21.73	21.51	18.58	18.36
		0	4#0	21.55	21.67	18.4	18.52
	20525/836.5	0	1#0	21.58	21.51	18.43	18.36
		0	4#0	21.78	21.60	18.63	18.45
	20600/844	7	1#5	21.42	21.37	18.27	18.22
		7	4#2	21.41	21.50	18.26	18.35

5.2. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

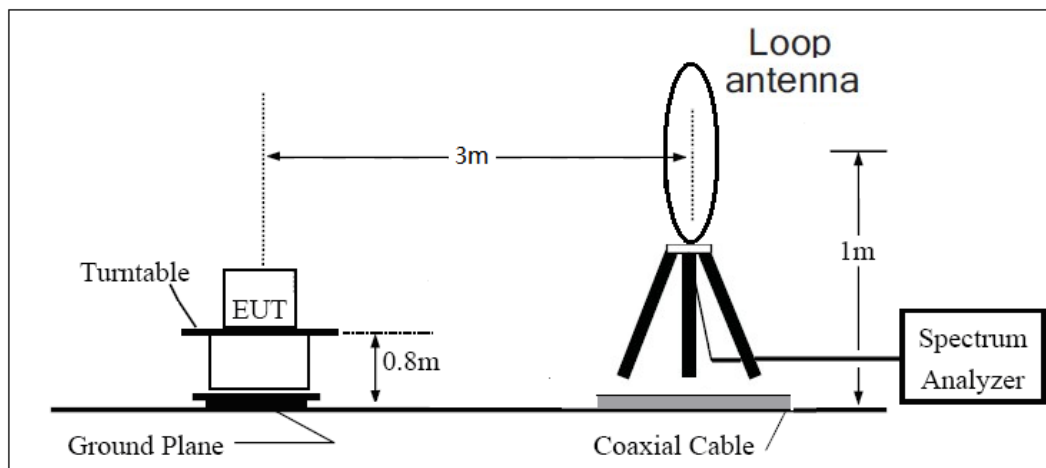

30MHz ~ 1GHz

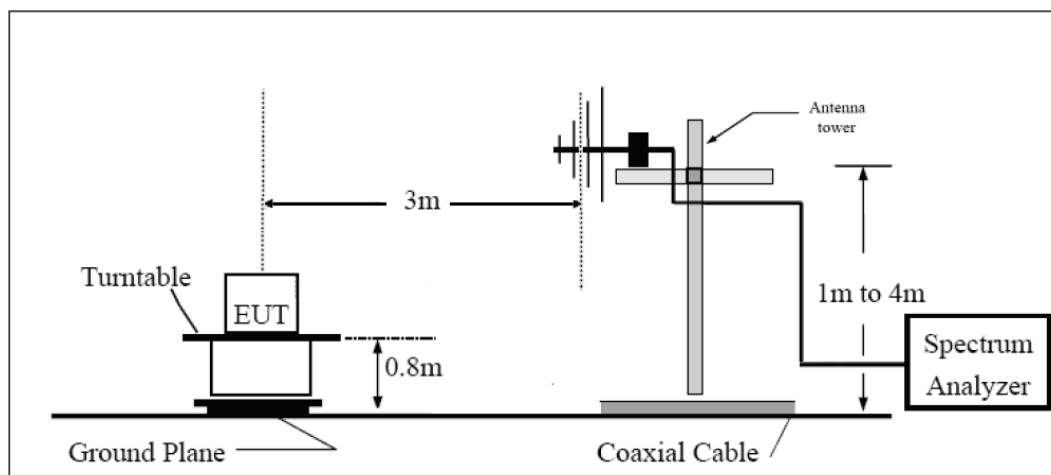

Above 1GHz

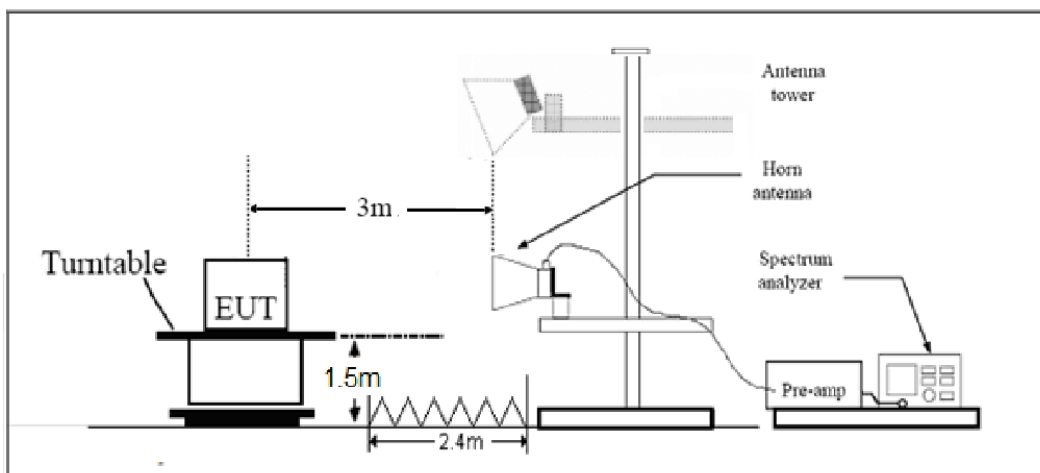



Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier,
GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.3	-52.75	2.00	10.75	Horizontal	-46.15	-13.00	33.15	315
3	1673.3	-55.18	2.51	11.05	Horizontal	-48.79	-13.00	35.79	270
4	3346.4	-59.74	4.20	11.15	Horizontal	-54.94	-13.00	41.94	45
5	4183.0	-55.15	5.20	11.15	Horizontal	-51.35	-13.00	38.35	225
6	5019.6	-54.49	5.50	11.95	Horizontal	-50.19	-13.00	37.19	0
7	5856.2	-57.29	5.70	13.55	Horizontal	-51.59	-13.00	38.59	90
8	6692.8	-57.45	6.30	13.75	Horizontal	-52.15	-13.00	39.15	315
9	7529.4	-53.44	6.80	13.85	Horizontal	-48.54	-13.00	35.54	180
10	8366.0	-53.89	6.90	14.25	Horizontal	-48.69	-13.00	35.69	270
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-69.70	2.00	10.75	Horizontal	-63.10	-13.00	50.10	225
3	2509.5	-60.21	2.51	11.05	Horizontal	-53.82	-13.00	40.82	90
4	3346.0	-57.73	4.20	11.15	Horizontal	-52.93	-13.00	39.93	90
5	4182.5	-56.50	5.20	11.15	Horizontal	-52.70	-13.00	39.70	315
6	5019.0	-54.44	5.50	11.95	Horizontal	-50.14	-13.00	37.14	45
7	5855.5	-56.54	5.70	13.55	Horizontal	-50.84	-13.00	37.84	225
8	6692.0	-57.48	6.30	13.75	Horizontal	-52.18	-13.00	39.18	90
9	7528.5	-53.96	6.80	13.85	Horizontal	-49.06	-13.00	36.06	315
10	8365.0	-55.59	6.90	14.25	Horizontal	-50.39	-13.00	37.39	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									



LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-69.29	2.00	10.75	Horizontal	-62.69	-13.00	49.69	315
3	2509.5	-59.40	2.51	11.05	Horizontal	-53.01	-13.00	40.01	45
4	3466.2	-57.30	4.20	11.15	Horizontal	-52.50	-13.00	39.50	90
5	4215.9	-56.35	5.20	11.15	Horizontal	-52.55	-13.00	39.55	45
6	5165.6	-55.86	5.50	11.95	Horizontal	-51.56	-13.00	38.56	315
7	5815.3	-57.99	5.70	13.55	Horizontal	-52.29	-13.00	39.29	225
8	6765.0	-58.51	6.30	13.75	Horizontal	-53.21	-13.00	40.21	90
9	7614.7	-55.40	6.80	13.85	Horizontal	-50.50	-13.00	37.50	315
10	8464.4	-54.03	6.90	14.25	Horizontal	-48.83	-13.00	35.83	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-69.93	2.00	10.75	Horizontal	-63.33	-13.00	50.33	315
3	2509.5	-59.39	2.51	11.05	Horizontal	-53.00	-13.00	40.00	225
4	3346.0	-59.29	4.20	11.15	Horizontal	-54.49	-13.00	41.49	90
5	4182.5	-57.23	5.20	11.15	Horizontal	-53.43	-13.00	40.43	45
6	5019.0	-54.88	5.50	11.95	Horizontal	-50.58	-13.00	37.58	225
7	5855.5	-57.80	5.70	13.55	Horizontal	-52.10	-13.00	39.10	270
8	6692.0	-60.02	6.30	13.75	Horizontal	-54.72	-13.00	41.72	0
9	7528.5	-55.35	6.80	13.85	Horizontal	-50.45	-13.00	37.45	45
10	8365.0	-56.06	6.90	14.25	Horizontal	-50.86	-13.00	37.86	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2019-05-19	2020-05-18
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2019-05-19	2020-05-18
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2019-05-19	2020-05-18
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2019-05-19	2020-05-18
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2019-05-19	2020-05-18
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2019-05-20	2020-05-21
RF Cable	Agilent	SMA 15cm	0001	2019-12-13	2020-6-12
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****