

Nalloy, LLC

REVISED TEST REPORT TO 102802-5

Model: PFAY0H

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

15.207 & 15.247
(DTS 2400-2483.5 MHz)

Report No.: 102802-5A

Date of issue: March 21, 2022



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to test processes, but rather as the reason we are in business.

Test Certificate # 803.01

This report contains a total of 54 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Revision History	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	6
FCC Part 15 Subpart C	8
15.247(a)(2) 6dB Bandwidth	8
15.247(b)(3) Output Power	11
15.247(e) Power Spectral Density	17
15.247(d) RF Conducted Emissions & Band Edge	20
15.247(d) Radiated Emissions & Band Edge	31
15.207 AC Conducted Emissions	44
Supplemental Information	53
Measurement Uncertainty	53
Emissions Test Details	53

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Nalloy, LLC
2301 5th Avenue
Seattle, WA 98108

Representative: Naga Suryadevara
Customer Reference Number: 2D-03187704

REPORT PREPARED BY:

Darcy Thompson
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 102802

DATE OF EQUIPMENT RECEIPT:
DATE(S) OF TESTING:

March 25, 2020
March 25, 2020

Revision History

Original: Testing of the Model: PFAY0H to FCC Part 15 Subpart C Section(s) 15.207 & 15.247 (DTS 2400-2483.5 MHz).

Revision A: To replace AC 15.207 Conducted Emissions data.

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
 CKC Laboratories, Inc.
 Canyon Park
 22116 23rd Drive S.E., Suite A
 Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.12

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Japan
Canyon Park, Bothell, WA	US0081	US1022	A-0136
Brea, CA	US0060	US1025	A-0136
Fremont, CA	US0082	US1023	A-0136
Mariposa, CA	US0103	US1024	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (DTS)

Test Procedure	Description	Modifications	Results
15.247(a)(2)	6dB Bandwidth	NA	Pass
15.247(b)(3)	Output Power	NA	Pass
15.247(e)	Power Spectral Density	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	Pass
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	Pass

NA = Not Applicable

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
NA	Nalloy, LLC.	PFAYOH	9906679780

Support Equipment:


Device	Manufacturer	Model #	S/N
PC	Lenovo	81KT	YD07YGLG
PC PSU	Lenovo	ADL45WCC	NA
EUT PSU	Delta Electronics	MDS-030AAC15	24QW96P00CS

General Product Information:


Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	BLE
Operating Frequency Range:	2402-2480 MHz
Modulation Type(s):	GFSK
Maximum Duty Cycle:	100% Modulation (tested worst-case)
Number of TX Chains:	1
Antenna Type(s) and Gain:	Linear polarized / 3.7 dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral (External connector provided to facilitate testing)
Nominal Input Voltage:	120VAC
Firmware / Software used for Test:	ro.build.id=PKQ1.180819.001

Block Diagram (s)

Test Setup Block Diagram

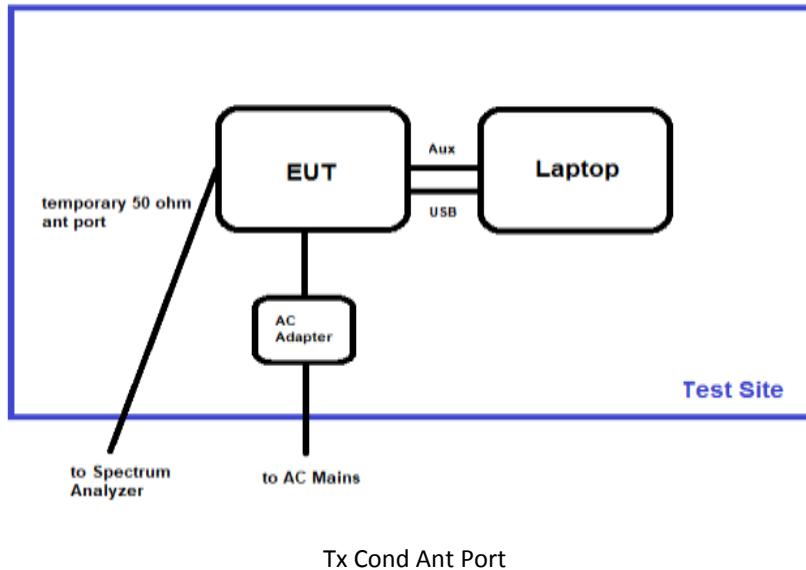

Test Setup Block Diagram

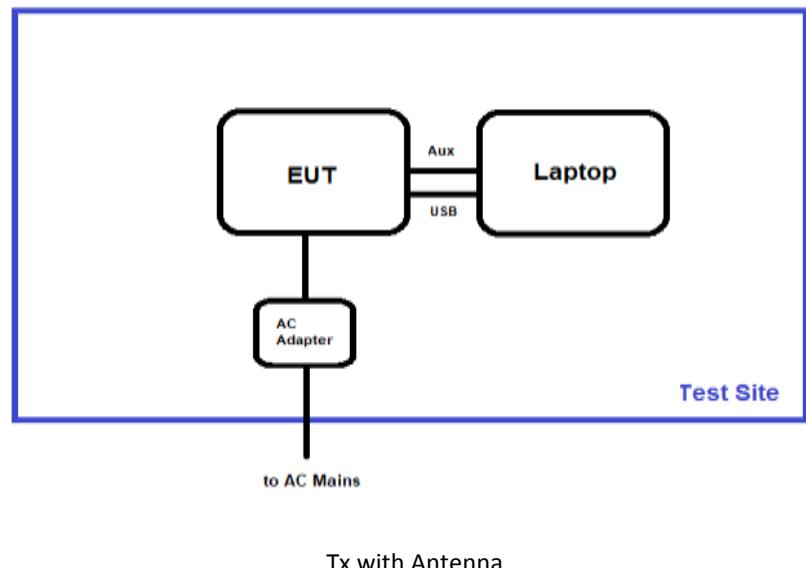

FCC Part 15 Subpart C

15.247(a)(2) 6dB Bandwidth


Test Setup/Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	S. Pittsford
Test Method:	ANSI C63.10 (2013), KDB 558074 v05r02 April 2, 2019	Test Date(s):	3/25/2020
Configuration:	1		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through the antenna port connector and is attached to the spectrum analyzer.		

Environmental Conditions			
Temperature (°C)	23	Relative Humidity (%):	28


Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/18/2019	11/18/2021

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
2402	0	GFSK	693.0	≥500	Pass
2440	0	GFSK	691.0	≥500	Pass
2480	0	GFSK	690.7	≥500	Pass


Plot(s)

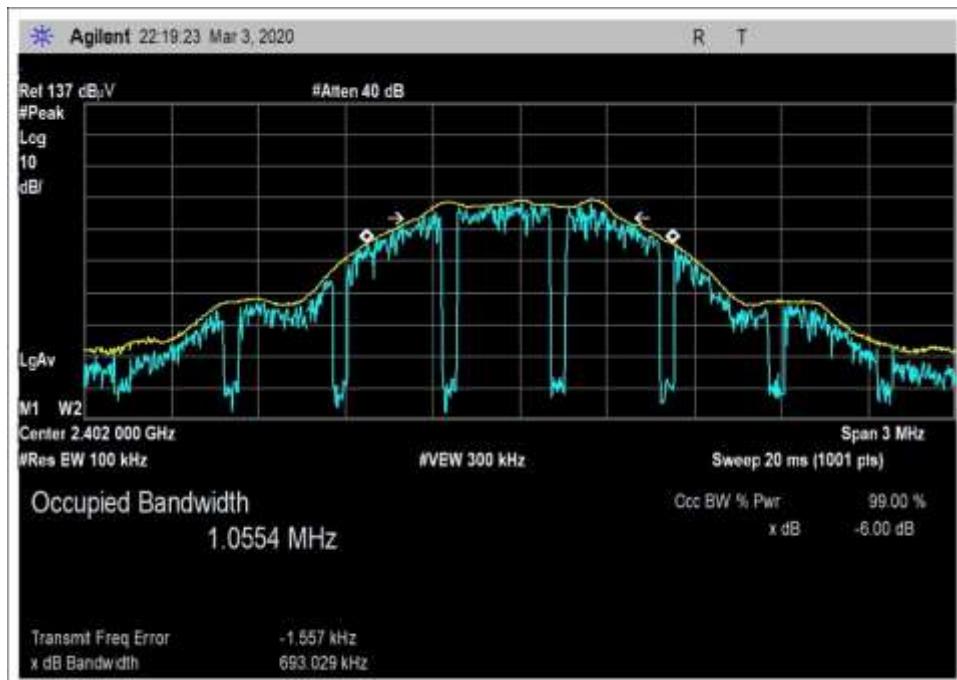

2402 BLE

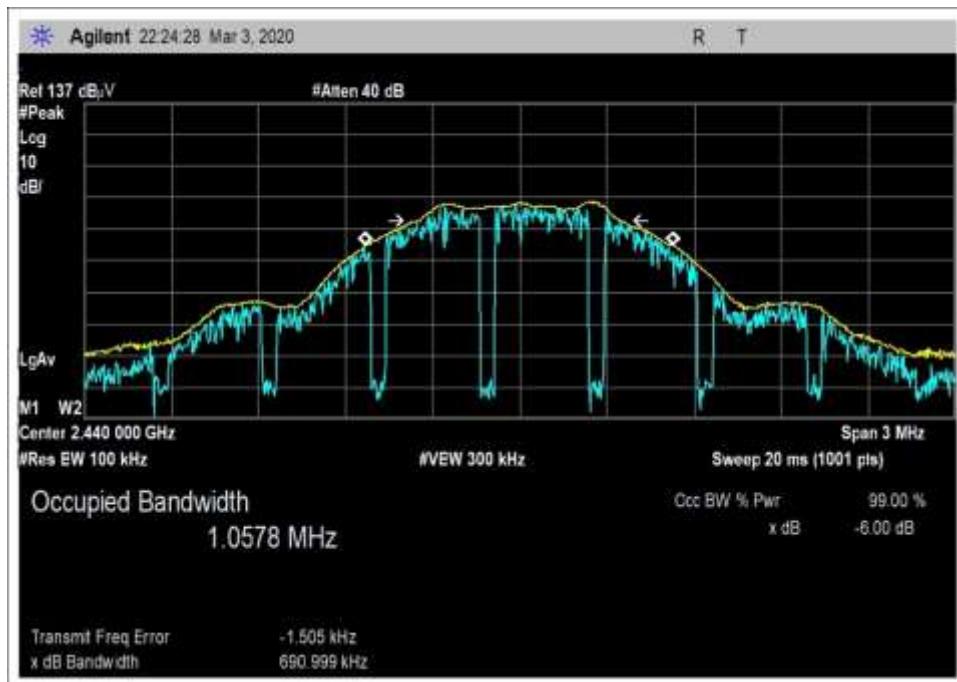

2440 BLE

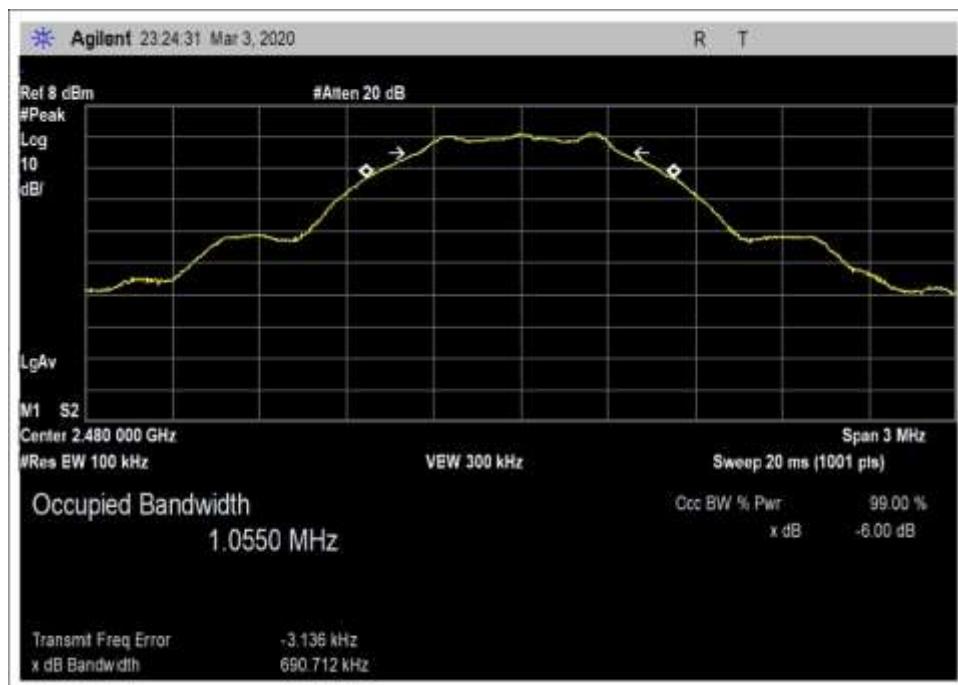

2480 BLE

Test Setup Photo(s)



15.247(b)(3) Output Power

Test Setup / Conditions			
Test Location:	Bothell Lab C3	Test Engineer:	S. Pittsford
Test Method:	ANSI C63.10 (2013), KDB 558074 v05r02 April 2, 2019	Test Date(s):	3/25/2020
Configuration:	1		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through the antenna port connector and is attached to the spectrum analyzer.		

Environmental Conditions			
Temperature (°C)	23	Relative Humidity (%):	28

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/18/2019	11/18/2021
01318	Multimeter	Fluke	Fluke 85	7/22/2019	7/22/2021
P07527	Variac	Simpson	na	11/21/2018	11/21/2020

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V _{Minimum} (dBm)	V _{Nominal} (dBm)	V _{Maximum} (dBm)	Max Deviation from V _{Nominal} (dB)
2402	GFSK/0	-0.57	-0.57	-0.57	0
2440	GFSK/0	-1.21	-1.21	-1.21	0
2480	GFSK/0	-0.98	-0.98	-0.96	.02


Test performed using operational mode with the highest output power, representing worst case.

Parameter Definitions:


Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	120
V _{Minimum} :	102
V _{Maximum} :	138


Plots

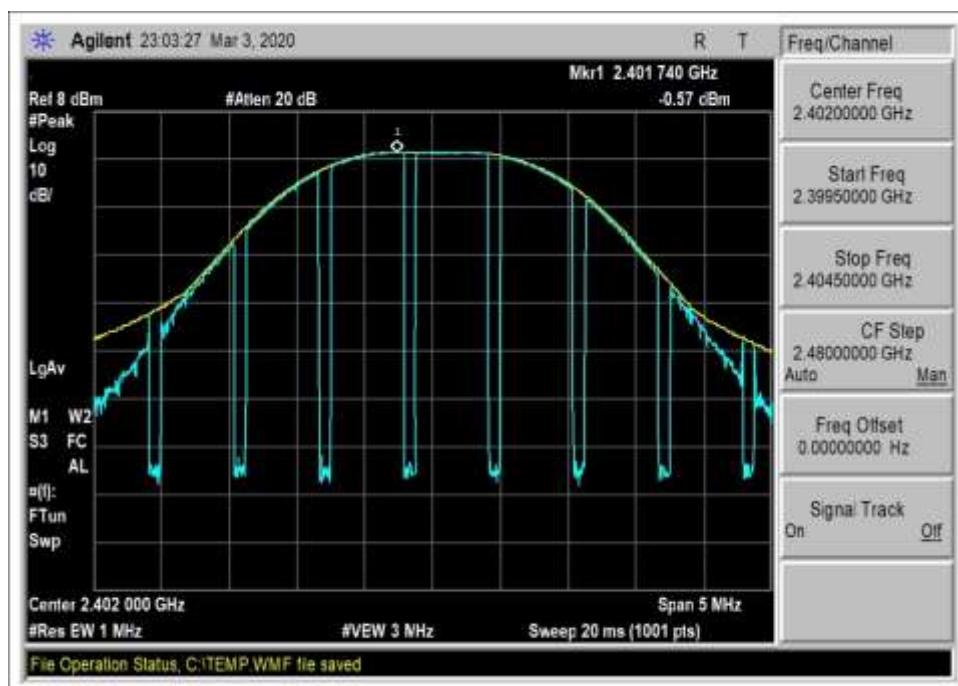


2402 BLE Vnom

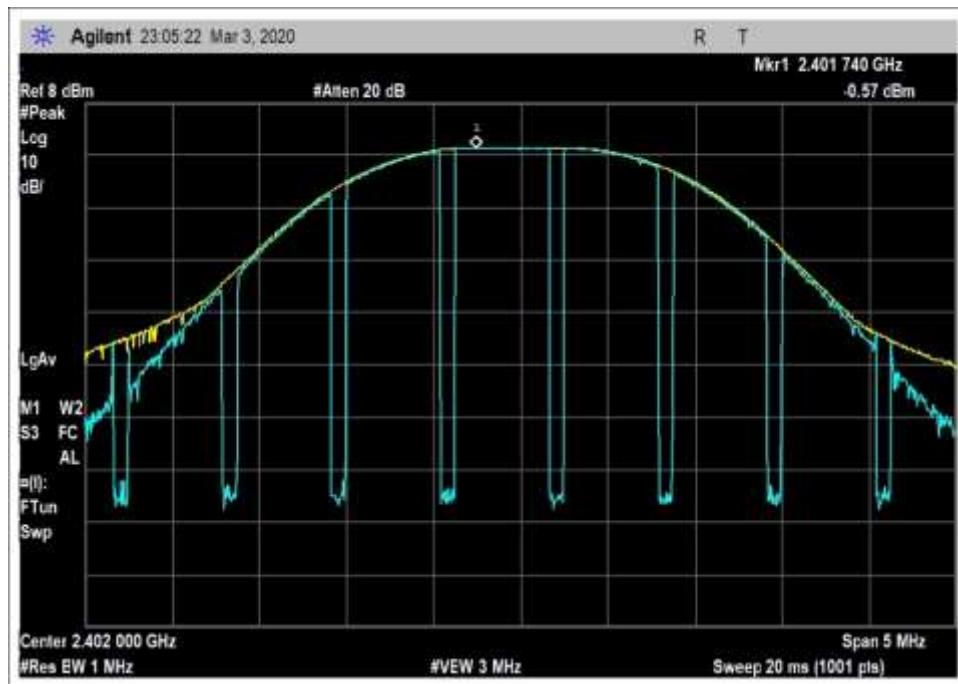


2402 BLE Vmin

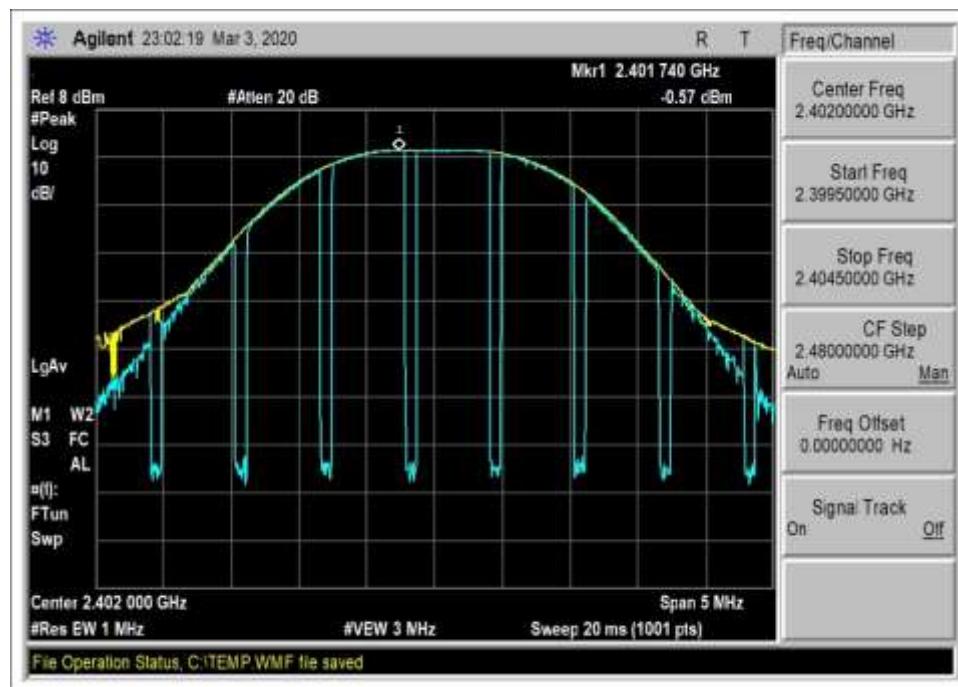


2402 BLE Vmax

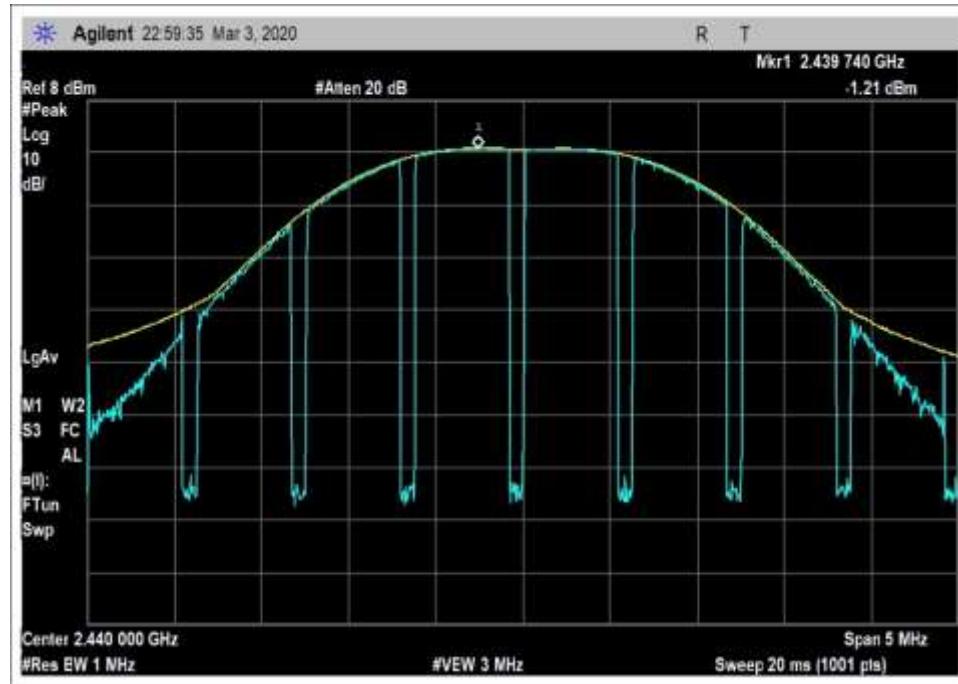


2440 BLE Vnom

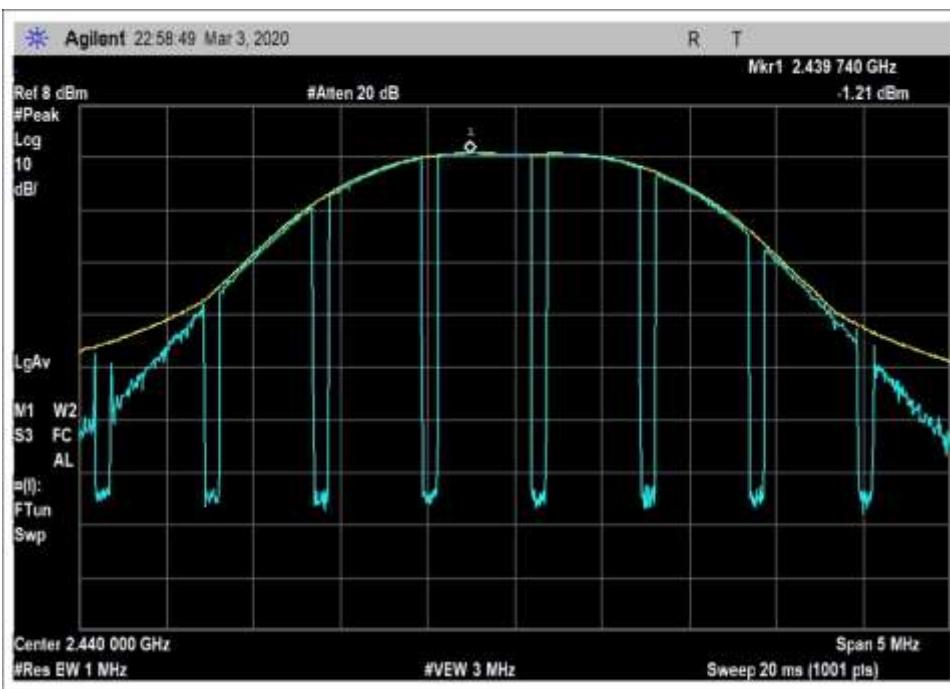


2440 BLE Vmin

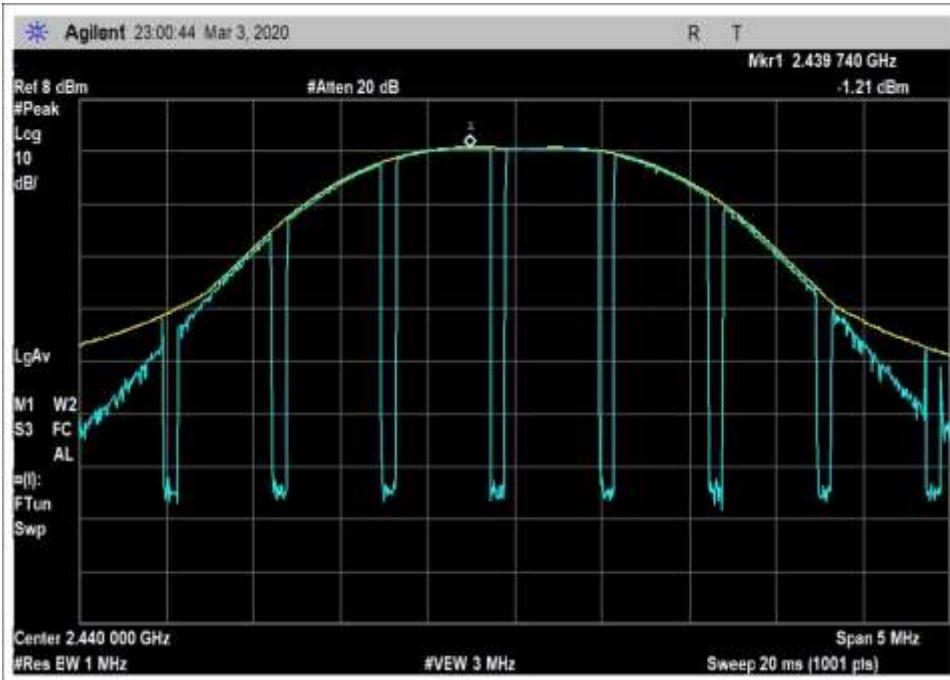


2440 BLE Vmax

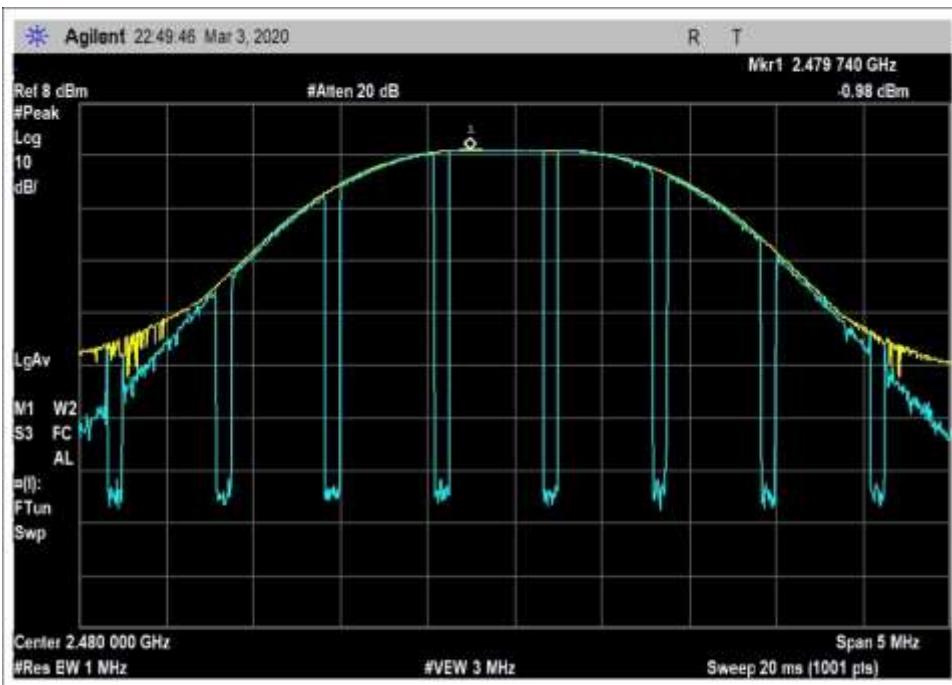

2480 BLE Vnom

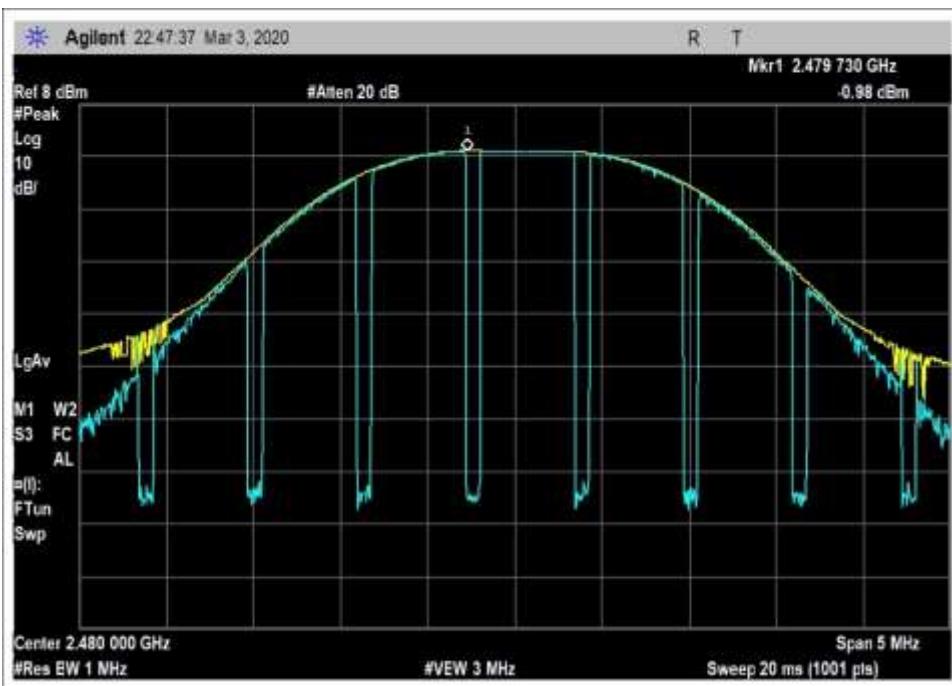

2480 BLE Vmin

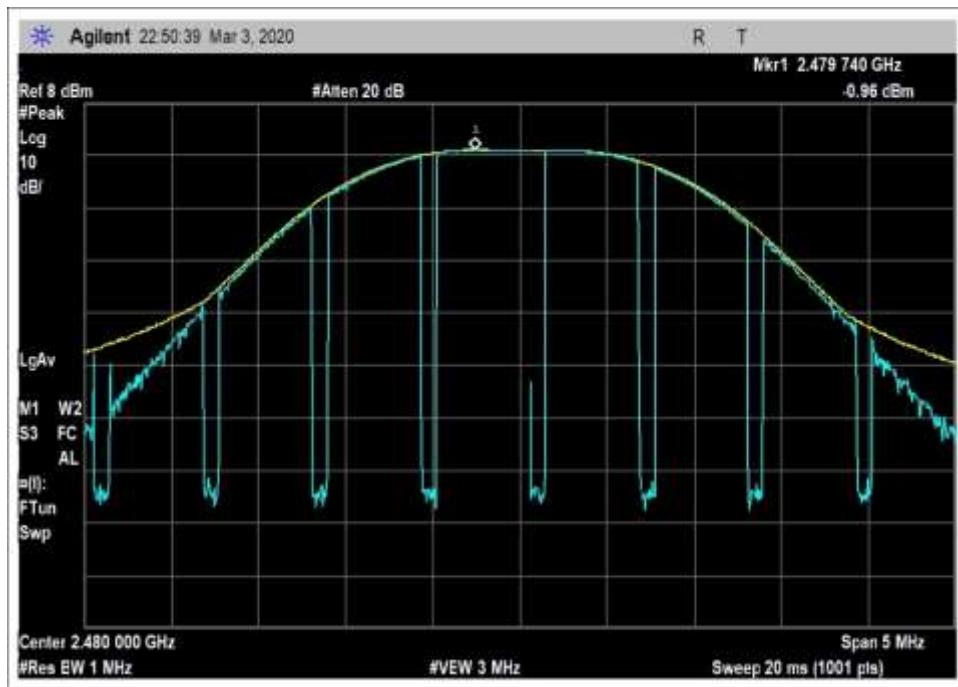

2480 BLE Vmax

Test Setup Photo(s)



15.247(e) Power Spectral Density


Test Setup / Conditions / Data			
Test Location:	Bothell Lab C3	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013), KDB 558074 v05r02 April 2, 2019	Test Date(s):	3/25/2020
Configuration:	1		
Test Setup:	Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting through the antenna port connector and is attached to the spectrum analyzer.		


Environmental Conditions			
Temperature (°C)	23	Relative Humidity (%):	28

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/18/2019	11/18/2021

PSD Test Data Summary - RF Conducted Measurement				
Measurement Method: PKPSD				
Frequency (MHz)	Modulation	Measured (dBm/3kHz)	Limit (dBm/3kHz)	Results
2402	GFSK	90.7	≤115	Pass
2440	GFSK	90.2	≤115	Pass
2480	GFSK	90.1	≤115	Pass

Plots

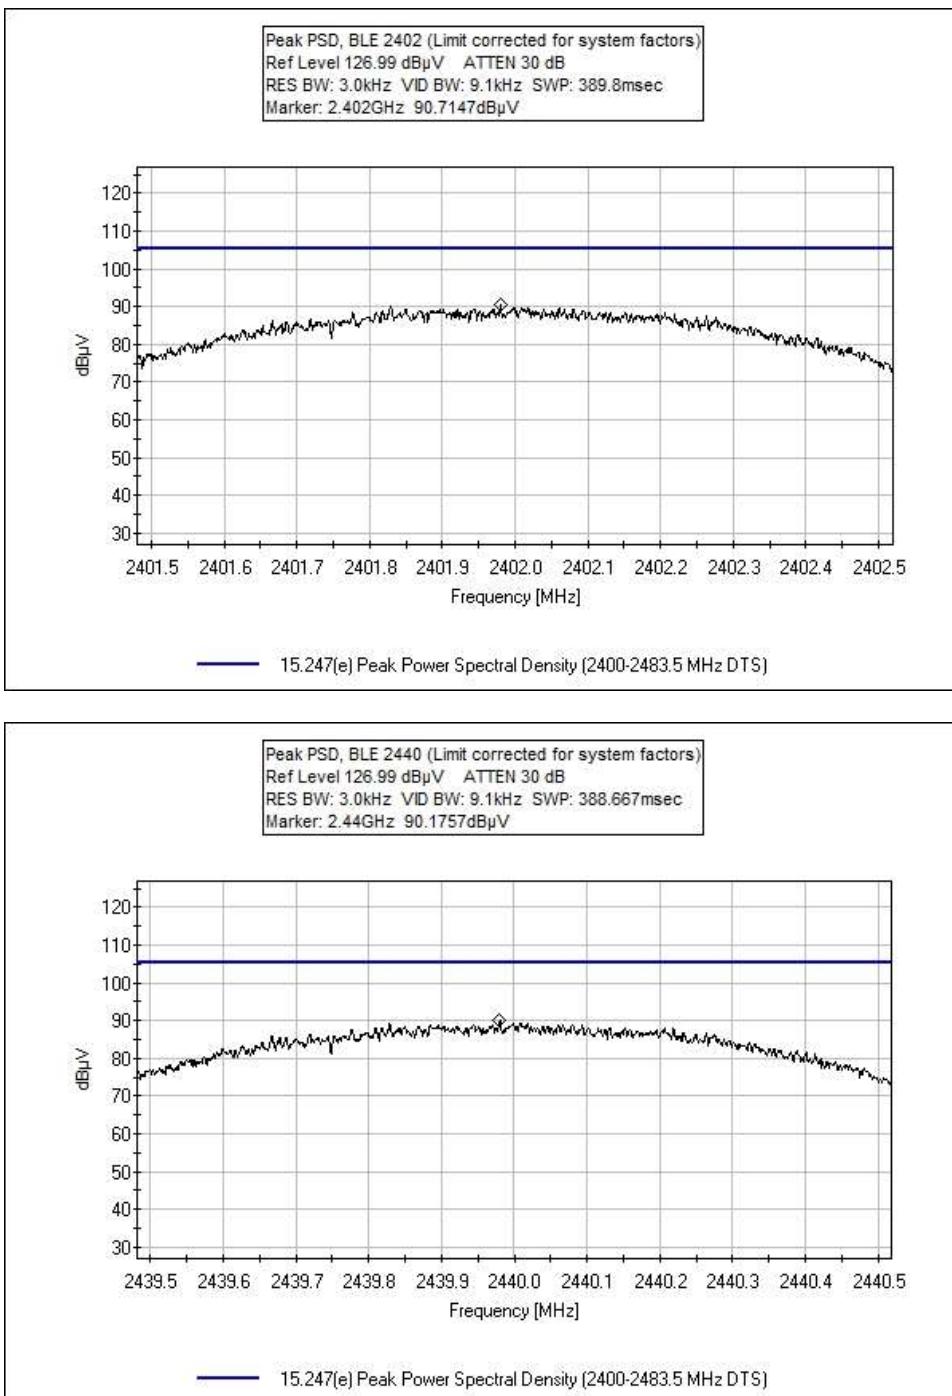

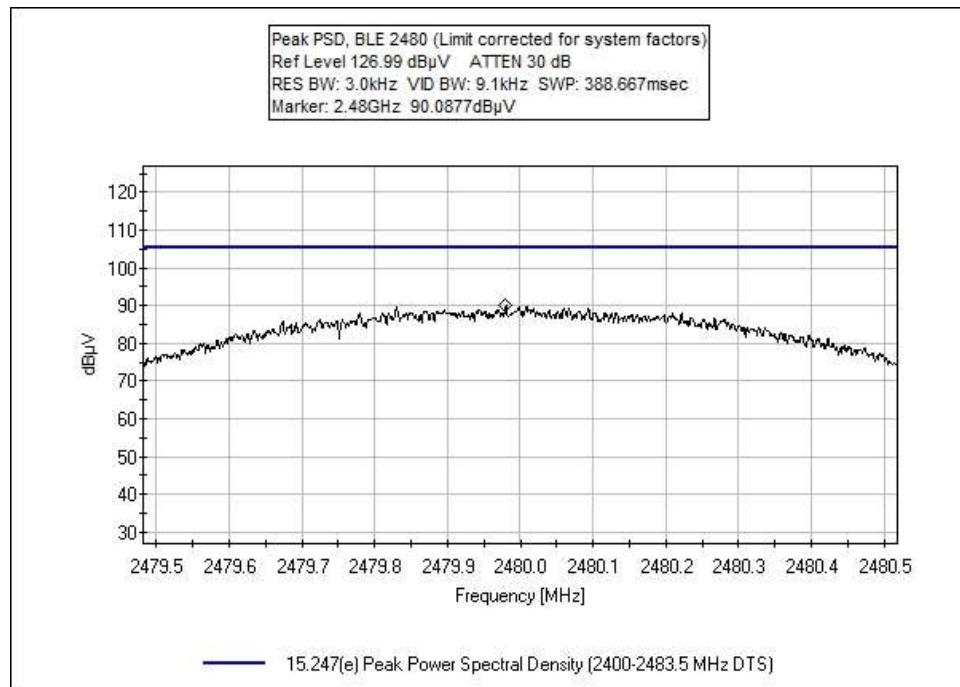

Test Setup Photo(s)



15.247(d) RF Conducted Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
 Customer: **Nalloy, LLC.**
 Specification: **15.247(d) Conducted Spurious Emissions**
 Work Order #: **102802** Date: 3/25/2020
 Test Type: **Conducted Emissions** Time: 2:40:27 PM
 Tested By: Matthew Harrison Sequence#: 38
 Software: EMITest 5.03.12 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 22° C

Humidity: 28%

Pressure: 101.3 kPa

Frequency Range: 9kHz-25GHz

Frequency tested: 2402

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013 KDB 5508074 v05r02 4/2/2019


Test Mode: Transmitting

Test Setup: EUT is setup for conducted measurements.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Nalloy, LLC. WO#: 102802 Sequence#: 38 Date: 3/25/2020
15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port 0

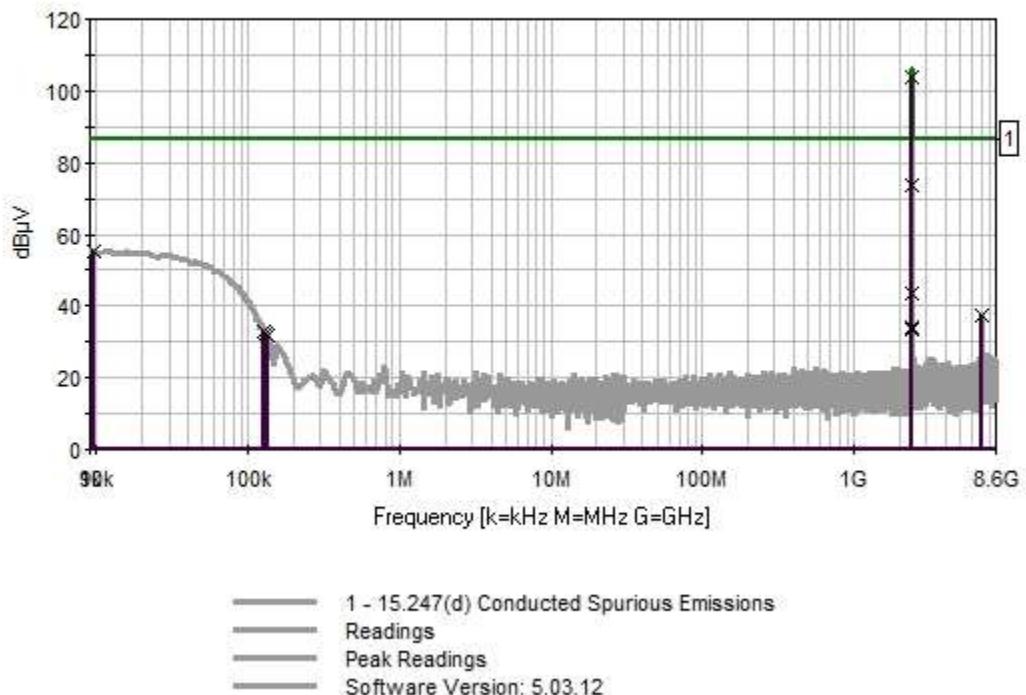

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021

Measurement Data:				Reading listed by margin.					Test Lead: Antenna Port 0		
#	Freq MHz	Rdng dB μ V		dB	dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	2401.969M	104.0					+0.0	104.0	106.3	-2.3	Anten
2	9.705k	55.1					+0.0	55.1	86.3	-31.2	Anten
3	2402.871M	73.4					+0.0	73.4	106.3	-32.9	Anten
4	9608.970M	48.3					+0.0	48.3	86.3	-38.0	Anten
5	9606.968M	45.2					+0.0	45.2	86.3	-41.1	Anten
6	2399.467M	43.7					+0.0	43.7	86.3	-42.6	Anten
7	9607.468M	43.0					+0.0	43.0	86.3	-43.3	Anten
8	9607.969M	41.7					+0.0	41.7	86.3	-44.6	Anten
9	6960.023M	37.5					+0.0	37.5	86.3	-48.8	Anten
10	2398.266M	34.3					+0.0	34.3	86.3	-52.0	Anten
11	2398.766M	33.4					+0.0	33.4	86.3	-52.9	Anten
12	126.453k	33.1					+0.0	33.1	86.3	-53.2	Anten
13	131.811k	32.1					+0.0	32.1	86.3	-54.2	Anten
14	135.900k	31.9					+0.0	31.9	86.3	-54.4	Anten
15	133.221k	31.7					+0.0	31.7	86.3	-54.6	Anten



Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
Customer: **Nalloy, LLC.**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102802** Date: 3/25/2020
Test Type: **Conducted Emissions** Time: 2:46:38 PM
Tested By: Matthew Harrison Sequence#: 39
Software: EMITest 5.03.12 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 22° C

Humidity: 28%

Pressure: 101.3 kPa

Frequency Range: 9kHz-25GHz

Frequency tested: 2440

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013 KDB 5508074 v05r02 4/2/2019


Test Mode: Transmitting

Test Setup: EUT is setup for conducted measurements.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Nalloy, LLC. WO#: 102802 Sequence#: 39 Date: 3/25/2020
15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port 0

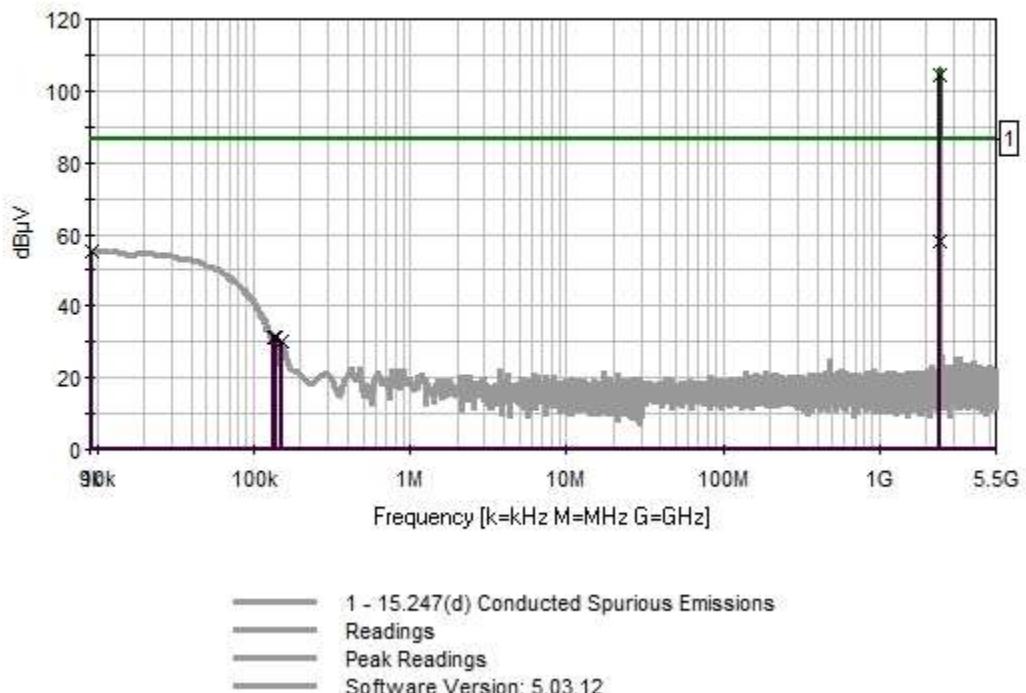

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port 0

#	Freq MHz	Rdng dB μ V	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	2439.807M	104.4	+0.0	104.4	106.3	-1.9	Anten
2	9.282k	55.3	+0.0	55.3	86.3	-31.0	Anten
3	9759.020M	41.5	+0.0	41.5	86.3	-44.8	Anten
4	9760.921M	41.4	+0.0	41.4	86.3	-44.9	Anten
5	2438.706M	58.2	+0.0	58.2	106.3	-48.1	Anten
6	6960.023M	36.9	+0.0	36.9	86.3	-49.4	Anten
7	136.041k	31.5	+0.0	31.5	86.3	-54.8	Anten
8	133.221k	31.4	+0.0	31.4	86.3	-54.9	Anten
9	137.310k	31.2	+0.0	31.2	86.3	-55.1	Anten
10	24277.720 M	30.9	+0.0	30.9	86.3	-55.4	Anten
11	24642.290 M	30.7	+0.0	30.7	86.3	-55.6	Anten
12	24821.670 M	30.3	+0.0	30.3	86.3	-56.0	Anten
13	24692.840 M	30.2	+0.0	30.2	86.3	-56.1	Anten
14	24702.850 M	30.1	+0.0	30.1	86.3	-56.2	Anten
15	150.000k	29.9	+0.0	29.9	86.3	-56.4	Anten



Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
Customer: **Nalloy, LLC.**
Specification: **15.247(d) Conducted Spurious Emissions**
Work Order #: **102802** Date: 3/25/2020
Test Type: **Conducted Emissions** Time: 2:53:50 PM
Tested By: Matthew Harrison Sequence#: 40
Software: EMITest 5.03.12 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 22° C

Humidity: 28%

Pressure: 101.3 kPa

Frequency Range: 9kHz-25GHz

Frequency tested: 2440

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013 KDB 5508074 v05r02 4/2/2019


Test Mode: Transmitting

Test Setup: EUT is setup for conducted measurements.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Nalloy, LLC. WO#: 102802 Sequence#: 40 Date: 3/25/2020
15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port 0

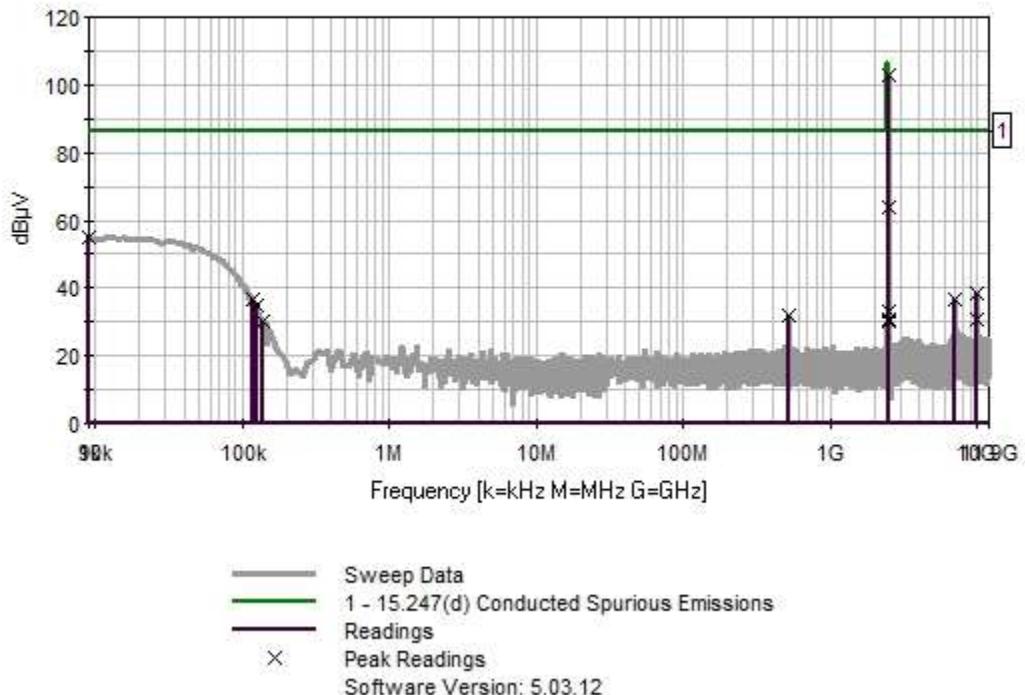

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021

Measurement Data:				Reading listed by margin.					Test Lead: Antenna Port 0		
#	Freq MHz	Rdng dB μ V		Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar			
									Anten		
1	2479.948M	102.8		+0.0	102.8	106.3	-3.5		Anten		
2	9.000k	54.9		+0.0	54.9	86.3	-31.4		Anten		
3	2481.149M	63.7		+0.0	63.7	106.3	-42.6		Anten		
4	9921.081M	38.5		+0.0	38.5	86.3	-47.8		Anten		
5	6960.023M	36.9		+0.0	36.9	86.3	-49.4		Anten		
6	117.429k	36.8		+0.0	36.8	86.3	-49.5		Anten		
7	123.774k	35.0		+0.0	35.0	86.3	-51.3		Anten		
8	2483.651M	33.1		+0.0	33.1	86.3	-53.2		Anten		
9	519.589M	32.2		+0.0	32.2	86.3	-54.1		Anten		
10	2484.752M	31.0		+0.0	31.0	86.3	-55.3		Anten		
11	24811.790 M	31.0		+0.0	31.0	86.3	-55.3		Anten		
12	9919.680M	30.5		+0.0	30.5	86.3	-55.8		Anten		
13	2483.951M	30.4		+0.0	30.4	86.3	-55.9		Anten		
14	136.887k	30.3		+0.0	30.3	86.3	-56.0		Anten		
15	2485.653M	30.0		+0.0	30.0	86.3	-56.3		Anten		


Band Edge


Band Edge Summary

Limit applied: Max Power/100kHz - 20dB.

Frequency (MHz)	Modulation	Measured (dB μ V)	Limit (dB μ V)	Results
2400.0	GFSK	50.2	<86.28	Pass
2483.5	GFSK	38.5	<86.28	Pass

Band Edge Plots

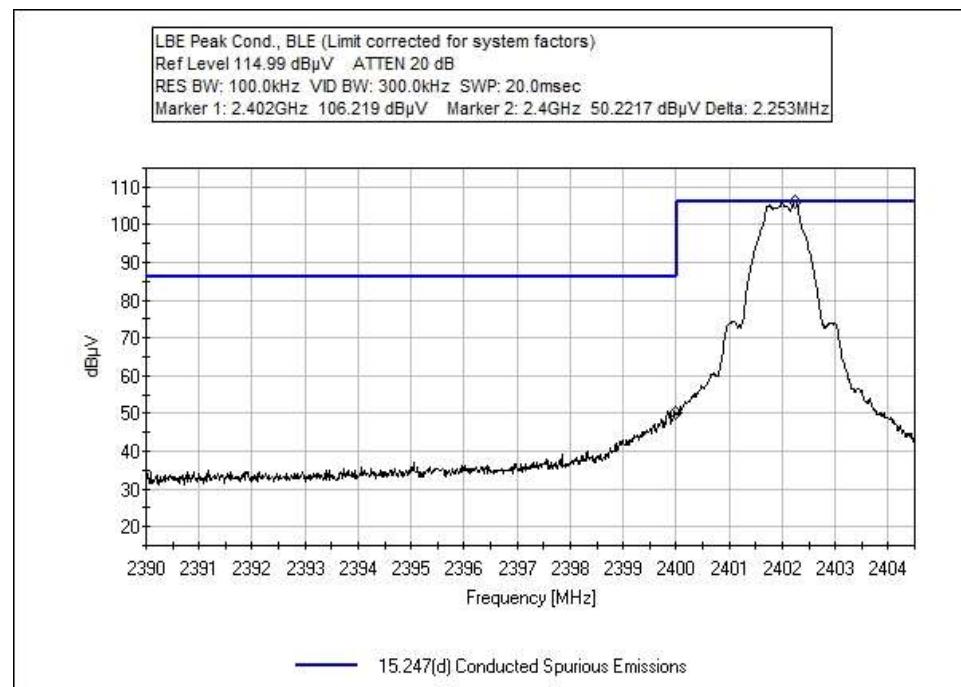

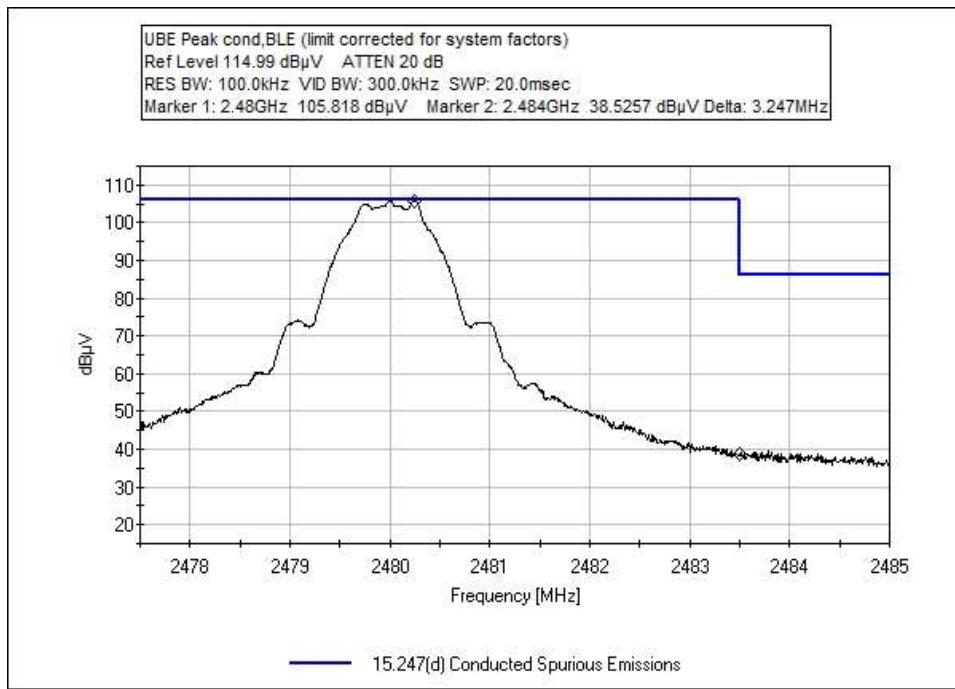

Test Setup Photo(s)



15.247(d) Radiated Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
 Customer: **Nalloy, LLC.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102802** Date: 3/25/2020
 Test Type: **Maximized Emissions** Time: 11:21:20
 Tested By: Matthew Harrison Sequence#: 33
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 20-23° C

Humidity: 28-45%

Pressure: 100.8-101.8 kPa

Frequency Range: 9kHz-25GHz

Frequency tested: 2402, 2440, 2480

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013 KDB 5508074 v05r02 4/2/2019


Test Mode: Transmitting

Test Setup: EUT is setup 0.8m high on a Styrofoam table <1GHz and 1.5m high on a Styrofoam table >1GHz.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Nalloy, LLC. WO#: 102802 Sequence#: 33 Date: 3/25/2020
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

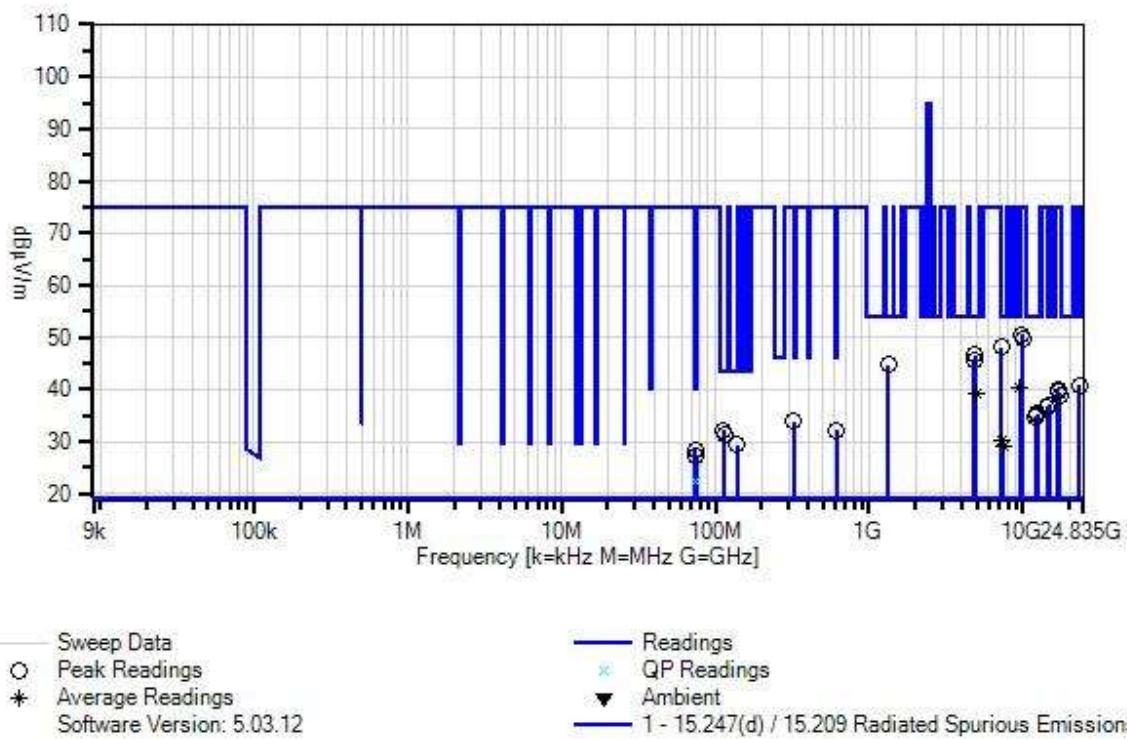

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN01467	Horn Antenna-ANSI C63.5 Calibration	3115	7/5/2019	7/5/2021
T2	ANP06515	Cable	Heliax	6/29/2018	6/29/2020
T3	ANP06540	Cable	Heliax	8/23/2019	8/23/2021
T4	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021
T5	AN03540	Preamp	83017A	5/13/2019	5/13/2021
T6	ANP07504	Cable	CLU40-KMKM-02.00F	1/17/2019	1/17/2021
	AN03116	High Pass Filter	11SH10-00313	1/22/2019	1/22/2021
T7	AN02742	Active Horn Antenna	AMFW-5F-18002650-20-10P	10/16/2018	10/16/2020
T8	AN02763-69	Waveguide	Multiple	4/23/2018	4/23/2020
T9	ANP06678	Cable	32026-29801-29801-144	2/20/2020	2/20/2022
T10	ANP07211	Cable	32026-29801-29801-18	8/7/2019	8/7/2021
T11	ANP07212	Cable	32026-29801-29801-18	8/7/2019	8/7/2021
	AN02673	Spectrum Analyzer	E4446A	2/22/2019	2/22/2021
T12	AN00052	Loop Antenna	6502	5/7/2018	5/7/2020
T13	AN02307	Preamp	8447D	1/10/2020	1/10/2022
T14	AN03628	Biconilog Antenna	3142E	6/11/2019	6/11/2021
T15	ANP06123	Attenuator	18N-6	4/5/2019	4/5/2021
T16	ANP05305	Cable	ETSI-50T	9/6/2019	9/6/2021
T17	ANP05360	Cable	RG214	2/3/2020	2/3/2022
T18	AN02741	Active Horn Antenna	AMFW-5F-12001800-20-10P	4/26/2019	4/26/2021

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8					
			T9	T10	T11	T12					
			T13	T14	T15	T16					
			T17	T18							
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	4880.390M	42.0	+0.0	+0.0	+0.0	+0.0	+0.0	46.7	54.0	-7.3	Vert
			+0.0	+0.0	+0.0	+0.0					121
			+3.9	+0.3	+0.5	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
2	4803.695M	41.2	+32.4	+4.1	+0.9	+0.0	+0.0	45.6	54.0	-8.4	Horiz
			-33.6	+0.6	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					

3	1332.400M	52.9	+25.2	+1.9	+0.4	+0.0	+0.0	44.7	54.0	-9.3	Vert
			-35.8	+0.1	+0.0	+0.0					135
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
4	1332.400M	52.9	+25.2	+1.9	+0.4	+0.0	+0.0	44.7	54.0	-9.3	Vert
			-35.8	+0.1	+0.0	+0.0					135
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
5	113.366M	44.9	+0.0	+0.0	+0.1	+0.0	+0.0	32.2	43.5	-11.3	Vert
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.7	+8.0	+5.8	+0.5					
			+0.6	+0.0							
6	73.922M	42.4	+0.0	+0.0	+0.1	+0.0	+0.0	28.5	40.0	-11.5	Vert
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.8	+7.1	+5.8	+0.4					
			+0.5	+0.0							
7	113.966M	44.0	+0.0	+0.0	+0.1	+0.0	+0.0	31.3	43.5	-12.2	Vert
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.7	+8.0	+5.8	+0.5					
			+0.6	+0.0							
8	323.816M	38.6	+0.0	+0.0	+0.2	+0.0	+0.0	33.8	46.0	-12.2	Horiz
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.1	+14.3	+5.8	+0.9					
			+1.1	+0.0							
9	75.187M	41.3	+0.0	+0.0	+0.1	+0.0	+0.0	27.3	40.0	-12.7	Horiz
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.8	+7.0	+5.8	+0.4					
			+0.5	+0.0							
10	612.584M	30.4	+0.0	+0.0	+0.3	+0.0	+0.0	32.2	46.0	-13.8	Horiz
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-28.2	+21.1	+5.8	+1.2					
			+1.6	+0.0							
11	137.510M	41.5	+0.0	+0.0	+0.1	+0.0	+0.0	29.4	43.5	-14.1	Vert
			+0.0	+0.0	+0.0	+0.0					130
			+0.0	+0.0	+0.0	+0.0					
			-27.6	+8.4	+5.8	+0.5					
			+0.7	+0.0							
12	4960.435M	34.4	+0.0	+0.0	+0.0	+0.0	+0.0	39.2	54.0	-14.8	Horiz
Ave			+0.0	+0.0	+0.0	+0.0					155
			+4.0	+0.3	+0.5	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					

^	4960.435M	42.7	+32.6	+4.2	+0.9	+0.0	+0.0	47.2	54.0	-6.8	Horiz
			-33.6	+0.4	+0.0	+0.0			High		132
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
14	75.120M	36.5	+0.0	+0.0	+0.1	+0.0	+0.0	22.5	40.0	-17.5	Vert
	QP		+0.0	+0.0	+0.0	+0.0				117	
			+0.0	+0.0	+0.0	+0.0					
			-27.8	+7.0	+5.8	+0.4					
			+0.5	+0.0							
^	75.120M	41.3	+0.0	+0.0	+0.1	+0.0	+0.0	27.3	40.0	-12.7	Vert
			+0.0	+0.0	+0.0	+0.0			130		
			+0.0	+0.0	+0.0	+0.0					
			-27.8	+7.0	+5.8	+0.4					
			+0.5	+0.0							
16	12399.950	39.8	+0.0	+7.0	+1.5	+0.0	+0.0	35.3	54.0	-18.7	Horiz
	M		+0.0	+0.0	+0.0	+0.0			High		
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-13.0							
17	12200.000	39.5	+0.0	+6.9	+1.4	+0.0	+0.0	35.0	54.0	-19.0	Vert
	M		+0.0	+0.0	+0.0	+0.0			Mid		
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-12.8							
18	12010.000	39.7	+0.0	+6.8	+1.4	+0.0	+0.0	34.9	54.0	-19.1	Vert
	M		+0.0	+0.0	+0.0	+0.0			Low		
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-13.0							
19	7320.000M	24.1	+0.0	+0.0	+0.0	+0.0	+0.0	30.2	54.0	-23.8	Horiz
	Ave		+0.0	+0.0	+0.0	+0.0			Mid	141	
			+4.9	+0.5	+0.7	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
^	7320.000M	38.9	+36.8	+5.4	+1.3	+0.0	+0.0	48.2	54.0	-5.8	Horiz
			-34.6	+0.4	+0.0	+0.0			Mid		
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
21	9760.000M	39.0	+37.5	+6.3	+1.3	+0.0	+0.0	50.6	74.9	-24.3	Vert
			-33.9	+0.4	+0.0	+0.0			Mid		
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
22	7439.885M	22.7	+0.0	+0.0	+0.0	+0.0	+0.0	29.0	54.0	-25.0	Vert
	Ave		+0.0	+0.0	+0.0	+0.0			High	155	
			+5.1	+0.5	+0.7	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					

^	7439.885M	37.3	+37.1	+5.5	+1.6	+0.0	+0.0	47.1	54.0	-6.9	Vert
			-34.7	+0.3	+0.0	+0.0			High		153
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
24	9920.065M	37.9	+37.5	+6.3	+1.3	+0.0	+0.0	49.6	74.9	-25.3	Vert
			-33.9	+0.5	+0.0	+0.0		High			153
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
25	7206.000M	39.2	+36.5	+5.3	+1.1	+0.0	+0.0	48.1	74.9	-26.8	Horiz
			-34.5	+0.5	+0.0	+0.0		Low			
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
26	23250.000M	42.6	+0.0	+0.0	+0.0	+0.0	+0.0	40.9	74.9	-34.0	Vert
			+0.0	+0.0	-15.2	+1.8					132
			+9.6	+0.9	+1.2	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
27	9608.760M Ave	33.4	+0.0	+0.0	+0.0	+0.0	+0.0	40.5	74.9	-34.4	Horiz
			+0.0	+0.0	+0.0	+0.0		Low			177
			+5.7	+0.6	+0.8	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
^	9608.760M	40.8	+0.0	+0.0	+0.0	+0.0	+0.0	47.9	74.9	-27.0	Horiz
			+0.0	+0.0	+0.0	+0.0		Low			
			+5.7	+0.6	+0.8	+0.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
29	16814.000M	40.4	+0.0	+9.0	+1.8	+0.0	+0.0	40.0	74.9	-34.9	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0		Low			
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-11.2							
30	17080.000M	40.1	+0.0	+9.0	+2.0	+0.0	+0.0	39.5	74.9	-35.4	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0		Mid			
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-11.6							
31	17359.950M	39.6	+0.0	+8.6	+1.8	+0.0	+0.0	38.7	74.9	-36.2	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0		High			
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-11.3							
32	14879.950M	41.3	+0.0	+8.5	+1.7	+0.0	+0.0	37.1	74.9	-37.8	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0		High			
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-14.4							


33	14640.000	41.9	+0.0	+8.2	+1.5	+0.0	+0.0	36.9	74.9	-38.0	Vert
	M		+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					Mid
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-14.7							
34	14412.000	42.0	+0.0	+8.0	+1.4	+0.0	+0.0	36.7	74.9	-38.2	Vert
	M		+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					Low
			+0.0	+0.0	+0.0	+0.0					
			+0.0	-14.7							
35	31.278k	46.6	+0.0	+0.0	+0.0	+0.0	-40.0	17.5	74.9	-57.4	Para, 117
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+10.9					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0						
36	180.000k	47.1	+0.0	+0.0	+0.0	+0.0	-40.0	16.8	74.9	-58.1	Para, 117
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+9.7					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0						
37	28.478M	19.8	+0.0	+0.3	+0.1	+0.0	-20.0	6.2	74.9	-68.7	Para, 117
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0	+6.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0						


Band Edge

Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
2390.0	GFSK	Linear Polarized	37.4	<54	Pass
2400.0	GFSK	Linear Polarized	60.3	<74.9	Pass
2483.5	GFSK	Linear Polarized	44.2	<54	Pass

Band Edge Plots

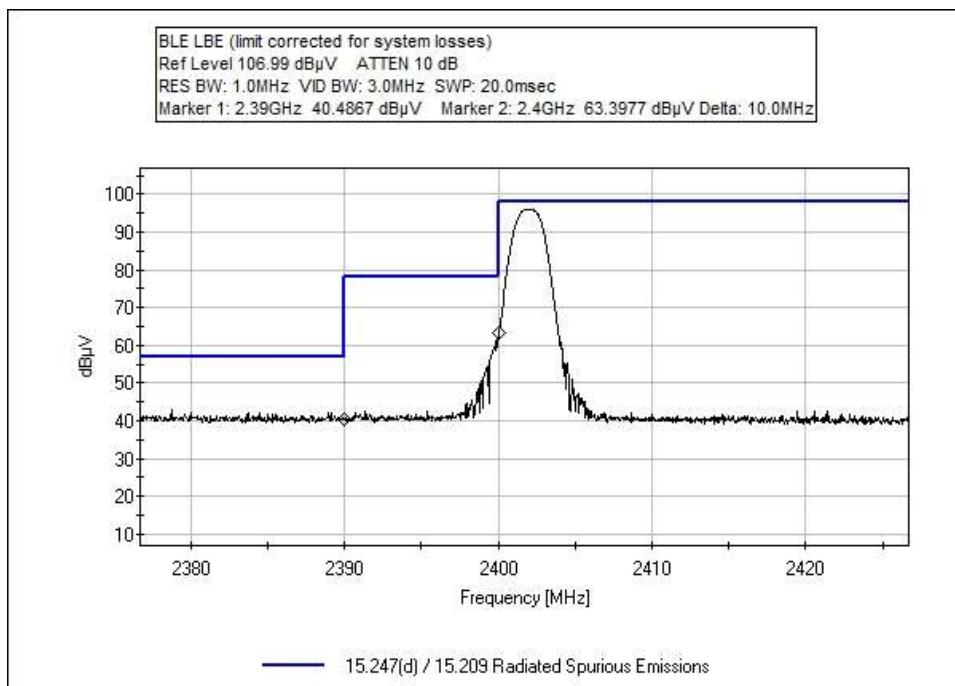

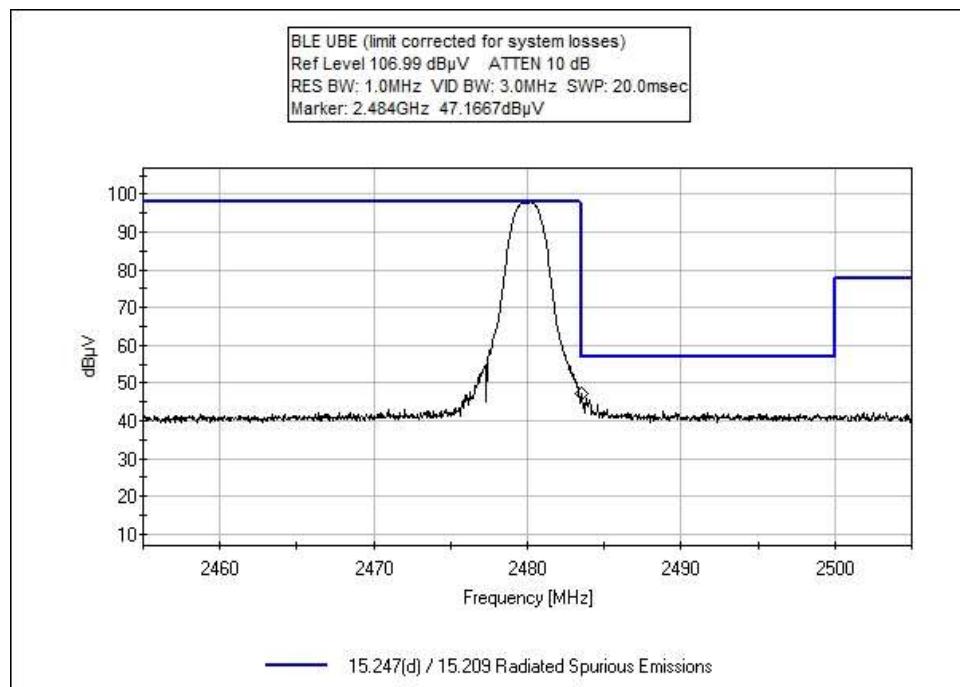

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
 Customer: **Nalloy, LLC.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **102802** Date: 3/25/2020
 Test Type: **Maximized Emissions** Time: 08:05:40
 Tested By: Steven Pittsford Sequence#: 34
 Software: EMITest 5.03.12

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 22° C

Humidity: 28%

Pressure: 101.3 kPa

Frequency Range: 2.377-2.505GHz

Frequency tested: 2402, 2480

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013 KDB 5508074 v05r02 4/2/2019

Test Mode: Transmitting

Test Setup: EUT is setup 1.5m high on a Styrofoam table.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN01467	Horn Antenna-ANSI C63.5 Calibration	3115	7/5/2019	7/5/2021
T2	ANP06515	Cable	Heliax	6/29/2018	6/29/2020
T3	ANP06540	Cable	Heliax	8/23/2019	8/23/2021
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021
T4	AN03540	Preamp	83017A	5/13/2019	5/13/2021
T5	ANP07504	Cable	CLU40-KMKM- 02.00F	1/17/2019	1/17/2021

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	2483.500M	47.2	+27.6 +0.3	+2.7	+0.6	-34.2	+0.0	44.2	54.0	-9.8	Vert 144
2	2400.000M	63.4	+27.7 +0.3	+2.6	+0.6	-34.3	+0.0	60.3	74.9	-14.6	Vert 201
3	2390.000M	40.5	+27.7 +0.3	+2.6	+0.6	-34.3	+0.0	37.4	54.0	-16.6	Vert 201

Test Setup Photo(s)



Below 1GHz



Below 1GHz



Above 1GHz



Above 1GHz

15.207 AC Conducted Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
 Customer: **Nalloy, LLC.**
 Specification: **15.207 AC Mains - Average**
 Work Order #: **102802** Date: 3/25/2020
 Test Type: **Conducted Emissions** Time: 15:39:55
 Tested By: Matthew Harrison Sequence#: 41
 Software: EMITest 5.03.12 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 22° C

Humidity: 28%

Pressure: 101.3 kPa

Frequency Range: 150kHz-30MHz

Frequency tested: 2440

Firmware power setting: Default

EUT Firmware:

Protocol /MCS/Modulation: BLE, 1Mbps

Antenna type: Linear Polarized

Antenna Gain: 3.7 dBi.

Duty Cycle: 100% Modulated


Test Method: ANSI C63.10: 2013

Test Mode: Transmitting

Test Setup: EUT is setup for conducted measurements.

Setup: EUT is connected to a Laptop via USB and Audio cable.

Low, Mid, and High channels along with all data rates investigated, worst-case provided.

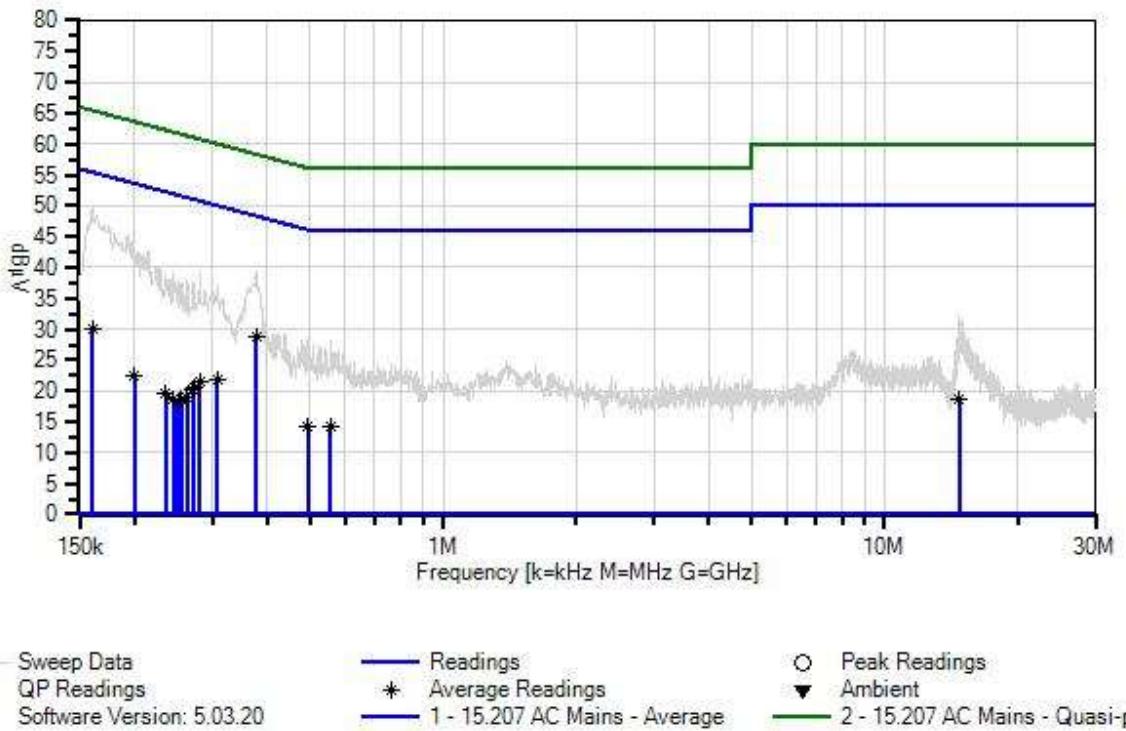Nalloy, LLC. WO#: 102802 Sequence#: 41 Date: 3/25/2020
 15.207 AC Mains - Average Test Lead: 120V 60Hz Line

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021
T1	ANP06219	Attenuator	768-10	4/13/2018	4/13/2020
T2	ANP06515	Cable	Heliax	6/29/2018	6/29/2020
T3	ANP06540	Cable	Heliax	8/23/2019	8/23/2021
T4	AN01311	50uH LISN-Line1 (L)	3816/2	2/24/2020	2/24/2022
	AN01311	50uH LISN-Line2 (N)	3816/2	2/24/2020	2/24/2022
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/10/2020	1/10/2022

Measurement Data:			Reading listed by margin.				Test Lead: Line				
#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			MHz	dB μ V	dB	dB	dB	Table	dB μ V	dB μ V	dB
											Ant
1	377.615k	19.0	+9.1 +0.2	+0.0	+0.0	-0.6	+0.0	28.9	48.3	-19.4	Line
^	377.615k	30.6	+9.1 +0.2	+0.0	+0.0	-0.6	+0.0	40.5	48.3	-7.8	Line
3	160.908k	18.7	+9.1 +0.6	+0.0	+0.0	-1.7	+0.0	30.1	55.4	-25.3	Line
^	160.908k	41.9	+9.1 +0.6	+0.0	+0.0	-1.7	+0.0	53.3	55.4	-2.1	Line
5	308.531k	12.0	+9.1 +0.1	+0.0	+0.0	-0.7	+0.0	21.9	50.0	-28.1	Line
^	308.530k	28.5	+9.1 +0.1	+0.0	+0.0	-0.7	+0.0	38.4	50.0	-11.6	Line
7	280.897k	11.4	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	21.4	50.8	-29.4	Line
^	280.897k	30.9	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	40.9	50.8	-9.9	Line
9	272.898k	10.5	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	20.5	51.0	-30.5	Line
10	270.716k	10.1	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	20.1	51.1	-31.0	Line
^	270.716k	29.2	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	39.2	51.1	-11.9	Line
^	272.897k	28.8	+9.1 +0.1	+0.0	+0.0	-0.8	+0.0	38.8	51.0	-12.2	Line
13	200.177k	11.8	+9.1 +0.2	+0.0	+0.0	-1.2	+0.0	22.3	53.6	-31.3	Line
^	200.177k	35.4	+9.1 +0.2	+0.0	+0.0	-1.2	+0.0	45.9	53.6	-7.7	Line
15	14.752M	8.4	+9.1 +0.2	+0.2	+0.1	-0.6	+0.0	18.6	50.0	-31.4	Line
^	14.752M	23.3	+9.1 +0.2	+0.2	+0.1	-0.6	+0.0	33.5	50.0	-16.5	Line
17	495.423k	4.7	+9.1 +0.2	+0.0	+0.0	-0.4	+0.0	14.4	46.1	-31.7	Line
^	495.422k	19.8	+9.1 +0.2	+0.0	+0.0	-0.4	+0.0	29.5	46.1	-16.6	Line
19	556.508k	4.4	+9.1 +0.3	+0.0	+0.0	-0.4	+0.0	14.2	46.0	-31.8	Line
^	556.508k	19.2	+9.1 +0.3	+0.0	+0.0	-0.4	+0.0	29.0	46.0	-17.0	Line
21	263.444k	8.9	+9.1 +0.2	+0.0	+0.0	-0.8	+0.0	19.0	51.3	-32.3	Line
^	263.444k	29.6	+9.1 +0.2	+0.0	+0.0	-0.8	+0.0	39.7	51.3	-11.6	Line
23	235.083k	9.3	+9.1 +0.2	+0.0	+0.0	-1.0	+0.0	19.6	52.3	-32.7	Line
^	235.083k	30.5	+9.1 +0.2	+0.0	+0.0	-1.0	+0.0	40.8	52.3	-11.5	Line

25	255.445k	8.4	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	18.6	51.6	-33.0	Line
26	245.264k	8.5	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	18.7	51.9	-33.2	Line
^	245.263k	31.1	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	41.3	51.9	-10.6	Line
28	251.082k	8.2	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	18.4	51.7	-33.3	Line
^	251.081k	29.4	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	39.6	51.7	-12.1	Line
^	255.444k	28.9	+9.1 +0.2	+0.0	+0.0	-0.9	+0.0	39.1	51.6	-12.5	Line



Test Location: CKC Laboratories, Inc. • 22116 23rd Dr SE • Bothell, WA 98021 • 800-500-4362
Customer: **Nalloy, LLC.**
Specification: **15.207 AC Mains - Average**
Work Order #: **102802** Date: 3/25/2020
Test Type: **Conducted Emissions** Time: 15:33:21
Tested By: Matthew Harrison Sequence#: 42
Software: EMITest 5.03.12 120V 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 22° C Humidity: 28% Pressure: 101.3 kPa
Frequency Range: 150kHz-30MHz Frequency tested: 2440 Firmware power setting: Default EUT Firmware: Protocol /MCS/Modulation: BLE, 1Mbps
Antenna type: Linear Polarized Antenna Gain: 3.7 dBi.
Duty Cycle: 100% Modulated
Test Method: ANSI C63.10: 2013 Test Mode: Transmitting Test Setup: EUT is setup for conducted measurements. Setup: EUT is connected to a Laptop via USB and Audio cable.
Low, Mid, and High channels along with all data rates investigated, worst-case provided.

Nalloy, LLC. WO#: 102802 Sequence#: 42 Date: 3/25/2020
 15.207 AC Mains - Average Test Lead: 120V 60Hz Neutral

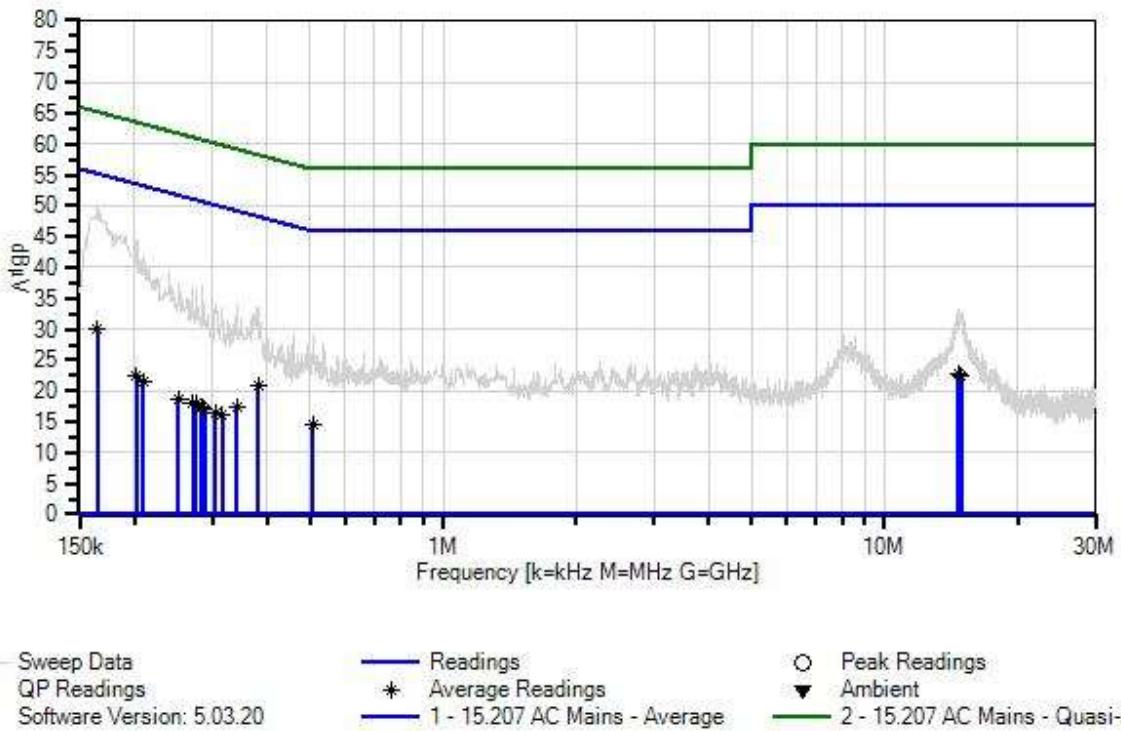

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2019	11/18/2021
T1	ANP06219	Attenuator	768-10	4/13/2018	4/13/2020
T2	ANP06515	Cable	Heliax	6/29/2018	6/29/2020
T3	ANP06540	Cable	Heliax	8/23/2019	8/23/2021
	AN01311	50uH LISN-Line1 (L)	3816/2	2/24/2020	2/24/2022
T4	AN01311	50uH LISN-Line2 (N)	3816/2	2/24/2020	2/24/2022
T5	AN02611	High Pass Filter	HE9615-150K-50-720B	1/10/2020	1/10/2022

#	Freq MHz	Rdng dB μ V	Reading listed by margin.				Test Lead: Neutral			
			T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB
			Ave	+0.5	+0.0	+0.0	-1.6	+0.0	30.1	-25.1
1	164.544k	18.9	+9.1	+0.0	+0.0	-1.6	+0.0	30.1	55.2	-25.1
	Ave		+0.5							Neutr
^	164.544k	41.6	+9.1	+0.0	+0.0	-1.6	+0.0	52.8	55.2	-2.4
			+0.5							Neutr
3	14.697M	12.5	+9.1	+0.2	+0.1	-0.6	+0.0	22.7	50.0	-27.3
	Ave		+0.2							Neutr
^	14.697M	24.1	+9.1	+0.2	+0.1	-0.6	+0.0	34.3	50.0	-15.7
			+0.2							Neutr
5	380.524k	11.1	+9.1	+0.0	+0.0	-0.5	+0.0	20.9	48.3	-27.4
	Ave		+0.2							Neutr
^	380.524k	24.9	+9.1	+0.0	+0.0	-0.5	+0.0	34.7	48.3	-13.6
			+0.2							Neutr
7	14.923M	12.3	+9.1	+0.2	+0.1	-0.6	+0.0	22.5	50.0	-27.5
	Ave		+0.2							Neutr
^	14.923M	23.8	+9.1	+0.2	+0.1	-0.6	+0.0	34.0	50.0	-16.0
			+0.2							Neutr
9	202.359k	12.0	+9.1	+0.0	+0.0	-1.2	+0.0	22.5	53.5	-31.0
	Ave		+0.2							Neutr
^	202.358k	36.7	+9.1	+0.0	+0.0	-1.2	+0.0	47.2	53.5	-6.3
			+0.2							Neutr
11	507.785k	5.0	+9.1	+0.0	+0.0	-0.4	+0.0	14.7	46.0	-31.3
	Ave		+0.2							Neutr
^	507.785k	20.3	+9.1	+0.0	+0.0	-0.4	+0.0	30.0	46.0	-16.0
			+0.2							Neutr
13	209.631k	11.1	+9.1	+0.0	+0.0	-1.1	+0.0	21.5	53.2	-31.7
	Ave		+0.2							Neutr
^	209.630k	33.6	+9.1	+0.0	+0.0	-1.1	+0.0	44.0	53.2	-9.2
			+0.2							Neutr
15	341.255k	7.5	+9.1	+0.0	+0.0	-0.6	+0.0	17.3	49.2	-31.9
	Ave		+0.1							Neutr
^	341.255k	25.4	+9.1	+0.0	+0.0	-0.6	+0.0	35.2	49.2	-14.0
			+0.1							Neutr
17	275.807k	8.1	+9.1	+0.0	+0.0	-0.8	+0.0	18.1	50.9	-32.8
	Ave		+0.1							Neutr
^	275.806k	27.7	+9.1	+0.0	+0.0	-0.8	+0.0	37.7	50.9	-13.2
			+0.1							Neutr
19	270.716k	8.1	+9.1	+0.0	+0.0	-0.8	+0.0	18.1	51.1	-33.0
	Ave		+0.1							Neutr
^	270.716k	28.2	+9.1	+0.0	+0.0	-0.8	+0.0	38.2	51.1	-12.9
			+0.1							Neutr
21	251.809k	8.4	+9.1	+0.0	+0.0	-0.9	+0.0	18.6	51.7	-33.1
	Ave		+0.2							Neutr
^	251.808k	29.0	+9.1	+0.0	+0.0	-0.9	+0.0	39.2	51.7	-12.5
			+0.2							Neutr
23	283.806k	7.5	+9.1	+0.0	+0.0	-0.8	+0.0	17.5	50.7	-33.2
	Ave		+0.1							Neutr

24	305.622k	6.7	+9.1	+0.0	+0.0	-0.7	+0.0	16.6	50.1	-33.5	Neutr
	Ave		+0.1								
^	305.622k	25.8	+9.1	+0.0	+0.0	-0.7	+0.0	35.7	50.1	-14.4	Neutr
			+0.1								
26	288.169k	7.1	+9.1	+0.0	+0.0	-0.7	+0.0	17.0	50.6	-33.6	Neutr
	Ave		+0.1								
^	283.805k	28.7	+9.1	+0.0	+0.0	-0.8	+0.0	38.7	50.7	-12.0	Neutr
			+0.1								
^	288.169k	25.7	+9.1	+0.0	+0.0	-0.7	+0.0	35.6	50.6	-15.0	Neutr
			+0.1								
29	315.803k	6.2	+9.1	+0.0	+0.0	-0.7	+0.0	16.1	49.8	-33.7	Neutr
	Ave		+0.1								
^	315.802k	25.0	+9.1	+0.0	+0.0	-0.7	+0.0	34.9	49.8	-14.9	Neutr
			+0.1								

Test Setup Photo(s)



SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB μ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point, the measuring device is set into the linear mode and the scan time is reduced.