

Report:	Electromagnetic compatibility and Radio spectrum Matters		Report no:	19CH-00891.R03
Product:	XC Tracer Maxx (FLARM)			
Applicant:	XC Tracer GmbH, Junkerngasse 53, 3011 Bern, SWITZERLAND			
Manufacturer:	XC Tracer GmbH, Junkerngasse 53, 3011 Bern, SWITZERLAND			
Model/Type reference:	XC Tracer Maxx	Serial no:	Proto 1, Proto 2 and Proto4	
Trade mark:	XC Tracer	Date of tests:	2020-01-10 to 2020-04-25	

Standards		Result
47 CFR, Part 15	(Subpart C, Intentional radiators: §§ 15.209/247)	Pass
	(Subpart B, Class B digital devices: §§ 15.107/109)	Pass

These results were achieved with modifications of EUT (Proto 4).


Test performed by
B. Itzcovich, F. Wyler
EMC Test Engineer

Report prepared by
B. Itzcovich, F. Wyler
EMC Test Engineer

Report controlled and approved by
T. Houriet
EMC Test Engineer







Rossens, 2020-07-03

(Issue Date)

Main language : English

The present document results from tests on one specimen and does not prejudice to the conformity of all the manufactured products.
This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
w:\lablage_dacore\archive\2019\19ch-00891\4 prüfberichte\19ch-00891.r03 xc tracer fcc.docx

Contents

	Page
FOREWORD	3
1. SUMMARY OF TEST RESULTS	4
2. APPLIED STANDARDS	4
3. APPLICANT	5
4. EQUIPMENT UNDER TEST	5
4.1 Identification*	5
4.2 Pictures of the EUT	6
4.3 Classification	7
4.4 Transmitter characteristics (according to XC Tracer GmbH)	8
4.5 Receiver characteristics (according to XC Tracer GmbH)	8
4.6 Ports	8
5. TEST CONDITIONS	9
5.1 Climatic conditions, location and date	9
5.2 Test facility and methodology	9
5.3 Attendant persons	9
5.4 Test configuration	9
5.5 Operating conditions	10
5.6 Auxiliary equipment	10
6. TEST RESULTS	11
6.1 Channel 20dB-bandwidth	12
6.2 Carrier frequency separation	14
6.3 Number of hopping channels	16
6.4 Time of occupancy (dwell time)	18
6.5 Pseudorandom frequency hopping sequence and equal hopping frequency use	20
6.6 Antenna gain & effective radiated power	21
6.7 Maximum output power (conducted)	23
6.8 Band-edge emission (conducted)	25
6.9 Spurious emissions – conducted (transmitter – 9 kHz to 9.5 GHz)	29
6.10 Spurious emissions, transmit mode – radiated	33
6.10.1 9 kHz to 30 MHz	33
6.10.2 30 MHz to 1 GHz	43
6.10.3 1 GHz to 9.3 GHz	50
6.11 Spurious emissions, receive mode – radiated	59
6.11.1 30 MHz to 1 GHz	59
6.11.2 1 GHz to 6 GHz	65
6.12 Conducted emission – Interference voltage	68
6.13 Designation of emission	73
7. APPENDIX	74
7.1 Test equipment	75

Foreword

According to XC Tracer GmbH, the «U-BLOX ANNA-B112» Radio Module which is included in the EUT has been tested by its manufacturer in accordance with the all relevant rules and standards. Therefore, tests have not been carried out with «U-BLOX ANNA-B112» wireless communication active. According to XC Tracer GmbH, this radio module is installed in accordance with the instructions of its manufacturer, and cannot transmit simultaneously with the 902 – 920 MHz transmitter (FLARM)

Design changes are implemented in the Proto 4 device. Therefore the spurious measurements from 1 to 10 GHz for the carrier frequency of 915 MHz were repeated, to check the harmonics of the carrier.

1. Summary of test results

§	Test Type	Result
6	Emission	CFR 47 Part 15
6.1	Channel 20dB-bandwidth CFR 47 § 15.247 (a)(1)	204 kHz
6.2	Carrier frequency separation CFR 47 § 15.247 (a)(1)	Pass (400 kHz)
6.3	Number of hopping channels CFR 47 § 15.247 (a)(1)(iii)	Pass (n = 63)
6.4	Time of occupancy (dwell time) CFR 47 § 15.247 (a)(1)(iii)	Pass
6.5	Pseudorandom frequency hopping sequence and equal hopping frequency use CFR 47 § 15.247 (a)(1)	Pass ¹
6.6	Antenna gain (& effective radiated power) CFR 47 § 15.247 (b)(4)	Pass (-2.3 dBi)
6.7	Maximum output power (conducted) CFR 47 § 15.247 (b)(1)	Pass (15.4 dBm)
6.8	Band-edge emission (conducted) CFR 47 § 15.247 (d)	Pass
6.9	Spurious emissions – conducted (transmitter) CFR 47 § 15.247 (d)	Pass
6.10	Spurious emissions – radiated (transmitter) CFR 47 § 15.247 (d) CFR 47 § 15.209 (a) CFR 47 § 15.205	Pass
6.11	Radiated emission – receiver CFR 47 § 15.109	Pass
6.12	Conducted emission CFR 47 § 15.207	Pass
6	Emission	CFR 47 Part 2
6.13	Designation of emission FCC 47 §2.201 FCC 47 §2.202	200KFXD

1. Declared by manufacturer

2. Applied standards

47 CFR Part 15 Subpart C	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart C: "Intentional Radiators"
47 CFR Part 15 Subpart B	Code of Federal Regulations - Title 47 - Telecommunication, Part 15, Subpart B: "Unintentional Radiators"

3. Applicant

Applicant name and address	XC Tracer GmbH Junkerngasse 53 3011 Bern SWITZERLAND
Contact Person	Mr Koni Schafroth
Telephone	+41 79 478 64 14
E-mail	info@xctracer.com

4. Equipment under test

4.1 Identification*


Manufacturer name and address	XC Tracer GmbH Junkerngasse 53 3011 Bern SWITZERLAND
Production country	Switzerland
Brand name	XC Tracer
Product	XC Tracer Maxx (FLARM)
Product description	Flight measurement instrument for Paragliders & Hanggliders
Model number	XC Tracer Maxx
Serial no	Proto 1, Proto 2 and Proto4
Software version	Test software PowerFLARM 6.93beta, Build 7718b5673; Date 2019-12-17
FCC ID	2AVOQ01
Lowest Frequency considered	20 kHz (charge pump for LED driver)
Highest frequency considered	48 MHz (CPU) / 927.6 MHz (FLARM Transmitter carrier)
Supply	U = 3.7 VDC / I = 37 mA (from Battery) U = 5 VDC / I _{max} = 0.5 A (for charging the Battery on USB port)
Dimension	~ 9.5 cm x 2 cm x 7 cm (l x w x h)
Technical	None. The equipment is completely identified by the above-mentioned information. XC Tracer GmbH assures the traceability of the documentation and is responsible for the product identification.

* According to information provided by XC Tracer GmbH and not verified by Eurofins Electric & Electronic Product Testing AG

4.2 Pictures of the EUT




Front view

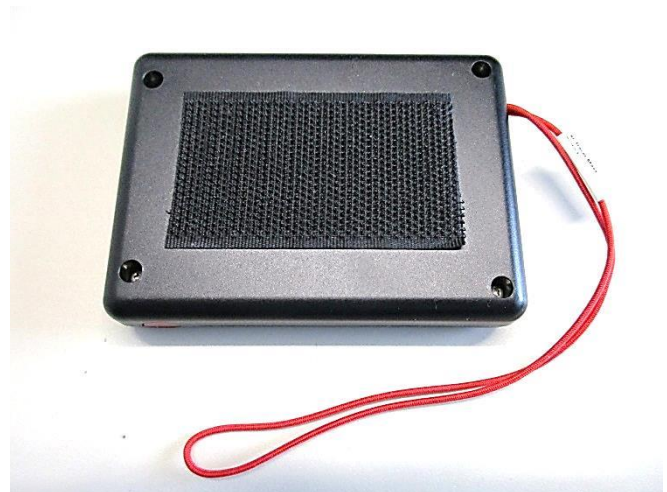


Rear view




Left view (with marking example and USB port)

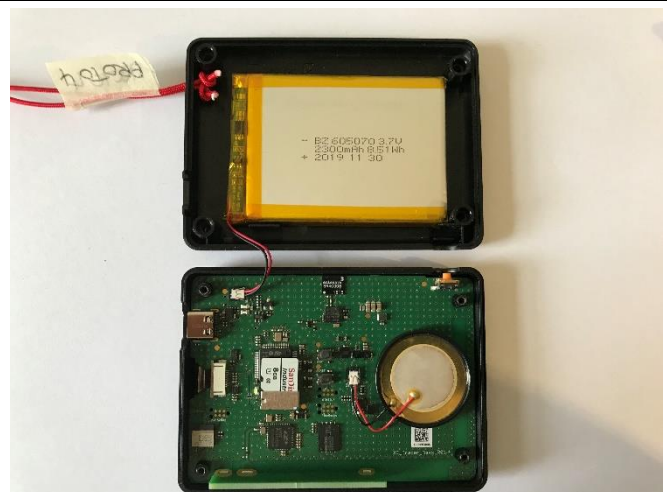

Internal view

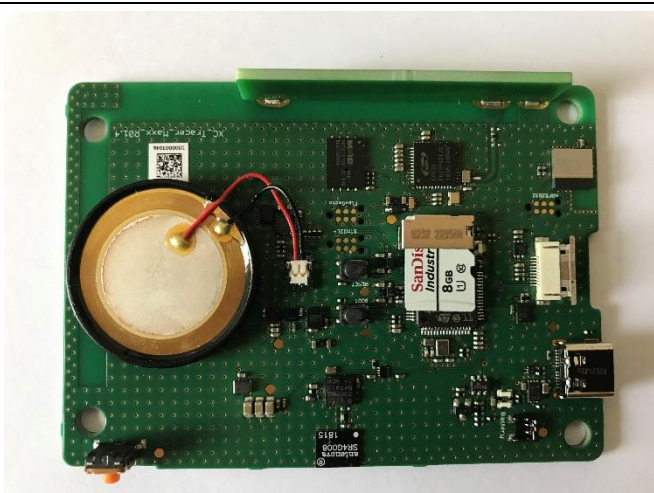

Print Front view

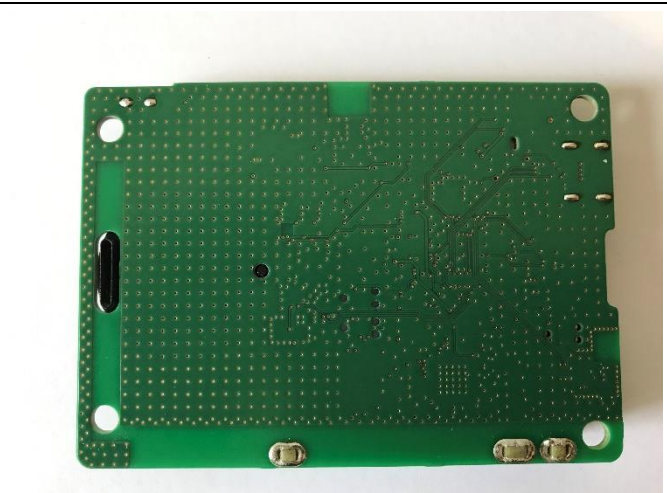

Print Rear view

4.3 Classification

CFR 47 Part 15	☒ Unintentional radiator (Subpart B), Receive and charging modes ☐ Class A digital device ☒ Class B digital device ☒ The highest frequency of the internal sources of the EUT is less than 108 MHz (measurement shall be made up to 1 GHz). ☐ The highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz (measurement shall be made up to 2 GHz). ☐ The highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz (measurement shall be made up to 5 GHz). ☐ The highest frequency of the internal sources of the EUT is above 1 GHz (measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is lower). ☒ Intentional radiator (Subpart C), Transmit mode ☒ The highest fundamental frequency of the EUT is less than 10 GHz (measurement shall be made up to the tenth harmonic or 40 GHz, whichever is lower). ☐ The highest fundamental frequency of the EUT is between 10 GHz and 30 GHz (measurement shall be made up to the fifth harmonic or 100 GHz, whichever is lower). ☐ The highest fundamental frequency of the EUT is above 30 GHz (measurement shall be made up to the fifth harmonic or 200 GHz, whichever is lower).
----------------	--

4.4 Transmitter characteristics (according to XC Tracer GmbH)

Method of frequency generation	☒ Crystal ☐ Synthesizer ☐
Transmitter operating frequency range (OFR) The OFR is the total range of frequencies covered by one type, or by a family of equipment. It is noted that a family of equipment may be capable of covering a wider frequency range than the alignment frequency range of one type of equipment.	902.6 MHz to 927.4 MHz
Channel separation (if applicable)	0.400 MHz
Number of channels	63
Maximum rated output power	15.4 dBm (at transmitter temporary RF output connector)
Variable carrier output	☒ Transmitter carrier output is not variable. RF output: $P_{OUT} = 34.6 \text{ mW}$ ☐ Transmitter carrier output is variable. Max. RF output: $P_{OUT MAX} = \dots \text{ mW}$ Min. RF output: $P_{OUT MIN} = \dots \text{ mW}$ ☐ RF output continuously variable ☐ RF output stepped: 1 dB per step
Modulation	☐ Amplitude ☐ Frequency: Deviation kHz ☐ Phase ☐ Pulse Pulse repetition frequency Duty cycle ☒ Other FSK
	☐ Transmitter can be operated without modulation ☒ Transmitter can only be operated with modulation

4.5 Receiver characteristics (according to XC Tracer GmbH)

Receiver operating frequency range	902.6 MHz to 927.4 MHz
Channel separation (if applicable)	0.400 MHz
Number of channels	63

4.6 Ports

Port	Cable			Remark
	Max. length	Type	Screen	
USB	2 m (≤ 3 m)	USB C	Yes	EUT not intended to transmit when USB cable is connected. EUT switches to charging mode when USB cable is connected

5. Test conditions

5.1 Climatic conditions, location and date

Location	Date	Temp.	Pressure	Rel. humidity
Eurofins Electric & Electronic Product Testing AG 1728 Rossens SWITZERLAND	2020-01-10 to 2020-04-25	See § 6		

5.2 Test facility and methodology

The test site is accepted by FCC:
 - Test Firm Registration Number: 683197
 - Designation Number: CH5001

Conducted and radiated measurements are performed according to the ANSI C63.4-2014 and C63.10-2013 procedures.

5.3 Attendant persons

Test Engineer(s):

Messrs B. Itzcovich, F. Wyler
 EMC Test Engineer

Other(s):

Name	Company
Mr Koni Schafroth	XC Tracer GmbH

5.4 Test configuration

See set-up drawings and pictures in relevant test paragraph

5.5 Operating conditions

Power supply during tests if not stated otherwise in § 6 : 5 V_{DC} (USB)

- Continuous hopping transmission of random data on three frequencies
- Normal operation: transmission of random data with hopping sequence
- Continuous reception on single frequency
- Continuous transmission of random data on one frequency, Duty 100%


5.6 Auxiliary equipment

The following equipment is used for the monitoring of the EUT or is necessary for the EUT but is not part of the EUT

Product	Brand	Model No.	ID	Remark
AC – USB adaptor	SAMSUNG	EP-TA50EWE	Reference Eurofins	100 – 240 V _{AC} input, 5 V _{DC} output (USB). Used for tests in charging mode



AC – USB adaptor with cable

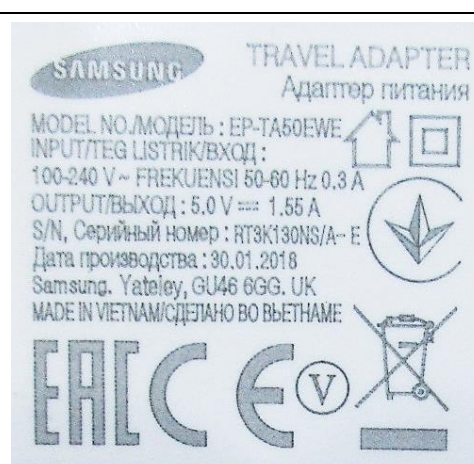

Marking on AC - USB adaptor

6. Test results

6.1 Channel 20dB-bandwidth

Introduction: Channel-bandwidth measured at -20 dBc.


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Method: Measurement on the temporary antenna connector

Limit: - - -

Test set-up:

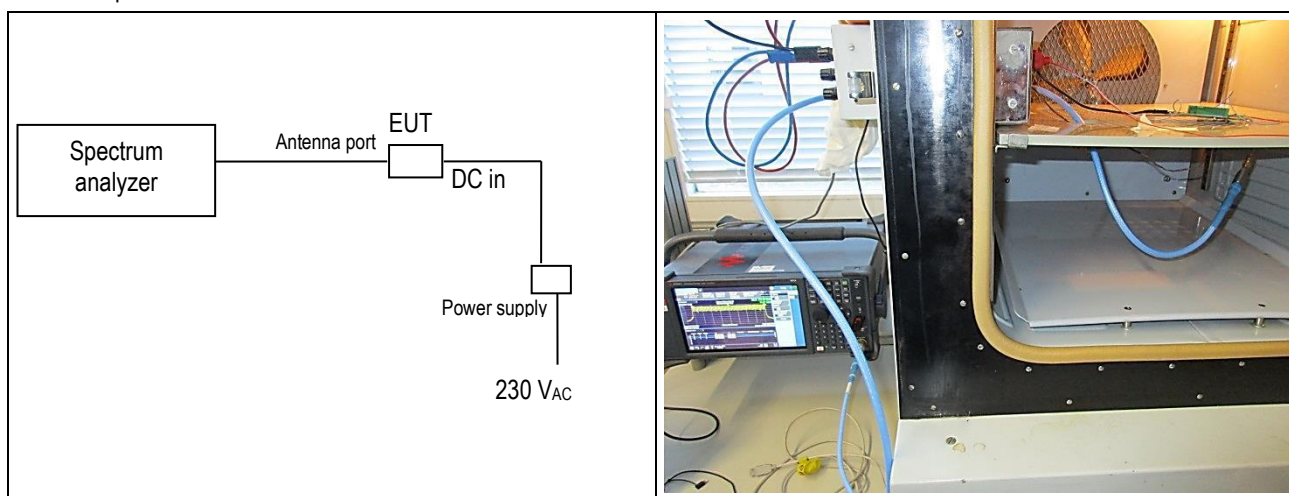

Remarks: - - -



Test equipment:

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Results of the test

Applicant: XC Tracer GmbH
 EUT: XC Tracer Maxx (FLARM) (Proto 2)
 Operating mode: TX, f = 902.6 / 915.0 / 927.4 MHz, modulated, power setting 16 dBm
 Cables connected to the EUT: USB, temporary supply & antenna cables
 Remarks: Measured on temporary antenna connector
 Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5
 Climatic conditions: Temperature: 23 °C Humidity: 30 % Pressure QFE: 955 hPa

frequency [MHz]	20 dB bandwidth [kHz]	Remarks
902.6	204	- - -
915.0	203	- - -
927.4	203	- - -

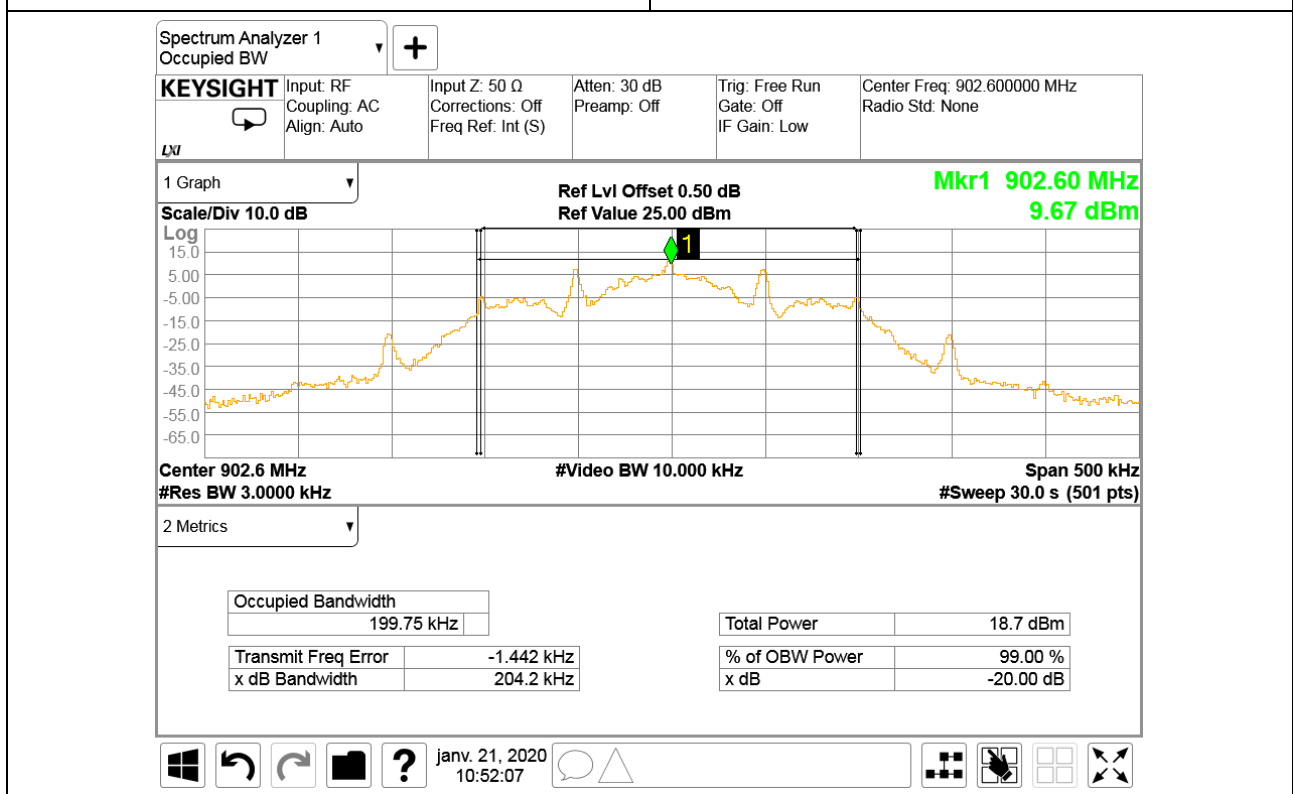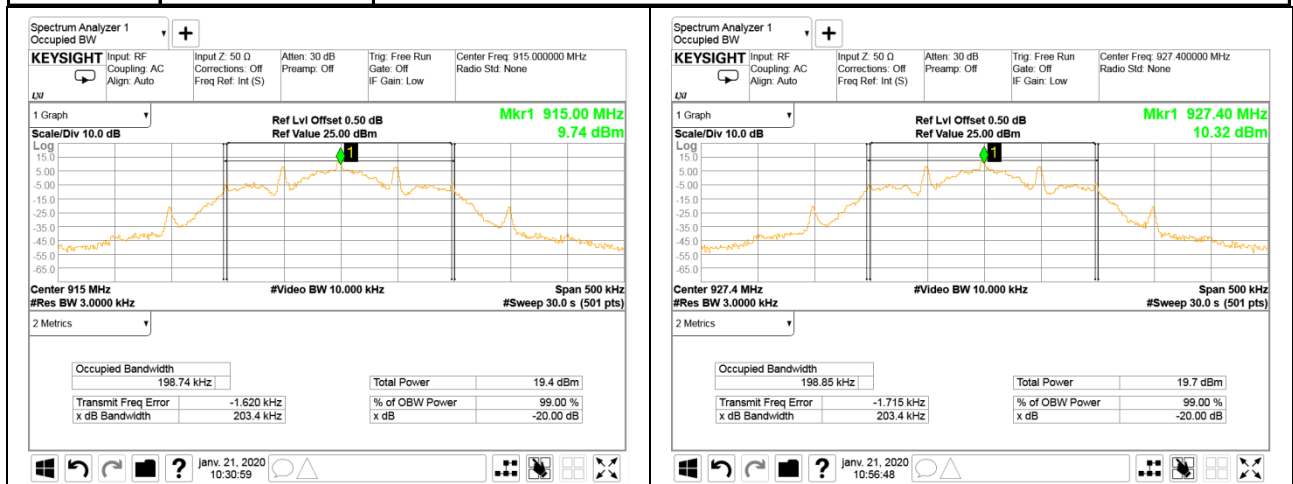

Place and date of test:
 Operator:

Rossens, 2020-01-21
 B. Itzcovich

6.2 Carrier frequency separation

Introduction: Determination of the frequency separation of two adjacent channels.


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{Hz/Hz}$

Method: Measurement of the frequency separation on the temporary antenna connector.

Requirement: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test set-up:

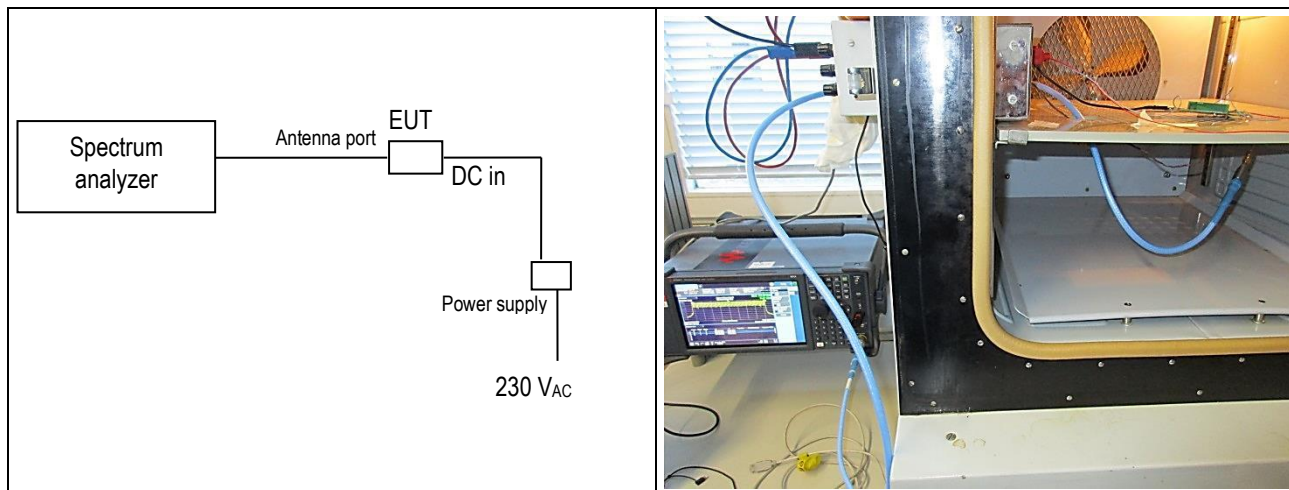

Remarks: - - -

Test equipment:

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH


EUT: XC Tracer Maxx (FLARM) (Proto 2)

Cables connected to the EUT: USB, temporary supply & antenna cables

Remarks: Measured on temporary antenna connector

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 23 °C Humidity: 30 % Pressure QFE: 955 hPa

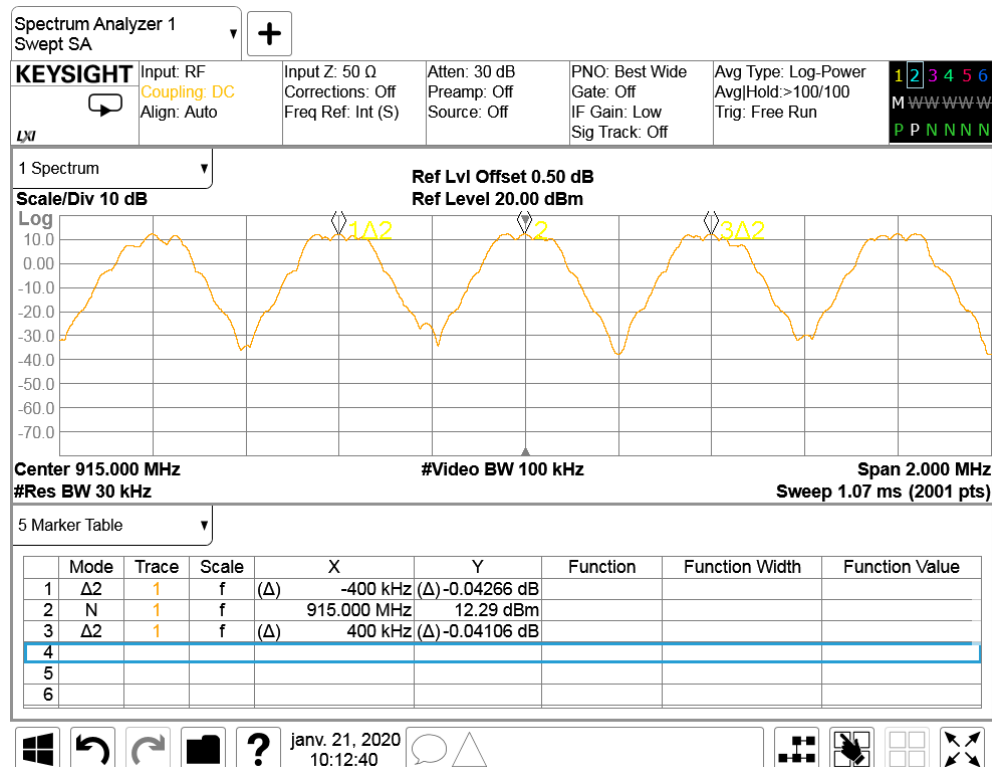Carrier frequency separation = 400 kHz > 204 kHz (see § 6.1)Place and date of test:
Operator:Rossens, 2020-01-21
B. Itzcovich

6.3 Number of hopping channels

Introduction: Number of hopping channels used in the frequency hopping system.


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{Hz/Hz}$

Method: Measurement of the frequency separation on the temporary antenna connector.

Requirement: For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

Test set-up:

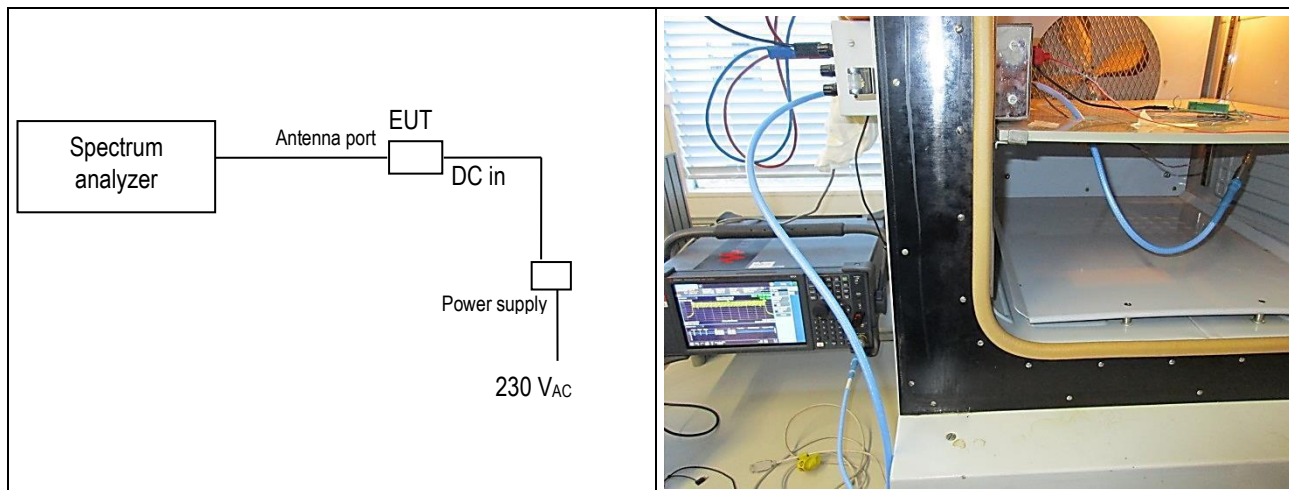

Remarks: - - -

Test equipment:

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH

EUT: XC Tracer Maxx (FLARM) (Proto 2)


Operating mode: Continuously hopping on all channels

Cables connected to the EUT: USB, temporary supply & antenna cables

Remarks: Measured on temporary antenna connector

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 23 °C Humidity: 30 % Pressure QFE: 955 hPa

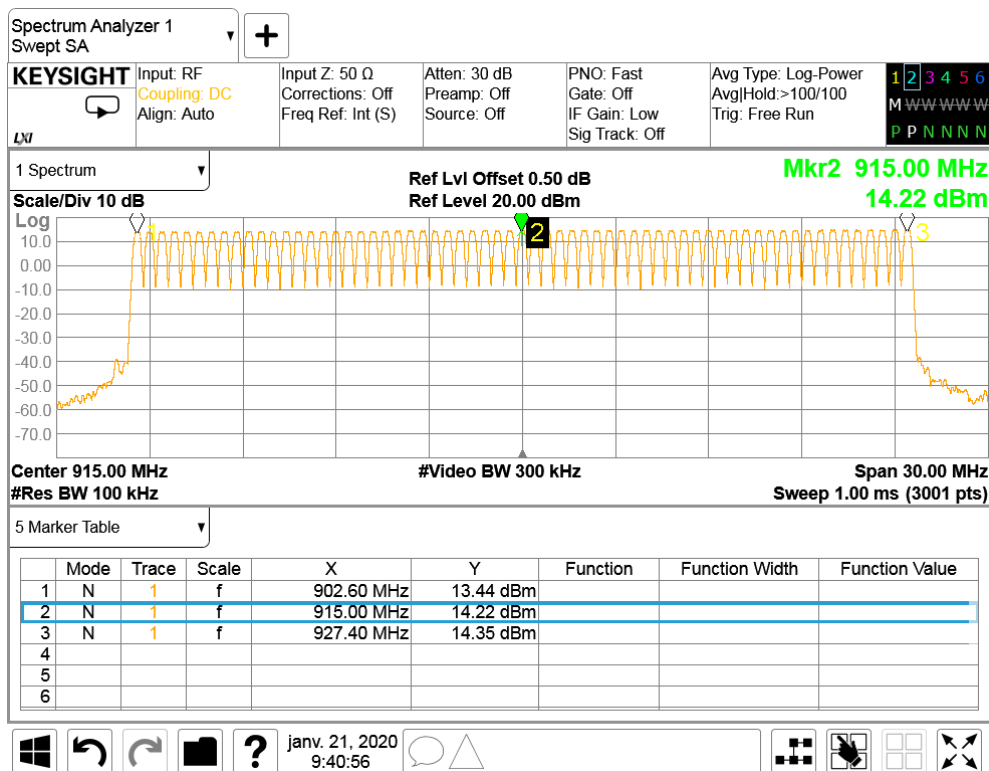

Number of hopping channels = 63 > 50

Place and date of test:
Operator:Rossens, 2020-01-21
B. Itzcovich

6.4 Time of occupancy (dwell time)

Introduction: Average duration during which the system stays on one channel.


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: $\pm 2.6 \mu\text{s/s}$

Method: Measurement on the antenna connector or a test fixture.

Requirement: For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test set-up:

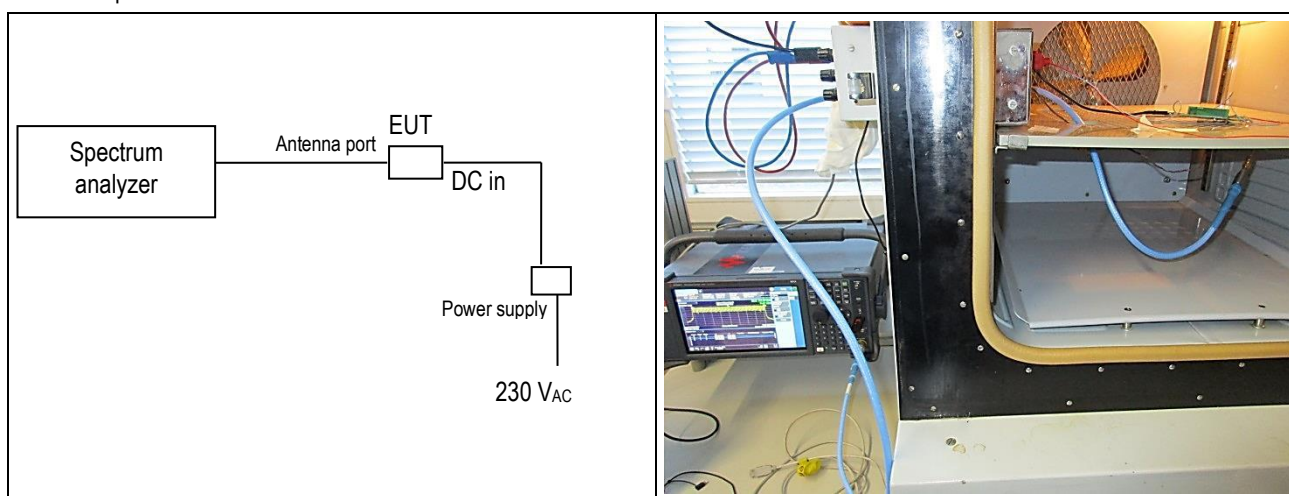

Remarks: - - -

Test equipment:

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH

EUT: XC Tracer Maxx (FLARM) (Proto 2)

Operating mode: Continuously hopping on all channels

Cables connected to the EUT: USB and temporary antenna cables

Remarks: Measured on temporary antenna connector

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 23 °C Humidity: 45 % Pressure QFE: 953 hPa

Frequency (MHz)	Measured Dwell time (ms)	Average use ratio of one frequency in a 20 second period	Maximum occupied dwell time of each frequency* (ms)	Limit	Result
902.6	5.17	0.635	3.28	400 ms in 20 s period	Pass
915.0	5.16	0.635	3.28	400 ms in 20 s period	Pass
927.4	5.16	0.635	3.28	400 ms in 20 s period	Pass

*Note: Two frequencies are used per second (declared by manufacturer), so in average, each frequency is used 2 x (20 s / 63 channels) in a 20 second period (also see § 6.5)

Example of pulse duration at frequency 915 MHz

Place and date of test:
Operator:

Rossens, 2020-01-21
B. Itzcovich

6.5 Pseudorandom frequency hopping sequence and equal hopping frequency use

Declared by manufacturer:

Pseudorandom frequency hopping sequence:


Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system, found in Section 2.1(c). Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

The hopping sequence is generated from a pseudo-random source, based on the current GPS time. Two frequencies are used per second.

Equal hopping frequency use:

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

The figure shows the number of times a particular frequency was used over 10.000 s:

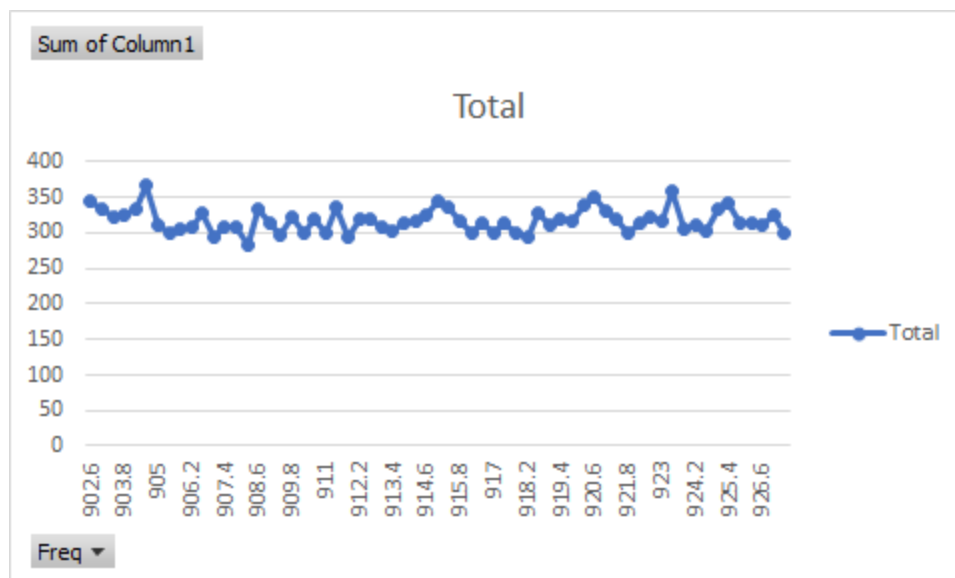


Since the frequency selection is pseudo-random based on the timestamp, and since every frequency slot is used for exactly one transmission, it is clear that on average you get uniform usage also.

6.6 Antenna gain & effective radiated power

- Introduction:** The effective radiated power is the power radiated by the antenna of a transmitter in its direction of maximum gain under specified conditions of measurement. The antenna gain is the difference (in dB) of the radiated ERP power and the conducted power.
- Test site:** ☒ SAC3 ☐ SAC10
- Distance:** ☐ 1 m ☒ 3 m ☐ 10 m ☐ 30 m
- Position of EUT:** 1.5 m (height of the equipment under test above floor)
- Meas. uncertainty:** ± 1.3 dB ($f < 300$ MHz) / ± 1.6 dB ($f > 300$ MHz)
- Test method:** The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The ERP / EIRP values are determined replacing the EUT by a substitution antenna (dipole or other). The limits on the plots represent the equivalent field levels for the required power limits.
- Limit:** Antenna gain 6 dBi (for a maximum conducted power of 1 W = 30 dBm). If antennas with directional gains exceeding 6 dBi are used, the maximum peak output power shall be reduced as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test set-up:

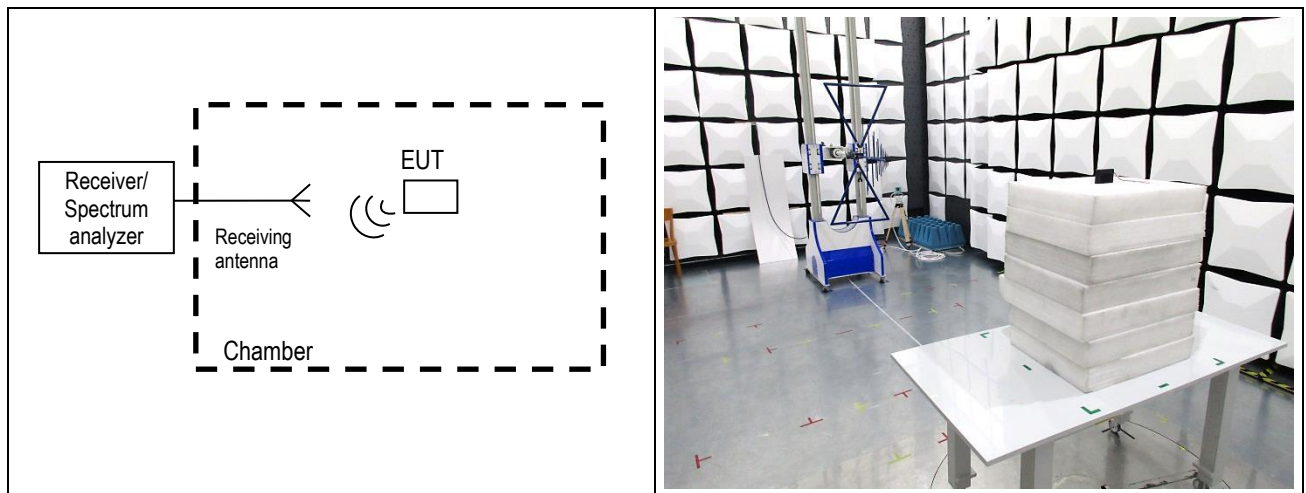

Remarks: - - -

Test equipment:

Spectrum analyzer	☒ 16-03	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☐ 18-01
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☐ 04-29		
Preamplifier	☐ 11-29	☐ 95-86	☐ 05-56	☐ 05-59	☐ 05-62	☐ 05-87
Antenna (bilog)	☐ 94-03	☒ 05-38				
HF-wattmeter	☐ 95-97	☐ 01-15	☐ 01-17	☐ 03-07	☒ 03-12	☐ 05-20
Thermocouple detector	☒ 09-04	☐ 05-74	☐ 05-88	☐ 07-03	☐ 10-27	☐ 03-14
Substitution antenna	☒ 89-01	☐ 00-52	☐ 84-04			
Oscilloscope	☐ 90-14	☐ 93-85	☐ 93-86	☐ 01-20	☐ 04-06	☐ 04-50
Multimeter	☐ 03-22	☐ 04-47	☐ 04-104	☐ 04-105	☐ 06-51	☐ 06-52
Frequency generator	☒ 13-16	☐ 00-42	☐ 03-39	☐ 07-02	☐ 04-89	☐ 05-78
Cables	☒ SAC3_RE_5m_2.0/3.0		☐ 06-01	☒ 10-51	☐ SMK	
Attenuator 10dB	☐ 11-36					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH

EUT: XC Tracer Maxx (FLARM) (Proto 1 and 2)

Operating mode: TX, f = 902 / 915 / 928 MHz, modulated, setting 16 dBm

Cables connected to the EUT: - - -

Remarks: RBW = 300 kHz, VBW = 910 kHz; Peak detector

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 24 °C Humidity: 30 % Pressure QFE: 938 hPa

f [MHz]	Measurement with EUT		Power at substitution ant.		Meas. with subst. ant.	Parameters of substitution ant.		Result			Polarisation
	U [dBuV]	preamp [dB]	P [dBm]	factor [dB]	U [dBuV]	gain [dB]	att. Cable [dB]	corr. [dB]	P ERP [dBm]	P ERP [W]	
902	80.9	0.0	10.0	-10	74.2	0	0	-74.20	6.70	4.68 mW	Vertical
902	89.0	0.0	10.0	-10	77.4	0	0	-77.40	11.60	14.45 mW	Horizontal
915	81.1	0.0	10.0	-10	73.9	0	0	-73.90	7.20	5.25 mW	Vertical
915	88.3	0.0	10.0	-10	76.4	0	0	-76.40	11.90	15.49 mW	Horizontal
928	81.3	0.0	10.0	-10	72.4	0	0	-72.40	8.90	7.76 mW	Vertical
928	88.7	0.0	10.0	-10	75.7	0	0	-75.70	13.00	19.95 mW	Horizontal

The antenna gain is the difference (in dB) of the radiated ERP power and the conducted power of § 6.7 :

frequency [MHz]	Conducted power [dBm]	Radiated power ERP [dBm]	Antenna gain [dBi]	Remarks
902	13.92	11.60	-2.32	- - -
915	14.65	11.90	-2.75	- - -
928	15.39	13.00	-2.39	- - -

Place and date of test:
Operator:Rossens, 2020-01-13 and -22
B. Itzcovich

6.7 Maximum output power (conducted)


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Requirement: For frequency hopping systems operating in the 902-928 MHz band, the maximum peak conducted output power of the intentional radiator shall not exceed 1 watt (30 dBm) for systems employing at least 50 hopping channels.

Test set-up:

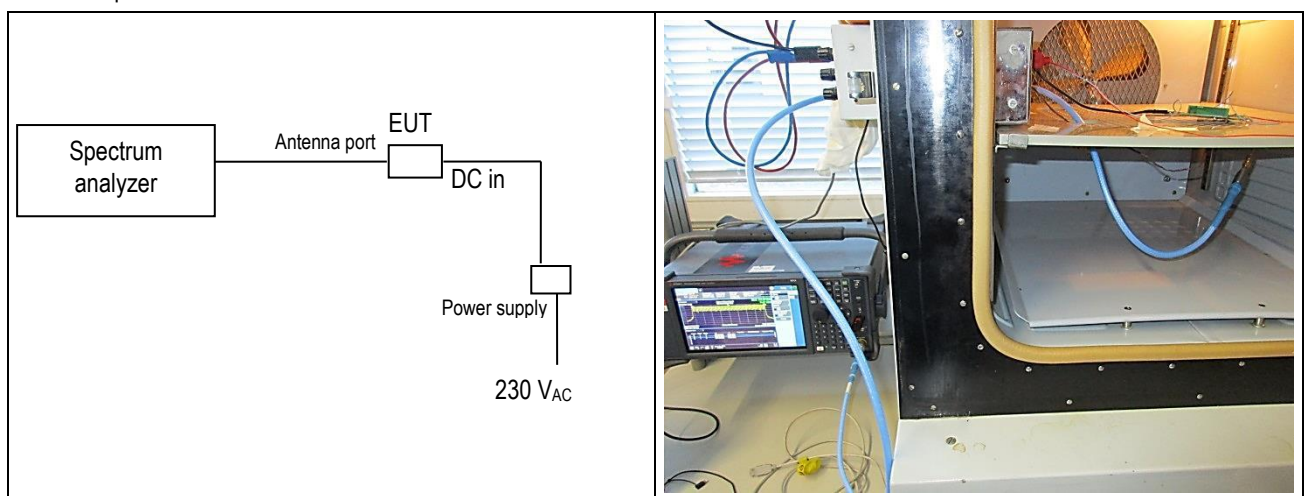

Remarks: - - -

Test equipment:




Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH
 EUT: XC Tracer Maxx (FLARM) (Proto 2)
 Operating mode: TX, f = 902 / 915 / 928 MHz, modulated, power setting 16 dBm
 Cables connected to the EUT: USB, temporary supply & antenna cables
 Remarks: Measured on temporary antenna connector
 RBW = 300 kHz, VBW = 910 kHz; Peak detector
 Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5
 Climatic conditions: Temperature: 24 °C Humidity: 30 % Pressure QFE: 947 hPa

frequency [MHz]	Temp [°C]	U [V]	P [dBm]	Limit [dBm]	Remarks	Pass	
						Yes	No
902	23	3.7	13.92	21	- - -	☒	☐
915	23	3.7	14.65	21	- - -	☒	☐
928	23	3.7	15.39	21	Maximum conducted emission	☒	☐

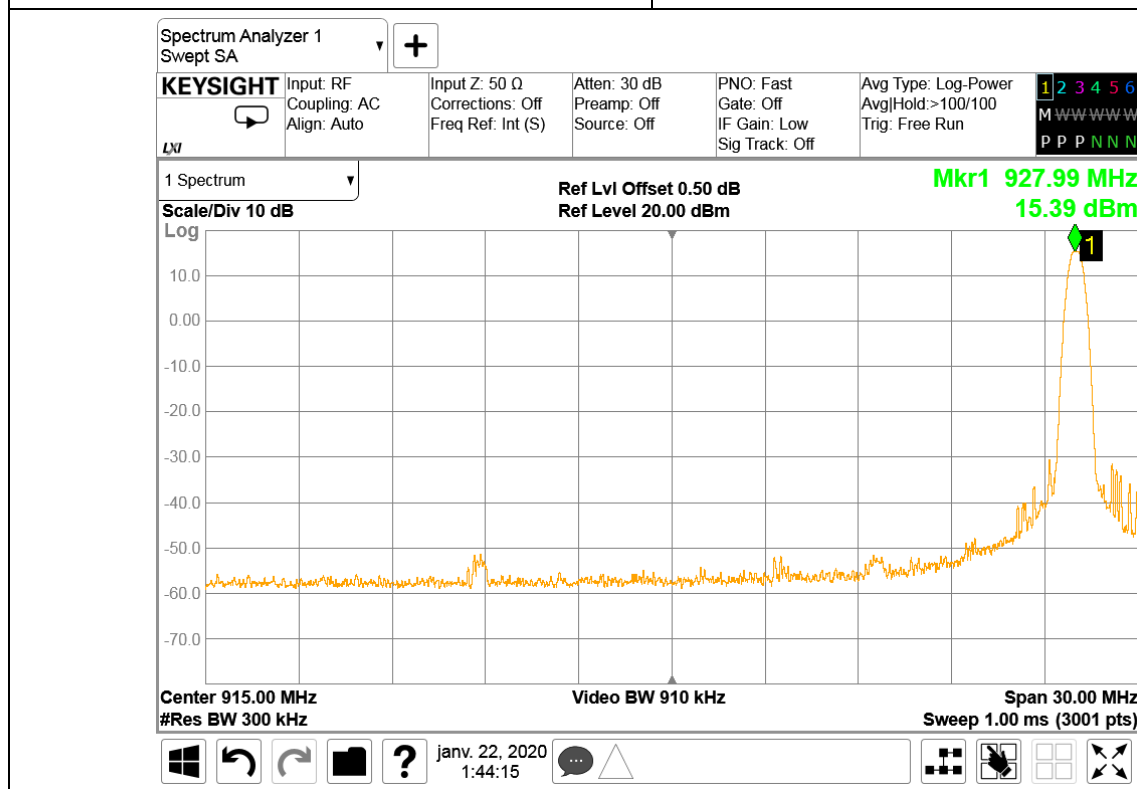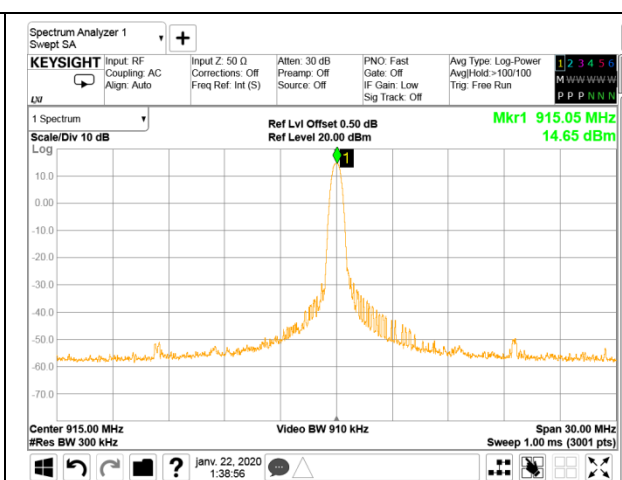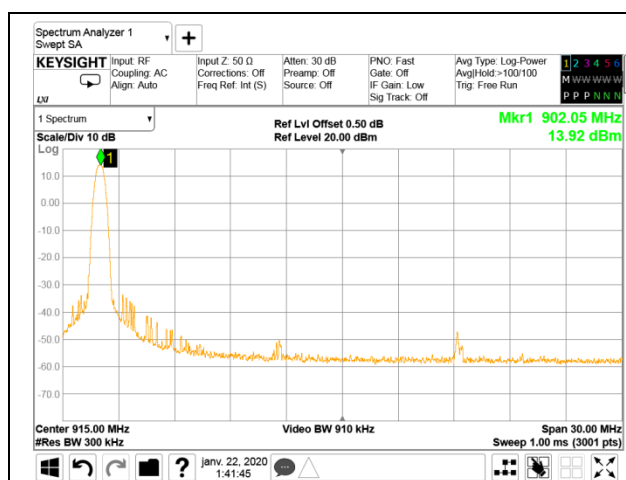

Place and date of test:
Operator:

Rossens, 2020-01-22
B. Itzcovich

6.8 Band-edge emission (conducted)


Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB

Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Requirement: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

Test set-up:

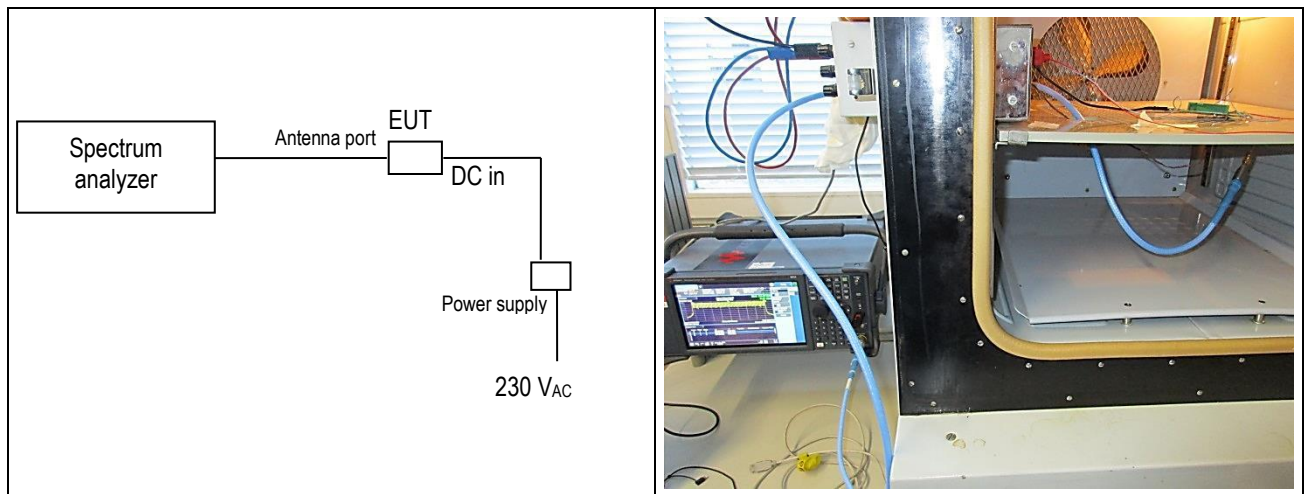

Remarks: ---

Test equipment:

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Results of the test

Applicant: XC Tracer GmbH

EUT: XC Tracer Maxx (FLARM) (Proto 2)


Operating mode: TX, modulated, Power setting 16 dBm. See results hereafter



Cables connected to the EUT: USB, temporary supply & antenna cables



Remarks: Measured on temporary antenna connector

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 23 – 24 °C Humidity: 30 % Pressure QFE: 947 – 952 hPa

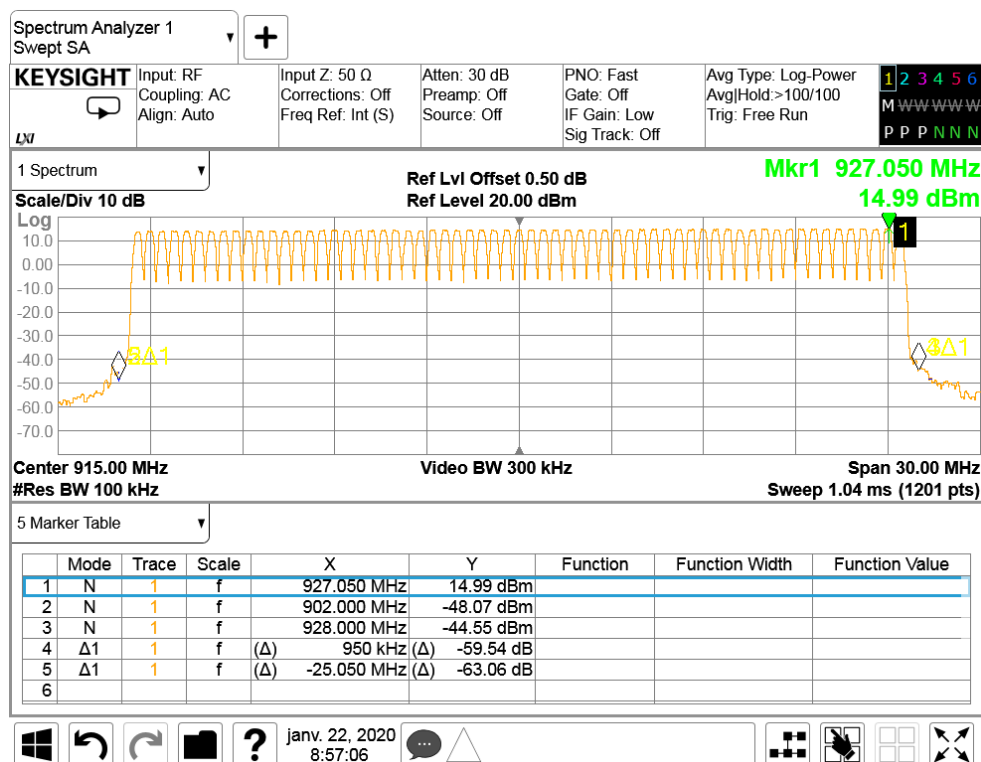Conclusion: Pass**f = 902.0 MHz and 928.0 MHz, hopping**

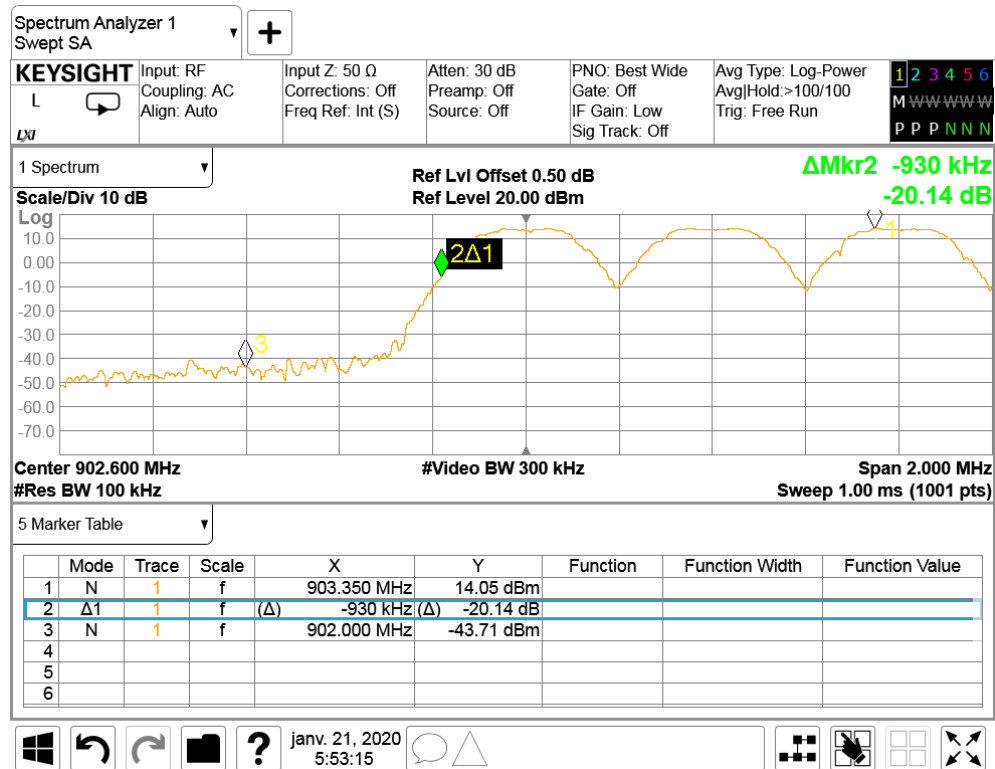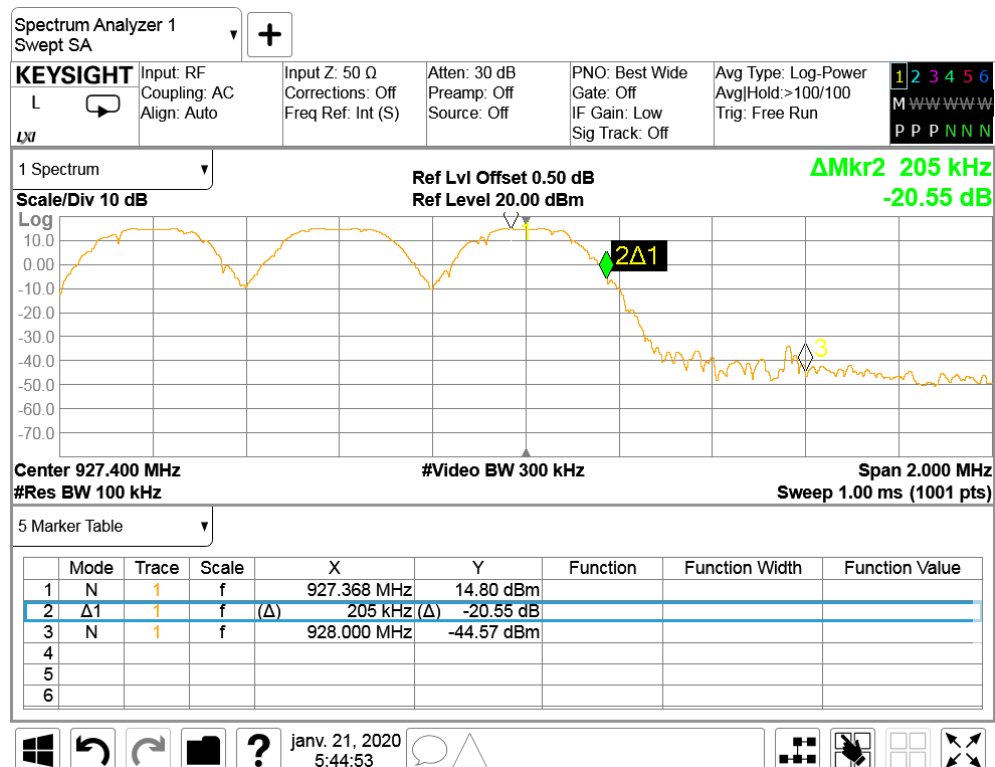f = 902.0 MHz, hopping**f = 928.0 MHz, hopping**

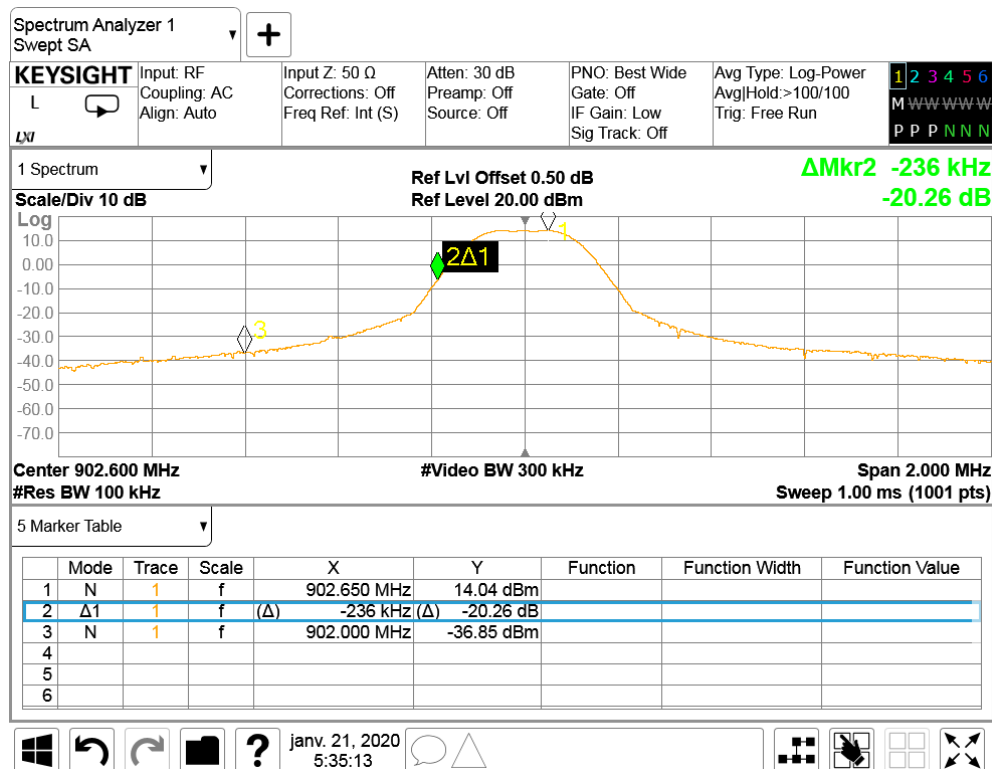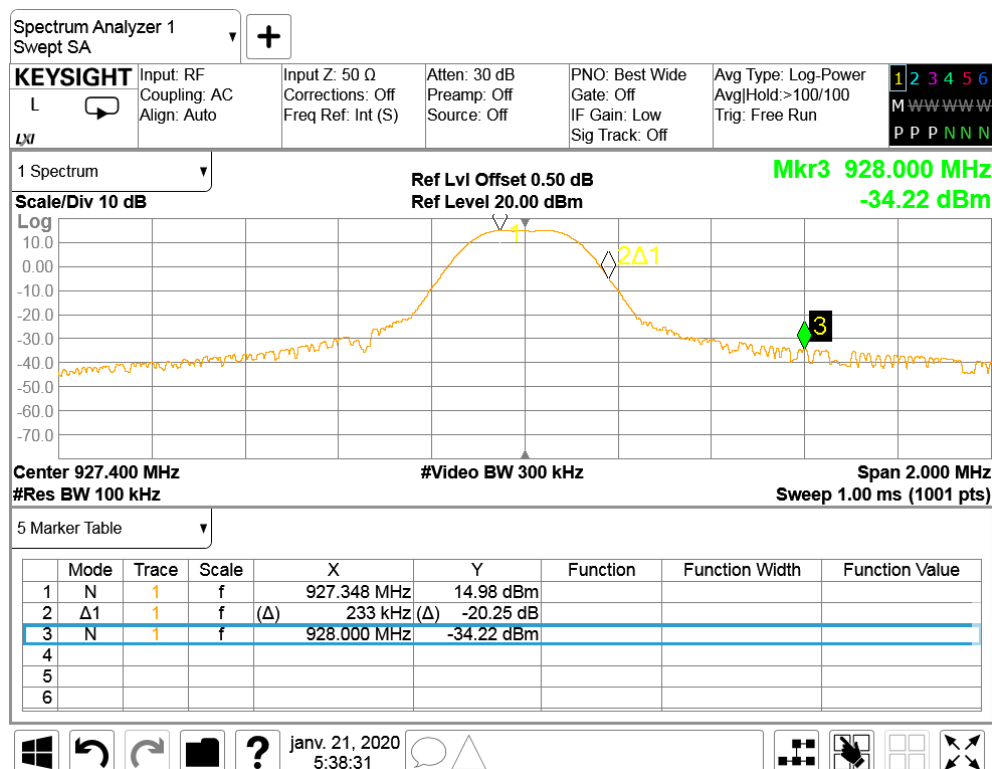f = 902.6 MHz, non hopping**f = 902.6 MHz and 927.4 MHz, non hopping**

Place and date of test:
Operator:

Rossens, 2020-01-21 and -22
B. Itzcovich

6.9 Spurious emissions – conducted (transmitter – 9 kHz to 9.5 GHz)

Test site: ☐ SAC10 ☐ open test site
☐ SAC3 ☒ laboratory

Meas. Uncertainty: 9kHz – 3GHz: ± 1 dB
 3GHz – 6.7GHz: ± 2.1 dB
 6.7GHz – 13.2GHz: ± 2.6 dB
 13.2GHz – 19GHz: ± 2.8 dB
 19GHz – 26.5GHz: ± 3 dB


Test method: Measurement of the conducted power on the antenna connector or a test fixture.

Requirement: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 24 °C Humidity: 30 % Pressure QFE: 945 hPa

Test set-up:

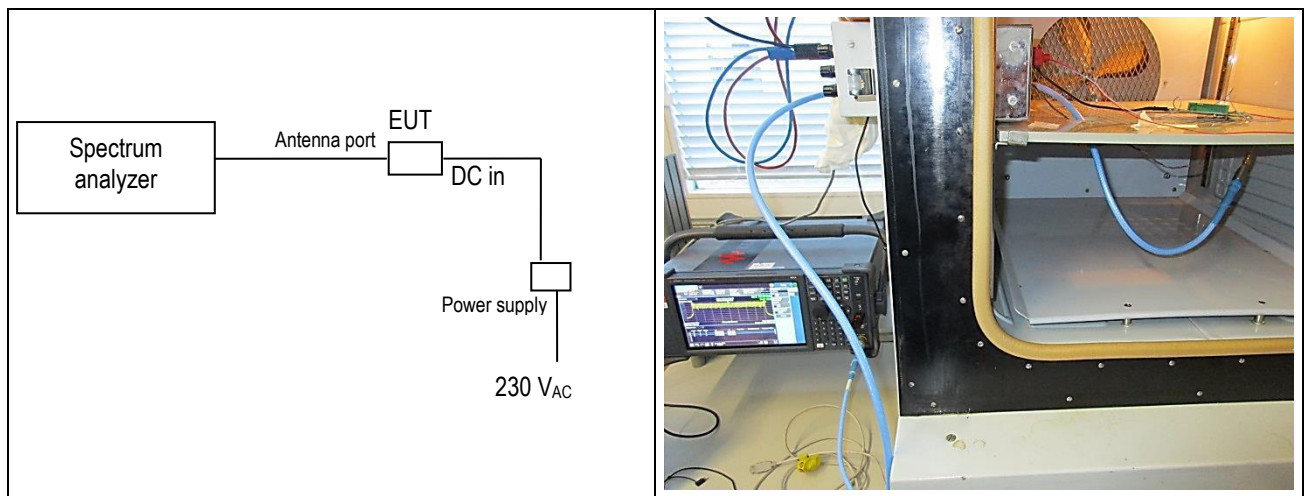

Remarks: Emissions near band-edges are checked under § 6.8

Test equipment:


Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Power supply	☒ 99-07	☐ 04-31				
Cables	☒ 11-45					

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Power Interference
 Port : Temporary antenna connector
 Clamp position : -



Equipment Under Test : XC Tracer Maxx, Proto 2 (MY)
 Set-Up : See photos
 Operating Conditions : TX, f = 902.6 MHz, modulated, Power setting 16 dBm
 Remarks : Highest RFpower in the 100 kHz bandwidth within 902-928MHz band is 15.1 dBm
 Peak detector sweep

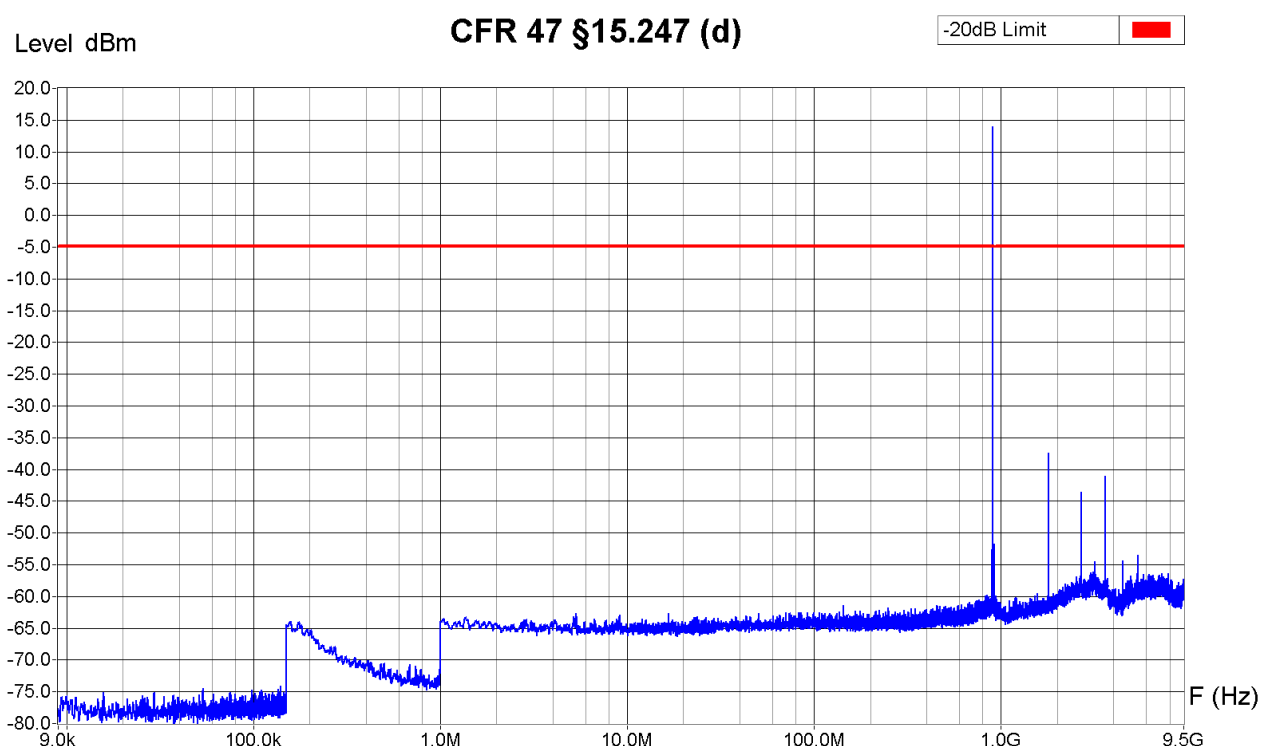


Zone	9 KHz - 150 KHz	150 KHz - 1 MHz	1 MHz - 30 MHz	30 MHz - 1 GHz	1 GHz - 9.50 GHz
Video Bandwidth	300 KHz	300 KHz	300 KHz	300 KHz	300 KHz
Resol Bandwidth	200 Hz	9 KHz	100 KHz	100 KHz	100 KHz

Operator: B. Itzcovich
 Date/Time: 23.01.2020 11:25
 Filename:
 118_CP_9k-
 9G5_cond_902M6.png/.txt

Measurement Type : Power Interference
 Port : Temporary antenna connector
 Clamp position : -



Equipment Under Test : XC Tracer Maxx, Proto 2 (MY)
 Set-Up : See photos
 Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
 Remarks : Highest RFpower in the 100 kHz bandwidth within 902-928MHz band is 15.1 dBm
 Peak detector sweep

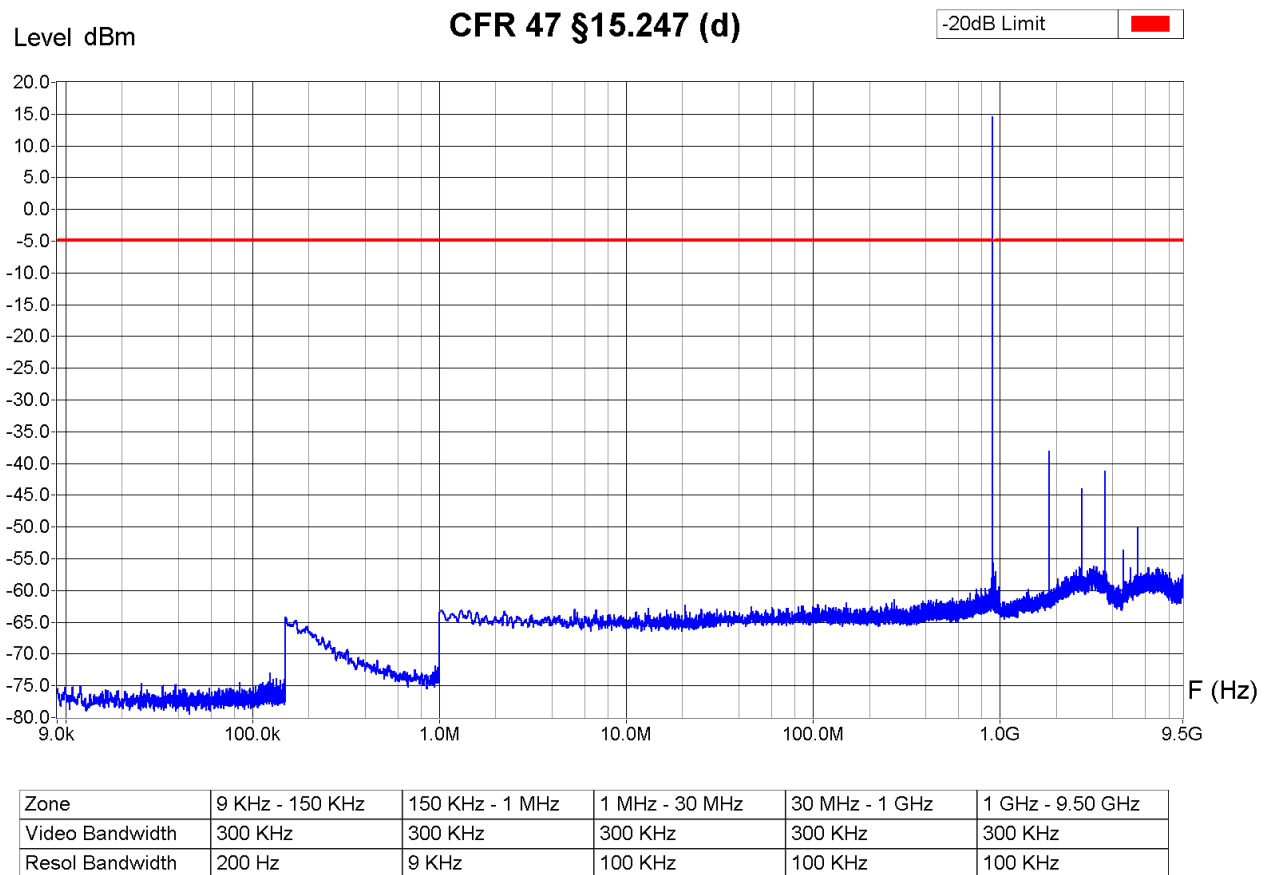


Operator: B. Itzcovich
 Date/Time: 23.01.2020 11:15
 Filename:
 119_CP_9k-
 9G5_cond_915M0.png/.txt

Measurement Type : Power Interference
 Port : Temporary antenna connector
 Clamp position : -



Equipment Under Test : XC Tracer Maxx, Proto 2 (MY)
 Set-Up : See photos
 Operating Conditions : TX, f = 927.4 MHz, modulated, Power setting 16 dBm
 Remarks : Highest RFpower in the 100 kHz bandwidth within 902-928MHz band is 15.1 dBm
 Peak detector sweep

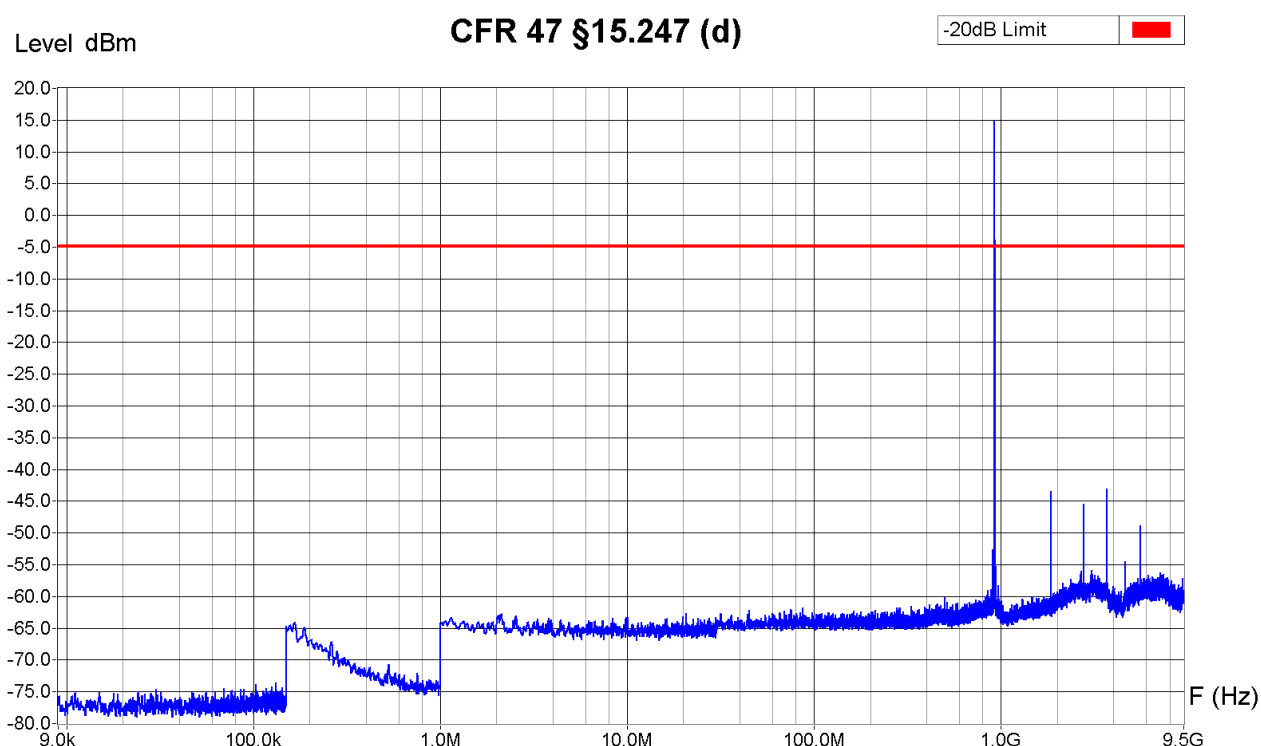

Zone	9 KHz - 150 KHz	150 KHz - 1 MHz	1 MHz - 30 MHz	30 MHz - 1 GHz	1 GHz - 9.50 GHz
Video Bandwidth	300 KHz	300 KHz	300 KHz	300 KHz	300 KHz
Resol Bandwidth	200 Hz	9 KHz	100 KHz	100 KHz	100 KHz

Operator: B. Itzcovich
 Date/Time: 23.01.2020 11:01
 Filename:
 120_CP_9k-
 9G5_cond_927M4.png/.txt

6.10 Spurious emissions, transmit mode – radiated**6.10.1 9 kHz to 30 MHz**

Test site: ☐ SAC10 ☐ open test site
☒ SAC3 ☐

Distance: ☒ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 1 m (height of the equipment under test above floor)


Meas. Uncertainty: ± 2.8 dB

Test method: The magnetic disturbance radiated by the equipment under test is measured using a spectrum analyzer and a wide band magnetic antenna. The antenna is placed at 1 m height, first in the direction of the apparatus under test, then at 90° to the apparatus and if required also horizontally. If possible the turning table is operated through 360° during the measurement. The recording is carried out taking into account the maximum value of the disturbance appearing during the functioning of the apparatus under test. The peak values are recorded continuously on a graph. The values exceeding the limits are re-measured using a measuring receiver.

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 24 °C Humidity: 30 % Pressure QFE: 942 hPa

Test set-up:

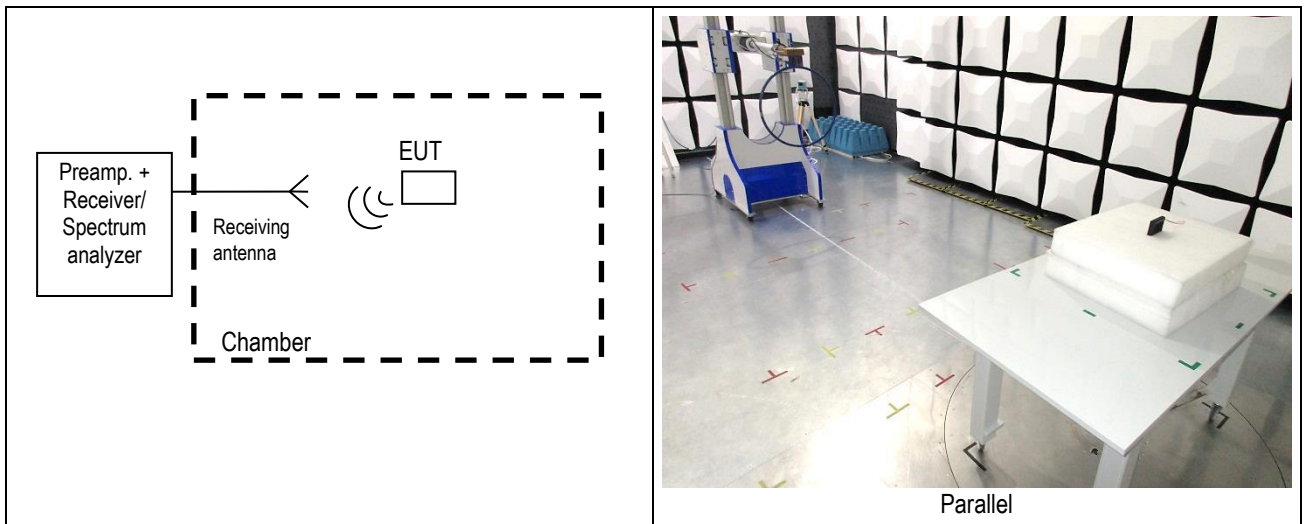

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 10 m (factor used = 40 dB/decade) if necessary
 e.g.: for f = 10 MHz the limit is 30 μ V/m at 30 m;

$$20 \log \left(\frac{30 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 40 \log \left(\frac{30 m}{3 m} \right) = 69.5 \frac{dB \mu V}{m} \text{ at } 3m$$

"Parallel" means measurement antenna axis towards EUT

Test equipment:


Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 16-03
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☒ 16-03		
Preamplifier	☐ 90-01	☐ 95-86	☐ 05-56	☐ 05-59	☐ 05-62	
Antenna (type: magnetic)	☒ 90-25	☐ 90-28	☐ 99-32	☐ 04-79		
Cables	☒ SAC3_RE_5m_1.0/3.0		☐ 06-236			
Software and Revision	☒ Vitam, Rev. 2.4.13		☐ RadiMation 2015.1.7			

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
 Polarisation : Parallel
 Table Angle : 0 - 360°
 Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 902 MHz, modulated, Power setting 16 dBm
 Remarks :

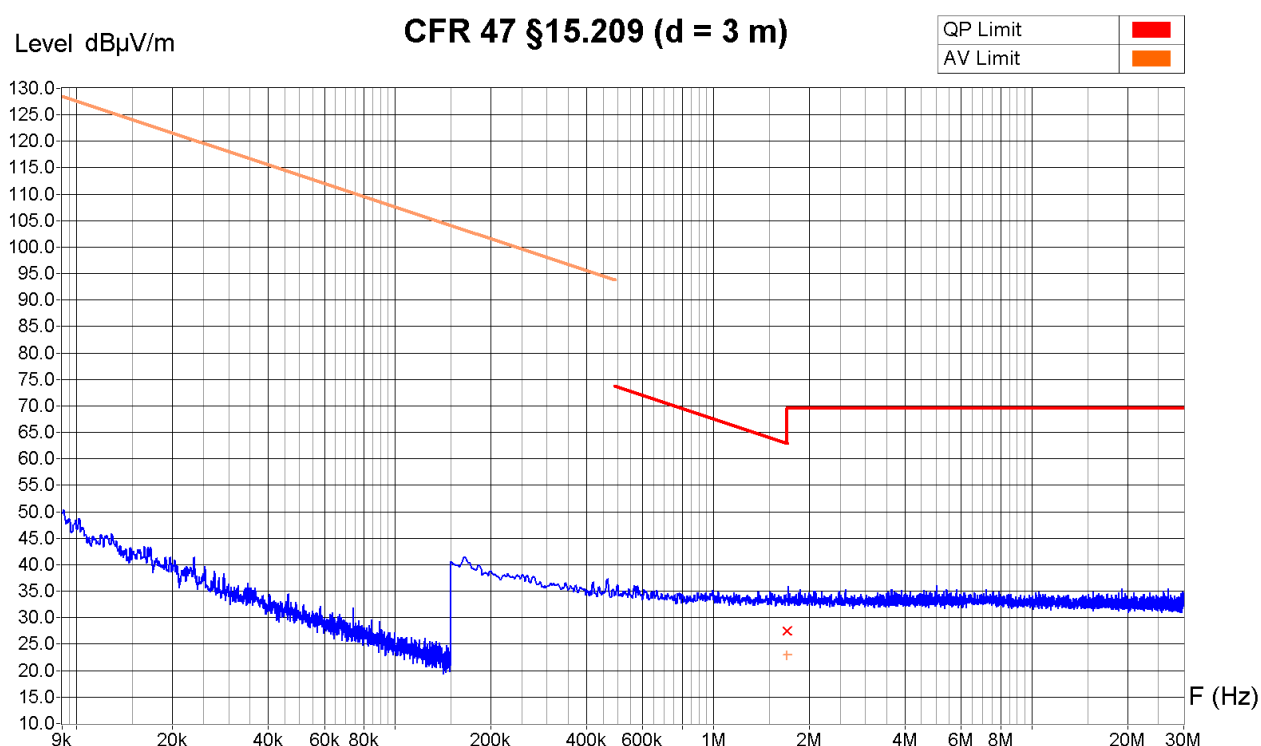

Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
1.70 MHz	35.7 dBμV/m	27.5 dBμV/m	23.0 dBμV/m	35.5 dB


Sample calculation with all conversion and correction factors used				
Frequency [MHz]	Receiver QP value [dBμV]	Cable att. corr. [dB]	Antenna factor corr. [dB]	QP field [dBμV/m]
1.700	7.2	+0.0	+20.3	= 27.5

Operator: B. Itzcovich
 Date/Time: 24.01.2020 10:23
 Filename:
 121_REH_9k-
 30M_TX902M_Par_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Parallel
Table Angle : 0 - 360°
Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
Remarks :

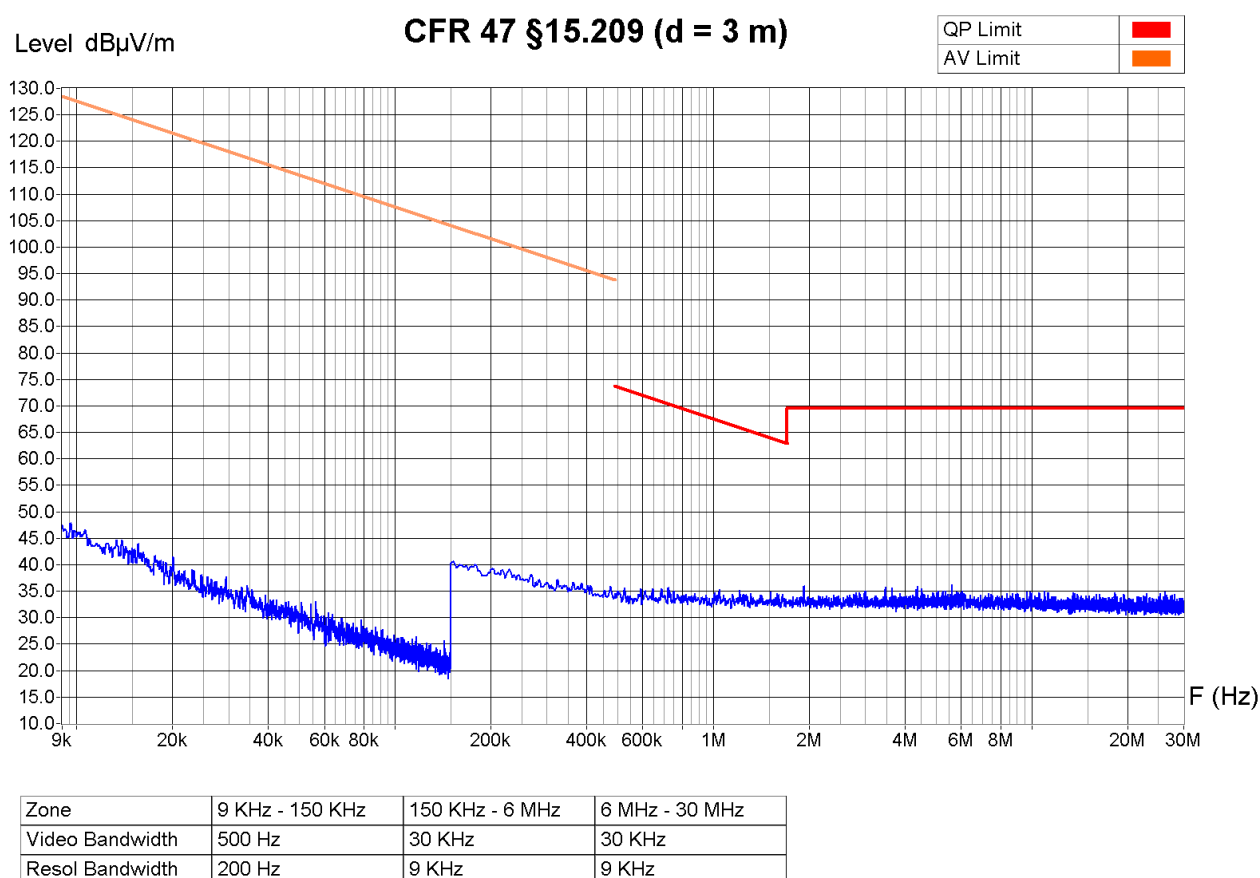


Operator: B. Itzcovich
Date/Time: 24.01.2020 10:38
Filename:
122_REH_9k-
30M_TX915M_Par_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Parallel
 Table Angle : 0 - 360°
 Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 928 MHz, modulated, Power setting 16 dBm
 Remarks :

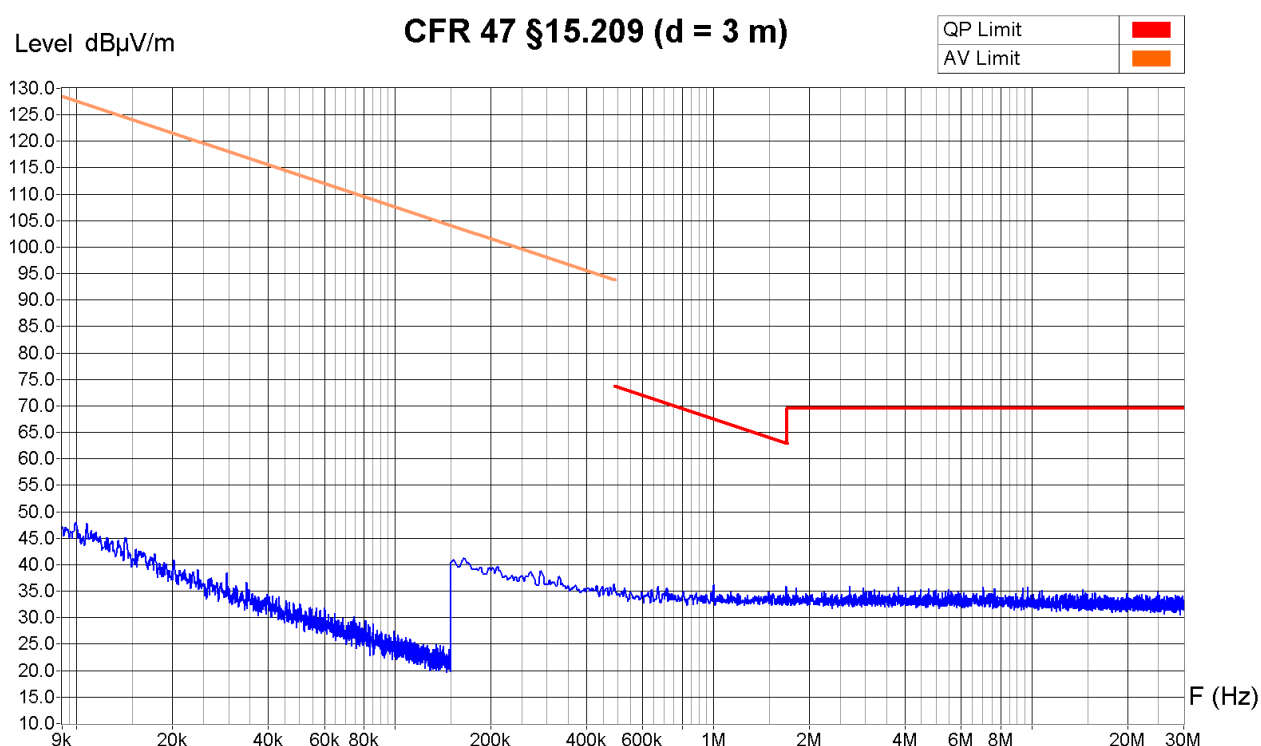


Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Operator: B. Itzcovich
 Date/Time: 24.01.2020 10:43
 Filename:
 123_REH_9k-
 30M_TX928M_Par_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Perpendicular
Table Angle : 0 - 360°
Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 902 MHz, modulated, Power setting 16 dBm
Remarks :

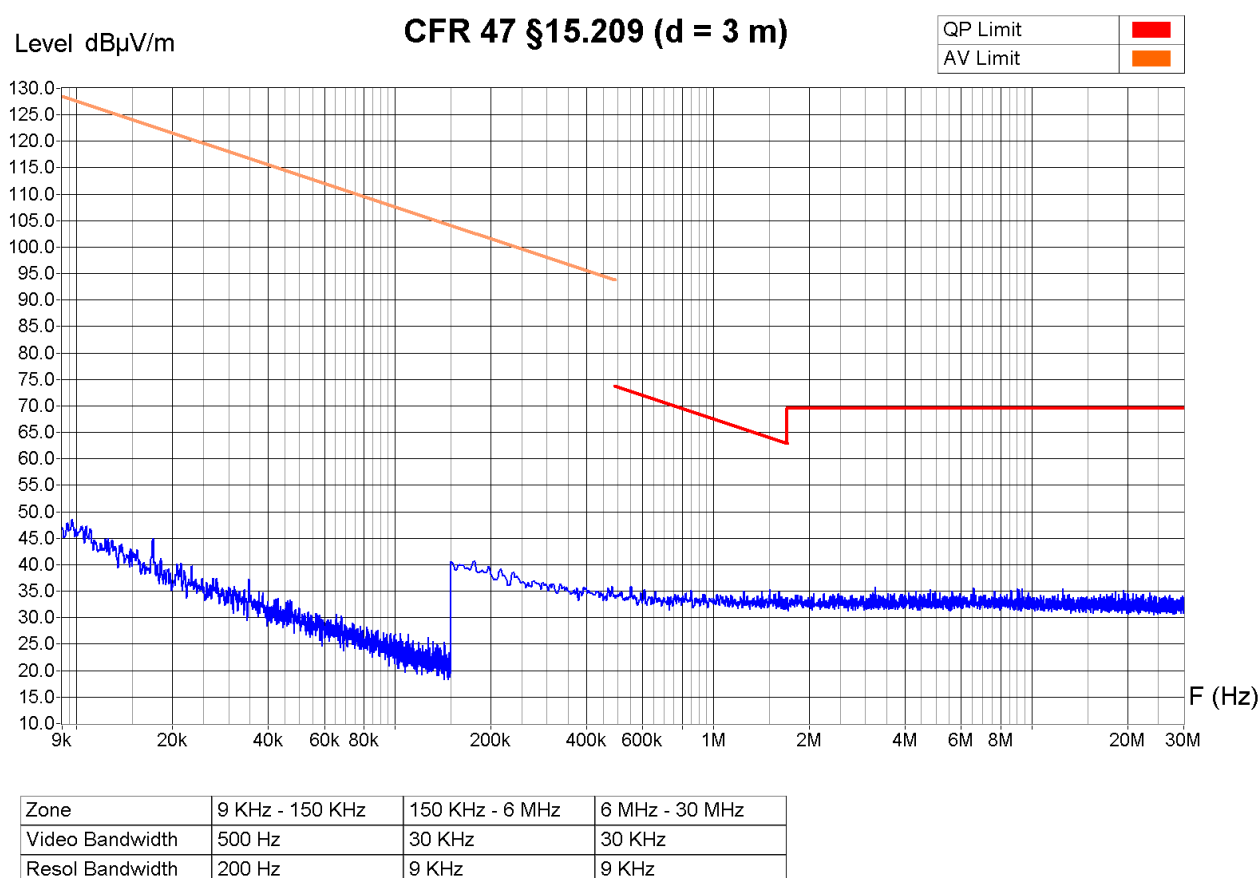


Operator: B. Itzcovich
Date/Time: 24.01.2020 10:58
Filename:
124_REH_9k-
30M_TX902M_Per_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Perpendicular
 Table Angle : 0 - 360°
 Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
 Remarks :

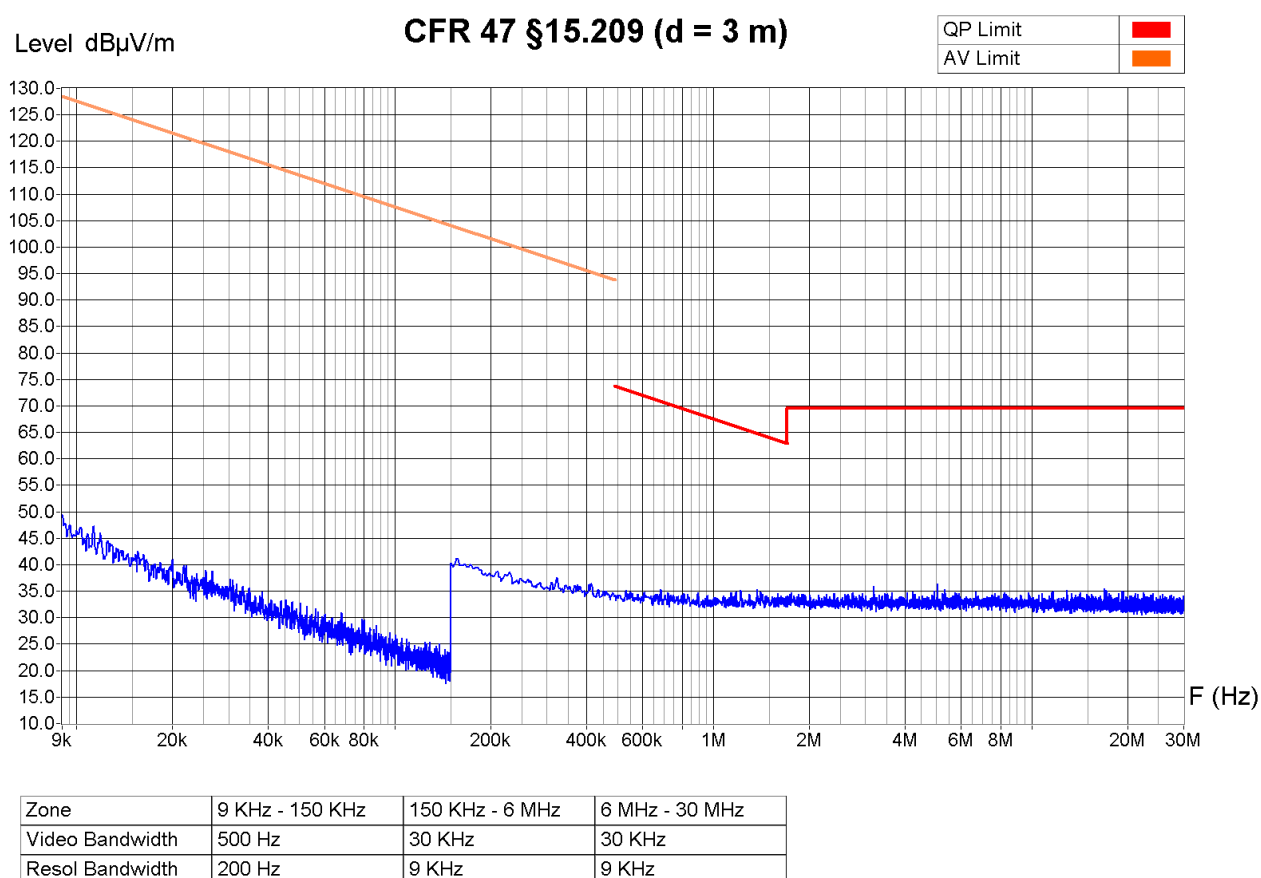


Operator: B. Itzcovich
 Date/Time: 24.01.2020 10:56
 Filename:
 125_REH_9k-
 30M_TX915M_Per_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Perpendicular
Table Angle : 0 - 360°
Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 928 MHz, modulated, Power setting 16 dBm
Remarks :

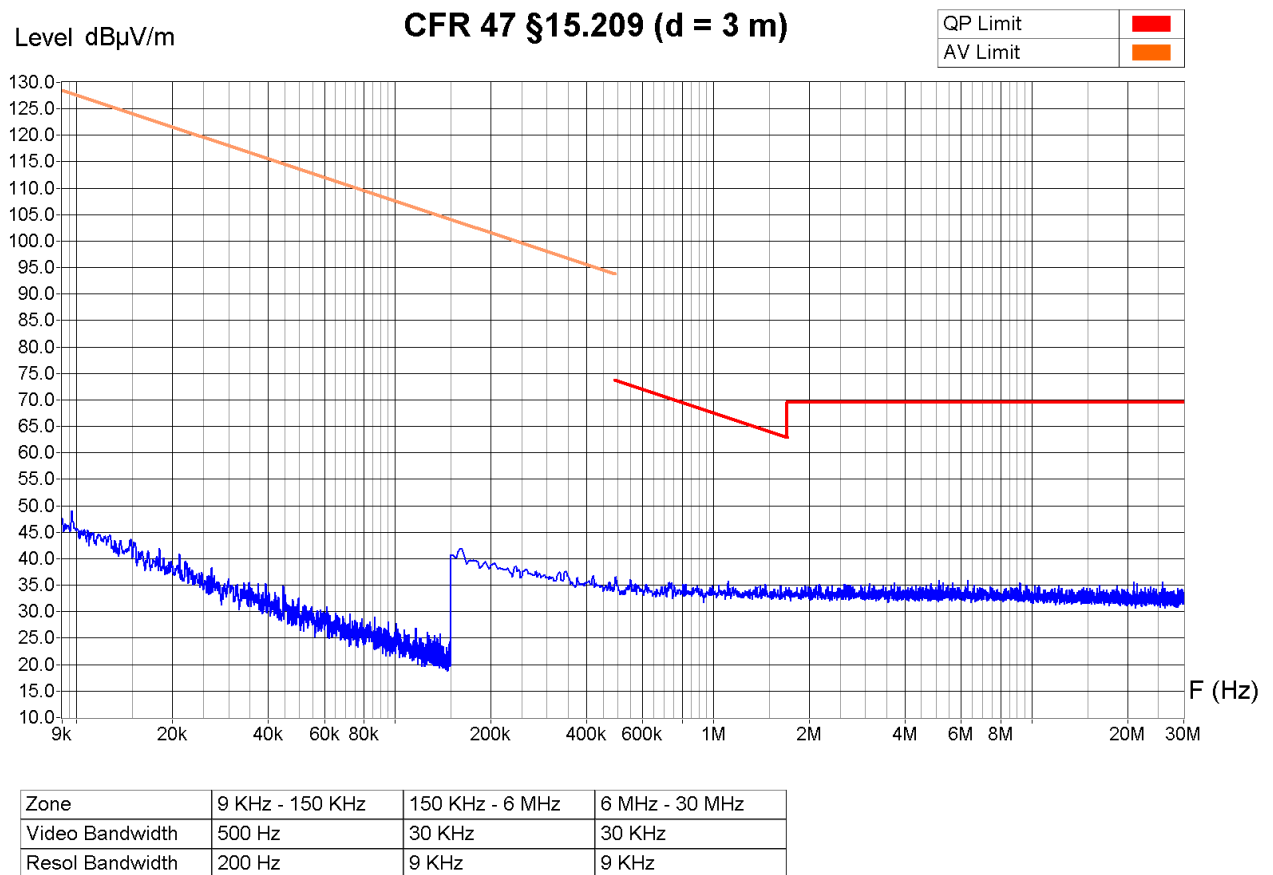


Operator: B. Itzcovich
Date/Time: 24.01.2020 10:51
Filename:
126_REH_9k-
30M_TX928M_Per_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 902 MHz, modulated, Power setting 16 dBm
 Remarks :

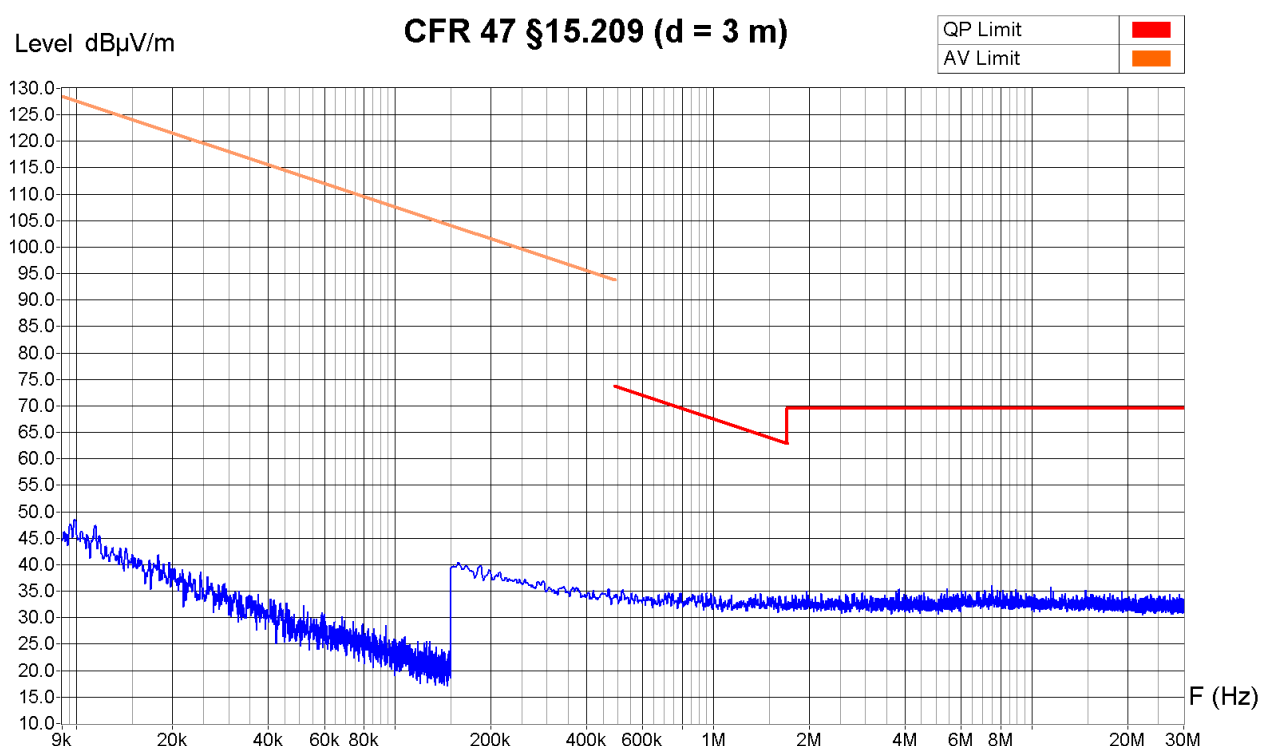


Zone	9 KHz - 150 KHz	150 KHz - 6 MHz	6 MHz - 30 MHz
Video Bandwidth	500 Hz	30 KHz	30 KHz
Resol Bandwidth	200 Hz	9 KHz	9 KHz

Operator: B. Itzcovich
 Date/Time: 24.01.2020 11:13
 Filename:
 127_REH_9k-
 30M_TX902M_Hor_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
Remarks :

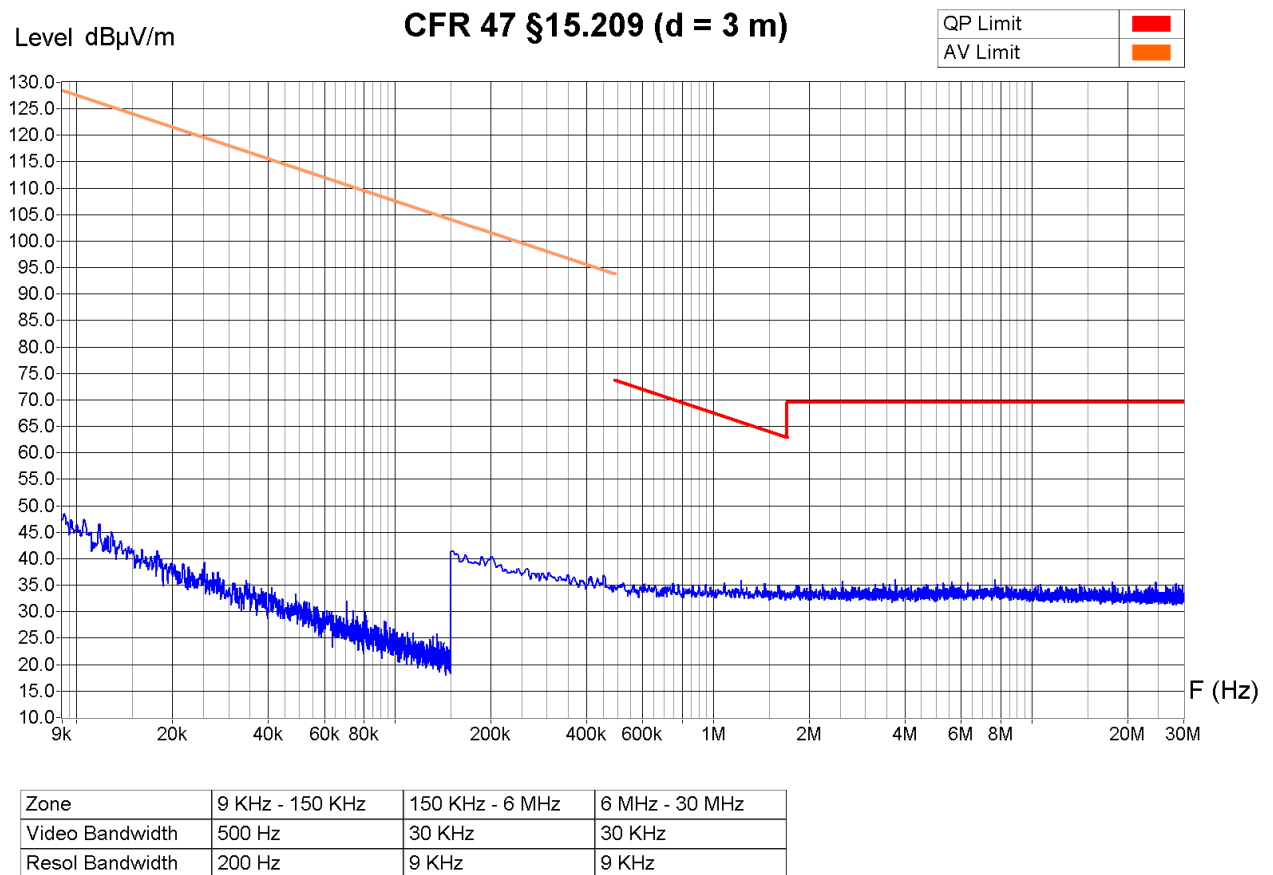


Operator: B. Itzcovich
Date/Time: 24.01.2020 11:18
Filename:
128_REH_9k-
30M_TX915M_Hor_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 928 MHz, modulated, Power setting 16 dBm
 Remarks :

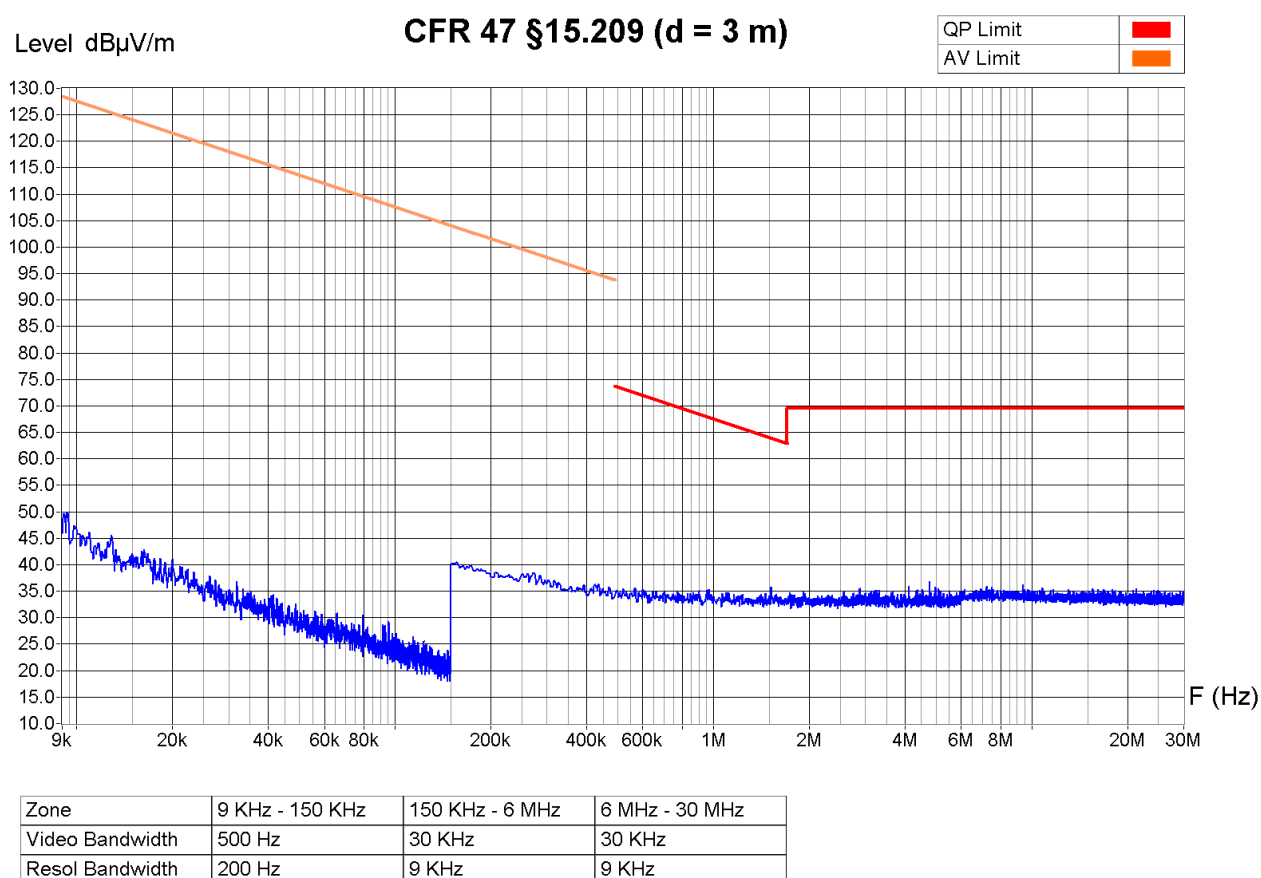

Operator: B. Itzcovich
 Date/Time: 24.01.2020 11:23
 Filename:
 129_REH_9k-
 30M_TX928M_Hor_FCC.png/.txt

6.10.2 30 MHz to 1 GHz

Test site: ☐ SAC10 ☐ open test site
☒ SAC3 ☐

Distance: ☐ 3 m ☒ 10 m ☐ 30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)


Meas. Uncertainty: ± 4.6 dB (30 – 300 MHz) / ± 3.7 dB (300 – 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are re-measured manually using a receiver.

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 24 – 25 °C Humidity: 30 % Pressure QFE: 938 – 940 hPa

Test set-up:

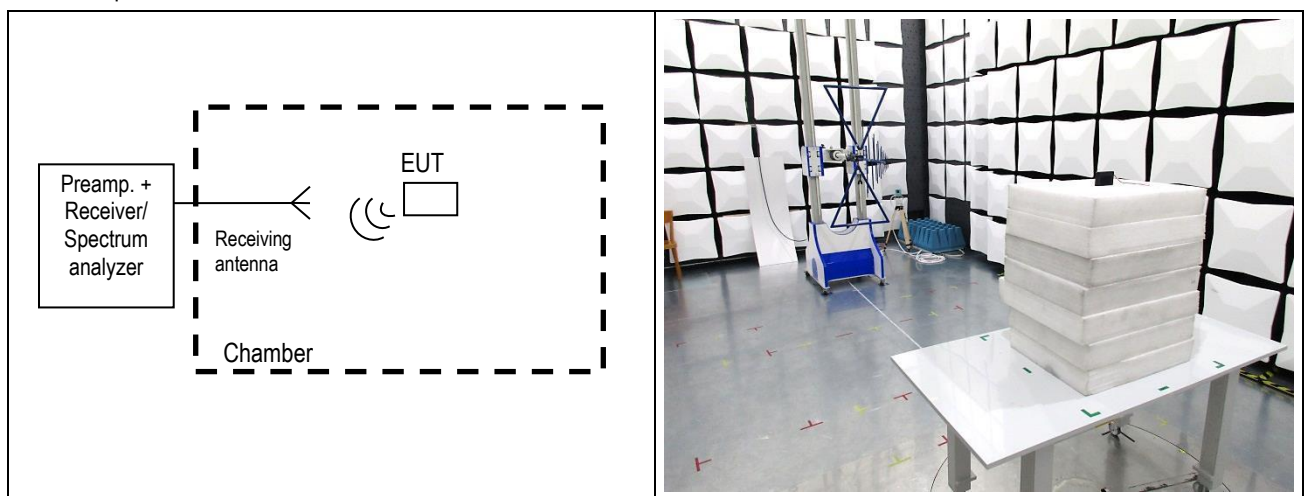

Remarks: - Limit values expressed in dBμV/m and transformed to a measuring distance of 3 m (factor used = 20 dB/decade) if necessary
 e.g.: for f = 40 MHz the limit is 100 μV/m at 3 m;

$$20 \log \left(\frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3m}{3m} \right) = 40 \frac{dB\mu V}{m} \text{ at } 3m$$

Test equipment:


Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 16-03
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☐ 04-29	☒ 16-03	
Preamplifier	☐ 90-01	☐ 95-86	☐ 05-56	☐ 05-59	☒ 16-03 internal	
Antenna (bilog)	☐ 94-03	☒ 05-38				
Filter	☒ 04-21					
Cables	☒ SAC3_RE_5m_1.0/3.0		☒ 06-00C			
Software and Revision	☒ Vitam, Rev. 2.4.13		☐ RadiMation 2015.1.7			

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
 Remarks : With notch filter

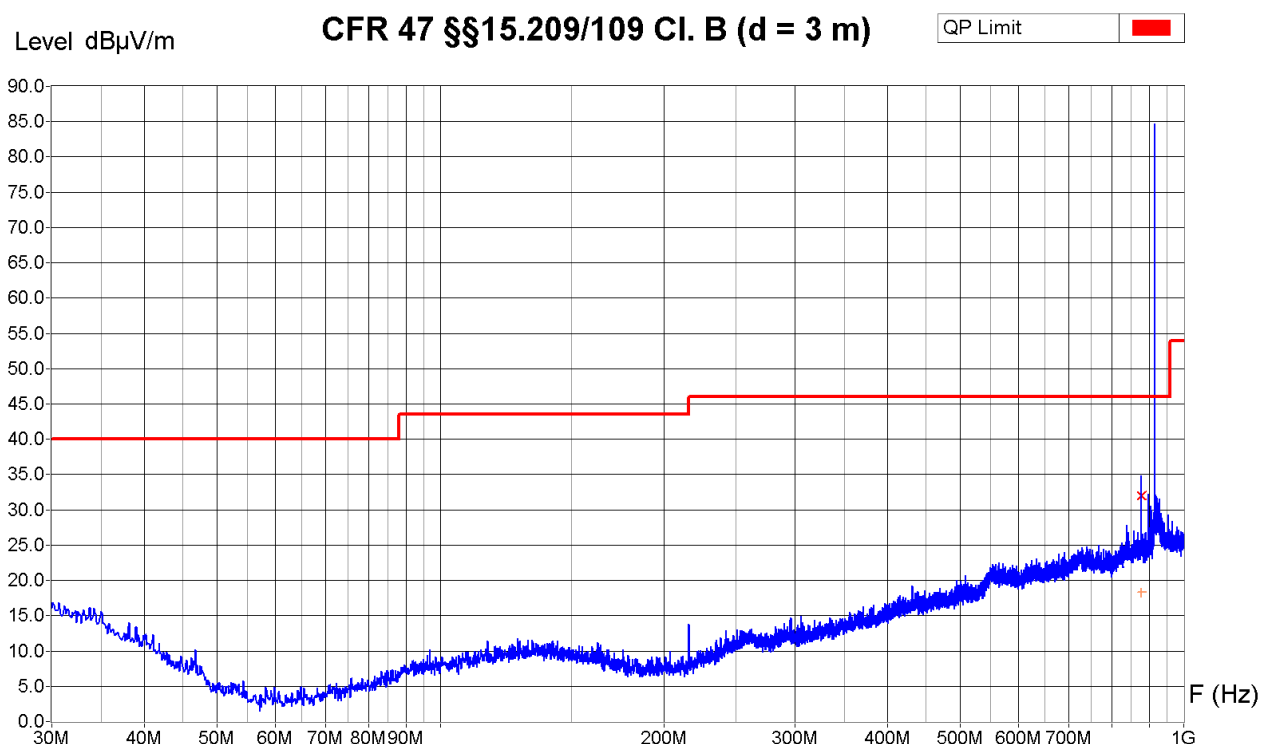

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
876.60 MHz	36.2 dBμV/m	32.0 dBμV/m	18.4 dBμV/m	14.0 dB


Sample calculation with all conversion and correction factors used					
Frequency [MHz]	Receiver QP value [dBμV]	Cable att. corr. [dB]	Preampl. gain corr. [dB]	Antenna factor corr. [dB]	QP field [dBμV/m]
876.6	-9.7	+1.2	0.0	+22.5	= 14

Operator: B. Itzcovich
 Date/Time: 13.01.2020 18:41
 Filename:
 102_RE_30M-
 1G_TX915M_H_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 915 MHz, modulated, Power setting 16 dBm
Remarks : With notch filter

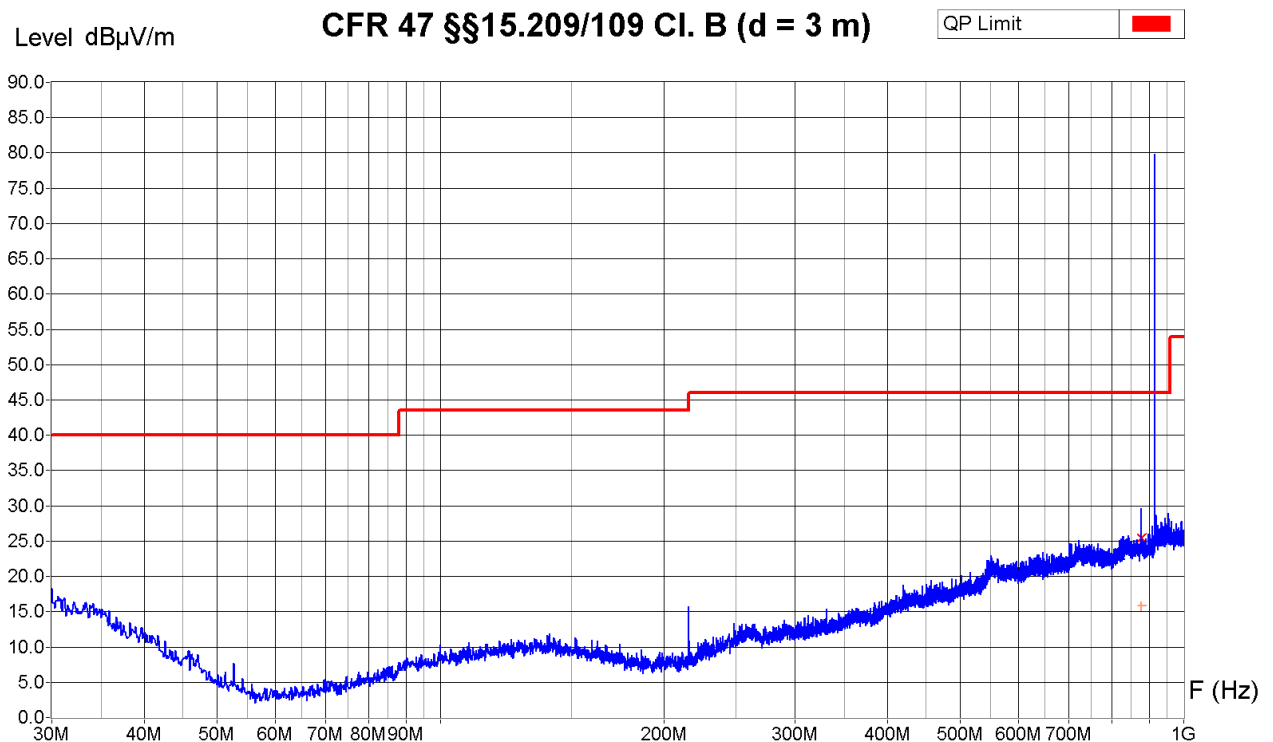

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
876.60 MHz	32.0 dBμV/m	25.5 dBμV/m	15.8 dBμV/m	20.6 dB

Operator: B. Itzcovich
Date/Time: 13.01.2020 18:50
Filename:
103_RE_30M-
1G_TX915M_V_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 902 MHz, modulated, Power setting 16 dBm
 Remarks : With notch filter

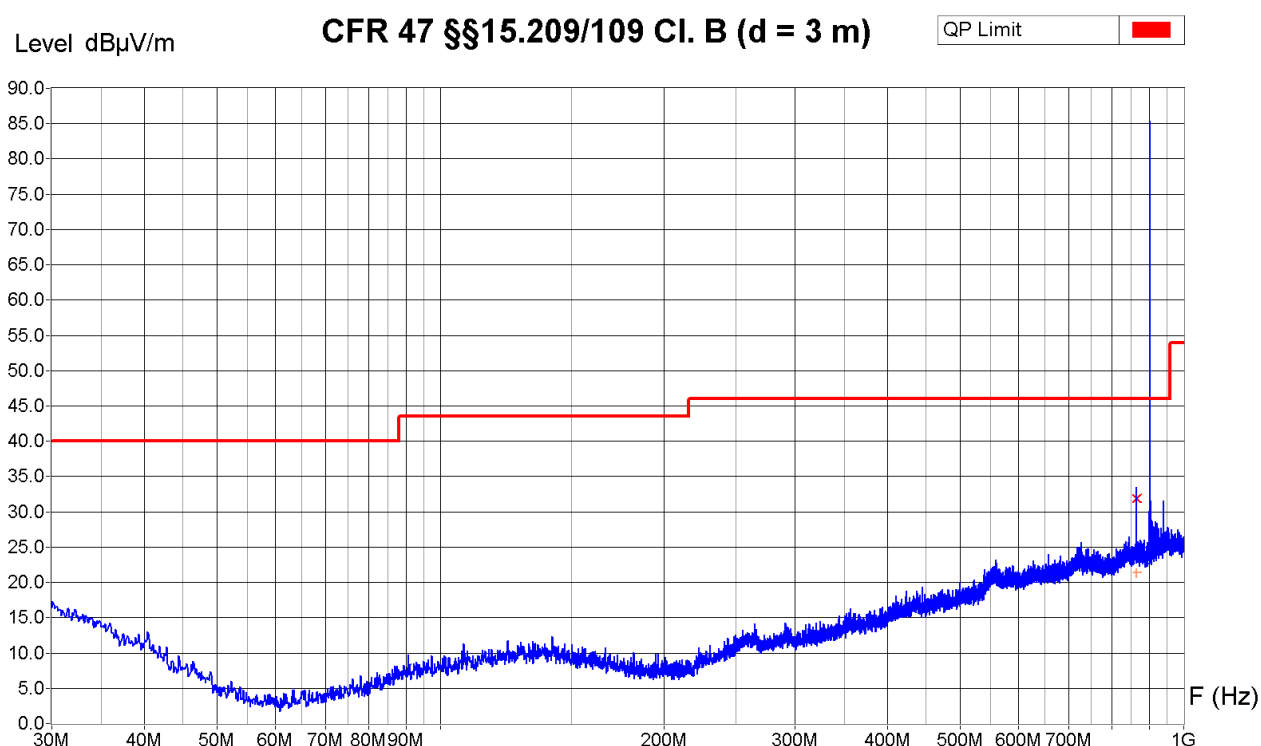

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
863.60 MHz	37.8 dBμV/m	31.9 dBμV/m	21.4 dBμV/m	14.1 dB

Operator: B. Itzcovich
 Date/Time: 17.01.2020 16:30
 Filename:
 104_RE_30M-
 1G_TX902M_H_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 902 MHz, modulated, Power setting 16 dBm
Remarks : With notch filter

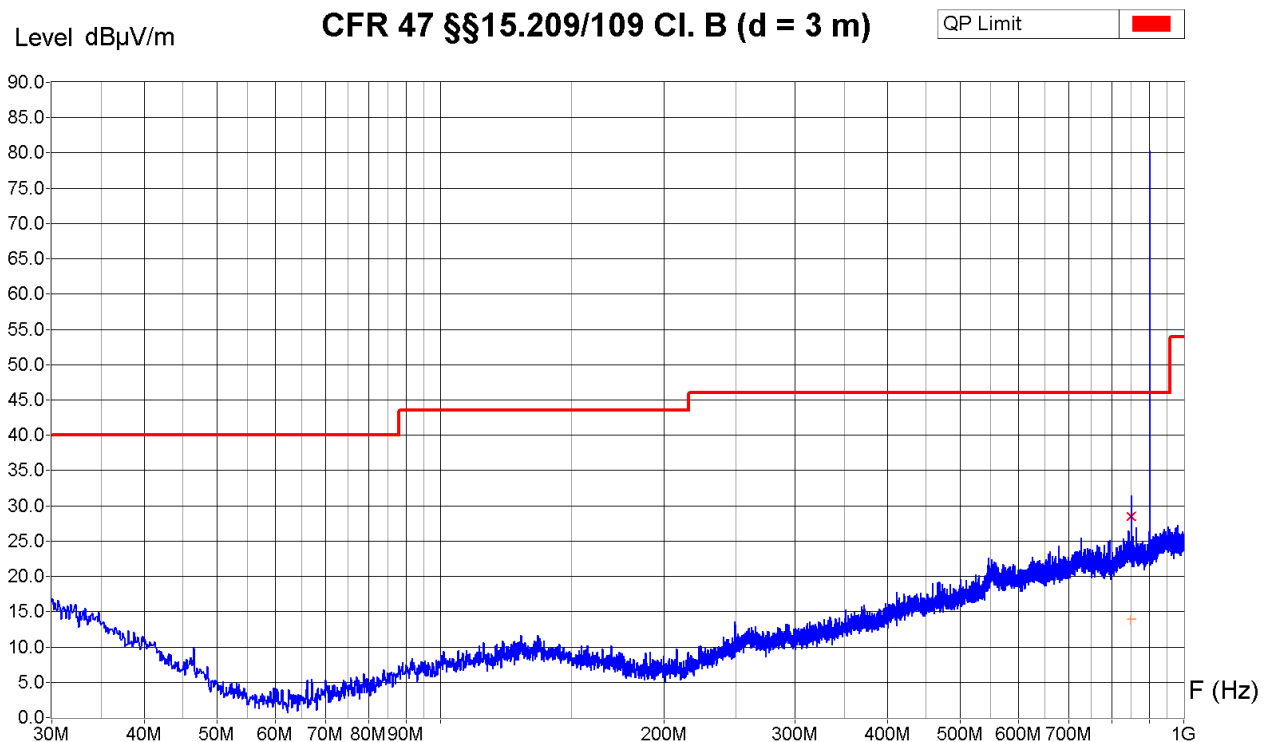

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
850.40 MHz	42.8 dBµV/m	28.5 dBµV/m	13.9 dBµV/m	17.5 dB

Operator: B. Itzcovich
Date/Time: 17.01.2020 16:50
Filename:
105_RE_30M-
1G_TX902M_V_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 928 MHz, modulated, Power setting 16 dBm
 Remarks : With notch filter

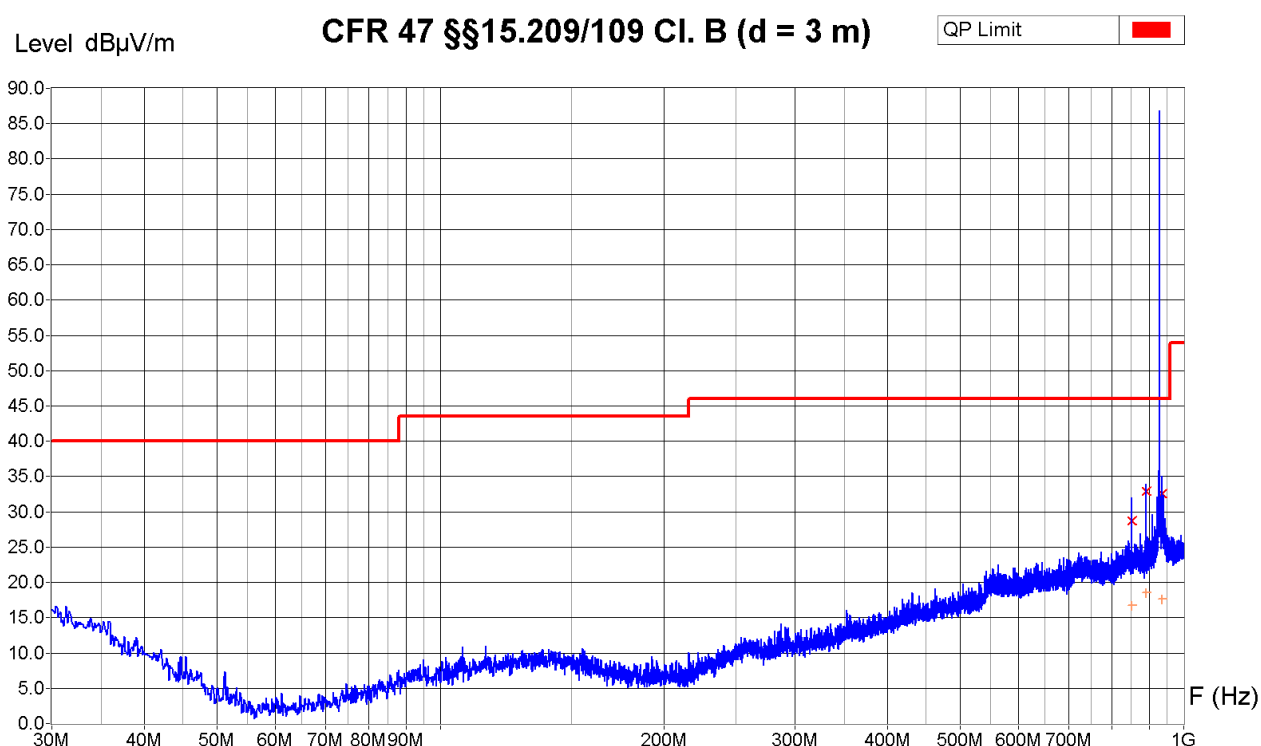

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
851.20 MHz	34.5 dBμV/m	28.7 dBμV/m	16.7 dBμV/m	17.3 dB
889.60 MHz	37.2 dBμV/m	32.9 dBμV/m	18.5 dBμV/m	13.2 dB
934.30 MHz	39.5 dBμV/m	32.5 dBμV/m	17.7 dBμV/m	13.5 dB

Operator: B. Itzcovich
 Date/Time: 17.01.2020 17:20
 Filename:
 106_RE_30M-
 1G_TX928M_H_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 928 MHz, modulated, Power setting 16 dBm
Remarks : With notch filter

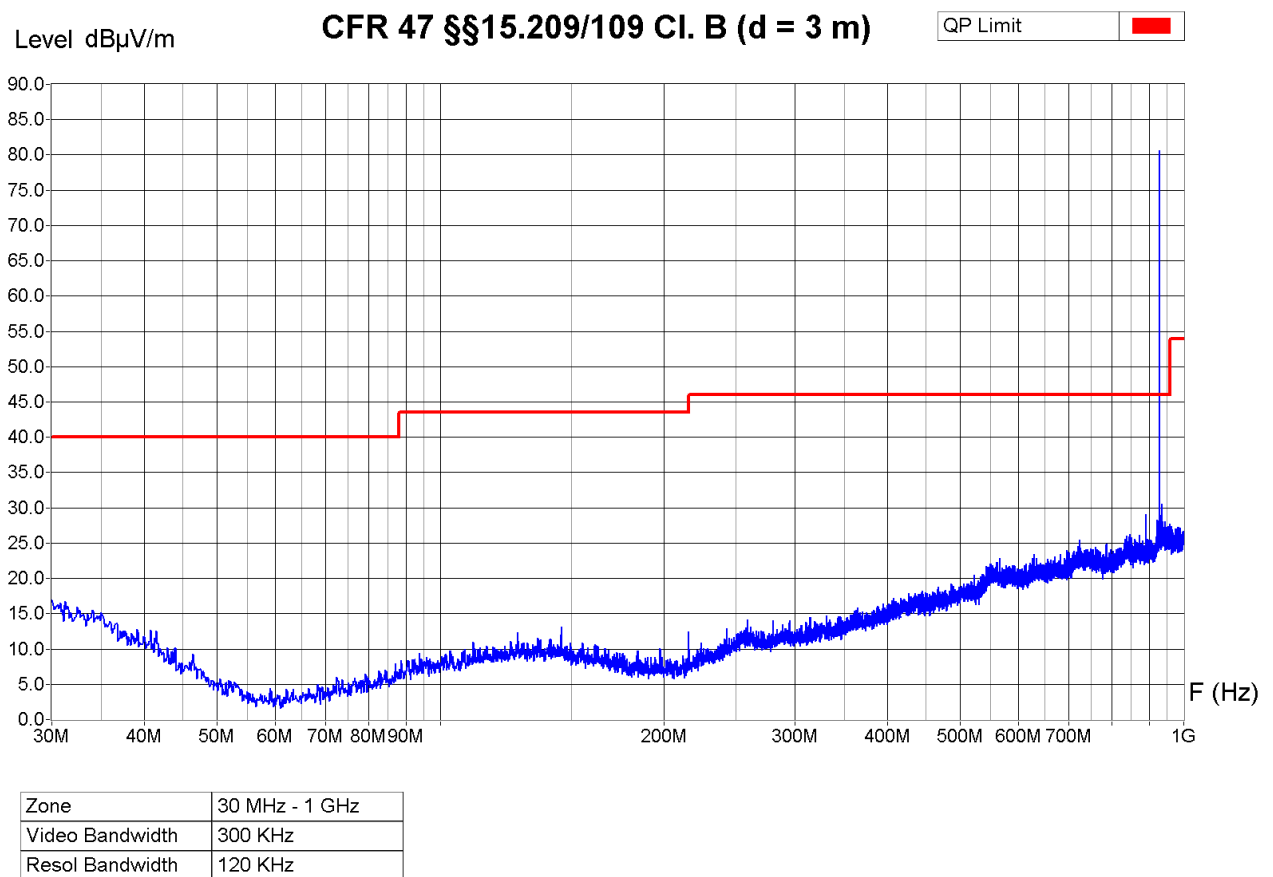

Operator: B. Itzcovich
Date/Time: 17.01.2020 17:14
Filename:
107_RE_30M-
1G_TX928M_V_FCC.png/.txt

6.10.3 1 GHz to 9.3 GHz

Test site: ☒ SAC3 ☐ SAC10

Distance: ☐ 1 m ☒ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)

Meas. Uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations, and aimed at the source by tilting. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.


Modifications: ☒ None ☒ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Comment: Proto 1 has no modifications, Proto 4 with modifications Level 1

Climatic conditions: Temperature: 23 – 25 °C Humidity: 30 – 35 % Pressure QFE: 935 – 945 hPa (2020-01)

Climatic conditions: Temperature: 24 °C Humidity: 32 % Pressure QFE: 936 hPa (2020-04-24)

Test set-up:

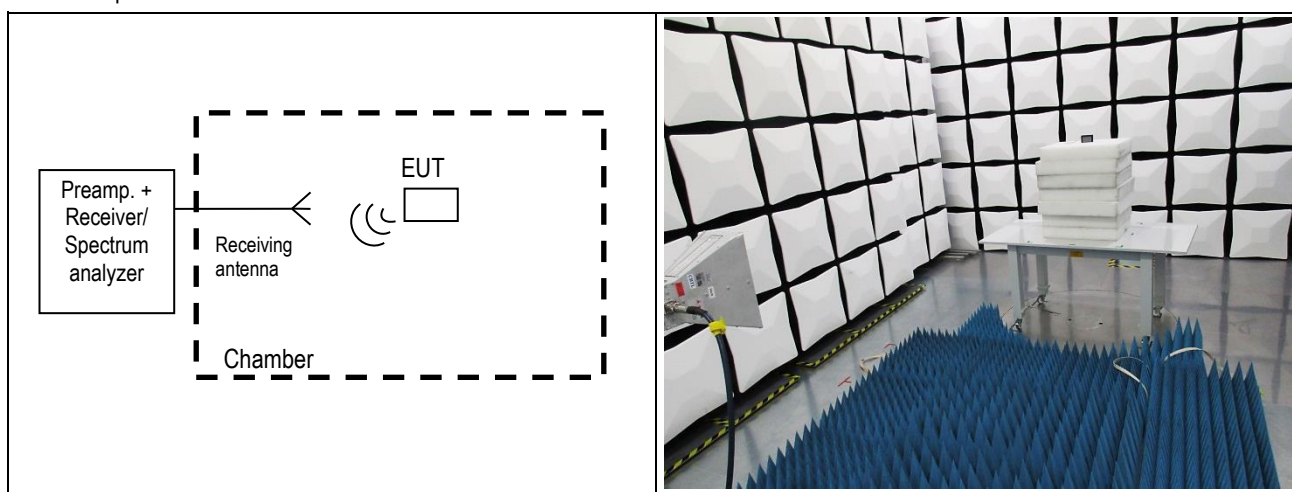

Remarks:

- Limit values expressed in dB μ V/m and transformed to a measuring distance of 1 m (factor used = 20 dB/decade) if necessary. E.g.: for f = 1 GHz the limit is 500 μ V/m at 3 m;

$$20 \log \left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3m}{3m} \right) = 54 \frac{dB\mu V}{m} \text{ at } 3m$$
- Average measurements determined from the peak field strength after correcting for the worst-case duty cycle according to § 4.1.4.2.4 of ANSI C63.10:2013. Correction factor: $\delta(\text{dB}) = 20 \log(\Delta) = 20 \log(20/500) = -27.96$ dB

Test equipment: 2020-01

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Preamplifier	☒ 05-56	☐ 05-87	☐ 14-27			
Antenna (horn)	☐ 90-24	☒ 07-31				
Cables	☒ 06-00C	☐ 06-01	☒ 11-30			
Filter	☒ 04-21					
Attenuator 10dB	☐ 11-36					
	☒ Vitam, Rev. 2.4.13		☐ RadiMation 2015.1.7			

Test equipment: 2020-04-24


Spectrum analyser	☒ 168593	☐ 184454	☐ 25953
Receiver	☒ 168593	☐ 184454	☐ 25953
Preamplifier	☐ 14-27	☒ 05-56	
Notch filter	☒ 04-19	☐ 04-21	
Antenna, (horn))	☒ 07-31		
Cables	☒ 1.0, 2.0, 3.0	☐ 168547	
Software and Revision	☐ Vitam, Rev. 2_4_13		☒ RadiMation 2019.1.5

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Client: XC Tracer GmbH
 Equipment: XC Tracer Maxx, Proto 1 (MY)
 Cables connected: None
 Operating mode: TX, f = 915 MHz, modulated (random), Power setting 16 dBm; see § 4.4
 Modification: None
 Remarks: With notch filter and internal preamp

Settings of the measurement equipment

Limits	CRF 47 §§15.209/109 Cl. B (3m)	Frequency range	1 GHz ... 2.5 GHz
Pre-scan measurement	Peak	Resolution / Video Bandwidth	1 MHz / 3 MHz
Sweep time:	100 ms	Number of sweeps:	20
Geometry:	Height: 1 - 3 m; Azimuth: 0° – 360°, 16 steps; Polarisation: Horizontal & Vertical		
Receiver measurement:	Peak	Measure / Observation Time	1 s / 10 s
Geometry:	On the position of the maximum		

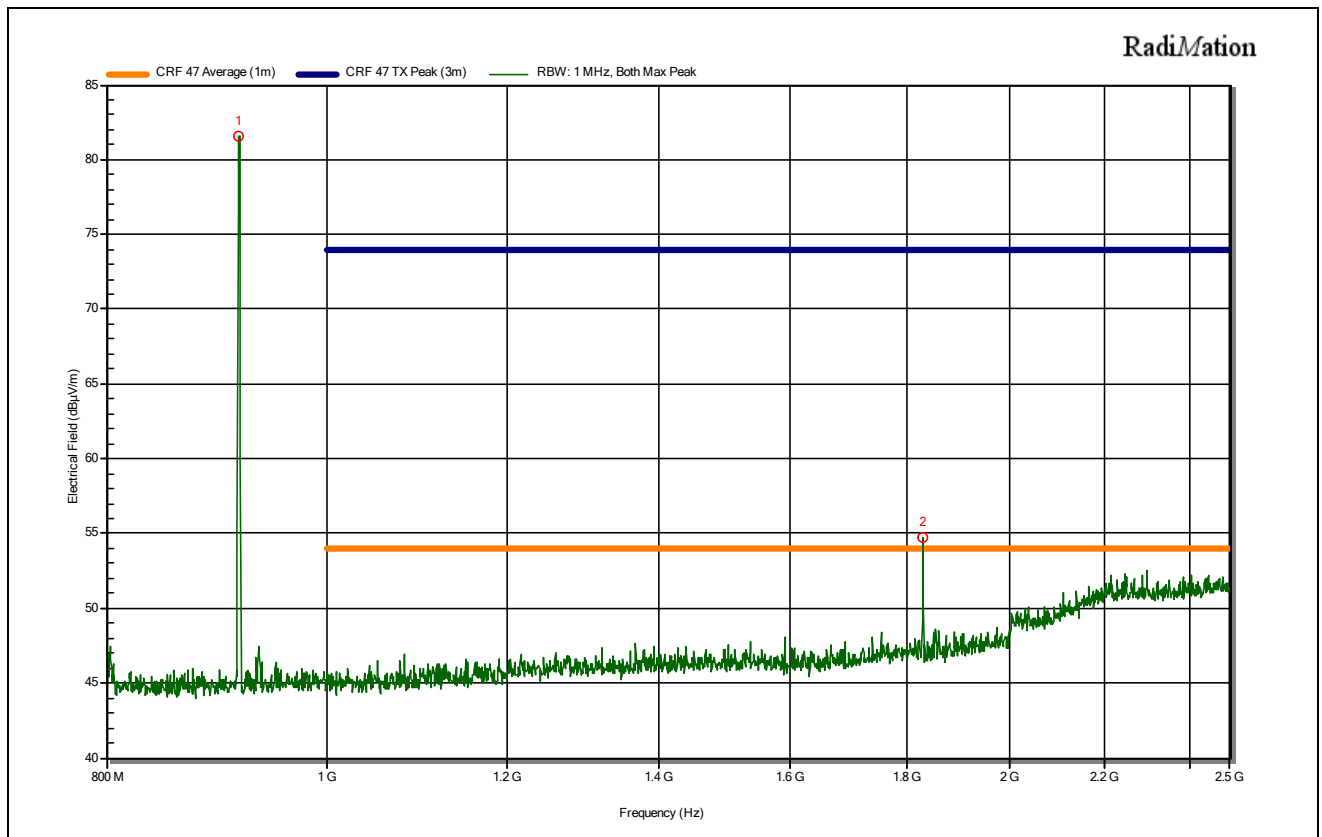

Detected peaks

Peak Number	Frequency	Peak	Peak Difference	Average Correction	Calculated Average	Average Difference	Status	Angle	Height	Polarization
1	915 MHz	81.6 dBµV/m	---	-28.0 dB	53.6 dBµV/m	---	Pass *	202 degrees	1.5 m	Horizontal
2	1.83 GHz	54.7 dBµV/m	-19.3 dB	-28.0 dB	26.7 dBµV/m	-27.3 dB	Pass	180 degrees	1 m	Horizontal

* Carrier of the radio service


Place and date of test:
Operator:

Rossens, 2020-04-24
F. Wyler

Client: XC Tracer GmbH
 Equipment: XC Tracer Maxx, Proto 4 (MY)
 Cables connected: None
 Operating mode: TX, f = 915 MHz, modulated (random), Power setting 16 dBm; see § 4.4
 Modification: Level 1
 Remarks: With notch filter and internal preamp

Settings of the measurement equipment

Limits	CRF 47 §§15.209/109 Cl. B (3m)	Frequency range	1 GHz ... 2.5 GHz
Pre-scan measurement	Peak	Resolution / Video Bandwidth	1 MHz / 3 MHz
Sweep time:	100 ms	Number of sweeps:	20
Geometry:	Height: 1 - 3 m; Azimuth: 0° – 360°, 16 steps; Polarisation: Horizontal & Vertical		
Receiver measurement:	Peak	Measure / Observation Time	1 s / 10 s
Geometry:	On the position of the maximum		

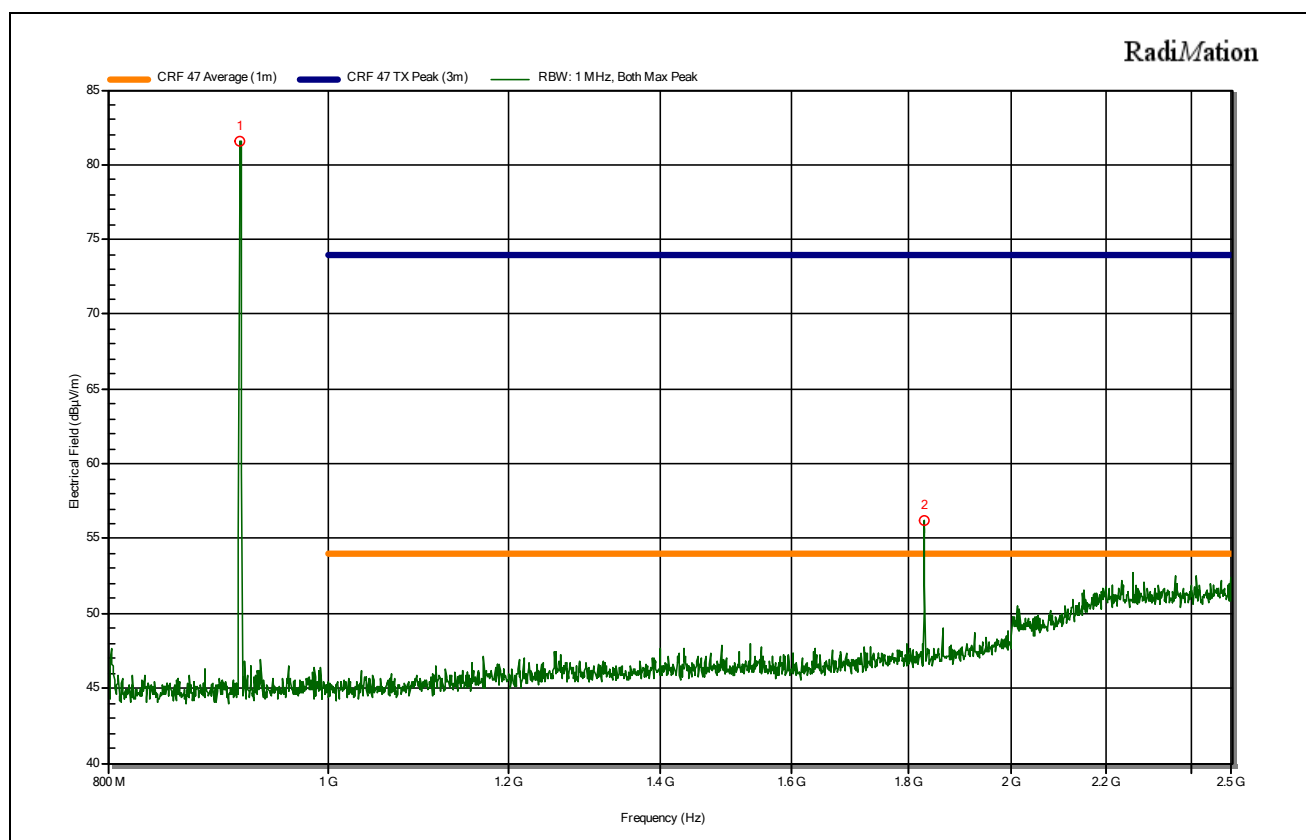

Detected peaks

Peak Number	Frequency	Peak	Peak Difference	Average Correction	Calculated Average	Average Difference	Status	Angle	Height	Polarization
1	915 MHz	81.6 dBµV/m	---	-28.0 dB	53.6 dBµV/m	---	Pass *	202 degrees	1.5 m	Horizontal
2	1.83 GHz	56.2 dBµV/m	-17.8 dB	-28.0 dB	28.2 dBµV/m	-25.8 dB	Pass	180 degrees	2 m	Horizontal

* Carrier of the radio service


Place and date of test:
Operator:

Rossens, 2020-04-24
F. Wyler

Client: XC Tracer GmbH
 Equipment: XC Tracer Maxx, Proto 1 (MY)
 Cables connected: None
 Operating mode: TX, f = 915 MHz, modulated (random), Power setting 16 dBm; see § 4.4
 Modification: None
 Remarks: With external preamp

Settings of the measurement equipment

Limits	CRF 47 §§15.209/109 Cl. B (3m)	Frequency range	2.5 GHz ... 10 GHz
Pre-scan measurement	Peak	Resolution / Video Bandwidth	1 MHz / 3 MHz
Sweep time:	100 ms	Number of sweeps:	20
Geometry:	Height: 1 - 3 m; Azimuth: 0° – 360°, 16 steps; Polarisation: Horizontal & Vertical		
Receiver measurement:	Peak	Measure / Observation Time	1 s / 10 s
Geometry:	On the position of the maximum		

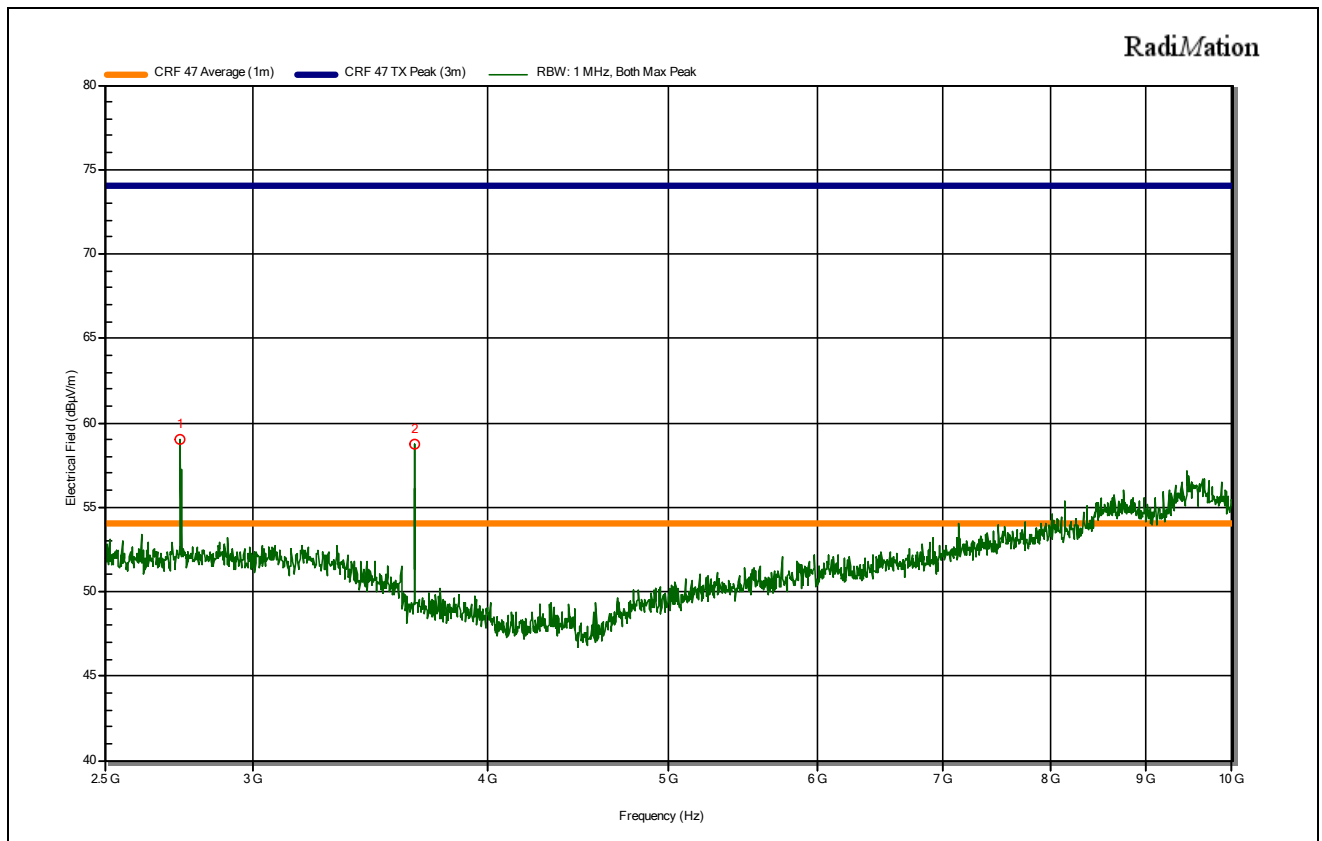

Detected peaks

Peak Number	Frequency	Peak	Peak Difference	Average Correction	Calculated Average	Average Difference	Status	Angle	Height	Polarization
1	2.745 GHz	59.0 dBµV/m	-15.0 dB	-28.0 dB	31.0 dBµV/m	-23.0 dB	Pass	135 degrees	1 m	Vertical
2	3.66 GHz	58.8 dBµV/m	-15.2 dB	-28.0 dB	30.8 dBµV/m	-23.2 dB	Pass	202 degrees	1 m	Horizontal


Place and date of test:
Operator:

Rossens, 2020-04-24
F. Wyler

Client: XC Tracer GmbH
 Equipment: XC Tracer Maxx, Proto 4 (MY)
 Cables connected: None
 Operating mode: TX, f = 915 MHz, modulated (random), Power setting 16 dBm; see § 4.4
 Modification: Level 1
 Remarks: With external preamp

Settings of the measurement equipment

Limits	CRF 47 §§15.209/109 Cl. B (3m)	Frequency range	2.5 GHz ... 10 GHz
Pre-scan measurement	Peak	Resolution / Video Bandwidth	1 MHz / 3 MHz
Sweep time:	100 ms	Number of sweeps:	20
Geometry:	Height: 1 - 3 m; Azimuth: 0° – 360°, 16 steps; Polarisation: Horizontal & Vertical		
Receiver measurement:	Peak	Measure / Observation Time	1 s / 10 s
Geometry:	On the position of the maximum		

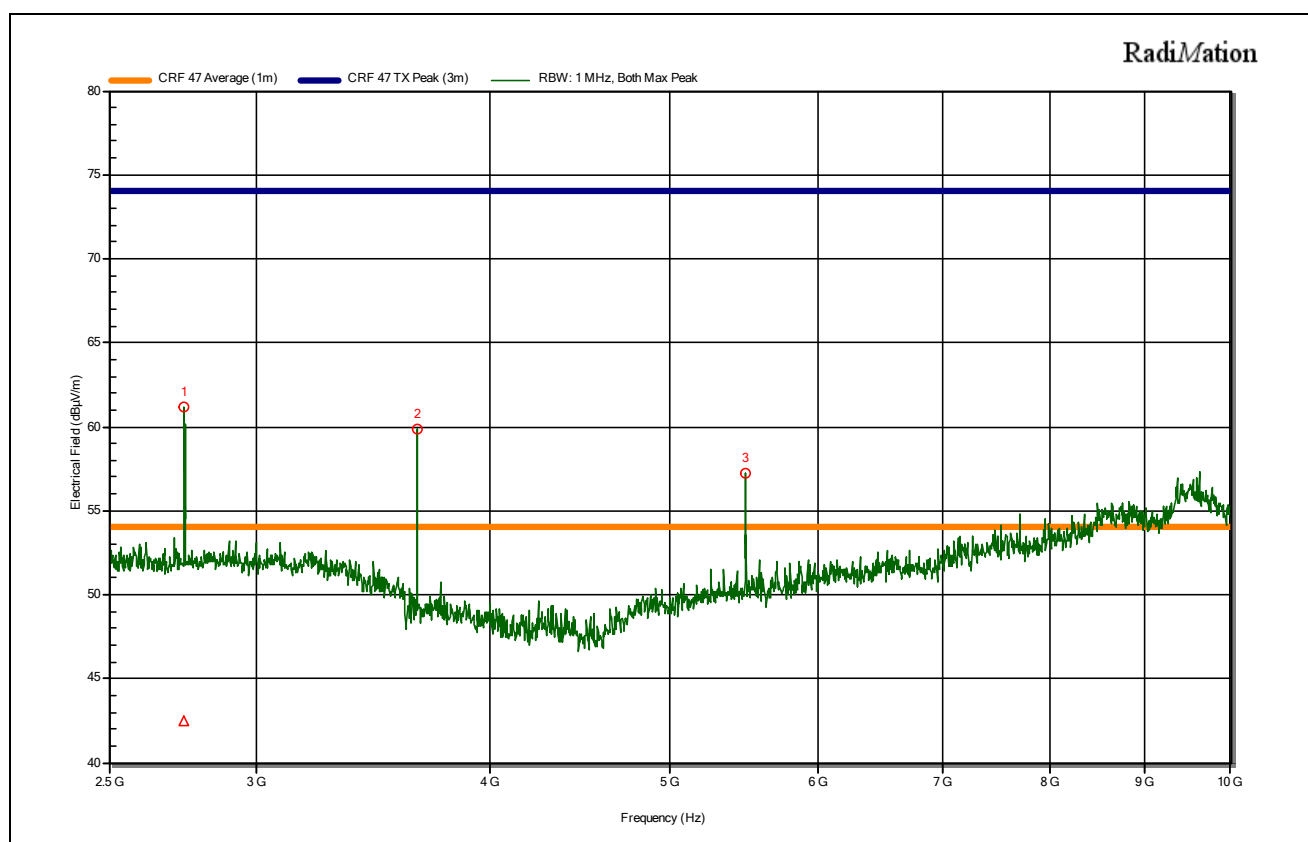

Detected peaks

Peak Number	Frequency	Peak	Peak Difference	Average Correction	Calculated Average	Average Difference	Status	Angle	Height	Polarization
1	2.745 GHz	61.1 dBµV/m	-12.9 dB	-28.0 dB	33.1 dBµV/m	-20.9 dB	Pass	135 degrees	1.5 m	Vertical
2	3.66 GHz	59.9 dBµV/m	-14.1 dB	-28.0 dB	31.9 dBµV/m	-22.1 dB	Pass	315 degrees	3 m	Horizontal
3	5.49 GHz	57.2 dBµV/m	-16.8 dB	-28.0 dB	29.2 dBµV/m	-24.8 dB	Pass	67 degrees	1 m	Horizontal


Place and date of test:
Operator:

Rossens, 2020-04-24
F. Wyler

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 902MHz, modulated (random), Power setting 16 dBm
Remarks : Zone 0.8 - 2.5 GHz with notch filter and internal preamp
Zone 2.5 - 9.5 GHz with external preamp.
Limit does not apply to: Carrier (902-928 MHz), H2 (1804-1856 MHz) & H7 (6314-6496 MHz)

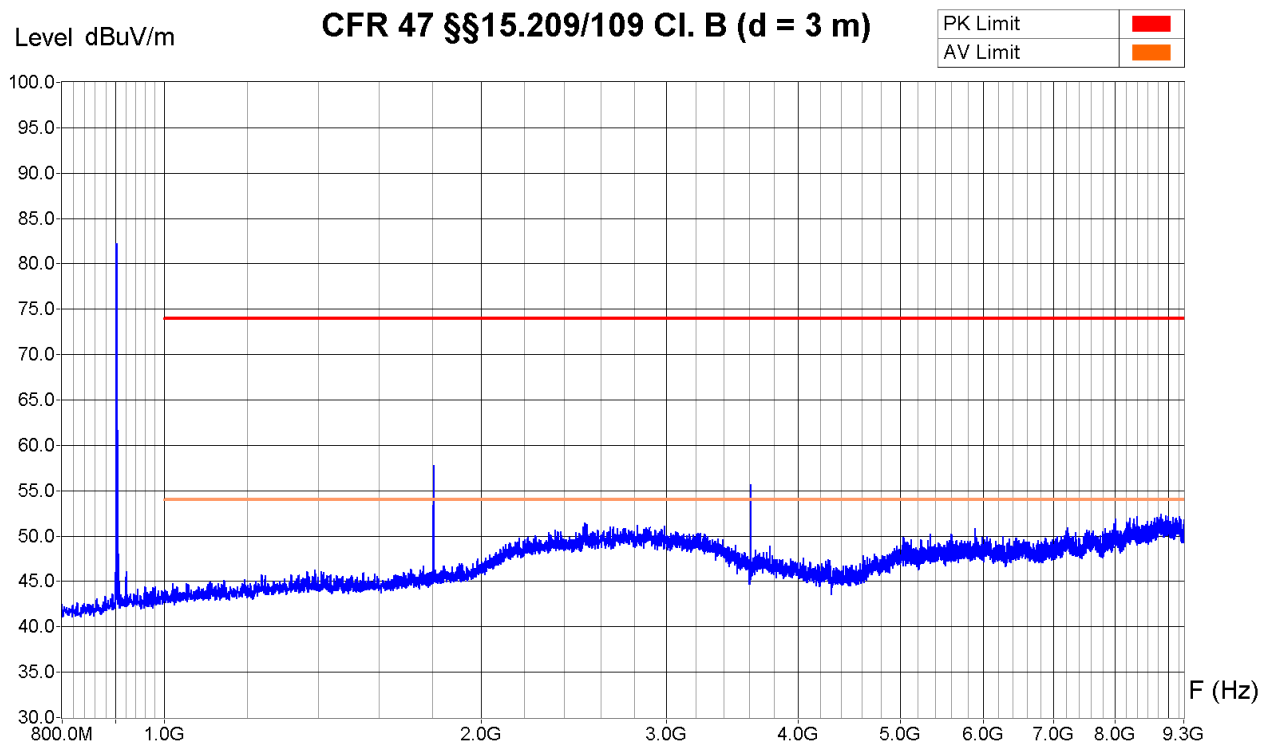

Zone	800 MHz - 2.50 GHz	2.50 GHz - 6 GHz	6 GHz - 9.50 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz


Final Result					
Frequency [GHz]	Peak field [dBuV/m]	Correction for Average [dB]	Calculated Average field [dBuV/m]	Average Limit [dBuV/m]	Conclusion
1.804	57.8	-28.0	29.8	54.0	Pass
3.608	55.7	-28.0	27.7	54.0	Pass

Operator: B. Itzcovich
Date/Time: 10.01.2020 15:43
Filename:
86_RE_1-
9G3_TX902M_16dBm_H_FCC_Pt

Measurement Type : Radiated Field
 Polarisation : Vertical
 Table Angle : 0 - 360°
 Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 902MHz, modulated (random), Power setting 16 dBm
 Remarks : Zone 0.8 - 2.5 GHz with notch filter and internal preamp
 Zone 2.5 - 9.5 GHz with external preamp.
 Limit does not apply to: Carrier (902-928 MHz), H2 (1804-1856 MHz) & H7 (6314-6496 MHz)

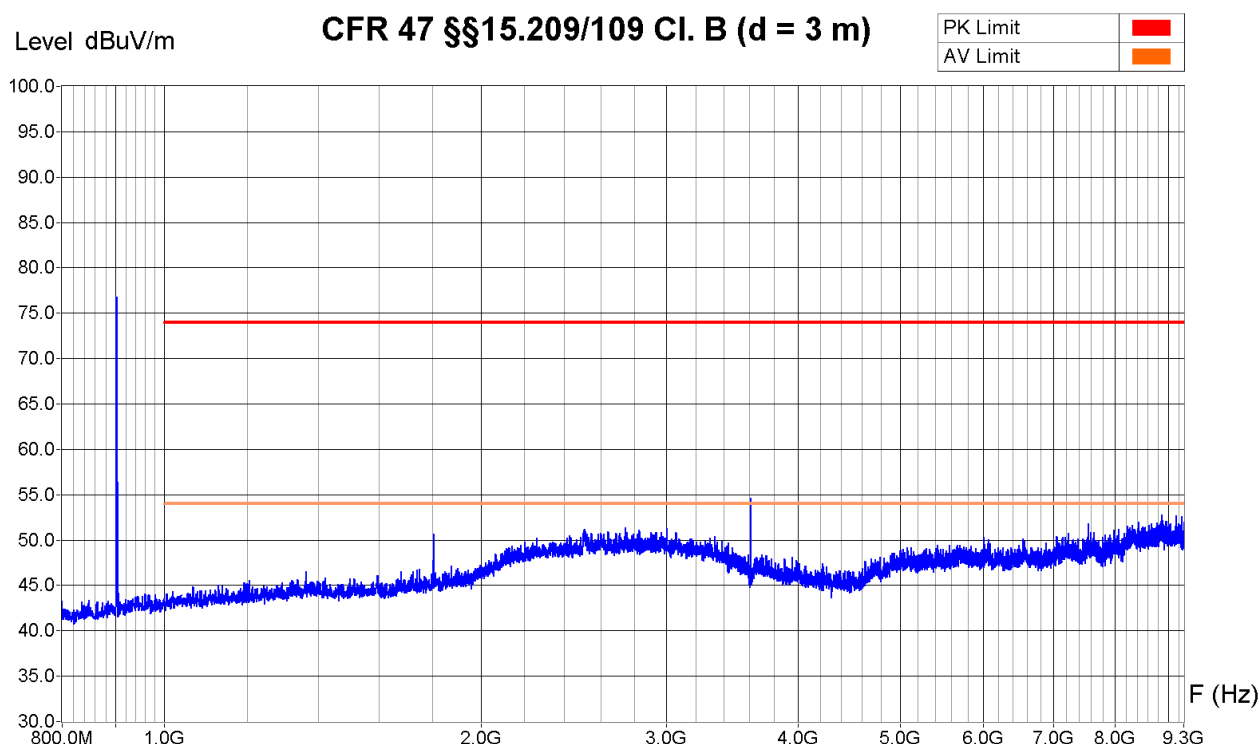

Zone	800 MHz - 2.50 GHz	2.50 GHz - 6 GHz	6 GHz - 9.50 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz


Final Result					
Frequency [GHz]	Peak field [dBuV/m]	Correction for Average [dB]	Calculated Average field [dBuV/m]	Average Limit [dBuV/m]	Conclusion
3.608	54.6	-28.0	26.6	54.0	Pass

Operator: B. Itzcovich
 Date/Time: 10.01.2020 16:10
 Filename:
 87_RE_1-
 9G3_TX902M_16dBm_V_FCC_Pt.

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : TX, f = 928MHz, modulated (random), Power setting 16 dBm
Remarks : Zone 0.8 - 2.5 GHz with notch filter and internal preamp
Zone 2.5 - 9.5 GHz with external preamp.
Limit does not apply to: Carrier (902-928 MHz), H2 (1804-1856 MHz) & H7 (6314-6496 MHz)

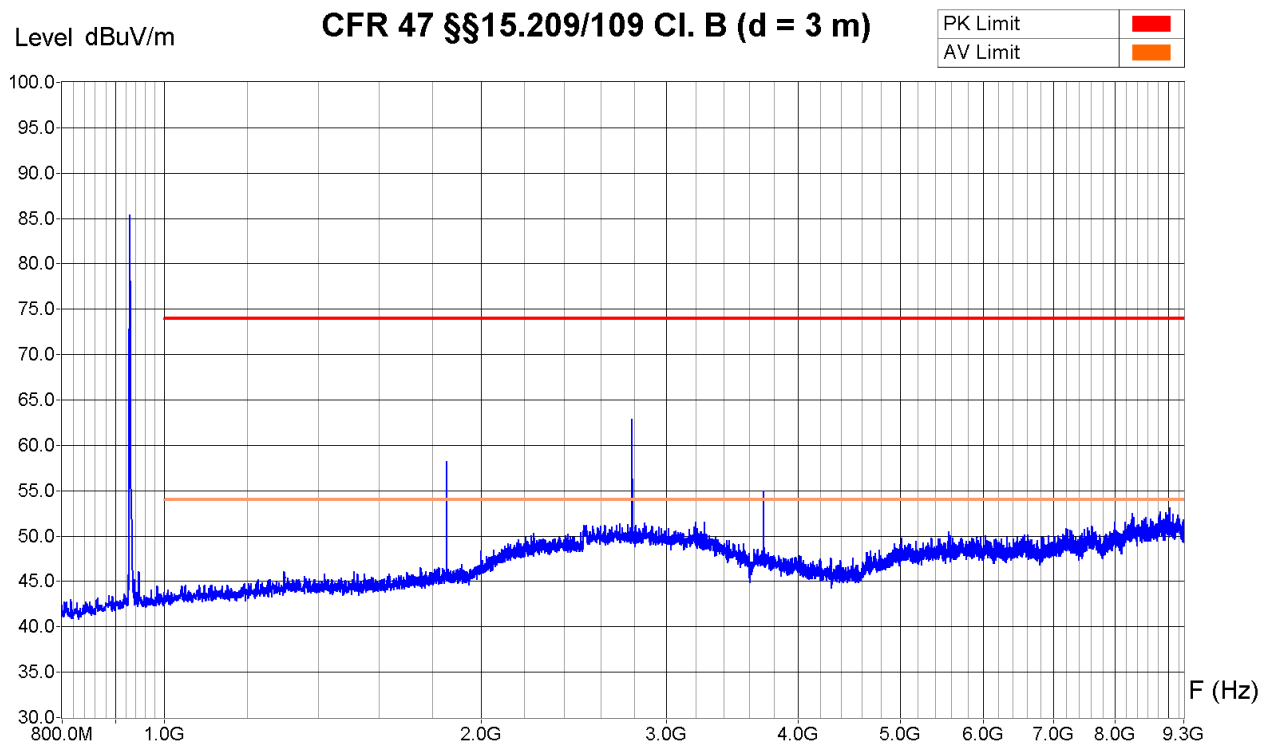

Zone	800 MHz - 2.50 GHz	2.50 GHz - 6 GHz	6 GHz - 9.50 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz


Final Result					
Frequency [GHz]	Peak field [dBuV/m]	Correction for Average [dB]	Calculated Average field [dBuV/m]	Average Limit [dBuV/m]	Conclusion
1.856	58.2	-28.0	30.2	54.0	Pass
2.784	62.9	-28.0	34.9	54.0	Pass
3.712	55.0	-28.0	27.0	54.0	Pass

Operator: B. Itzcovich
Date/Time: 13.01.2020 11:11
Filename:
88_RE_1-
9G3_TX928M_16dBm_H_FCC_Pt

Measurement Type : Radiated Field
 Polarisation : Vertical
 Table Angle : 0 - 360°
 Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : TX, f = 928MHz, modulated (random), Power setting 16 dBm
 Remarks : Zone 0.8 - 2.5 GHz with notch filter and internal preamp
 Zone 2.5 - 9.5 GHz with external preamp.
 Limit does not apply to: Carrier (902-928 MHz), H2 (1804-1856 MHz) & H7 (6314-6496 MHz)

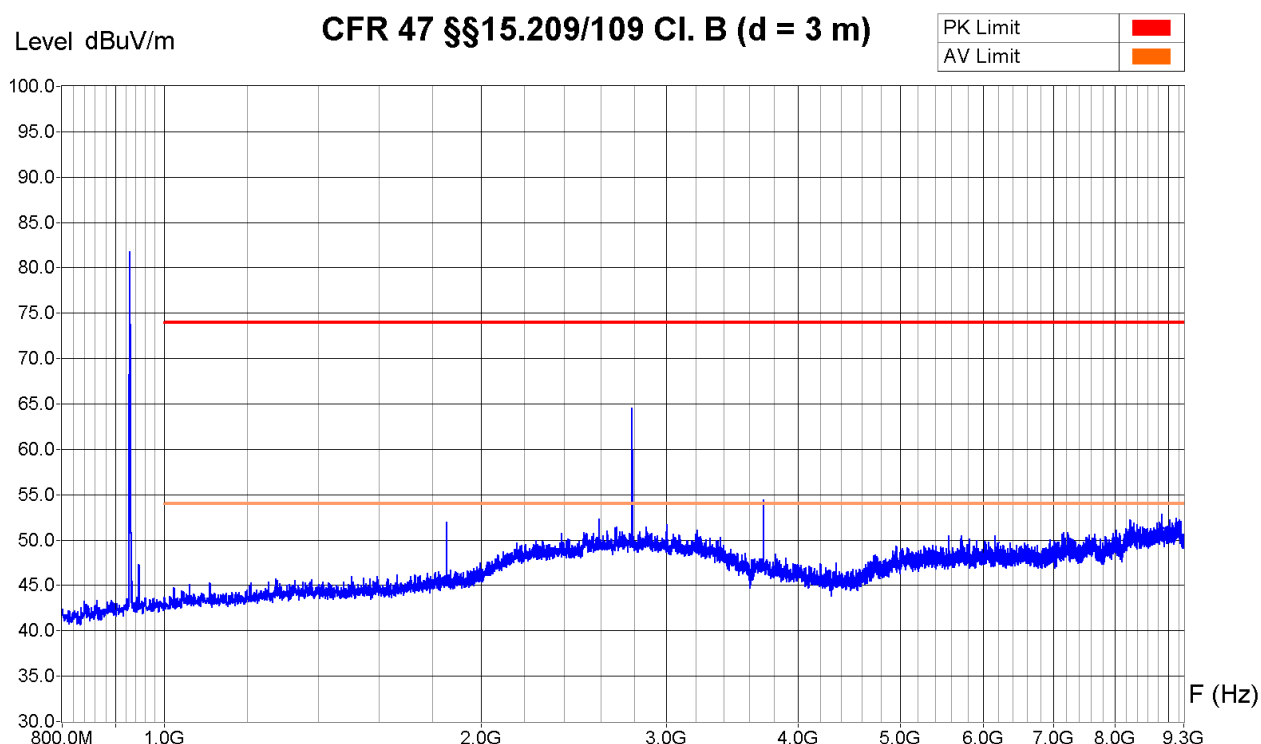

Zone	800 MHz - 2.50 GHz	2.50 GHz - 6 GHz	6 GHz - 9.50 GHz
Video Bandwidth	3 MHz	3 MHz	3 MHz
Resol Bandwidth	1 MHz	1 MHz	1 MHz

Final Result					
Frequency [GHz]	Peak field [dBuV/m]	Correction for Average [dB]	Calculated Average field [dBuV/m]	Average Limit [dBuV/m]	Conclusion
2.784	64.5	-28.0	36.5	54.0	Pass
3.712	54.4	-28.0	27.4	54.0	Pass

Operator: B. Itzcovich
 Date/Time: 13.01.2020 10:58
 Filename:
 89_RE_1-
 9G3_TX928M_16dBm_V_FCC_Pt.

6.11 Spurious emissions, receive mode – radiated**6.11.1 30 MHz to 1 GHz**

Test site: ☐ SAC10 ☐ open test site
☒ SAC3 ☐

Distance: ☐ 3 m ☒ 10 m ☐ 30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)


Meas. Uncertainty: ± 4.6 dB (30 – 300 MHz) / ± 3.7 dB (300 – 1000 MHz)

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value of all the disturbances appearing while the apparatus is under test. The peak values are recorded continuously on the graph. The values exceeding a limit are re-measured manually using a receiver.

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 25 °C Humidity: 30 % Pressure QFE: 938 hPa

Test set-up:

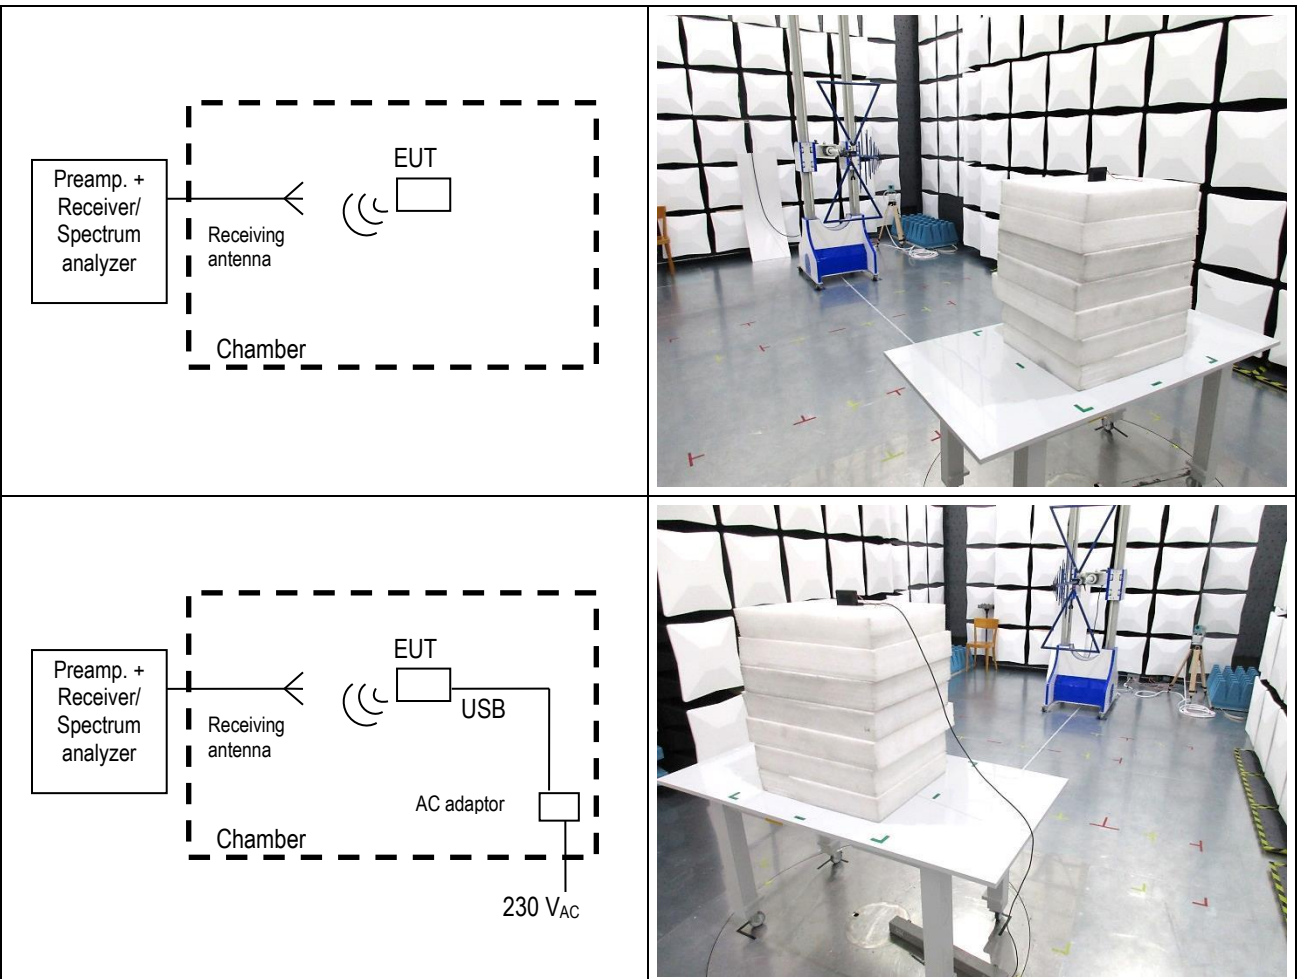**Test equipment:**

Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 16-03
Receiver	☐ 85-04	☐ 90-43	☐ 94-35	☐ 04-29	☒ 16-03	
Preamplifier	☐ 90-01	☐ 95-86	☐ 05-56	☐ 05-59	☒ 16-03 internal	
Antenna (bilog)	☐ 94-03	☒ 05-38				
Filter	☐ 04-21					
Cables	☒ SAC3_RE_5m_1.0/3.0		☐ 06-00C			
Software and Revision	☒ Vitam, Rev. 2.4.13		☐ RadiMaton 2015.1.7			

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Remarks:


- Limit values expressed in dB μ V/m and transformed to a measuring distance of 3 m (factor used = 20 dB/decade) if necessary
e.g.: for f = 40 MHz the limit is 100 μ V/m at 3 m;

$$20 \log \left(\frac{100 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3m}{3m} \right) = 40 \frac{dB\mu V}{m} \text{ at } 3m$$

Measurement Type : Radiated Field
Polarisation : Horizontal
Table Angle : 0 - 360°
Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : RX, f = 915 MHz
Remarks : Without filter

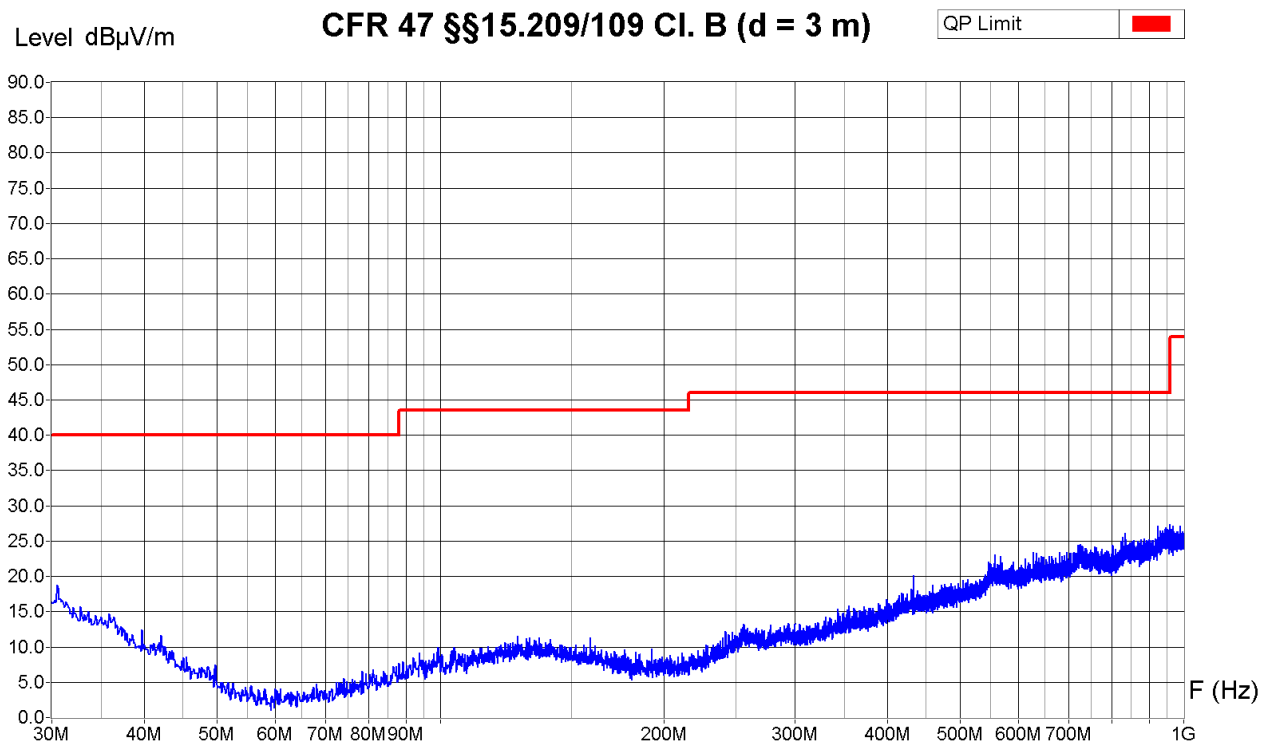

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz


Sample calculation with all conversion and correction factors used					
Frequency [MHz]	Analyser Peak value [dBμV]	Cable att. corr. [dB]	Preamp. gain corr. [dB]	Antenna factor corr. [dB]	PK field [dBμV/m]
30.6	-0.4	+0.2	0.0	+17.6	= 17.4

Operator: B. Itzcovich
Date/Time: 13.01.2020 18:29
Filename:
100_RE_30M-
1G_RX_H_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Vertical
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : RX, f = 915 MHz
 Remarks : Without filter

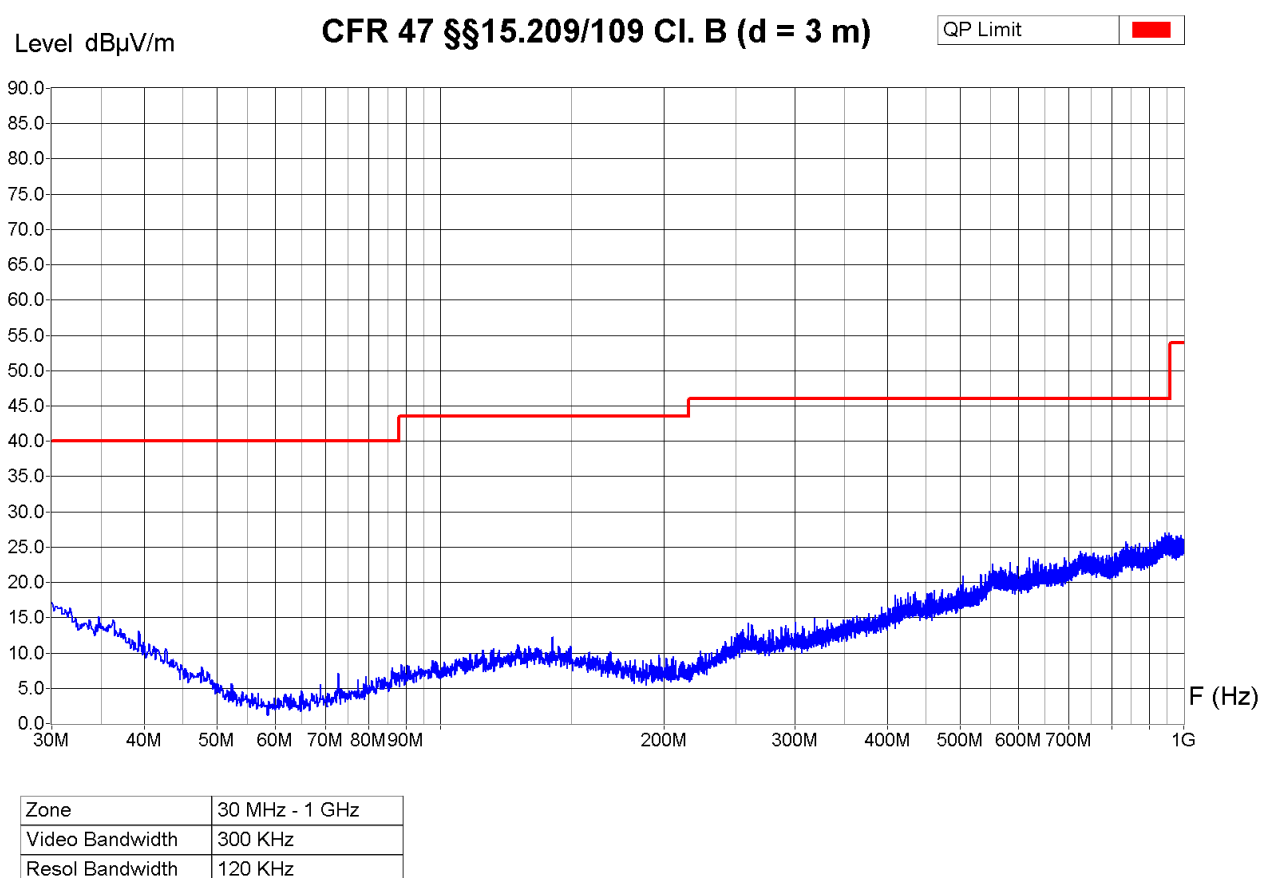


Operator: B. Itzcovich
 Date/Time: 13.01.2020 18:32
 Filename:
 101_RE_30M-
 1G_RX_V_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Without filter

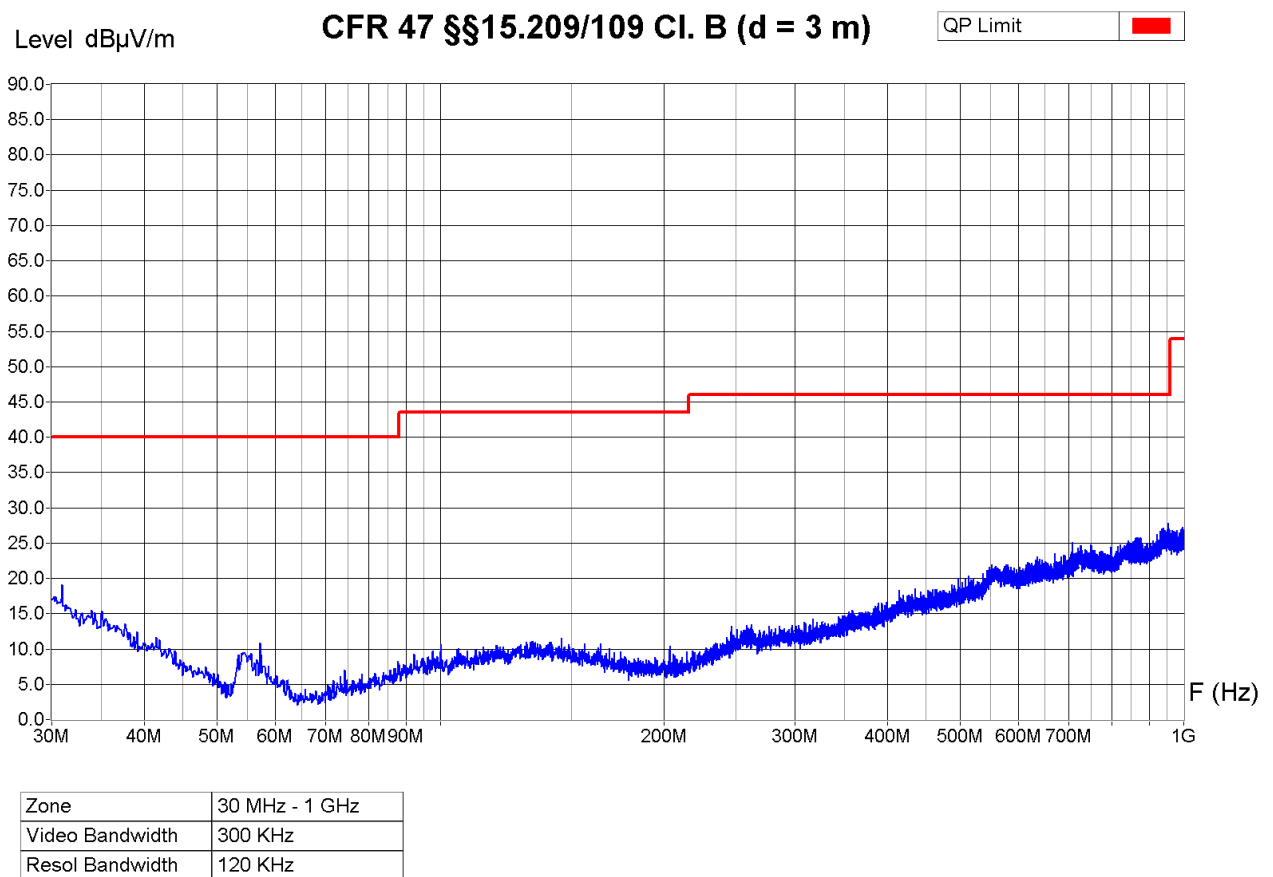


Operator: B. Itzcovich
 Date/Time: 13.01.2020 18:23
 Filename:
 98_RE_30M-
 1G_Charging_H_FCC.png/.txt

Measurement Type : Radiated Field
 Polarisation : Vertical
 Table Angle : 0 - 360°
 Antenna Height : 1 - 4m



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Without filter

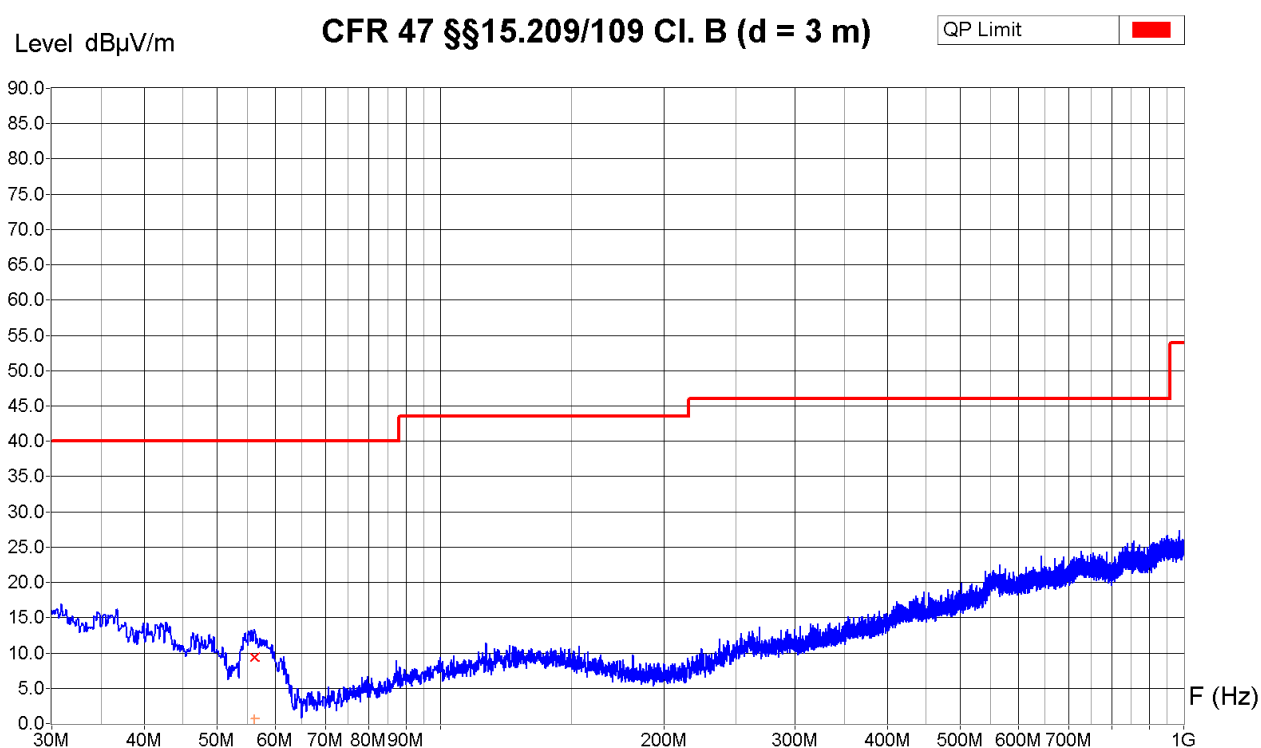

Zone	30 MHz - 1 GHz
Video Bandwidth	300 KHz
Resol Bandwidth	120 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
56.20 MHz	15.5 dBμV/m	9.4 dBμV/m	0.7 dBμV/m	30.6 dB

Operator: B. Itzcovich
 Date/Time: 13.01.2020 18:18
 Filename:
 99_RE_30M-
 1G_Charging_V_FCC.png/.txt

6.11.2 1 GHz to 6 GHz

Test site: ☒ SAC3 ☐ SAC10

Distance: ☐ 1 m ☒ 3 m ☐ 10 m ☐ 30 m

Position of EUT: 1.5 m (height of the equipment under test above floor)


Meas. Uncertainty: ± 4.7 dB

Test method: The electromagnetic disturbance radiated by the equipment is measured using a spectrum analyzer and a wide band antenna. The antenna is moved from 1 to 4 m in height successively with horizontal and vertical polarizations, and aimed at the source by tilting. The turning table is operated through 360° during the measurements. The recordings are carried out taking into account the maximum value (peak) of all the disturbances appearing while the apparatus is under test.

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 24 °C Humidity: 30 % Pressure QFE: 940 hPa

Test set-up:

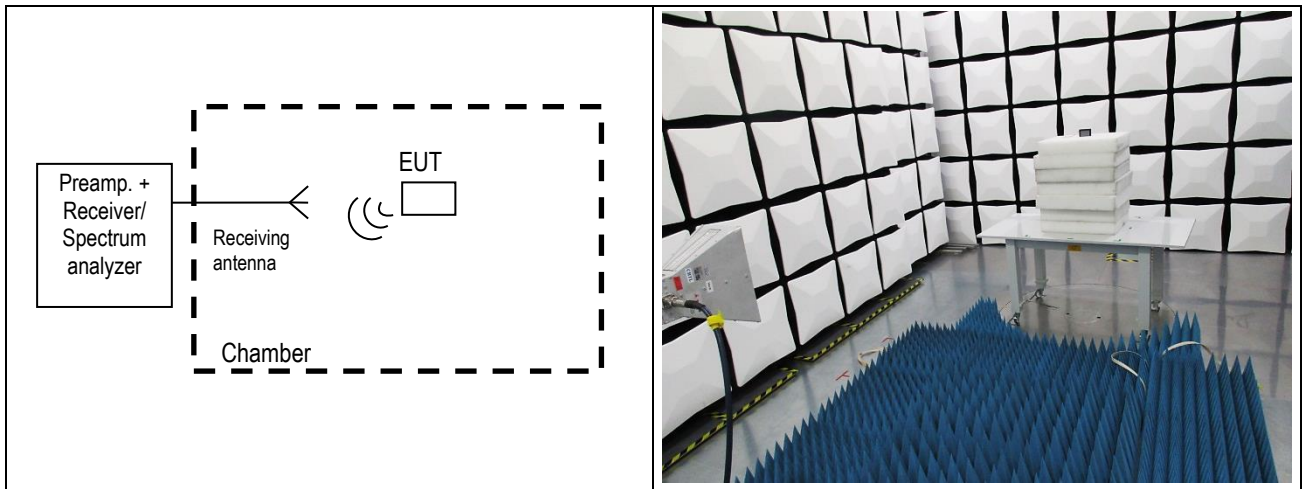

Remarks: Limit values expressed in dB μ V/m and transformed to a measuring distance of 1m (factor used = 20 dB/decade) if necessary
e.g.: for f = 1 GHz the limit is 500 μ V/m at 3 m;

$$20 \log \left(\frac{500 \frac{\mu V}{m}}{1 \frac{\mu V}{m}} \right) + 20 \log \left(\frac{3m}{3m} \right) = 54 \frac{dB\mu V}{m} \text{ at } 3m$$

Test equipment:


Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 18-01
Preamplifier	☐ 05-56	☐ 05-87	☒ 14-27			
Antenna (horn)	☐ 90-24	☒ 07-31				
Cables	☒ 06-00C	☐ 06-01	☒ 11-30			
Filter	☐ 04-21					
Software and Revision	☒ Vitam, Rev. 2.4.13		☐ RadiMation 2015.1.7			

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Radiated Field
 Polarisation : Horizontal
 Table Angle : 0 - 360°
 Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : RX, f = 915 MHz
 Remarks : With out filter, with external preamp.

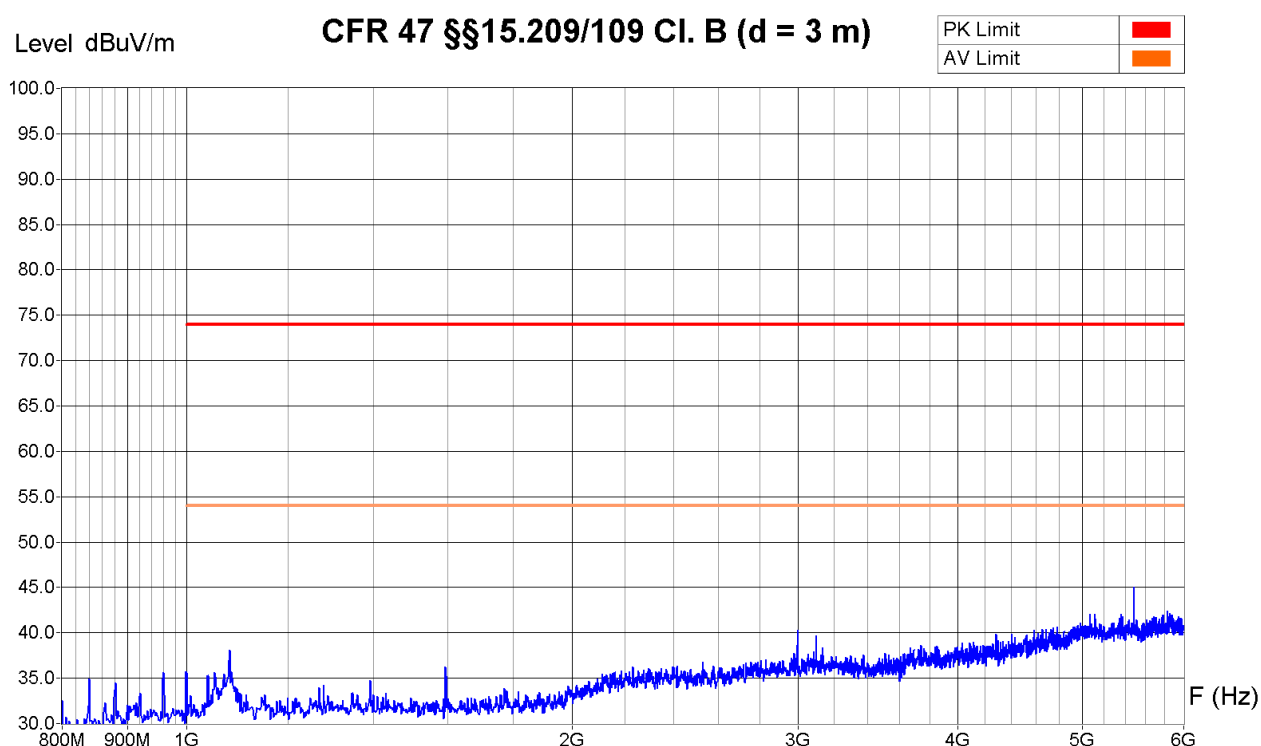

Zone	800 MHz - 6 GHz
Video Bandwidth	3 MHz
Resol Bandwidth	1 MHz


Sample calculation with all conversion and correction factors used					
Frequency [GHz]	Analyzer Peak value [dBuV]	Cable att. corr. [dB]	Preamp. gain corr. [dB]	Antenna factor corr. [dB]	Peak field [dBuV/m]
5.492	48.8	1.6	-38.4	+32.5	= 44.5

Operator: B. Itzcovich
 Date/Time: 13.01.2020 12:05
 Filename:
 90_RE_1-
 6G_RX915M_H_FCC.png/.txt

Measurement Type : Radiated Field
Polarisation : Vertical
Table Angle : 0 - 360°
Antenna Height : 1 - 3m (tilted)



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
Set-Up : Chamber SAC3. See photos. Peak detector sweep
Operating Conditions : RX, f = 915 MHz
Remarks : With out filter, with external preamp.

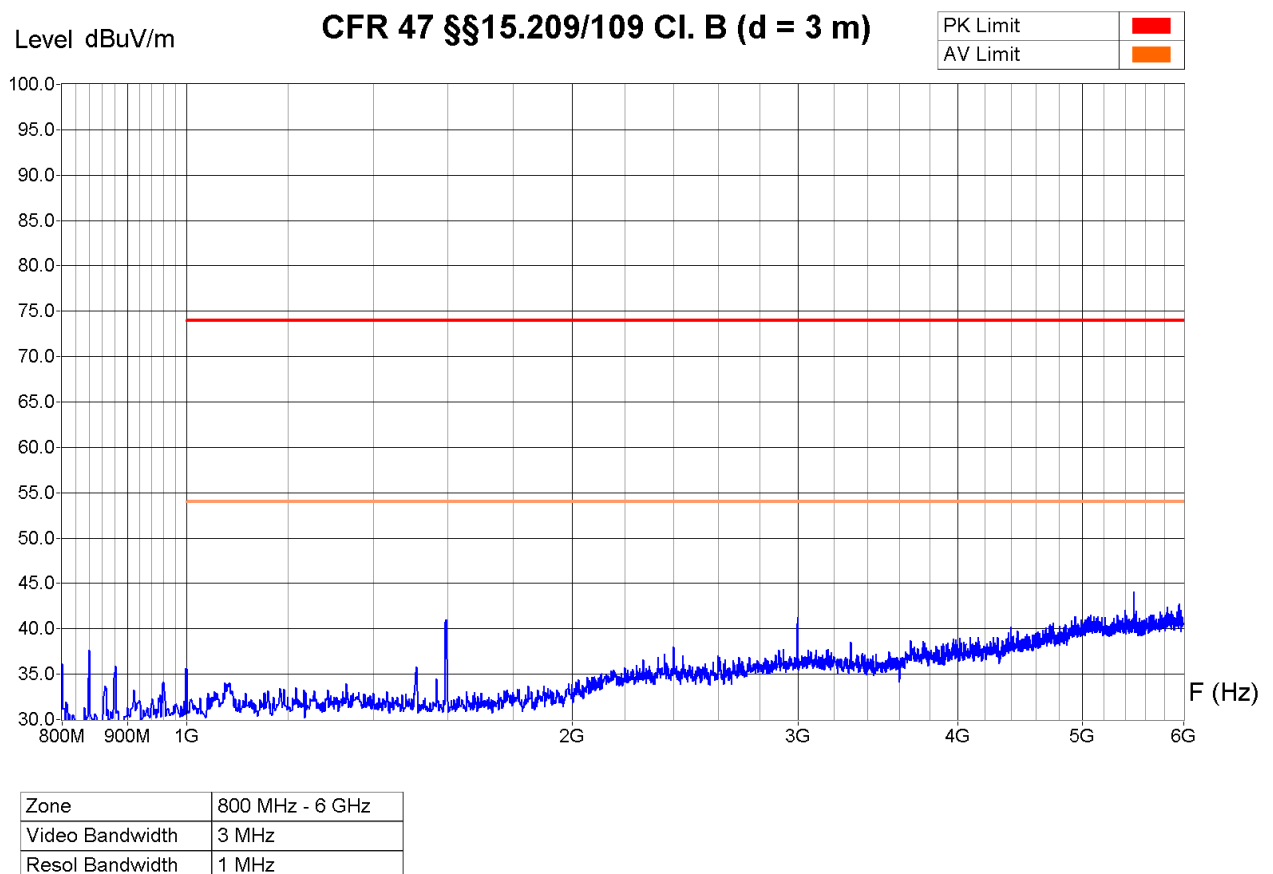

Operator: B. Itzcovich
Date/Time: 13.01.2020 12:12
Filename:
91_RE_1-
6G_RX915M_V_FCC.png/.txt

6.12 Conducted emission – Interference voltage

Test site: ☐ SAC10 ☐ shielded room
☒ SAC3 ☐ laboratory


Meas. Uncertainty: ± 3.6 dB

Measuring method: The conducted disturbance is measured using a spectrum analyzer and a line impedance substitution network (LISN). The measurement of the voltage against the earth is carried out successively. The peak values are recorded continuously on the graph. The values that exceed the limit are re-measured with a measuring receiver.

Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Climatic conditions: Temperature: 23 °C Humidity: 30 % Pressure QFE: 946 hPa

Test set-up:

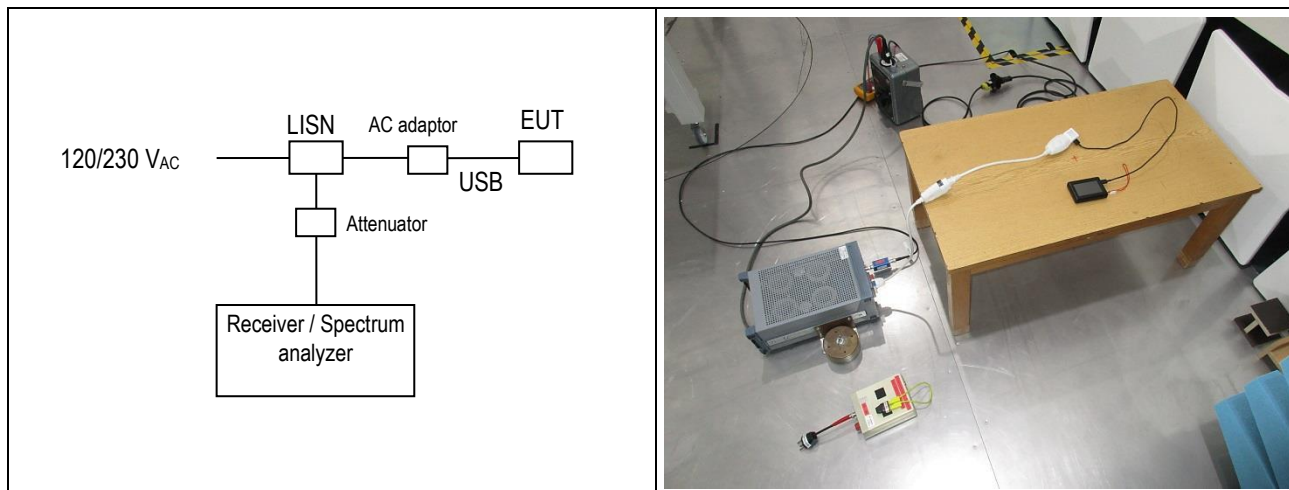

Remarks: Tested in charging mode only because EUT is not intended to transmit when USB cable is connected

Test equipment:


Spectrum analyzer	☐ 88-14	☐ 94-24	☐ 02-06	☐ 03-45	☐ 05-39	☒ 16-03
Receiver	☐ 85-12	☐ 90-11	☒ 16-03	☐ 04-28	☐ 06-29	
LISN	☐ 85-13	☐ 90-08	☐ 94-36	☐ 94-40	☐ 95-12	☒ 00-43
Protection 10 dB	☐ 95-33	☐ 95-35	☒ 91-45	☐ 96-38	☐ included in LISN	
Protection 20 dB	☐ 91-46	☐ 95-33	☐ 95-38	☐ included in LISN		
Variable transformer	☒ 75-04					
Multimeter	☒ 08-17					
Cables	☒ SAC3_CE_8m		☒ SAC3_CE_3m			
Software and Revision	☒ Vitam, Rev. 2.4.13		☐ RadiMation 2015.1.7			

Result: ☒ pass ☐ fail ☐ not applicable ☐ not tested

Measurement Type : Voltage Interference
 Supply : Line 1
 Other : 120 V / 50 Hz



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Measured on typical AC-USB adaptor SAMSUNG EP-TA50EWE

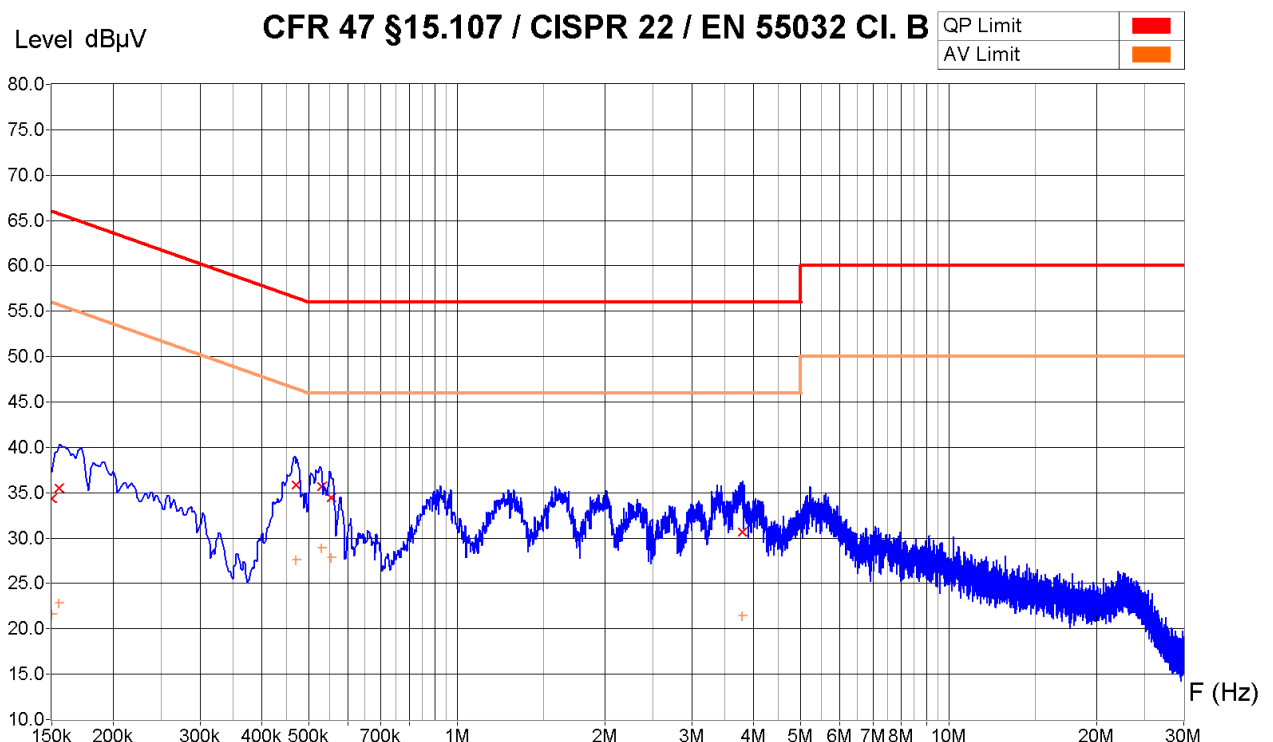

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
150.10 KHz	41.5 dBμV	34.3 dBμV	21.6 dBμV	31.7 dB
155 KHz	40.4 dBμV	35.5 dBμV	22.8 dBμV	30.2 dB
470 KHz	41.1 dBμV	35.9 dBμV	27.6 dBμV	20.7 dB
530 KHz	38.8 dBμV	35.7 dBμV	28.9 dBμV	20.3 dB
555 KHz	37.9 dBμV	34.5 dBμV	27.9 dBμV	21.5 dB
3.80 MHz	36.4 dBμV	30.7 dBμV	21.5 dBμV	25.3 dB

Sample calculation with all conversion and correction factors used


Frequency [kHz]	Receiver QP value [dBμV]	Cable att. corr. [dB]	Attenuator corr. [dB]	QP voltage [dBμV]
470	25.8	+0.1	+ 10.0	= 35.9

Operator: B. Itzcovich
 Date/Time: 16.01.2020 09:07
 Filename:
 111_CE_150k-
 30M_charging_120V_L.png/.txt

Measurement Type : Voltage Interference
 Supply : Neutral
 Other : 120 V / 50 Hz



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Measured on typical AC-USB adaptor SAMSUNG EP-TA50EWE

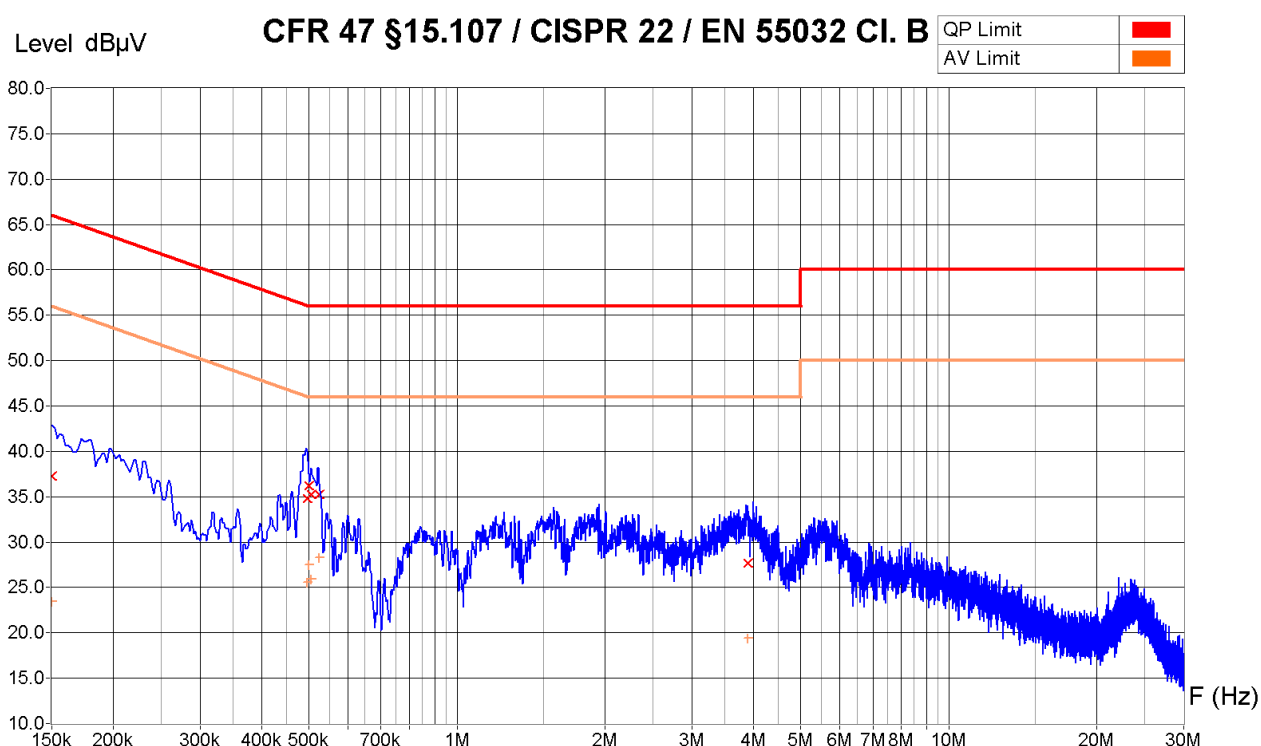

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
150.10 KHz	42.1 dBμV	37.2 dBμV	23.4 dBμV	28.8 dB
495 KHz	39.5 dBμV	34.8 dBμV	25.6 dBμV	21.3 dB
500 KHz	40.0 dBμV	36.2 dBμV	27.5 dBμV	19.8 dB
505 KHz	39.4 dBμV	35.3 dBμV	25.9 dBμV	20.7 dB
525 KHz	39.3 dBμV	35.3 dBμV	28.3 dBμV	20.7 dB
3.90 MHz	33.2 dBμV	27.7 dBμV	19.4 dBμV	28.3 dB

Operator: B. Itzcovich
 Date/Time: 16.01.2020 09:02
 Filename:
 112_CE_150k-
 30M_charging_120V_N.png/.txt

Measurement Type : Voltage Interference
 Supply : Line 1
 Other : 230 V / 50 Hz



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Measured on typical AC-USB adaptor SAMSUNG EP-TA50EWE

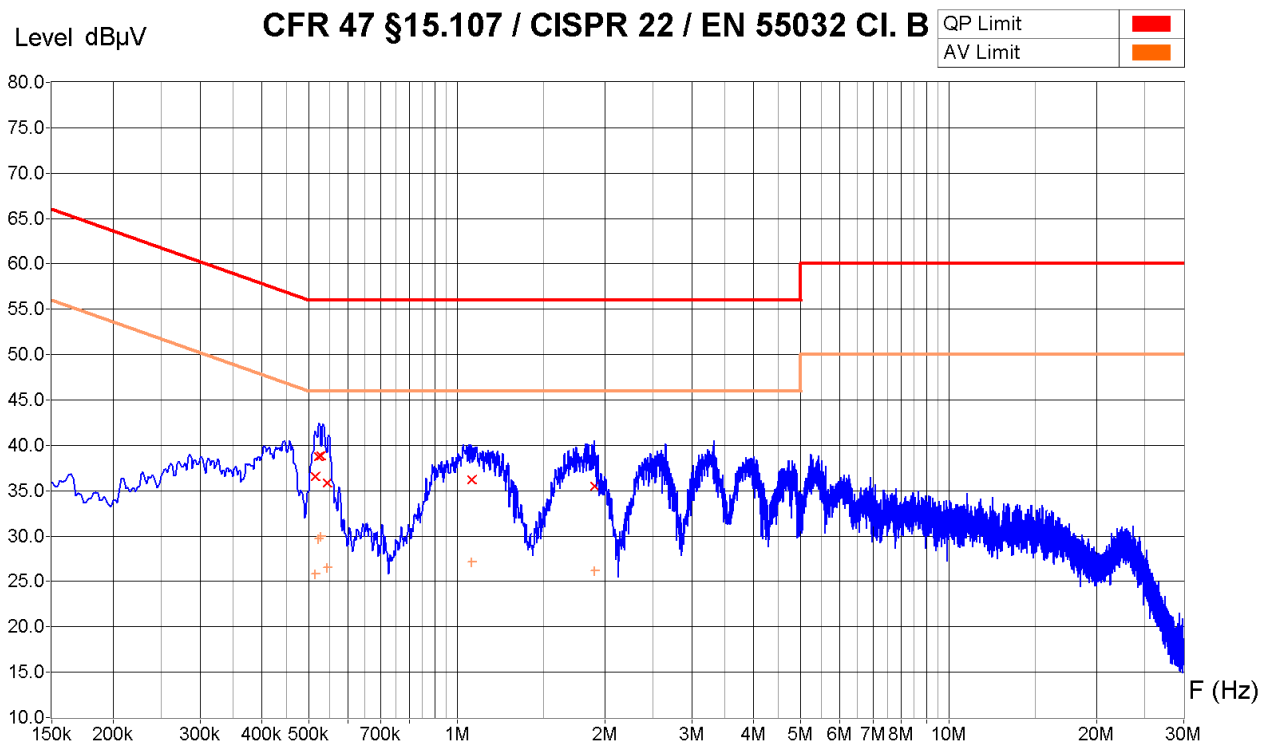

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures


Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
515 KHz	41.9 dBμV	36.5 dBμV	25.8 dBμV	19.5 dB
522 KHz	43.4 dBμV	38.8 dBμV	29.7 dBμV	17.2 dB
528 KHz	42.8 dBμV	38.9 dBμV	30.0 dBμV	17.1 dB
544 KHz	41.3 dBμV	35.8 dBμV	26.6 dBμV	20.2 dB
1.07 MHz	40.9 dBμV	36.2 dBμV	27.1 dBμV	19.8 dB
1.90 MHz	40.6 dBμV	35.5 dBμV	26.2 dBμV	20.5 dB

Operator: B. Itzcovich
 Date/Time: 16.01.2020 09:19
 Filename:
 113_CE_150k-
 30M_charging_230V_L.png/.txt

Measurement Type : Voltage Interference
 Supply : Neutral
 Other : 230 V / 50 Hz



Equipment Under Test : XC Tracer Maxx, Proto 1 (MY)
 Set-Up : Chamber SAC3. See photos. Peak detector sweep
 Operating Conditions : Charging
 Remarks : Measured on typical AC-USB adaptor SAMSUNG EP-TA50EWE

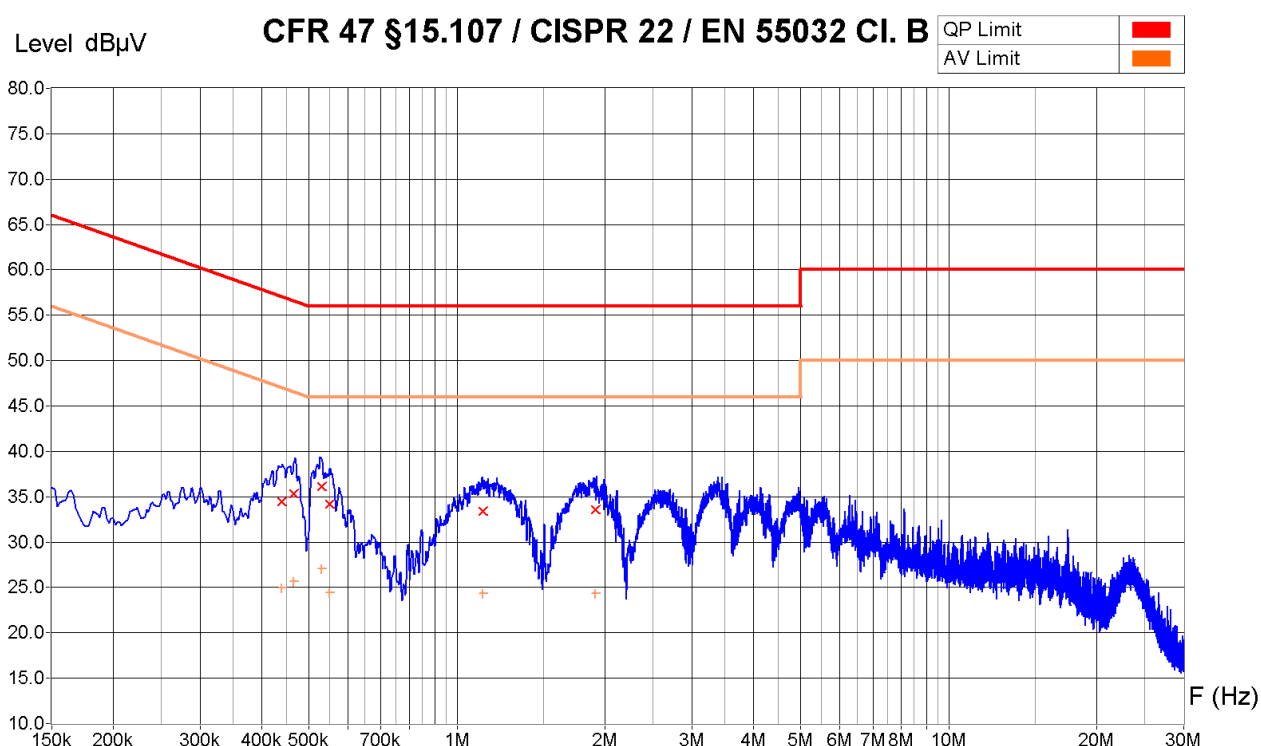

Zone	150 KHz - 30 MHz
Video Bandwidth	30 KHz
Resol Bandwidth	9 KHz

Receiver Measures

Frequency	Peak	QuasiPeak (x)	Average (+)	QP Margin
440 KHz	39.3 dBμV	34.5 dBμV	25.0 dBμV	22.6 dB
465 KHz	40.3 dBμV	35.3 dBμV	25.7 dBμV	21.3 dB
530 KHz	39.9 dBμV	36.2 dBμV	27.1 dBμV	19.8 dB
550 KHz	38.8 dBμV	34.2 dBμV	24.4 dBμV	21.8 dB
1.13 MHz	37.2 dBμV	33.4 dBμV	24.3 dBμV	22.6 dB
1.91 MHz	37.6 dBμV	33.5 dBμV	24.3 dBμV	22.5 dB

Operator: B. Itzcovich
 Date/Time: 16.01.2020 09:22
 Filename:
 114_CE_150k-
 30M_charging_230V_N.png/txt

6.13 Designation of emission

Standard: United States: 47 CFR "Code of Federal Regulations" – Telecommunication
☒ FCC Part 2, Subpart C: Emission: §2.201 and §2.202

Introduction: A system of designating emission, modulation and transmission characteristics shall be employed.

(a) Emissions are designated according to their classification and their necessary bandwidth.

(b) A minimum of three symbols are used to describe the basic characteristics of radio waves.

(c) Four symbols are used to describe the necessary bandwidth.


Modifications: ☒ None ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Necessary bandwidth: For a given class of emission, the minimum value of the occupied bandwidth sufficient to ensure the transmission of information at the rate and with the quality required for the system employed, under specified conditions.

$B_n = 200 \text{ kHz}$ (occupied bandwidth)

Basic characteristics: FXD F : frequency modulation
 X : Cases not otherwise covered
 D : data transmission

Designation of emission: 200KFXD

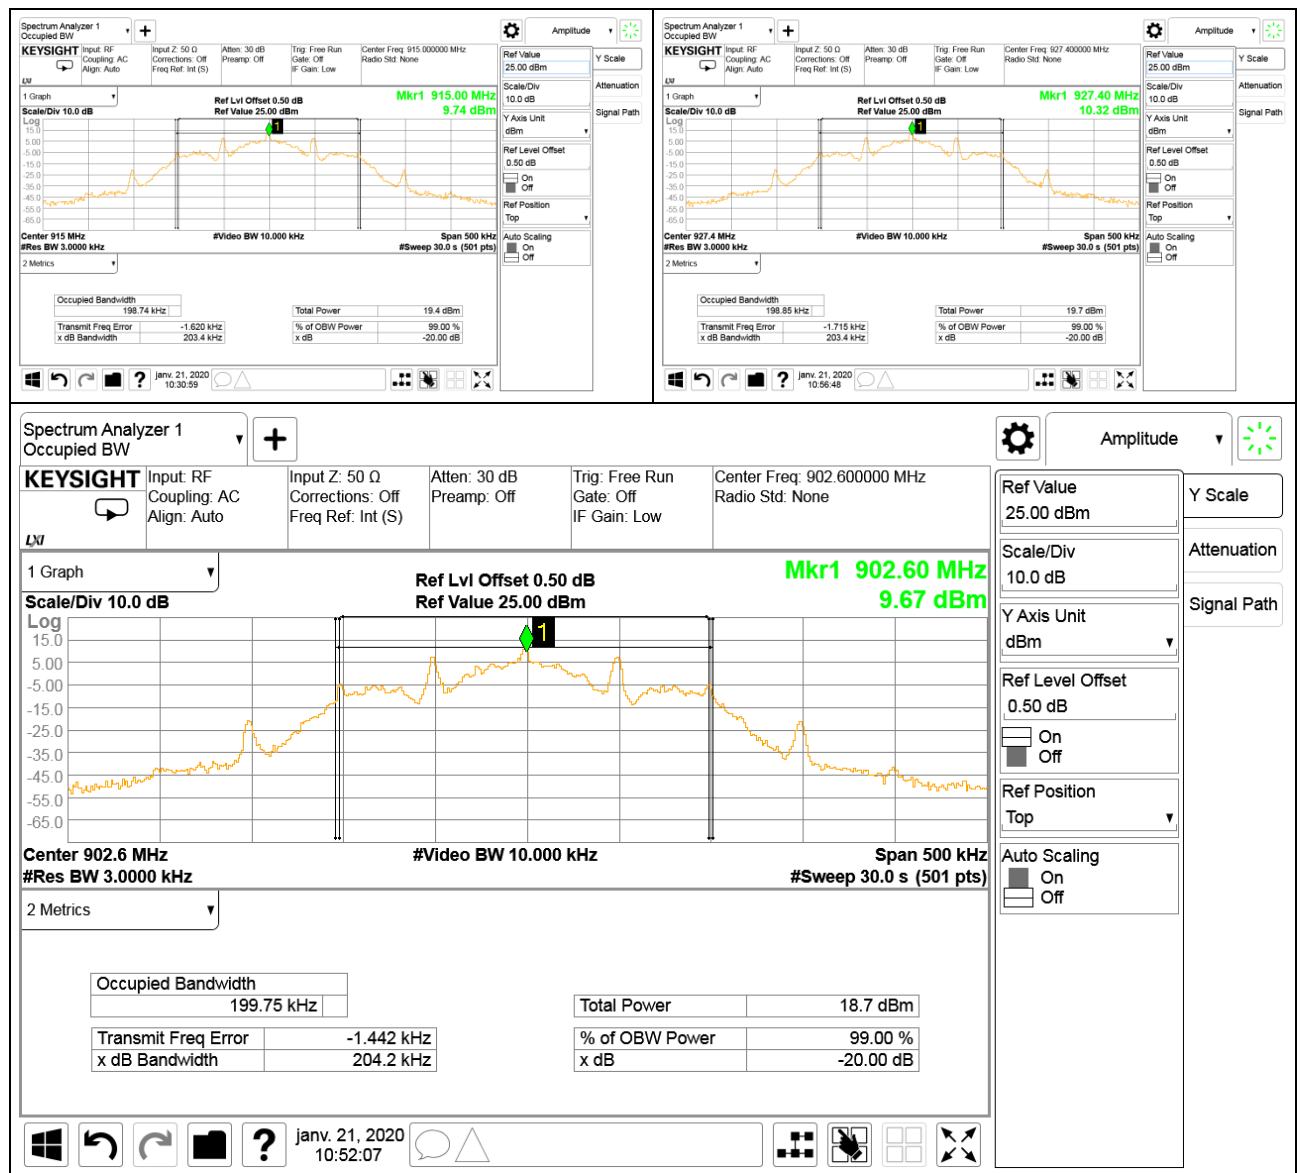

Place and date of test:
 Operator:

Rossens, 2020-01-21
 B. Itzcovich

7. Appendix

7.1 Test equipment

Inventory No.	Designation	Manufacturer	Type	Cal. Date	Next calibr.	Cal. Period [year]
90-25	Loop antenna	Chase	HLA6120	02 Jun 2017	02 Jun 2020	3
05-38	Bi-Log antenna	Chase	CBL6111C	01 Nov 2018	30 Aug 2020	2
07-31	Hom antenna	Schwarzbeck	BBHA 9120 D	09 Oct 2018	09 Oct 2020	2
89-01	Dipole antenna	Schwarzbeck	UHAP – 10dB	12 Jun 2013	12 Jun 2020	7
04-21	Notch Filter	Montena EMC	CR900R	27 Jun 2017	27 Jun 2020	3
91-45	Attenuator	Montena EMC	10 dB	05 Jun 2018	05 Jun 2020	2
05-56	Preamplifier	Montena EMC	30 dB / 2 – 18 GHz	02 Dec 2019	02 Dec 2021	2
14-27	Preamplifier	Montena EMC	AFS42-00101800-25-S-42	28 Jun 2019	28 Jun 2021	2
13-16	Signal Generator	Anapico	APSIN20G	10 Jul 2018	10 Jul 2020	2
06-00C	Cable	Huber&Suhner	SF106PA 600mm	02 Jun 2017	02 Jun 2020	3
SAC3_RE_5m_1.0	Cable	Huber&Suhner	SF104A 5m	30 Sep 2019	30 Sep 2021	2
SAC3_RE_5m_2.0	Cable	Huber&Suhner	SF104A 5m	30 Sep 2019	30 Sep 2021	2
SAC3_RE_5m_3.0	Cable	Huber&Suhner	SF104A 5m	30 Sep 2019	30 Sep 2021	2
SAC3_CE_8m	Cable	Huber&Suhner	ST106PA 8m	30 Sep 2019	30 Sep 2021	2
SAC3_CE_3m	Cable	Huber&Suhner	RG 58 C/U 3m	30 Sep 2019	30 Sep 2021	2
11-30	Cable	Huber&Suhner	ST18A 3m	29 Jun 2018	29 Jun 2020	2
11-45	Cable	Huber&Suhner	SF106P 2m	06 Feb 2020	06 Feb 2022	2
10-51	Cable	Huber&Suhner	SF104 5m	06 Feb 2020	06 Feb 2022	2
00-43	LISN	Rohde&Schwarz	ESH3-Z5	17 Sep 2019	17 Sep 2021	2
18-01	Spectr. Analyzer	Keysight	N9020B	11 Mar 2018	11 Mar 2020	2
16-03	Receiver + Spectr. Analyzer	Rohde&Schwarz	ESR7 1316.3003K07	25 Oct 2019	25 Oct 2021	2
168593	EMI Test Receiver	Rohde & Schwarz	ESU26	15 Oct 2019	15 Oct 2021	2
09-04	Power sensor	Agilent	E9304A H19	06 Jan 2020	06 Jan 2022	2
03-12	Wattmeter	Agilent	E4418B	06 Jan 2020	06 Jan 2022	2
08-17	Multimeter	Fluke	87V	14 Feb 2019	14 Feb 2021	2
99-07	Power supply	Coutant	LA200.2	---	---	-
75-04	Transformer	Variac	W10HMT	---	---	-

Remark: The test equipment, for which no calibration date is defined, is controlled during the test by another calibrated equipment. E.g. the output of a power supply or variable transformer is verified by a calibrated multimeter.