

FCC - TEST REPORT

Report Number : **68.950.24.0995.01** Date of Issue: **2024-12-13**

Model : **NC5182-Base**

Product Type : **PC RS PURE BASE**

Applicant : **Nacon (HK) Limited**

Address : **17/F 148 Electric Road, NORTH POINT, HONG KONG**
ISLAND, Hong Kong

Manufacturer : **Nacon SA**

Address : **396-466 rue de la voyette, Crt 2, 59273 Fretin, FRANCE**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **40**

Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question and is not generally applicable evaluation of the quality of other products in regular production. For further details, please see testing and certification regulation chapter A-3.4.

1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Test Setups	8
7.1	Radiated test setups	8
7.2	Conducted RF test setups	9
8	Systems test configuration.....	9
9	Technical Requirement.....	10
9.1	Conducted Emission.....	10
9.2	Conducted Output Power	13
9.3	6 dB Bandwidth.....	15
9.4	Power spectral density.....	17
9.5	Spurious RF conducted emissions	19
9.6	Band edge testing	23
9.7	Spurious radiated emissions for transmitter	25
10	Test Equipment List.....	38
11	System Measurement Uncertainty	40

2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park,
Guankou Erlu, Nantou, Nanshan District,
Shenzhen, Guangdong, China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

FCC Designation Number: CN5009

3 Description of the Equipment Under Test

Product:	PC RS PURE BASE
Model No.:	NC5182-Base
FCC ID:	2AVPR-5182
Options and accessories:	Adapter, USB-C Cable
Ratings:	Input: 36.0VDC, 5.55A supplied by adapter Output: 5.0VDC, 500mA
Adapter Ratings:	Input:100-240VAC, 50/60Hz, 3.0A Max Output: 36.0VDC, 5.55A
RF Transmission Frequency:	2402MHz-2480MHz (for BLE-1Mbps)
No. of Operated Channel:	40
Modulation:	GFSK
Antenna Type:	FPC antenna
Antenna Gain:	3.8dBi
Description of the EUT:	The EUT is a PC RS PURE BASE, supports BLE-1Mbps function, operates at 2402 – 2480MHz.

NOTE 1: The above EUT's information is declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2023 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB 558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance and ANSI C63.10-2020.

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Test Site	Test Result			Test Environment
			Pass	Fail	N/A	
§15.207	Conducted emission AC power port	Site 1	☒	☐	☐	T: 23.0°C H: 49.2%
§15.247 (b) (3)	Conducted peak output power	Site 1	☒	☐	☐	T: 23.3°C H: 49.6%
§15.247(a)(2)	6dB bandwidth	Site 1	☒	☐	☐	T: 23.3°C H: 49.6%
§15.247(e)	Power spectral density	Site 1	☒	☐	☐	T: 23.3°C H: 49.6%
§15.247(d)	Spurious RF conducted emissions	Site 1	☒	☐	☐	T: 23.3°C H: 49.6%
§15.247(d)	Band edge	Site 1	☒	☐	☐	T: 22.2°C H: 46.4%
§15.247(d) & §15.209 & §15.205	Spurious radiated emissions for transmitter	Site 1	☒	☐	☐	T: 22.2°C H: 46.4%
§15.203	Antenna requirement	See note 2	☒	☐	☐	--

Note 1: N/A=Not Applicable.

Note 2: The EUT use a FPC antenna, which gain of antenna is 3.8dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

Note 3: T=Temperature, H=Humidity.

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2AVPR-5182 complies with Section 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules.

SUMMARY:

All tests according to the regulations cited on page 5 were:

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2024-08-15

Testing Start Date: 2024-08-15

Testing End Date: 2024-08-30

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch –

Reviewed by:

Prepared by:

Tested by:


John Zhi
Project Manager





Sanvin Zheng
Project Engineer


Carry Cai
Test Engineer


7 Test Setups

7.1 Radiated test setups


AC Power Line Conducted Emission test setups

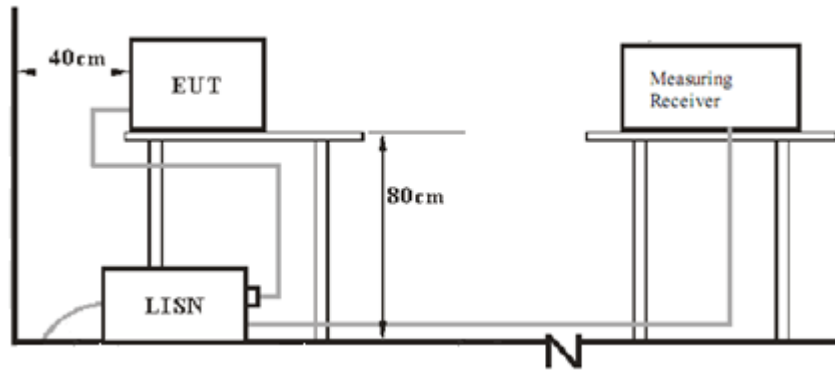

9kHz - 30MHz

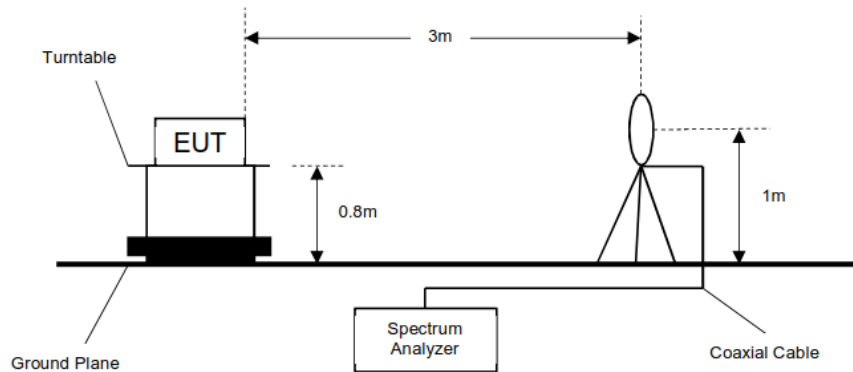

Below 1GHz

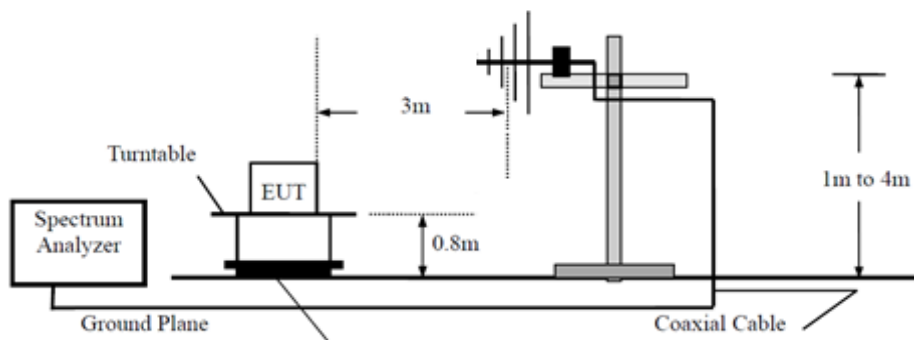

The diagram illustrates the experimental setup for measuring the radiation pattern of a horn antenna. Key components and dimensions are labeled:

- Turntable:** A rotating platform supporting the EUT.
- EUT (Electromagnetic Under Test):** The device being tested, positioned at a height of 1.5m.
- Horn antenna:** The transmitting antenna, mounted on a tower.
- Antenna tower:** The structure supporting the horn antenna.
- Spectrum analyzer:** Connected to the horn antenna via a cable, with a pre-amplifier (Pre-amp) in the signal path.
- Dimensions:**
 - 3m: Horizontal distance between the EUT and the horn antenna.
 - 1.5m: Height of the EUT above the ground.
 - 2.4m: Horizontal distance between the base of the turntable and the base of the antenna tower.

```

    graph LR
      MR[Measuring receiver] --- EUT[EUT]
  
```

DESCRIPTION	MANUFACTURER	MODEL NO.	REMARK
Notebook	LENOVO	X220	---

Test Software Version	EspRFTTestTool_v3.6_Manual	
Modulation	Setting TX Power	Packet Type
GFSK	11	Pn9

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12 & 13, Zhiheng Wisdomland Business Park, Guankou Erlu, Nantou, Nanshan District, Shenzhen, Guangdong, China Tel. +86 755 8828 6998, Fax: +86 755 8828 5299

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both sides of AC line were checked for maximum conducted interference.
6. The frequency range from 150 kHz to 30 MHz was searched.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

Limit


According to §15.207, conducted Emission limit as below:

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Conducted Emission

Product Type : PC RS PURE BASE
M/N : NC5182-Base
Operating Condition : Transmit
Test Specification : Line
Comment : AC 120V/60Hz

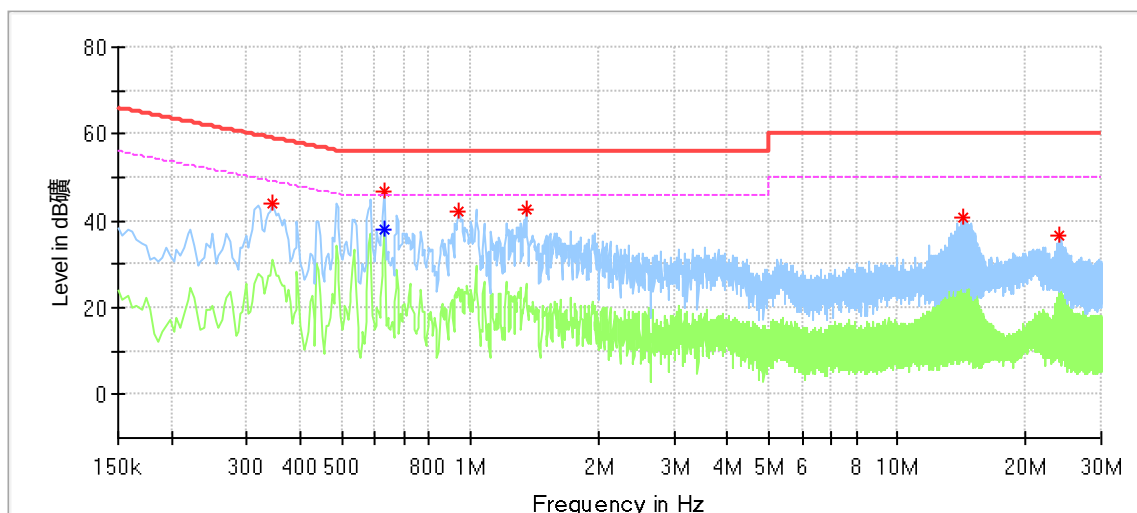

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.346000	43.96	---	59.06	15.10	L1	9.67
0.630000	---	37.88	46.00	8.12	L1	9.69
0.630000	46.61	---	56.00	9.39	L1	9.69
0.942000	42.37	---	56.00	13.63	L1	9.70
1.350000	42.68	---	56.00	13.32	L1	9.71
14.246000	40.73	---	60.00	19.27	L1	9.95
23.970000	36.64	---	60.00	23.36	L1	10.13

Remark:


*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

Conducted Emission

Product Type : PC RS PURE BASE
M/N : NC5182-Base
Operating Condition : Transmit
Test Specification : Neutral
Comment : AC 120V/60Hz

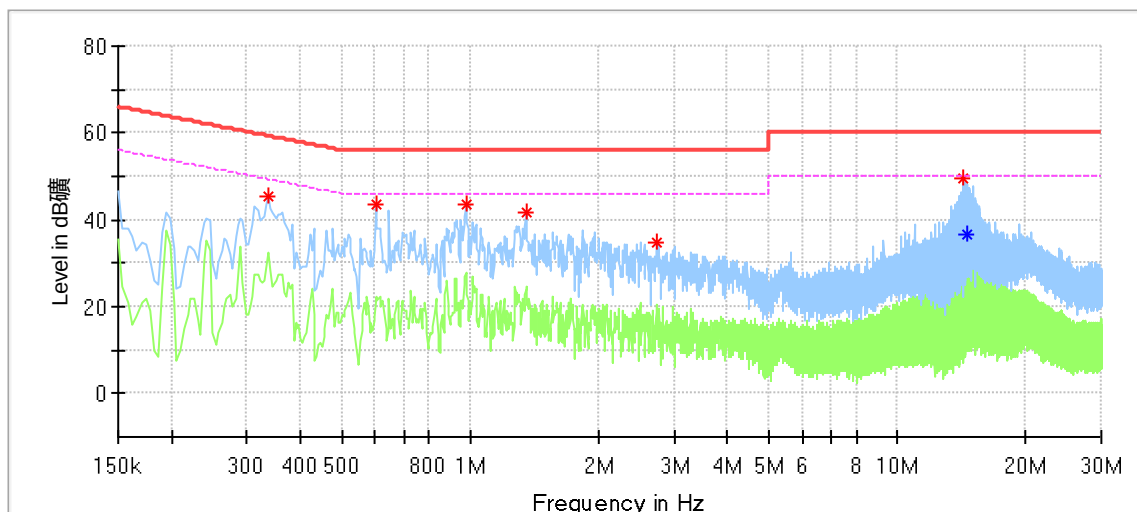

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.338000	45.51	---	59.25	13.74	N	9.67
0.602000	43.76	---	56.00	12.24	N	9.68
0.978000	43.58	---	56.00	12.42	N	9.68
1.350000	41.52	---	56.00	14.48	N	9.69
2.726000	34.69	---	56.00	21.31	N	9.73
14.222000	49.47	---	60.00	10.53	N	9.96
14.490000	---	36.44	50.00	13.56	N	9.96

Remark:

*Level=Reading Level + Correction Factor

**Correction Factor=Cable Loss + LISN Factor

(The Reading Level is recorded by software which is not shown in the sheet)

9.2 Conducted Output Power

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following test receiver settings:
Span = approximately 5 times the 6dB bandwidth, centered on a channel need to test,
RBW > the 6dB bandwidth of the emission being measured, VBW $\geq$ 3RBW,
Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power and record the results in the test report.
5. Repeat above procedures until all frequencies measured were complete.

Limit


According to §15.247 (b) (3), conducted output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤ 1	≤ 30


Test Results

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
BLE_1M	SISO	2402	7.60	≤ 30	Pass
		2440	8.23	≤ 30	Pass
		2480	7.22	≤ 30	Pass


BLE_1M_LCH_2402MHz_Ant1_NTNV

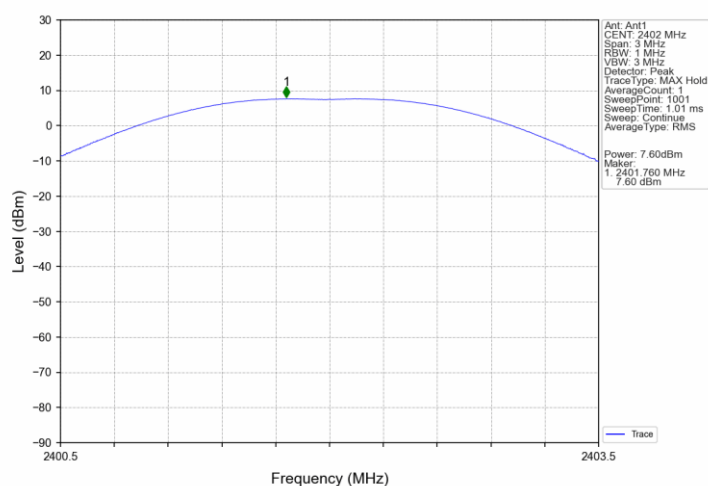

BLE_1M_MCH_2440MHz_Ant1_NTNV

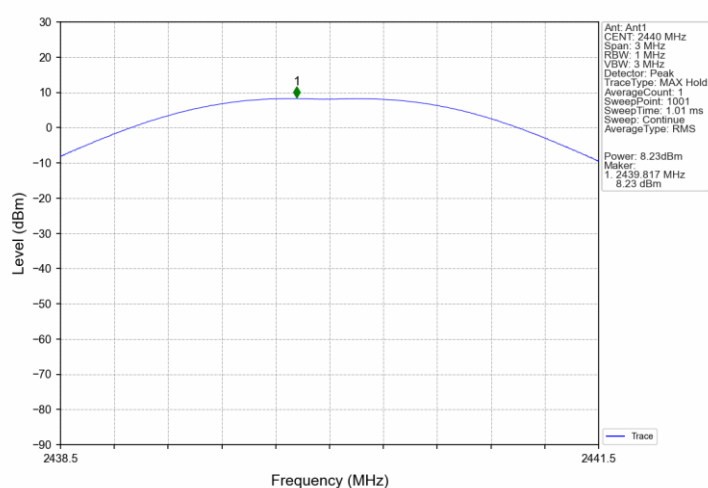

BLE_1M_HCH_2480MHz_Ant1_NTNV

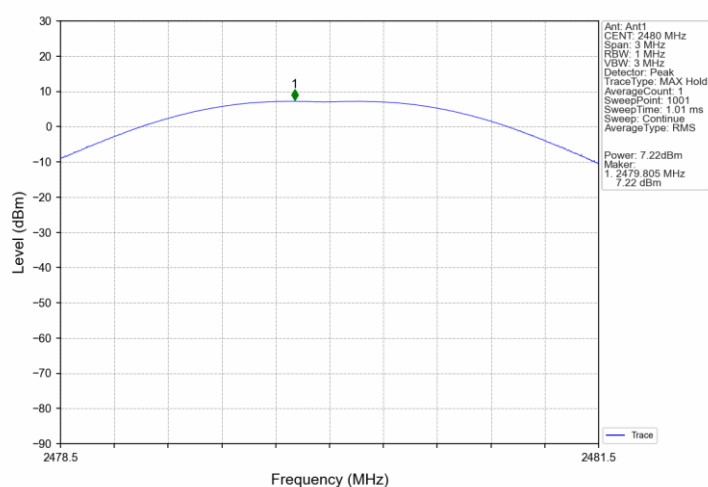

9.3 6 dB Bandwidth

Test Method for 6 dB Bandwidth

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW=1% to 5% of the occupied bandwidth but not less than 100kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Use the automatic bandwidth measurement capability of an instrument, use the X dB bandwidth mode with X set to 6 dB.
5. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit


6dB bandwidth Limit [kHz]

≥ 500


Test result for 6 dB Bandwidth

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
BLE_1M	SISO	2402	1	0.693	≥ 0.5	Pass
		2440	1	0.690	≥ 0.5	Pass
		2480	1	0.691	≥ 0.5	Pass


BLE_1M_LCH_2402MHz_Ant1_NTNV

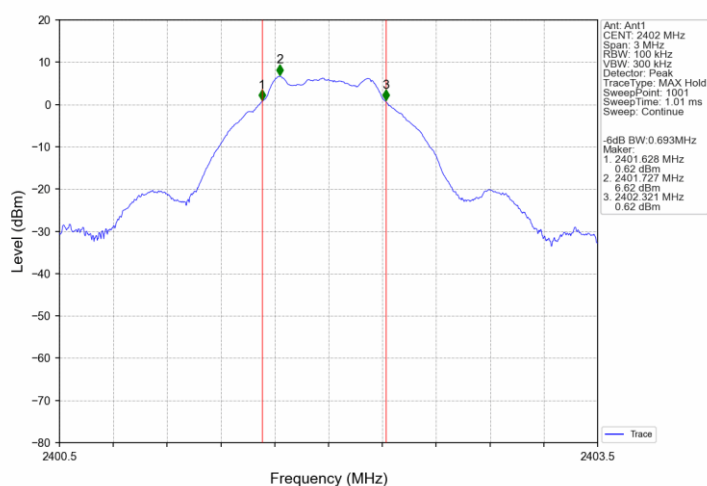

BLE_1M_MCH_2440MHz_Ant1_NTNV

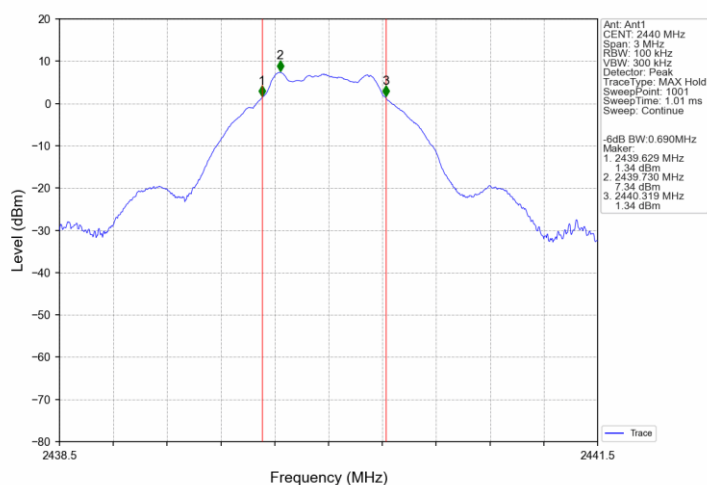

BLE_1M_HCH_2480MHz_Ant1_NTNV

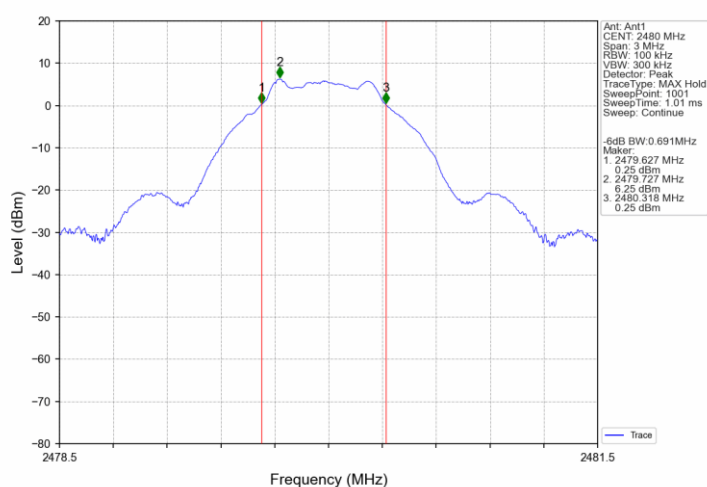

9.4 Power spectral density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. The RF output of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
4. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW $\geq$ 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
5. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
6. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3kHz]

≤ 8


Test Results

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
BLE_1M	SISO	2402	-6.20	≤ 8	Pass
		2440	-5.36	≤ 8	Pass
		2480	-6.40	≤ 8	Pass


BLE_1M_LCH_2402MHz_Ant1_NTNV

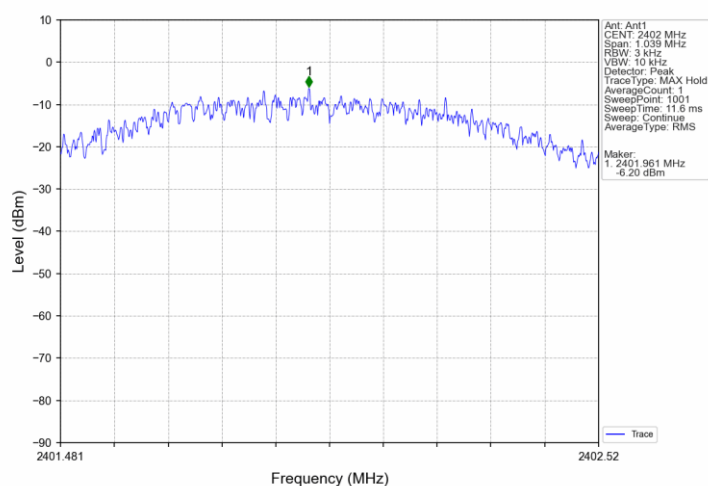

BLE_1M_MCH_2440MHz_Ant1_NTNV

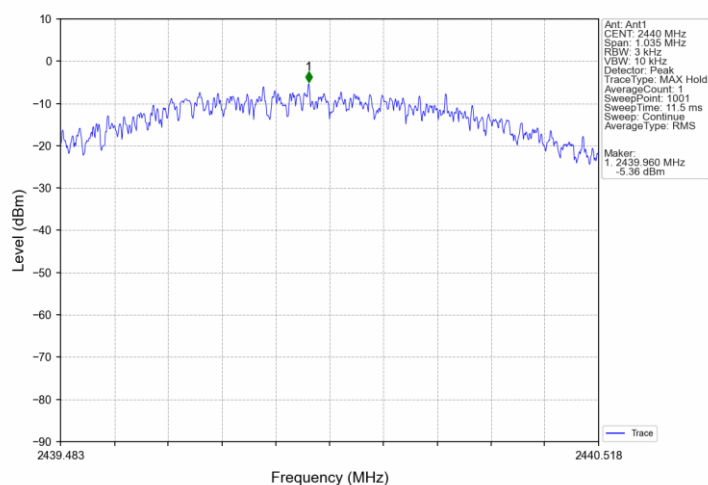

BLE_1M_HCH_2480MHz_Ant1_NTNV

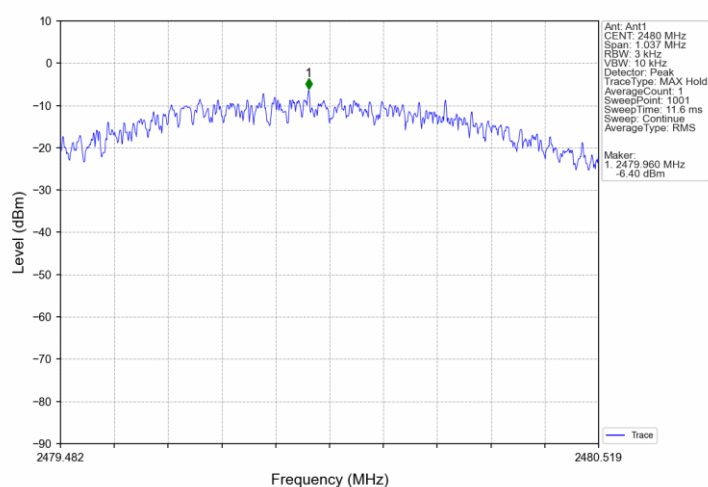



9.5 Spurious RF conducted emissions

Test Method

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
- 3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW≥3RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
- 5. The level displayed must comply with the limit specified in this Section. Submit these plots.
- 6. Repeat above procedures until all frequencies measured were complete.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Test Result

Reference level:


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
BLE_1M	SISO	2402	1	6.63
		2440	1	7.33
		2480	1	6.25

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


BLE_1M_LCH_2402MHz_Ant1_NTNV

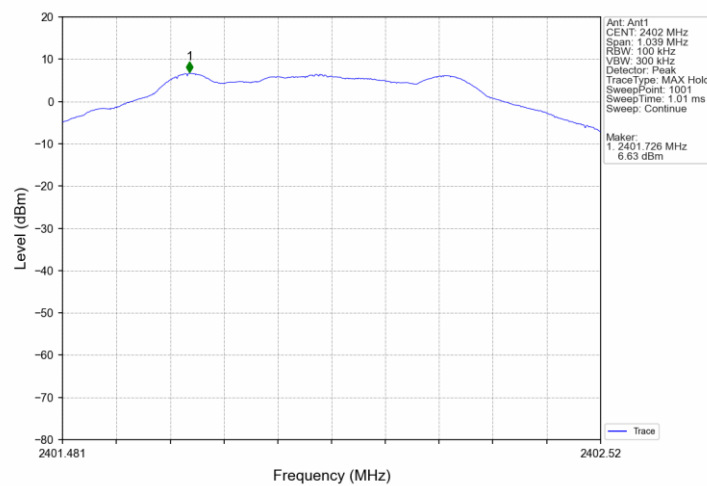

BLE_1M_MCH_2440MHz_Ant1_NTNV

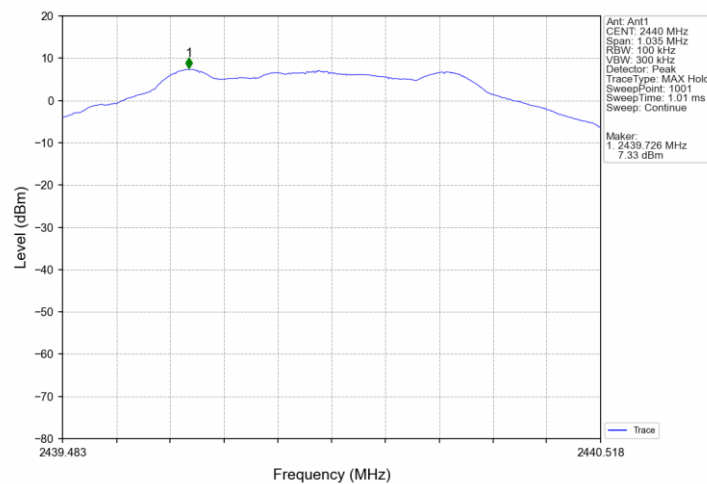



BLE_1M_HCH_2480MHz_Ant1_NTNV

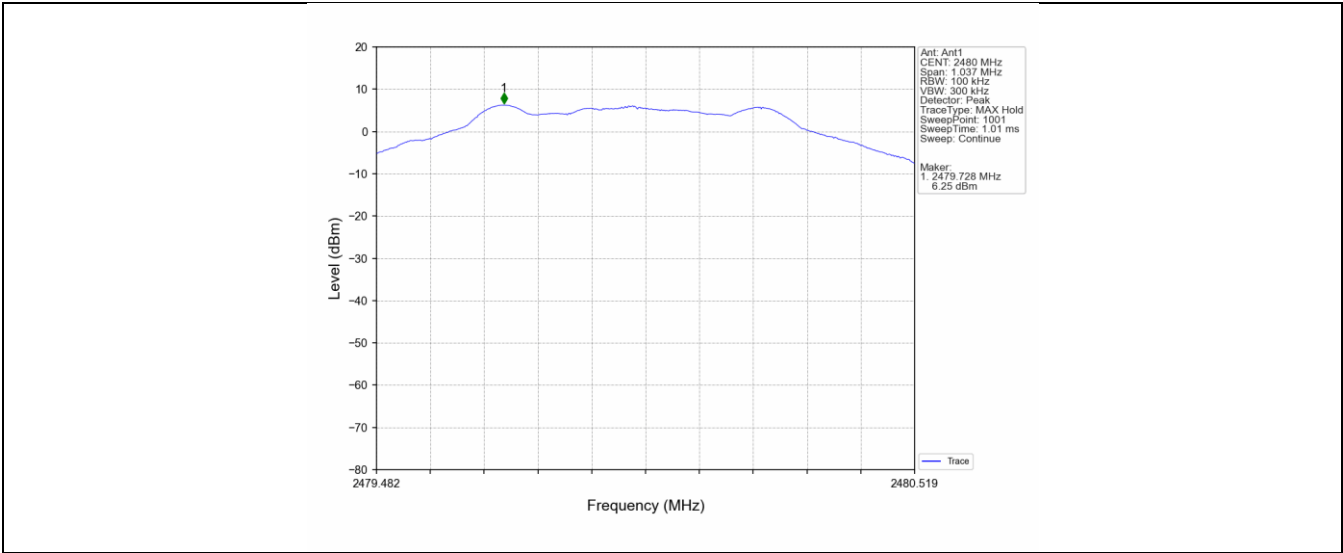


Conducted spurious emissions:

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
BLE_1M	SISO	2402	1	6.63	-13.37	Pass
		2440	1	7.33	-12.67	Pass
		2480	1	6.25	-13.75	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						

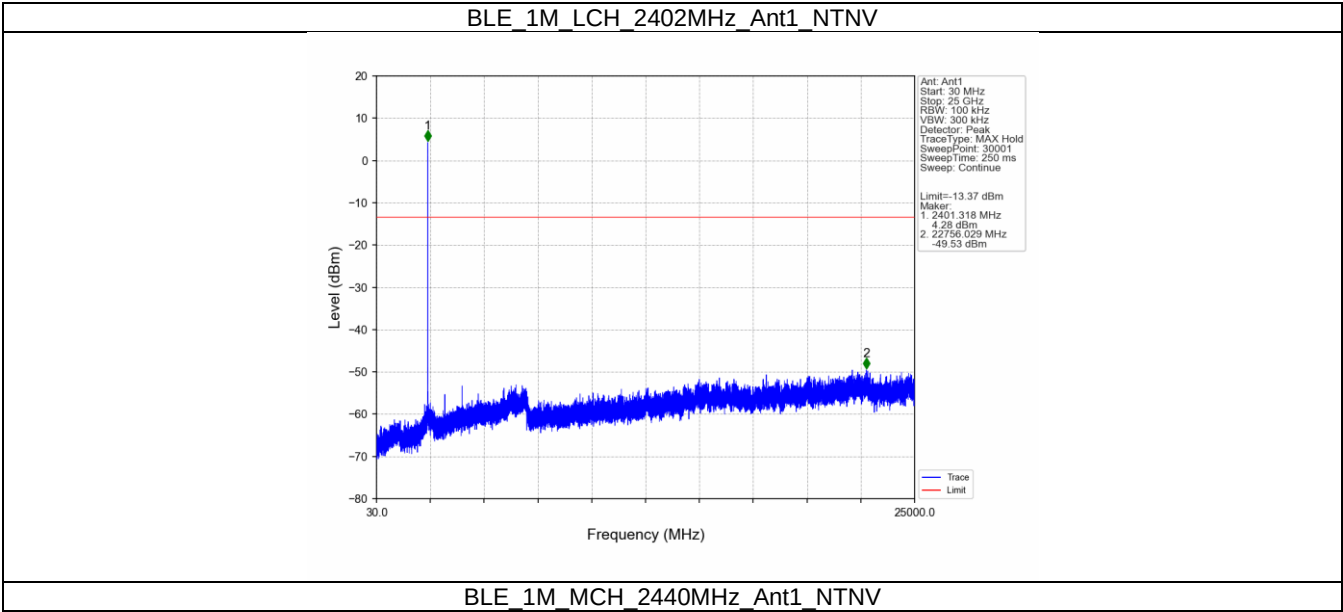

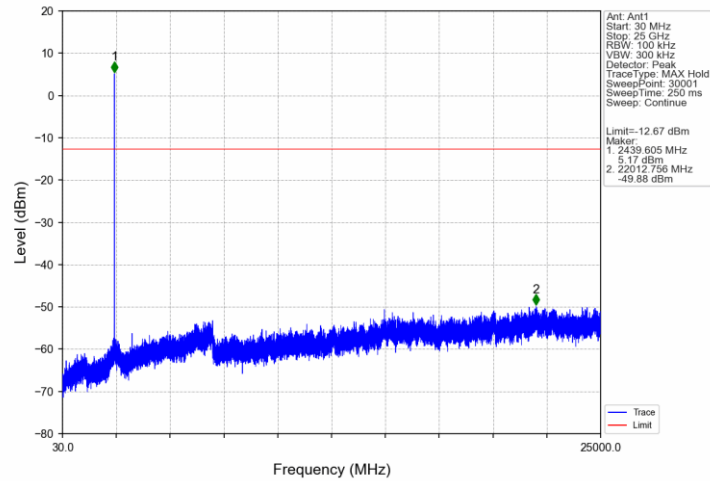

BLE_1M_HCH_2480MHz_Ant1_NTNV

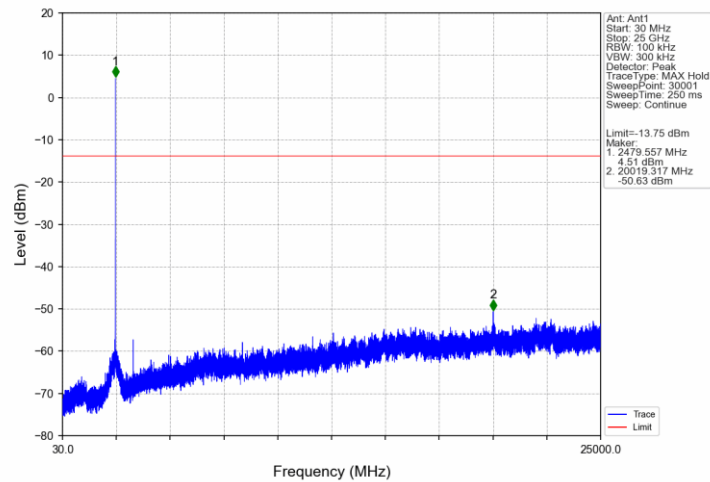

9.6 Band edge testing

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB.


Frequency Range MHz	Limit (dBc)
30-25000	-20

Test result


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
BLE_1M	SISO	2402	1	6.63
		2480	1	6.25

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

BLE_1M_LCH_2402MHz_Ant1_NTNV

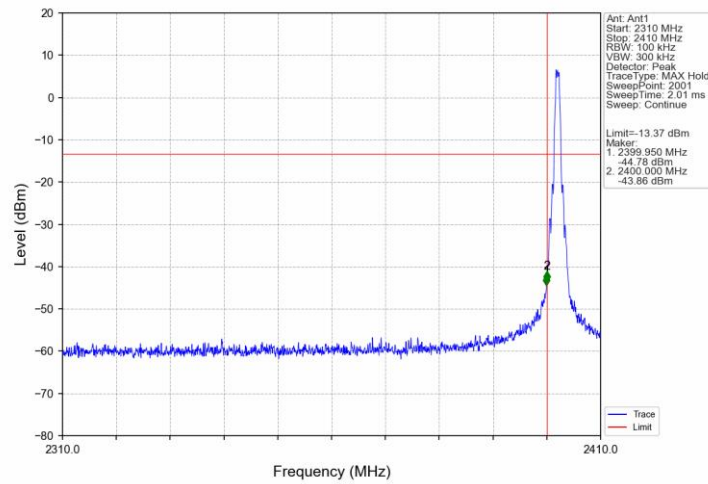

BLE_1M_HCH_2480MHz_Ant1_NTNV

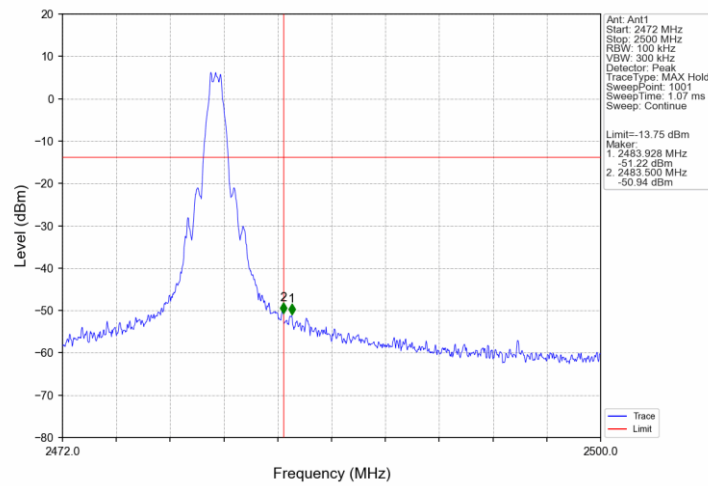

9.7 Spurious radiated emissions for transmitter

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:
 - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 2) For Peak unwanted emissions Above 1GHz:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
 - 3) Procedures for average unwanted emissions measurements above 1000 MHz
 - a) RBW = 1MHz.
 - b) VBW = $[3 \times \text{RBW}]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission(AV) at frequency above 1GHz.

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Frequency MHz	Field Strength μV/m	Field Strength dBμV/m	Detector	Measurement distance meters
0.009-0.490	2400/F(kHz)	48.5-13.8	AV	300
0.490-1.705	24000/F(kHz)	33.8-23.0	QP	30
1.705-30	30	29.5	QP	30
30-88	100	40	QP	3
88-216	150	43.5	QP	3
216-960	200	46	QP	3
960-1000	500	54	QP	3
Above 1000	500	54	AV	3
Above 1000	5000	74	PK	3

Note 1: Limit 3m(dBμV/m)=Limit 300m(dBμV/m)+40Log(300m/3m) (Below 30MHz)


Note 2: Limit 3m(dBμV/m)=Limit 30m(dBμV/m)+40Log(30m/3m) (Below 30MHz)

Spurious radiated emissions for transmitter


According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

9kHz-30MHz

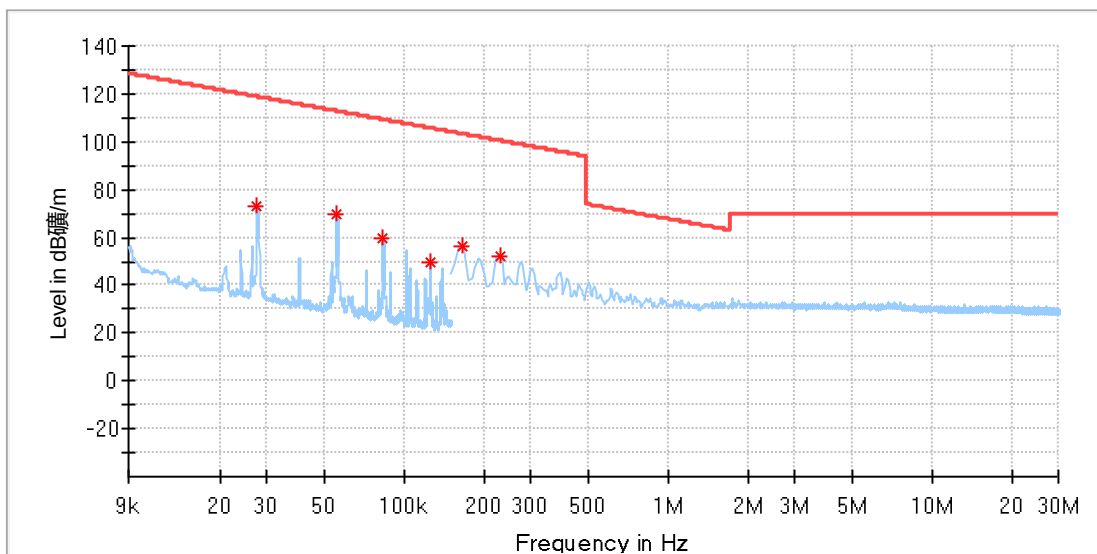


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027612	73.41	118.79	45.38	H	0.0	19.93
0.055248	69.87	112.74	42.87	H	0.0	19.96
0.082884	59.36	109.25	49.89	H	0.0	19.95
0.124996	49.46	105.63	56.17	H	43.0	19.94
0.164925	56.08	103.28	47.20	H	232.0	19.92
0.229600	52.43	100.35	47.92	H	206.0	19.91

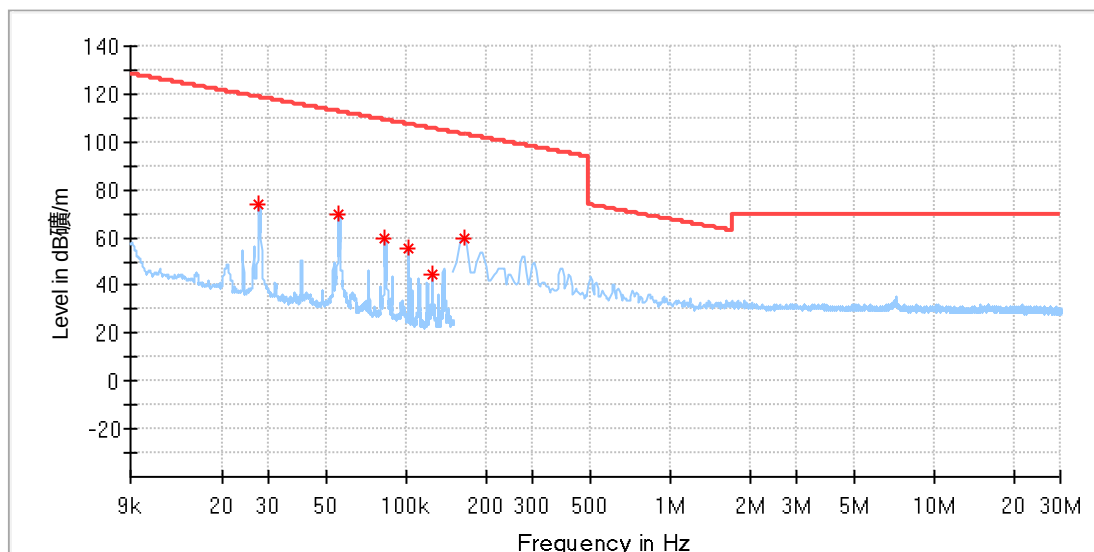


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Azimuth (deg)	Corr. (dB/m)
0.027612	73.59	118.79	45.20	V	356.0	19.93
0.055201	69.99	112.69	42.70	V	333.0	19.96
0.082931	59.68	109.17	49.49	V	67.0	19.95
0.101543	55.22	107.45	52.23	V	165.0	19.95
0.125137	44.37	105.63	61.26	V	165.0	19.94
0.164925	59.82	103.28	43.46	V	66.0	19.92

30MHz-1GHz

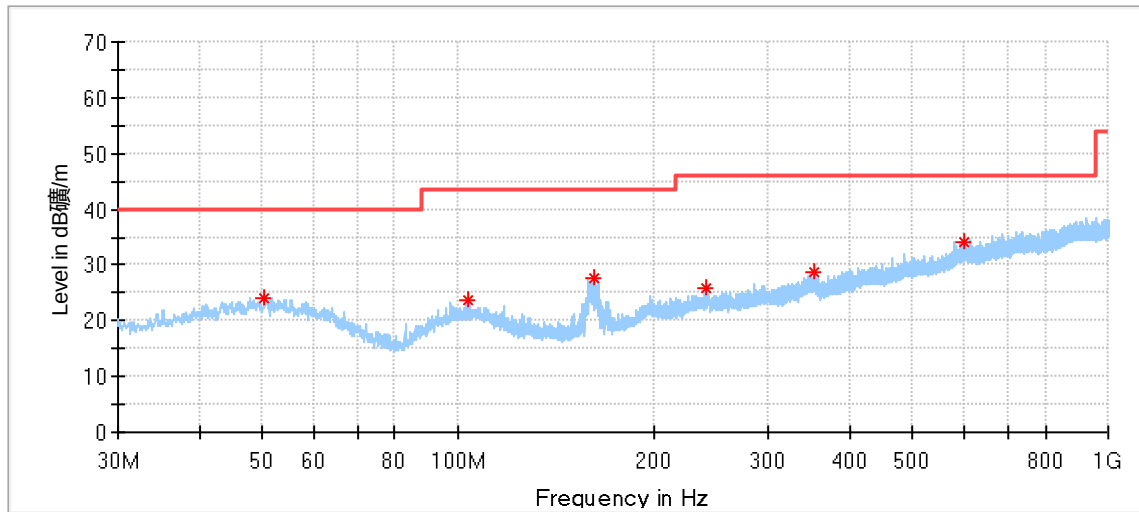


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.316111	24.13	40.00	15.87	100.0	H	31.0	18.01
103.935556	23.60	43.50	19.90	100.0	H	354.0	16.34
161.704444	27.81	43.50	15.69	200.0	H	249.0	13.31
241.190556	25.92	46.00	20.08	100.0	H	331.0	17.40
353.117778	28.63	46.00	17.37	100.0	H	312.0	20.44
598.366111	34.07	46.00	11.93	200.0	H	138.0	25.20

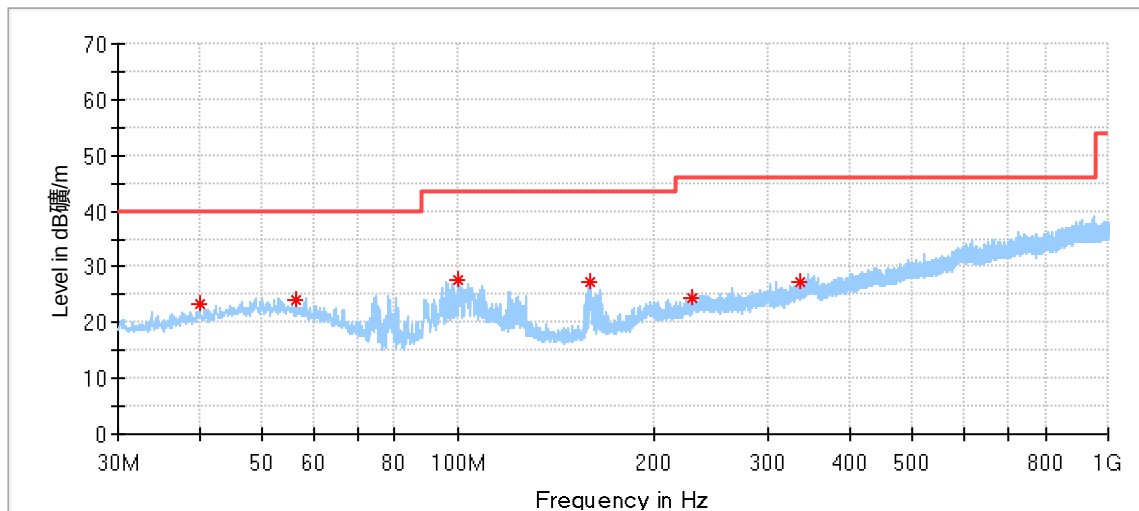


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
40.077222	23.38	40.00	16.62	100.0	V	42.0	16.55
56.459444	23.97	40.00	16.03	100.0	V	69.0	17.50
100.055556	27.69	43.50	15.81	100.0	V	0.0	16.22
159.117778	27.17	43.50	16.33	200.0	V	318.0	13.14
229.658333	24.32	46.00	21.68	200.0	V	356.0	16.82
336.250556	27.36	46.00	18.64	200.0	V	0.0	19.73

1GHz-18GHz

BLE_1Mbps_Low Channel: 2402MHz

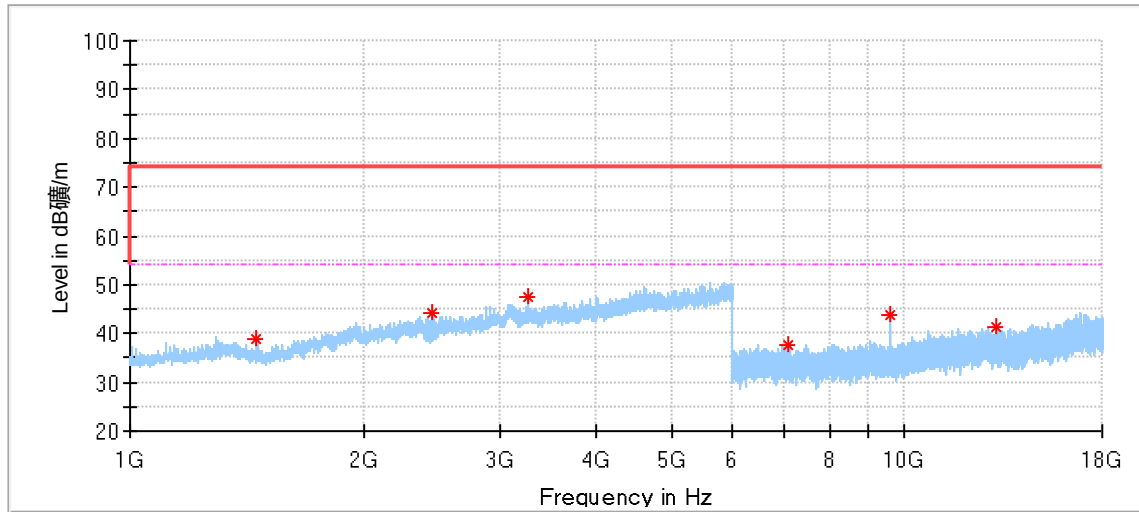


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1458.500000	38.84	74.00	35.16	150.0	H	4.0	-9.36
2450.000000	44.08	74.00	29.92	150.0	H	151.0	-2.24
3268.500000	47.50	74.00	26.50	150.0	H	206.0	0.12
7080.000000	37.54	74.00	36.46	150.0	H	171.0	5.25
9608.000000	43.95	74.00	30.05	150.0	H	59.0	8.07
13122.000000	41.16	74.00	32.84	150.0	H	31.0	11.01

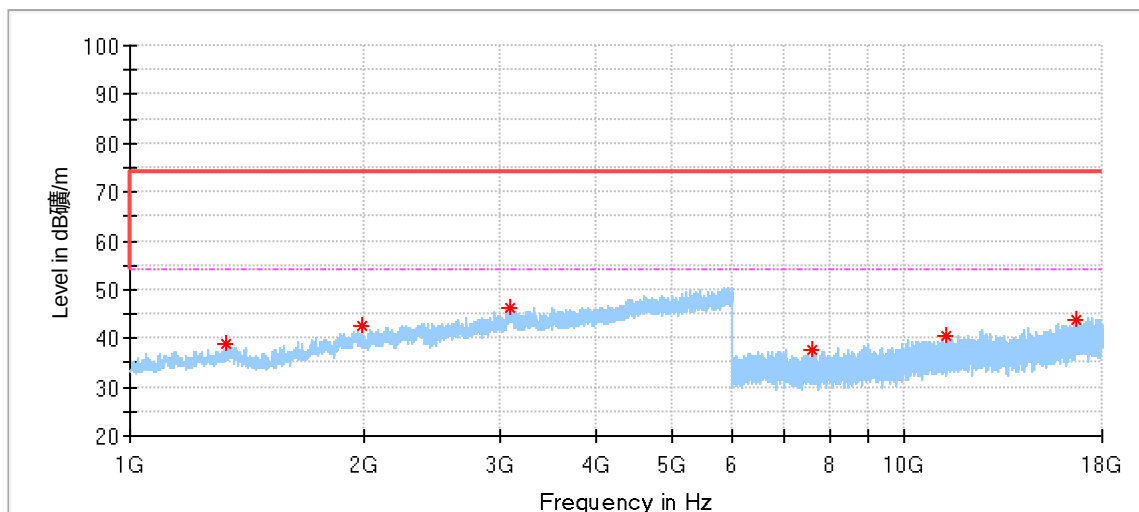


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1332.500000	39.07	74.00	34.93	150.0	V	0.0	-7.88
1991.000000	42.61	74.00	31.39	150.0	V	27.0	-4.34
3101.000000	46.43	74.00	27.57	150.0	V	303.0	1.55
7598.500000	37.51	74.00	36.49	150.0	V	156.0	5.82
11346.000000	40.47	74.00	33.53	150.0	V	299.0	10.32
16703.000000	43.68	74.00	30.32	150.0	V	72.0	17.47

BLE_1Mbps_Middle Channel: 2440MHz

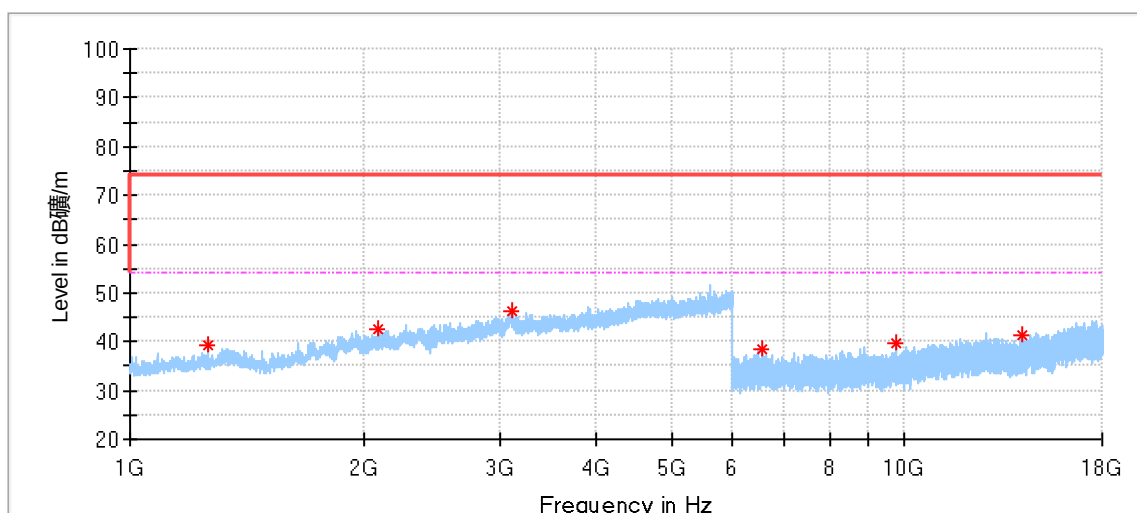


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1259.500000	39.16	74.00	34.84	150.0	H	122.0	-8.78
2092.500000	42.73	74.00	31.27	150.0	H	204.0	-4.24
3116.000000	46.10	74.00	27.90	150.0	H	40.0	0.98
6561.000000	38.53	74.00	35.47	150.0	H	182.0	5.35
9760.000000	39.78	74.00	34.22	150.0	H	70.0	8.16
14164.500000	41.40	74.00	32.60	150.0	H	268.0	11.45

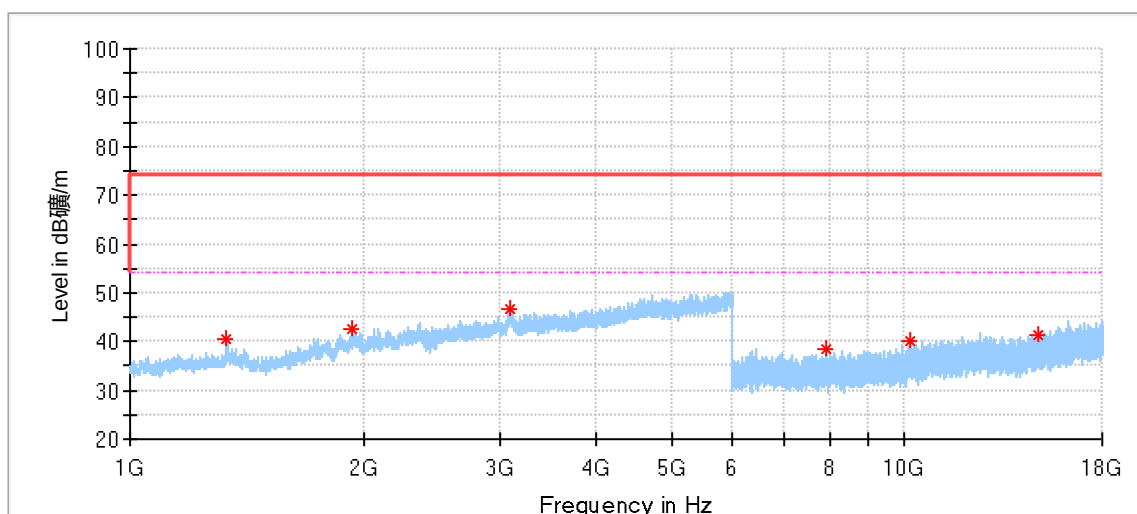


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1332.000000	40.42	74.00	33.58	150.0	V	354.0	-7.88
1931.500000	42.76	74.00	31.24	150.0	V	27.0	-4.32
3100.500000	46.47	74.00	27.53	150.0	V	318.0	1.56
7932.000000	38.51	74.00	35.49	150.0	V	156.0	6.12
10144.000000	40.28	74.00	33.72	150.0	V	72.0	8.55
14910.000000	41.33	74.00	32.67	150.0	V	17.0	12.95

BLE_1Mbps_High Channel: 2480MHz

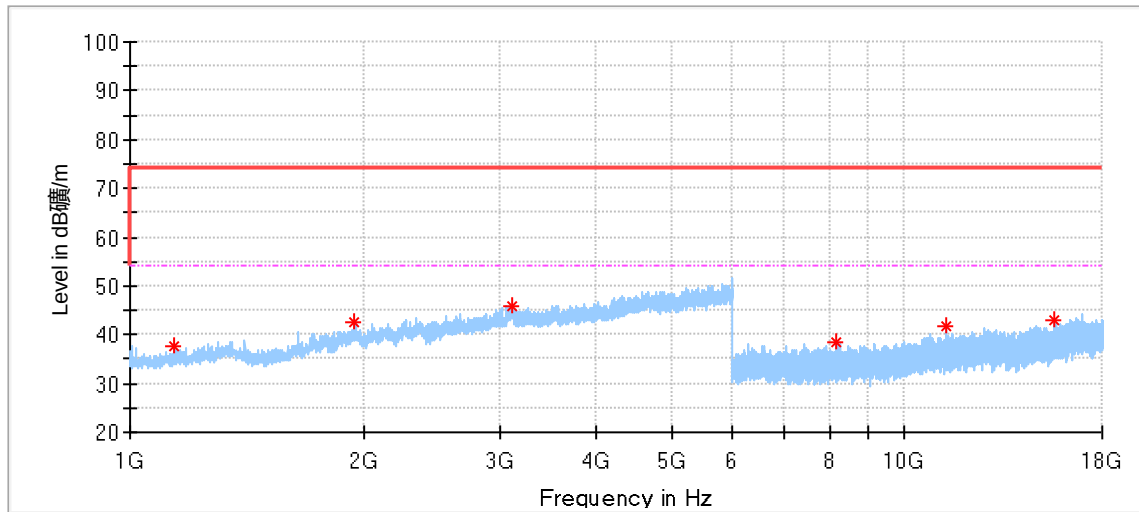



Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1141.000000	37.51	74.00	36.49	150.0	H	27.0	-9.23
1951.000000	42.75	74.00	31.25	150.0	H	0.0	-4.14
3106.500000	45.91	74.00	28.09	150.0	H	163.0	1.36
8169.500000	38.64	74.00	35.36	150.0	H	184.0	6.39
11345.500000	41.59	74.00	32.41	150.0	H	153.0	10.32
15613.000000	43.17	74.00	30.83	150.0	H	328.0	13.87

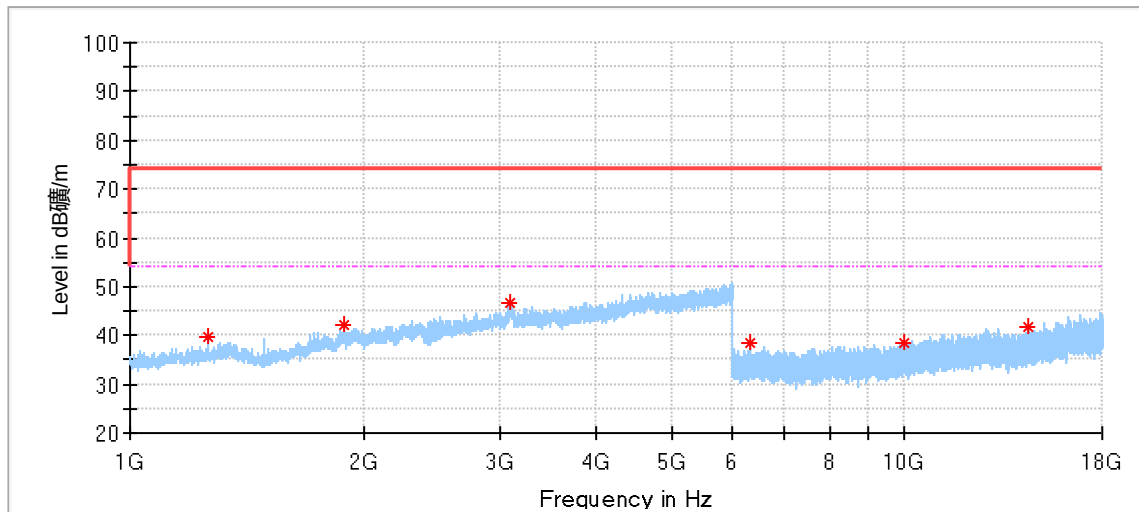


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1261.000000	39.57	74.00	34.43	150.0	V	136.0	-8.76
1890.500000	42.29	74.00	31.71	150.0	V	341.0	-4.79
3097.000000	46.48	74.00	27.52	150.0	V	0.0	1.47
6307.500000	38.32	74.00	35.68	150.0	V	128.0	5.24
9973.500000	38.49	74.00	35.51	150.0	V	328.0	8.37
14458.500000	41.78	74.00	32.22	150.0	V	128.0	12.09

18GHz-26.5GHz


BLE_1Mbps_Low Channel: 2402MHz

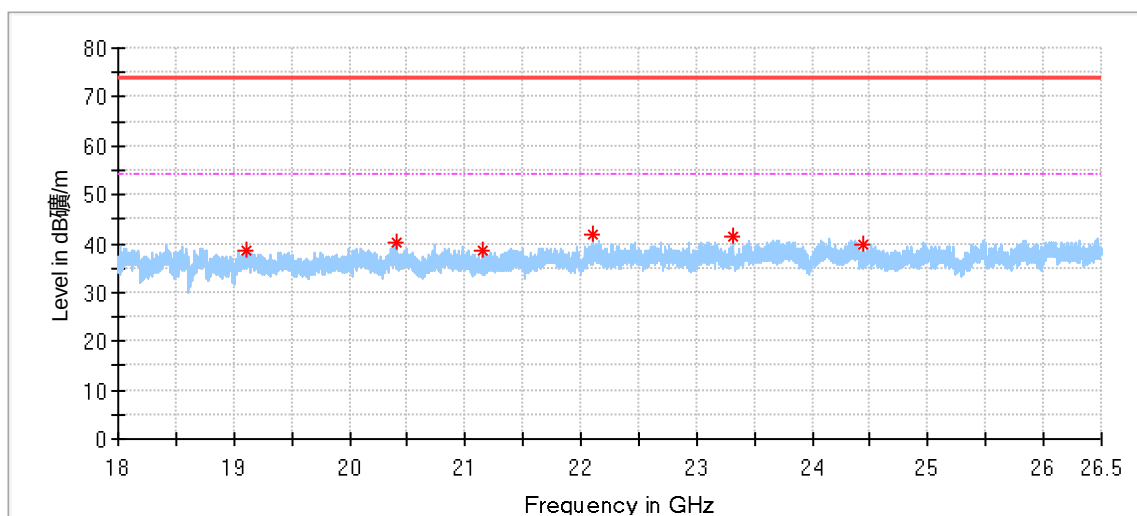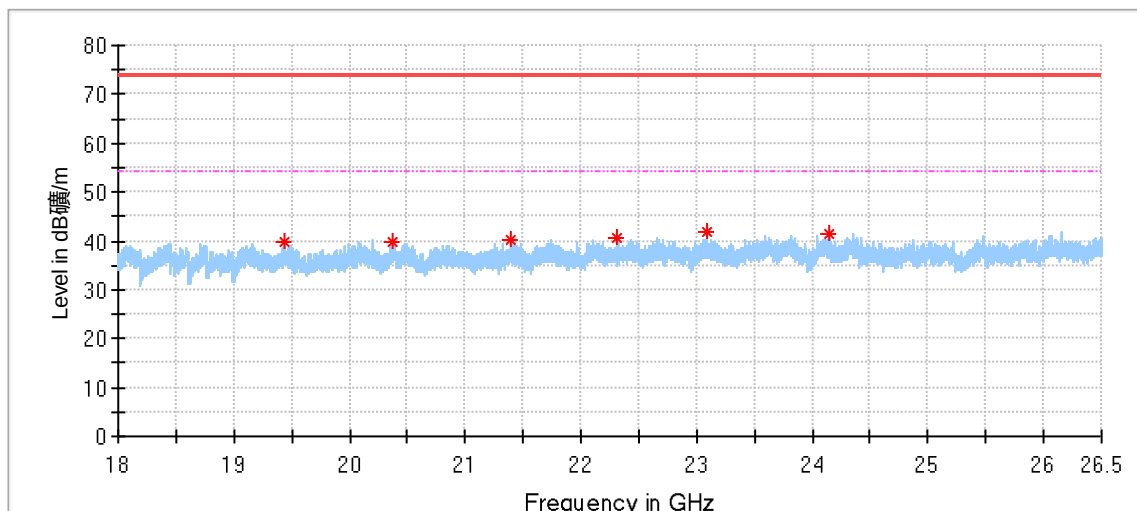

BLE_1Mbps_Middle Channel: 2440MHz

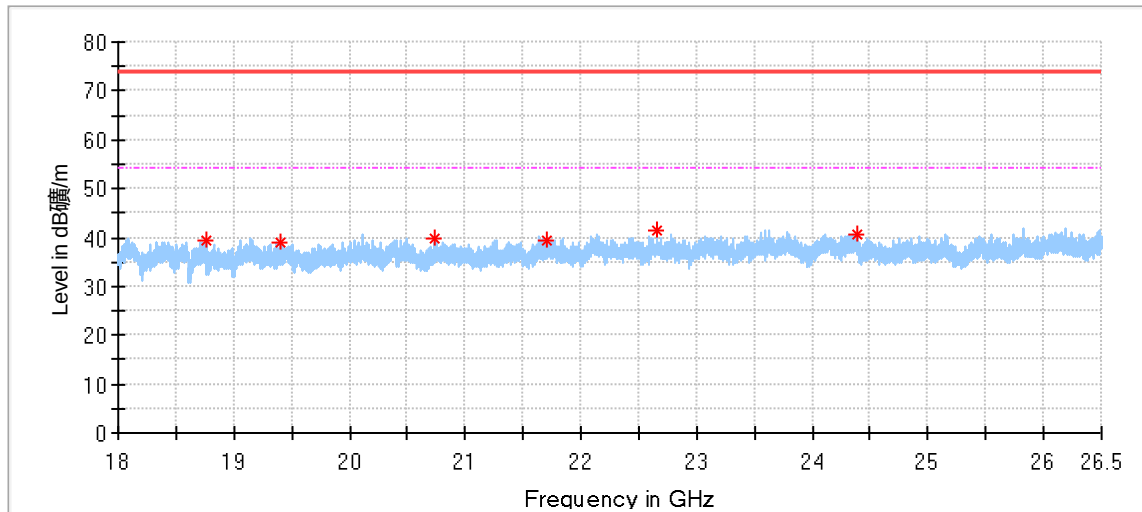


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18755.562500	39.40	74.00	34.60	150.0	H	205.0	-4.37
19401.812500	39.10	74.00	34.90	150.0	H	68.0	-4.16
20743.812500	39.85	74.00	34.15	150.0	H	52.0	-2.72
21699.437500	39.45	74.00	34.55	150.0	H	266.0	-1.75
22653.000000	41.33	74.00	32.67	150.0	H	356.0	-0.79
24388.937500	40.49	74.00	33.51	150.0	H	0.0	-0.19

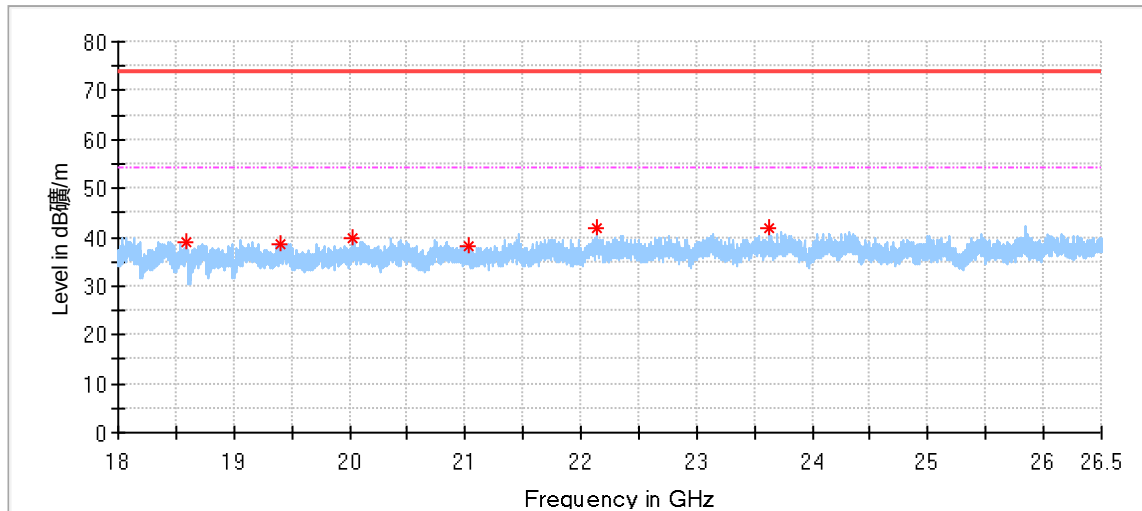


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18595.375000	39.07	74.00	34.93	150.0	V	4.0	-4.39
19399.750000	38.61	74.00	35.39	150.0	V	280.0	-4.16
20025.375000	39.97	74.00	34.03	150.0	V	0.0	-3.77
21036.687500	38.08	74.00	35.92	150.0	V	265.0	-2.44
22136.687500	41.69	74.00	32.31	150.0	V	140.0	-1.23
23630.625000	41.75	74.00	32.25	150.0	V	189.0	-0.32

BLE_1Mbps_High Channel: 2480MHz

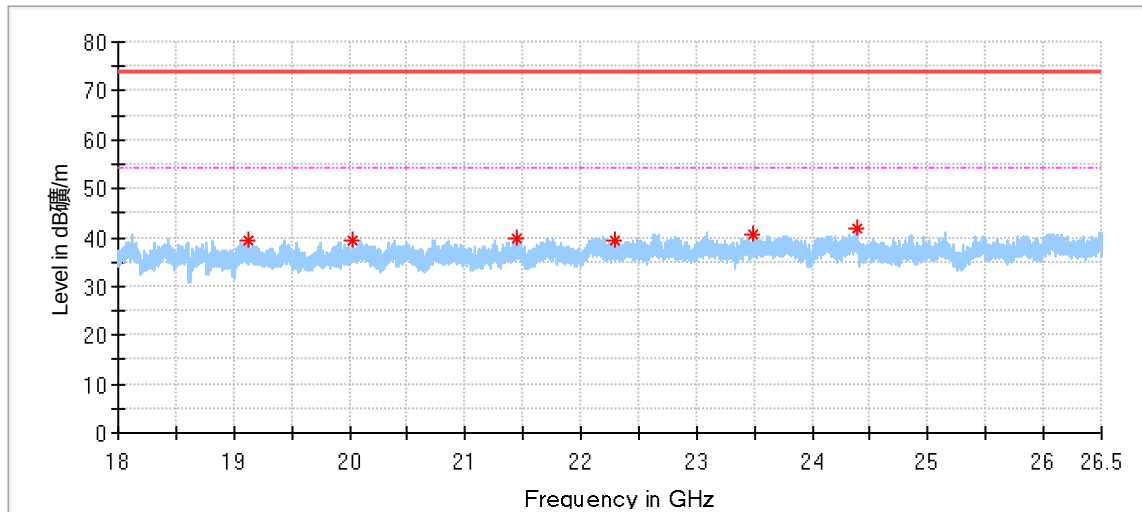


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19122.000000	39.54	74.00	34.46	150.0	H	185.0	-4.34
20025.375000	39.46	74.00	34.54	150.0	H	292.0	-3.77
21443.687500	39.97	74.00	34.03	150.0	H	94.0	-2.01
22289.312500	39.59	74.00	34.41	150.0	H	277.0	-1.08
23485.562500	40.56	74.00	33.44	150.0	H	31.0	-0.44
24395.125000	41.83	74.00	32.17	150.0	H	31.0	-0.19

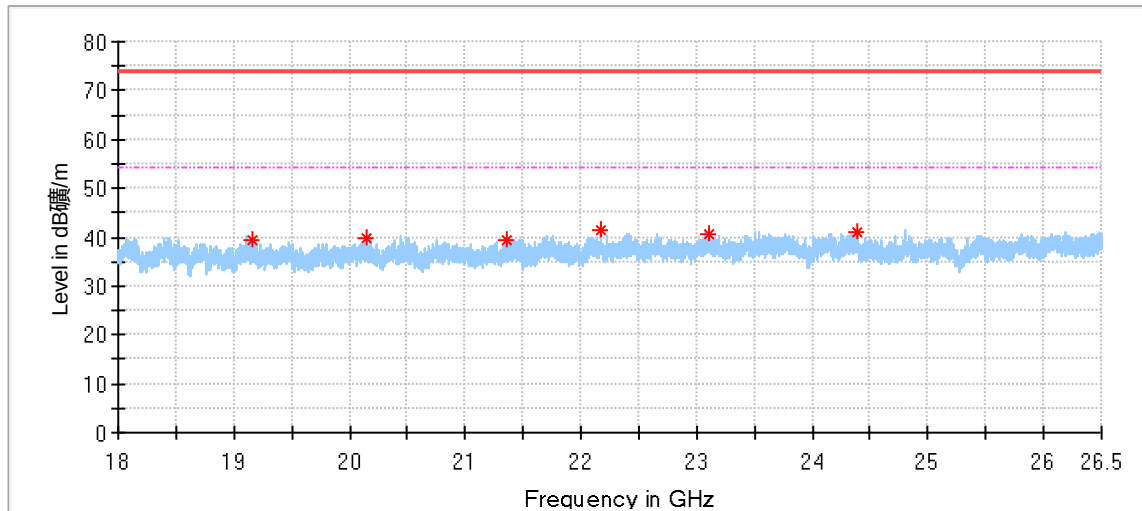


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
19157.062500	39.46	74.00	34.54	150.0	V	312.0	-4.32
20147.062500	39.98	74.00	34.02	150.0	V	0.0	-3.55
21361.875000	39.44	74.00	34.56	150.0	V	356.0	-2.13
22168.312500	41.47	74.00	32.53	150.0	V	251.0	-1.18
23102.625000	40.64	74.00	33.36	150.0	V	113.0	-0.61
24390.312500	40.91	74.00	33.09	150.0	V	266.0	-0.19

Restricted bands of operation. test result as below:

BLE_1M_Low Channel:

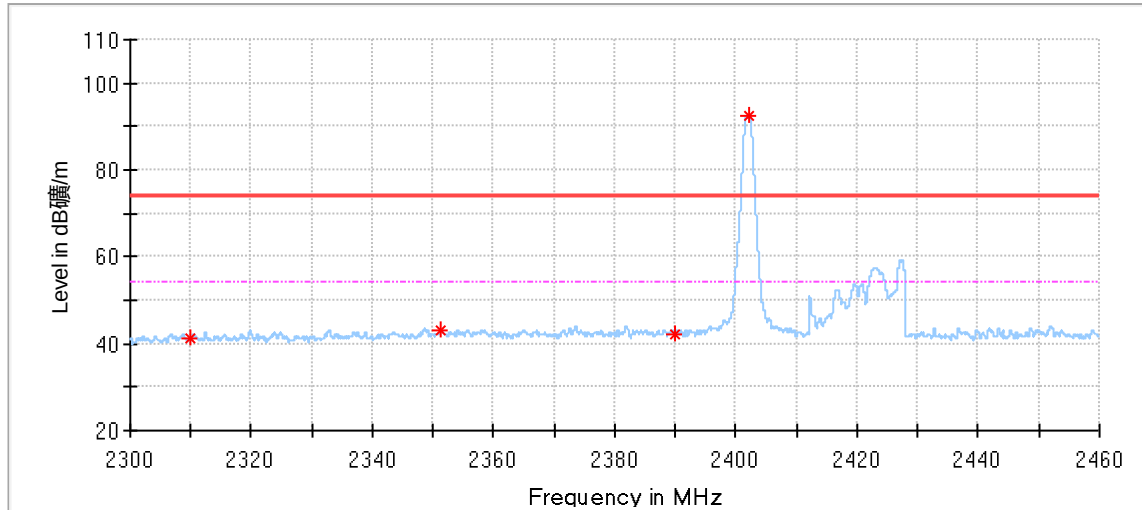


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.000000	41.00	74.00	33.00	150.0	H	328.0	-3.74
2351.344000	43.23	74.00	30.77	150.0	H	94.0	-3.41
2390.000000	42.20	74.00	31.80	150.0	H	52.0	-3.05
2402.016000	92.36	--	--	150.0	H	63.0	-3.03

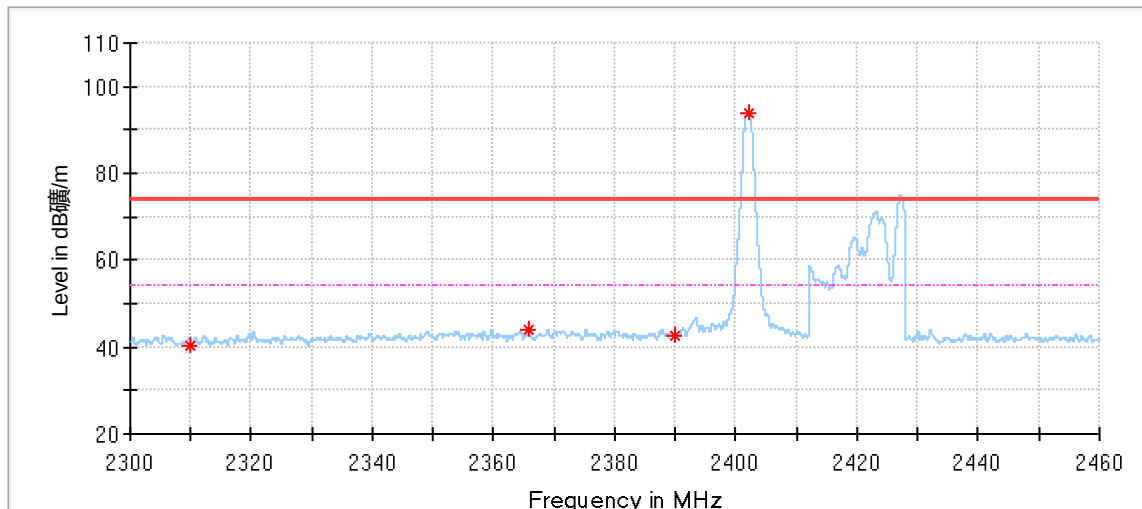


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2310.000000	40.52	74.00	33.48	150.0	V	318.0	-3.74
2365.808000	44.10	74.00	29.90	150.0	V	21.0	-3.22
2390.000000	42.68	74.00	31.32	150.0	V	31.0	-3.05
2402.000000	93.81	--	--	150.0	V	11.0	-3.03

BLE_1M_High Channel:

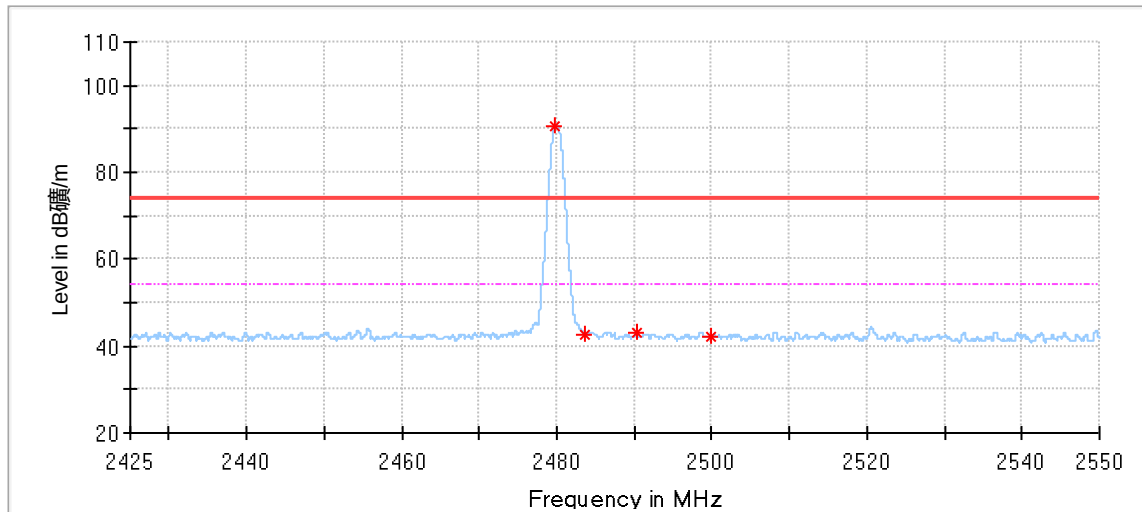

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.837500	90.77	--	--	150.0	H	4.0	-3.04
2483.500000	42.77	74.00	31.23	150.0	H	21.0	-3.06
2490.275000	42.95	74.00	31.05	150.0	H	357.0	-3.10
2500.000000	41.99	74.00	32.01	150.0	H	0.0	-3.16

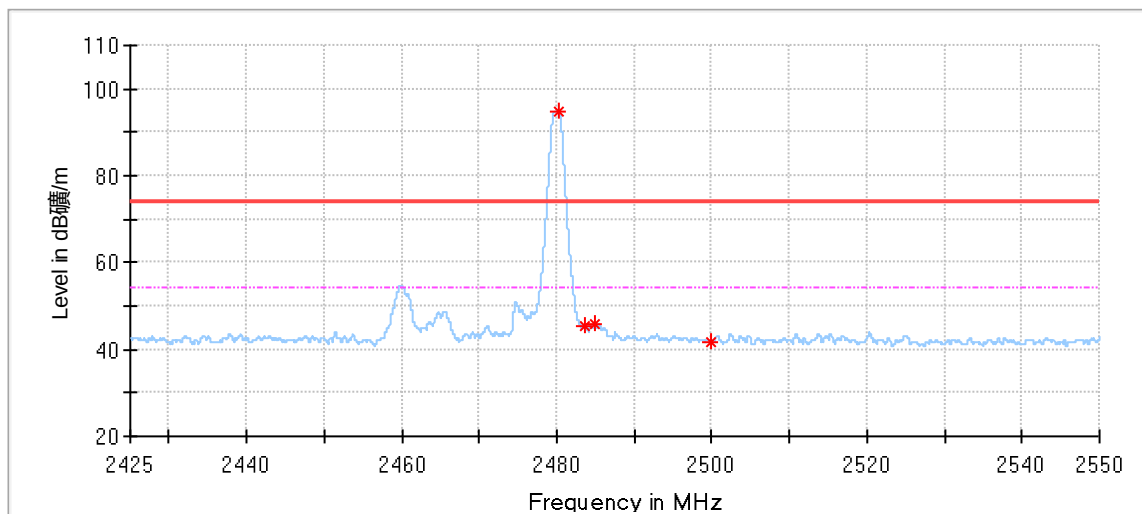

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2480.187500	94.83	--	--	150.0	V	62.0	-3.04
2483.500000	45.53	74.00	28.47	150.0	V	35.0	-3.06
2484.875000	46.05	74.00	27.95	150.0	V	62.0	-3.07
2500.000000	41.91	74.00	32.09	150.0	V	135.0	-3.16

Remark:

- (1) MaxPeak= Reading Level + Correction Factor
- (2) Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
(The Reading Level is recorded by software which is not shown in the sheet)
- (3) For 9kHz-30MHz and 30MHz-1GHz, all modes were tested, and only the modes with the worst data (BLE_2440MHz) were represented in the report.

10 Test Equipment List

Radiated Emission Test (9kHz-30MHz) (SAC-3 #1)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 7	68-4-74-19-001	102176	1	2025-5-13
Loop Antenna	Rohde & Schwarz	HFH2-Z2	68-4-80-14-006	100398	1	2025-7-24
Cable	HUBER-SUHNER	RG214	68-4-90-14-001-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #1	68-4-90-14-001	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-14-001-A10	Version10.35.02	N/A	N/A

Radiated Emission Test (30MHz-1GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9162	68-4-80-19-003	284	1	2025-2-22
Attenuator	Mini-circuits	UNAT-6+	68-4-81-21-002	15542	1	2025-5-11
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (1GHz-18GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Wave Guide Antenna	ETS	3117	68-4-80-19-001	00218954	1	2025-4-10
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-001	100745	1	2025-5-11
Pre-amplifier	Rohde & Schwarz	SCU 18F	68-4-29-19-002	100746	1	2025-5-11
Cable	OUQIAO	18DLB5-NMNM-7000	68-4-90-19-006-A22	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Radiated Emission Test (18GHz-40GHz) (SAC-3 #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	68-4-74-14-002	101269	1	2025-5-13
Sideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	68-4-80-14-008	12827	1	2025-7-2
Pre-amplifier	Rohde & Schwarz	SCU 40A	68-4-29-14-002	100432	1	2025-7-17
Cable	JUNFLON	MWX241	68-4-90-19-006-A21	----	----	----
3m Semi-anechoic chamber	TDK	SAC-3 #2	68-4-90-19-006	----	3	2026-10-25
Test software	Rohde & Schwarz	EMC32	68-4-90-19-006-A01	Version10.35.02	N/A	N/A

Conducted Emission Test (AMN)(CSR #2)

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 3	68-4-74-19-002	102590	1	2025-5-13
LISN	Rohde & Schwarz	ENV216	68-4-87-19-001	102472	1	2025-5-12
LISN	Rohde & Schwarz	ENV4200	68-4-87-14-001	100249	1	2025-5-13
Attenuator	Shanghai Huaxiang	TS2-26-3	68-4-81-16-003	080928189	1	2025-5-11
Cable	OUQIAO	RG142	68-4-90-19-005-A20	----	----	----
Test software	Rohde & Schwarz	EMC32	68-4-90-19-005-A01	Version10.35.02	N/A	N/A
Shielding Room	TDK	CSR #2	68-4-90-19-005	----	3	2025-10-15

RF Test System

DESCRIPTION	MANUFACTURER	MODEL NO.	EQUIPMENT ID	SERIAL NO.	CAL INTERVAL (YEAR)	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	68-4-74-14-004	101030	1	2025-5-11
RF Meas. and Switch Matrix Unit	TST PASS	TSCB3023R2	68-4-93-23-001	2811685c	1	2025-5-11
Cable	JUNFLON	J12J103539	68-4-90-19-003-A20	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A21	----	----	----
Cable	JUNFLON	J12J103539	68-4-90-19-003-A22	----	----	----
Test software	TST PASS	TST PASS	68-4-93-23-001-A03	Version 2.0	N/A	N/A
Shielding Room	TDK	TS8997	68-4-90-19-003	----	3	2025-10-15



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber (68-4-90-14-001) 9kHz-30MHz	4.69dB
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 30MHz-1000MHz	Horizontal: 4.80dB; Vertical: 5.91dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) 1000MHz-18000MHz	Horizontal: 5.40dB; Vertical: 5.40dB;
Uncertainty for Radiated Emission in new 3m chamber (68-4-90-19-006) above 18000MHz	Horizontal: 5.29dB; Vertical: 5.29dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.31dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3 and 4.3.4.

--- END OF REPORT---