

**TEST REPORT**

2/F., Garment Centre,  
576 Castle Peak Road, Kowloon,  
Hong Kong SAR, China.

Telephone: (852) 2173 8888  
Facsimile: (852) 2785 5487  
[www.intertek.com](http://www.intertek.com)

**Report No.: 22071396HKG-002**

Nacon (HK) Limited

**Application For Certification  
(Original Grant)****FCC ID: 2AVPR-600HS****IC: 25872-600HS**

Transceiver

**Prepared and Checked by:****Approved by:**

Signed on File

Wong Cheuk Ho, Herbert  
Lead EngineerWong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: October 21, 2022

**TEST REPORT****GENERAL INFORMATION**

<b>Grantee:</b>	Nacon (HK) Limited
<b>Grantee Address:</b>	17/F, 148 Electric Road, North Point, Hong Kong.
<b>Contact Person:</b>	Johnny Wong
<b>Tel:</b>	+852 2512 3111
<b>E-mail:</b>	johnny@nacon.com.hk
<b>Manufacturer:</b>	Nacon (HK) Limited
<b>Manufacturer Address:</b>	17/F, 148 Electric Road, North Point, Hong Kong.
<b>Brand Name:</b>	RIG
<b>Model:</b>	600HS
<b>HVIN:</b>	600A
<b>PMN:</b>	600HS
<b>Type of EUT:</b>	Transceiver
<b>Description of EUT:</b>	Gaming Headset dongle
<b>FCC ID / IC:</b>	2AVPR-600HS / 25872-600HS
<b>Date of Sample Submitted:</b>	July 29, 2022
<b>Date of Test:</b>	July 29, 2022 to October 12, 2022
<b>Report No.:</b>	22071396HKG-002
<b>Report Date:</b>	October 21, 2022
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-210 Issue 10 Certification.

**TEST REPORT****SUMMARY OF TEST RESULT**

Test Specification	Reference	Results
Transmitter Power Line Conducted Emissions	15.207 / RSS-Gen 8.8	Complied
Radiated Emission	15.249, 15.209 /	Complied
Radiated Emission on the Bandedge	RSS-210 B.10, RSS-Gen 8.9	
Radiated Emission in Restricted Bands	15.205 / RSS-Gen 8.10	Complied

For all technical data, which can be referred to Annex B – Report cover sheet.

For electronic filing, the Annex B – Report cover sheet is saved with filename: Annex B.pdf.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2020 Edition

RSS-210 Issue 10 Amendment 1, April 2020

RSS-Gen Issue 5 Amendment 2, February 2021

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0</b>	<b>GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1	Product Description .....	5
1.2	Related Submittal(s) Grants .....	5
1.3	Test Methodology .....	5
1.4	Test Facility.....	5
<b>2.0</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1	Justification .....	6
2.2	EUT Exercising Software.....	6
2.3	Special Accessories.....	6
2.4	Measurement Uncertainty.....	6
2.5	Support Equipment List and Description .....	6
<b>3.0</b>	<b>EMISSION RESULTS .....</b>	<b>7</b>
3.1	Field Strength Calculation .....	7
3.2	Radiated Emission Configuration Photograph.....	8
3.3	Radiated Emission Data .....	8
3.4	Conducted Emission Configuration Photograph .....	8
3.5	Conducted Emission Data .....	8
<b>4.0</b>	<b>EQUIPMENT PHOTOGRAPHS.....</b>	<b>20</b>
<b>5.0</b>	<b>PRODUCT LABELLING.....</b>	<b>20</b>
<b>6.0</b>	<b>TECHNICAL SPECIFICATIONS .....</b>	<b>20</b>
<b>7.0</b>	<b>INSTRUCTION MANUAL .....</b>	<b>20</b>
<b>8.0</b>	<b>MISCELLANEOUS INFORMATION .....</b>	<b>21</b>
8.1	Radiated Emission on the Bandedge .....	21
8.2	Discussion of Pulse Desensitization .....	28
8.3	Calculation of Average Factor .....	28
8.4	Emissions Test Procedures.....	29
8.5	Occupied Bandwidth .....	32
<b>9.0</b>	<b>CONFIDENTIALITY REQUEST.....</b>	<b>35</b>
<b>10.0</b>	<b>EQUIPMENT LIST .....</b>	<b>35</b>

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test is a Dongle of Gaming Headset with dongle. The EUT operates at frequency range of 2402MHz to 2480MHz. The EUT is powered by USB port (5VDC).

Antenna Type: Internal, Integral, PCB trace antenna (Printed Inverted-F Antenna (PIFA))  
Maximum Antenna gain: 1.72 dBi

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The Certificate procedure of transceiver for this transceiver (with FCC ID: 2AVPR600) is being processed as the same time of this application.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042H, CABID is “HKAP01”.

## TEST REPORT

### 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by USB port (5VDC) (powered by USB port of notebook computer).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

#### 2.5 Support Equipment List and Description

1. HP notebook computer (Adaptor Model: HSTNN-CA15)
2. 1 X LAN cable with length of 2m long

Provided by Intertek  
Provided by Intertek

## TEST REPORT

### 3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where  $FS$  = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

$RA$  = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

$AF$  = Antenna Factor in dB

$CF$  = Cable Attenuation Factor in dB

$AG$  = Amplifier Gain in dB

$AV$  = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain.

An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where  $FS$  = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

$RR$  =  $RA - AG - AV$  in  $\text{dB}\mu\text{V}$

$LF$  =  $CF + AF$  in dB

Assume a receiver reading of 52.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$RA$  = 52.0  $\text{dB}\mu\text{V}/\text{m}$

$AF$  = 7.4 dB

$RR$  = 18.0  $\text{dB}\mu\text{V}$

$CF$  = 1.6 dB

$LF$  = 9.0 dB

$AG$  = 29.0 dB

$AV$  = 5.0 dB

$FS$  =  $RR + LF$

$FS$  =  $18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$

Level in  $\mu\text{V}/\text{m}$  = Common Antilogarithm  $[(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$

## TEST REPORT

### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 162.162 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 2.0 dB

### 3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 9.164 MHz

For electronic filing, the worst-case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

### 3.5 Conducted Emission Data


For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 10.6 dB

## TEST REPORT

### CONDUCTED EMISSION

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Powered by Notebook USB Port and Bluetooth Operating

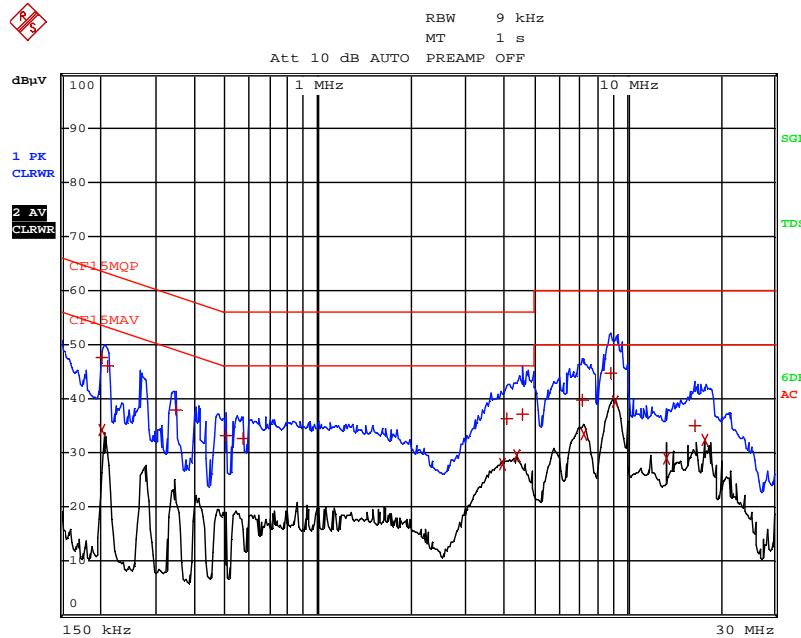

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP	Trace2:	CF15MAV	Trace3:	---
TRACE	FREQUENCY	LEVEL	dB $\mu$ V	DELTA	LIMIT dB
1	Quasi Peak 204 kHz	47.53	L1	-15.91	
2	CISPR Average 204 kHz	34.12	N	-19.32	
1	Quasi Peak 213 kHz	45.98	L1	-17.10	
1	Quasi Peak 348 kHz	37.85	N	-21.15	
1	Quasi Peak 505.5 kHz	33.15	N	-22.84	
1	Quasi Peak 573 kHz	32.62	N	-23.37	
2	CISPR Average 3.957 MHz	27.95	L1	-18.05	
1	Quasi Peak 4.074 MHz	36.35	L1	-19.65	
2	CISPR Average 4.389 MHz	29.58	N	-16.41	
1	Quasi Peak 4.6005 MHz	37.19	N	-18.80	
1	Quasi Peak 7.1925 MHz	39.68	L1	-20.31	
2	CISPR Average 7.26 MHz	33.48	L1	-16.51	
1	Quasi Peak 8.871 MHz	44.74	L1	-15.25	
2	CISPR Average 9.1635 MHz	39.44	L1	-10.55	
2	CISPR Average 13.4475 MHz	29.07	N	-20.92	
1	Quasi Peak 16.6245 MHz	35.13	L1	-24.86	
2	CISPR Average 17.934 MHz	32.33	L1	-17.66	

Note: Measurement Uncertainty is  $\pm 4.2$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 1M)

**Table 1**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	89.4	33	29.4	85.8	94.0	-8.2
V	4804.000	41.7	33	34.9	43.6	54.0	-10.4
H	7206.000	38.3	33	37.9	43.2	54.0	-10.8
H	9608.000	28.6	33	40.4	36.0	54.0	-18.0
H	12010.000	30.0	33	40.5	37.5	54.0	-16.5
H	14412.000	35.7	33	40.0	42.7	54.0	-11.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	110.2	33	29.4	106.6	114.0	-7.4
V	4804.000	49.4	33	34.9	51.3	74.0	-22.7
H	7206.000	48.6	33	37.9	53.5	74.0	-20.5
H	9608.000	42.4	33	40.4	49.8	74.0	-24.2
H	12010.000	43.7	33	40.5	51.2	74.0	-22.8
H	14412.000	50.3	33	40.0	57.3	74.0	-16.7

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 1M)

**Table 2**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	90.9	33	29.4	87.3	94.0	-6.7
V	4880.000	36.6	33	34.9	38.5	54.0	-15.6
H	7320.000	39.3	33	37.9	44.2	54.0	-9.8
H	9760.000	28.9	33	40.4	36.3	54.0	-17.7
H	12200.000	30.3	33	40.5	37.8	54.0	-16.2
H	14640.000	37.9	33	38.4	43.3	54.0	-10.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	108.6	33	29.4	105.0	114.0	-9.0
V	4880.000	45.7	33	34.9	47.6	74.0	-26.4
H	7320.000	49.3	33	37.9	54.2	74.0	-19.8
H	9760.000	42.4	33	40.4	49.8	74.0	-24.2
H	12200.000	43.9	33	40.5	51.4	74.0	-22.6
H	14640.000	51.5	33	38.4	56.9	74.0	-17.1

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 1M)

**Table 3**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	92.0	33	29.4	88.4	94.0	-5.6
V	4960.000	36.5	33	34.9	38.4	54.0	-15.6
H	7440.000	37.4	33	37.9	42.3	54.0	-11.7
H	9920.000	29.2	33	40.4	36.6	54.0	-17.4
H	12400.000	31.0	33	40.5	38.5	54.0	-15.5
H	14880.000	37.1	33	38.4	42.5	54.0	-11.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	109.2	33	29.4	105.6	114.0	-8.4
V	4960.000	46.3	33	34.9	48.2	74.0	-25.8
H	7440.000	47.9	33	37.9	52.8	74.0	-21.2
H	9920.000	42.9	33	40.4	50.3	74.0	-23.7
H	12400.000	44.5	33	40.5	52.0	74.0	-22.0
H	14880.000	50.3	33	38.4	55.7	74.0	-18.3

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 2M)

**Table 4**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	76.4	33	29.4	72.8	94.0	-21.2
V	4804.000	37.0	33	34.9	38.9	54.0	-15.1
H	7206.000	34.5	33	37.9	39.4	54.0	-14.6
H	9608.000	28.6	33	40.4	36.0	54.0	-18.0
H	12010.000	30.1	33	40.5	37.6	54.0	-16.4
H	14412.000	35.7	33	40.0	42.7	54.0	-11.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	107.8	33	29.4	104.2	114.0	-9.8
V	4804.000	51.9	33	34.9	53.8	74.0	-20.2
H	7206.000	49.0	33	37.9	53.9	74.0	-20.2
H	9608.000	42.4	33	40.4	49.8	74.0	-24.2
H	12010.000	43.6	33	40.5	51.1	74.0	-22.9
H	14412.000	48.8	33	40.0	55.8	74.0	-18.2

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 2M)

**Table 5**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	76.1	33	29.4	72.5	94.0	-21.5
V	4880.000	31.6	33	34.9	33.5	54.0	-20.5
H	7320.000	32.4	33	37.9	37.3	54.0	-16.7
H	9760.000	29.0	33	40.4	36.4	54.0	-17.7
H	12200.000	30.0	33	40.5	37.5	54.0	-16.5
H	14640.000	37.1	33	38.4	42.5	54.0	-11.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	108.9	33	29.4	105.3	114.0	-8.7
V	4880.000	46.5	33	34.9	48.4	74.0	-25.6
H	7320.000	46.9	33	37.9	51.8	74.0	-22.2
H	9760.000	42.4	33	40.4	49.8	74.0	-24.3
H	12200.000	43.7	33	40.5	51.2	74.0	-22.9
H	14640.000	50.4	33	38.4	55.8	74.0	-18.2

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth BLE 2M)

**Table 6**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	76.0	33	29.4	72.4	94.0	-21.6
V	4960.000	31.8	33	34.9	33.7	54.0	-20.3
H	7440.000	33.4	33	37.9	38.3	54.0	-15.7
H	9920.000	29.2	33	40.4	36.6	54.0	-17.4
H	12400.000	31.0	33	40.5	38.5	54.0	-15.5
H	14880.000	37.1	33	38.4	42.5	54.0	-11.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	110.4	33	29.4	106.8	114.0	-7.2
V	4960.000	46.8	33	34.9	48.7	74.0	-25.3
H	7440.000	47.9	33	37.9	52.8	74.0	-21.2
H	9920.000	42.5	33	40.4	49.9	74.0	-24.1
H	12400.000	44.4	33	40.5	51.9	74.0	-22.1
H	14880.000	50.1	33	38.4	55.5	74.0	-18.5

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth Classic)

**Table 7**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	95.2	33	29.4	91.6	94.0	-2.4
V	4804.000	30.2	33	34.9	32.1	54.0	-21.9
H	7206.000	31.9	33	37.9	36.8	54.0	-17.2
H	9608.000	28.4	33	40.4	35.8	54.0	-18.2
H	12010.000	29.9	33	40.5	37.4	54.0	-16.6
H	14412.000	35.7	33	40.0	42.7	54.0	-11.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	106.8	33	29.4	103.2	114.0	-10.8
V	4804.000	48.1	33	34.9	50.0	74.0	-24.0
H	7206.000	45.4	33	37.9	50.3	74.0	-23.7
H	9608.000	41.7	33	40.4	49.1	74.0	-24.9
H	12010.000	43.3	33	40.5	50.8	74.0	-23.2
H	14412.000	49.3	33	40.0	56.3	74.0	-17.8

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth Classic)

**Table 8**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	94.5	33	29.4	90.9	94.0	-3.2
V	4880.000	37.9	33	34.9	39.8	54.0	-14.2
H	7320.000	30.8	33	37.9	35.7	54.0	-18.3
H	9760.000	28.9	33	40.4	36.3	54.0	-17.8
H	12200.000	30.4	33	40.5	37.9	54.0	-16.1
H	14640.000	38.0	33	38.4	43.4	54.0	-10.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2440.000	108.0	33	29.4	104.4	114.0	-9.6
V	4880.000	49.8	33	34.9	51.7	74.0	-22.3
H	7320.000	44.5	33	37.9	49.4	74.0	-24.6
H	9760.000	42.5	33	40.4	49.9	74.0	-24.1
H	12200.000	43.7	33	40.5	51.2	74.0	-22.8
H	14640.000	51.2	33	38.4	56.6	74.0	-17.4

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model/HVIN: 600HS/600A  
 Date of Test: October 12, 2022  
 Worst-Case Operating Mode: Transmitting (Bluetooth Classic)

**Table 9**  
**Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement**

#### Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	95.0	33	29.4	91.4	94.0	-2.6
V	4960.000	36.4	33	34.9	38.3	54.0	-15.7
H	7440.000	29.0	33	37.9	33.9	54.0	-20.1
H	9920.000	29.1	33	40.4	36.5	54.0	-17.5
H	12400.000	31.1	33	40.5	38.6	54.0	-15.4
H	14880.000	37.0	33	38.4	42.4	54.0	-11.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	107.4	33	29.4	103.8	114.0	-10.2
V	4960.000	48.7	33	34.9	50.6	74.0	-23.4
H	7440.000	42.7	33	37.9	47.6	74.0	-26.4
H	9920.000	43.1	33	40.4	50.5	74.0	-23.5
H	12400.000	45.0	33	40.5	52.5	74.0	-21.6
H	14880.000	50.4	33	38.4	55.8	74.0	-18.2

NOTES:

1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

**TEST REPORT****RADIATED EMISSIONS**

Model/HVIN: 600HS/600A  
Date of Test: October 12, 2022  
Worst-Case Operating Mode: Powered by Notebook USB Port and Bluetooth Operating

Table 10  
**Pursuant to FCC Part 15 Section 15.209 / RSS-GEN 8.9 Requirement**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	30.848	27.6	16	10.0	21.6	40.0	-18.4
V	100.082	36.5	16	12.0	32.5	43.5	-11.0
V	111.358	32.2	16	14.0	30.2	43.5	-13.3
V	155.493	35.5	16	16.0	35.5	43.5	-8.0
H	162.162	41.5	16	16.0	41.5	43.5	-2.0
V	392.295	27.6	16	25.0	36.6	46.0	-9.4
H	493.175	25.8	16	26.0	35.8	46.0	-10.2

NOTES: 1. Quasi-Peak Detector Data unless otherwise stated.  
2. All measurements were made at 3 meters.  
3. Negative value in the margin column shows emission below limit.  
4. Horn antenna is used for the emission over 1000MHz.  
5. Emissions within the restricted band meet the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.  
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 PRODUCT LABELLING

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

**TEST REPORT****8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).


**8.1 Radiated Emission on the Bandedge**

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-Gen 8.9, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d) / RSS-210 B.10.

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth BLE 1M)

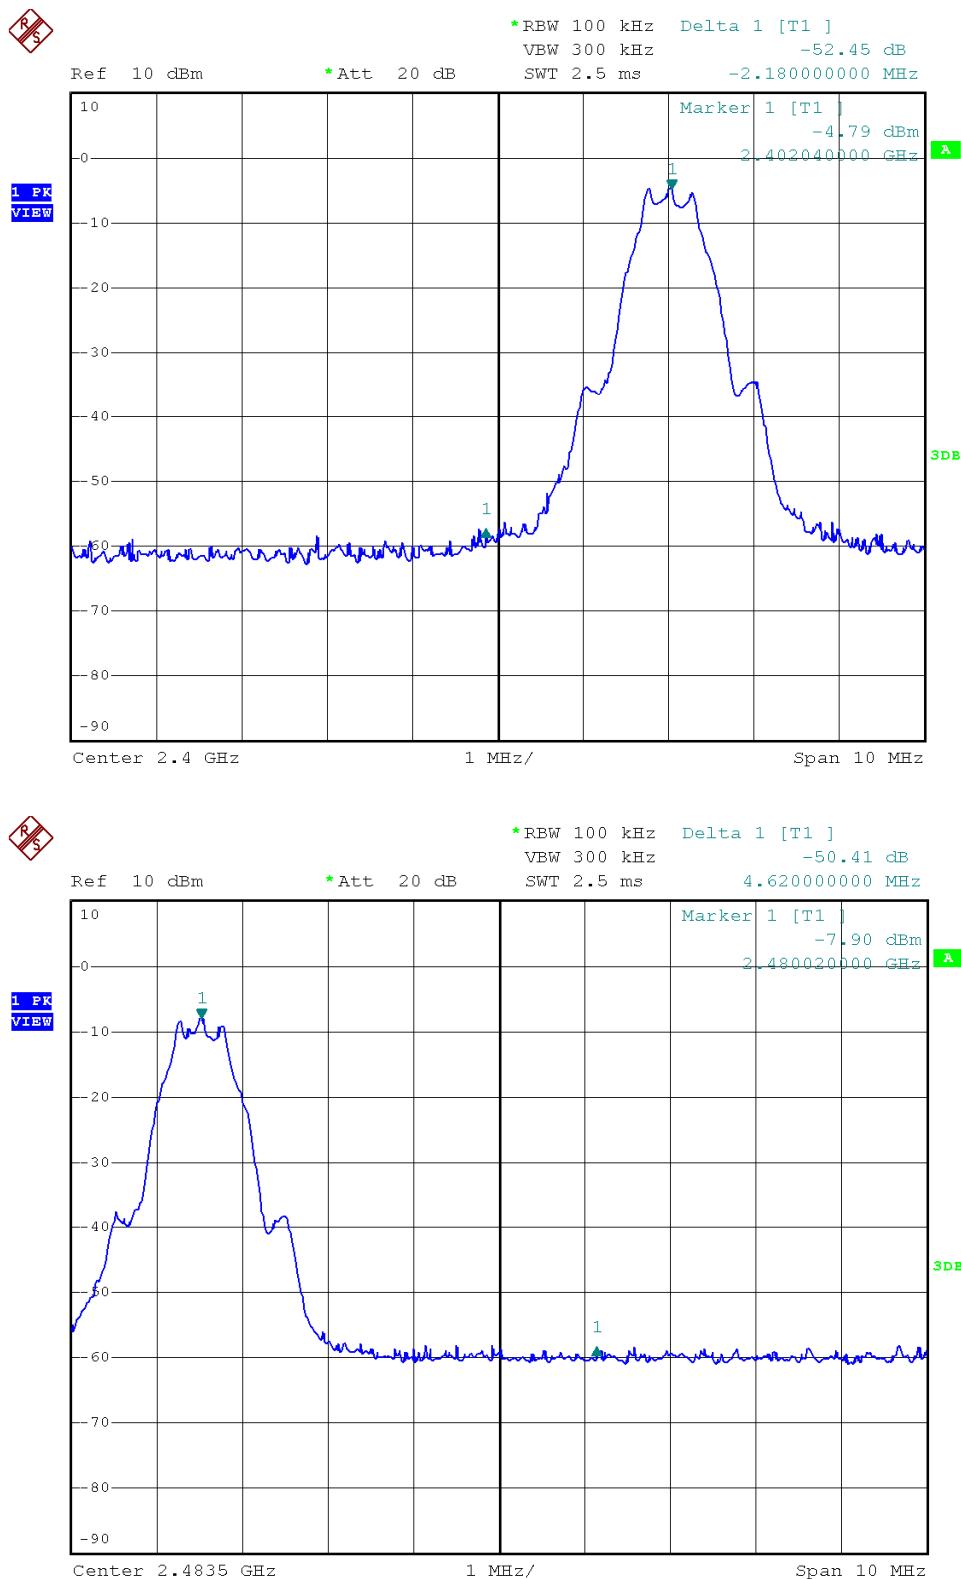

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth BLE 1M)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 106.6 \text{ dB}\mu\text{V/m} - 52.5 \text{ dB} \\ &= 54.1 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 85.8 \text{ dB}\mu\text{V/m} - 52.5 \text{ dB} \\ &= 33.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 105.6 \text{ dB}\mu\text{V/m} - 50.4 \text{ dB} \\ &= 55.2 \text{ dB}\mu\text{V/m} \end{aligned}$$



Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 88.4 \text{ dB}\mu\text{V/m} - 50.4 \text{ dB} \\ &= 38.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth BLE 2M)

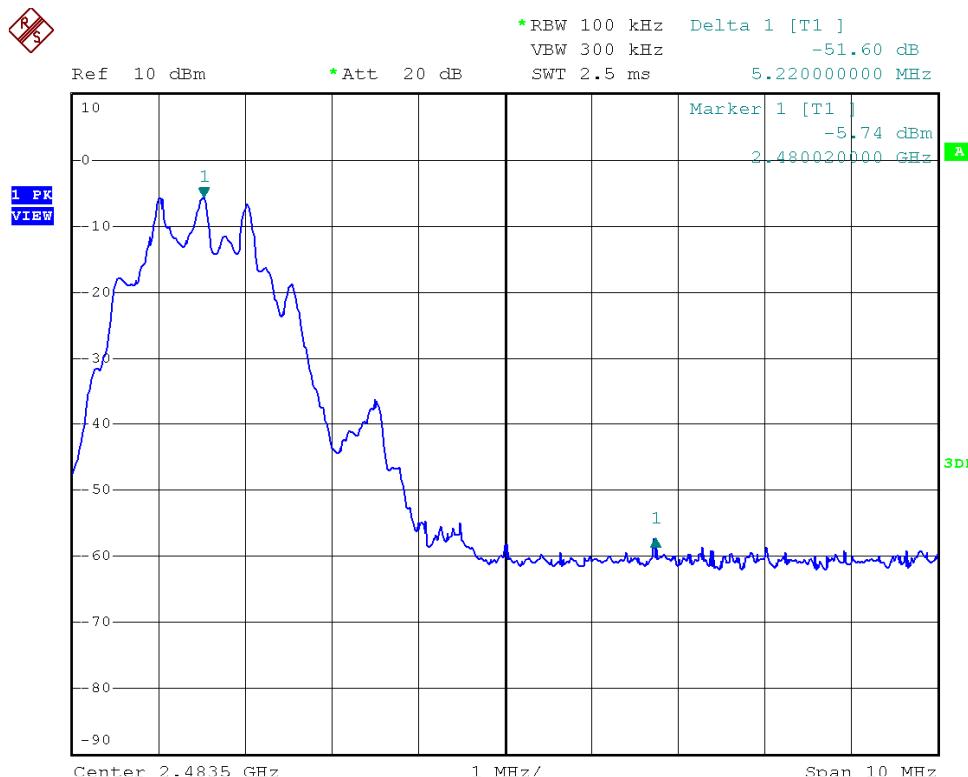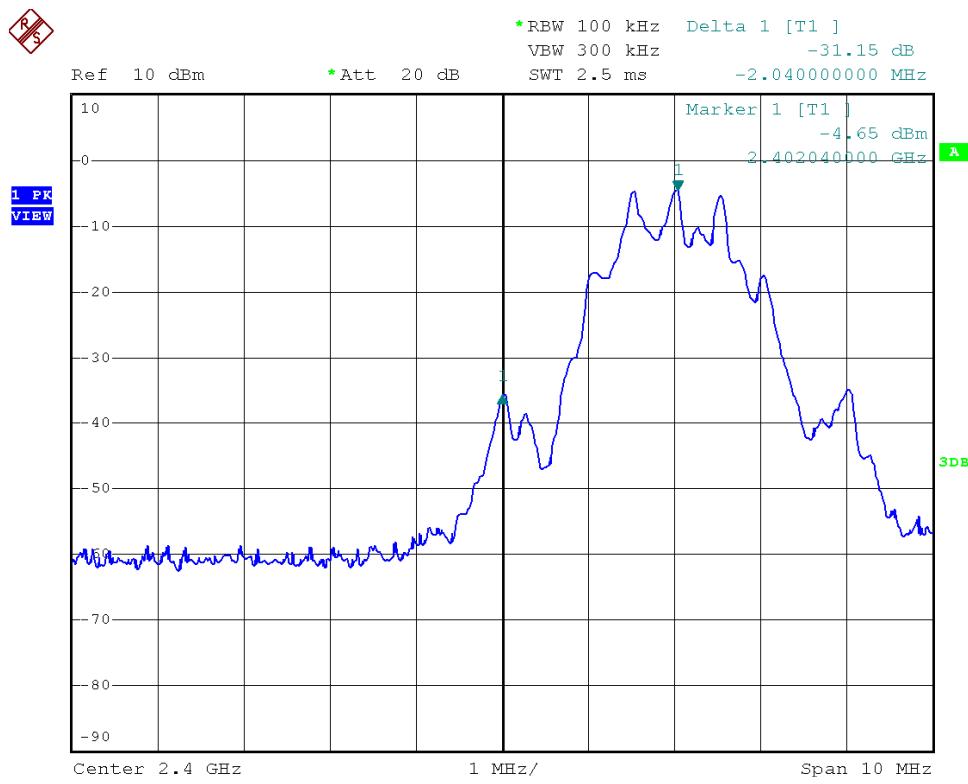

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth BLE 2M)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$= 104.2 \text{ dB}\mu\text{V/m} - 31.2 \text{ dB}$$

$$= 73.0 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$= 72.8 \text{ dB}\mu\text{V/m} - 31.2 \text{ dB}$$

$$= 41.6 \text{ dB}\mu\text{V/m}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$= 106.8 \text{ dB}\mu\text{V/m} - 51.6 \text{ dB}$$

$$= 55.2 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot



$$= 72.4 \text{ dB}\mu\text{V/m} - 51.6 \text{ dB}$$

$$= 20.8 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth 3.0)

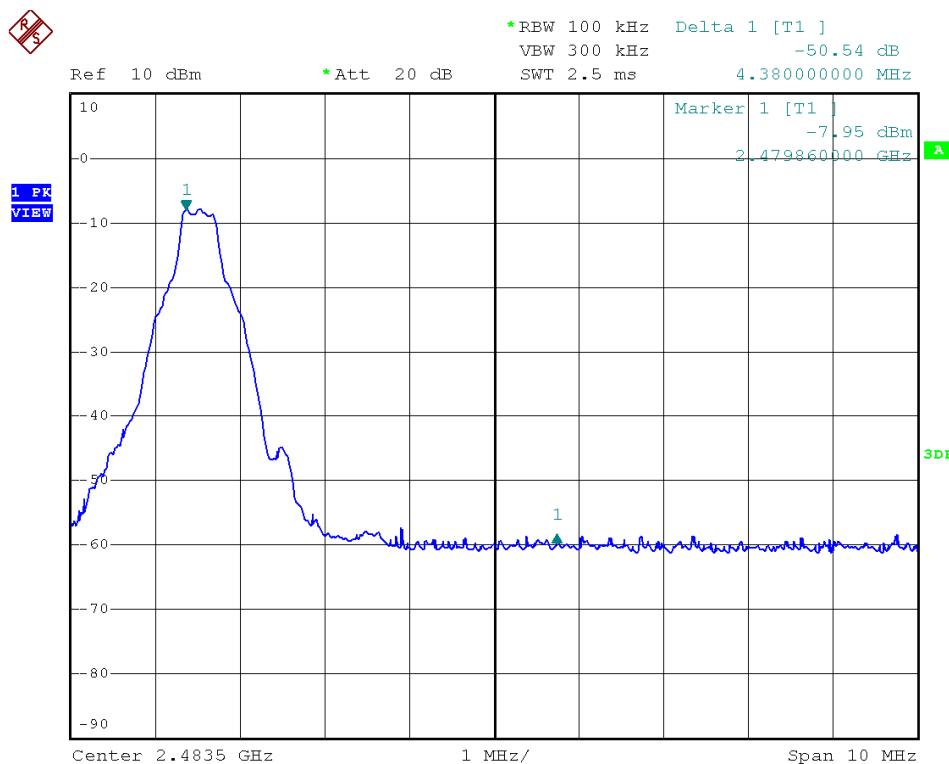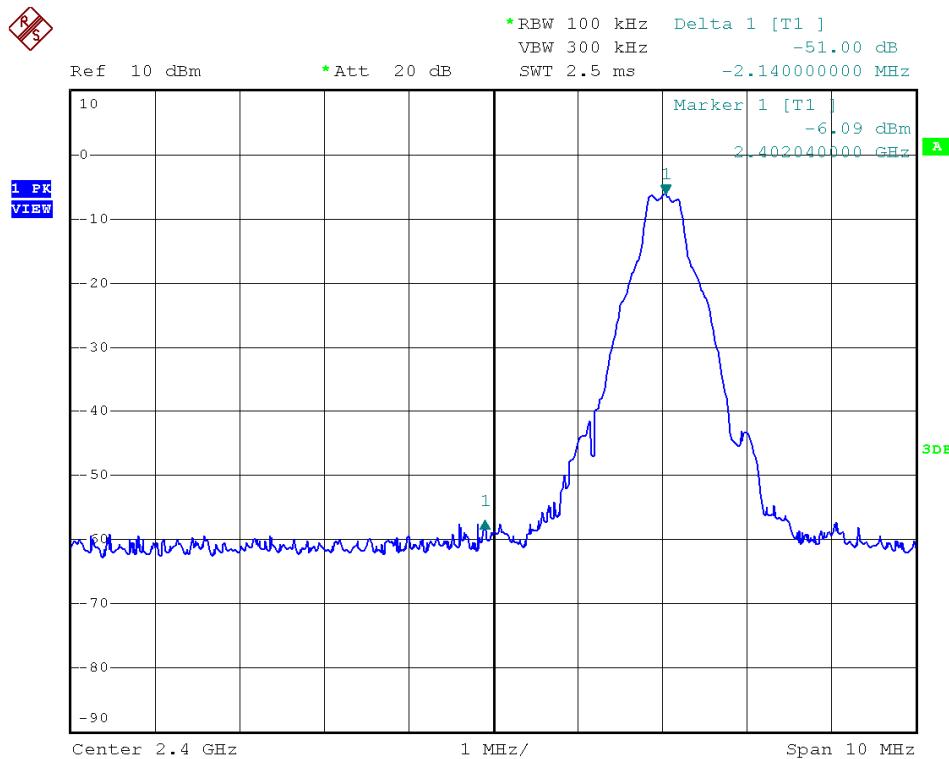

## TEST REPORT

### PEAK MEASUREMENT (Bluetooth 3.0)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 103.2 \text{ dB}\mu\text{V/m} - 51.0 \text{ dB} \\ &= 52.2 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 91.6 \text{ dB}\mu\text{V/m} - 51.0 \text{ dB} \\ &= 40.6 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 103.8 \text{ dB}\mu\text{V/m} - 50.5 \text{ dB} \\ &= 53.3 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 91.4 \text{ dB}\mu\text{V/m} - 50.5 \text{ dB} \\ &= 40.9 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

**TEST REPORT****8.2 Discussion of Pulse Desensitization**

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 625 $\mu$ s for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

**8.3 Calculation of Average Factor**

N/A

## TEST REPORT

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).



The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

## TEST REPORT

### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

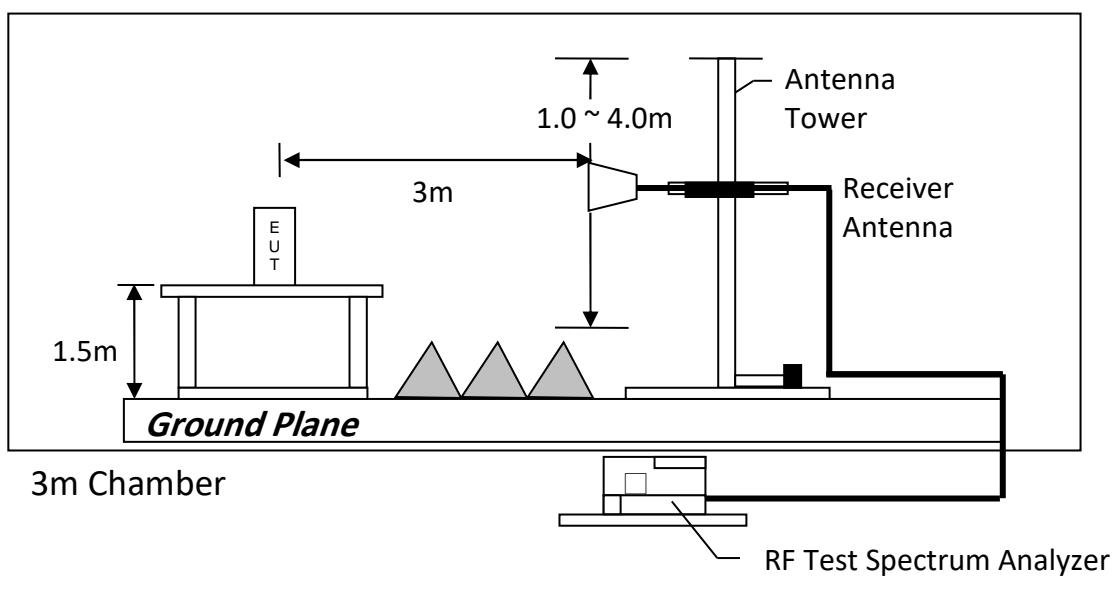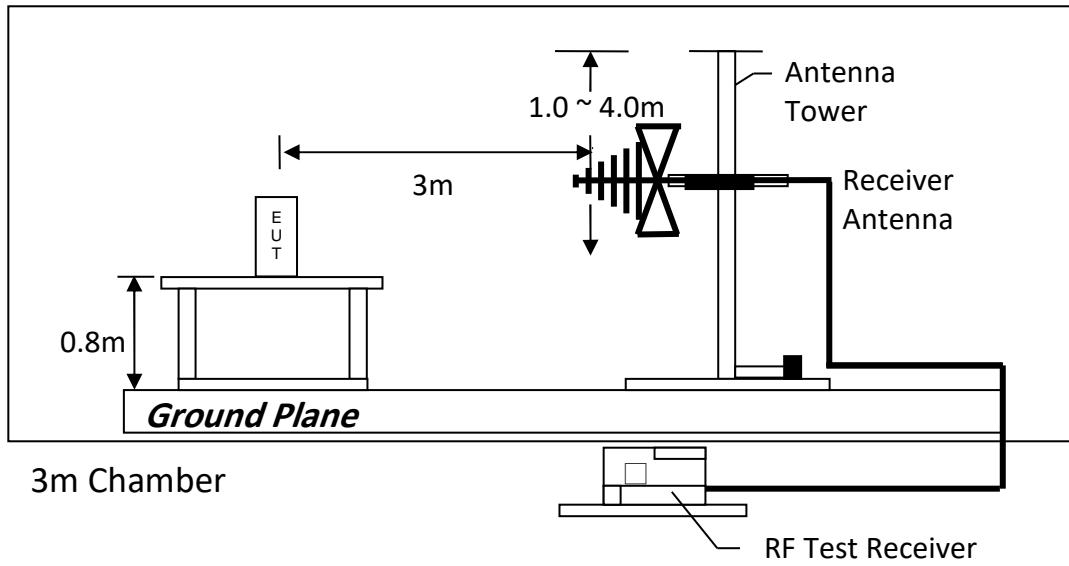


## TEST REPORT

### 8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 8.4.3 Conducted Emission Test Setup

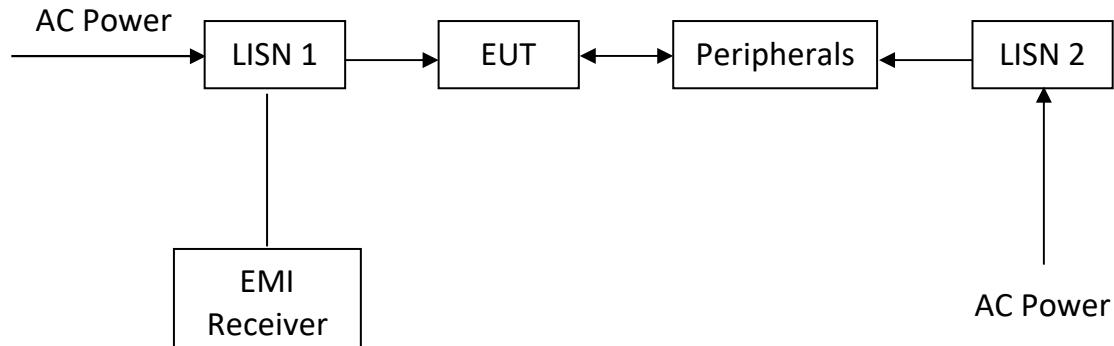


## TEST REPORT

### 8.5 Occupied Bandwidth

#### Occupied Bandwidth Results: (Bluetooth BLE 1M)

Occupied Bandwidth (kHz)	
Low Channel: 2402	1038
Middle Channel: 2440	1038
High Channel: 2480	1038

The worst case is shown as below

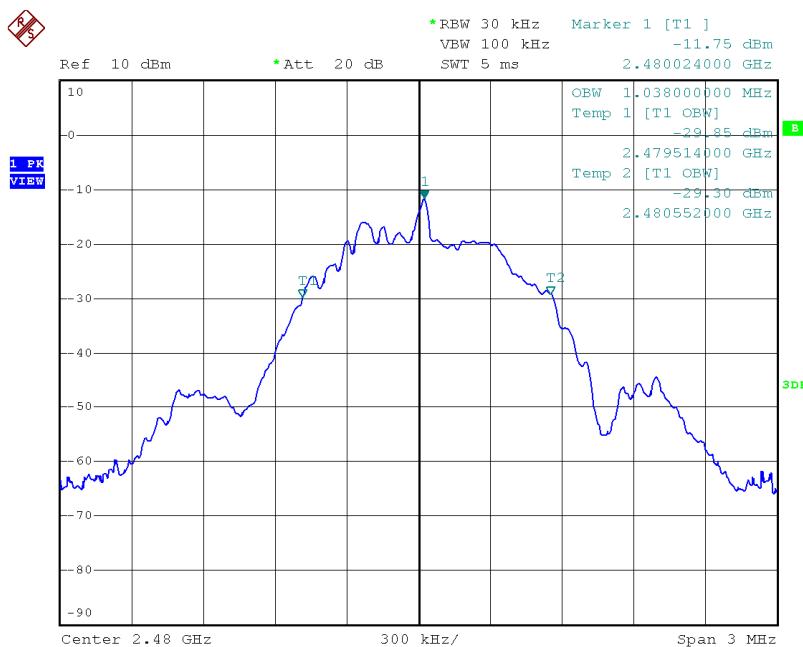


## TEST REPORT

### Occupied Bandwidth Results: (Bluetooth BLE 2M)

Occupied Bandwidth (kHz)	
Low Channel: 2402	2010
Middle Channel: 2440	2010
High Channel: 2480	2020


The worst case is shown as below

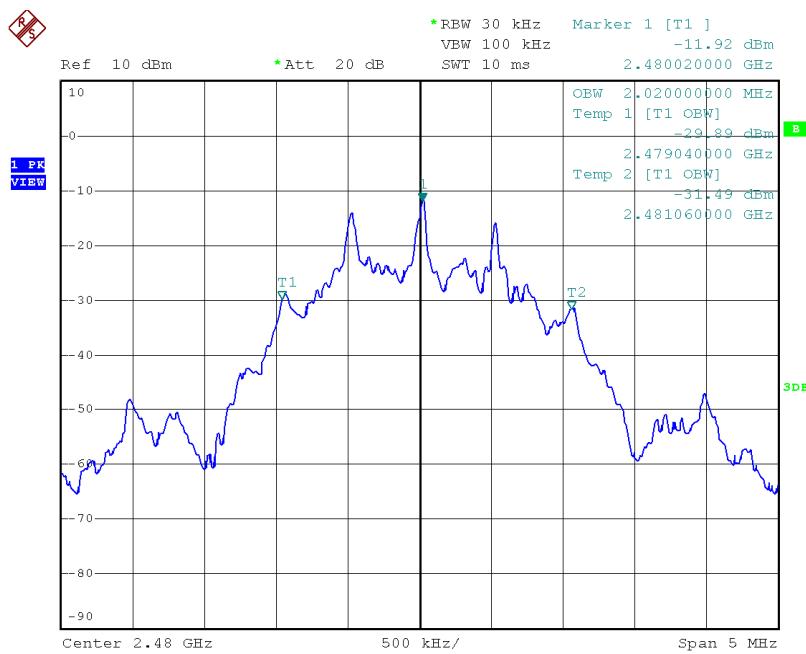

**TEST REPORT****Occupied Bandwidth Results: (Bluetooth 3.0)**

<b>Occupied Bandwidth (kHz)</b>	
Low Channel: 2402	876
Middle Channel: 2440	876
High Channel: 2480	882

The worst case is shown as below

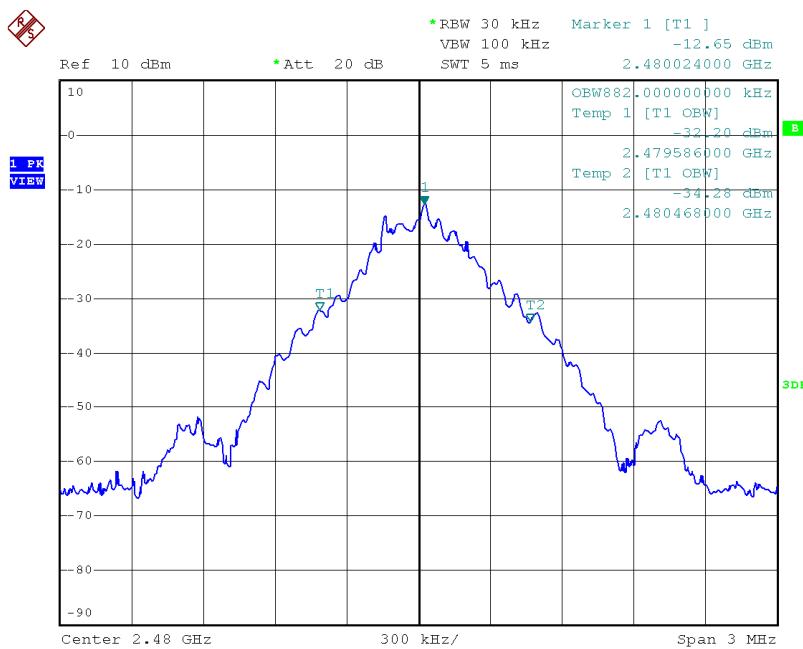

## TEST REPORT

### 9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

### 10.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Spectrum Analyzer	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-2466	EW-3481
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	FSV40	FSP30	ESR7
Calibration Date	October 29, 2021	November 18, 2019	December 21, 2021
Calibration Due Date	October 29, 2022	November 18, 2022	December 21, 2022
Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	December 13, 2021
Calibration Due Date	December 30, 2022	November 26, 2022	June 13, 2023
Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2074
Manufacturer	SCHWARZBECK	MICROWAVE	RADIALL
Model No.	BBV9718	N0324413	N(m)-RG142-BNC(m) L=14M
Calibration Date	February 15, 2022	November 16, 2019	December 10, 2021
Calibration Due Date	February 15, 2023	December 16, 2022	December 10, 2022
Equipment	Pyramidal Horn Antenna		
Registration No.	EW-0905		
Manufacturer	EMCO		
Model No.	3160-09		
Calibration Date	July 20, 2021		
Calibration Due Date	January 20, 2023		

## TEST REPORT

### 2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-2500
Manufacturer	RADIALL	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESCI
Calibration Date	January 26, 2022	November 09, 2021	March 29, 2021
Calibration Due Date	January 26, 2023	November 09, 2022	December 29, 2022

### 3) Bandedge Measurement

Equipment	Spectrum Analyzer	5m RF Cable (40GHz)
Registration No.	EW-2466	EW-2701
Manufacturer	ROHDE SCHWARZ	RADIALL
Model No.	FSP30	Sma m-m 5m 40G
Calibration Date	November 18, 2019	November 24, 2020
Calibration Due Date	November 18, 2022	November 24, 2022

### 4) OBW Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	ROHDE SCHWARZ
Model No.	FSP30
Calibration Date	November 18, 2019
Calibration Due Date	November 18, 2022

### 5) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

**END OF TEST REPORT**