

TEST REPORT

Report No.: 24080660HKG-004

Nacon (HK) Limited

Application For Certification
(Original Grant)

FCC ID: 2AVPR-7293

IC: 25872-7293

Transceiver

This report contains the data of 2.4GHz portion only

Prepared and Checked by:

Approved by:

Signed on File

Leung Chun Ning, Peter
Assistant Engineer

Wong Cheuk Ho, Herbert
Assistant Manager
Date: January 21, 2025

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

TEST REPORT

GENERAL INFORMATION

Grantee:	Nacon (HK) Limited
Grantee Address:	17/F., 148 Electric Road, North Point, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2023 Edition
FCC ID:	2AVPR-7293
FCC Model(s):	NC7293
IC Specification Standard:	RSS-210 Issue 11, June 2024 RSS-Gen Issue 5 Amendment 2, February 2021
IC:	25872-7293
HVIN:	7293C
PMN:	Revolution X Unlimited
Type of EUT:	Transceiver
Description of EUT:	Revolution X Unlimited
Brand Name:	Nacon
Serial Number:	Not Labelled
Sample Receipt Date:	August 16, 2024
Date of Test:	August 16, 2024 to December 30, 2024
Report Date:	January 21, 2024
Environmental Conditions:	Temperature: +10 to 40°C Relative Humidity: 10 to 90%
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-210 Issue 11 Certification. This report contains the data of 2.4GHz portion only

TEST REPORT

SUMMARY OF TEST RESULT

Test Items	FCC Part 15 Section	RSS-210 / RSS-Gen [#]	Results
Transmitter Power Line Conducted Emissions	15.207	8.8 [#]	Complied
Radiated Emission	15.249, 15.209	B.10 / 8.9 [#]	Complied
Radiated Emission on the Bandedge			Complied
Radiated Emission in Restricted Bands	15.205	8.10 [#]	Complied

For all technical data can be referred to Annex B – Report cover sheet.

For electronic filing, the Annex B – Report cover sheet is saved with filename: Annex B.pdf.

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2023 Edition

RSS-210 Issue 11, June 2024

RSS-Gen Issue 5 Amendment 2, February 2021

- Note:
1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the pervisions of this section.
 2. Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT

TABLE OF CONTENTS

1.0	GENERAL DESCRIPTION.....	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants.....	5
1.3	Test Methodology	5
1.4	Test Facility	5
2.0	SYSTEM TEST CONFIGURATION.....	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description.....	6
3.0	EMISSION RESULTS	7
3.1	Field Strength Calculation.....	7
3.2	Radiated Emission Configuration Photograph.....	8
3.3	Radiated Emission Data	8
3.4	Conducted Emission Configuration Photograph	8
3.5	Conducted Emission Data	8
4.0	EQUIPMENT PHOTOGRAPHS.....	20
5.0	PRODUCT LABELLING.....	20
6.0	TECHNICAL SPECIFICATIONS	20
7.0	INSTRUCTION MANUAL	20
8.0	MISCELLANEOUS INFORMATION	21
8.1	Radiated Emission on the Bandedge	21
8.2	Discussion of Pulse Desensitization.....	26
8.3	Calculation of Average Factor.....	26
8.4	Emissions Test Procedures.....	27
8.5	Occupied Bandwidth.....	30
9.0	CONFIDENTIALITY REQUEST.....	32
10.0	EQUIPMENT LIST	32

TEST REPORT

1.0 GENERAL DESCRIPTION

1.1 Product Description

The Equipment Under Test (EUT), is a 2.4GHz and Bluetooth Classic Transceiver for a Xbox Controller. For the Bluetooth Classic mode, the EUT has 1 antenna and the sample supplied operated on 79 channels, normally at 2402 - 2480MHz. The channels are separated with 1MHz spacing. For the 2.4GHz mode, the EUT has 2 antennas and the sample supplied operated on 40 channels, normally at 2402 - 2480MHz. The channels are separated with 2MHz spacing. The EUT is powered by 1 x 3.7V Lithium-ion battery.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: Descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042H, CABID is “HKAP01”.

TEST REPORT

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by 3.7VDC (1 x 3.7V Lithium-ion Battery).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (EMI_TEST_v2.0) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Support Equipment List and Description

Description	Remark
HP 820G1 Notebook	Provided by Intertek
Xbox	Provided by Intertek
Dongle	Provided by Applicant
298cm USB Type-C Charging Cable	Provided by Applicant
Charging Cradle	Provided by Applicant

TEST REPORT

3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

FS	=	Field Strength in dBμV/m
RA	=	Receiver Amplitude (including preamplifier) in dBμV
AF	=	Antenna Factor in dB
CF	=	Cable Attenuation Factor in dB
AG	=	Amplifier Gain in dB
AV	=	Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain.

An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

FS	=	Field Strength in dBμV/m
RR	=	RA - AG - AV in dBμV
LF	=	CF + AF in dB

Assume a receiver reading of 52.0 dBμV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29.0 dB and average factor of 5.0 dB are subtracted, giving a field strength of 27.0 dBμV/m. This value in dBμV/m was converted to its corresponding level in μV/m.

RA	=	52.0 dBμV/m	
AF	=	7.4 dB	RR = 18.0 dBμV
CF	=	1.6 dB	LF = 9.0 dB
AG	=	29.0 dB	
AV	=	5.0 dB	
FS	=	RR + LF	
FS	=	18.0 + 9.0 = 27.0 dBμV/m	

Level in μV/m = Common Antilogarithm [(27.0 dBμV/m)/20] = 22.4 μV/m

TEST REPORT

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 12200 and 12400 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: Setup Photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 0.5 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.627 MHz

For electronic filing, the worst-case line-conducted configuration photographs are saved with filename: Setup Photos.pdf.

3.5 Conducted Emission Data


The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Pass by 2.65 dB

TEST REPORT

CONDUCTED EMISSION

Model: 7293C
Date of Test: November 04, 2024
Worst-Case Operating Mode: Operating without cradle

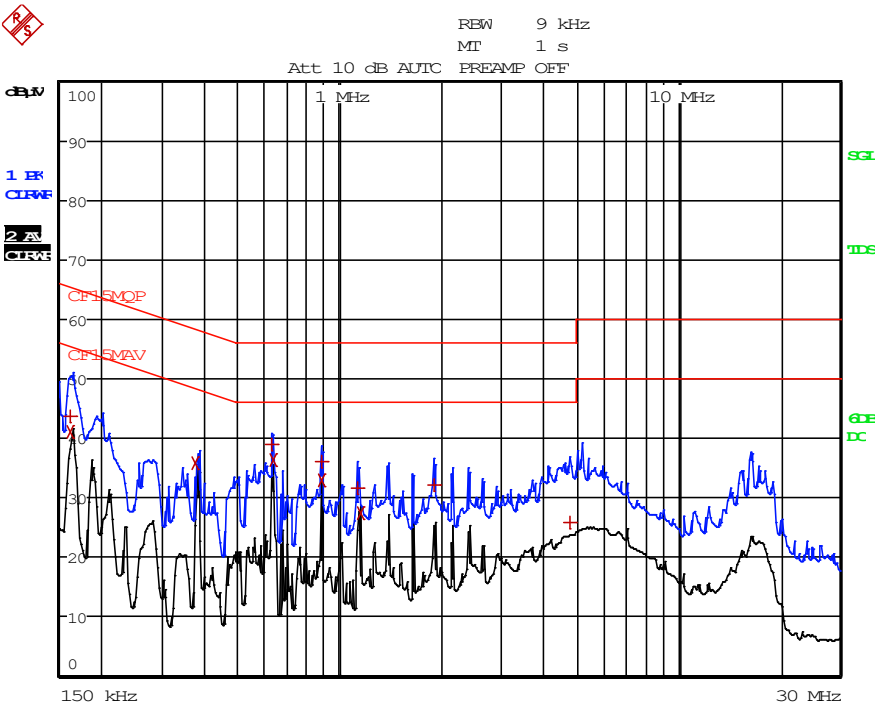


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MOP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB	
1 Quasi Peak	163.5 kHz	43.82 N	-21.45	
2 CISPR Average	163.5 kHz	40.99 L1	-14.29	
2 CISPR Average	379.5 kHz	35.90 N	-12.38	
1 Quasi Peak	631.5 kHz	38.94 N	-17.05	
2 CISPR Average	636 kHz	36.39 N	-9.60	
1 Quasi Peak	883.5 kHz	36.18 L1	-19.81	
2 CISPR Average	888 kHz	32.80 L1	-13.19	
1 Quasi Peak	1.131 MHz	31.59 N	-24.40	
2 CISPR Average	1.149 MHz	27.48 N	-18.51	
1 Quasi Peak	1.905 MHz	32.26 L1	-23.73	
1 Quasi Peak	4.785 MHz	25.93 L1	-30.06	

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

TEST REPORT

CONDUCTED EMISSION

Model: 7293C
Date of Test: November 06, 2024
Worst-Case Operating Mode: Operating with cradle

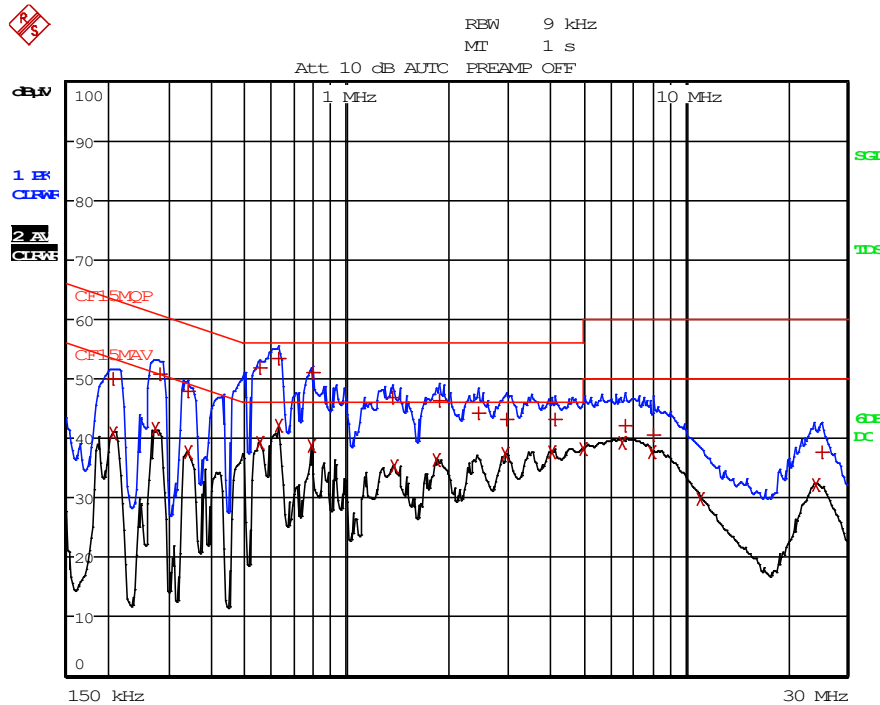

EDIT PEAK LIST (Final Measurement Results)

Trace1:	CF15MOP		
Trace2:	CF15MAV		
Trace3:	---		
	TRACE	FREQUENCY	LEVEL dBμV
			DELTA LIMIT dB
1	Quasi Peak	208.5 kHz	49.91 N
			-13.35
2	CISPR Average	208.5 kHz	40.79 N
			-12.47
2	CISPR Average	276 kHz	41.47 N
			-9.46
1	Quasi Peak	285 kHz	50.80 L1
			-9.86
1	Quasi Peak	339 kHz	47.87 N
			-11.35
2	CISPR Average	339 kHz	37.54 N
			-11.68
1	Quasi Peak	555 kHz	51.77 L1
			-4.22
2	CISPR Average	555 kHz	39.35 L1
			-6.64
1	Quasi Peak	627 kHz	53.34 N
			-2.65
2	CISPR Average	631.5 kHz	42.04 N
			-3.95
2	CISPR Average	789 kHz	38.77 N
			-7.22
1	Quasi Peak	793.5 kHz	50.97 N
			-5.02
1	Quasi Peak	1.3695 MHz	46.82 N
			-9.17
2	CISPR Average	1.383 MHz	35.34 L1
			-10.66
2	CISPR Average	1.8465 MHz	36.33 L1
			-9.66
1	Quasi Peak	1.878 MHz	46.43 N
			-9.56
1	Quasi Peak	2.454 MHz	44.17 L1
			-11.82
2	CISPR Average	2.9445 MHz	37.40 L1
			-8.59
1	Quasi Peak	2.9625 MHz	43.23 L1
			-12.76
2	CISPR Average	4.047 MHz	37.59 L1
			-8.40

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

TEST REPORT

CONDUCTED EMISSION

Model:7293C

Date of Test:November 06, 2024

Worst-Case Operating Mode:Operating with cradle

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		CF15MQP		
Trace2:		CF15MAV		
Trace3:		---		
TRACE	FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
1 Quasi Peak	4.1235 MHz	43.08	L1	-12.91
2 CISPR Average	4.9875 MHz	38.19	L1	-7.80
2 CISPR Average	6.486 MHz	39.31	L1	-10.68
1 Quasi Peak	6.657 MHz	42.14	L1	-17.85
2 CISPR Average	7.9845 MHz	37.54	L1	-12.45
1 Quasi Peak	8.016 MHz	40.54	L1	-19.45
2 CISPR Average	11.121 MHz	29.77	L1	-20.22
2 CISPR Average	24.1395 MHz	32.24	N	-17.75
1 Quasi Peak	25.188 MHz	37.61	L1	-22.38

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: December 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 1)

Table 1

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	81.1	33	29.4	77.5	94.0	-16.5
V	4804.000	41.0	33	34.9	42.9	54.0	-11.1
V	7206.000	35.8	33	37.9	40.7	54.0	-13.3
V	9608.000	33.6	33	40.4	41.0	54.0	-13.0
V	12010.000	41.6	33	40.5	49.1	54.0	-4.9
H	14412.000	38.0	33	40.0	45.0	54.0	-9.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	93.5	33	29.4	89.9	114.0	-24.1
V	4804.000	57.2	33	34.9	59.1	74.0	-14.9
V	7206.000	52.2	33	37.9	57.1	74.0	-16.9
V	9608.000	47.3	33	40.4	54.7	74.0	-19.3
V	12010.000	58.7	33	40.5	66.2	74.0	-7.8
H	14412.000	51.5	33	40.0	58.5	74.0	-15.5

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: December 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 1)

Table 2

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	78.5	33	29.4	74.9	94.0	-19.1
V	4880.000	36.3	33	34.9	38.2	54.0	-15.8
H	7320.000	37.2	33	37.9	42.1	54.0	-11.9
V	9760.000	34.3	33	40.4	41.7	54.0	-12.3
V	12200.000	43.4	33	40.5	50.9	54.0	-3.1
H	14640.000	38.6	33	38.4	44.0	54.0	-10.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	91.1	33	29.4	87.5	114.0	-26.5
V	4880.000	52.5	33	34.9	54.4	74.0	-19.6
H	7320.000	52.2	33	37.9	57.1	74.0	-16.9
V	9760.000	47.6	33	40.4	55.0	74.0	-19.0
V	12200.000	59.2	33	40.5	66.7	74.0	-7.3
H	14640.000	52.3	33	38.4	57.7	74.0	-16.3

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 1)

Table 3

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	77.0	33	29.4	73.4	94.0	-20.6
V	4960.000	48.9	33	34.9	50.8	54.0	-3.2
V	7440.000	43.6	33	37.9	48.5	54.0	-5.5
V	9920.000	36.7	33	40.4	44.1	54.0	-9.9
V	12400.000	45.0	33	40.5	52.5	54.0	-1.5
H	14880.000	38.2	33	38.4	43.6	54.0	-10.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	89.6	33	29.4	86.0	114.0	-28.0
V	4960.000	57.1	33	34.9	59.0	74.0	-15.0
V	7440.000	53.9	33	37.9	58.8	74.0	-15.2
V	9920.000	49.5	33	40.4	56.9	74.0	-17.1
V	12400.000	57.1	33	40.5	64.6	74.0	-9.4
H	14880.000	51.7	33	38.4	57.1	74.0	-16.9

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 2)

Table 4

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	84.2	33	29.4	80.6	94.0	-13.4
V	4804.000	48.5	33	34.9	50.4	54.0	-3.6
V	7206.000	40.2	33	37.9	45.1	54.0	-8.9
V	9608.000	35.4	33	40.4	42.8	54.0	-11.2
V	12010.000	45.0	33	40.5	52.5	54.0	-1.5
V	14412.000	38.3	33	40.0	45.3	54.0	-8.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2402.000	96.6	33	29.4	93.0	114.0	-21.0
V	4804.000	56.7	33	34.9	58.6	74.0	-15.4
V	7206.000	50.2	33	37.9	55.1	74.0	-18.9
V	9608.000	48.2	33	40.4	55.6	74.0	-18.4
V	12010.000	56.7	33	40.5	64.2	74.0	-9.8
V	14412.000	51.4	33	40.0	58.4	74.0	-15.6

- Notes: 1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ±5.3dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 2)

Table 5

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	81.6	33	29.4	78.0	94.0	-16.0
V	4880.000	48.4	33	34.9	50.3	54.0	-3.7
H	7320.000	37.7	33	37.9	42.6	54.0	-11.4
H	9760.000	34.4	33	40.4	41.8	54.0	-12.2
V	12200.000	46.0	33	40.5	53.5	54.0	-0.5
V	14640.000	38.9	33	38.4	44.3	54.0	-9.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2440.000	94.1	33	29.4	90.5	114.0	-23.5
V	4880.000	56.6	33	34.9	58.5	74.0	-15.5
H	7320.000	49.9	33	37.9	54.8	74.0	-19.2
H	9760.000	47.7	33	40.4	55.1	74.0	-18.9
V	12200.000	57.4	33	40.5	64.9	74.0	-9.1
V	14640.000	52.6	33	38.4	58.0	74.0	-16.0

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. Average detector is applied according to ANSI C63.10.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 30, 2024
Worst-Case Operating Mode: Transmitting (2.4GHz Antenna 2)

Table 6

Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	77.5	33	29.4	73.9	94.0	-20.1
V	4960.000	46.8	33	34.9	48.7	54.0	-5.3
H	7440.000	40.4	33	37.9	45.3	54.0	-8.7
V	9920.000	37.2	33	40.4	44.6	54.0	-9.4
V	12400.000	46.0	33	40.5	53.5	54.0	-0.5
V	14880.000	38.4	33	38.4	43.8	54.0	-10.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2480.000	90.1	33	29.4	86.5	114.0	-27.5
V	4960.000	55.5	33	34.9	57.4	74.0	-16.6
H	7440.000	51.7	33	37.9	56.6	74.0	-17.4
V	9920.000	50.2	33	40.4	57.6	74.0	-16.4
V	12400.000	58.6	33	40.5	66.1	74.0	-7.9
V	14880.000	52.1	33	38.4	57.5	74.0	-16.5

- Notes: 1. Peak Detector Data unless otherwise stated.
2. Average detector is applied according to ANSI C63.10.
3. All measurements were made at 3 meters.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
7. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 31, 2024
Worst-Case Operating Mode: Operating without cradle

Table 7

Pursuant to FCC Part 15 Section 15.209 / RSS-GEN 8.9 Requirement

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	64.264	20.5	16	9.0	13.5	40.0	-26.5
V	73.315	24.9	16	6.0	14.9	40.0	-25.1
H	146.671	31.2	16	14.0	29.2	43.5	-14.3
V	337.554	25.2	16	24.0	33.2	46.0	-12.8
H	442.317	22.3	16	26.0	32.3	46.0	-13.7
H	872.704	18.3	16	32.0	34.3	46.0	-11.7

- Notes:
1. Peak and Quasi-Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSIONS

Model: 7293C
Date of Test: October 31, 2024
Worst-Case Operating Mode: Operating with cradle

Table 8

Pursuant to FCC Part 15 Section 15.209 / RSS-GEN 8.9 Requirement

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	145.137	31.5	16	14.0	29.5	43.5	-14.0
H	201.240	22.5	16	16.0	22.5	43.5	-21.0
V	340.878	33.6	16	24.0	41.6	46.0	-4.4
H	442.139	23.0	16	26.0	33.0	46.0	-13.0
V	739.544	16.7	16	30.0	30.7	46.0	-15.3
V	834.328	23.6	16	31.0	38.6	46.0	-7.4

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: External Photos.pdf and Internal Photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: Label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: Block.pdf and Circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: Manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

TEST REPORT


8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.



Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-Gen 8.9, whichever is the lesser attenuation, which meet the requirement of Part 15.249(d) / RSS-210 B.10.

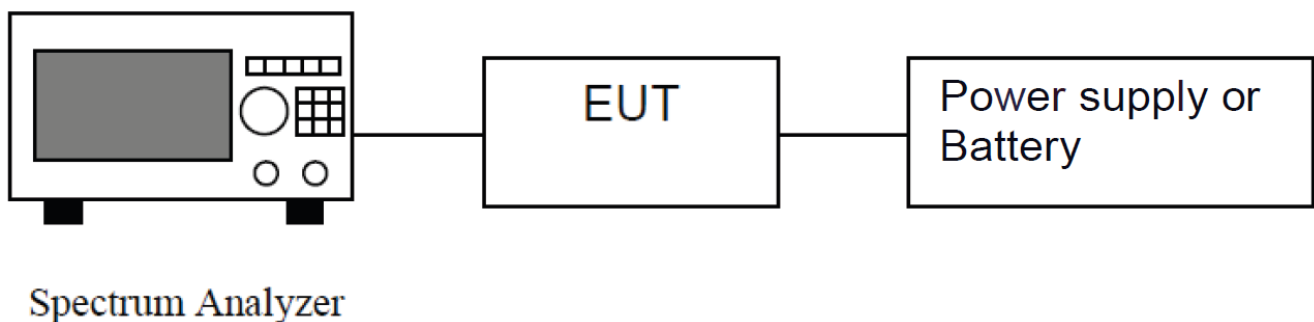

Block diagram of Test setup

TEST REPORT

PEAK MEASUREMENT (2.4GHz Antenna 1)

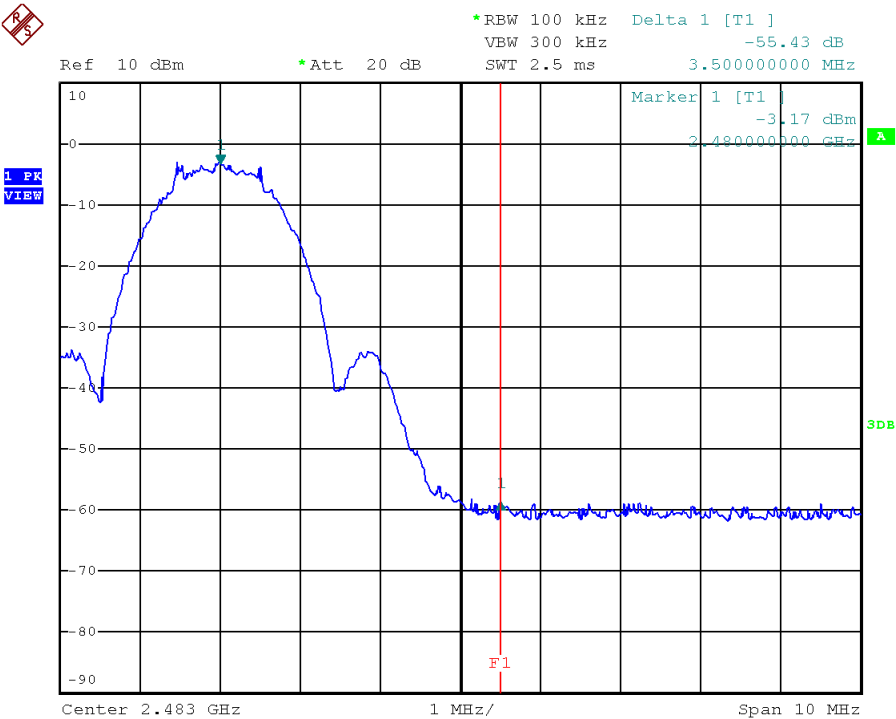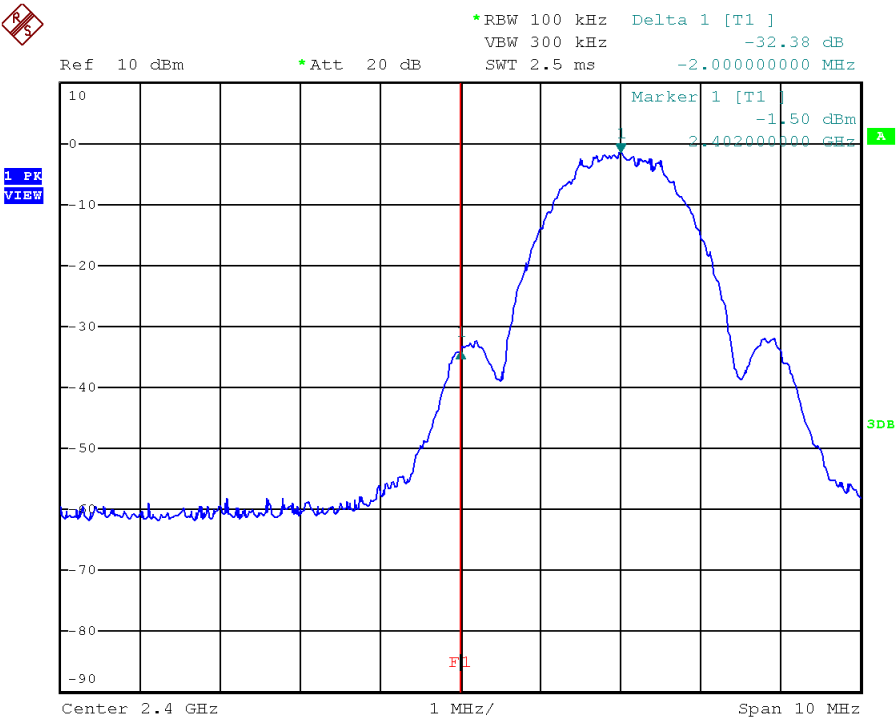

TEST REPORT

PEAK MEASUREMENT (2.4GHz Antenna 1)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 89.9 \text{ dB}\mu\text{V/m} - 32.4 \text{ dB}$$

$$= 57.5 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$= 77.5 \text{ dB}\mu\text{V/m} - 32.4 \text{ dB}$$

$$= 45.1 \text{ dB}\mu\text{V/m}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 86.0 \text{ dB}\mu\text{V/m} - 55.4 \text{ dB}$$

$$= 30.6 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot



$$= 73.4 \text{ dB}\mu\text{V/m} - 55.4 \text{ dB}$$

$$= 18.0 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dBμV/m (Peak Limit) and 54 dBμV/m (Average Limit).

TEST REPORT

PEAK MEASUREMENT (2.4GHz Antenna 2)

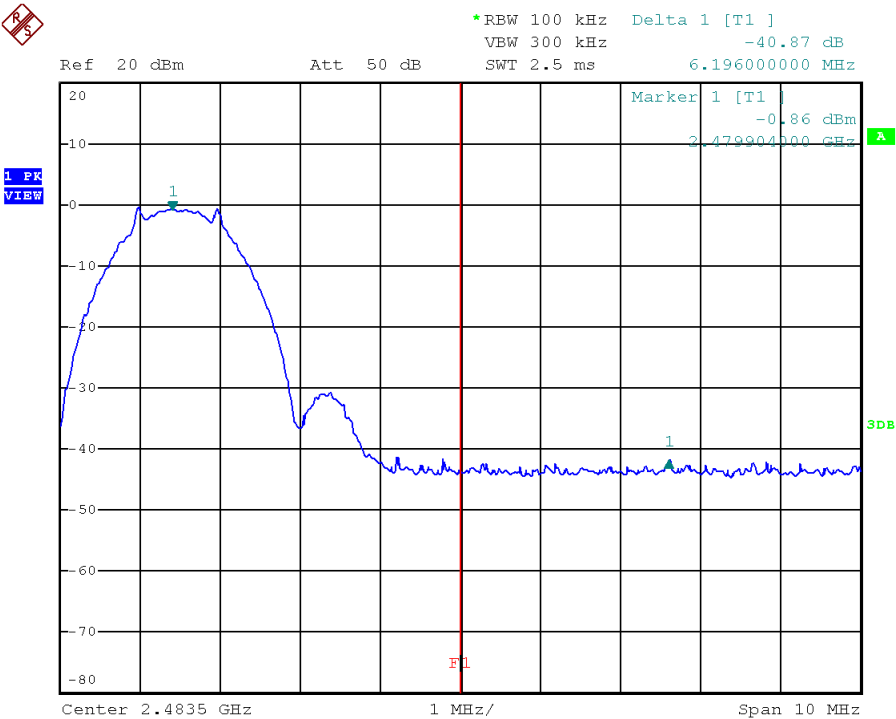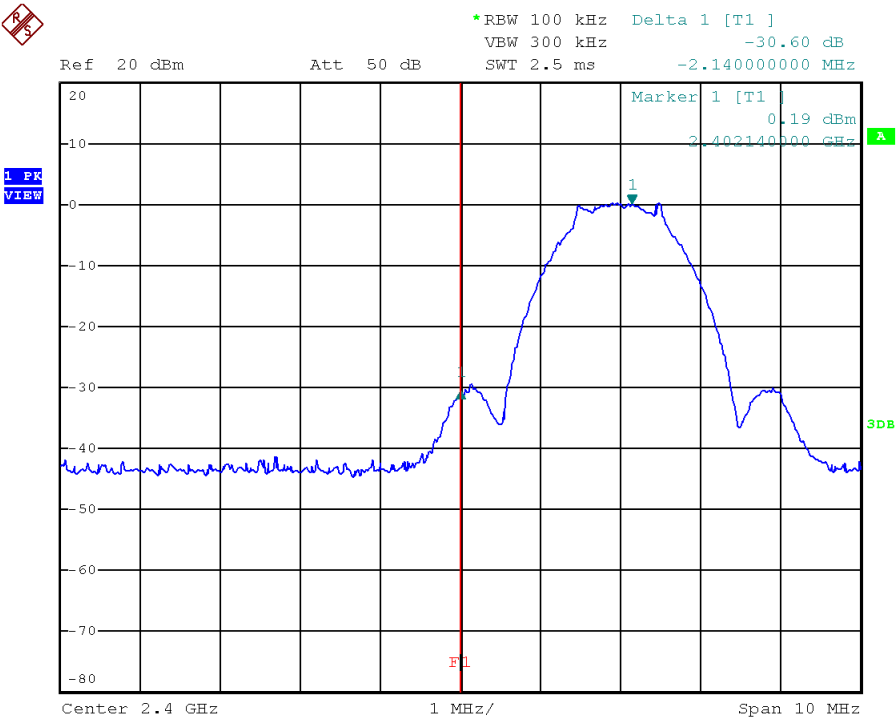

TEST REPORT

PEAK MEASUREMENT (2.4GHz Antenna 2)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 93.0 \text{ dB}\mu\text{V/m} - 30.6 \text{ dB}$$

$$= 62.4 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$= 80.6 \text{ dB}\mu\text{V/m} - 30.6 \text{ dB}$$

$$= 50.0 \text{ dB}\mu\text{V/m}$$

Upper Bandedge

Peak Resultant Field Strength = Fundamental Emissions (Peak Value) – delta from the plot

$$= 86.5 \text{ dB}\mu\text{V/m} - 40.9 \text{ dB}$$

$$= 45.6 \text{ dB}\mu\text{V/m}$$

Average Resultant Field Strength = Fundamental Emissions (Average Value) – delta from the plot

$$= 73.9 \text{ dB}\mu\text{V/m} - 40.9 \text{ dB}$$

$$= 33.0 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dBμV/m (Peak Limit) and 54 dBμV/m (Average Limit).

TEST REPORT

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately $625\mu s$ for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Not Applicable

TEST REPORT

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


TEST REPORT

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

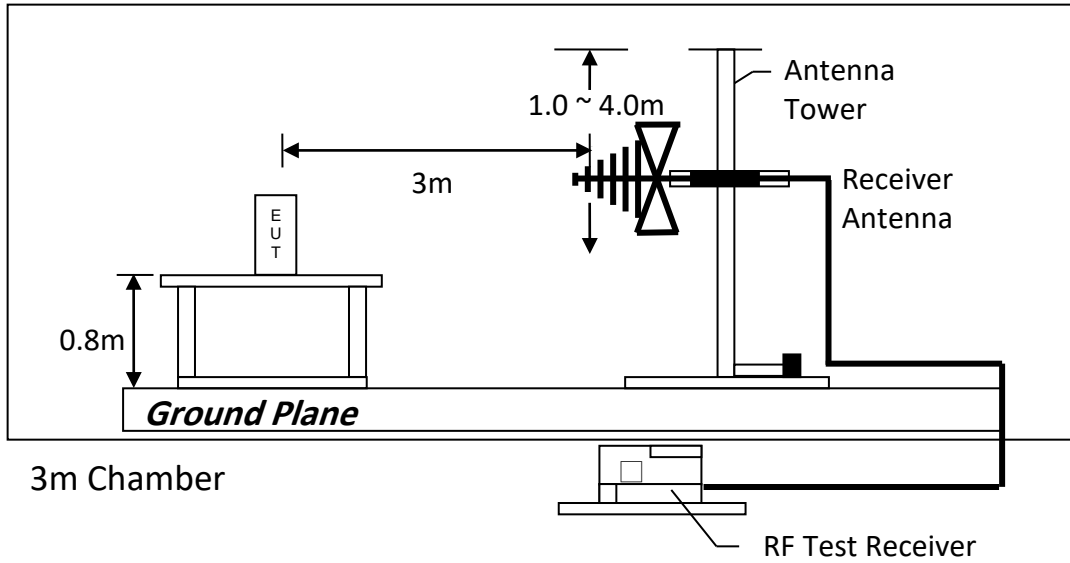

Test setup of radiated emissions up to 1GHz

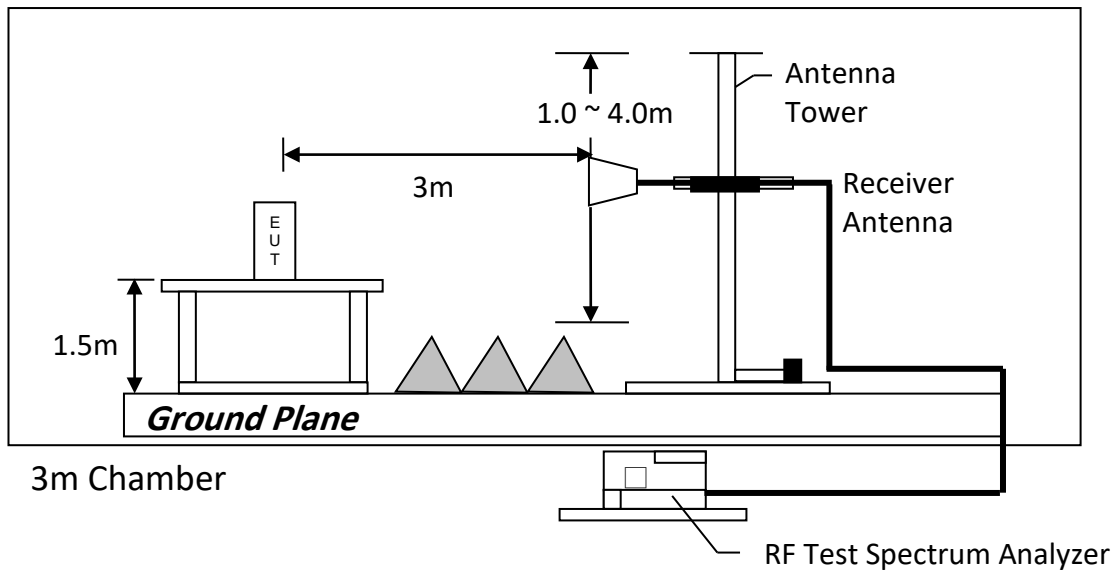

Test setup of radiated emissions above 1GHz


TEST REPORT

8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.


All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4.3 Conducted Emission Test Setup

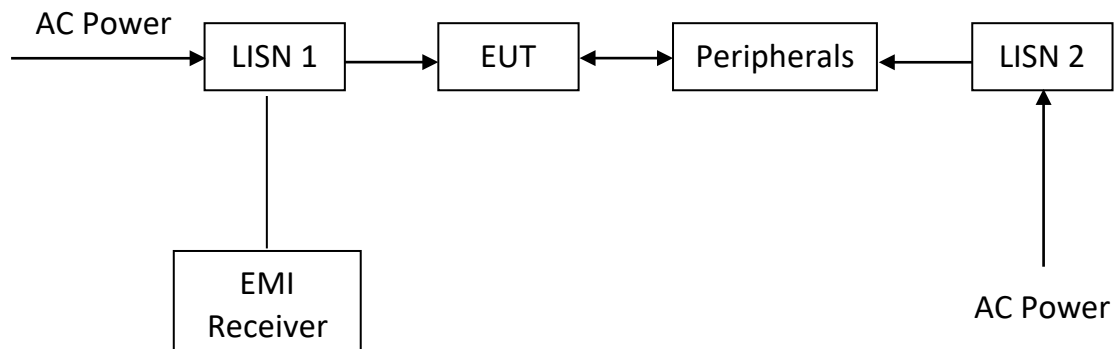

TEST REPORT

8.5 Occupied Bandwidth

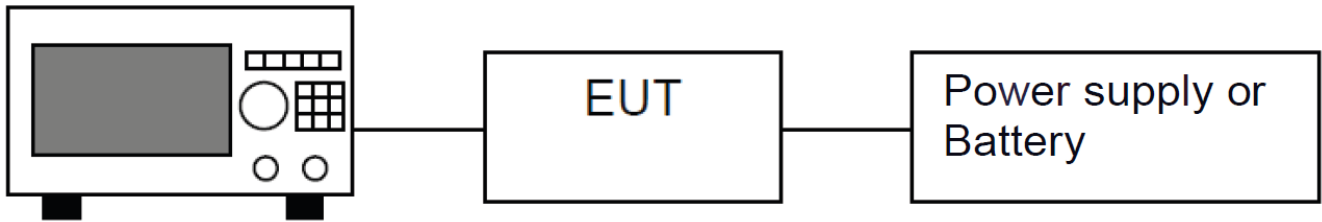


Spectrum Analyzer

Block diagram of Test setup

Occupied Bandwidth Results: (2.4GHz Antenna 1)

Frequency (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	2032
Middle Channel: 2440	2064
High Channel: 2480	2064

The worst case is shown as below:

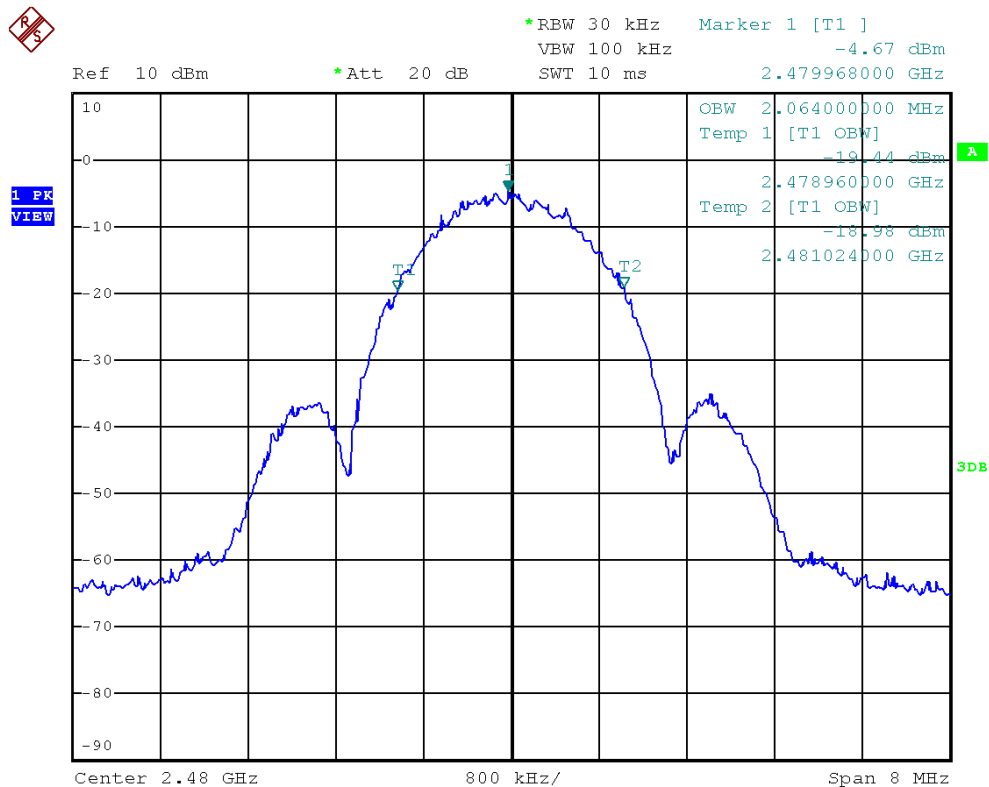


TEST REPORT

Occupied Bandwidth Results: (2.4GHz Antenna 2)

Frequency (MHz)	Occupied Bandwidth (kHz)
Low Channel: 2402	2080
Middle Channel: 2440	2048
High Channel: 2480	2064

The worst case is shown as below:

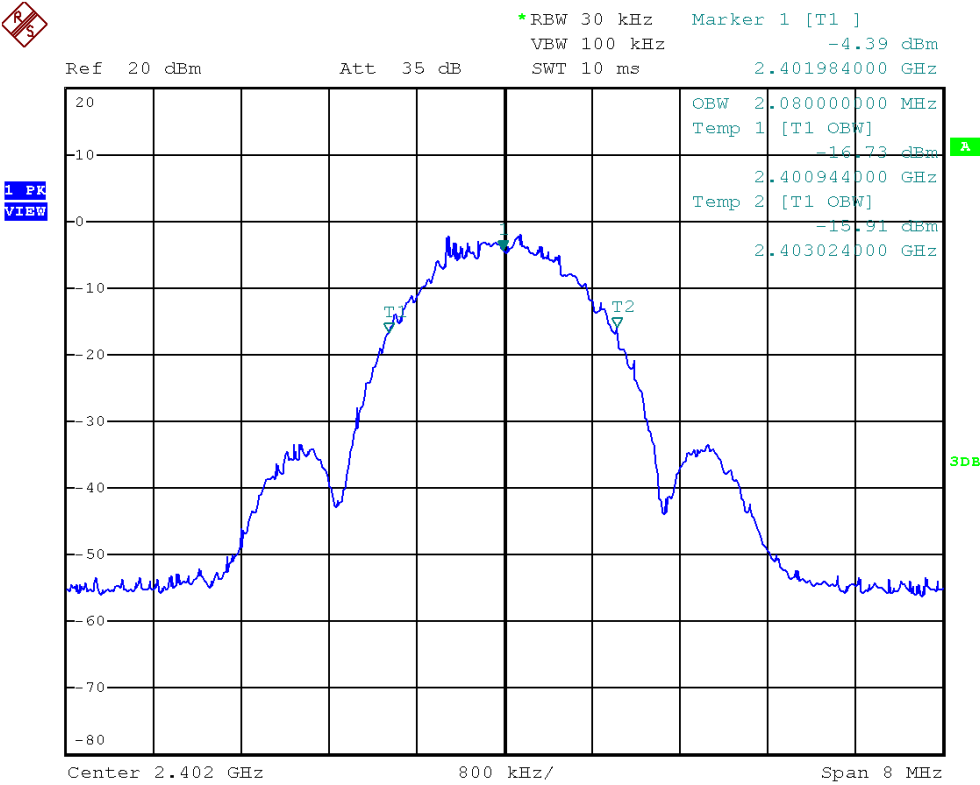

TEST REPORT

9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: Request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	January 31, 2024	July 30, 2024	July 30, 2024
Calibration Due Date	January 31, 2025	July 30, 2026	January 30, 2026

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	RF Preamplifier (9kHz to 6000MHz)
Registration No.	EW-0194	EW-3326	EW-3006b
Manufacturer	EMCO	EMCO	SCHWARZBECK
Model No.	3115	6502	BBV9718
Calibration Date	May 10, 2023	January 05, 2024	October 20, 2023
Calibration Due Date	February 10, 2025	July 05, 2025	January 20, 2025

Equipment	2.4GHz Notch Filter	14m Double Shield RF Cable (20MHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3435	EW-2505	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N0324413	nm / br5d / sma 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	September 26, 2023	October 05, 2023	January 16, 2024
Calibration Due Date	March 26, 2025	January 05, 2025	January 16, 2025

Equipment	12 metre RF Cable (1-40)GHz	RF Cable 240cm (RG142) - (9kHz to 30MHz)	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-2454	EW-0905
Manufacturer	GREATBILLION	RADIALL	EMCO
Model No.	SMA m-m ra 12m 40G outdoor	bnc m st / 142 /bnc m ra 240cm	3160-09
Calibration Date	January 16, 2024	June 20, 2024	December 15, 2023
Calibration Due Date	January 16, 2025	June 20, 2025	June 15, 2025

TEST REPORT

2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) - (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-2454	EW-3360	EW-3095
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	bnc m st / 142 /bnc m ra 240cm	ENV-216	ESCI
Calibration Date	June 20, 2024	April 07, 2024	January 18, 2024
Calibration Due Date	June 20, 2025	April 07, 2025	January 18, 2025

3) Bandedge & OBW Measurement

Equipment	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-3095
Manufacturer	ROHDESCHWARZ
Model No.	ESCI
Calibration Date	January 18, 2024
Calibration Due Date	January 18, 2025

4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

END OF TEST REPORT