


Installation & Operation Instructions

Specifications :

Receiver	
Material	Plastic (ASA)
Power Supply	12 VDC
Current	20 A
Size L x W x H	62 x 67 x 32 mm
Weight	100 g
Frequency	2.4 GHz


Transmitter	
Material	Plastic (ASA)
Battery	CR2032
Size OD x H	ø 56.8 x 23 mm
Weight	35 g
Frequency	2.4 GHz

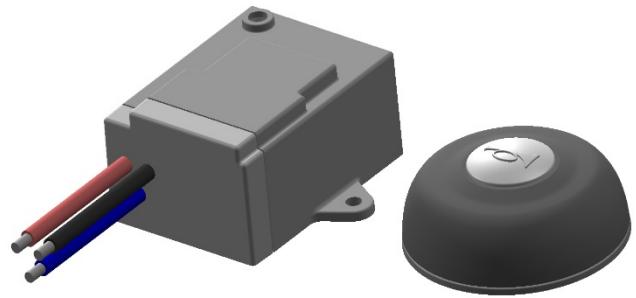

Installation :

Receiver Installation

1. The receiver should be installed on flat surface at a dry location.
2. Secure receiver with two (2) M4 round head screws.

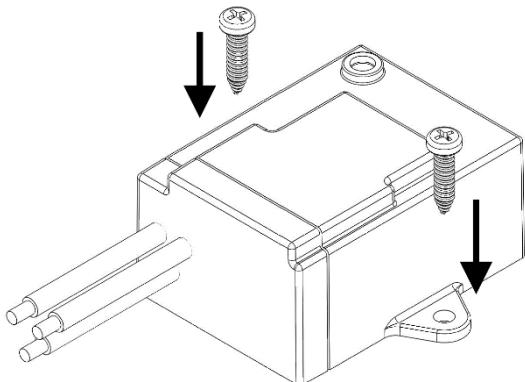


Transmitter Installation

A. Screw-Mounting way

1. Turn the transmitter cover counterclockwise, and place the base on steering wheel hub.
2. Make sure two screw holes in right and middle of the hub, secure receiver with two (2) M4 self-tapping screws.
3. Put the cover back and turn clockwise to lock/fix well.


B. Adhesive-attaching way

Make sure the transmitter base and steering wheel hub are clear and put the 3M double-side adhesive for attaching.

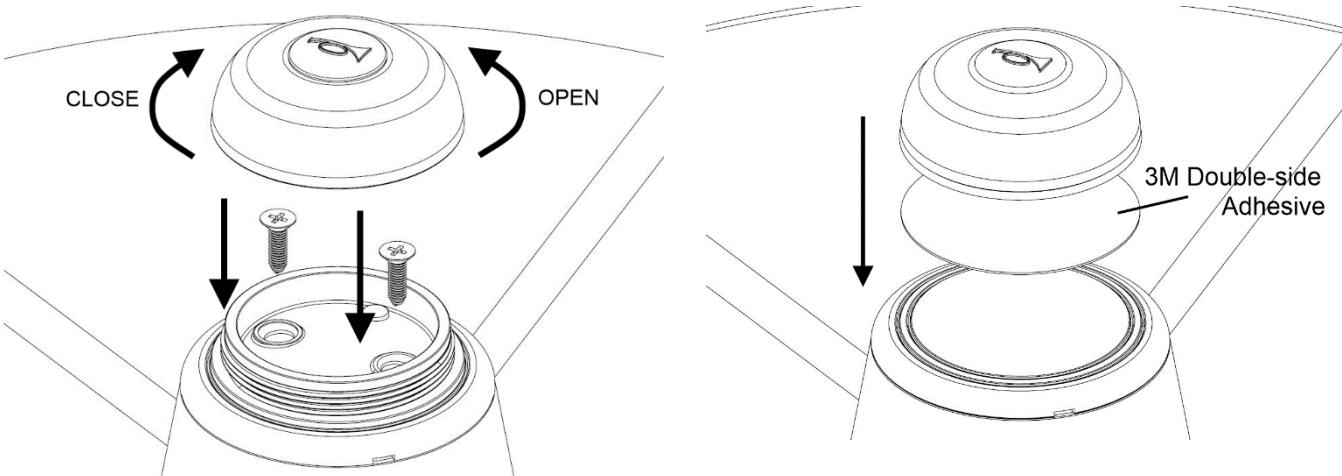


Electrical Wiring :

Provide DC 12 Volt input power for the receiver and 12AWG wire for connection, the effective wireless receiving range is around 15 ft. following is the wiring diagram.

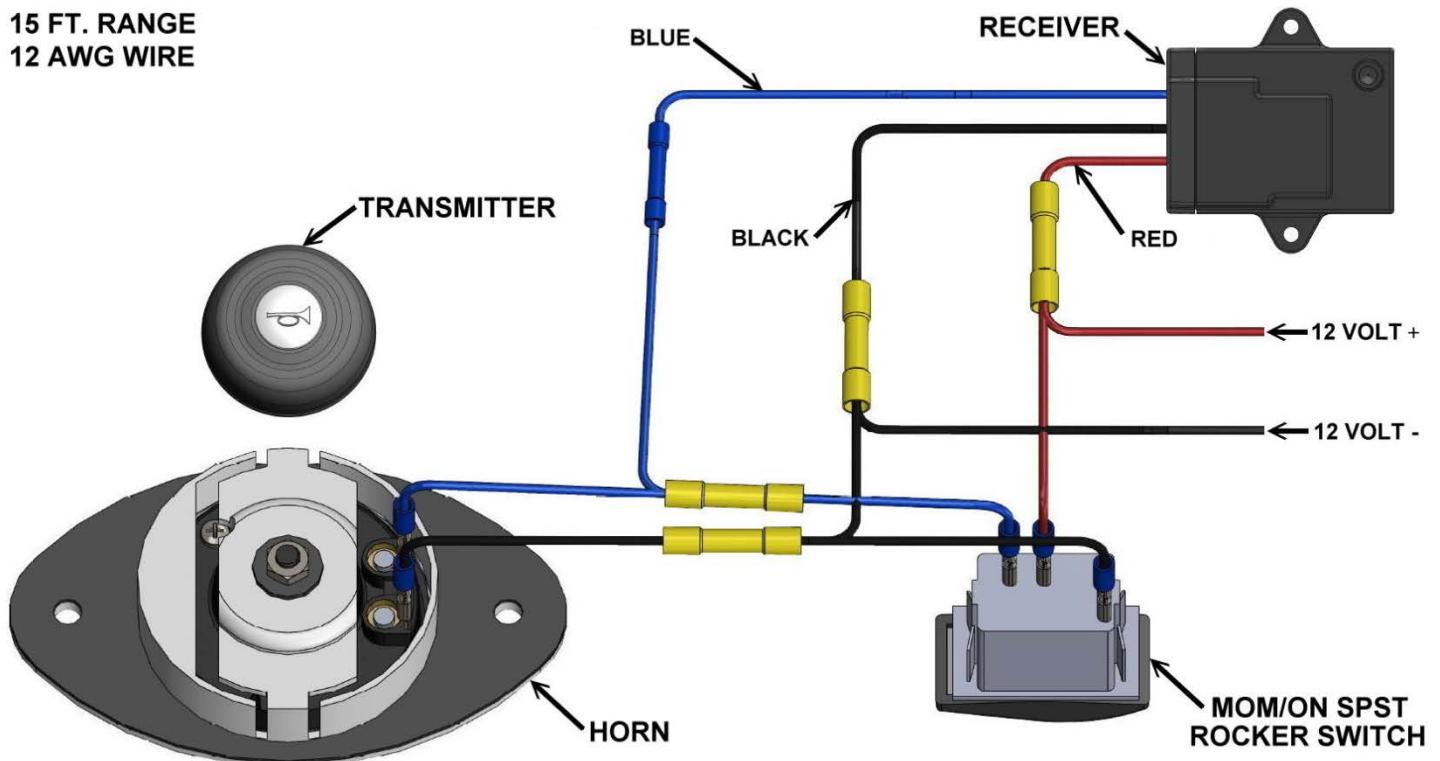

Battery switching :

1. Turn the transmitter cover counterclockwise and replace the battery with new CR2032 battery.
2. Put the cover back and turn clockwise to lock/fix well.

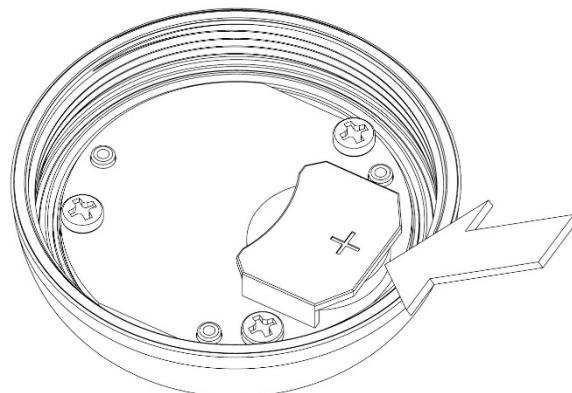

FCC Compliance Information

FCC 15.21

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC 15.105

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.