



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: Jan 31, 2020 ~ Oct 14, 2021
Test Report S/N: LR500112110A
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AVQGQTG60L-WIZ-AC

APPLICANT

Qlight Co., Ltd.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	Wireless Signal Towerlamp
Manufacturer	:	Qlight Co., Ltd.
Model name	:	QTG60MLF-WIZ-BZ-110/220
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C63.10 - 2013
Frequency Range	:	2405 ~ 2480 MHz
Max. Output Power	:	Max 4.95 dBm - Conducted
Data of issue	:	October 14, 2021

This test report is issued under the authority of:

Ja-Beom Koo, Manager

The test was supervised by:

Jae-Hum Yeon, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	6
3.1 SUMMARY OF TESTS	-----	6
3.2 TECHNICAL CHARACTERISTICS TEST	-----	7
3.2.1 6 dB BANDWIDTH	-----	7
3.2.2 PEAK OUTPUT POWER	-----	11
3.2.3 POWER SPECTRAL DENSITY	-----	14
3.2.4 BAND EDGE	-----	17
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	19
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	22
3.2.7 AC CONDUCTED EMISSION	-----	42
 APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	49

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2023-09-28	ECT accredited Lab.
	KOREA		-	
RRA	U.S.A	KR0049	2023-04-08	RRA accredited Lab.
	CANADA		2022-10-18	
		C-14948	2023-09-10	
VCCI	JAPAN	T-12416	2023-09-10	VCCI registration
		R-14483	2023-10-15	
		G-10847	2021-12-13	
KOLAS	KOREA	KT551	Updating	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : Qlight Co., Ltd.
 Address : 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnam-do,
 Republic of Korea
 Tel / Fax : +82 55-344-4069 / +82 55-344-4222

2-2 Equipment Under Test (EUT)

Model name : QTG60MLF-WIZ-BZ-110/220
 Serial number : Identical prototype
 Date of receipt : Jan 31, 2020
 EUT condition : Pre-production, not damaged
 Antenna type : PCB Pattern Antenna (Max Gain : -5.27 dBi)
 Frequency Range : 2405 ~ 2480 MHz
 RF output power : Max 4.95 dBm – Conducted
 Type of Modulation : DSSS
 Power Source : AC 100 ~ 240 V

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz) - LoRa	2405	2440	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	CR720	MS-1736	MSI

2-5 Additional model

Model descriptions is as follows

QTGv60wxy-WIZ-z-110/220, QTGv60wxy-WIZ-BZ-z-110/220, QTCv60wxy-WIZ-z-110/220,
QTCv60wxy-WIZ-BZ-z-110/220, QTGv70wxy-WIZ-z-110/220, QTGv70wxy-WIZ-BZ-z-110/220,
QTCv70wxy-WIZ-z-110/220, QTCv70wxy-WIZ-BZ-z-110/220, QTRv60wxy-WIZ-z-110/220,
QTRv60wxy-WIZ-BZ-z-110/220, QTRv70wxy-WIZ-z-110/220, QTRv70wxy-WIZ-BZ-z-110/220

v : Cover and lens type(A : Integrated, none : Basic) : A or none

w : Mount type(M : Direct, none : Pole) : M or none

xy : Lighting type(L : Steady, LF : Steady/Flashing) : L or LF

z : Number of LED Module : 1~5

60 and 70 is the difference in enclosure size.

BZ is the difference between the presence or absence of a buzzer.

QTC and QTG are the same, QTR is a different LED board.

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	Conducted	C
15.247(b)	Transmitter Peak Output Power		C
15.247(e)	Transmitter Power Spectral Density		C
15.247(d)	Band Edge & Conducted Spurious emission		C
15.209	Transmitter emission	Radiated	C
15.207	AC Conducted Emissions	Conducted	C
15.203	Antenna requirement	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

The tests were performed according to the method of measurements prescribed in KDB No.558074.

→ Antenna Requirement

Waywearable, Inc. FCC ID: 2AVQGQTG60L-WIZ-AC unit complies with the requirement of §15.203. The antenna type is PCB Antenna

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 3 X RBW

VBW = 3 X RBW

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2405	1.889	Complies
2440	1.975	Complies
2480	1.954	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

 6 dB Bandwidth $\geq$ 500 kHz




Measurement Setup

Figure 1: Measurement setup for the carrier frequency separation


Low Channel



Middle Channel

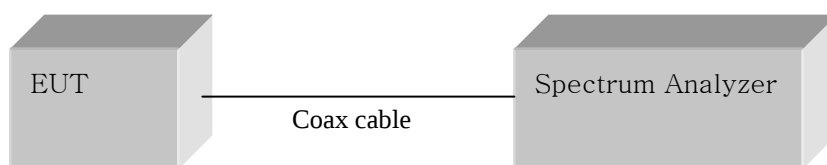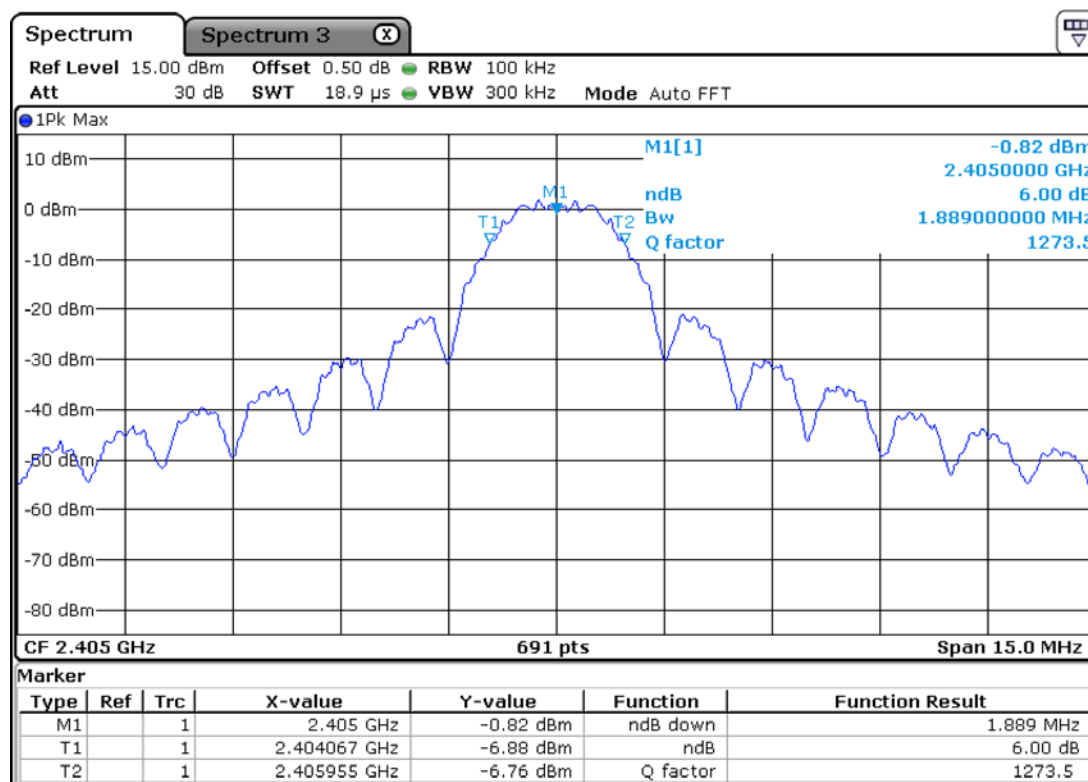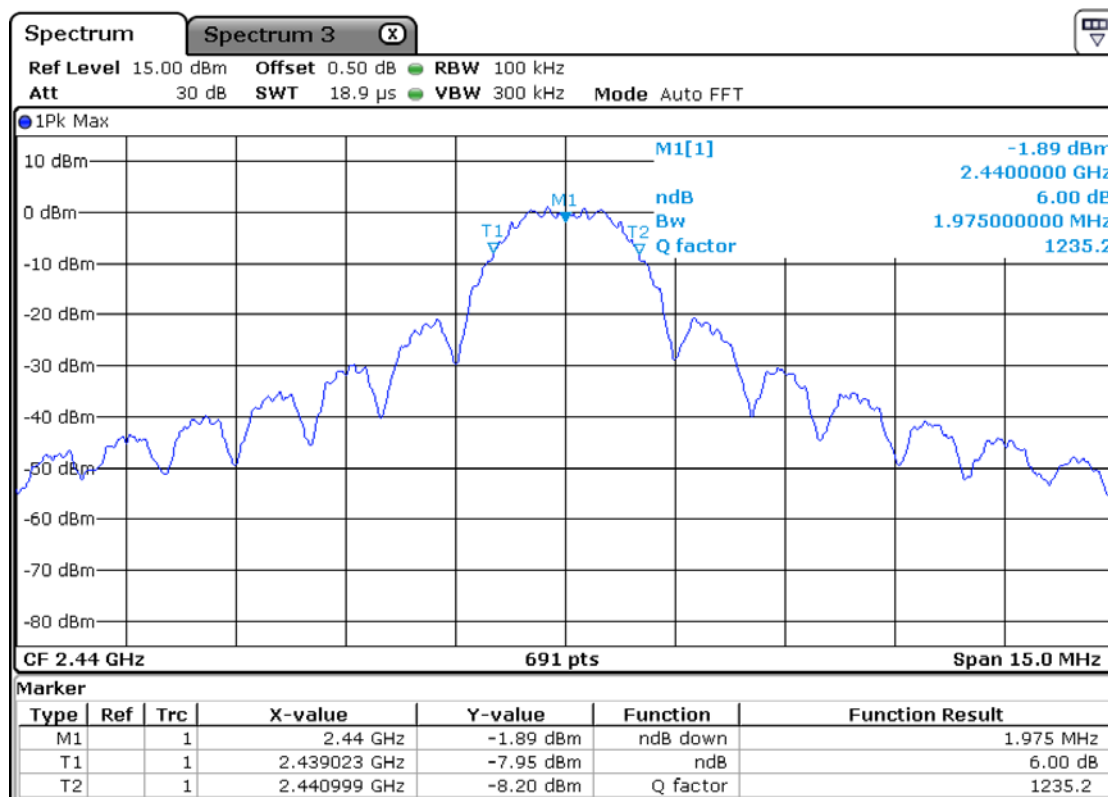

High Channel

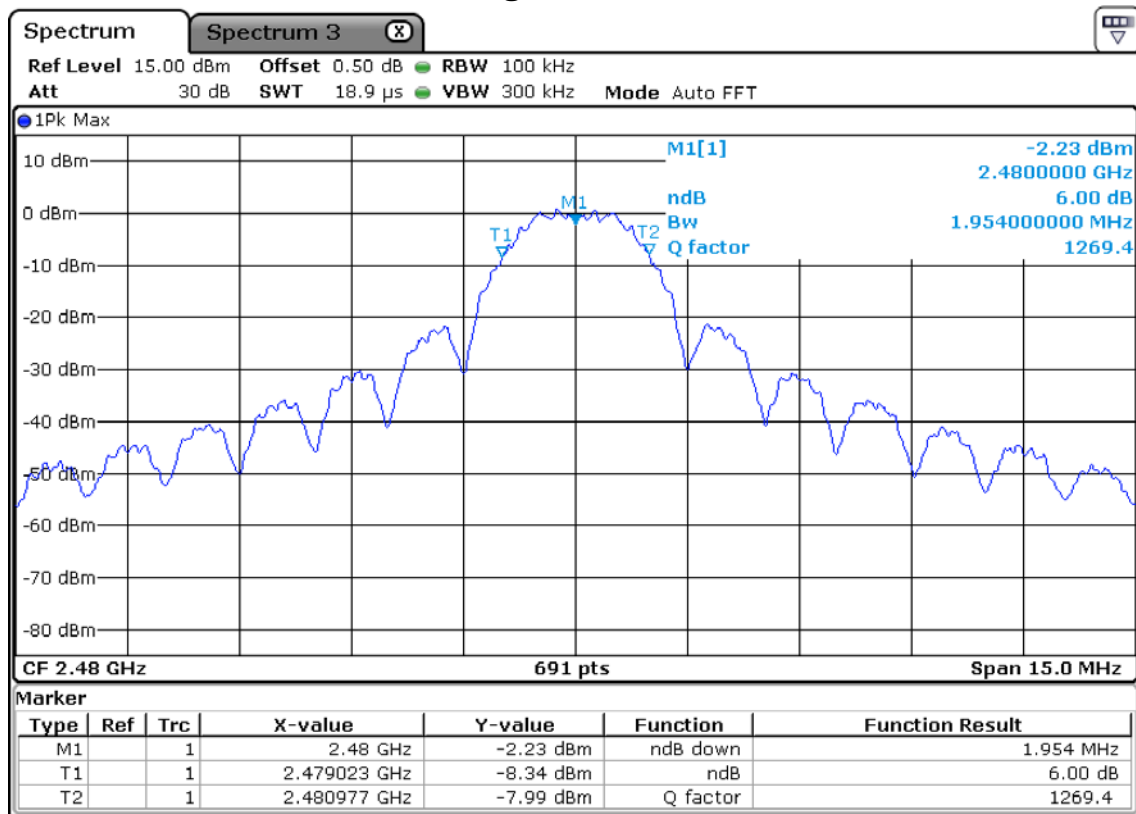

3.2.2 Peak Output Power Measurement

Procedure:

The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth :

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW $\geq$ DTS Bandwidth

Span $\geq 3 \times$ RBW

VBW = $3 \times$ RBW

Sweep = auto

Detector function = peak

Measurement Data : Complies

LoRa Mode

Frequency (MHz)	Test Results	
	Measured data (dBm)	Result
2405	4.95	Complies
2440	4.50	Complies
2480	4.22	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	$\leq 1 \text{ W}(30 \text{ dBm})$
-------------------	------------------------------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

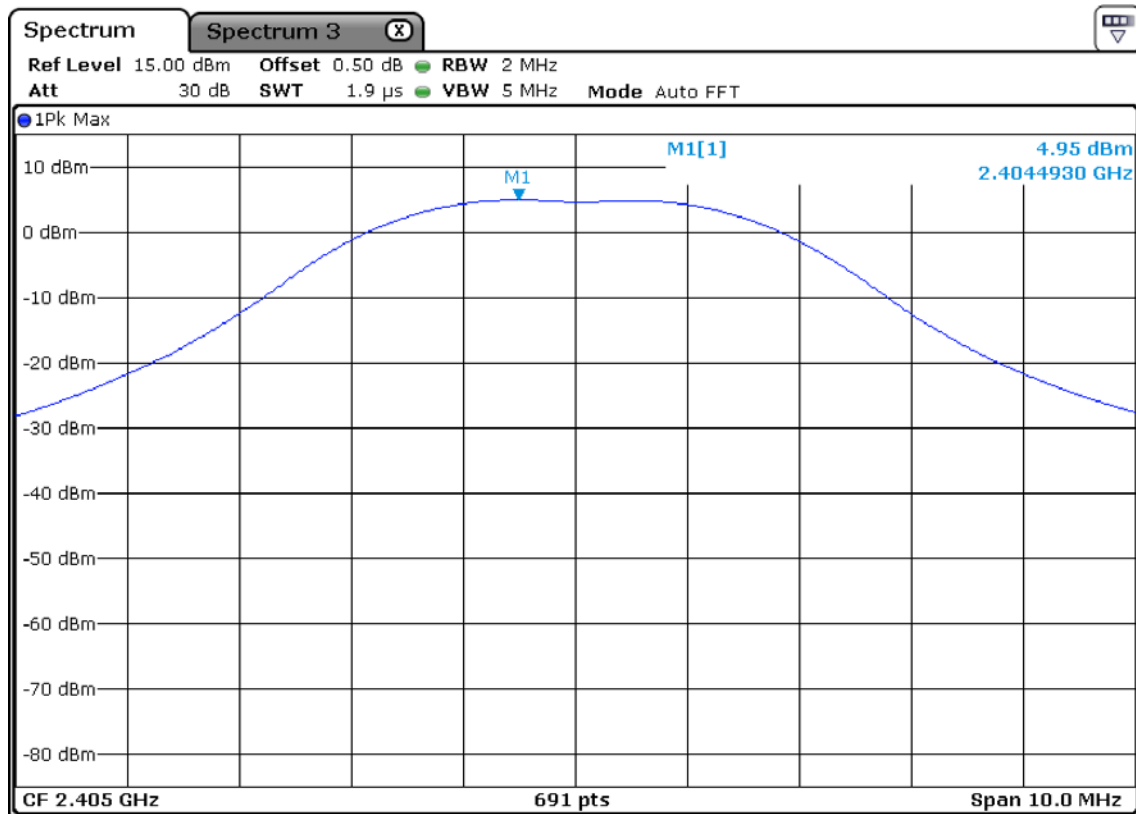

Middle Channel

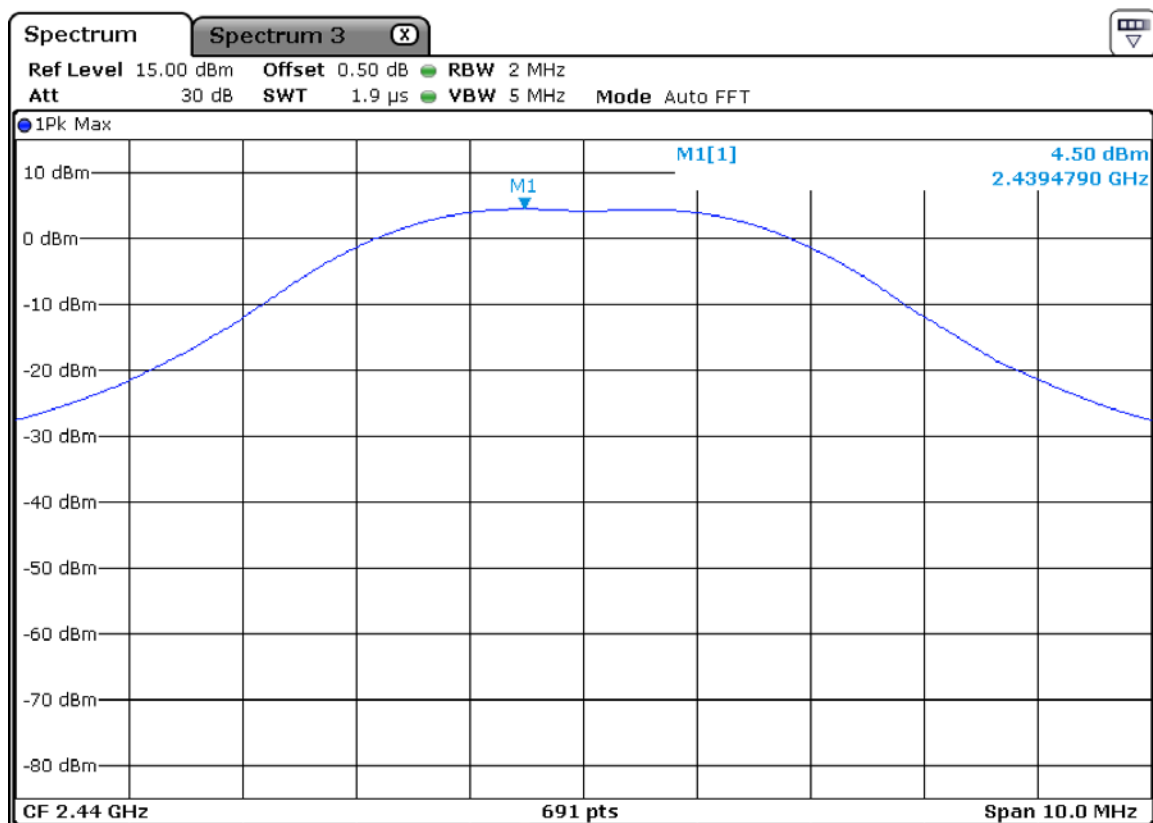

High Channel

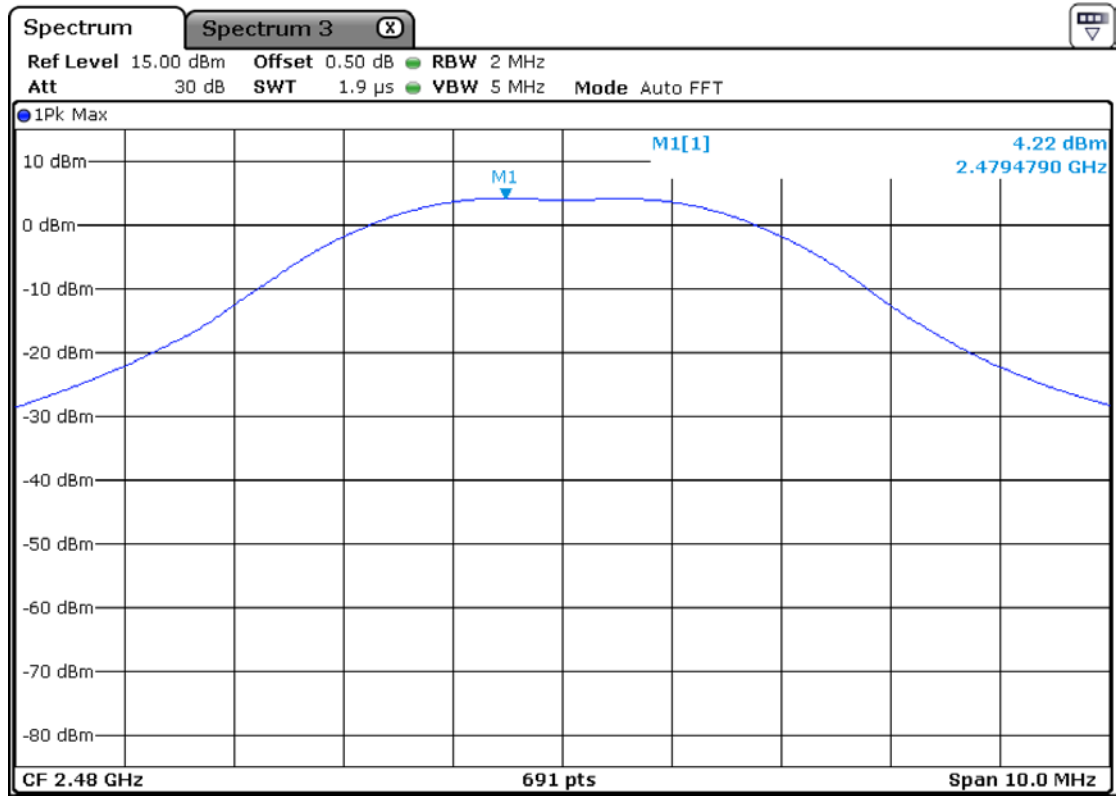

3.2.3 Power Spectral Density

Procedure:

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The spectrum analyzer is set to:

RBW = 3 kHz ($3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$)

Span ≥ 1.5 times the DTS bandwidth

VBW = 3 X RBW

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data : Complies

BLE Mode

Frequency (MHz)	Test Results	
	dBm / 3 kHz BW	Result
2405	-7.33	Complies
2440	-8.41	Complies
2480	-8.44	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	$\leq 8 \text{ dBm @ } 3 \text{ kHz BW}$
------------------------	--

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

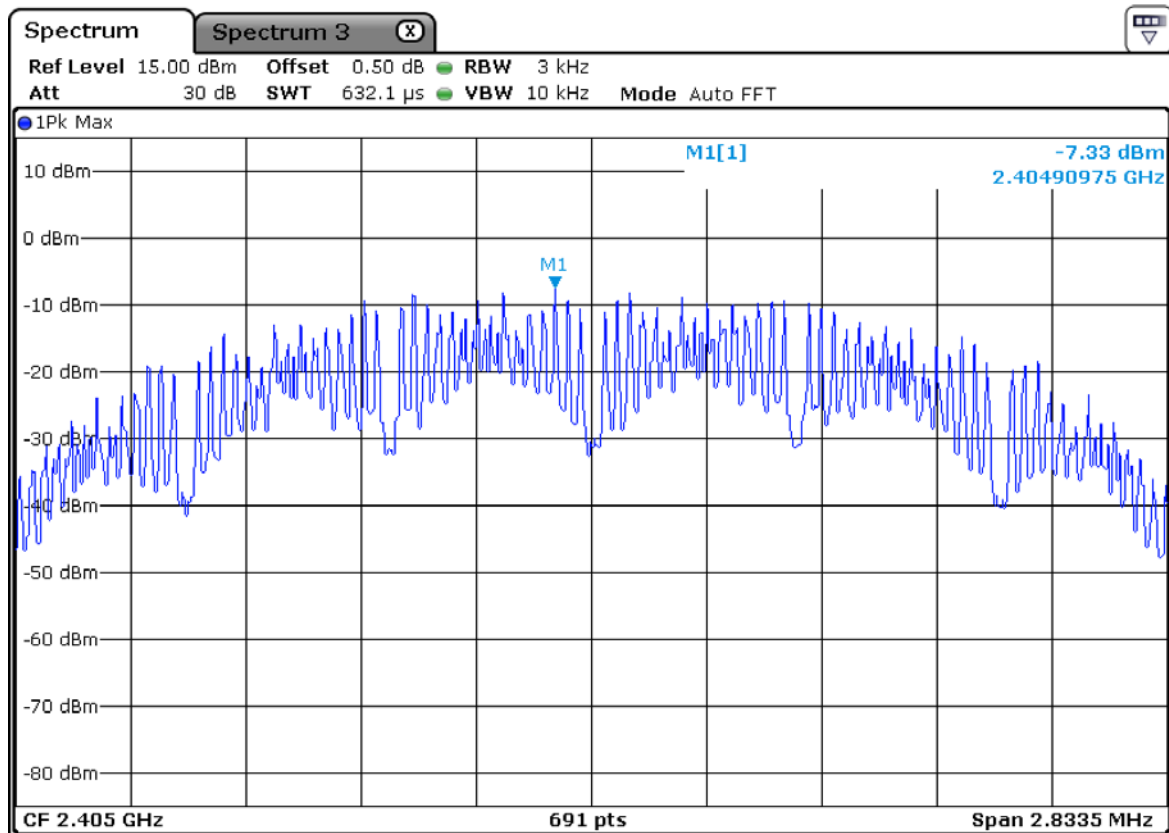

Middle Channel

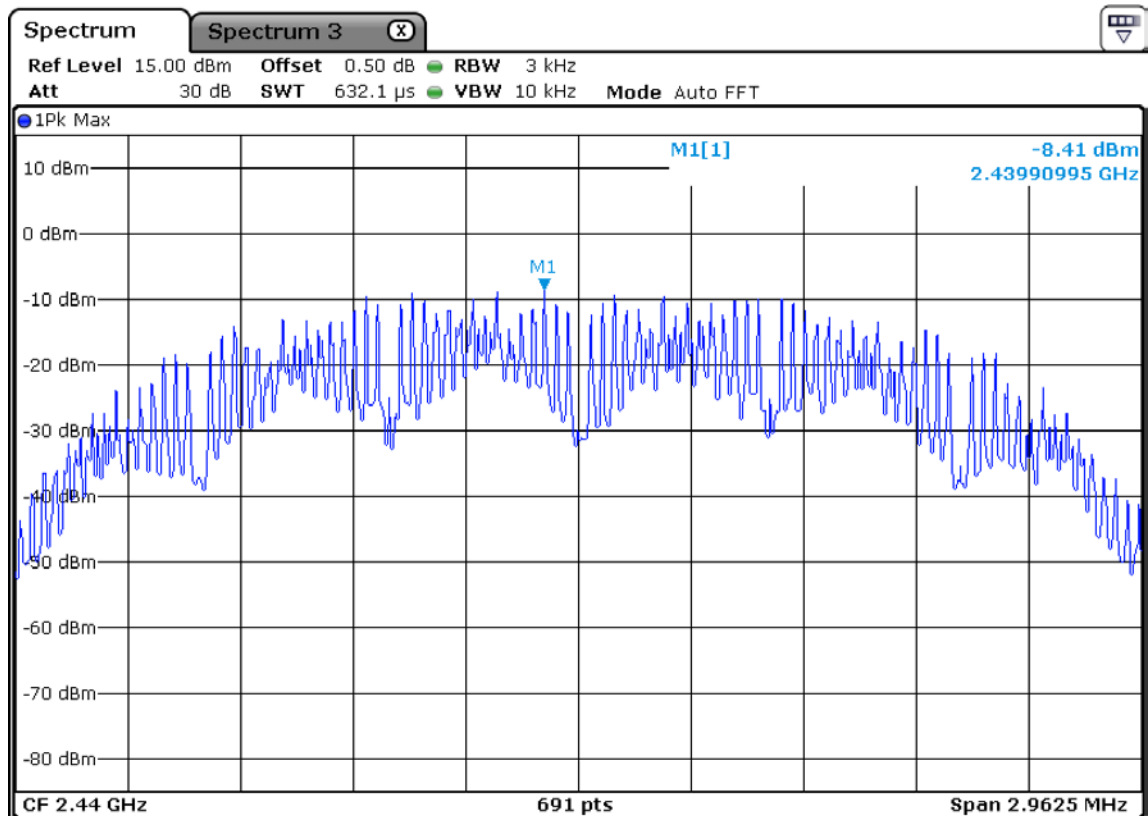

High Channel

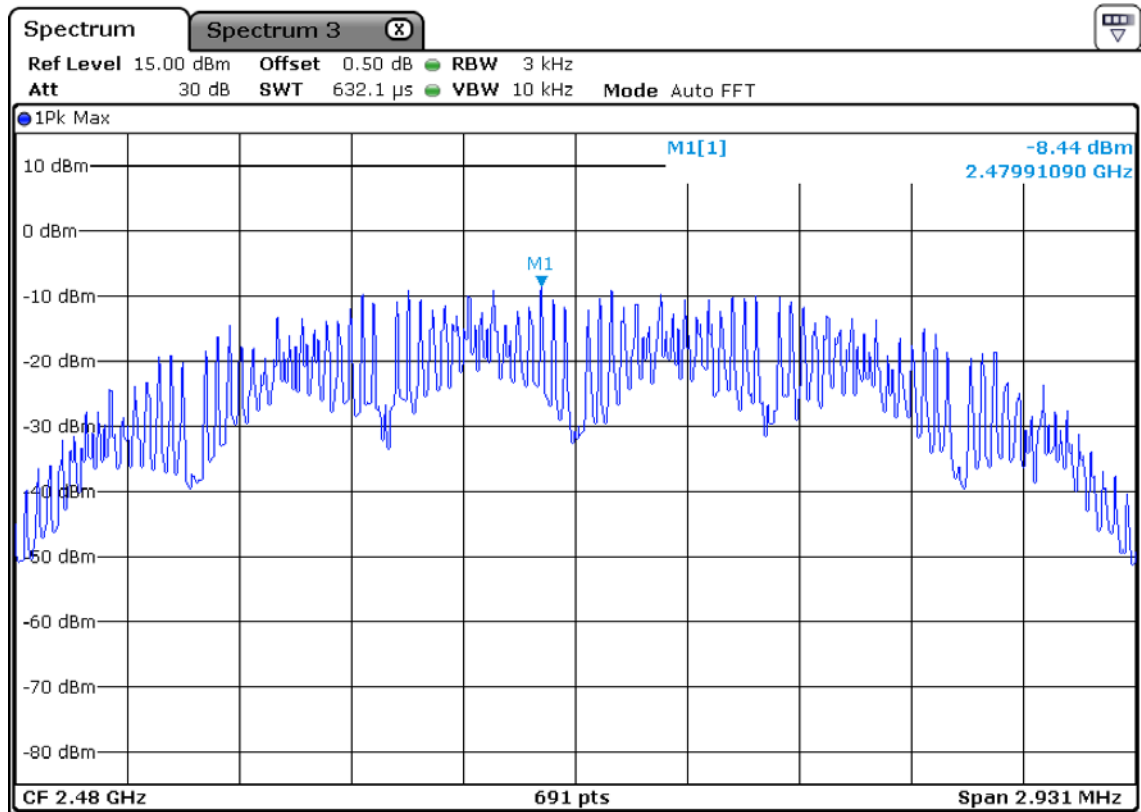

3.2.4 Band Edge

Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB..

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector function = peak

Trace = max hold


Sweep = auto

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	≤ 20 dBc
--------------------------	---------------

Lower edge

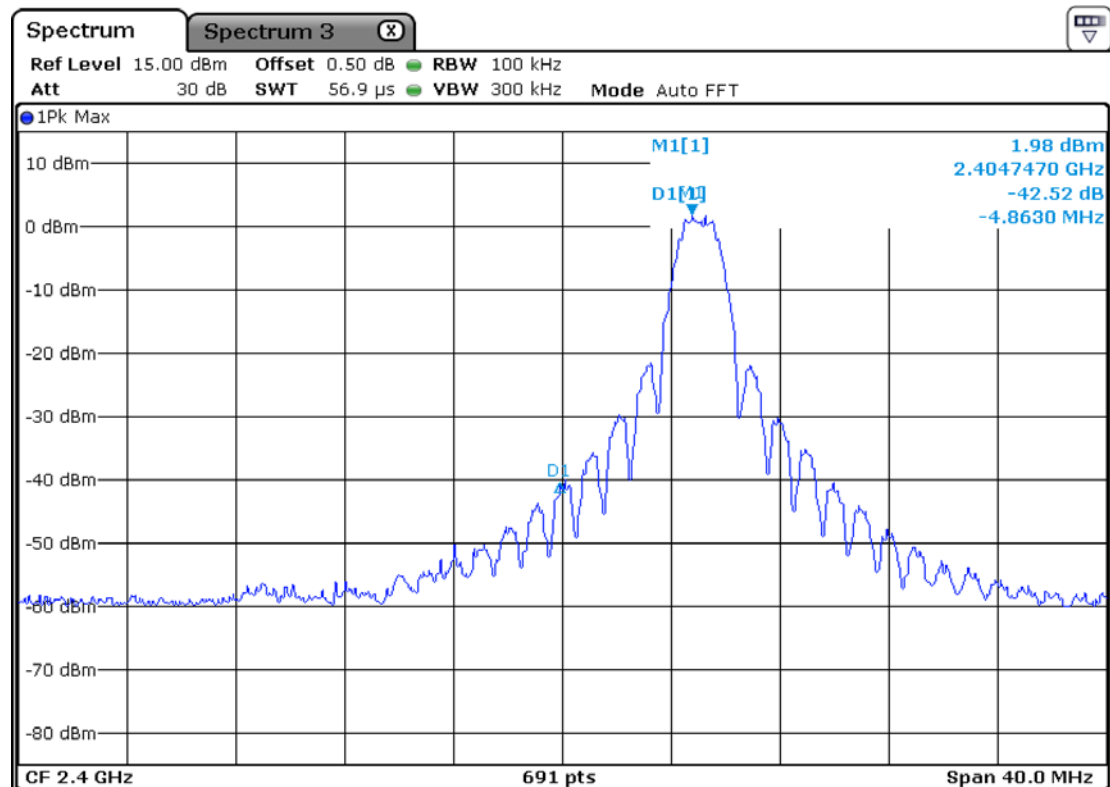

Upper edge

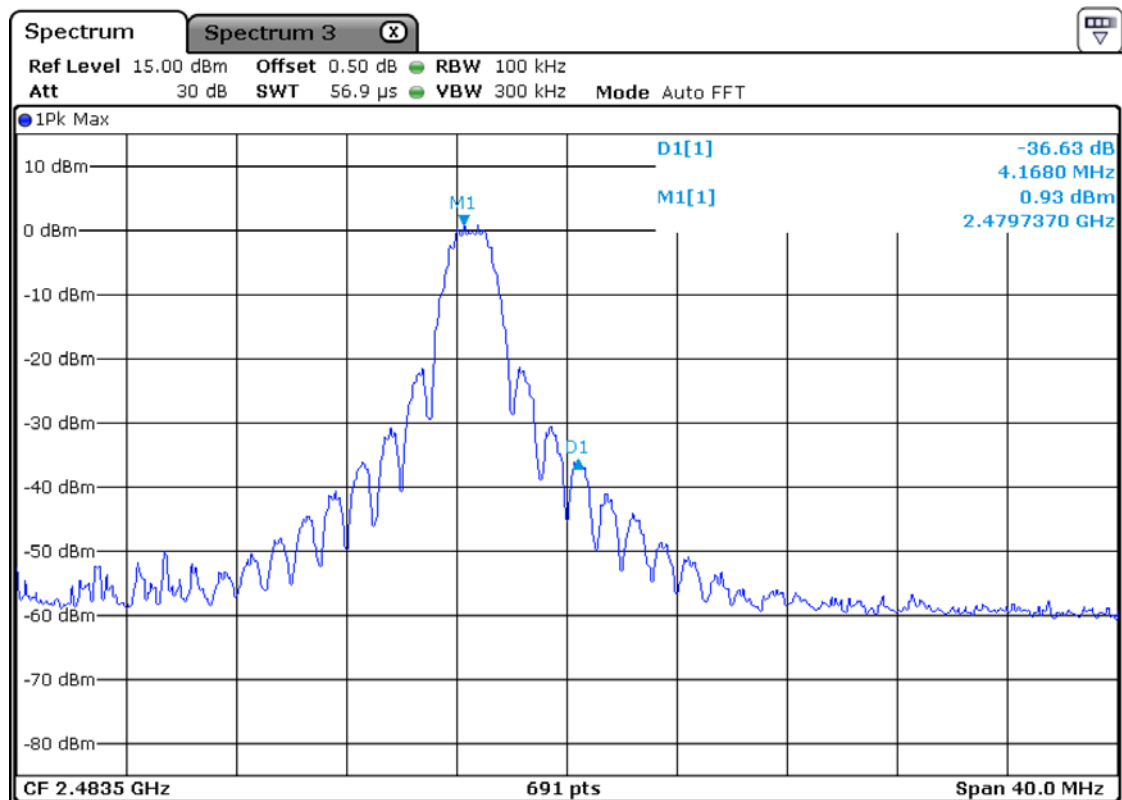

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	≥ 20 dBc
--------------------------	---------------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Unwanted Emission – Low Channel
Frequency Range = 30 MHz ~ 15 GHz

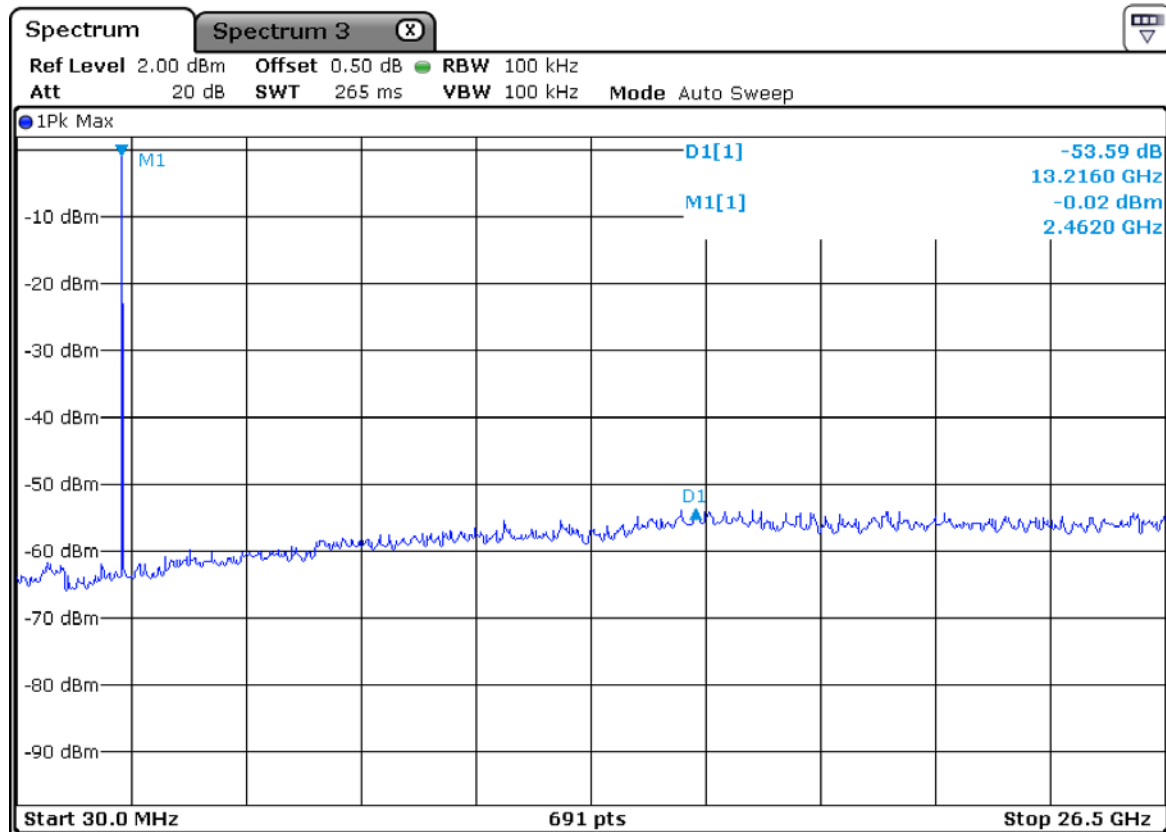

Unwanted Emission – Middle Channel
Frequency Range = 30 MHz ~ 15 GHz

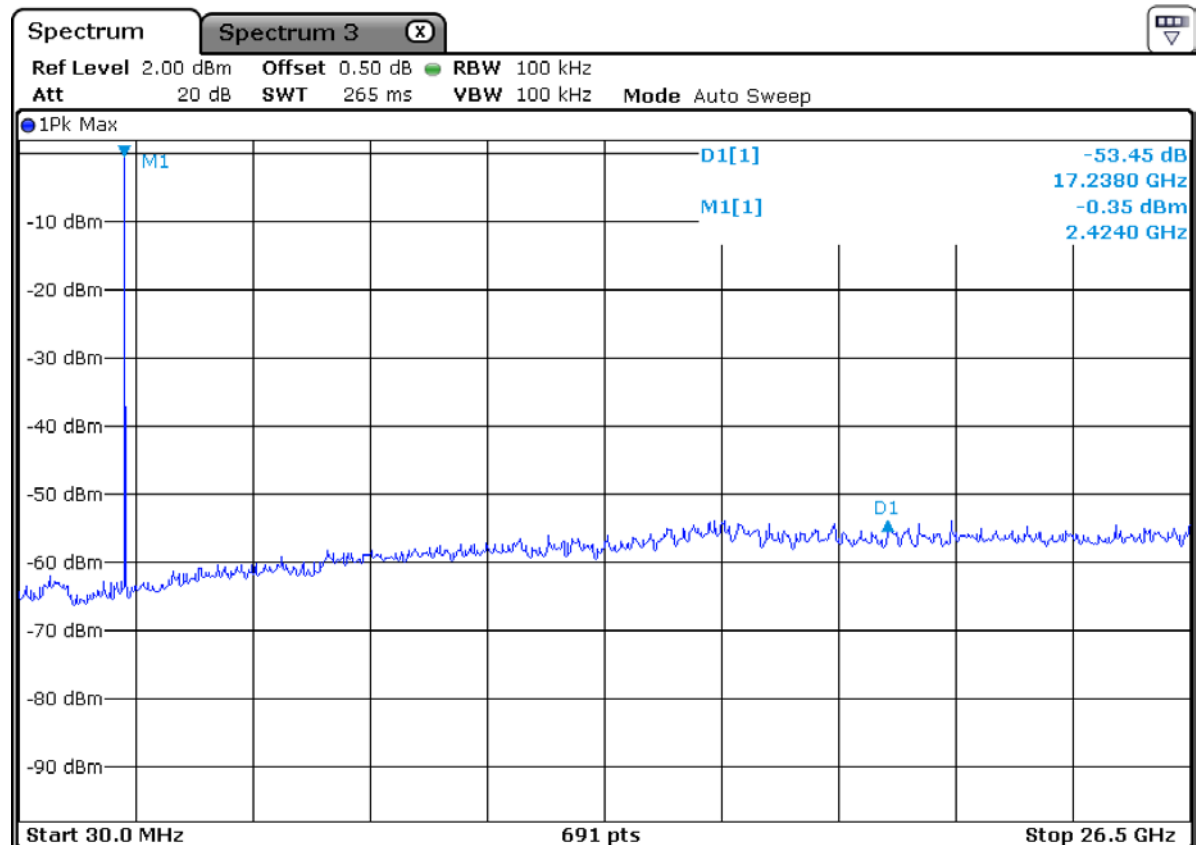

Unwanted Emission – High Channel
Frequency Range = 30 MHz ~ 15 GHz

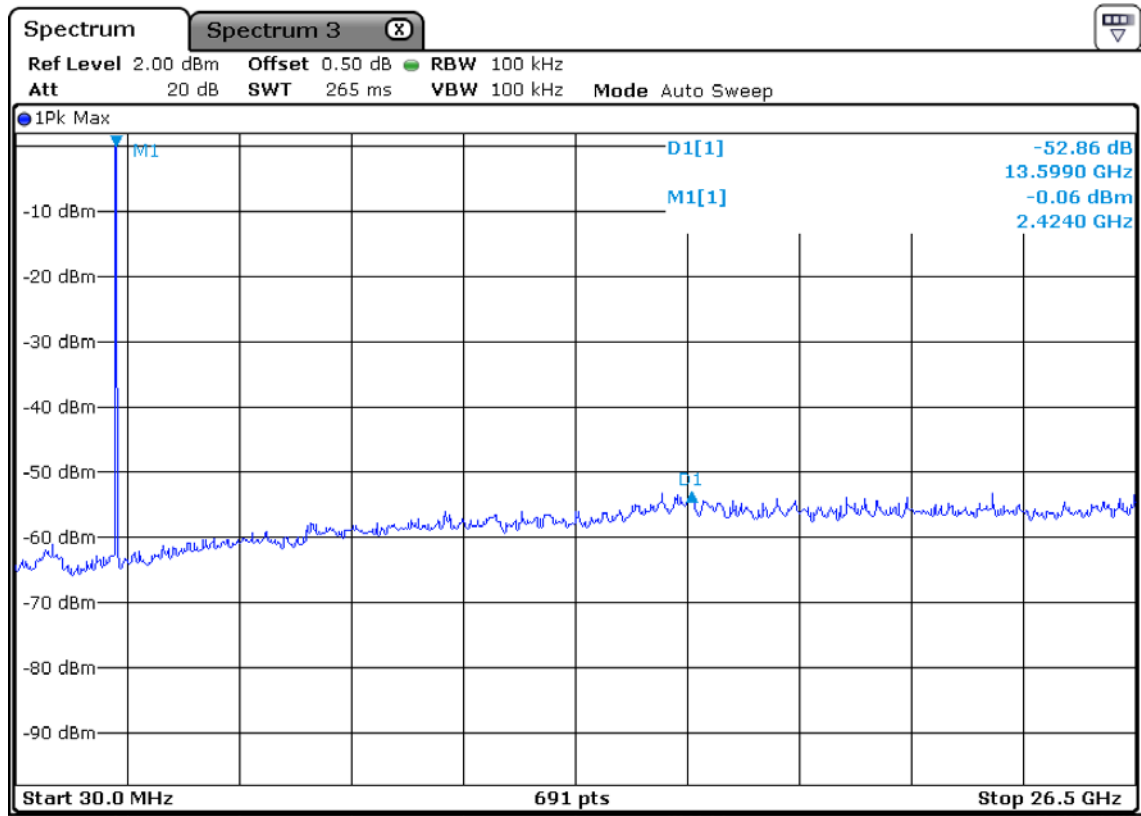

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 120 kHz (30 MHz ~ 1 GHz)

VBW $\geq$ RBW


= 1 MHz (1 GHz ~ 10th harmonic)

Trace = max hold


Detector function = peak

Sweep = auto


below 30 MHz

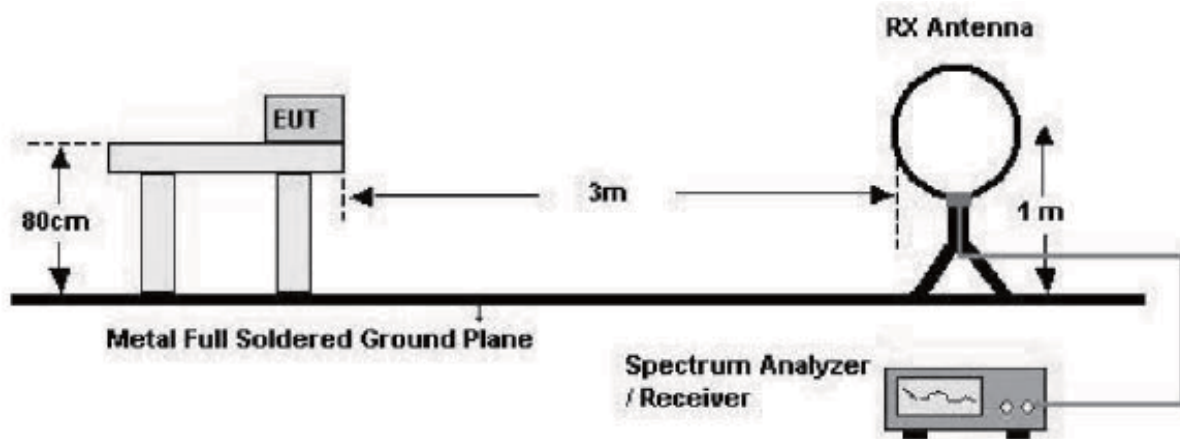

below 1 GHz (30 MHz to 1 GHz)

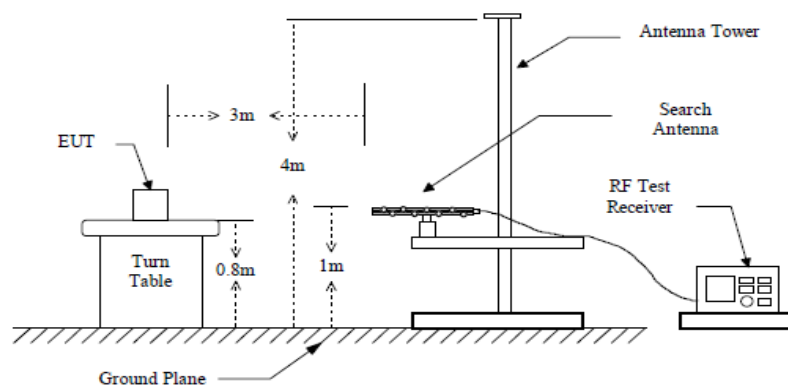

above 1 GHz

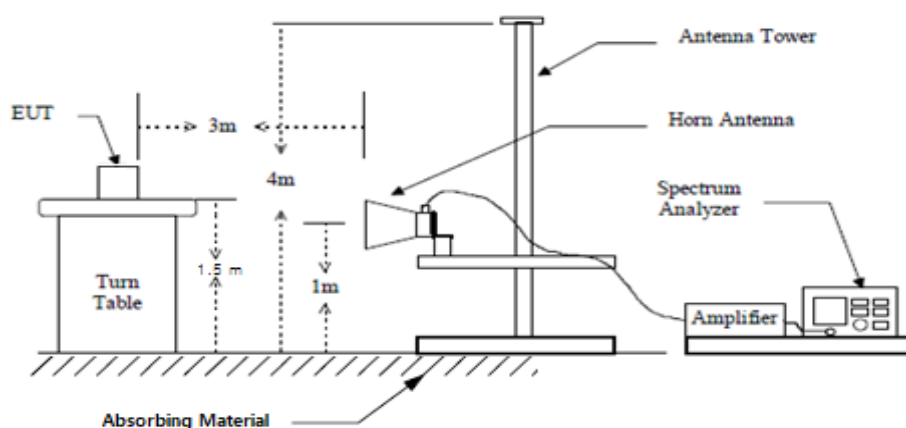

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Radiated Emissions (Below 1 GHz) – Operating mode

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YEON J H

Power :

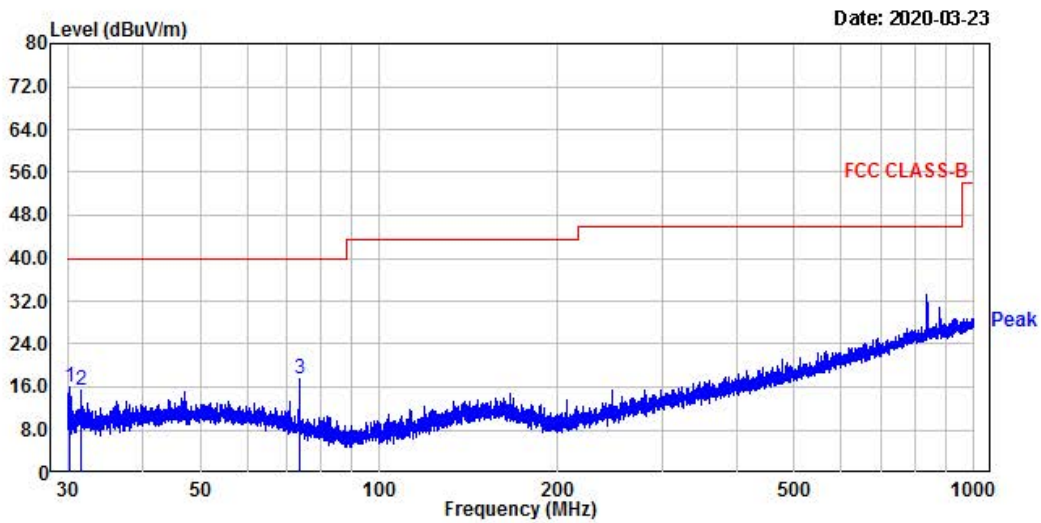

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	30.16	31.43	-15.30	16.13	40.00	23.87	100	289	vertical
2.	31.61	30.59	-15.11	15.48	40.00	24.52	100	267	vertical
3.	73.58	33.60	-16.17	17.43	40.00	22.57	100	211	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YEON J H

Power :

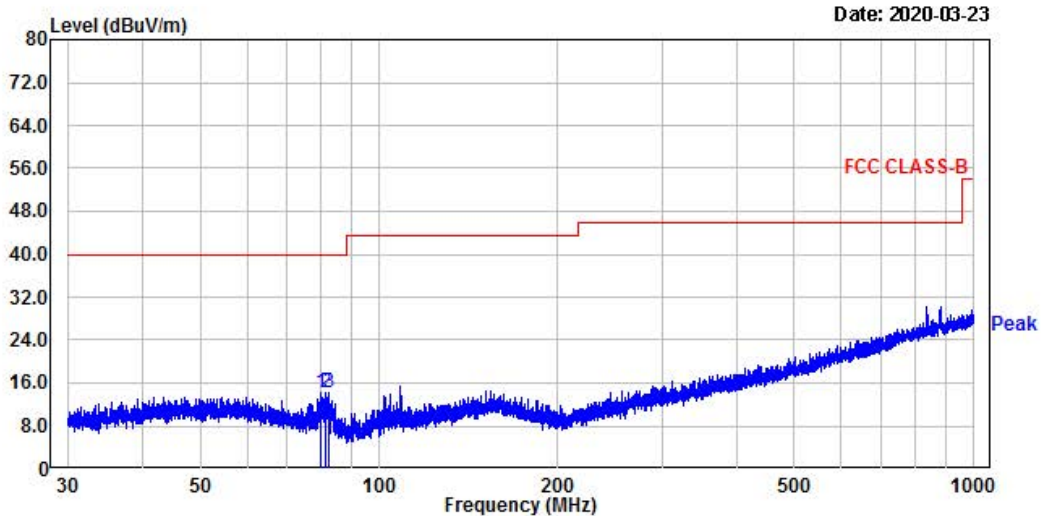

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	79.66	31.78	-17.58	14.20	40.00	25.80	400	281	horizontal
2.	81.46	32.01	-17.82	14.19	40.00	25.81	100	358	horizontal
3.	82.18	32.12	-17.89	14.23	40.00	25.77	100	58	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YEON J H

Power :

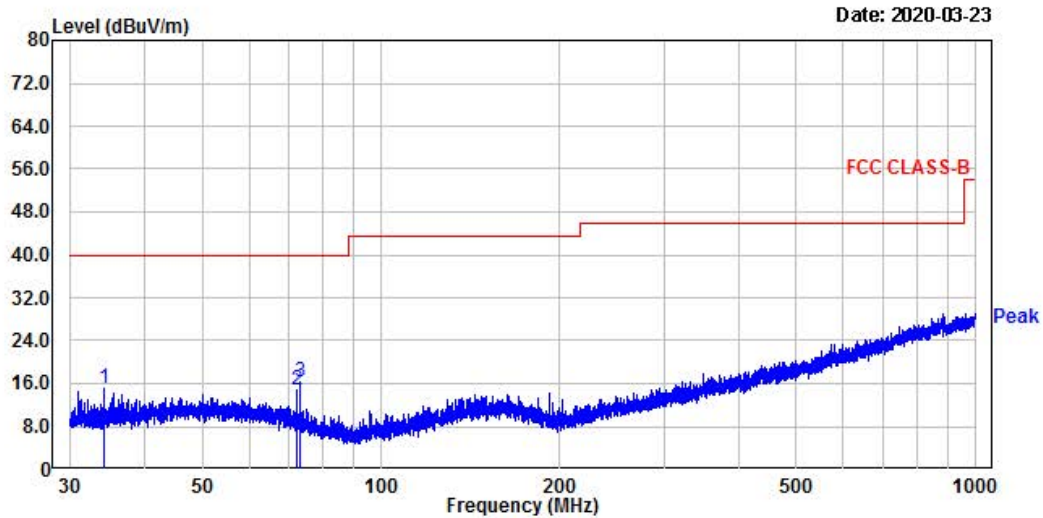

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	34.26	29.79	-14.76	15.03	40.00	24.97	100	0	vertical
2.	72.12	30.59	-15.84	14.75	40.00	25.25	100	268	vertical
3.	73.23	32.28	-16.09	16.19	40.00	23.81	100	326	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YEON J H

Power :

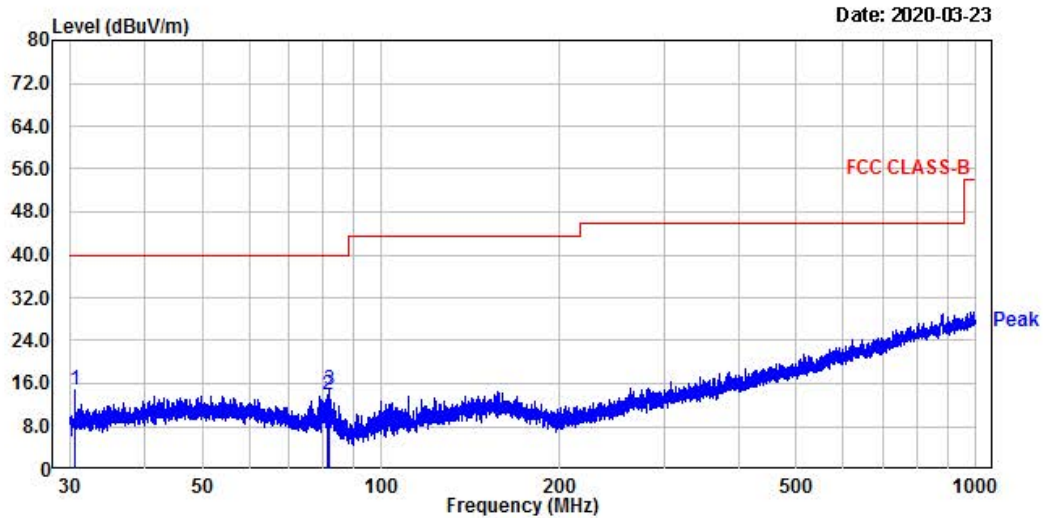

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	30.49	29.91	-15.25	14.66	40.00	25.34	400	137	horizontal
2.	81.28	31.79	-17.80	13.99	40.00	26.01	100	18	horizontal
3.	81.60	32.59	-17.84	14.75	40.00	25.25	100	40	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YEON J H

Power :

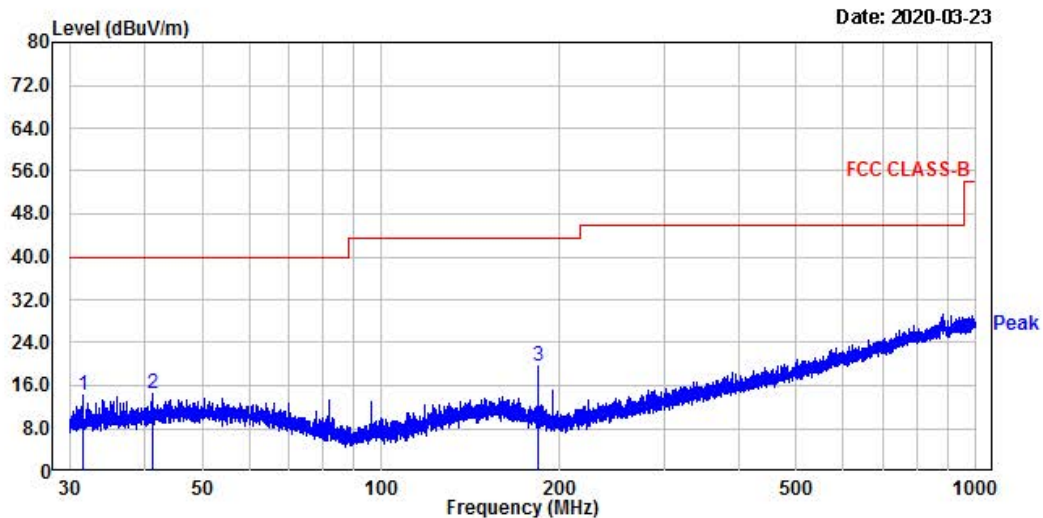

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	31.43	29.35	-15.14	14.21	40.00	25.79	100	0	vertical
2.	41.33	28.16	-13.66	14.50	40.00	25.50	156	0	vertical
3.	184.33	33.87	-14.15	19.72	43.50	23.78	100	306	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YEON J H

Power :

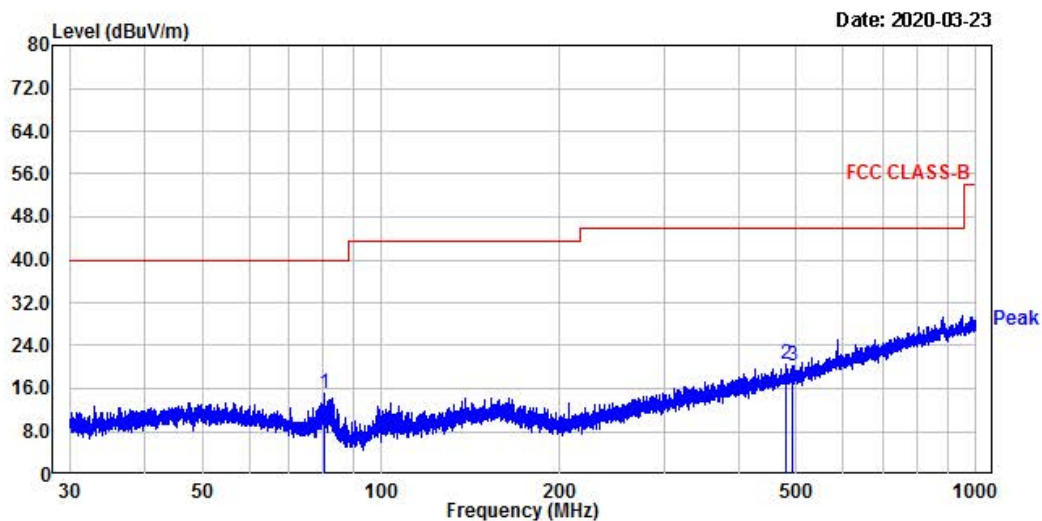

No.	Freq MHz	Reading dBuV	C.F dB	Result QP dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1.	80.43	32.85	-17.70	15.15	40.00	24.85	100	0	horizontal
2.	481.58	27.96	-7.31	20.65	46.00	25.35	100	102	horizontal
3.	491.18	27.27	-7.15	20.12	46.00	25.88	400	292	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Above 1 GHz) – LOW mode

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YUN J H

Power :

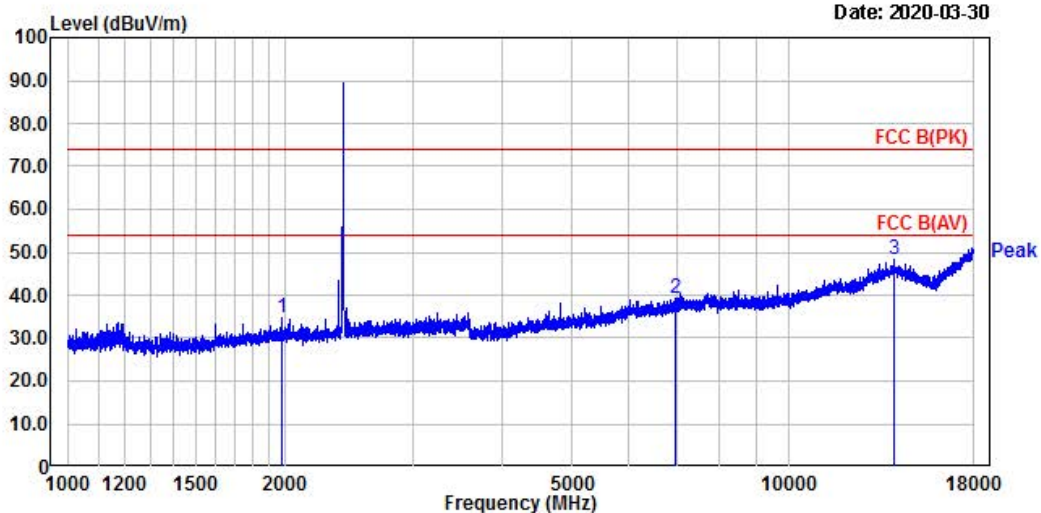

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1975.94	40.97	-6.36	34.61	74.00	39.39	100	278	vertical
2.	6942.30	32.30	7.02	39.32	74.00	34.68	100	360	vertical
3.	13987.82	32.94	15.39	48.33	74.00	25.67	100	198	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YUN J H

Power :

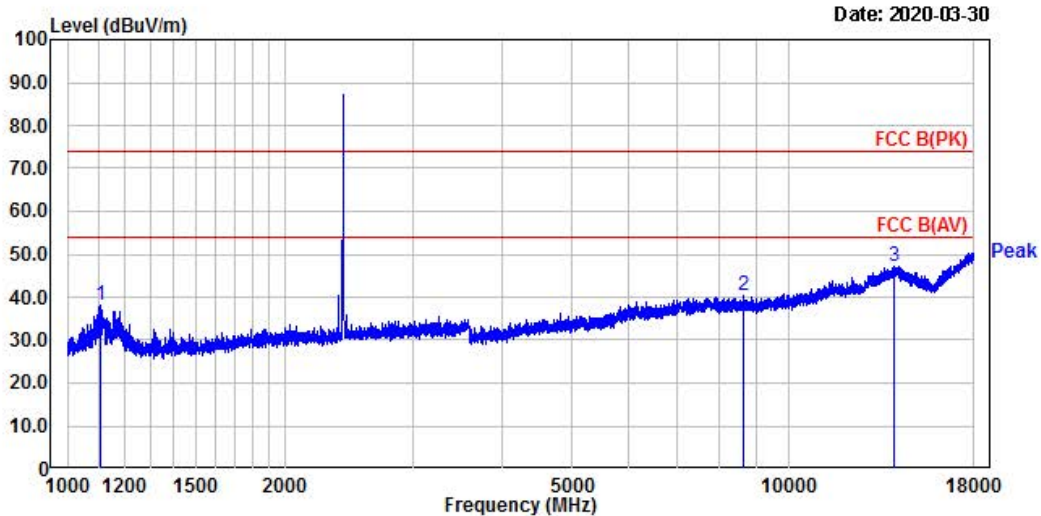

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1106.86	49.66	-11.43	38.23	74.00	35.77	100	160	horizontal
2.	8657.15	32.77	7.53	40.30	74.00	33.70	100	360	horizontal
3.	14013.11	31.71	15.39	47.10	74.00	26.90	100	324	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YUN J H

Power :

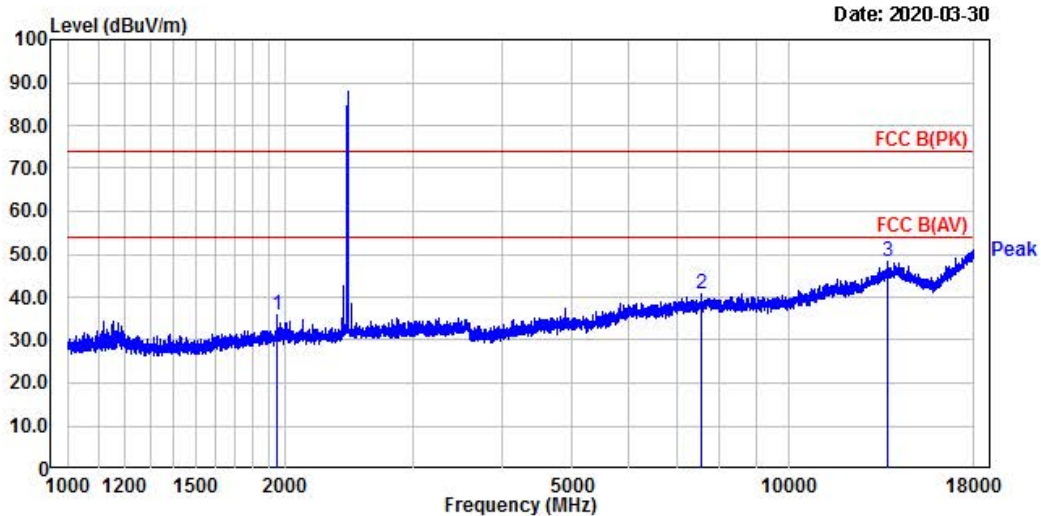

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1947.59	42.42	-6.57	35.85	74.00	38.15	100	290	vertical
2.	7541.11	33.35	7.45	40.80	74.00	33.20	100	196	vertical
	3.13722.52	33.69	14.70	48.39	74.00	25.61	100	196	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YUN J H

Power :

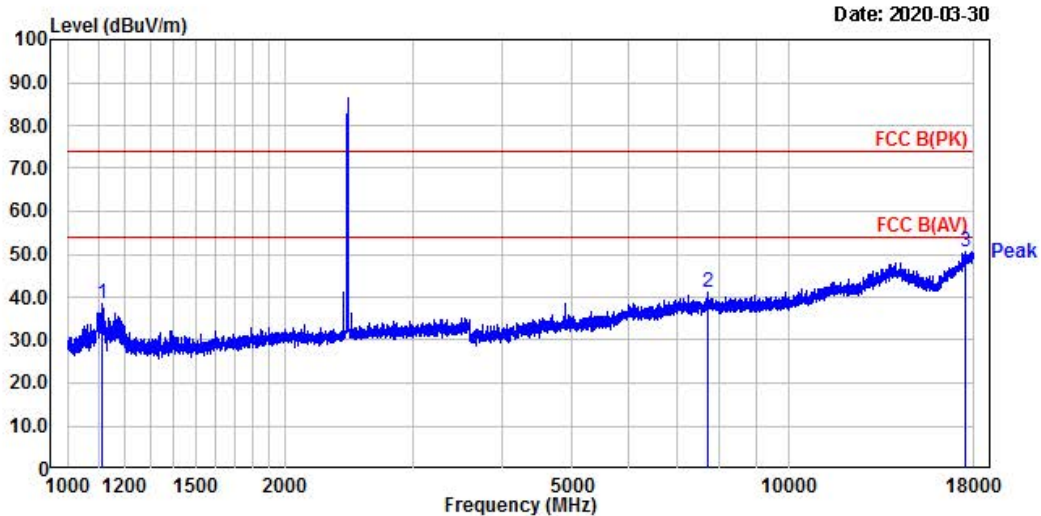

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1113.27	50.07	-11.41	38.66	74.00	35.34	100	163	horizontal
2.	7709.16	33.86	7.39	41.25	74.00	32.75	100	314	horizontal
	31754.13	32.76	17.62	50.38	74.00	23.62	100	244	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YUN J H

Power :

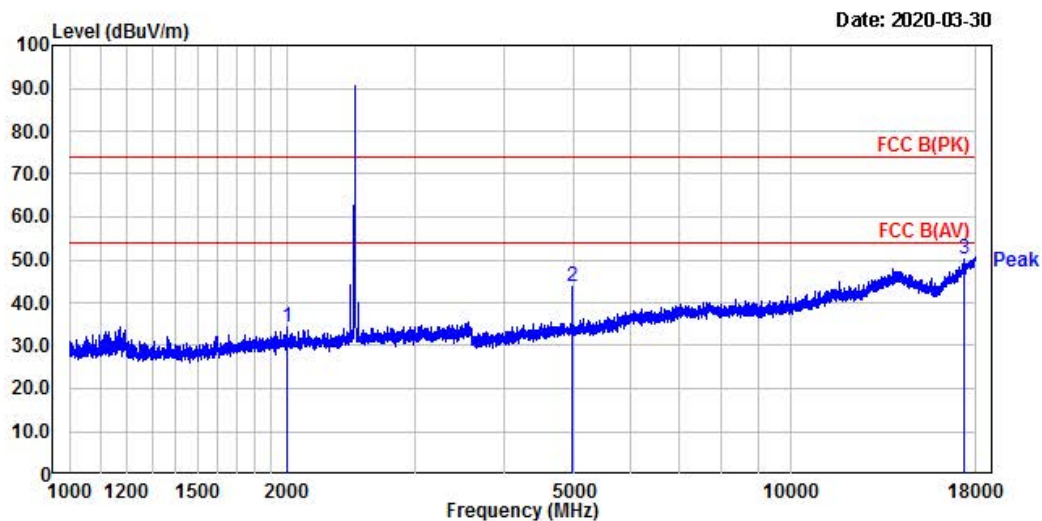

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1998.92	40.68	-6.18	34.50	74.00	39.50	100	233	vertical
2.	4959.31	41.70	1.91	43.61	74.00	30.39	100	175	vertical
	3.17417.82	32.87	17.16	50.03	74.00	23.97	100	162	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 21 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YUN J H

Power :

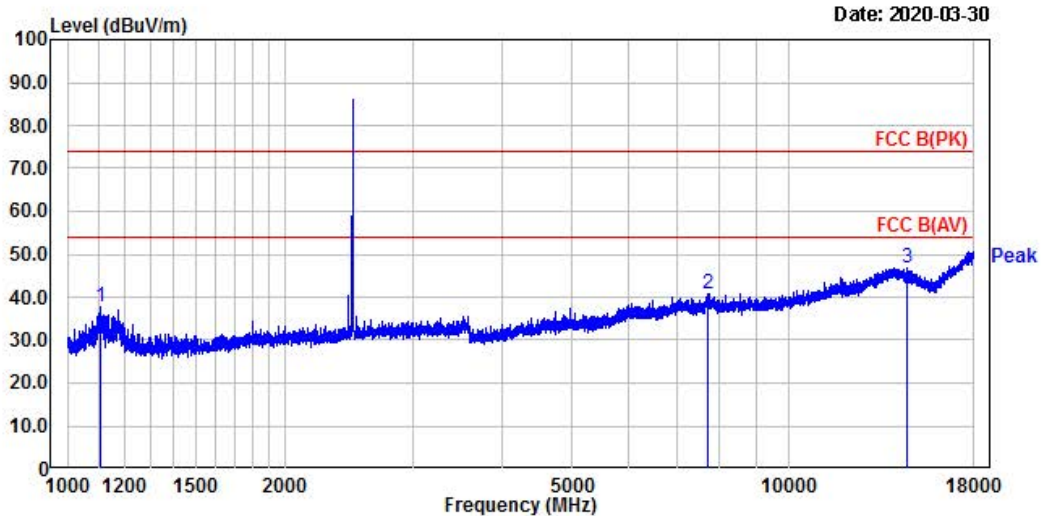

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	1108.86	49.27	-11.42	37.85	74.00	36.15	100	165	horizontal
2.	7728.68	33.51	7.38	40.89	74.00	33.11	100	360	horizontal
3.	14591.78	32.85	14.13	46.98	74.00	27.02	100	352	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YEON J H

Power :

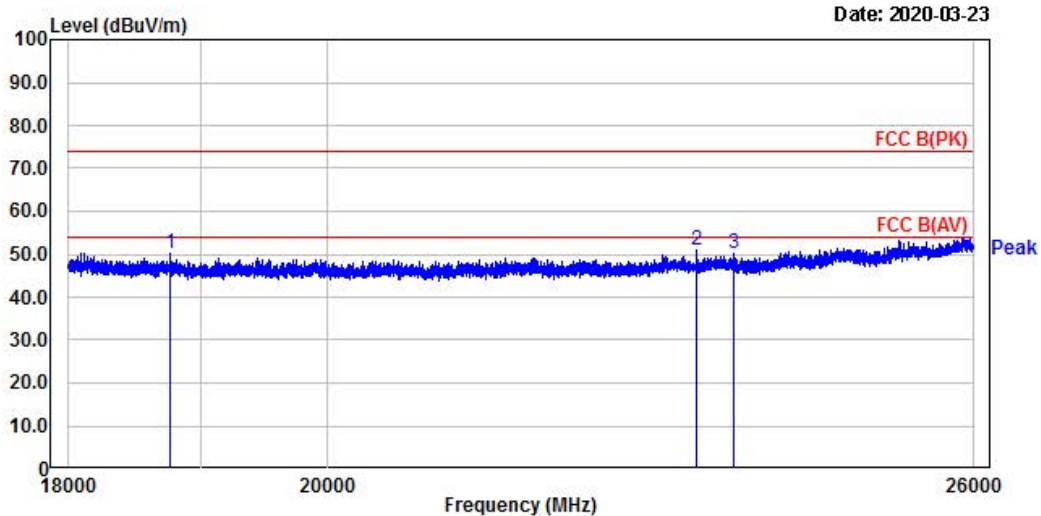

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.18761.12		33.87	16.27	50.14	74.00	23.86	100	22	vertical
2.23234.05		34.85	16.14	50.99	74.00	23.01	100	56	vertical
3.23594.58		33.86	16.28	50.14	74.00	23.86	100	104	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee low

Tested by: YEON J H

Power :

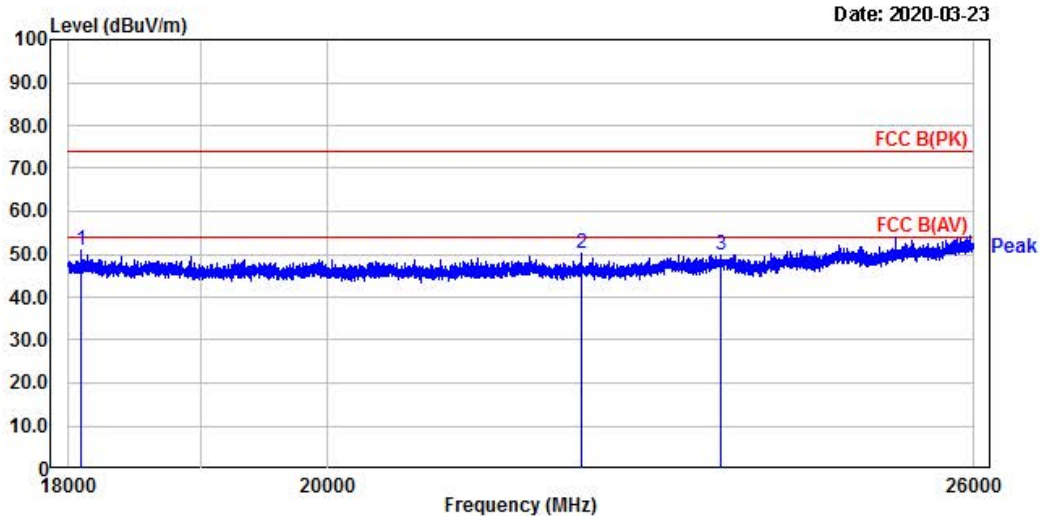

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	18091.24	33.97	16.98	50.95	74.00	23.05	100	348	horizontal
2.	22173.94	34.26	15.77	50.03	74.00	23.97	100	358	horizontal
3.	23459.41	33.60	16.19	49.79	74.00	24.21	100	77	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YEON J H

Power :

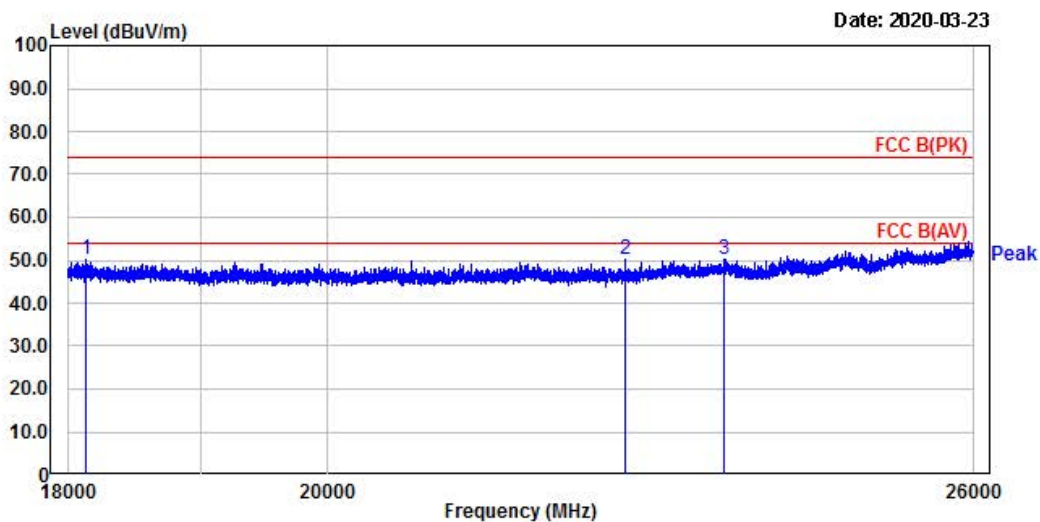

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.18133.70		33.08	16.94	50.02	74.00	23.98	100	0	vertical
2.22567.76		34.07	15.98	50.05	74.00	23.95	100	301	vertical
3.23500.42		33.93	16.21	50.14	74.00	23.86	100	83	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee mid

Tested by: YEON J H

Power :

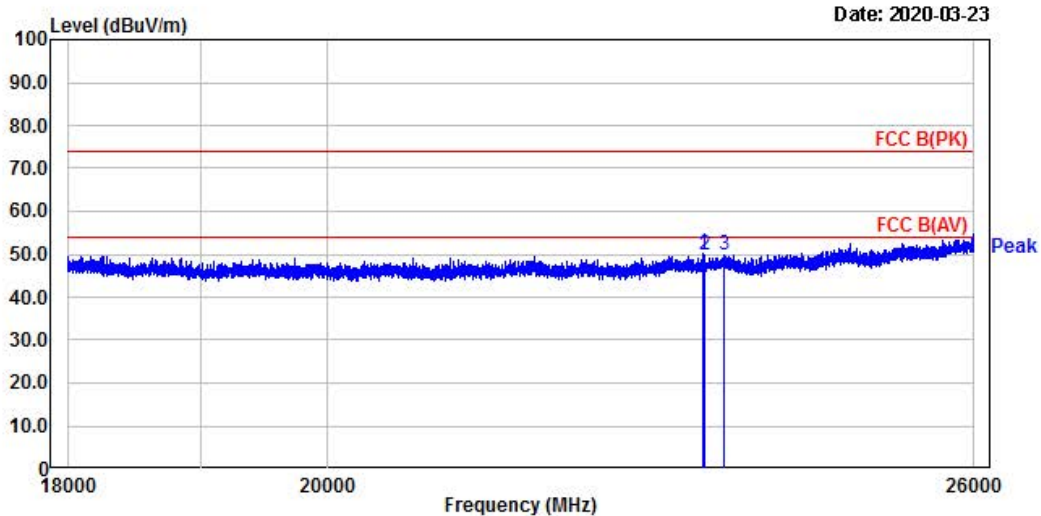

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	23299.28	33.96	16.16	50.12	74.00	23.88	100	174	horizontal
2.	23304.64	33.74	16.16	49.90	74.00	24.10	100	5	horizontal
3.	23499.34	33.54	16.20	49.74	74.00	24.26	100	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QT660L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YEON J H

Power :

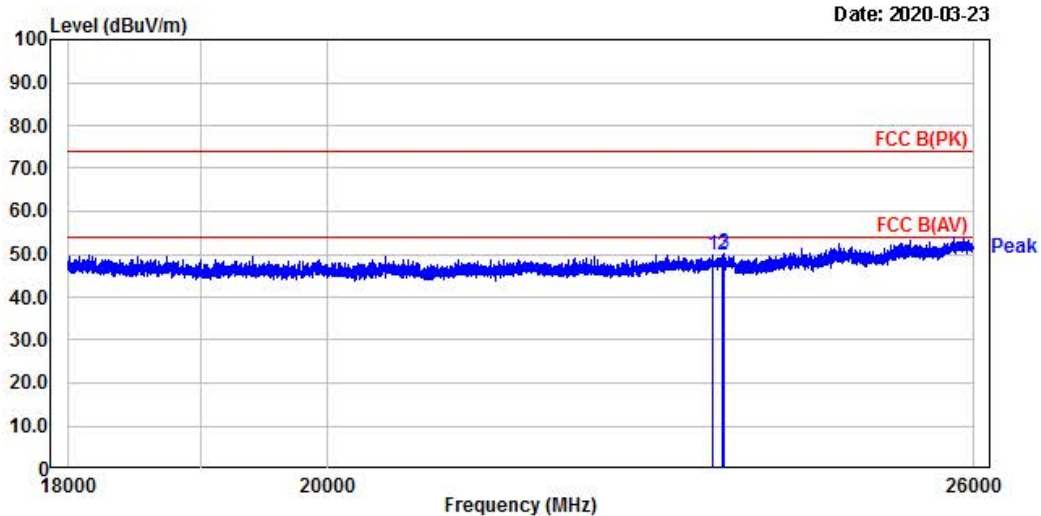

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	23395.87	33.62	16.18	49.80	74.00	24.20	100	99	vertical
2.	23488.54	33.67	16.20	49.87	74.00	24.13	100	0	vertical
3.	23496.10	33.93	16.20	50.13	74.00	23.87	100	156	vertical

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com


EUT/Model No.: QTG60L-WIZ

Temp/Humi: 22 °C / 35 % R.H.

Test Mode : Zigbee high

Tested by: YEON J H

Power :

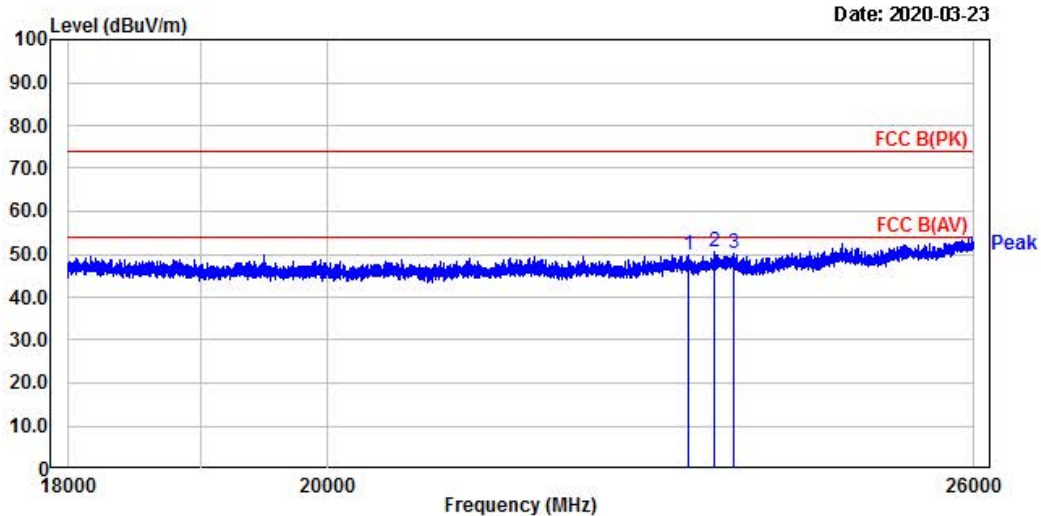

No.	Freq MHz	Reading dBμV	C.F dB	Result QP dBμV/m	Limit dBμV/m	Margin dB	Height cm	Angle deg	Polarity
1.	23160.47	33.71	16.13	49.84	74.00	24.16	100	298	horizontal
2.	23399.10	34.30	16.18	50.48	74.00	23.52	100	162	horizontal
3.	23590.25	33.81	16.28	50.09	74.00	23.91	100	0	horizontal

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Measurement Data: Complies

Class B


Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. :	-----	Phase :	Line
Test Mode :	-----	Test Power :	120 / 60
Temp. / Humi. :	24'C / 50% R.H.	Test Engineer :	Yeon J H

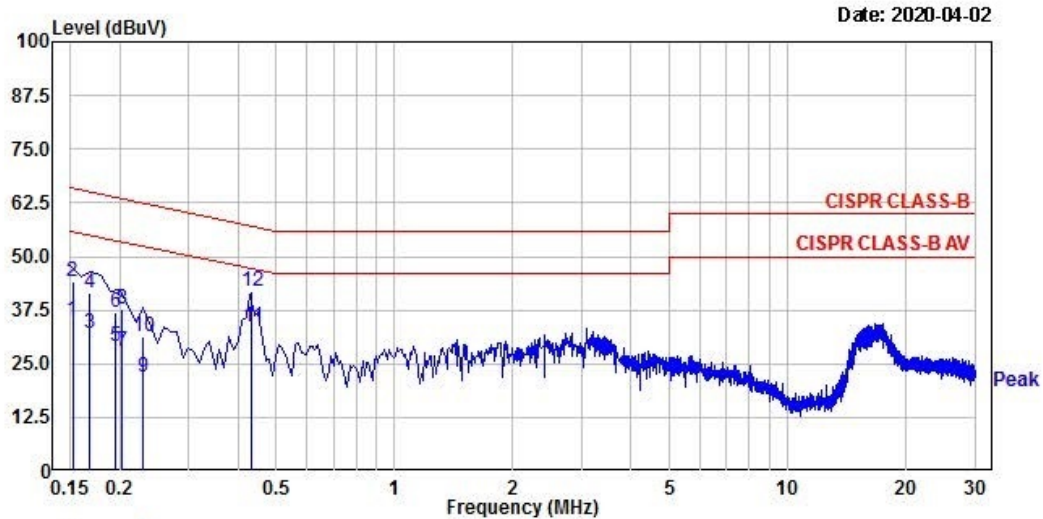

Trace: 1


Freq MHz	RD QP dBUV	RD AV dBUV	C.F dB	Result QP dBUV	Result AV dBUV	Limit QP dBUV	Limit AV dBUV	Margin QP dB	Margin AV dB
0.152	24.52	15.70	19.46	43.98	35.16	65.89	55.89	21.91	20.73
0.168	21.99	12.74	19.47	41.46	32.21	65.04	55.04	23.58	22.83
0.195	17.63	9.48	19.47	37.10	28.95	63.81	53.81	26.71	24.86
0.204	18.33	8.32	19.47	37.80	27.79	63.46	53.46	25.66	25.67
0.230	11.82	2.24	19.48	31.30	21.72	62.44	52.44	31.14	30.72
0.435	22.41	14.00	19.50	41.91	33.50	57.16	47.16	15.25	13.66

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel:+82-31-3236008,9
Fax:+82-31-3236010

EUT /Model No. :	-----	Phase	: Neutral
Test Mode	: -----	Test Power	: 120 / 60
Temp. / Humi. :	24'C / 50% R.H.	Test Engineer	: Yeon J H

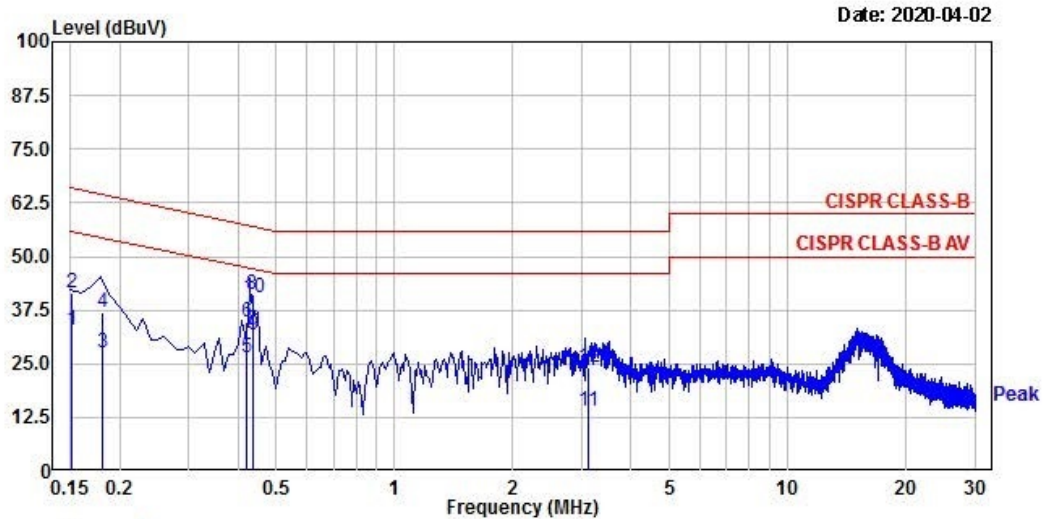

Trace: 1


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.151	22.00	13.49	19.47	41.47	32.96	65.96	55.96	24.49	23.00
0.181	17.38	7.95	19.48	36.86	27.43	64.45	54.45	27.59	27.02
0.422	15.30	6.90	19.50	34.80	26.40	57.40	47.40	22.60	21.00
0.435	21.52	13.16	19.50	41.02	32.66	57.15	47.15	16.13	14.49
0.437	20.79	12.37	19.50	40.29	31.87	57.13	47.13	16.84	15.26
3.111	4.38	-5.82	19.67	24.05	13.85	56.00	46.00	31.95	32.15

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. :	-----	Phase :	Line
Test Mode :	-----	Test Power :	120 / 60
Temp. / Humi. :	24'C / 50% R.H.	Test Engineer :	Yeon J H

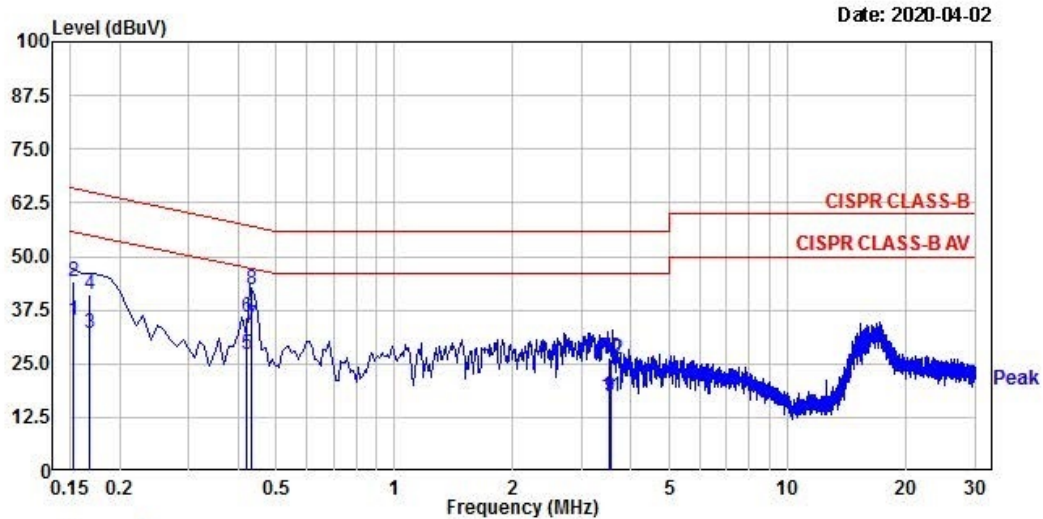

Trace: 1


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.153	24.64	15.78	19.46	44.10	35.24	65.85	55.85	21.75	20.61
0.169	21.81	12.67	19.47	41.28	32.14	65.03	55.03	23.75	22.89
0.422	16.19	7.78	19.50	35.69	27.28	57.40	47.40	21.71	20.12
0.434	22.75	14.45	19.50	42.25	33.95	57.18	47.18	14.93	13.23
3.512	6.72	-2.35	19.68	26.40	17.33	56.00	46.00	29.60	28.67
3.545	6.51	-2.44	19.68	26.19	17.24	56.00	46.00	29.81	28.76

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. :	-----	Phase	: Neutral
Test Mode :	-----	Test Power	: 120 / 60
Temp. / Humi. : 24'C / 50% R.H.	-----	Test Engineer	: Yeon J H

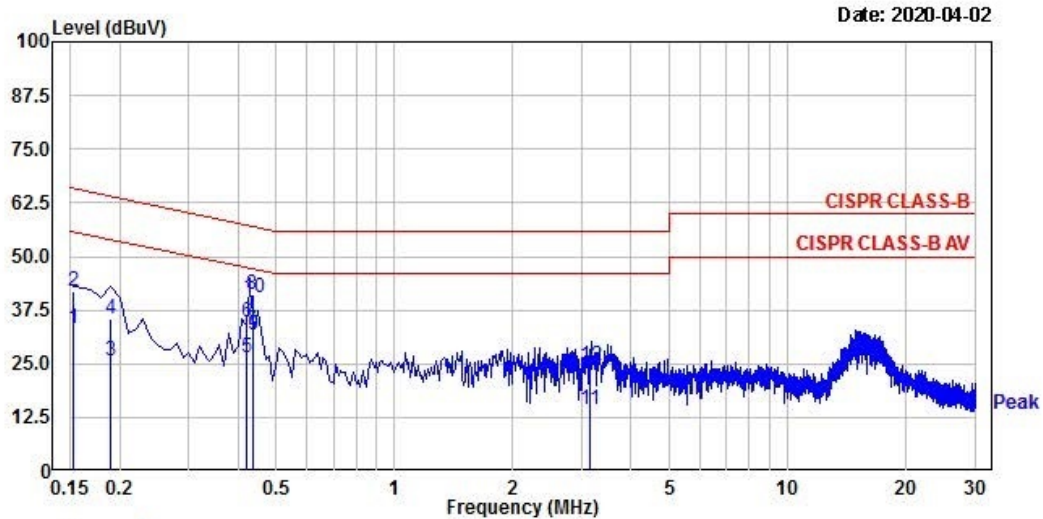

Trace: 1


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.153	22.48	13.72	19.47	41.95	33.19	65.83	55.83	23.88	22.64
0.190	16.16	6.14	19.48	35.64	25.62	64.04	54.04	28.40	28.42
0.422	15.39	6.95	19.50	34.89	26.45	57.40	47.40	22.51	20.95
0.435	21.55	13.18	19.50	41.05	32.68	57.15	47.15	16.10	14.47
0.437	20.80	12.36	19.50	40.30	31.86	57.13	47.13	16.83	15.27
3.135	4.83	-5.47	19.67	24.50	14.20	56.00	46.00	31.50	31.80

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. :	-----	Phase :	LINE
Test Mode :	-----	Test Power :	120 / 60
Temp. / Humi. :	24'C / 50% R.H.	Test Engineer :	Yeon J H

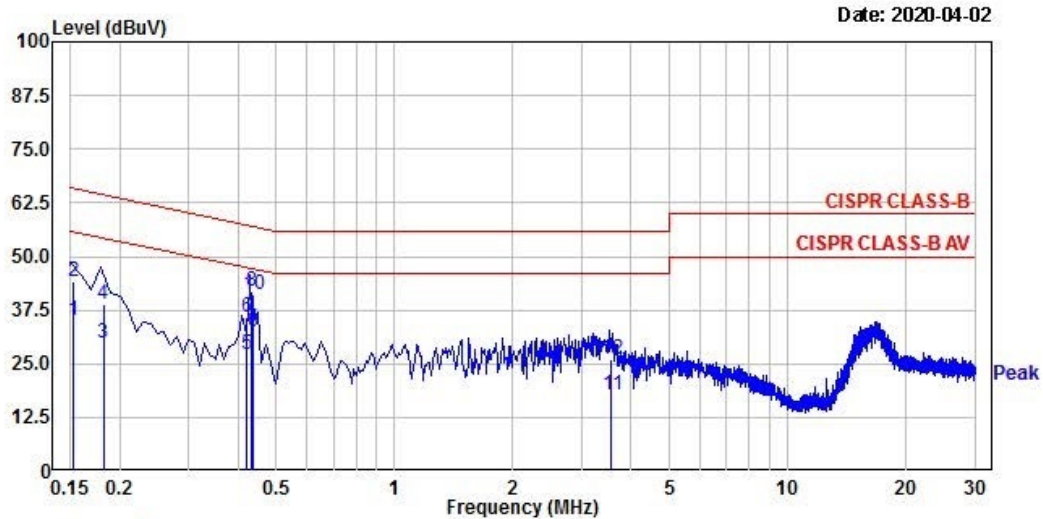

Trace: 1


Freq MHz	RD QP dBuV	RD AV dBuV	C.F dB	Result QP dBuV	Result AV dBuV	Limit QP dBuV	Limit AV dBuV	Margin QP dB	Margin AV dB
0.152	24.69	15.77	19.46	44.15	35.23	65.87	55.87	21.72	20.64
0.182	19.43	10.46	19.47	38.90	29.93	64.40	54.40	25.50	24.47
0.422	16.24	7.79	19.50	35.74	27.29	57.40	47.40	21.66	20.11
0.435	22.34	13.87	19.50	41.84	33.37	57.15	47.15	15.31	13.78
0.437	21.51	12.97	19.50	41.01	32.47	57.13	47.13	16.12	14.66
3.569	6.39	-1.96	19.68	26.07	17.72	56.00	46.00	29.93	28.28

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter



4, Songjuro 236 Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel: +82-31-3236008,9
Fax: +82-31-3236010

EUT /Model No. :	-----	Phase :	NEUTRAL
Test Mode :	-----	Test Power :	120 / 60
Temp. / Humi. :	24'C / 50% R.H.	Test Engineer :	Yeon J H

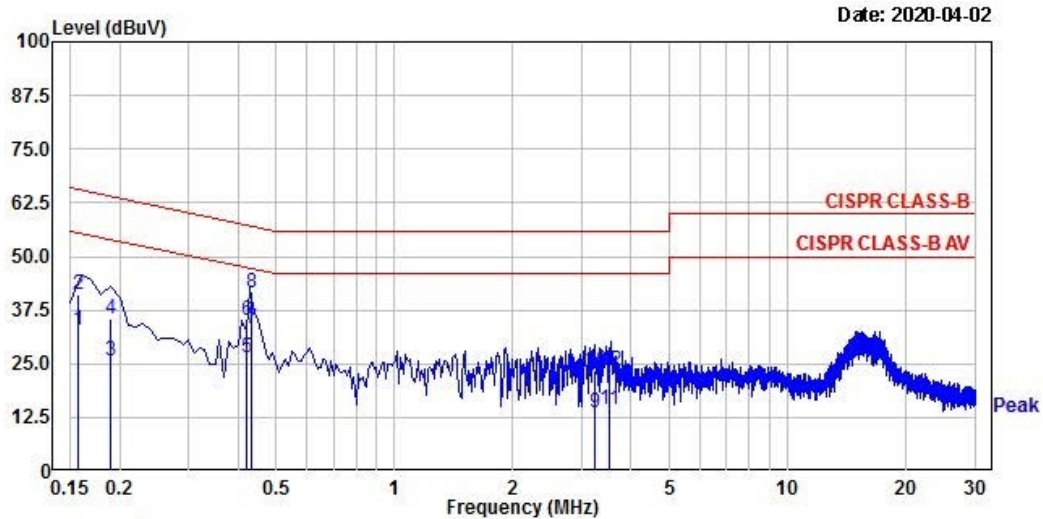

Trace: 1

Freq MHz	RD QP dBUV	RD AV dBUV	C.F dB	Result QP dBUV	Result AV dBUV	Limit QP dBUV	Limit AV dBUV	Margin QP dB	Margin AV dB
0.157	21.67	13.31	19.47	41.14	32.78	65.61	55.61	24.47	22.83
0.190	15.88	6.21	19.48	35.36	25.69	64.06	54.06	28.70	28.37
0.422	15.43	6.94	19.50	34.93	26.44	57.40	47.40	22.47	20.96
0.434	21.97	13.74	19.50	41.47	33.24	57.18	47.18	15.71	13.94
3.236	3.79	-6.17	19.67	23.46	13.50	56.00	46.00	32.54	32.50
3.511	3.65	-5.32	19.69	23.34	14.37	56.00	46.00	32.66	31.63

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss + Pulse Limiter

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Next Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2022-09-06
2		Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2022-03-16
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2022-03-16
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2022-09-06
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2022-09-06
6	■	EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2022-09-06
7	■	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2022-09-06
8	■	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2022-03-18
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2022-09-06
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2022-03-18
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2022-03-18
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2022-03-20
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2022-03-20
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	AC Power Supply	HK-80	LR001	DAERIM	-	-
16	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2022-03-20
17	■	Power Sensor	8481A	3318A94972	HP	1 year	2022-09-06
18		Audio Analyzer	8903B	3729A18901	HP	1 year	2022-09-06
19		Modulation Analyzer	8901B	3749A05878	HP	1 year	2022-09-06
20		TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2022-09-06
21		Stop Watch	HS-3	812Q08R	CASIO	2 year	2022-03-18
22		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2022-09-06
23		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2022-03-18
24		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2022-03-18
25		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2022-03-18
26		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2022-03-18
27		OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2022-03-18
28	■	Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2022-03-18
29		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2022-03-18
30	■	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	2 year	2022-02-26
31		Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2022-09-06