



Pi/4 DQPSK Transmitting Band edge-left side

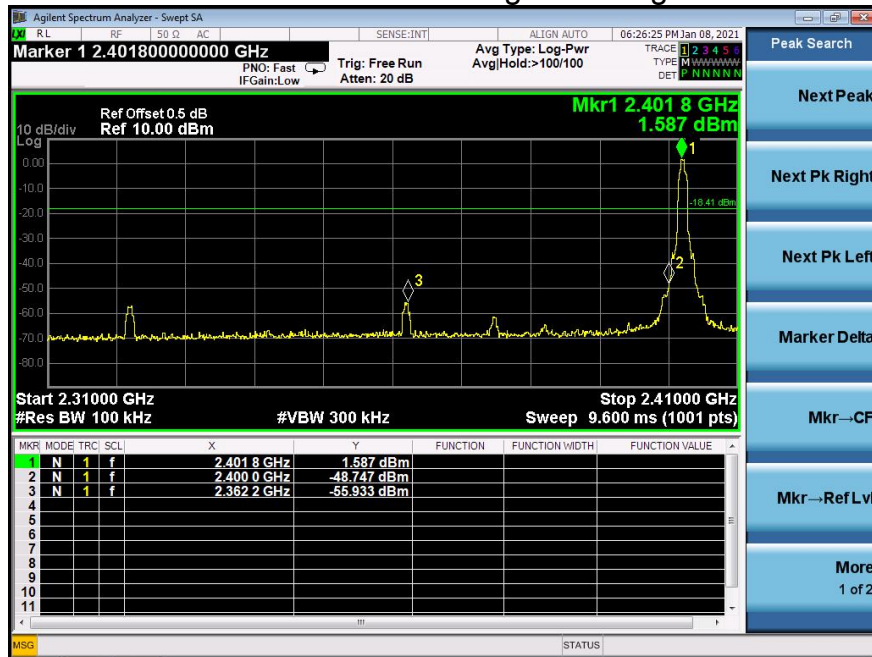


Pi/4 DQPSK Hopping Band edge-left side

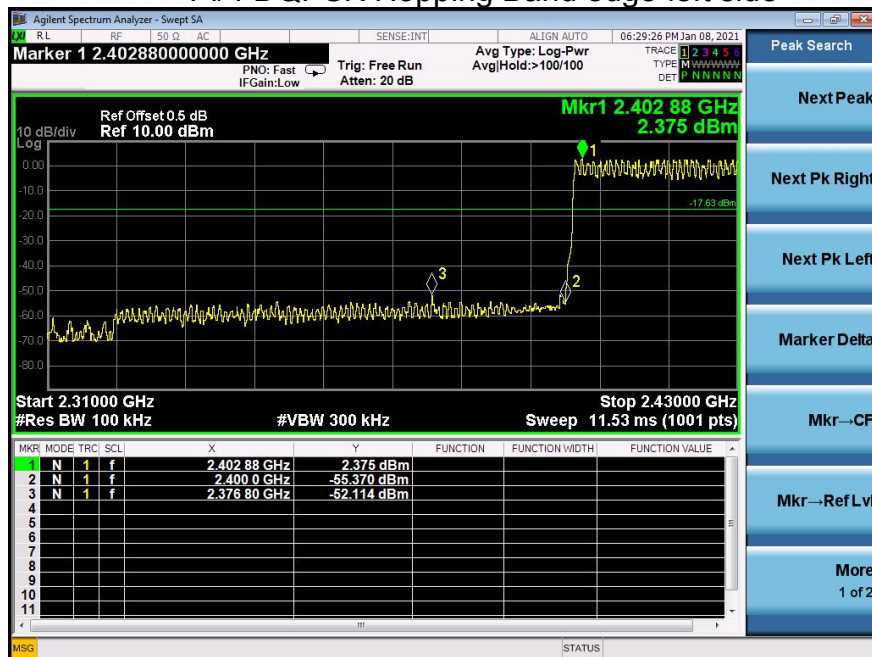


Pi/4 DQPSK Transmitting Band edge-right side




Pi/4 DQPSK Hopping Band edge-right side

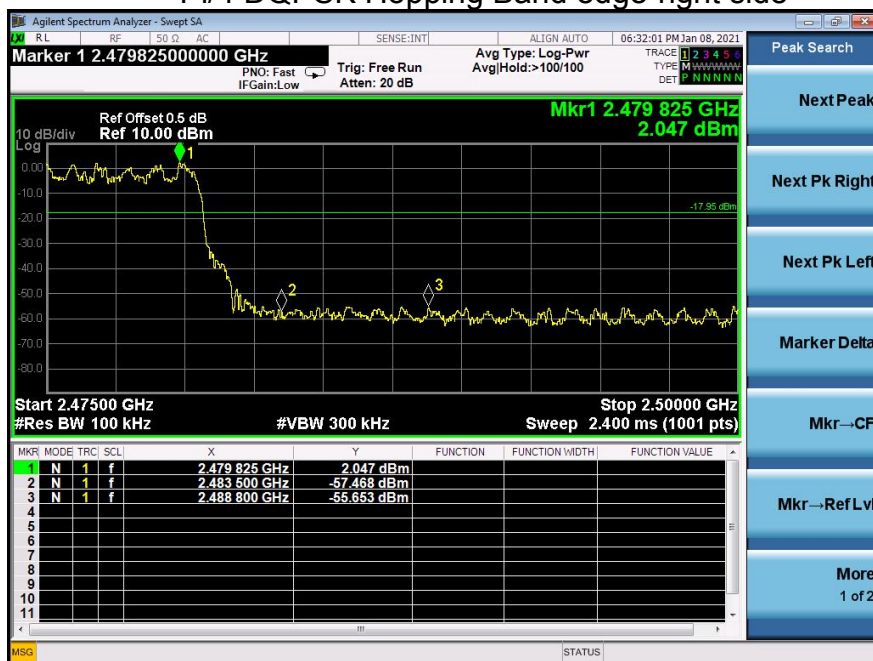


8DPSK Transmitting Band edge-left side

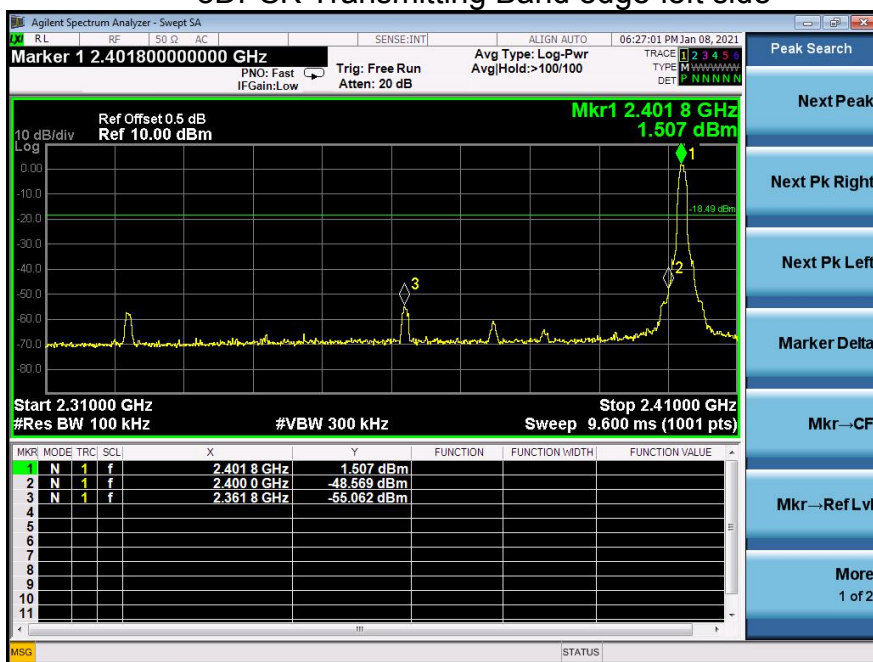


8DPSK Hopping Band edge-left side

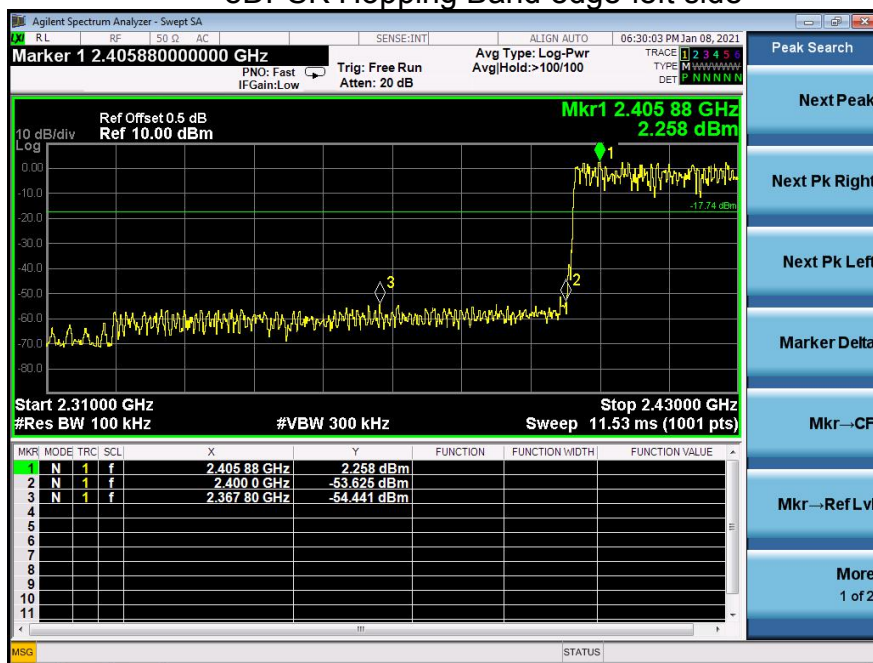

8DPSK Transmitting Band edge-right side

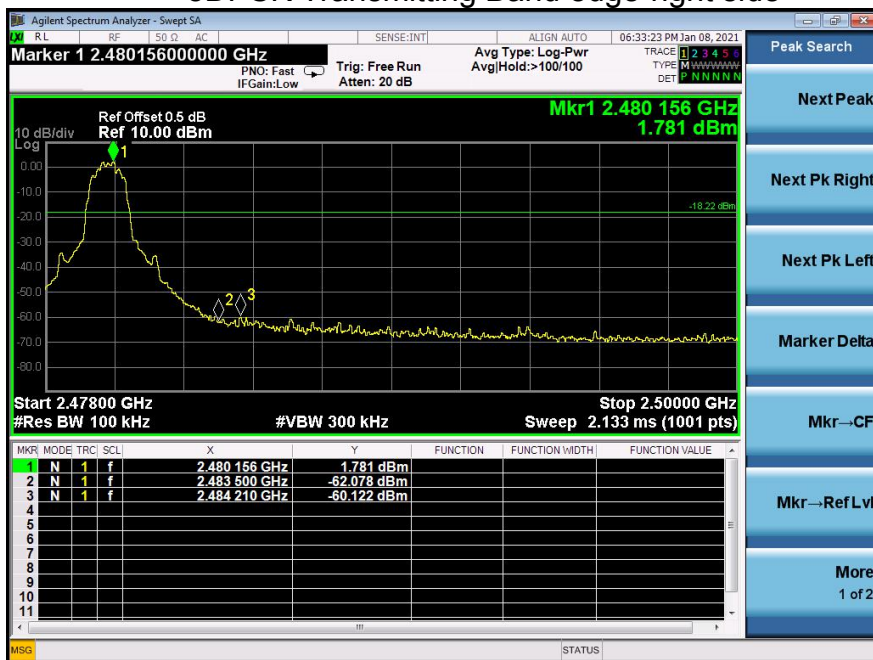

8DPSK Hopping Band edge-right side

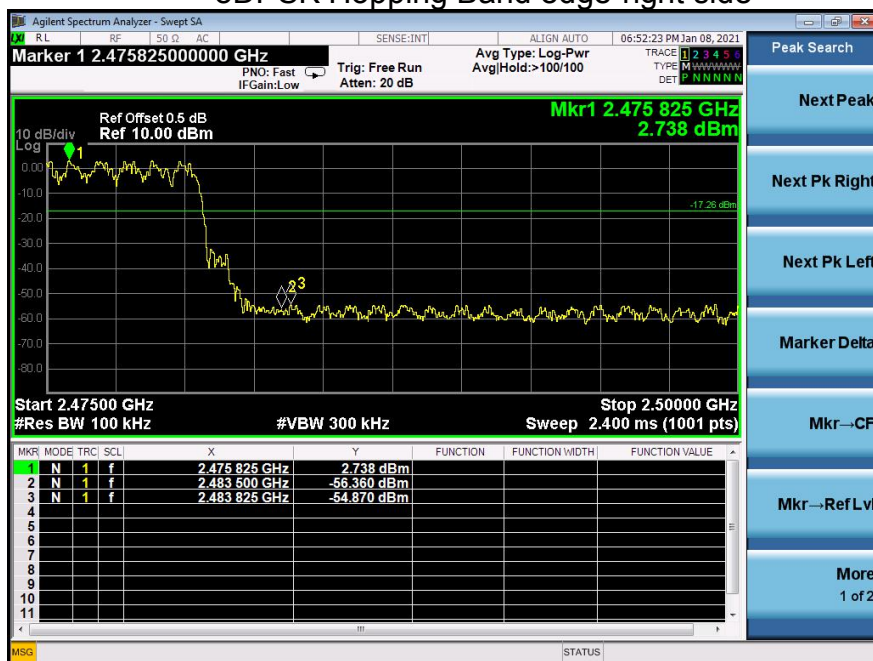

10. 20 DB BANDWIDTH

10.1 Block Diagram Of Test Setup



10.2 Limit

N/A

10.3 Test procedure


1. Set RBW = 30kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. .

10.4 Test Result


Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 7.6V	Remark	N/A

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.862
GFSK	Middle	0.860
GFSK	High	0.862
Pi/4 DQPSK	Low	1.220
Pi/4 DQPSK	Middle	1.220
Pi/4 DQPSK	High	1.217
8DPSK	Low	1.255
8DPSK	Middle	1.253
8DPSK	High	1.241


Test plots
GFSK Low Channel

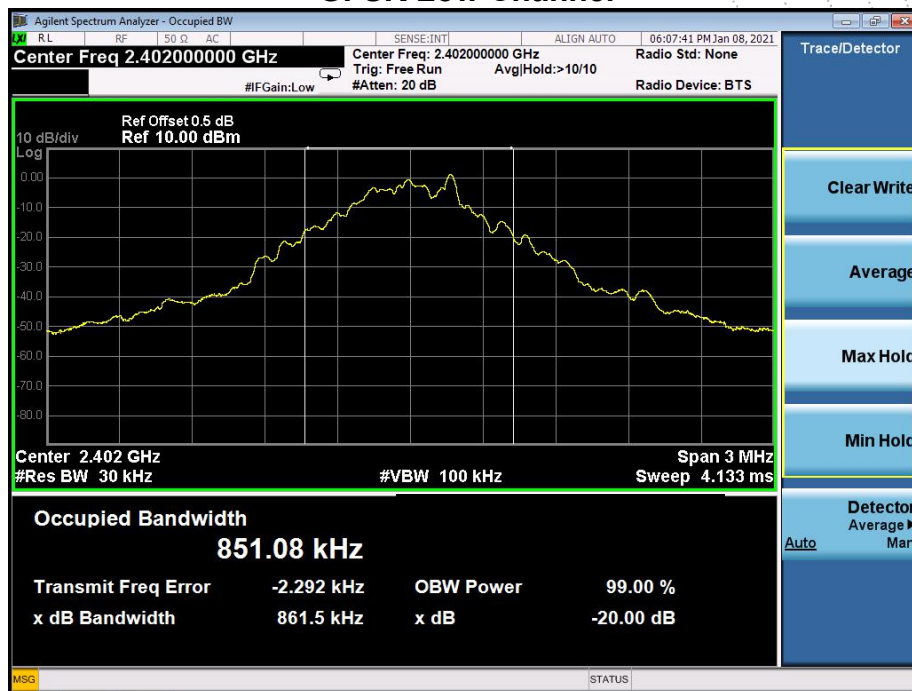


GFSK Middle Channel

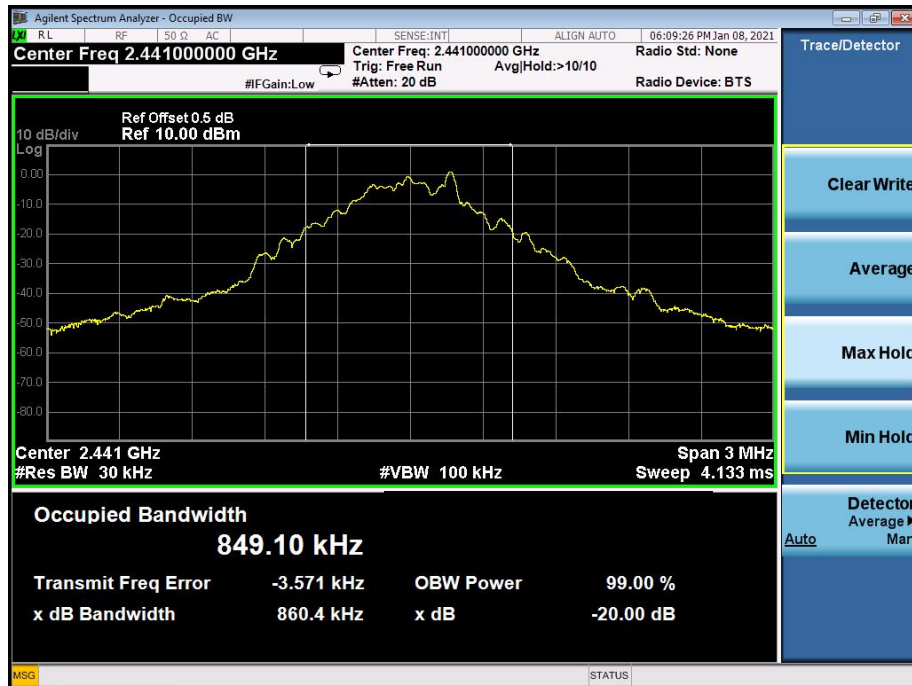


GFSK High Channel

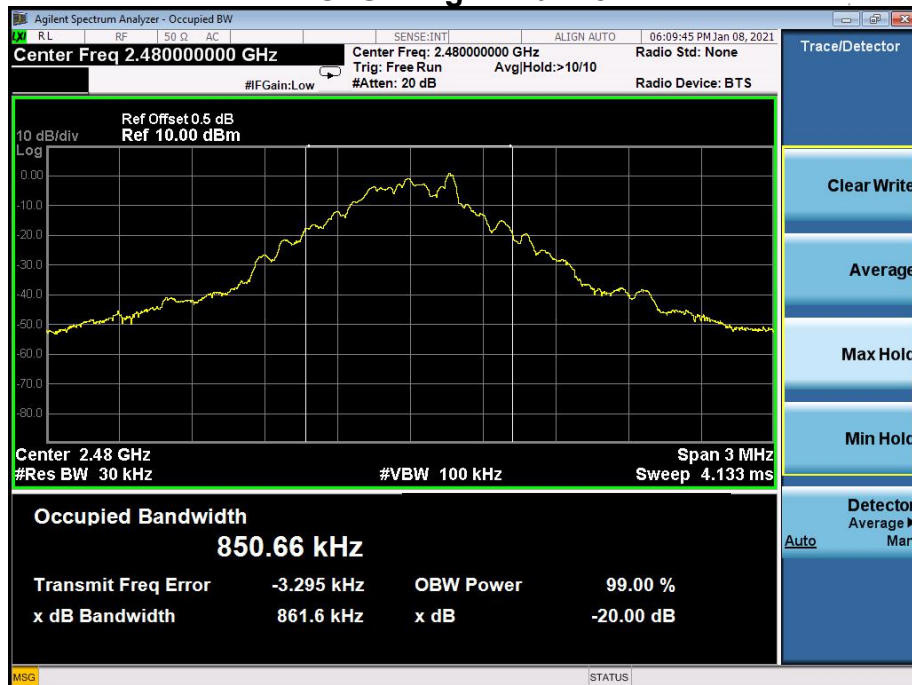


Pi/4 DQPSK Low Channel

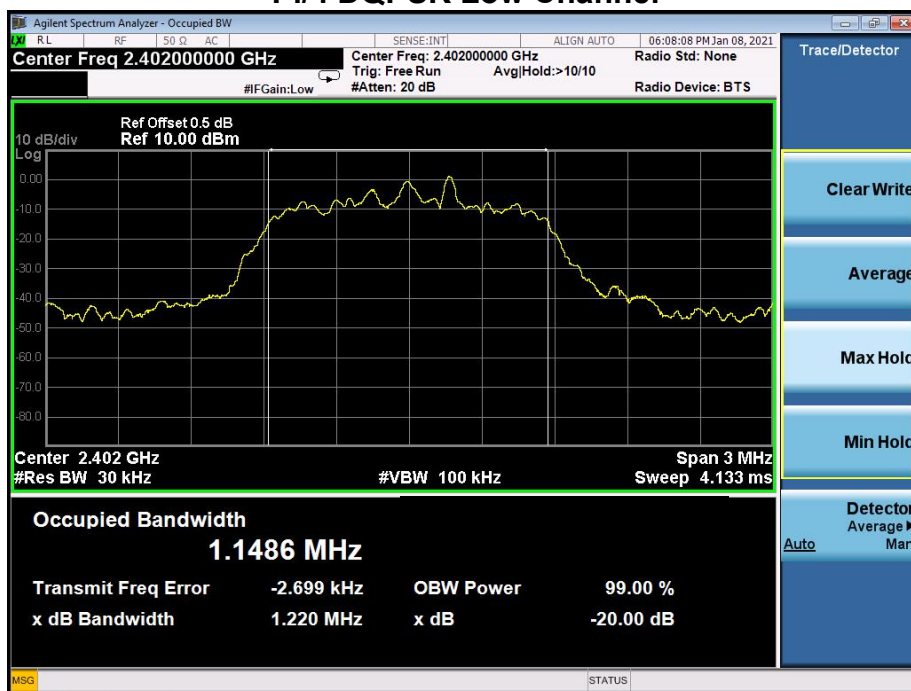


Pi/4 DQPSK Middle Channel

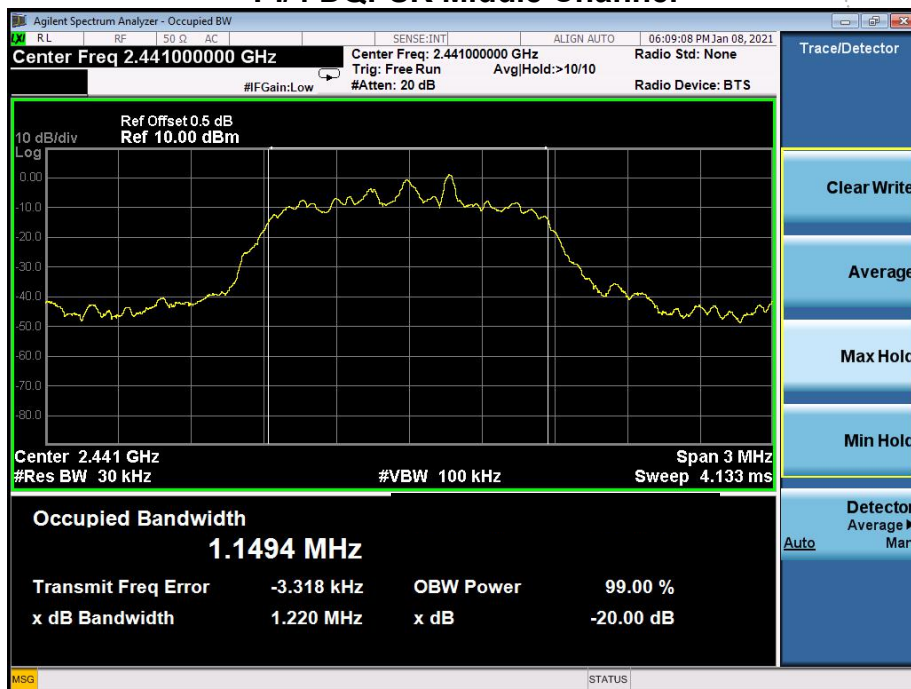


Pi/4 DQPSK High Channel

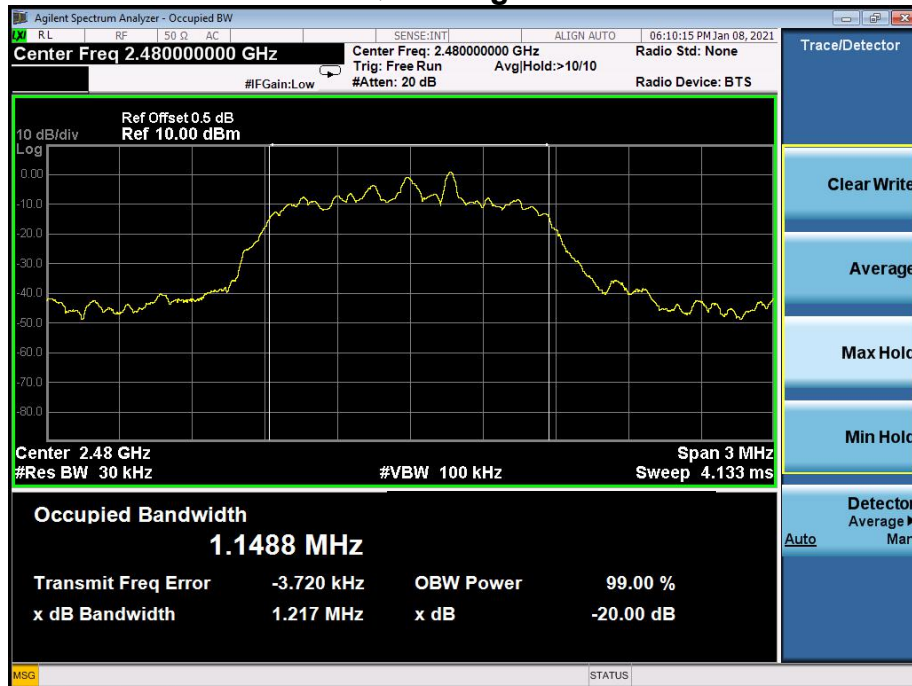


8DPSK Low Channel

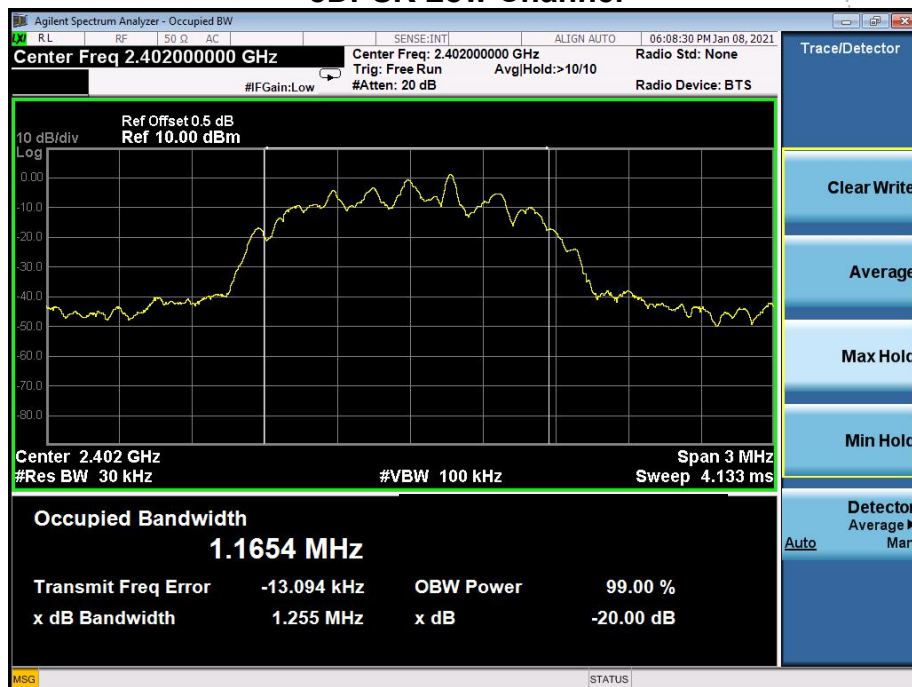

8DPSK Middle Channel

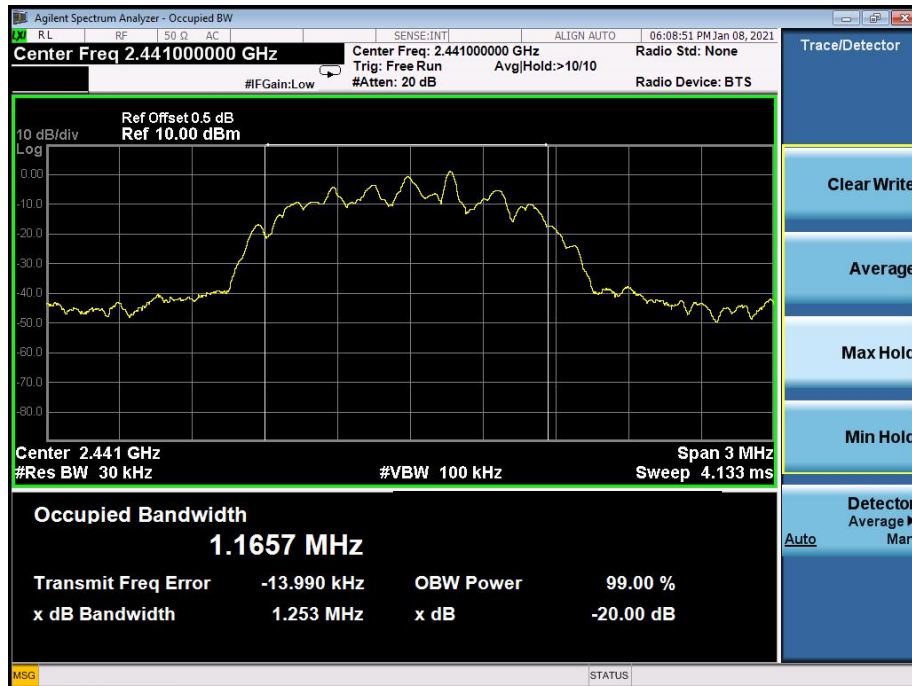

8DPSK High Channel

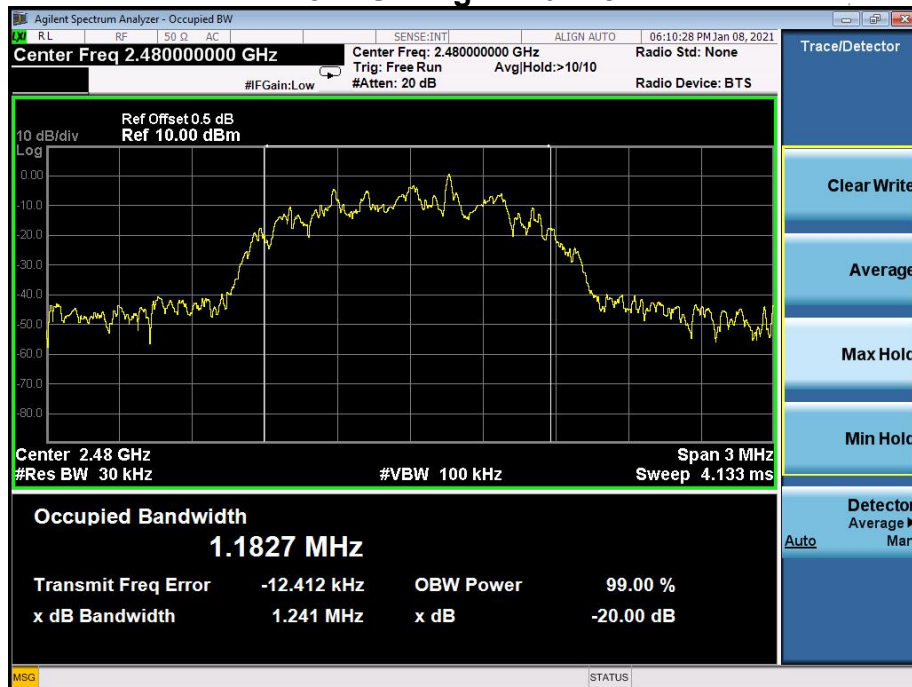

11. MAXIMUM PEAK OUTPUT POWER

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	0.125 watt or 21dBm	2400-2483.5	PASS

11.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.4 Test Result


Temperature :	26°C	Relative Humidity :	54%
Test Voltage :	DC 7.6V	Remark:	N/A

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	2.806	21
GFSK	Middle	2.744	21
GFSK	High	2.655	21
Pi/4 DQPSK	Low	4.069	21
Pi/4 DQPSK	Middle	4.104	21
Pi/4 DQPSK	High	4.043	21
8DPSK	Low	4.305	21
8DPSK	Middle	4.275	21
8DPSK	High	4.271	21


Test plots
GFSK Low Channel

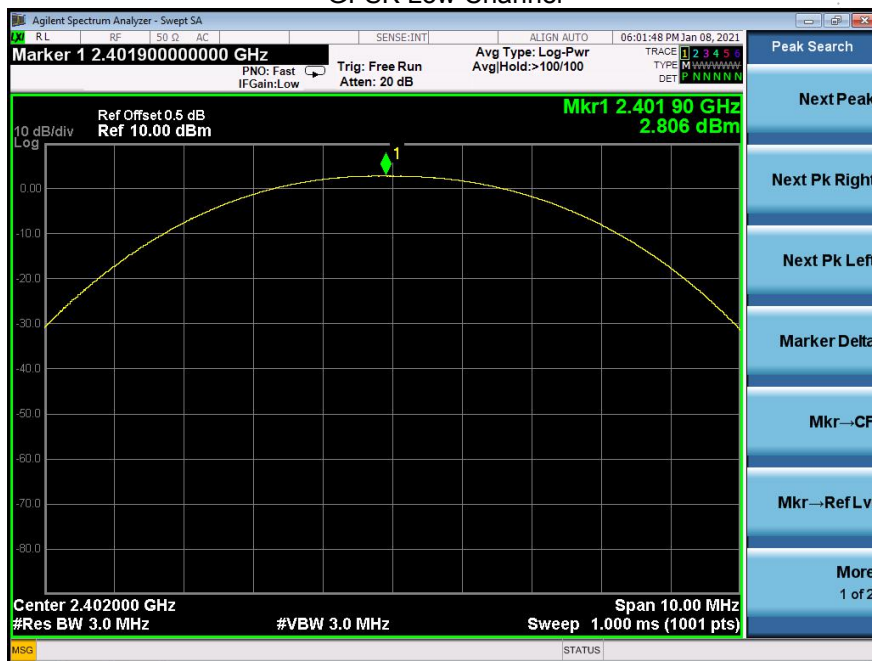


GFSK Middle Channel

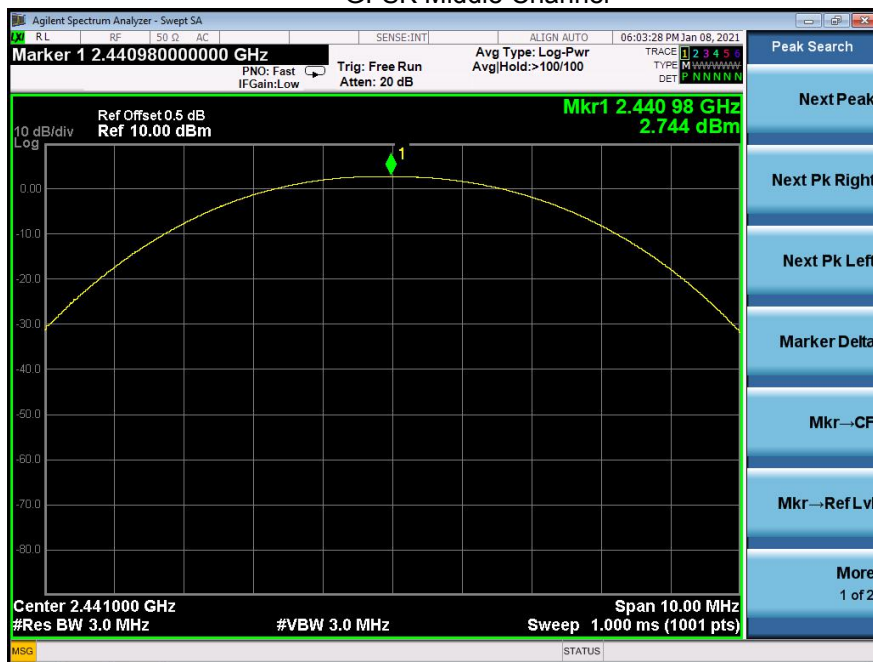

GFSK High Channel

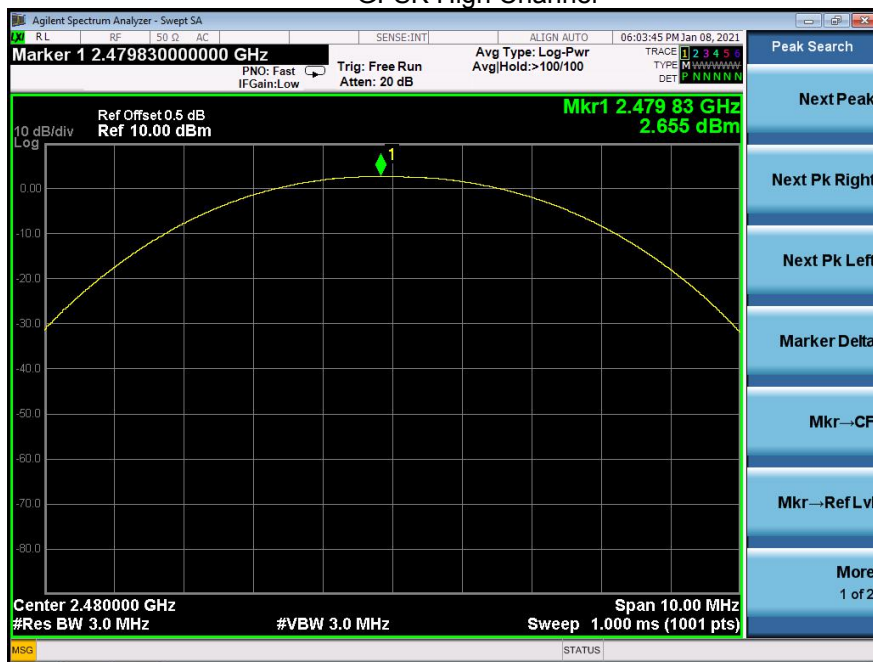


Pi/4 DQPSK Low Channel

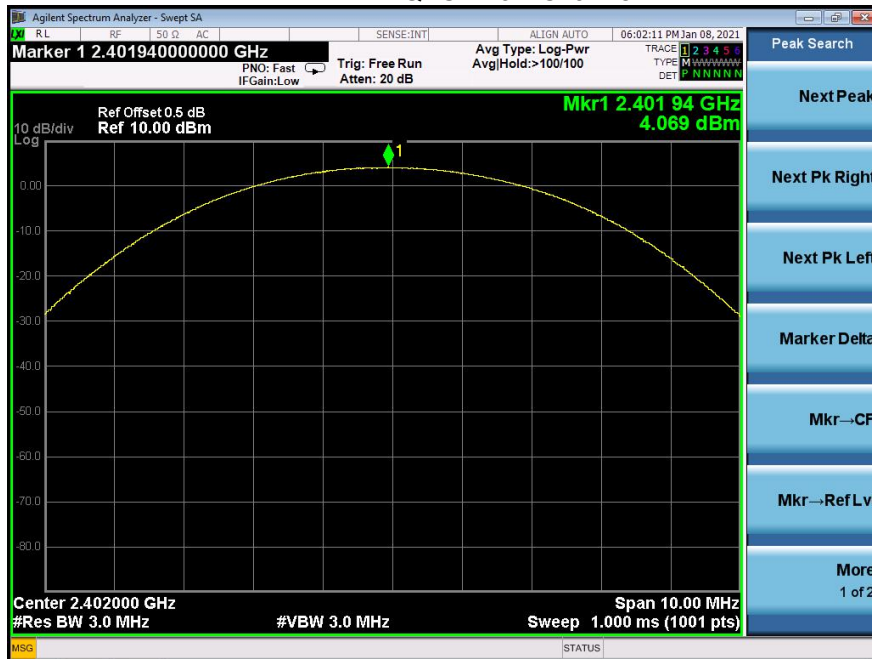


Pi/4 DQPSK Middle Channel




Pi/4 DQPSK High Channel

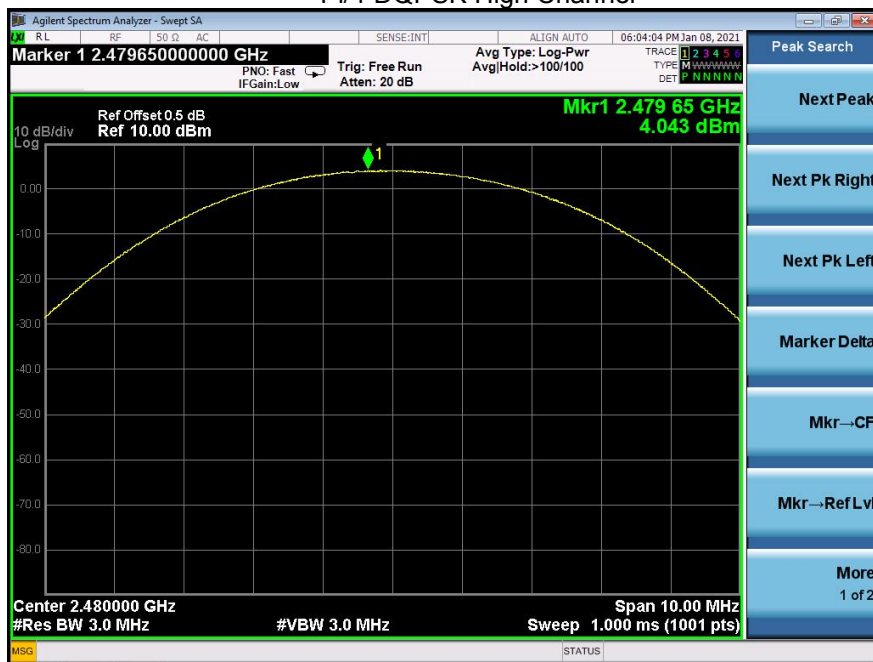


8DPSK Low Channel

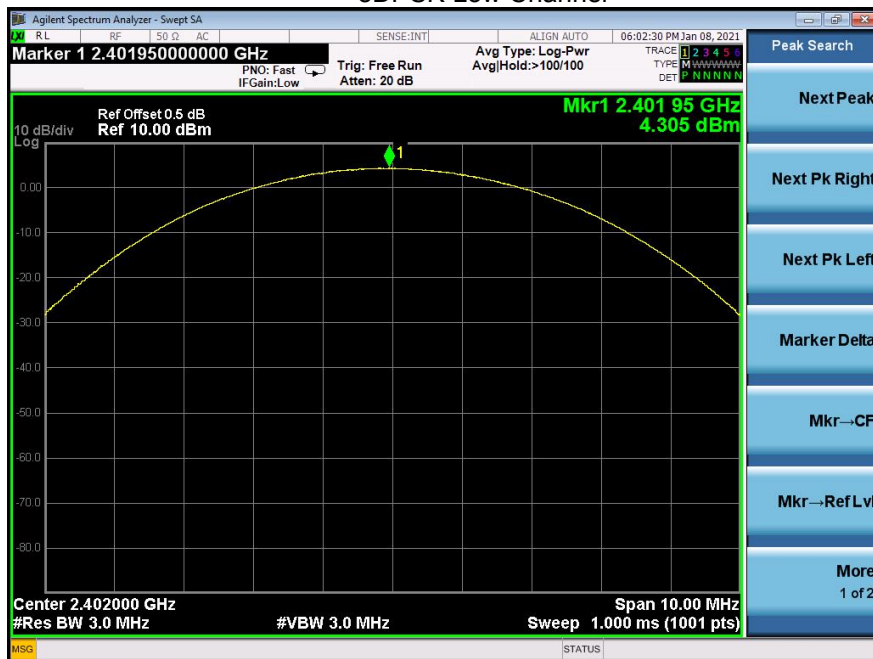

8DPSK Middle Channel

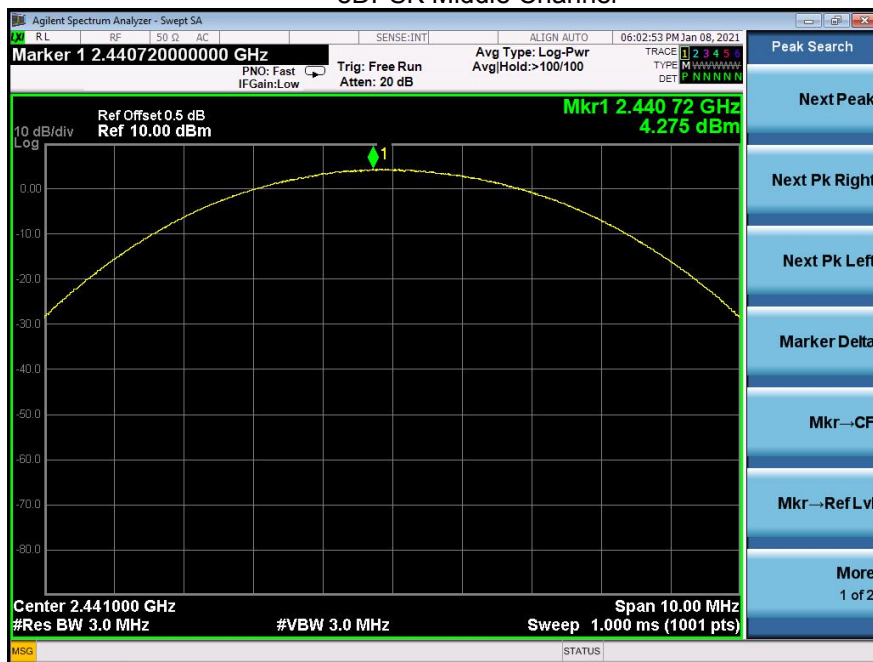

8DPSK High Channel

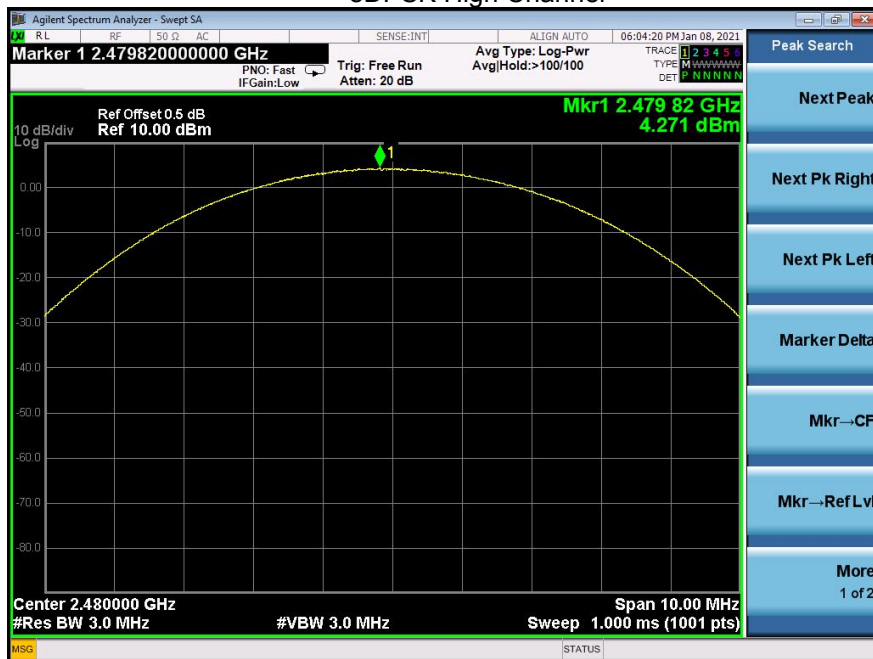

12. HOPPING CHANNEL SEPARATION

12.1 Block Diagram Of Test Setup



12.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

12.4 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.002	0.575	PASS
GFSK	Middle	1.018	0.573	PASS
GFSK	High	0.994	0.575	PASS
Pi/4 DQPSK	Low	1.006	0.813	PASS
Pi/4 DQPSK	Middle	1.000	0.813	PASS
Pi/4 DQPSK	High	1.012	0.811	PASS
8DPSK	Low	1.004	0.837	PASS
8DPSK	Middle	1.002	0.835	PASS
8DPSK	High	1.006	0.827	PASS

Test plots
GFSK Low Channel



GFSK Middle Channel



GFSK High Channel



Pi/4 DQPSK Low Channel



Pi/4 DQPSK Middle Channel



Pi/4 DQPSK High Channel



8DPSK Low Channel



8DPSK Middle Channel



8DPSK High Channel



13. NUMBER OF HOPPING FREQUENCY

13.1 Block Diagram Of Test Setup



13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;