

11AC20SISO_Ant1_5180



11AC20SISO_Ant1_5200



11AC20SISO_Ant1_5240



11AC40SISO_Ant1_5190



11AC40SISO_Ant1_5230



11AC80SISO_Ant1_5210



Appendix D): Band Edge Measurements

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 General UNII Test Procedures New Rules v02


Test Procedure:

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO


Limit:

For transmitters operating in the 5.15-5.25 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.25-5.35 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.47-5.725 GHz band:	All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).
For transmitters operating in the 5.725-5.85 GHz band:	(i) All emissions shall be limited to a level of -27 dBm/MHz (68.2dBuV/m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz (105.2dBuV/m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz (110.8dBuV/m) at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz (122.2dBuV/m) at the band edge.


Test Setup Diagram

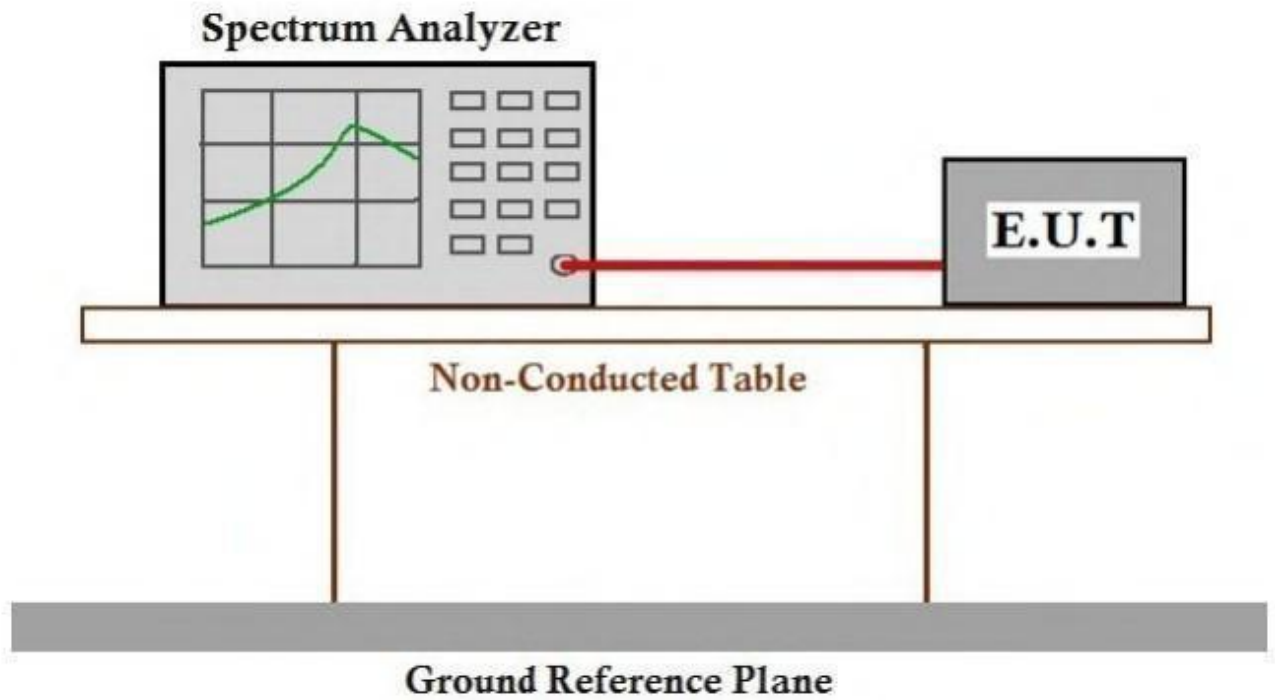


Test Graphs

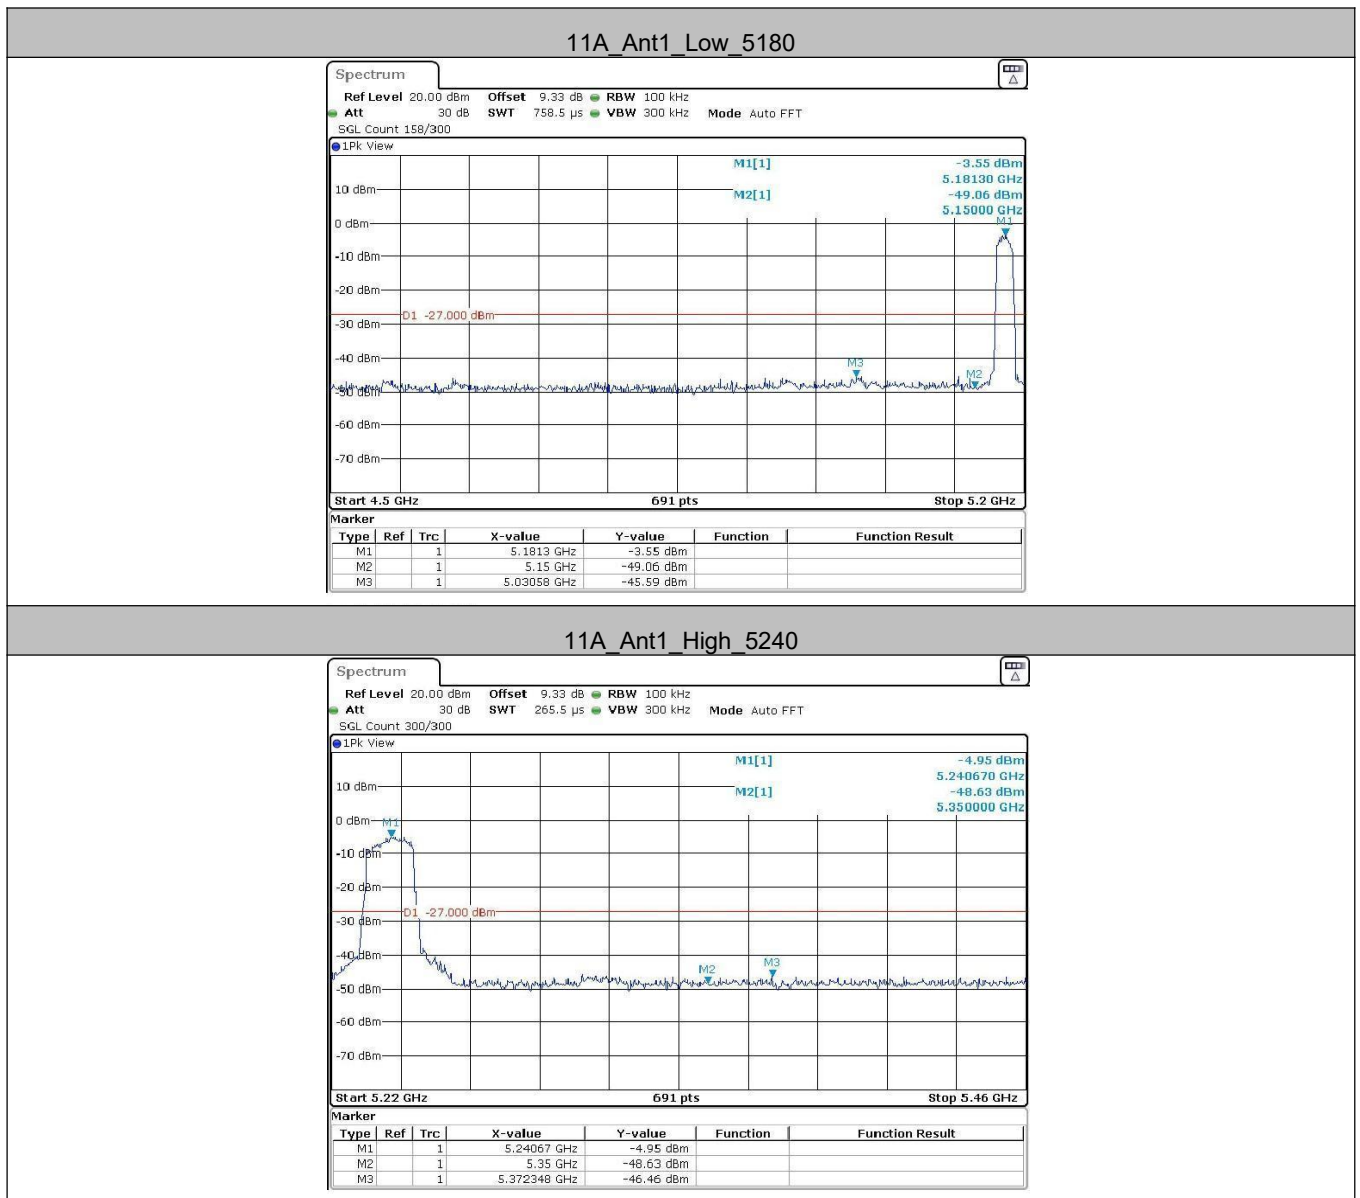


11N20SISO_Ant1_Low_5180

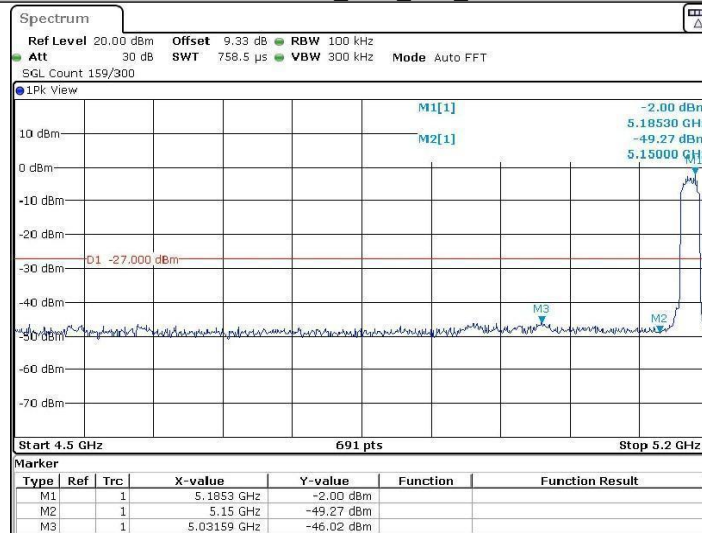


11N20SISO_Ant1_High_5240

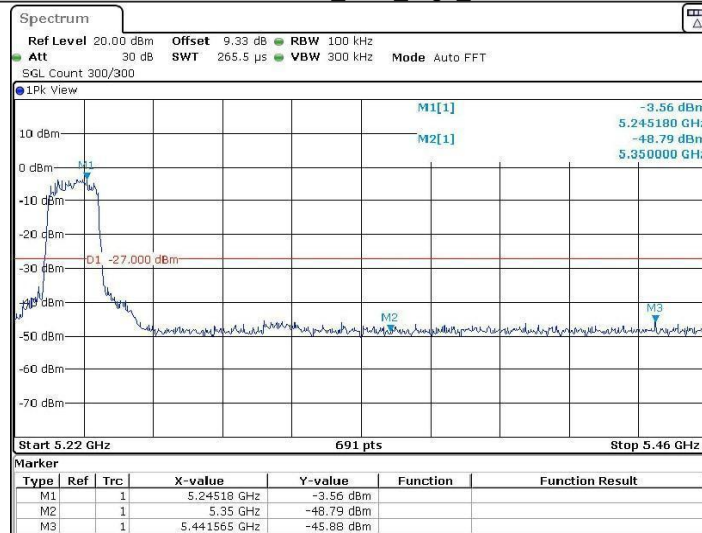


11N40SISO_Ant1_Low_5190

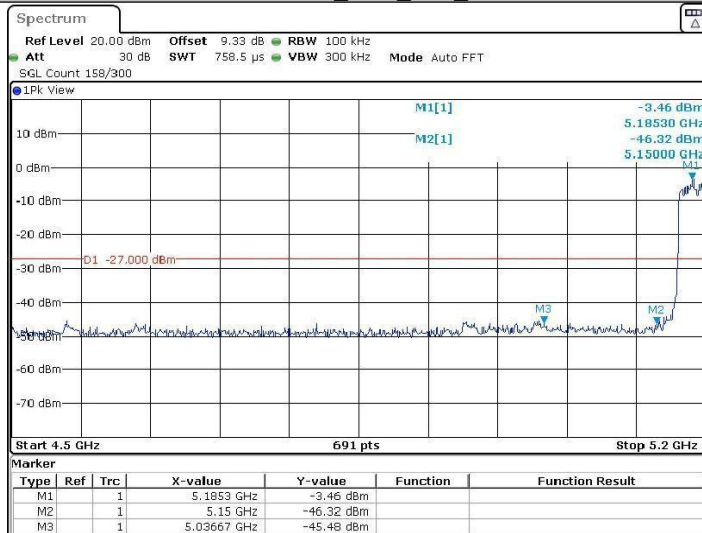

11N40SISO_Ant1_High_5230

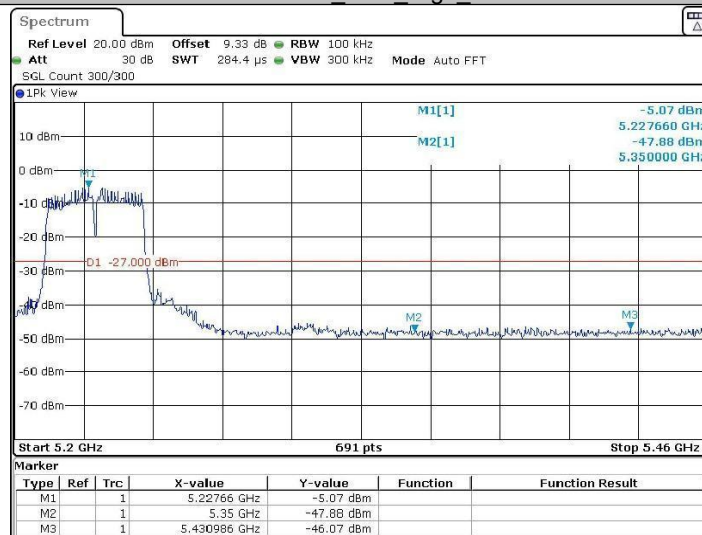


11AC20SISO_Ant1_Low_5180

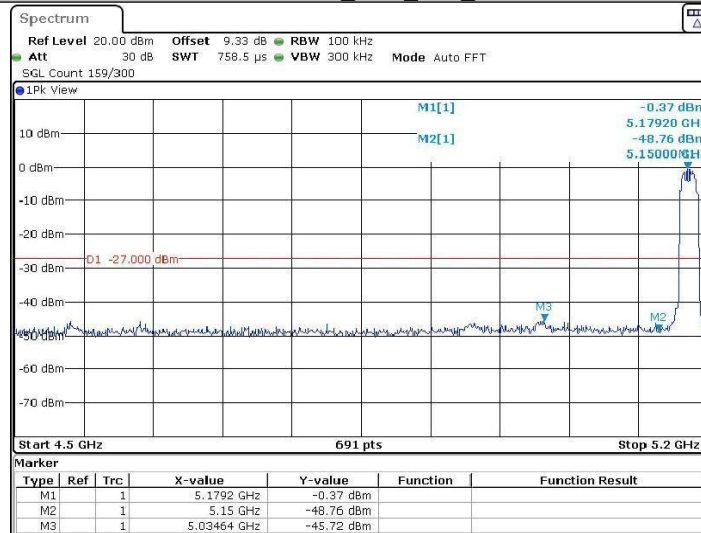


11AC20SISO_Ant1_High_5240




11AC40SISO_Ant1_Low_5190

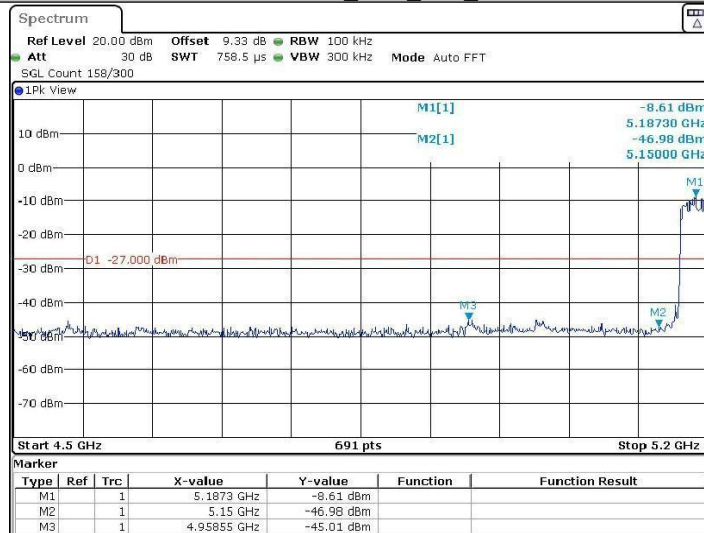

11AC40SISO_Ant1_High_5230

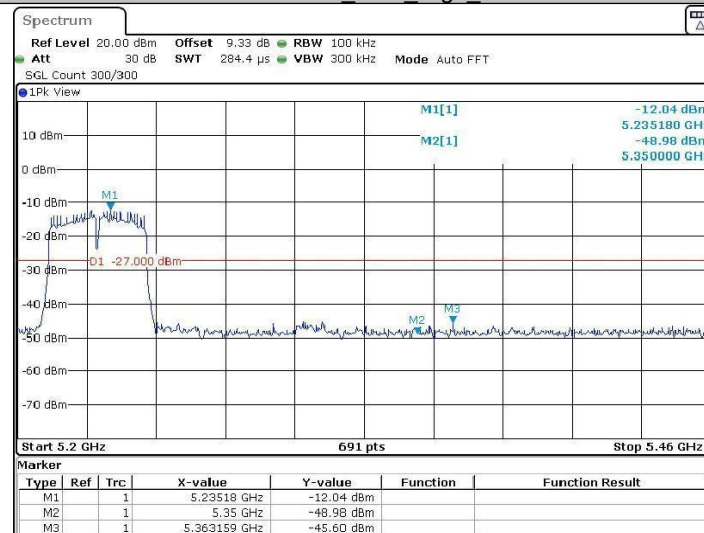


11AC80SISO_Ant1_Low_5210

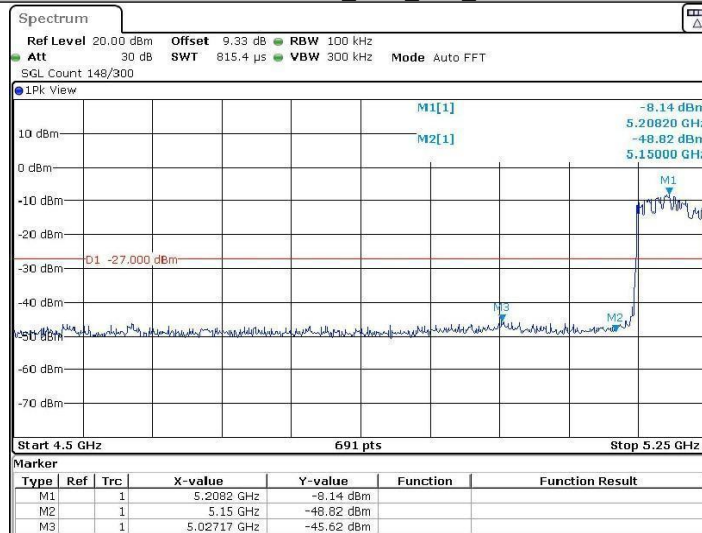


11AC80SISO_Ant1_High_5210




11A_Ant2_Low_5180

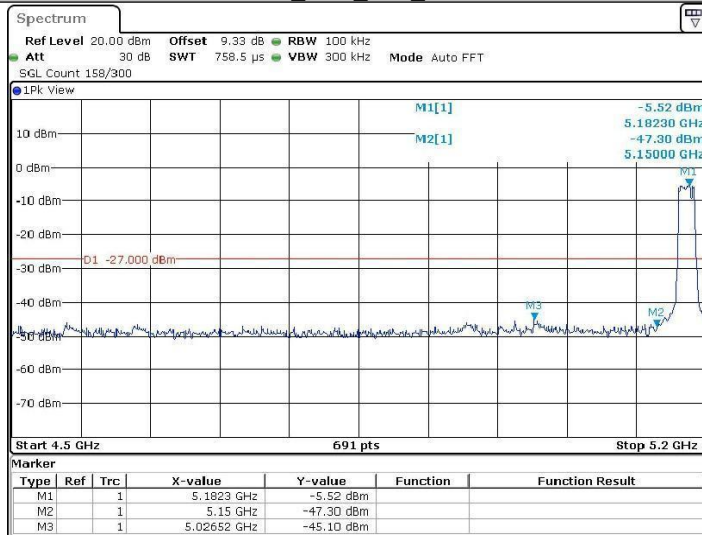


11A_Ant2_High_5240

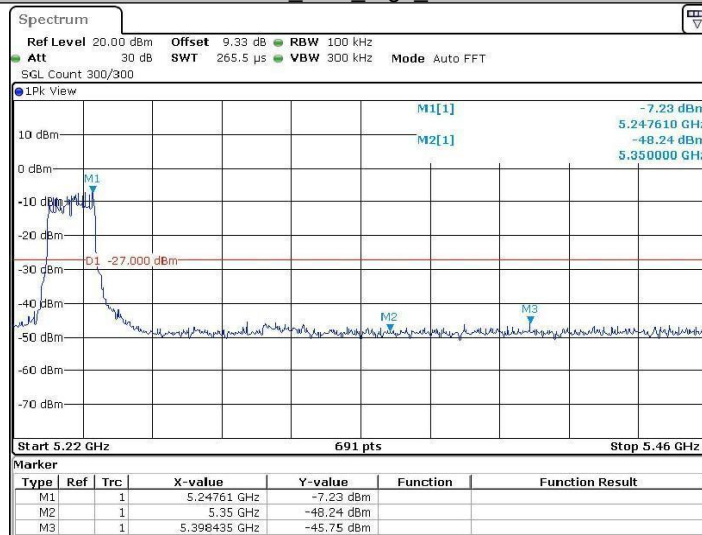


11N20SISO_Ant2_Low_5180

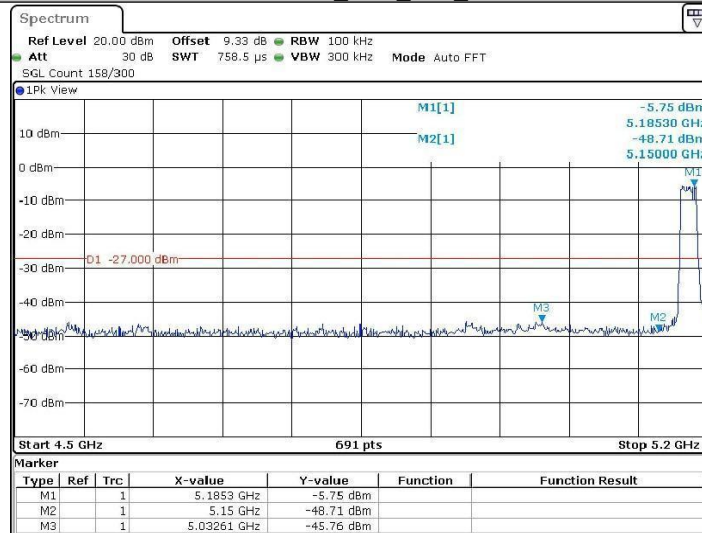


11N20SISO_Ant2_High_5240

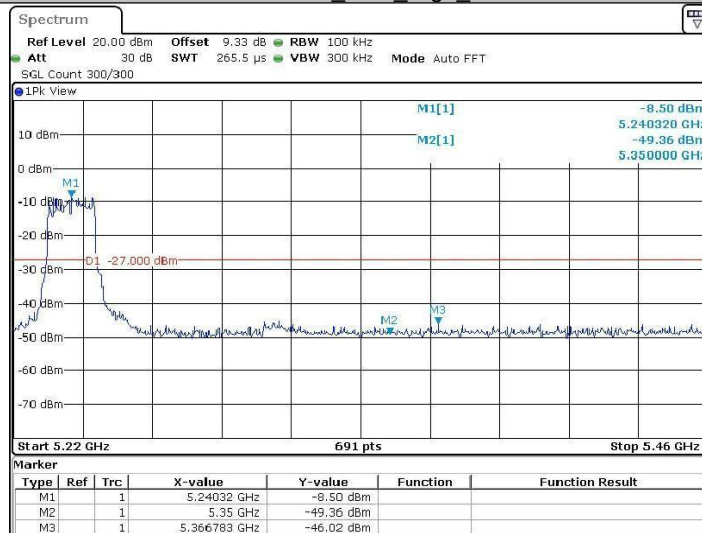


11N40SISO_Ant2_Low_5190

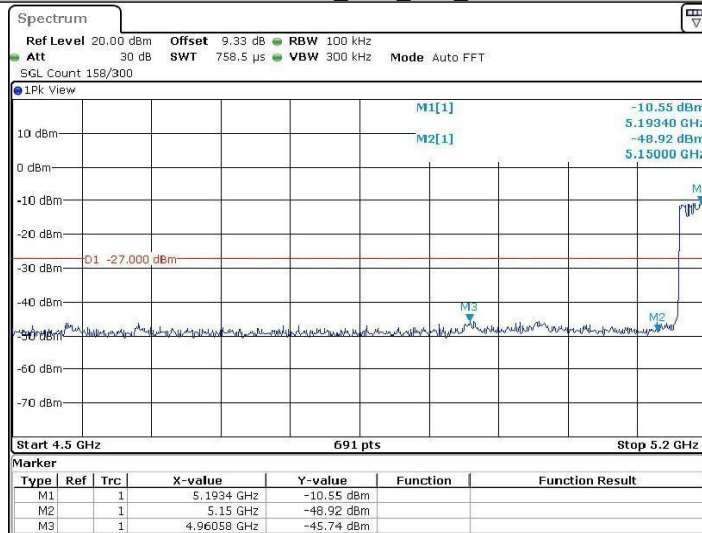


11N40SISO_Ant2_High_5230

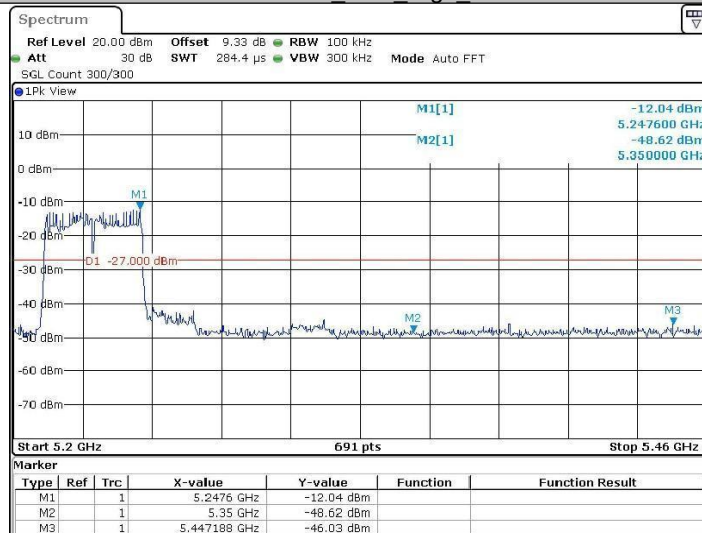


11AC20SISO_Ant2_Low_5180

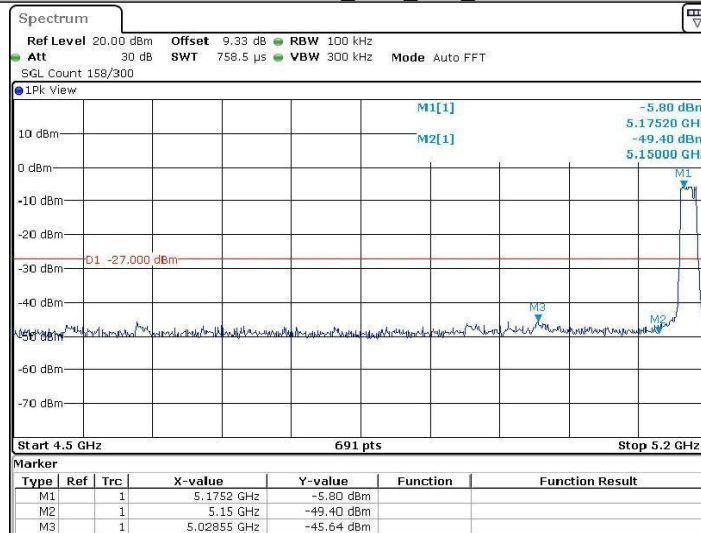


11AC20SISO_Ant2_High_5240

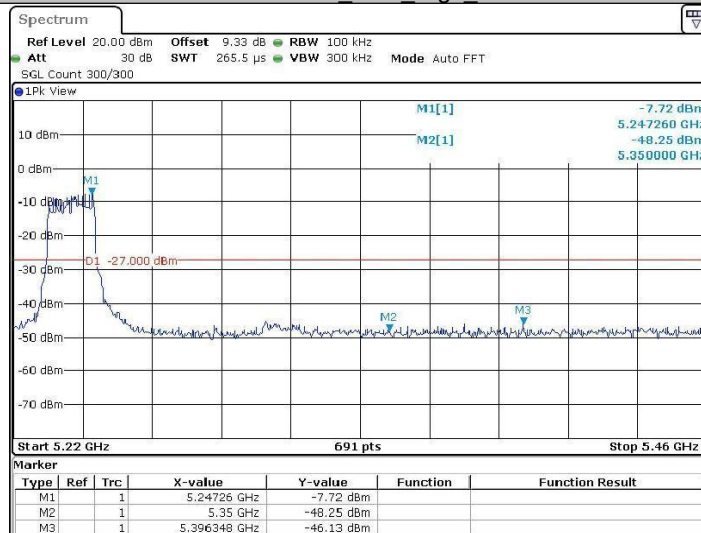


11AC40SISO_Ant2_Low_5190

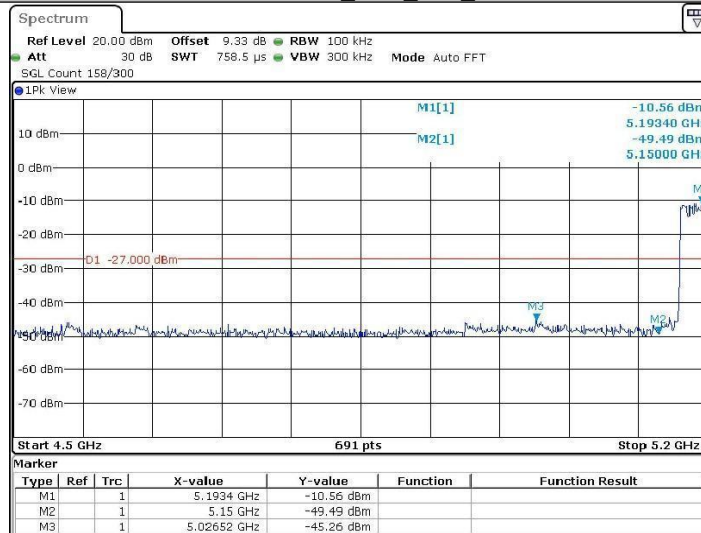


11AC40SISO_Ant2_High_5230

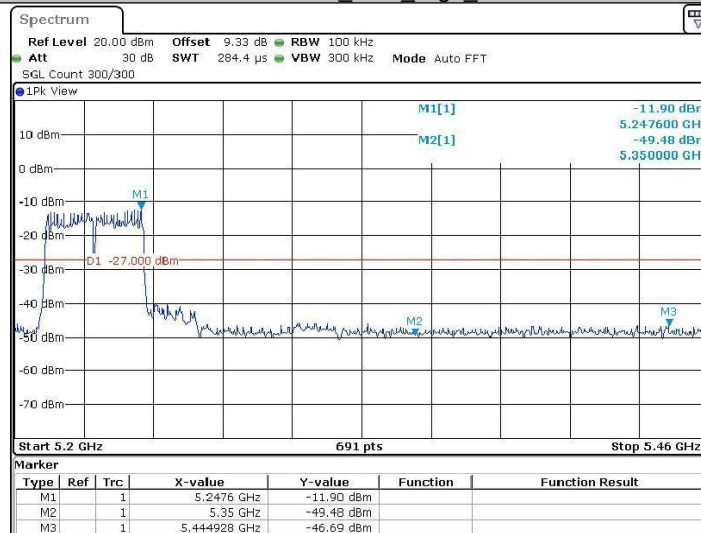

11AC80SISO_Ant2_Low_5210

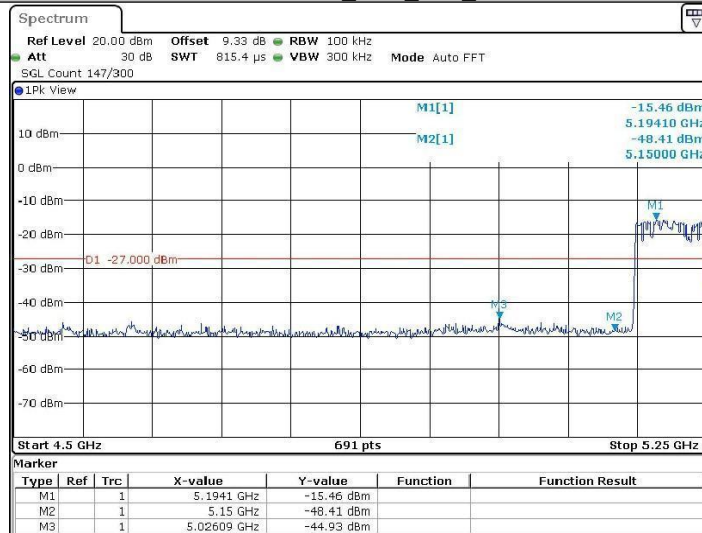

11AC80SISO_Ant2_High_5210

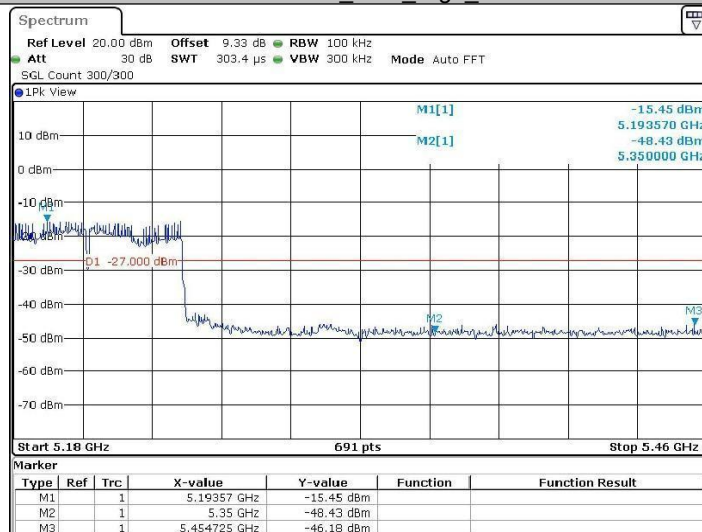


Appendix E): Frequency Stability

Test Requirement 47 CFR Part 15, Subpart C 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Test Setup Diagram

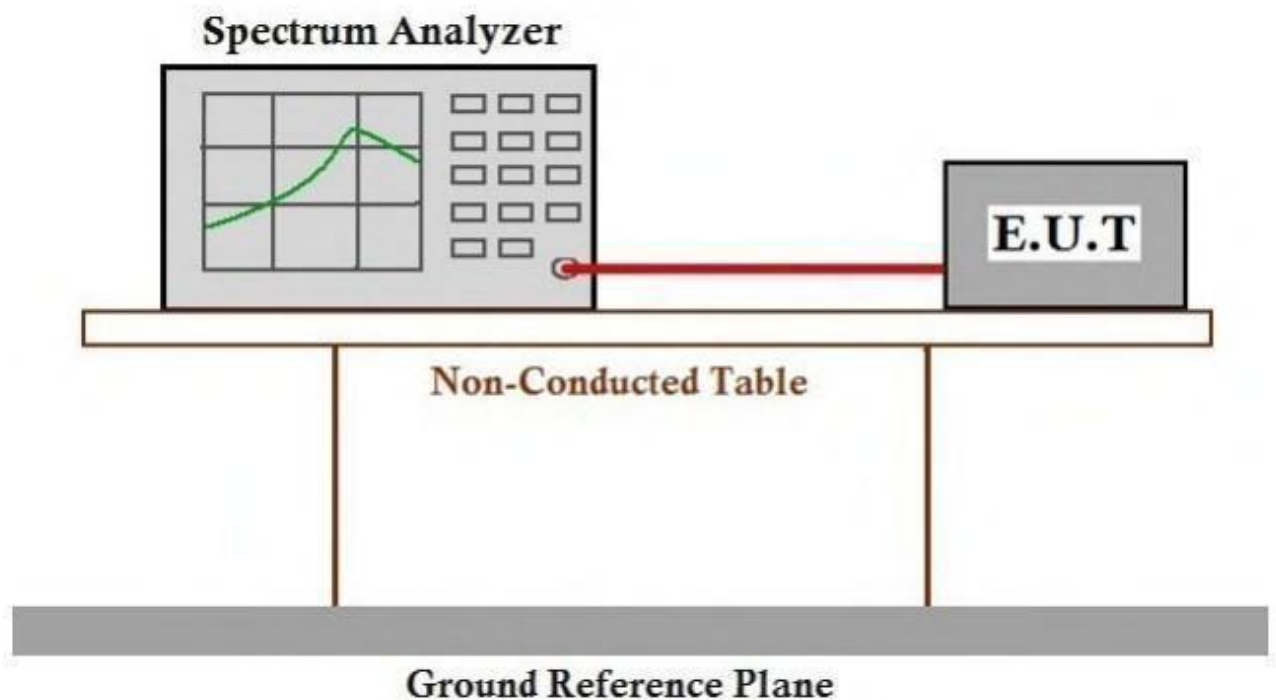

Measurement Data

Ant1

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp	Voltage	Measured Frequency	Frequency Drift
(°C)		(MHz)	(ppm)
45	VN	5240.06	11.45
40		5240.05	9.54
30		5240.03	5.73
20		5240.06	11.45
15		5240.04	7.63
10		5240.05	9.54
5		5240.05	9.54
0		5240.01	1.91

Frequency Stability Versus Temp.			
Operating Frequency: 5210 MHz			
Temp.	Voltage	Measured Frequency	Frequency Drift
		(MHz)	(ppm)
TN	VL	5210.03	5.76
	VN	5210.05	9.60
	VH	5210.02	3.84

Ant2

Frequency Stability Versus Temp.			
Operating Frequency: 5240 MHz			
Temp	Voltage	Measured Frequency	Frequency Drift
(°C)		(MHz)	(ppm)
45	VN	5240.03	5.725
40		5240.07	13.359
30		5240.06	11.450
20		5240.04	7.634
15		5240.02	3.817
10		5240.04	7.634
5		5240.01	1.908
0		5240.08	15.267

Frequency Stability Versus Temp.			
Operating Frequency: 5210 MHz			
Temp.	Voltage	Measured Frequency	Frequency Drift
		(MHz)	(ppm)
TN	VL	5210.05	9.597
	VN	5210.09	17.274
	VH	5210.04	7.678


Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

Appendix F): Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

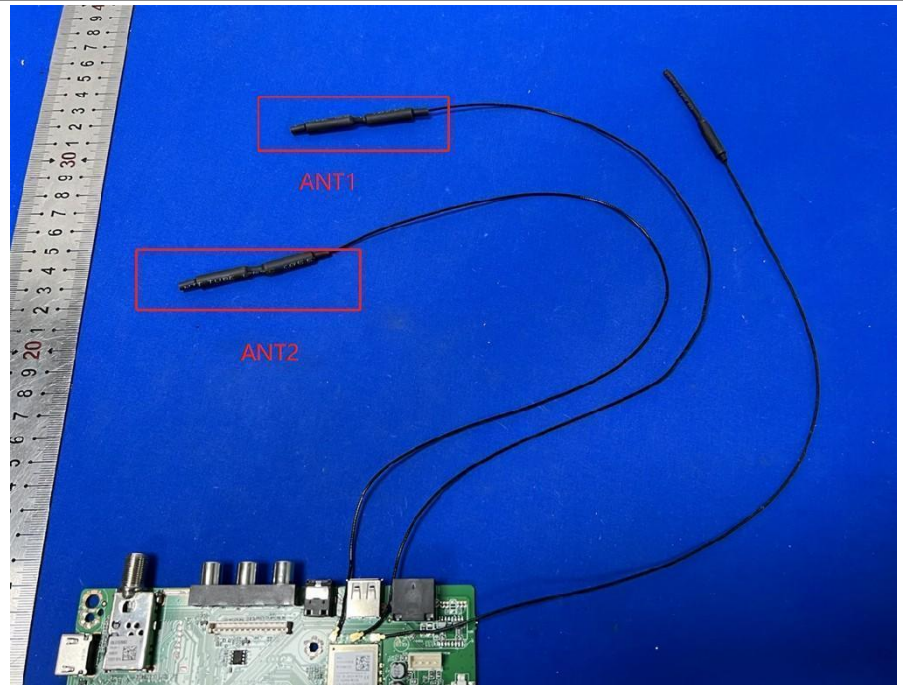

The antenna is Metal antenna.ANT1= 0.97 dBi,ANT2= 0.97 dBi.

Appendix G): Operation in the absence of information to the transmit

15.407(c) requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Operation in the absence of information to the transmit

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ASK message transmitting from remote device and verify whether it shall resend or discontinue transmission. (manufacturer declare)

Appendix H): AC Power Line Conducted Emission


Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency		Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

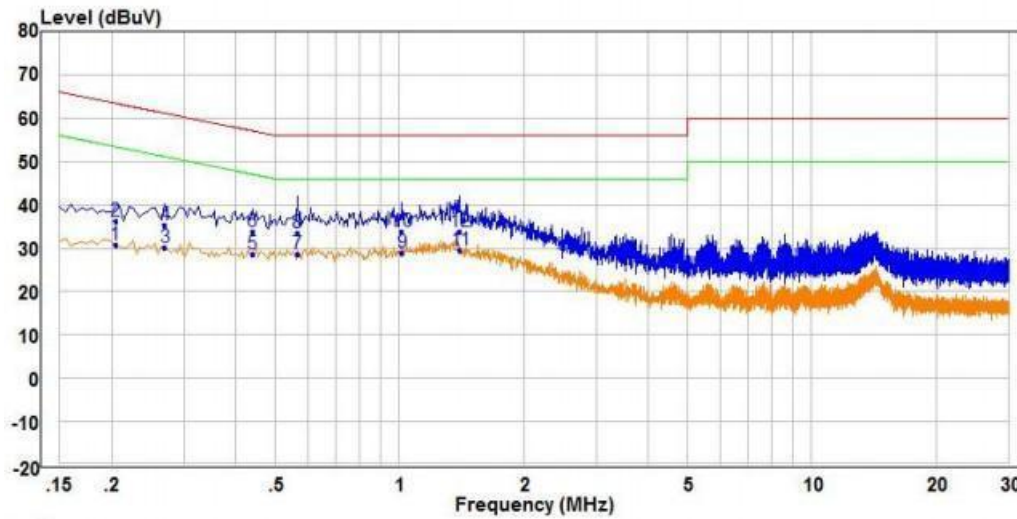

	Freq.	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	dBuV	dBuV	dBuV	dBuV	dBuV	dBuV		
1	0.21	21.23	9.51	30.84	53.41	-22.57	Average	Line
2	0.21	26.57	9.51	36.18	63.41	-27.23	QP	Line
3	0.27	20.71	9.42	30.23	51.12	-20.89	Average	Line
4	0.27	25.68	9.42	35.20	61.12	-25.92	QP	Line
5	0.44	19.01	9.55	28.66	47.06	-18.40	Average	Line
6	0.44	24.05	9.55	33.70	57.06	-23.36	QP	Line
7	0.57	18.92	9.60	28.69	46.00	-17.31	Average	Line
8	0.57	23.88	9.60	33.65	56.00	-22.35	QP	Line
9	1.02	19.33	9.64	29.07	46.00	-16.93	Average	Line
10	1.02	24.15	9.64	33.89	56.00	-22.11	QP	Line
11	1.40	18.79	10.52	29.43	46.00	-16.57	Average	Line
12	1.40	23.32	10.52	33.96	56.00	-22.04	QP	Line

Neutral line:

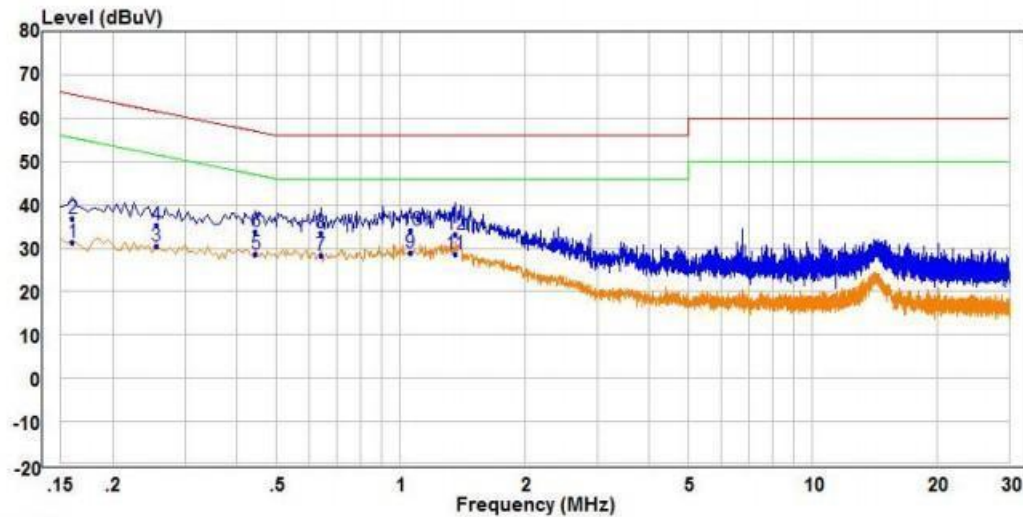

	Freq.	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	dBuV	dBuV	dBuV	dBuV	dBuV	dBuV		
1	0.16	21.74	9.58	31.42	55.46	-24.04	Average	Neutral
2	0.16	27.05	9.58	36.73	65.46	-28.73	QP	Neutral
3	0.26	20.94	9.43	30.47	51.59	-21.12	Average	Neutral
4	0.26	25.82	9.43	35.35	61.59	-26.24	QP	Neutral
5	0.45	18.97	9.55	28.62	46.97	-18.35	Average	Neutral
6	0.45	24.12	9.55	33.77	56.97	-23.20	QP	Neutral
7	0.64	18.52	9.60	28.36	46.00	-17.64	Average	Neutral
8	0.64	23.69	9.60	33.53	56.00	-22.47	QP	Neutral
9	1.06	19.31	9.60	29.01	46.00	-16.99	Average	Neutral
10	1.06	24.31	9.60	34.01	56.00	-21.99	QP	Neutral
11	1.36	18.87	9.60	28.59	46.00	-17.41	Average	Neutral
12	1.36	23.61	9.60	33.33	56.00	-22.67	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. The 6Mbps of rate of 802.11A_5240 is the worst case, only the worst data recorded in the report.

Appendix I): Restricted bands around fundamental frequency (Radiated Emission)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3cm)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Ant1:

Worse case mode:		802.11a(6Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	48.46	-2.74	45.72	74	-28.28	peak	H
5150	39.81	-2.74	37.07	54	-16.93	AVG	H
5150	48.22	6.84	55.06	74	-18.94	peak	V
5150	37.89	6.84	44.73	54	-9.27	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	41.75	13.02	54.77	74	-19.23	peak	H
5350	30.51	13.02	43.53	54	-10.47	AVG	H
5350	55.74	-2.77	52.97	74	-21.03	peak	V
5350	43.35	-2.77	40.58	54	-13.42	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	42.48	13.02	55.50	74	-18.50	peak	H
5150	30.45	13.02	43.47	54	-10.53	AVG	H
5150	57.40	-2.77	54.63	74	-19.37	peak	V
5150	43.26	-2.77	40.49	54	-13.51	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.54	6.84	57.38	74	-16.62	peak	H
5350	36.22	6.84	43.06	54	-10.94	AVG	H
5350	41.69	13.02	54.71	74	-19.29	peak	V
5350	30.69	13.02	43.71	54	-10.29	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.23	6.84	56.07	74	-17.93	peak	H
5150	35.86	6.84	42.70	54	-11.30	AVG	H
5150	43.45	13.02	56.47	74	-17.53	peak	V
5150	29.45	13.02	42.47	54	-11.53	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	49.80	-2.74	47.06	74	-26.94	peak	H
5350	39.49	-2.74	36.75	54	-17.25	AVG	H
5350	49.59	6.84	56.43	74	-17.57	peak	V
5350	39.89	6.84	46.73	54	-7.27	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.98	-2.74	47.24	74	-26.76	peak	H
5150	40.54	-2.74	37.80	54	-16.20	AVG	H
5150	48.04	6.84	54.88	74	-19.12	peak	V
5150	37.94	6.84	44.78	54	-9.22	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	42.75	13.02	55.77	74	-18.23	peak	H
5350	29.88	13.02	42.90	54	-11.10	AVG	H
5350	58.30	-2.77	55.53	74	-18.47	peak	V
5350	44.07	-2.77	41.30	54	-12.70	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	43.34	13.02	56.36	74	-17.64	peak	H
5150	31.25	13.02	44.27	54	-9.73	AVG	H
5150	56.65	-2.77	53.88	74	-20.12	peak	V
5150	43.96	-2.77	41.19	54	-12.81	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	49.94	6.84	56.78	74	-17.22	peak	H
5350	36.32	6.84	43.16	54	-10.84	AVG	H
5350	41.03	13.02	54.05	74	-19.95	peak	V
5350	31.22	13.02	44.24	54	-9.76	AVG	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	57.60	-9.29	48.31	74	-25.69	peak	H
5150	44.03	-9.29	34.74	54	-19.26	AVG	H
5150	58.13	-9.29	48.84	74	-25.16	peak	V
5150	46.17	-9.29	36.88	54	-17.12	AVG	V
5350	59.72	-9.39	50.33	74	-23.67	peak	H
5350	46.55	-9.39	37.16	54	-16.84	AVG	H
5350	59.57	-9.39	50.18	74	-23.82	peak	V
5350	46.81	-9.39	37.42	54	-16.58	AVG	V

Ant2:

Worse case mode:		802.11a(6Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.28	6.84	56.12	74	-17.88	peak	H
5150	39.15	6.84	45.99	54	-8.01	AVG	H
5150	43.14	13.02	56.16	74	-17.84	peak	V
5150	30.59	13.02	43.61	54	-10.39	AVG	V

Worse case mode:		802.11a(6Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	49.58	6.84	56.42	74	-17.58	peak	H
5350	37.46	6.84	44.30	54	-9.70	AVG	H
5350	43.43	13.02	56.45	74	-17.55	peak	V
5350	29.45	13.02	42.47	54	-11.53	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	50.58	6.84	57.42	74	-16.58	peak	H
5150	40.31	6.84	47.15	54	-6.85	AVG	H
5150	43.13	13.02	56.15	74	-17.85	peak	V
5150	31.86	13.02	44.88	54	-9.12	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	48.98	6.84	55.82	74	-18.18	peak	H
5350	37.11	6.84	43.95	54	-10.05	AVG	H
5350	43.07	13.02	56.09	74	-17.91	peak	V
5350	30.18	13.02	43.20	54	-10.80	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	37.80	6.84	44.64	54	-9.36	peak	H
5150	42.83	13.02	55.85	74	-18.15	AVG	H
5150	31.91	13.02	44.93	54	-9.07	peak	V
5150	56.81	-2.77	54.04	74	-19.96	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.10	6.84	56.94	74	-17.06	peak	H
5350	37.84	6.84	44.68	54	-9.32	AVG	H
5350	41.39	13.02	54.41	74	-19.59	peak	V
5350	29.20	13.02	42.22	54	-11.78	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		36	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	50.16	6.84	57.00	74	-17.00	peak	H
5150	39.93	6.84	46.77	54	-7.23	AVG	H
5150	41.91	13.02	54.93	74	-19.07	peak	V
5150	31.83	13.02	44.85	54	-9.15	AVG	V

Worse case mode:		802.11ac(HT20)(6.5Mbps)		Test channel:		48	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	49.19	6.84	56.03	74	-17.97	peak	H
5350	37.71	6.84	44.55	54	-9.45	AVG	H
5350	41.54	13.02	54.56	74	-19.44	peak	V
5350	30.90	13.02	43.92	54	-10.08	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		38	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.66	6.84	56.50	74	-17.50	peak	H
5150	39.06	6.84	45.90	54	-8.10	AVG	H
5150	41.25	13.02	54.27	74	-19.73	peak	V
5150	30.14	13.02	43.16	54	-10.84	AVG	V

Worse case mode:		802.11ac(VHT40)(13.5Mbps)		Test channel:		46	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	50.19	6.84	57.03	74	-16.97	peak	H
5350	38.31	6.84	45.15	54	-8.85	AVG	H
5350	41.11	13.02	54.13	74	-19.87	peak	V
5350	30.89	13.02	43.91	54	-10.09	AVG	V

Worse case mode:		802.11ac(VHT80)(29.3Mbps)		Test channel:		42	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	55.67	-2.21	53.46	74	-20.54	peak	H
5150	43.36	-2.21	41.15	54	-12.85	AVG	H
5150	56.06	-2.21	53.85	74	-20.15	peak	V
5150	42.83	-2.21	40.62	54	-13.38	AVG	V
5350	48.90	6.63	55.53	74	-18.47	peak	H
5350	35.66	6.63	42.29	54	-11.71	AVG	H
5350	50.25	6.63	56.88	74	-17.12	peak	V
5350	38.41	6.63	45.04	54	-8.96	AVG	V

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix J): Radiated Spurious Emissions


Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below: a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Above 1GHz test procedure as below: g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre) h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Test result: PASS					

Test Data:

Radiated Emission below 1GHz


Ant1:

30MHz~1GHz		
Test mode:	Transmitting (802.11a 36CH)	Vertical

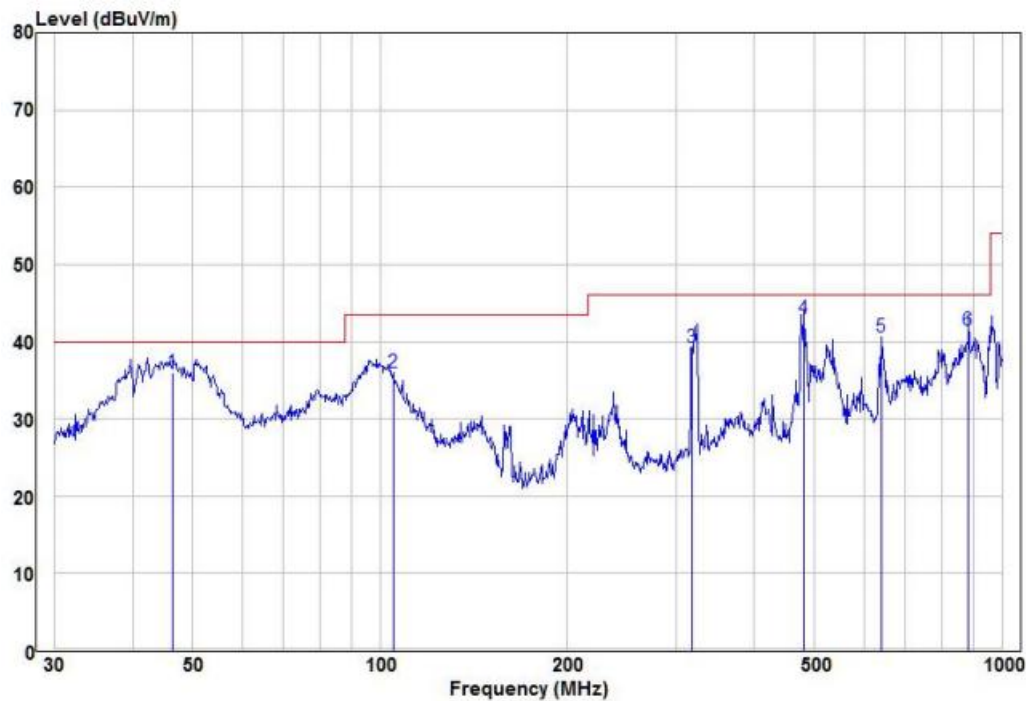

		Read		Limit	Over		
	Freq	Level	Factor	Level	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	qp	46.50	26.24	9.73	35.97	40.00	-4.03 QP
2		104.90	25.60	10.41	36.01	43.50	-7.49 Peak
3		317.70	25.09	14.16	39.25	46.00	-6.75 Peak
4	pp	480.53	25.30	17.68	42.98	46.00	-3.02 Peak
5		640.61	21.04	19.51	40.55	46.00	-5.45 Peak
6		884.50	17.53	23.90	41.43	46.00	-4.57 QP


Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

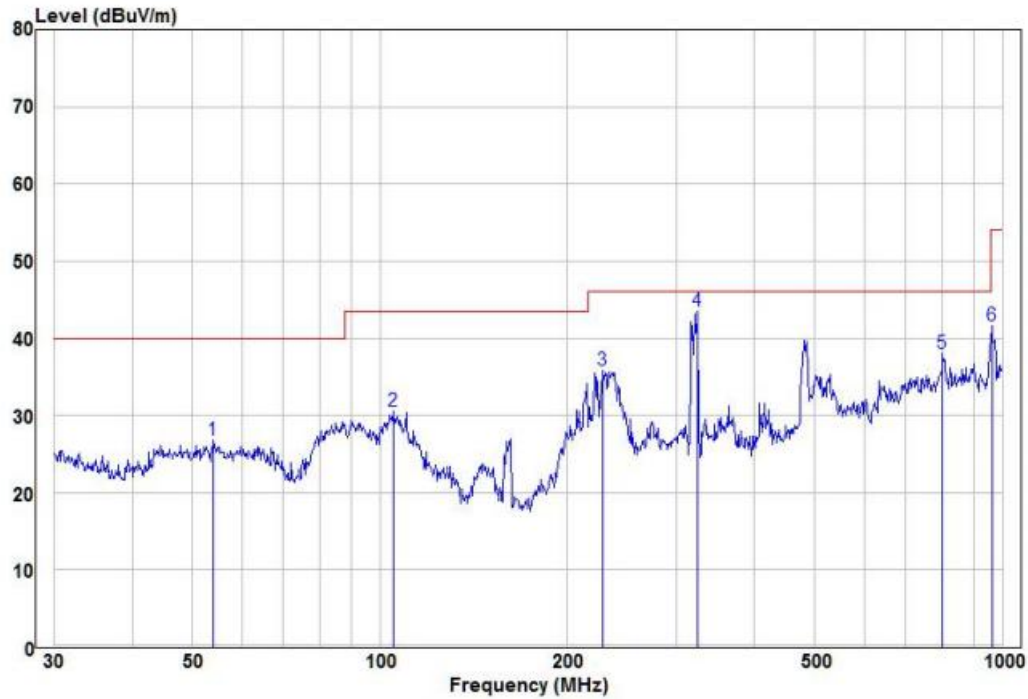

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	19.49	7.24	26.73	40.00	-13.27	Peak	HORIZONTAL
2	104.90	20.14	10.41	30.55	43.50	-12.95	Peak	HORIZONTAL
3	228.49	25.61	10.24	35.85	46.00	-10.15	Peak	HORIZONTAL
4 pp	324.46	29.19	14.32	43.51	46.00	-2.49	Peak	HORIZONTAL
5	801.79	15.31	22.67	37.98	46.00	-8.02	Peak	HORIZONTAL
6	962.16	17.48	24.08	41.56	54.00	-12.44	Peak	HORIZONTAL


Ant2:

30MHz~1GHz		
Test mode:	Transmitting (802.11a 36CH)	Vertical

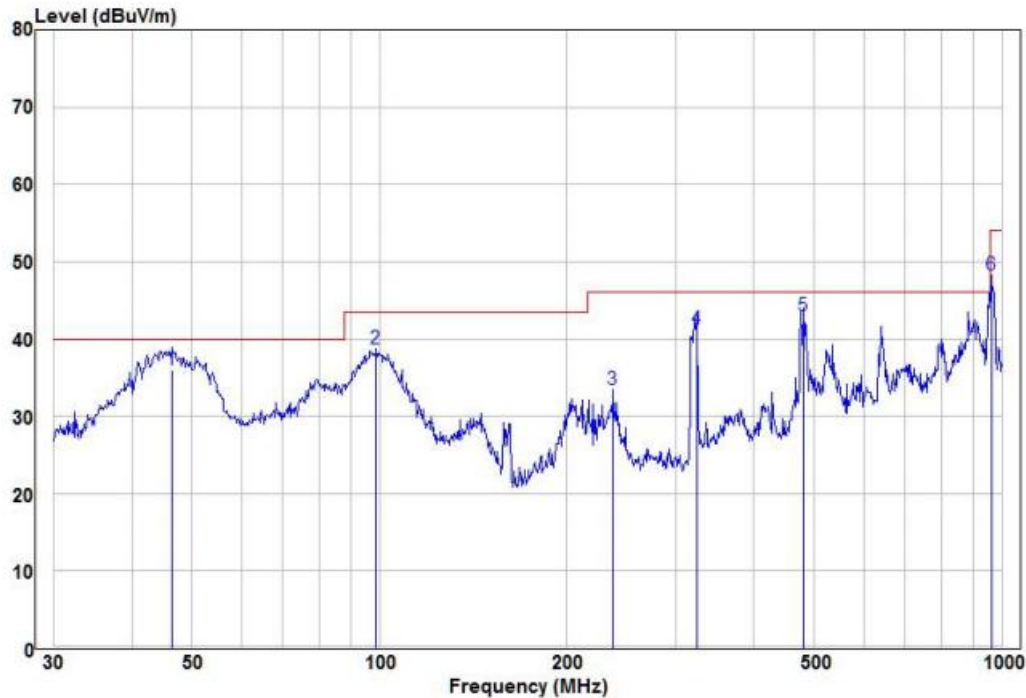

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	46.50	26.24	9.73	35.97	40.00	-4.03	QP	VERTICAL
2 pk	98.83	28.09	10.58	38.67	43.50	-4.83	Peak	VERTICAL
3	237.48	22.20	11.28	33.48	46.00	-12.52	Peak	VERTICAL
4	324.46	26.99	14.32	41.31	46.00	-4.69	QP	VERTICAL
5 pp	480.53	25.30	17.68	42.98	46.00	-3.02	QP	VERTICAL
6	962.16	24.20	24.08	48.28	54.00	-5.72	Peak	VERTICAL


Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

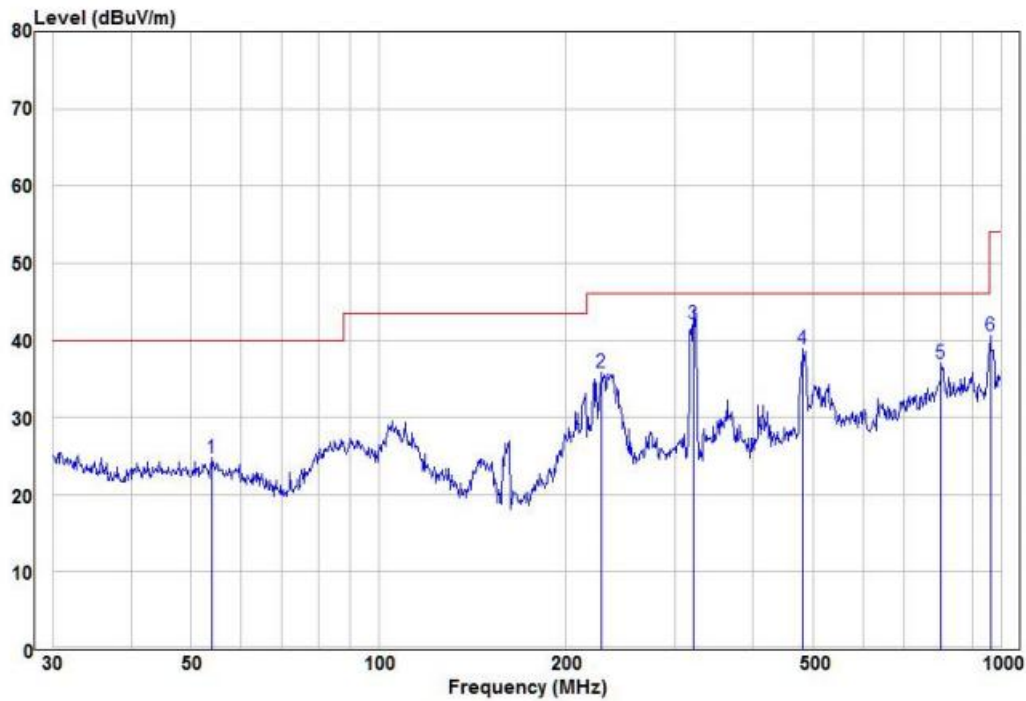

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	17.49	7.24	24.73	40.00	-15.27	Peak	HORIZONTAL
2	228.49	25.61	10.24	35.85	46.00	-10.15	Peak	HORIZONTAL
3 pp	319.94	27.88	14.22	42.10	46.00	-3.90	QP	HORIZONTAL
4 pk	480.53	21.14	17.68	38.82	46.00	-7.18	Peak	HORIZONTAL
5	801.79	14.31	22.67	36.98	46.00	-9.02	Peak	HORIZONTAL
6	962.16	16.48	24.08	40.56	54.00	-13.44	Peak	HORIZONTAL


Ant1+Ant2:

30MHz~1GHz		
Test mode:	Transmitting (802.11n 36CH)	Vertical

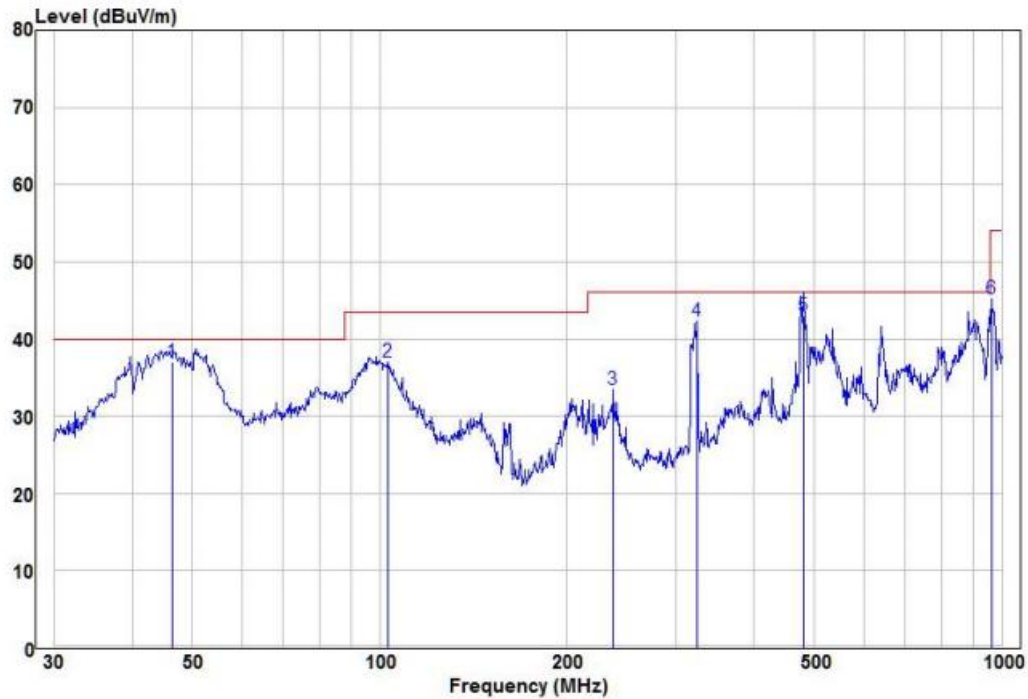

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	46.50	27.24	9.73	36.97	40.00	-3.03	QP	VERTICAL
2	103.08	26.49	10.51	37.00	43.50	-6.50	Peak	VERTICAL
3	237.48	22.20	11.28	33.48	46.00	-12.52	Peak	VERTICAL
4 pk	324.46	27.99	14.32	42.31	46.00	-3.69	Peak	VERTICAL
5 pp	480.53	25.30	17.68	42.98	46.00	-3.02	QP	VERTICAL
6	962.16	21.20	24.08	45.28	54.00	-8.72	Peak	VERTICAL

Test mode:	Transmitting (802.11n 36CH)	Horizontal
------------	-----------------------------	------------

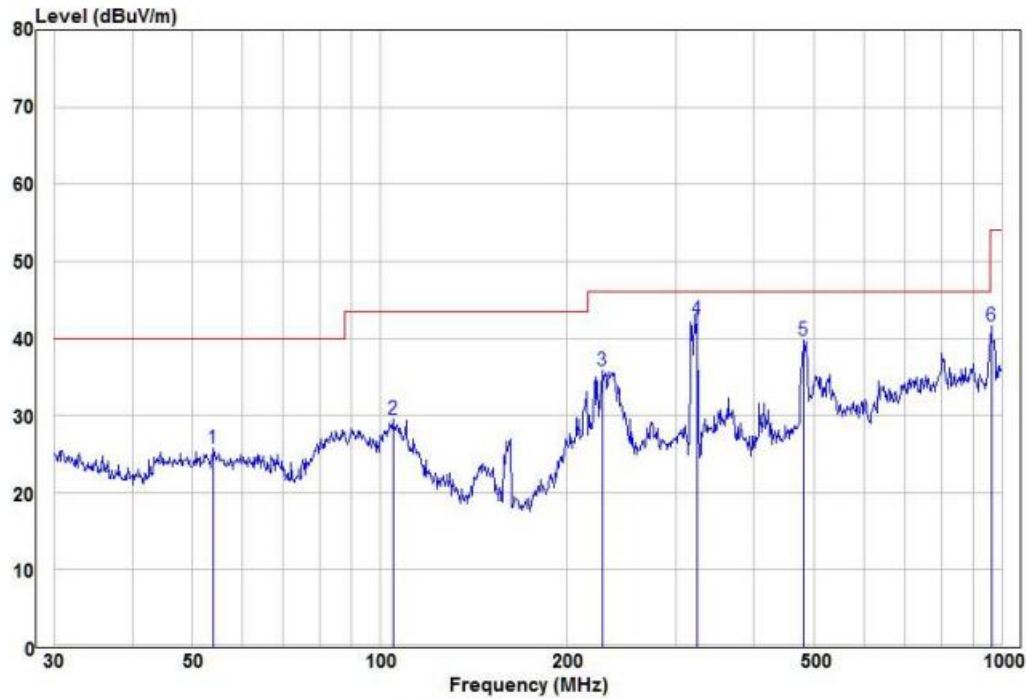

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	54.07	18.49	7.24	25.73	40.00	-14.27	Peak	HORIZONTAL
2	104.90	19.14	10.41	29.55	43.50	-13.95	Peak	HORIZONTAL
3	228.49	25.61	10.24	35.85	46.00	-10.15	Peak	HORIZONTAL
4 pp	324.46	28.19	14.32	42.51	46.00	-3.49	Peak	HORIZONTAL
5	480.53	22.14	17.68	39.82	46.00	-6.18	Peak	HORIZONTAL
6	962.16	17.48	24.08	41.56	54.00	-12.44	Peak	HORIZONTAL

Transmitter Emission above 1GHz

Ant1:

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	55.66	-2.21	53.45	74	-20.55	peak	H
10360	42.88	-2.21	40.67	54	-13.33	AVG	H
15540	49.04	6.63	55.67	74	-18.33	peak	H
15540	38.30	6.63	44.93	54	-9.07	AVG	H
10360	43.52	16.05	59.57	74	-14.43	peak	V
10360	30.08	16.05	46.13	54	-7.87	AVG	V
15540	55.66	-2.21	53.45	74	-20.55	peak	V
15540	42.88	-2.21	40.67	54	-13.33	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	56.20	-2.21	53.99	74	-20.01	peak	H
10480	42.14	-2.21	39.93	54	-14.07	AVG	H
15720	48.32	6.63	54.95	74	-19.05	peak	H
15720	37.96	6.63	44.59	54	-9.41	AVG	H
10480	41.38	16.05	57.43	74	-16.57	peak	V
10480	27.80	16.05	43.85	54	-10.15	AVG	V
15720	56.20	-2.21	53.99	74	-20.01	peak	V
15720	42.14	-2.21	39.93	54	-14.07	AVG	V

Ant2:

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	56.30	-2.21	54.09	74	-19.91	peak	H
10360	42.19	-2.21	39.98	54	-14.02	AVG	H
15540	48.73	6.63	55.36	74	-18.64	peak	H
15540	37.87	6.63	44.50	54	-9.50	AVG	H
10360	41.43	16.05	57.48	74	-16.52	peak	V
10360	28.37	16.05	44.42	54	-9.58	AVG	V
15540	58.09	-2.21	55.88	74	-18.12	peak	V
15540	44.14	-2.21	41.93	54	-12.07	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	58.24	-2.21	56.03	74	-17.97	peak	H
10480	42.46	-2.21	40.25	54	-13.75	AVG	H
15720	49.49	6.63	56.12	74	-17.88	peak	H
15720	36.05	6.63	42.68	54	-11.32	AVG	H
10480	42.69	16.05	58.74	74	-15.26	peak	V
10480	30.30	16.05	46.35	54	-7.65	AVG	V
15720	57.62	-2.21	55.41	74	-18.59	peak	V
15720	43.01	-2.21	40.80	54	-13.20	AVG	V

Ant1+Ant2:

Test mode: 802.11n20				Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	56.63	-2.21	54.42	74	-19.58	peak	H
10360	41.80	-2.21	39.59	54	-14.41	AVG	H
15540	49.70	6.63	56.33	74	-17.67	peak	H
15540	37.30	6.63	43.93	54	-10.07	AVG	H
10360	41.57	16.05	57.62	74	-16.38	peak	V
10360	30.52	16.05	46.57	54	-7.43	AVG	V
15540	58.42	-2.21	56.21	74	-17.79	peak	V
15540	44.15	-2.21	41.94	54	-12.06	AVG	V


Test mode: 802.11n20				Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	56.26	-2.21	54.05	74	-19.95	peak	H
10480	42.75	-2.21	40.54	54	-13.46	AVG	H
15720	49.59	6.63	56.22	74	-17.78	peak	H
15720	36.88	6.63	43.51	54	-10.49	AVG	H
10480	43.51	16.05	59.56	74	-14.44	peak	V
10480	29.45	16.05	45.50	54	-8.50	AVG	V
15720	56.12	-2.21	53.91	74	-20.09	peak	V
15720	43.35	-2.21	41.14	54	-12.86	AVG	V

Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

8 Photographs - EUT Test Setup


9KHz~30MHz:

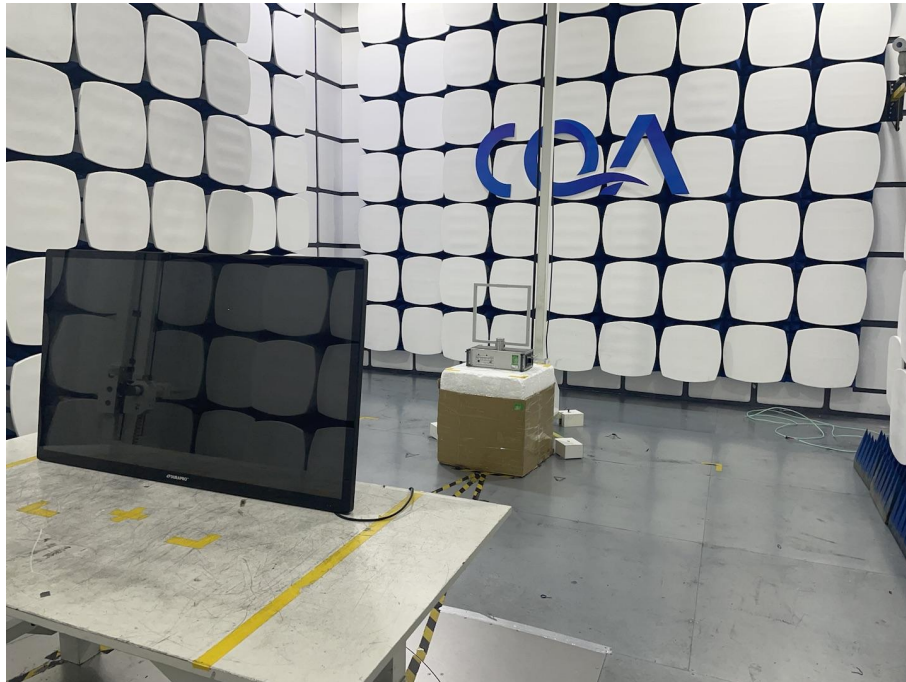

30MHz~1GHz:



Above 1GHz:

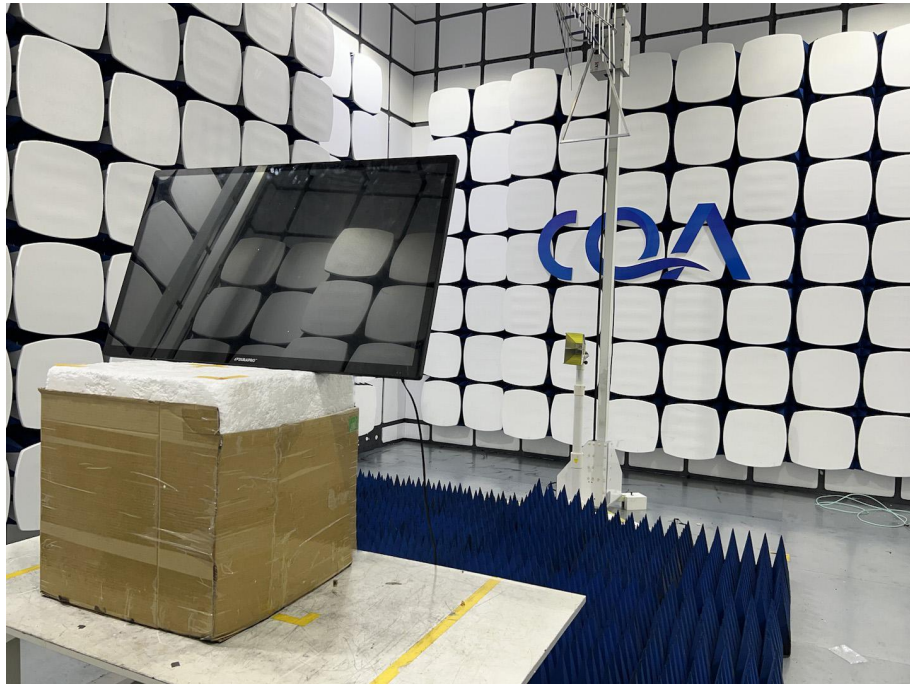

8.1 Conducted Emission



9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20220901608E-01.

*** END OF REPORT ***