

Give birth to Article Letter of recognition Book



Specificat	HG20250829001
Effective	

Customer's name	Two-dimensional four-image intelligent technology limited liability company
Product type	QI2Coil
Honggui material number	42.5*0.80pen double groove with hole/0.08*80Multi-stranded wire
Customer material number	

[☒ The new version is released , ☐ Version revision] [This specification contains a total ofTwo Page] [RoHS Compliant Parts]

Weave	Check	Ratify
Peng Jianji		

Anfu Honggui Electronics Co., Ltd.

Building2,New Energy Industrial park,South Area of Anfu High-tech Industrial park,Ji'an City,Jiangxi Province

Please be sure to sign and return this acknowledgement within one week after the customer receives it.Overdue shall be deemed to be implemented according to the standard of this letter of recognition at the time of production.

[Customer approval]

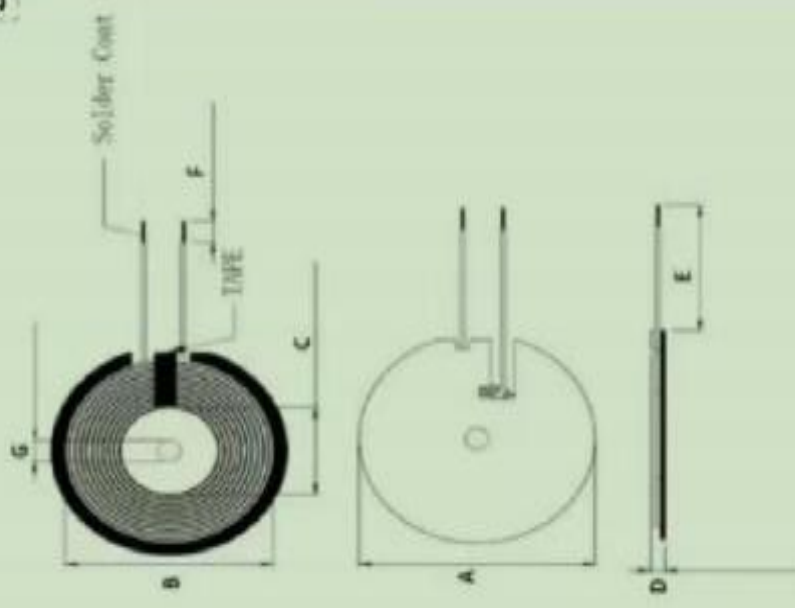
Date :

Recognition status: ☐ Fully admit ☐

Conditional recognition ☐ Refuse to admit

Ratify	Check	Re-inspection	Examine

Explain:

Customer's name		Two-dimensional four-image intelligent technology limited liability company		Customer material number															
Honggui material number		42.5*0.8open double groove with hole/0.08*80Multi-stranded wire		Specification HG20250829001 number		Edition 01													
<div>★ 外形尺寸 External 1</div> 							<div>(Unit: mm)</div> <table><tr><td>A</td><td>42.5 ±0.5</td></tr><tr><td>B</td><td>40.0 ±1</td></tr><tr><td>C</td><td>20.5 ±0.5</td></tr><tr><td>D</td><td>2.1±0.2</td></tr><tr><td>E</td><td>15±2</td></tr><tr><td>F</td><td>2 ±1</td></tr></table> <div>(1)Wire diameter: 0.08*80P silk-wrapped self-adhesive copper wire (2)The number of winding coils:11 TS (3)Whether the starting and ending lines intersect :Yes (4)Coil packageSix millimetersWide high-temperature tape (5)The coil and the magnetic sheet should be pasted in the stering. Six (6)Diameter of the middle of the coil20MMThickness1.0 millimetreRound piece</div>	A	42.5 ±0.5	B	40.0 ±1	C	20.5 ±0.5	D	2.1±0.2	E	15±2	F	2 ±1
A	42.5 ±0.5																		
B	40.0 ±1																		
C	20.5 ±0.5																		
D	2.1±0.2																		
E	15±2																		
F	2 ±1																		
Parameter	Specifications			Test conditions	Test instrument														
L0	7.9 ± 0.3 μH			100K Hz/1V	■TH181														
Q	>30 minutes			100K Hz/1V	■TH181														
DCR.	<60 MΩ			@ twenty five℃	■CH-502														
Bill of materials :																			
Serials																			
1	Materials																		
2	Magnetic sheet	20*1.0Roundpiece		PC95 Strongzinc															
3	Magnetic sheet	42.5*0.8Double slots with holes		PC95 Strongzinc															
4	Copper wire	0.08*80P		Silk-wrapped self-adhesive copper wire															
5	High-temperat uret ape	6MM		Eco-friendiy adhesive tape															
6	Tin	High temperatuer tinbar		Thousand island environmental tin															
7	Glue	White glues		Eco-friendly adhesive															
AUTHOR		CHECK		APPROVE															
pengjianji																			