



Full

TEST REPORT

No. I20D00025-SRD06

For

Client: ClearCellular, Limited.

Production: Smart Phone

Model Name: ClearPHONE 420

Brand Name: ClearCellular

FCC ID: 2AVSK-420

Hardware Version: K6307Q-01

Software Version: K6307QACL.FHDJ.P0.ANASAPA9DATJDFTL.0

225_1140.V2.02

Issued date: 2020-04-26

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I20D00025-SRD06	00	2020-04-15	Initial creation of test report
I20D00025-SRD06	01	2020-04-26	First modification of test report

CONTENTS

1.	TEST LABORATORY	6
1.1.	TESTING LOCATION	6
1.2.	TESTING ENVIRONMENT	6
1.3.	PROJECT DATA.....	6
1.4.	SIGNATURE	6
2.	CLIENT INFORMATION	7
2.1.	APPLICANT INFORMATION	7
2.2.	MANUFACTURER INFORMATION	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4.	REFERENCE DOCUMENTS.....	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
5.	TEST RESULTS.....	10
5.1.	SUMMARY OF TEST RESULTS.....	10
5.2.	STATEMENTS.....	12
6.	TEST EQUIPMENT UTILIZED	13
7.	TEST ENVIRONMENT	15
8.	MEASUREMENT UNCERTAINTY	16
ANNEX A.	MEASUREMENT RESULTS.....	17
ANNEX A.1.	OUTPUT POWER	17
ANNEX A.2.	EMISSION LIMIT	36
ANNEX A.3.	FREQUENCY STABILITY	46

ANNEX A.4.	OCCUPIED BANDWIDTH	51
ANNEX A.5.	EMISSION BANDWIDTH.....	66
ANNEX A.6.	BAND EDGE COMPLIANCE.....	80
ANNEX A.7.	CONDUCTED SPURIOUS EMISSION	91
ANNEX A.8.	PEAK-TO-AVERAGE POWER RATIO	94
ANNEX B.	DEVIATIONS FROM PRESCRIBED TEST METHODS.....	96
ANNEX C.	DETAILED TEST RESULTS	97
ANNEX C.1.	MAIN TERMS	97
ANNEX C.2.	TERMS USED IN CONDITION COLUMN	97
ANNEX C.3.	TERMS USED IN VERDICT COLUMN.....	97
ANNEX C.4.	TERMS USED IN NOTE COLUMN	97
ANNEX D.	ACCREDITATION CERTIFICATE.....	98

1. Test Laboratory

1.1. Testing Location

Company Name	ECIT Shanghai, East China Institute of Telecommunications
Address	Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	(+86)-021-63843300
FCC registration No	CN1177


1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	25%-75%

1.3. Project data

Project Leader	Zhang Heng
Testing Start Date	2020-03-11
Testing End Date	2020-03-20

1.4. Signature




Liu Yan

(Prepared this test report)



Fan Songyan

(Reviewed this test report)



Zheng Zhongbin

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	ClearCellular, Limited.
Address	4764/24B Moorefield Rd Johnsonville Wellington 6037-227 New Zealand
Telephone	+1.801.361.6453
Postcode	/

2.2. Manufacturer Information

Company Name	COOSEA GROUP (HK) COMPANY LIMITED
Address	UNIT 5-6 16F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIM SHA TSUI KL HONGKONG
Telephone	86-0755-3397 1000
Postcode	/

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Production	Smart Phone
Model name	ClearPHONE 420
LTE Frequency Band	Band 2/4/5/7/12/13/17
Extreme Temperature	0/+45°C
Nominal Voltage	3.85V
Extreme High Voltage	4.40 V
Extreme Low Voltage	3.50V
Maximum of Antenna Gain	LTE Band2:0.8dBi; LTE Band4:0.8dBi; LTE Band5:-0.8dBi; LTE Band7: 0.8dBi; LTE Band12:- 2.8dBi; LTE Band13:-2.8dBi; LTE Band17:-2.8dBi

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N01	869899033450797 869899033450805	K6307Q-01	K6307QACL.FHDJ.P0.ANAS APA9DATJDFTL.0225_1140. V2.02	2020-03-09
N02	869899033450557 869899033450565	K6307Q-01	K6307QACL.FHDJ.P0.ANAS APA9DATJDFTL.0225_1140. V2.02	2020-03-09
N03	869899033451274 869899033451282	K6307Q-01	K6307QACL.FHDJ.P0.ANAS APA9DATJDFTL.0225_1140. V2.02	2020-03-09
N05	869899033450813 869899033450821	K6307Q-01	K6307QACL.FHDJ.P0.ANAS APA9DATJDFTL.0225_1140. V2.02	2020-03-09
N08	869899033450854 869899033450862	K6307Q-01	K6307QACL.FHDJ.P0.ANAS APA9DATJDFTL.0225_1140. V2.02	2020-03-09

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	2018-10-01
FCC Part 22	PUBLIC MOBILE SERVICES	2018-10-01
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2018-10-01
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	2018-10-01
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01

5. Test Results

5.1. Summary of Test Results

LTE Band 2

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	P
2	Emission Limit	24.238(a), 2.1051	A.2	P
3	Frequency Stability	24.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	24.238(a)	A.5	P
6	Band Edge Compliance	24.238(a)	A.6	P
7	Conducted Spurious Emission	24.238, 2.1057	A.7	P
8	Peak to Average Power Ratio	24.232 (d)	A.8	P

LTE Band 4

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(d)(4)	A.1	P
2	Emission Limit	27.53(h), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(h)	A.5	P
6	Band Edge Compliance	27.53(h)	A.6	P
7	Conducted Spurious Emission	27.53(h), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	2.1046(a), 22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	Frequency Stability	22.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	22.917(b)	A.5	P
6	Band Edge Compliance	22.917(b)	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	A.7	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(c)(10)	A.1	P
2	Emission Limit	27.53(g), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(g)	A.5	P
6	Band Edge Compliance	27.53(g)	A.6	P
7	Conducted Spurious Emission	27.53(g), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 13

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(b)(10)	A.1	P
2	Emission Limit	27.53(c), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(c)	A.5	P
6	Band Edge Compliance	27.53(c)	A.6	P
7	Conducted Spurious Emission	27.53(c), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

LTE Band 17

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(c)(10)	A.1	P
2	Emission Limit	27.53(g), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(g)	A.5	P
6	Band Edge Compliance	27.53(g)	A.6	P
7	Conducted Spurious Emission	27.53(g), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

Note: please refer to Annex C in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass,the EUT complies with the essential requirements in the standard.
NM	Not measure, the test was not measured by ECIT.
NA	Not applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

5.2. Statements

The ClearPHONE 420 is a new product for testing.

ECIT only performed test cases which identified with P/NM/NA/F results in Annex C.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test Equipment Utilized

Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2019-05-10	2 years

Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMW500	104178	R&S	2019-05-10	1 year
2	Test Receiver	ESU40	100307	R&S	2019-05-10	1 year
3	TRILOG Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double Ridged Guide Antenna	ETS-3117	135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2019-05-10	1 year
7	RF Signal Generator	SMF100A	102314	R&S	2019-05-10	1 year
9	Amplifier	SCU08	10146	R&S	2019-05-10	1 year

Conducted test system

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interv al
1	Vector Signal Analyser	FSQ40	200063	R&S	2019-05-10	1 year
2	Wireless communication comprehensive tester	CMW500	148904	R&S	2019-05-10	1 year
3	DC Power Supply	ZUP60-14	LOC-220Z 006-0007	TDL-Lambda	2019-05-10	1 year

Software

Name	Version
Eagle FCC LTE auto test system	V3.0
EMC32	V9.15

7. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20%, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. =75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

8. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents. The detailed measurement uncertainty to see the column, k=2

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	$\pm 0.544\text{dB}$
EBW and VBW	30MHz-3600MHz	95%	$\pm 62.04\text{Hz}$
Transmitter Spurious Emission-Conducted	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Transmitter Spurious Emission-Conducted	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Transmitter Spurious Emission-Conducted	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Transmitter Spurious Emission-Conducted	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
Frequency stability	1MHz-16GHz	95%	$\pm 62.04\text{Hz}$

ANNEX A. MEASUREMENT RESULTS

ANNEX A.1. OUTPUT POWER

A.1.1. Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

CMW500 setting:

1: CMW500 is connected to the DUT

2; Set RX Expected PEP to 30 dbm

A.1.2. Conducted

A.1.2.1. Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 2

LTE					
Modulation	RB	RB Offset	1.4MHz		
			18607	18900	19193
QPSK	1	Low	20.71	20.66	20.74
		Middle	20.85	20.80	20.90
		High	20.74	20.67	20.75
	50%	Low	20.82	20.77	20.86
		Middle	20.86	20.84	20.92
		High	20.82	20.78	20.87
	100%	/	19.84	19.80	19.88
16QAM	1	Low	20.05	19.92	19.99
		Middle	20.20	20.05	20.14
		High	20.03	19.92	20.00
	50%	Low	19.87	19.78	19.84
		Middle	19.92	19.85	19.92
		High	19.84	19.78	19.84
	100%	/	18.98	18.90	18.96
Modulation	RB	RB Offset	3MHz		
			18615	18900	19185
QPSK	1	Low	20.76	20.71	20.79
		Middle	20.89	20.88	20.98

	50%	High	20.76	20.71	20.83
		Low	19.78	19.75	19.89
		Middle	19.82	19.78	19.91
		High	19.76	19.76	19.87
	100%	/	19.77	19.76	19.87
16QAM	1	Low	20.06	19.90	19.99
		Middle	20.23	20.07	20.18
		High	20.06	19.92	20.05
	50%	Low	18.88	18.80	18.93
		Middle	18.91	18.82	18.93
		High	18.85	18.78	18.89
	100%	/	18.81	18.77	18.87
Modulation	RB	RB Offset	5MHz		
			18625	18900	19175
QPSK	1	Low	20.70	20.64	20.68
		Middle	20.94	20.89	20.98
		High	20.66	20.61	20.74
	50%	Low	19.80	19.81	19.91
		Middle	19.86	19.81	19.93
		High	19.84	19.74	19.85
	100%	/	19.82	19.80	19.91
16QAM	1	Low	19.95	19.76	19.86
		Middle	20.17	20.04	20.25
		High	19.92	19.80	19.98
	50%	Low	18.75	18.71	18.82
		Middle	18.80	18.74	18.87
		High	18.79	18.65	18.79
	100%	/	18.79	18.71	18.83
Modulation	RB	RB Offset	10MHz		
			18650	18900	19150
QPSK	1	Low	20.77	20.70	20.70
		Middle	20.86	20.81	20.84
		High	20.67	20.63	20.76
	50%	Low	19.78	19.86	19.99
		Middle	19.83	19.81	19.88
		High	19.89	19.74	19.78
	100%	/	19.85	19.81	19.89
16QAM	1	Low	20.07	19.78	19.77
		Middle	20.14	19.98	20.03
		High	19.89	19.87	20.00
	50%	Low	18.79	18.81	18.89
		Middle	18.83	18.77	18.82

		High	18.85	18.70	18.74
	100%	/	18.86	18.77	18.84
Modulation	RB	RB Offset	15MHz		
			18675	18900	19125
QPSK	1	Low	20.74	20.72	20.67
		Middle	20.77	20.72	20.74
		High	20.57	20.63	20.73
	50%	Low	19.77	19.84	19.83
		Middle	19.80	19.82	19.86
		High	19.83	19.76	19.78
	100%	/	19.78	19.80	19.81
16QAM	1	Low	20.11	19.78	19.82
		Middle	20.13	19.96	19.83
		High	19.77	19.94	19.98
	50%	Low	18.79	18.80	18.74
		Middle	18.84	18.79	18.76
		High	18.84	18.75	18.72
	100%	/	18.83	18.78	18.73
Modulation	RB	RB Offset	20MHz		
			18700	18900	19100
QPSK	1	Low	20.80	20.72	20.75
		Middle	20.87	20.81	20.86
		High	20.55	20.64	20.72
	50%	Low	19.76	19.99	19.84
		Middle	19.90	19.88	19.90
		High	19.87	19.84	19.67
	100%	/	19.79	19.87	19.76
16QAM	1	Low	20.08	19.80	20.01
		Middle	20.09	20.04	19.93
		High	19.63	19.94	20.01
	50%	Low	18.74	18.91	18.81
		Middle	18.85	18.83	18.83
		High	18.83	18.81	18.64
	100%	/	18.73	18.81	18.69

LTE band 4

LTE					
Modulation	RB	RB Offset	1.4MHz		
			19957	20175	20393
QPSK	1	Low	21.66	21.58	21.43
		Middle	21.78	21.71	21.56
		High	21.67	21.61	21.43
	50%	Low	21.77	21.70	21.53
		Middle	21.82	21.74	21.57
		High	21.78	21.70	21.54
	100%	/	20.76	20.71	20.55
16QAM	1	Low	20.92	20.87	20.68
		Middle	21.04	20.96	20.78
		High	20.91	20.87	20.65
	50%	Low	20.74	20.66	20.49
		Middle	20.79	20.73	20.54
		High	20.74	20.66	20.49
	100%	/	19.83	19.77	19.61
Modulation	RB	RB Offset	3MHz		
			19965	20175	20385
QPSK	1	Low	21.76	21.69	21.50
		Middle	21.90	21.82	21.66
		High	21.78	21.64	21.47
	50%	Low	20.78	20.73	20.54
		Middle	20.83	20.75	20.59
		High	20.79	20.70	20.54
	100%	/	20.78	20.71	20.54
16QAM	1	Low	21.06	21.02	20.82
		Middle	21.20	21.14	20.96
		High	21.06	20.97	20.77
	50%	Low	19.85	19.84	19.65
		Middle	19.89	19.85	19.67
		High	19.87	19.79	19.64
	100%	/	19.80	19.76	19.60
Modulation	RB	RB Offset	5MHz		
			19975	20175	20375
QPSK	1	Low	21.69	21.64	21.45
		Middle	21.98	21.91	21.68
		High	21.68	21.59	21.37
	50%	Low	20.77	20.81	20.53
		Middle	20.87	20.82	20.63
		High	20.87	20.68	20.57

	100%	/	20.81	20.76	20.61
16QAM	1	Low	20.96	20.92	20.74
		Middle	21.25	21.16	20.98
		High	20.96	20.87	20.67
	50%	Low	19.74	19.80	19.56
		Middle	19.86	19.83	19.64
		High	19.86	19.68	19.59
	100%	/	19.82	19.78	19.62
Modulation	RB	RB Offset	10MHz		
			20000	20175	20350
QPSK	1	Low	21.79	21.71	21.62
		Middle	21.91	21.82	21.71
		High	21.66	21.62	21.47
	50%	Low	20.77	20.89	20.72
		Middle	20.89	20.80	20.66
		High	20.93	20.67	20.68
	100%	/	20.87	20.81	20.70
16QAM	1	Low	21.08	20.98	20.87
		Middle	21.19	21.08	20.98
		High	20.91	20.91	20.75
	50%	Low	19.79	19.89	19.73
		Middle	19.89	19.81	19.68
		High	19.93	19.69	19.68
	100%	/	19.88	19.81	19.72
Modulation	RB	RB Offset	15MHz		
			20025	20175	20325
QPSK	1	Low	21.77	21.69	21.62
		Middle	21.79	21.71	21.62
		High	21.58	21.54	21.42
	50%	Low	20.81	20.84	20.72
		Middle	20.85	20.79	20.69
		High	20.85	20.65	20.66
	100%	/	20.80	20.77	20.69
16QAM	1	Low	21.08	20.96	20.95
		Middle	21.07	21.03	20.95
		High	20.85	20.87	20.71
	50%	Low	19.80	19.84	19.72
		Middle	19.83	19.79	19.69
		High	19.82	19.67	19.66
	100%	/	19.82	19.80	19.69
Modulation	RB	RB Offset	20MHz		
			20050	20175	20300

QPSK	1	Low	21.78	21.72	21.68
		Middle	21.87	21.81	21.71
		High	21.56	21.49	21.38
	50%	Low	20.71	20.92	20.89
		Middle	20.88	20.84	20.71
		High	20.81	20.56	20.70
	100%	/	20.75	20.76	20.78
16QAM	1	Low	21.12	20.99	21.01
		Middle	21.15	21.15	21.07
		High	20.89	20.84	20.69
	50%	Low	19.73	19.95	19.94
		Middle	19.90	19.88	19.77
		High	19.85	19.60	19.75
	100%	/	19.78	19.82	19.81

LTE band 5

LTE					
Modulation	RB	RB Offset	1.4MHz		
			20407	20525	20643
QPSK	1	Low	23.49	23.41	23.39
		Middle	23.60	23.55	23.53
		High	23.49	23.41	23.42
	50%	Low	23.60	23.52	23.51
		Middle	23.67	23.58	23.58
		High	23.60	23.54	23.53
	100%	/	22.63	22.55	22.56
16QAM	1	Low	22.61	22.66	22.57
		Middle	22.71	22.72	22.70
		High	22.61	22.62	22.56
	50%	Low	22.48	22.49	22.47
		Middle	22.54	22.55	22.50
		High	22.51	22.48	22.43
	100%	/	21.66	21.62	21.60
Modulation	RB	RB Offset	3MHz		
			20415	20525	20635
QPSK	1	Low	23.53	23.48	23.42
		Middle	23.67	23.59	23.58
		High	23.52	23.45	23.43
	50%	Low	22.57	22.52	22.47
		Middle	22.60	22.54	22.54
		High	22.55	22.51	22.48
	100%	/	22.60	22.53	22.52
16QAM	1	Low	22.65	22.72	22.62

		Middle	22.84	22.83	22.81
		High	22.68	22.65	22.58
	50%	Low	21.59	21.58	21.55
		Middle	21.62	21.59	21.60
		High	21.58	21.57	21.56
	100%	/	21.57	21.53	21.53
Modulation	RB	RB Offset	5MHz		
			20425	20525	20625
QPSK	1	Low	23.45	23.42	23.36
		Middle	23.70	23.65	23.59
		High	23.43	23.35	23.34
	50%	Low	22.62	22.52	22.58
		Middle	22.65	22.59	22.55
		High	22.53	22.57	22.53
	100%	/	22.60	22.58	22.57
16QAM	1	Low	22.56	22.68	22.53
		Middle	22.87	22.87	22.80
		High	22.69	22.52	22.51
	50%	Low	21.57	21.50	21.56
		Middle	21.62	21.56	21.55
		High	21.49	21.55	21.54
	100%	/	21.57	21.56	21.55
Modulation	RB	RB Offset	10MHz		
			20450	20525	20600
QPSK	1	Low	23.51	23.51	23.50
		Middle	23.58	23.58	23.54
		High	23.49	23.43	23.44
	50%	Low	22.61	22.51	22.73
		Middle	22.74	22.59	22.62
		High	22.56	22.63	22.53
	100%	/	22.67	22.58	22.66
16QAM	1	Low	22.60	22.76	22.58
		Middle	22.80	22.73	22.62
		High	22.74	22.51	22.56
	50%	Low	21.67	21.48	21.62
		Middle	21.58	21.52	21.53
		High	21.54	21.59	21.44
	100%	/	21.63	21.52	21.59

LTE band 7

LTE					
Modulation	RB	RB Offset	5MHz		
			20775	21100	21425
QPSK	1	Low	21.68	21.56	21.41
		Middle	22.01	21.81	21.74
		High	21.67	21.54	21.42
	50%	Low	20.79	20.70	20.58
		Middle	20.87	20.78	20.66
		High	20.87	20.74	20.61
	100%	/	20.87	20.74	20.62
16QAM	1	Low	20.78	20.70	20.60
		Middle	21.05	20.99	20.93
		High	20.75	20.69	20.62
	50%	Low	19.79	19.72	19.61
		Middle	19.89	19.80	19.69
		High	19.86	19.74	19.65
	100%	/	19.84	19.73	19.67
Modulation	RB	RB Offset	10MHz		
			20800	21100	21400
QPSK	1	Low	21.68	21.57	21.23
		Middle	21.81	21.67	21.44
		High	21.70	21.55	21.43
	50%	Low	20.78	20.63	20.56
		Middle	20.84	20.71	20.55
		High	20.85	20.74	20.61
	100%	/	20.84	20.71	20.59
16QAM	1	Low	20.85	20.75	20.54
		Middle	20.91	20.87	20.41
		High	20.82	20.74	20.64
	50%	Low	19.79	19.67	19.61
		Middle	19.87	19.75	19.62
		High	19.85	19.79	19.68
	100%	/	19.85	19.75	19.64
Modulation	RB	RB Offset	15MHz		
			20825	21100	21375
QPSK	1	Low	21.65	21.46	21.09
		Middle	21.73	21.59	21.26
		High	21.62	21.48	21.39
	50%	Low	20.79	20.65	20.52
		Middle	20.83	20.70	20.57
		High	20.84	20.71	20.60

	100%	/	20.82	20.68	20.57
16QAM	1	Low	20.85	20.75	20.54
		Middle	20.91	20.84	20.71
		High	20.83	20.75	20.65
	50%	Low	19.83	19.73	19.60
		Middle	19.89	19.78	19.65
		High	19.88	19.79	19.68
	100%	/	19.87	19.77	19.65
Modulation	RB	RB Offset	20MHz		
			20850	21100	21350
QPSK	1	Low	21.66	21.48	21.40
		Middle	21.88	21.73	21.59
		High	21.63	21.49	21.40
	50%	Low	20.87	20.70	20.69
		Middle	20.91	20.80	20.68
		High	20.86	20.79	20.66
	100%	/	20.82	20.74	20.68
16QAM	1	Low	20.83	20.73	20.56
		Middle	21.02	20.96	20.81
		High	20.87	20.71	20.68
	50%	Low	19.88	19.77	19.77
		Middle	19.94	19.86	19.75
		High	19.89	19.86	19.74
	100%	/	19.83	19.79	19.72

LTE band 12

LTE					
Modulation	RB	RB Offset	1.4MHz		
			23017	23095	23173
QPSK	1	Low	24.77	24.86	24.85
		Middle	24.90	25.00	24.99
		High	24.84	24.87	24.88
	50%	Low	24.88	24.97	24.97
		Middle	24.98	25.02	25.06
		High	24.93	24.97	25.00
	100%	/	23.95	24.01	24.02
16QAM	1	Low	23.95	24.10	23.96
		Middle	24.13	24.22	24.07
		High	24.04	24.13	23.97
	50%	Low	23.81	23.93	23.84
		Middle	23.91	23.97	23.90
		High	23.87	23.95	23.84
	100%	/	23.01	23.08	23.05

Modulation	RB	RB Offset	3MHz		
			23025	23095	23165
QPSK	1	Low	24.77	24.86	24.85
		Middle	25.01	25.03	25.05
		High	24.85	24.88	24.89
	50%	Low	23.85	23.93	23.93
		Middle	23.94	23.97	23.95
		High	23.92	23.94	23.92
	100%	/	23.92	23.96	23.96
16QAM	1	Low	23.98	24.08	23.99
		Middle	24.20	24.26	24.12
		High	24.05	24.11	24.00
	50%	Low	22.92	23.00	22.96
		Middle	22.99	23.05	22.97
		High	22.97	23.01	22.93
	100%	/	22.93	22.97	22.93
Modulation	RB	RB Offset	5MHz		
			23035	23095	23155
QPSK	1	Low	24.68	24.71	24.75
		Middle	25.00	25.01	25.02
		High	24.76	24.78	24.78
	50%	Low	23.84	23.93	23.90
		Middle	23.95	23.99	23.95
		High	23.88	23.99	23.90
	100%	/	23.90	23.97	23.94
16QAM	1	Low	23.88	23.95	23.92
		Middle	24.22	24.23	24.13
		High	23.98	24.04	23.89
	50%	Low	22.83	22.92	22.85
		Middle	22.93	22.99	22.90
		High	22.88	22.99	22.84
	100%	/	22.89	22.97	22.90
Modulation	RB	RB Offset	10MHz		
			23060	23095	23130
QPSK	1	Low	24.77	24.78	24.82
		Middle	24.94	24.97	24.98
		High	24.88	24.89	24.91
	50%	Low	23.90	24.02	23.93
		Middle	23.98	24.00	24.01
		High	23.99	24.08	23.97
	100%	/	23.96	24.06	23.99
16QAM	1	Low	23.97	23.98	24.06

		Middle	24.15	24.20	24.18
		High	24.13	24.09	24.00
	50%	Low	22.89	23.02	22.94
		Middle	22.95	22.99	22.99
		High	22.97	23.05	22.94
	100%	/	22.95	23.04	22.97

LTE band 13

LTE					
Modulation	RB	RB Offset	5MHz		
			23205	23230	23255
QPSK	1	Low	24.53	24.51	24.50
		Middle	24.82	24.79	24.85
		High	24.52	24.48	24.52
	50%	Low	23.73	23.73	23.68
		Middle	23.81	23.77	23.79
		High	23.72	23.73	23.70
	100%	/	23.76	23.77	23.75
16QAM	1	Low	23.70	23.75	23.70
		Middle	23.99	24.02	23.97
		High	23.72	23.67	23.63
	50%	Low	22.69	22.68	22.62
		Middle	22.75	22.73	22.70
		High	22.68	22.69	22.62
	100%	/	22.73	22.72	22.68
Modulation	RB	RB Offset	10MHz		
			23230	23230	23230
QPSK	1	Low	24.61	24.60	24.61
		Middle	23.72	23.73	23.73
		High	24.72	24.70	24.71
	50%	Low	23.90	23.90	23.91
		Middle	24.60	24.60	24.60
		High	23.78	23.79	23.78
	100%	/	23.82	23.82	23.82
16QAM	1	Low	22.76	22.76	22.78
		Middle	23.80	23.80	23.79
		High	22.75	22.76	22.75
	50%	Low	23.79	23.79	23.80
		Middle	22.74	22.75	22.74
		High	23.80	23.78	23.80
	100%	/	22.75	22.75	22.75

LTE band 17

LTE					
Modulation	RB	RB Offset	5MHz		
			23755	23790	23825
QPSK	1	Low	24.47	24.49	24.49
		Middle	24.77	24.80	24.84
		High	24.53	24.56	24.56
	50%	Low	23.67	23.64	23.69
		Middle	23.70	23.73	23.75
		High	23.70	23.70	23.66
	100%	/	23.72	23.67	23.71
16QAM	1	Low	23.68	23.75	23.67
		Middle	24.00	23.97	23.87
		High	23.78	23.71	23.60
	50%	Low	22.65	22.61	22.61
		Middle	22.68	22.68	22.66
		High	22.67	22.67	22.57
	100%	/	22.70	22.65	22.64
Modulation	RB	RB Offset	10MHz		
			23780	23790	23800
QPSK	1	Low	24.48	24.47	24.52
		Middle	24.63	24.66	24.66
		High	24.59	24.56	24.60
	50%	Low	23.67	23.64	23.65
		Middle	23.68	23.69	23.73
		High	23.75	23.71	23.71
	100%	/	23.73	23.69	23.69
16QAM	1	Low	23.71	23.69	23.73
		Middle	23.89	23.87	23.81
		High	23.70	23.66	23.66
	50%	Low	22.66	22.61	22.62
		Middle	22.69	22.66	22.67
		High	22.73	22.66	22.65
	100%	/	22.71	22.65	22.66

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP".


Rule Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

Rule Part 27.50(c) specifies "Portable stations (hand-held de-vices) are limited to 3 watts ERP".


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

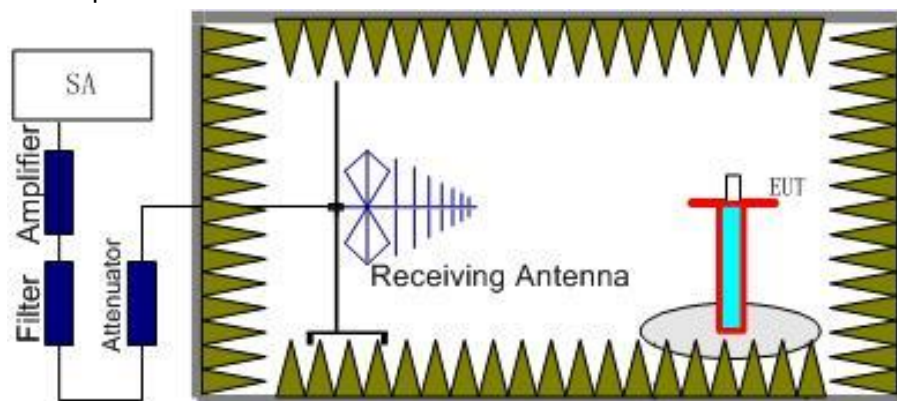

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

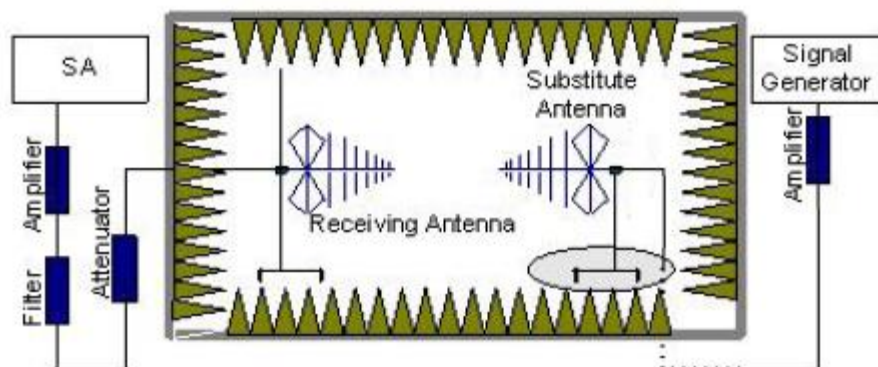

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{Ag} - P_{cl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.1.3.3 Measurement result

LTE Band 2- EIRP 24. 232(b)

Limits: $\leq 33\text{dBm}$ (2W)

LTE Band 2

Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Polarization
1.4MHz	QPSK	18607	18.10	33.00	H
		18900	18.06	33.00	H
		19193	18.13	33.00	H
	16QAM	18607	17.44	33.00	H
		18900	17.32	33.00	H
		19193	17.39	33.00	H
3MHz	QPSK	18615	18.16	33.00	H
		18900	18.10	33.00	H
		19185	18.18	33.00	H
	16QAM	18615	17.46	33.00	H
		18900	17.29	33.00	H
		19185	17.39	33.00	H
5MHz	QPSK	18625	18.09	33.00	H
		18900	18.04	33.00	H
		19175	18.08	33.00	H
	16QAM	18625	17.34	33.00	H
		18900	17.15	33.00	H
		19175	17.26	33.00	H
10MHz	QPSK	18650	18.16	33.00	H

	16QAM	18900	18.10	33.00	H
		19150	18.10	33.00	H
		18650	17.47	33.00	H
		18900	17.17	33.00	H
		19150	17.17	33.00	H
15MHz	QPSK	18675	18.14	33.00	H
		18900	18.12	33.00	H
		19125	18.07	33.00	H
	16QAM	18675	17.50	33.00	H
		18900	17.18	33.00	H
		19125	17.22	33.00	H
20MHz	QPSK	18700	18.19	33.00	H
		18900	18.12	33.00	H
		19100	18.15	33.00	H
	16QAM	18700	17.47	33.00	H
		18900	17.20	33.00	H
		19100	17.41	33.00	H

LTE Band 4- EIRP 27.50(d)
Limits: ≤30dBm (1W)

Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Polarization
1.4MHz	QPSK	19957	19.05	30.00	H
		20175	18.97	30.00	H
		20393	18.82	30.00	H
	16QAM	19957	18.32	30.00	H
		20175	18.27	30.00	H
		20393	18.07	30.00	H
3MHz	QPSK	19965	19.15	30.00	H
		20175	19.08	30.00	H
		20385	18.89	30.00	H
	16QAM	19965	18.46	30.00	H
		20175	18.41	30.00	H
		20385	18.22	30.00	H
5MHz	QPSK	19975	19.09	30.00	H
		20175	19.04	30.00	H
		20375	18.85	30.00	H
	16QAM	19975	18.35	30.00	H
		20175	18.31	30.00	H
		20375	18.14	30.00	H
10MHz	QPSK	20000	19.19	30.00	H

		20175	19.11	30.00	H
		20350	19.01	30.00	H
	16QAM	20000	18.48	30.00	H
		20175	18.37	30.00	H
		20350	18.27	30.00	H
15MHz	QPSK	20025	19.16	30.00	H
		20175	19.09	30.00	H
		20325	19.02	30.00	H
	16QAM	20025	18.48	30.00	H
		20175	18.35	30.00	H
		20325	18.35	30.00	H
20MHz	QPSK	20050	19.17	30.00	H
		20175	19.11	30.00	H
		20300	19.08	30.00	H
	16QAM	20050	18.51	30.00	H
		20175	18.38	30.00	H
		20300	18.41	30.00	H

LTE Band 5- ERP 22.913(a)
Limits: ≤38.45dBm (7W)

Bandwidth	Modulation	Channel	ERP (dBm)	Limit (dBm)	Polarization
1.4MHz	QPSK	20407	19.53	38.45	H
		20525	19.46	38.45	H
		20643	19.43	38.45	H
	16QAM	20407	18.65	38.45	H
		20525	18.70	38.45	H
		20643	18.62	38.45	H
3MHz	QPSK	20415	19.58	38.45	H
		20525	19.52	38.45	H
		20635	19.47	38.45	H
	16QAM	20415	18.69	38.45	H
		20525	18.76	38.45	H
		20635	18.67	38.45	H
5MHz	QPSK	20425	19.49	38.45	H
		20525	19.46	38.45	H
		20625	19.41	38.45	H
	16QAM	20425	18.61	38.45	H
		20525	18.73	38.45	H
		20625	18.57	38.45	H
10MHz	QPSK	20450	19.56	38.45	H

		20525	19.55	38.45	H
		20600	19.54	38.45	H
	16QAM	20450	18.65	38.45	H
		20525	18.81	38.45	H
		20600	18.62	38.45	H

LTE Band 7- EIRP 27.50(h)(2)
Limits: ≤33 dBm (2W)

Bandwidth	Modulation	Channel	EIRP (dBm)	Limit (dBm)	Polarization
5MHz	QPSK	20775	19.07	33.00	H
		21100	18.95	33.00	H
		21425	18.80	33.00	H
	16QAM	20775	18.18	33.00	H
		21100	18.1	33.00	H
		21425	17.99	33.00	H
10MHz	QPSK	20800	19.08	33.00	H
		21100	18.96	33.00	H
		21400	18.63	33.00	H
	16QAM	20800	18.24	33.00	H
		21100	18.15	33.00	H
		21400	17.94	33.00	H
15MHz	QPSK	20825	19.05	33.00	H
		21100	18.86	33.00	H
		21375	18.48	33.00	H
	16QAM	20825	18.24	33.00	H
		21100	18.15	33.00	H
		21375	17.94	33.00	H
20MHz	QPSK	20850	19.06	33.00	H
		21100	18.88	33.00	H
		21350	18.79	33.00	H
	16QAM	20850	18.22	33.00	H
		21100	18.12	33.00	H
		21350	17.96	33.00	H

LTE Band 12 - ERP 27.50(c)(10)
Limits: ≤34.77dBm (3W)

Bandwidth	Modulation	Channel	ERP (dBm)	Limit (dBm)	Polarization
1.4MHz	QPSK	23017	20.82	34.77	H
		23095	20.91	34.77	H
		23173	20.9	34.77	H

	16QAM	23017	20	34.77	H
		23095	20.15	34.77	H
		23173	20.01	34.77	H
3MHz	QPSK	23025	20.81	34.77	H
		23095	20.90	34.77	H
		23165	20.9	34.77	H
	16QAM	23025	20.03	34.77	H
		23095	20.12	34.77	H
		23165	20.03	34.77	H
5MHz	QPSK	23035	20.73	34.77	H
		23095	20.76	34.77	H
		23155	20.79	34.77	H
	16QAM	23035	19.93	34.77	H
		23095	20.00	34.77	H
		23155	19.96	34.77	H
10MHz	QPSK	23060	20.82	34.77	H
		23095	20.82	34.77	H
		23130	20.86	34.77	H
	16QAM	23060	20.02	34.77	H
		23095	20.03	34.77	H
		23130	20.10	34.77	H

LTE Band 13- ERP 27.50(c)(10)
Limits: ≤34.77dBm (3W)

Bandwidth	Modulation	Channel	ERP (dBm)	Limit (dBm)	Polarization
5MHz	QPSK	23205	20.57	34.77	H
		23230	20.55	34.77	H
		23255	20.54	34.77	H
	16QAM	23205	19.75	34.77	H
		23230	19.79	34.77	H
		23255	19.74	34.77	H
10MHz	QPSK	23230	20.65	34.77	H
		23230	20.64	34.77	H
		23230	20.66	34.77	H
	16QAM	23230	18.81	34.77	H
		23230	18.80	34.77	H
		23230	18.82	34.77	H

LTE Band 17- ERP 27.50(c)(10)
Limits: ≤34.77dBm (3W)

Bandwidth	Modulation	Channel	ERP (dBm)	Limit (dBm)	Polarization
5MHz	QPSK	23755	20.52	34.77	H
		23790	20.54	34.77	H
		23825	20.54	34.77	H
	16QAM	23755	19.73	34.77	H
		23790	19.79	34.77	H
		23825	19.72	34.77	H
10MHz	QPSK	23780	20.53	34.77	H
		23790	20.52	34.77	H
		23800	20.57	34.77	H
	16QAM	23780	19.75	34.77	H
		23790	19.74	34.77	H
		23800	19.77	34.77	H

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

ANNEX A.2. EMISSION LIMIT

Reference

FCC: CFR 2.1051, 22.917,24.238(a), 27.53(g), 27.53(h) , 27.53(m).


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917,Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 2,4,5,7,12,13,17.

The procedure of radiated spurious emissions is as follows:

- Below 1 GHz ,EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz ,EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna.EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

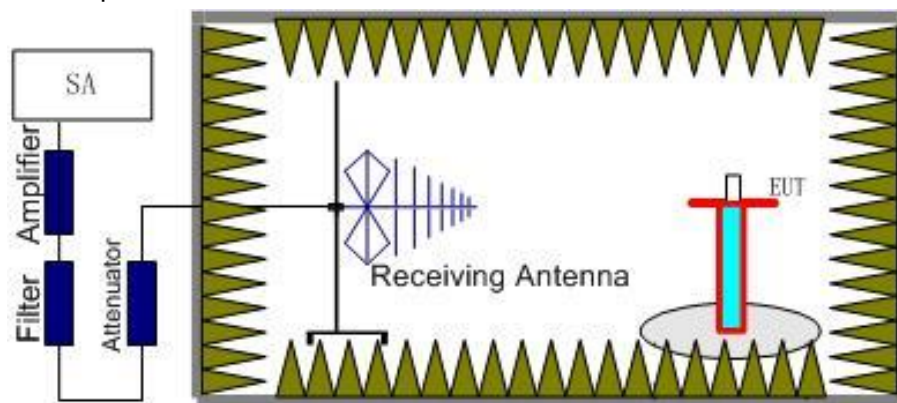

- The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

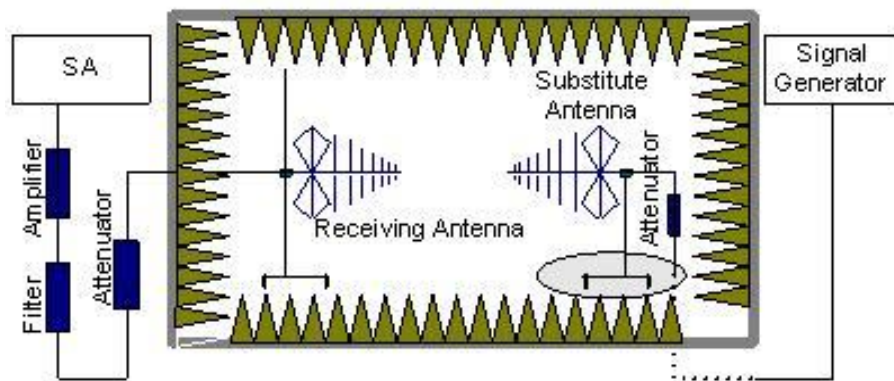

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 22.917, Part 24.238(a), Part 27.53(g), Part 27.53(h), Part 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

7. Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 2,4,5,7,12,13,17. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation

was seen from a carrier in one block of the LTE Bands 2,4,5,7,12,13,17. into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

RSE-LTE2-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3705.2	-43.81	6.6	7.7	-42.71	-13	V
5560.8	-41.94	8.2	9.5	-40.64	-13	H
7410.0	-38.58	9.7	14.6	-33.68	-13	H
9268.4	-39.25	10.6	18.5	-31.35	-13	V
11114.8	-45.36	12.1	18.1	-39.36	-13	V
13123.8	-46.47	13.0	20.2	-39.27	-13	H

RSE-LTE2-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3757.6	-43.68	6.6	7.7	-42.58	-13	H
5636.8	-46.16	8.3	10.5	-43.96	-13	H
7524.4	-41.17	9.7	14.6	-36.27	-13	H
9394.4	-42.5	10.7	18.6	-34.6	-13	V
11280.0	-48.66	12.1	18.5	-42.26	-13	V
13161.6	-48.6	13.0	21.8	-39.8	-13	H

RSE-LTE2-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3814.8	-42.91	6.7	7.7	-41.91	-13	H
5726.0	-43.12	8.5	10.5	-41.12	-13	H
7630.0	-39.03	9.7	15.3	-33.43	-13	V
9543.6	-37.71	10.7	18.6	-29.81	-13	V
11443.8	-46.12	12.1	18.1	-40.12	-13	V
13353.4	-46.99	13.7	21.8	-38.89	-13	V

RSE-LTE4-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3424.8	-44.29	6.3	4.7	-45.89	-13	V
5137.6	-45.09	7.9	8.7	-44.29	-13	H
6854.8	-36.17	9.2	12.3	-33.07	-13	H
8562.4	-35.21	10.3	18.1	-27.41	-13	V
10270.4	-39.63	11.4	17.4	-33.63	-13	V
11987.0	-42.66	12.6	17.1	-38.16	-13	H

RSE-LTE4-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3467.6	-45.01	6.4	4.7	-46.71	-13	V
5197.6	-43.37	8.0	8.7	-42.67	-13	H
6930.0	-35.11	9.3	12.9	-31.51	-13	H
8662.4	-33.58	10.3	18.5	-25.38	-13	V
10395.2	-37.42	11.6	17.1	-31.92	-13	V
12128.4	-43.07	12.6	17.5	-38.17	-13	H

RSE-LTE4-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3504.8	-43.86	6.4	4.7	-45.56	-13	V
5257.6	-44.06	8.0	8.7	-43.36	-13	H
7009.6	-35.77	9.3	12.9	-32.17	-13	H
8756.8	-34.19	10.4	18.5	-26.09	-13	V
10515.2	-37.18	11.6	17.1	-31.68	-13	V
12267.0	-42.82	12.6	17.5	-37.92	-13	H

RSE-LTE5-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1651.4	-44.72	4.3	2.9	-46.12	-13	H
2472.7	-39.16	5.3	3.7	-40.76	-13	H
3300.8	-51.65	6.2	4.7	-53.15	-13	H
4126.0	-53.13	7.0	7.7	-52.43	-13	H
4953.2	-51.29	7.7	9.0	-49.99	-13	V
5779.6	-55.43	8.4	10.5	-53.33	-13	H

RSE-LTE5-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1677.0	-42.7	4.4	2.9	-44.2	-13	H
2500.8	-38.38	5.4	3.7	-40.08	-13	V
3350.4	-50.28	6.2	4.7	-51.78	-13	H
4183.2	-48.94	7.0	7.7	-48.24	-13	H
5184.8	-52.73	8.0	8.7	-52.03	-13	H
5931.6	-53.95	8.5	10.4	-52.05	-13	V

RSE-LTE5-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1695.4	-44.09	4.4	2.9	-45.59	-13	V
2582.3	-35.81	5.5	3.7	-37.61	-13	H
3390.8	-48.92	6.3	4.7	-50.52	-13	V
4234.4	-47.16	7.1	7.7	-46.56	-13	H
5078.0	-51.11	7.9	9.0	-50.01	-13	V
5925.2	-54.76	8.5	10.4	-52.86	-13	H

RSE-LTE7-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
5007.6	-35.67	7.8	9.0	-34.47	-13	H
7507.2	-41.18	9.7	14.6	-36.28	-13	H
10011.2	-35.05	11.2	17.6	-28.65	-13	V
12513.8	-39.29	12.7	18.7	-33.29	-13	H
15021.5	-39.12	14.4	24.4	-29.12	-13	V
17536.2	-25.6	15.1	20.1	-20.6	-13	V

RSE-LTE7-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
5070.0	-37.19	7.8	9.0	-35.99	-13	H
7604.4	-42.28	9.7	14.6	-37.38	-13	V
10138.8	-33.15	11.3	17.4	-27.05	-13	V
12676.5	-37.2	12.7	19.2	-30.7	-13	H
15266.5	-37.92	14.5	25.1	-27.32	-13	H
17744.5	-25.94	15.8	20.6	-21.14	-13	H

RSE-LTE7-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3603.2	-46.24	6.5	4.7	-48.04	-13	H
5137.6	-38.96	7.9	8.7	-38.16	-13	H
7702.4	-41.57	9.8	15.3	-36.07	-13	V
10268.0	-33.37	11.4	17.4	-27.37	-13	V
12830.5	-37.12	12.5	19.2	-30.42	-13	H
15450.2	-35.96	14.5	24.2	-26.26	-13	V

RSE-LTE12-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1401.2	-48.88	4.0	3.4	-49.48	-13	V
2103.8	-42.61	4.9	2.8	-44.71	-13	H
2775.8	-36.19	5.7	4.1	-37.79	-13	V
3507.6	-50.69	6.4	4.7	-52.39	-13	V
4208.8	-49.87	7.0	7.7	-49.17	-13	H
4912.4	-52.03	7.7	9.0	-50.73	-13	V

RSE-LTE12-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1414.7	-49.55	4.0	3.4	-50.15	-13	H
2102.3	-42.72	4.9	2.8	-44.82	-13	V
2780.0	-35.09	5.7	4.1	-36.69	-13	V
3531.2	-53.12	6.4	4.7	-54.82	-13	V
4245.2	-50.11	7.1	7.7	-49.51	-13	H
4952.4	-50.98	7.7	9.0	-49.68	-13	V

RSE-LTE12-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1430.6	-49.72	4.1	3.4	-50.42	-13	H
2153.1	-41.94	5.0	3.3	-43.64	-13	H
2867.7	-34.29	5.8	4.1	-35.99	-13	V
3567.6	-51.01	6.4	4.7	-52.71	-13	V
4288.0	-47.68	7.1	7.7	-47.08	-13	H
4994.4	-51.57	7.8	9.0	-50.37	-13	V

RSE-LTE13-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1559.3	-46.05	4.2	3.4	-46.85	-13	V
2376.9	-38.67	5.2	3.7	-40.17	-13	H
3118.0	-54.71	6.0	4.7	-56.01	-13	H
3896.8	-55.79	6.8	7.7	-54.89	-13	H
4669.2	-52.31	7.5	7.9	-51.91	-13	V
5451.6	-53.1	8.1	9.5	-51.7	-13	H

RSE-LTE13-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1566.6	-45.71	4.2	3.4	-46.51	-13	H
2347.7	-39.29	5.2	3.3	-41.19	-13	H
3134.4	-57.12	6.0	4.7	-58.42	-13	V
3913.2	-55.95	6.8	7.7	-55.05	-13	H
4699.6	-53.24	7.5	7.9	-52.84	-13	V
5474.0	-53.85	8.1	9.5	-52.45	-13	H

RSE-LTE13-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1566.6	-45.55	4.2	3.4	-46.35	-13	H
2350.4	-39.87	5.2	3.3	-41.77	-13	H
3133.2	-55.99	6.0	4.7	-57.29	-13	H
3916.8	-55.97	6.8	7.7	-55.07	-13	H
4706.8	-52.19	7.5	7.9	-51.79	-13	V
5534.8	-53.22	8.2	9.5	-51.92	-13	H

RSE-LTE17-L-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1408.8	-47.88	4.0	3.4	-48.48	-13	V
2113.1	-40.83	4.9	2.8	-42.93	-13	H
2819.2	-35.85	5.7	4.1	-37.45	-13	V
3521.6	-47.61	6.4	4.7	-49.31	-13	V
4226.0	-42.06	7.1	7.7	-41.46	-13	H
4930.4	-46.97	7.7	9.0	-45.67	-13	V

RSE-LTE17-M-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1416.0	-48.83	4.0	3.4	-49.43	-13	H
2123.5	-43.06	4.9	2.8	-45.16	-13	V
2830.0	-36.09	5.8	4.1	-37.79	-13	V
3538.8	-45.56	6.4	4.7	-47.26	-13	V
4246.8	-40.82	7.1	7.7	-40.22	-13	H
4954.8	-46.19	7.7	9.0	-44.89	-13	V

RSE-LTE17-H-N08

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1422.6	-47.94	4.0	3.4	-48.54	-13	H
2134.2	-40.77	5.0	3.3	-42.47	-13	V
2845.4	-35.06	5.8	4.1	-36.76	-13	V
3556.4	-49.17	6.4	4.7	-50.87	-13	V
4268.0	-49.82	7.1	7.7	-49.22	-13	H
4978.8	-51.64	7.8	9.0	-50.44	-13	V

ANNEX A.3. FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055, 22.235,24.235, 27.54.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2,4,5,7,12,13,17, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 2, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-13.604	-29.569	0.007	0.016
3.85	-13.146	-22.845	0.007	0.012
4.40	-11.544	-22.845	0.006	0.012

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-12.445	-23.174	0.007	0.012
40°	-6.337	-24.676	0.003	0.013
30°	-12.302	-25.635	0.007	0.014
20°	-9.756	-26.536	0.005	0.014
10°	-12.531	-18.697	0.007	0.010
0°	-14.992	-24.877	0.008	0.013
- 10°	-13.018	-31.571	0.007	0.017
- 20°	-14.148	-27.781	0.008	0.015
- 30°	-16.451	-24.877	0.009	0.013

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-10.214	-27.366	0.009	0.015
3.85	-11.287	-25.964	0.006	0.016
4.40	-9.112	-25.163	0.011	0.016

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-14.677	-30.785	0.008	0.018
40°	-13.661	-24.776	0.008	0.014
30°	-11.930	-31.285	0.007	0.018
20°	-13.790	-23.074	0.008	0.013
10°	7.439	-20.599	0.004	0.012
0°	4.706	-23.346	0.003	0.013
- 10°	-9.885	-17.881	0.006	0.010
- 20°	-8.755	-26.164	0.005	0.015
- 30°	-9.141	-26.336	0.005	0.015

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-11.272	-22.974	0.013	0.027
3.85	-11.101	-23.417	0.013	0.028
4.40	-11.330	-21.100	0.014	0.025

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-10.443	-19.026	0.012	0.023
40°	-11.773	-20.442	0.014	0.024
30°	-11.702	-21.300	0.014	0.025
20°	-5.450	-18.268	0.007	0.022
10°	-9.885	-19.627	0.012	0.023
0°	-8.297	-21.529	0.010	0.026
- 10°	-9.069	-19.956	0.011	0.024
- 20°	-7.653	-23.317	0.009	0.028
- 30°	-11.029	-24.033	0.013	0.029

LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-17.667	19.226	0.007	0.008
3.85	-11.916	19.312	0.005	0.008
4.40	20.285	23.575	0.008	0.009

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-13.347	23.975	0.005	0.009
40°	-15.221	21.758	0.006	0.009
30°	-19.026	-26.064	0.008	0.010
20°	-14.777	23.289	0.006	0.009
10°	-11.029	21.672	0.004	0.009
0°	13.247	18.797	0.005	0.007
- 10°	-13.432	-22.559	0.005	0.009
- 20°	-34.018	18.439	0.013	0.007
- 30°	-14.262	19.240	0.006	0.008

LTE Band 12, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-8.783	-26.679	0.012	0.038
3.85	-7.696	-26.765	0.011	0.038
4.40	-7.496	-24.619	0.011	0.035

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	21.901	-20.199	0.031	0.029
40°	-7.181	-21.744	0.010	0.031
30°	-6.638	-20.585	0.009	0.029
20°	-6.022	-23.932	0.009	0.034
10°	-10.128	-21.701	0.014	0.031
0°	-10.743	-30.456	0.015	0.043
- 10°	-9.012	-23.274	0.013	0.033
- 20°	-9.270	-18.997	0.013	0.027
- 30°	-10.571	-25.392	0.015	0.036

LTE Band 13, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-12.889	11.144	0.016	0.014
3.85	-11.330	12.331	0.014	0.016
4.40	-9.499	-11.730	0.012	0.015

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-6.452	-10.314	0.008	0.013
40°	-8.626	10.929	0.011	0.014
30°	-7.739	-11.044	0.010	0.014
20°	-11.230	-9.727	0.014	0.012
10°	-13.533	10.571	0.017	0.014
0°	-11.601	-12.374	0.015	0.016
- 10°	-11.101	12.774	0.014	0.016
- 20°	-12.002	-13.018	0.015	0.017
- 30°	-10.357	12.031	0.013	0.015

LTE Band 17, 5MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.50	-7.424	-12.703	0.010	0.018
3.85	-11.358	-10.700	0.016	0.015
4.40	-11.916	-9.041	0.017	0.013

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-10.557	-14.577	0.015	0.021
40°	-11.587	-11.659	0.016	0.016
30°	-8.283	-10.958	0.012	0.015
20°	-11.644	-13.661	0.016	0.019
10°	-9.198	-12.231	0.013	0.017
0°	-9.356	-11.830	0.013	0.017
- 10°	-9.871	11.988	0.014	0.017
- 20°	-10.600	-10.443	0.015	0.015
- 30°	-10.743	12.431	0.015	0.018

ANNEX A.4. OCCUPIED BANDWIDTH

Reference


FCC: CFR Part 2.1049(h)(i)





A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.





The measurement method is from KDB 971168 4:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- Set the detection mode to peak, and the trace mode to max hold.
- Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

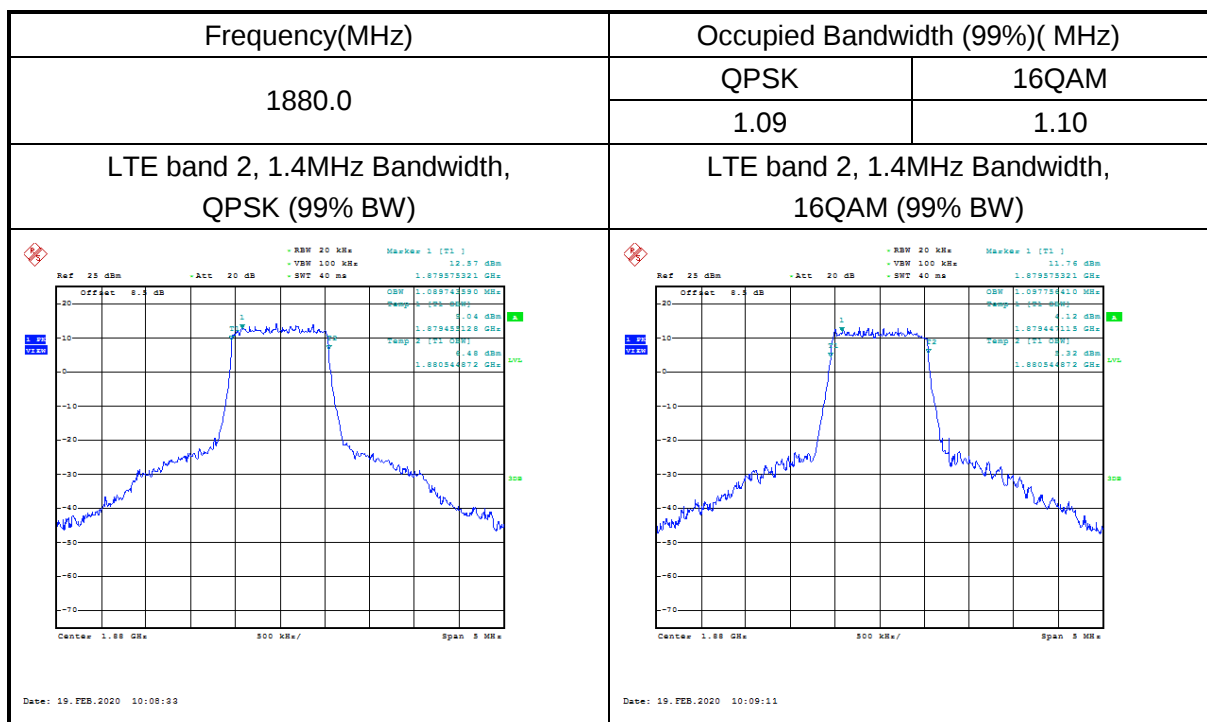

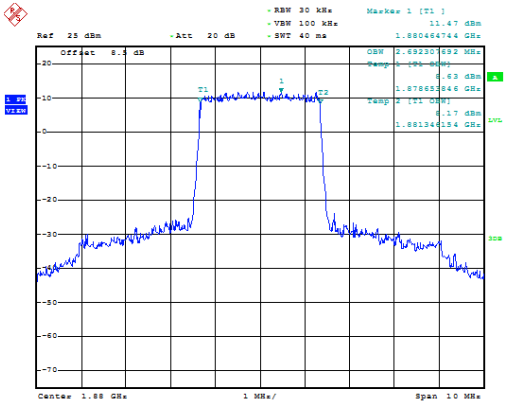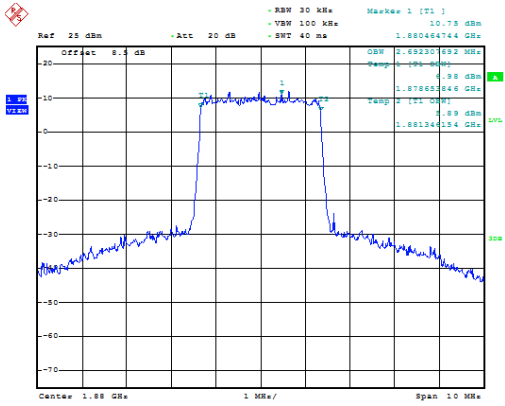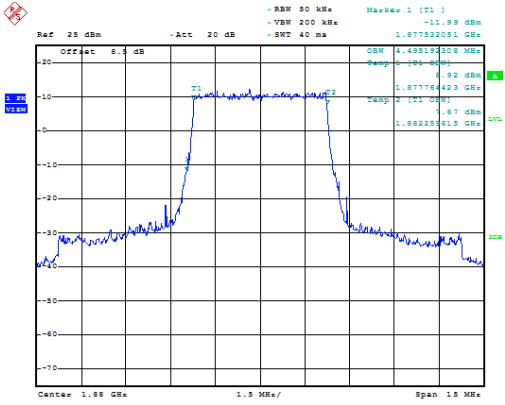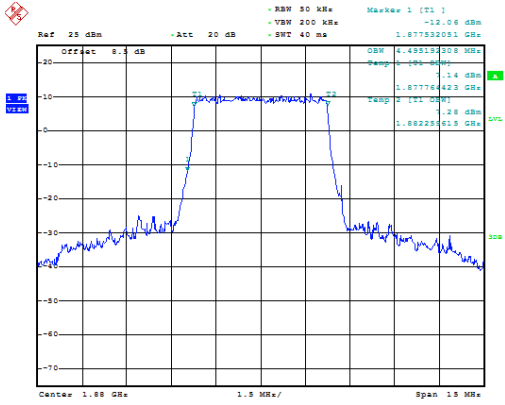Frequency(MHz)		Occupied Bandwidth (99%)(MHz)	
1880.0		QPSK	16QAM
		2.69	2.69
LTE band 2, 3MHz Bandwidth, QPSK (99% BW)		LTE band 2, 3MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, Noise Floor: -11.47 dBm, Center: 1.88 GHz, Span: 10 MHz		 Ref: 25 dBm, Att: 20 dB, Noise Floor: -10.75 dBm, Center: 1.88 GHz, Span: 10 MHz	
Date: 11.FEB.2020 12:21:38		Date: 11.FEB.2020 12:22:16	
Frequency(MHz)		Occupied Bandwidth (99%)(MHz)	
1880.0		QPSK	16QAM
		4.50	4.50
LTE band 2, 5MHz Bandwidth, QPSK (99% BW)		LTE band 2, 5MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, Noise Floor: -11.99 dBm, Center: 1.88 GHz, Span: 10 MHz		 Ref: 25 dBm, Att: 20 dB, Noise Floor: -12.06 dBm, Center: 1.88 GHz, Span: 10 MHz	
Date: 11.FEB.2020 12:09:32		Date: 11.FEB.2020 12:09:10	





Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	8.99	8.99
LTE band 2, 10MHz Bandwidth, QPSK (99% BW)	LTE band 2, 10MHz Bandwidth, 16QAM (99% BW)	
Ref 25 dBm - Att 20 dB - BW 100 kHz - Mask 1 [T1] - VSW 200 kHz - SWT 40 ms - 11.55 dBm - 1.879663462 GHz Offset 8.4 dB - Att 20 dB - BW 100 kHz - Mask 1 [T1] - VSW 200 kHz - SWT 40 ms - 11.55 dBm - 1.879663462 GHz Center 1.88 GHz - Span 30 MHz Date: 11.FEB.2020 12:18:11	Ref 25 dBm - Att 20 dB - BW 100 kHz - Mask 1 [T1] - VSW 200 kHz - SWT 40 ms - 9.77 dBm - 1.879663462 GHz Offset 8.4 dB - Att 20 dB - BW 100 kHz - Mask 1 [T1] - VSW 200 kHz - SWT 40 ms - 9.77 dBm - 1.879663462 GHz Center 1.88 GHz - Span 30 MHz Date: 11.FEB.2020 12:18:49	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	13.56	13.56
LTE band 2, 15MHz Bandwidth, QPSK (99% BW)	LTE band 2, 15MHz Bandwidth, 16QAM (99% BW)	
Ref 25 dBm - Att 20 dB - BW 200 kHz - Mask 1 [T1] - VSW 1 MHz - SWT 40 ms - 13.55 dBm - 1.877532051 GHz Offset 8.4 dB - Att 20 dB - BW 200 kHz - Mask 1 [T1] - VSW 1 MHz - SWT 40 ms - 13.55 dBm - 1.877532051 GHz Center 1.88 GHz - Span 40 MHz Date: 11.FEB.2020 12:11:06	Ref 25 dBm - Att 20 dB - BW 200 kHz - Mask 1 [T1] - VSW 1 MHz - SWT 40 ms - 12.96 dBm - 1.877532051 GHz Offset 8.4 dB - Att 20 dB - BW 200 kHz - Mask 1 [T1] - VSW 1 MHz - SWT 40 ms - 12.96 dBm - 1.877532051 GHz Center 1.88 GHz - Span 40 MHz Date: 11.FEB.2020 12:11:44	

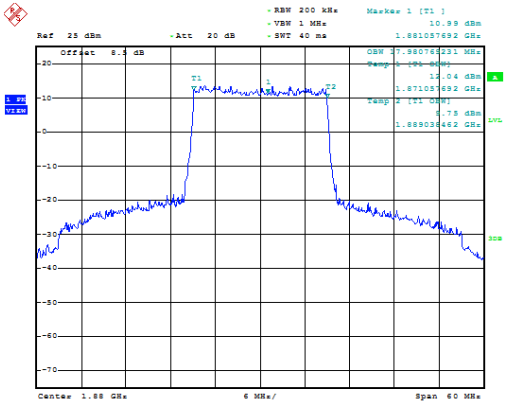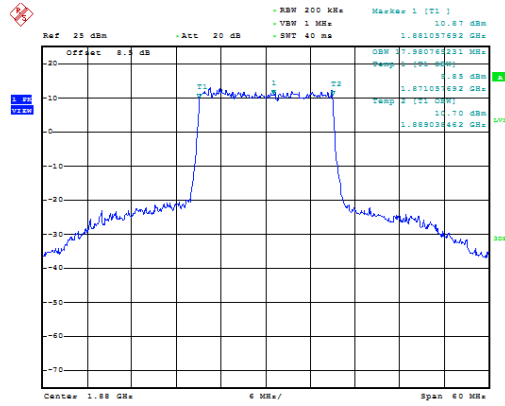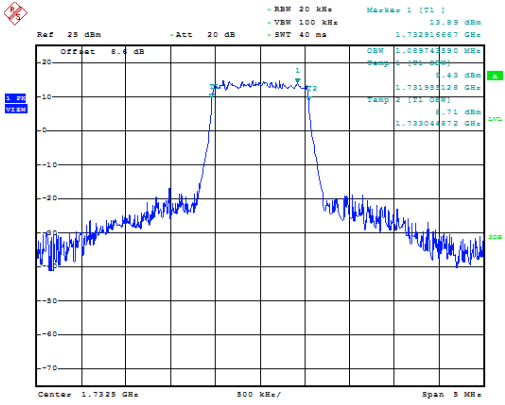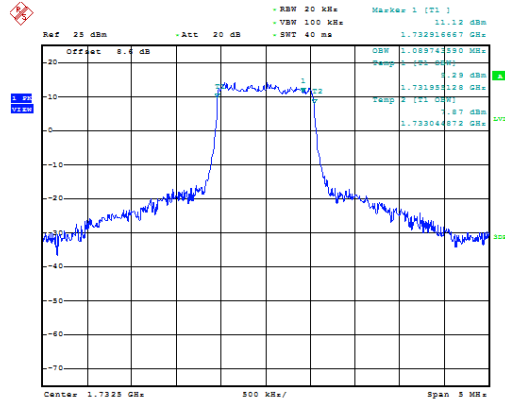Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1880.0	QPSK	16QAM
	17.98	17.98
LTE band 2, 20MHz Bandwidth, QPSK (99% BW)	LTE band 2, 20MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, RBW: 200 kHz, VBW: 1 MHz, Mask: 1 [T1], Center: 1.88 GHz, Span: 60 MHz, Date: 11.FEB.2020 12:26:22	 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, RBW: 200 kHz, VBW: 1 MHz, Mask: 1 [T1], Center: 1.88 GHz, Span: 60 MHz, Date: 11.FEB.2020 12:27:01	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1732.5	QPSK	16QAM
	1.09	1.09
LTE band 4, 1.4MHz Bandwidth, QPSK (99% BW)	LTE band 4, 1.4MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, RBW: 20 kHz, VBW: 100 kHz, Mask: 1 [T1], Center: 1.7325 GHz, Span: 5 MHz, Date: 11.FEB.2020 12:36:15	 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, RBW: 20 kHz, VBW: 100 kHz, Mask: 1 [T1], Center: 1.7325 GHz, Span: 5 MHz, Date: 11.FEB.2020 12:36:54	

Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1732.5	QPSK	16QAM
	2.69	2.69
LTE band 4, 3MHz Bandwidth, QPSK (99% BW)	LTE band 4, 3MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, BW: 30 kHz, VSW: 100 kHz, SWT: 40 ms, Mask: 1 (T1), Center: 1.7325 GHz, Span: 10 MHz, Date: 11.FEB.2020 12:30:58	Ref: 25 dBm, Att: 20 dB, BW: 30 kHz, VSW: 100 kHz, SWT: 40 ms, Mask: 1 (T1), Center: 1.7325 GHz, Span: 10 MHz, Date: 11.FEB.2020 12:31:36	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1732.5	QPSK	16QAM
	4.52	4.50
LTE band 4, 5MHz Bandwidth, QPSK (99% BW)	LTE band 4, 5MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, BW: 30 kHz, VSW: 100 kHz, SWT: 40 ms, Mask: 1 (T1), Center: 1.7325 GHz, Span: 15 MHz, Date: 11.FEB.2020 12:48:02	Ref: 25 dBm, Att: 20 dB, BW: 30 kHz, VSW: 100 kHz, SWT: 40 ms, Mask: 1 (T1), Center: 1.7325 GHz, Span: 15 MHz, Date: 11.FEB.2020 12:48:40	





Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1732.5	QPSK	16QAM
	8.99	8.99
LTE band 4, 10MHz Bandwidth, QPSK (99% BW)	LTE band 4, 10MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Masker 1 [T1], 11.35 dBm, 1.732516667 GHz, 30 MHz Span, 1.7325 GHz Center.	Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Masker 1 [T1], 10.02 dBm, 1.732516667 GHz, 30 MHz Span, 1.7325 GHz Center.	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
1732.5	QPSK	16QAM
	13.49	13.41
LTE band 4, 15MHz Bandwidth, QPSK (99% BW)	LTE band 4, 15MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Masker 1 [T1], 13.38 dBm, 1.726730769 GHz, 45 MHz Span, 1.7325 GHz Center.	Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Masker 1 [T1], 13.68 dBm, 1.726730769 GHz, 45 MHz Span, 1.7325 GHz Center.	

Page Number: 57 of 97
Report Issued Date: Apr.26.2020

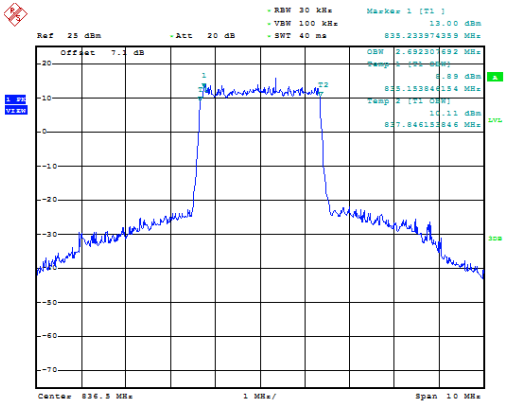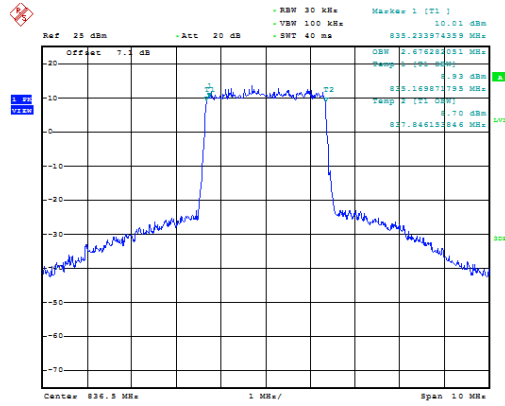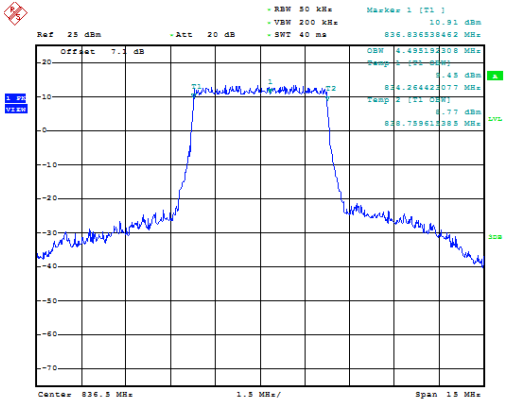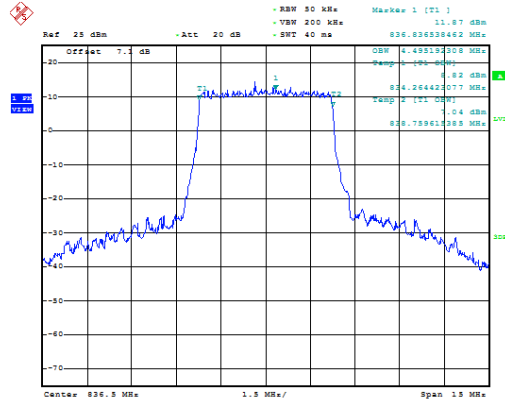Frequency(MHz)		Occupied Bandwidth (99%)(MHz)	
836.5		QPSK	16QAM
		2.69	2.68
LTE band 5, 3MHz Bandwidth, QPSK (99% BW)		LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Center: 836.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 12:58:19		 Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Center: 836.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 12:58:57	
Frequency(MHz)		Occupied Bandwidth (99%)(MHz)	
836.5		QPSK	16QAM
		4.50	4.50
LTE band 5, 5MHz Bandwidth, QPSK (99% BW)		LTE band 5, 5MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Center: 836.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:02:53		 Ref: 25 dBm, Att: 20 dB, Noise Floor: -100 dBm, Center: 836.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:09:31	





Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
836.5	QPSK	16QAM
	8.94	8.94
LTE band 5, 10MHz Bandwidth, QPSK (99% BW)	LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)	
Ref 25 dBm - Att 20 dB - BW 100 kHz - VSW 200 kHz - SWT 40 ms - Masker 1 [T1] Offset 7.1 dB OSW 8.94230 MHz Range 1-100 dBm 11.51 dBm 835.233974359 MHz 11.01 dBm 835.233974359 MHz 10.49 dBm 840.971135446 MHz Center 836.5 MHz 3 MHz Span 30 MHz Date: 11.FEB.2020 13:00:40	Ref 25 dBm - Att 20 dB - BW 100 kHz - VSW 200 kHz - SWT 40 ms - Masker 1 [T1] Offset 7.1 dB OSW 8.94230 MHz Range 1-100 dBm 11.37 dBm 835.233974359 MHz 11.58 dBm 835.233974359 MHz 10.66 dBm 840.971135446 MHz Center 836.5 MHz 3 MHz Span 30 MHz Date: 11.FEB.2020 13:01:19	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2535.0	QPSK	16QAM
	4.52	4.52
LTE band 7, 5MHz Bandwidth, QPSK (99% BW)	LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)	
Ref 25 dBm - Att 20 dB - BW 50 kHz - VSW 200 kHz - SWT 40 ms - Masker 1 [T1] Offset 8.4 dB OSW 4.51923 MHz Range 1-100 dBm 8.58 dBm 2.535312500 GHz 4.67 dBm 2.532740385 GHz 8.58 dBm 2.537284619 GHz Center 2.535 GHz 1.5 MHz Span 1.5 MHz Date: 11.FEB.2020 13:04:57	Ref 25 dBm - Att 20 dB - BW 50 kHz - VSW 200 kHz - SWT 40 ms - Masker 1 [T1] Offset 8.4 dB OSW 4.51923 MHz Range 1-100 dBm 9.57 dBm 2.535312500 GHz 4.61 dBm 2.532740385 GHz 9.34 dBm 2.537284619 GHz Center 2.535 GHz 1.5 MHz Span 1.5 MHz Date: 11.FEB.2020 13:05:35	


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2535.0	QPSK	16QAM
	9.04	8.99
LTE band 7, 10MHz Bandwidth, QPSK (99% BW)	LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2535.0	QPSK	16QAM
	13.56	13.49
LTE band 7, 15MHz Bandwidth, QPSK (99% BW)	LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)	

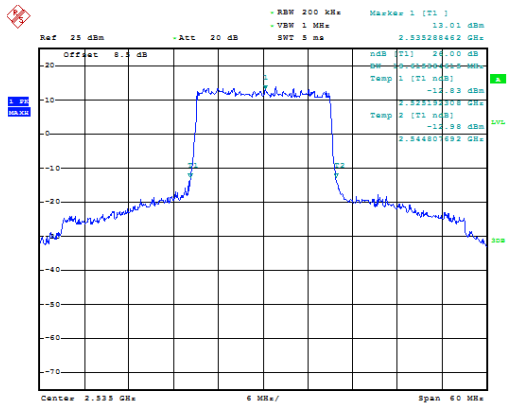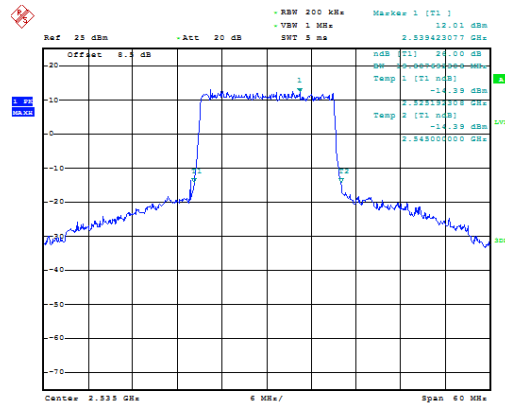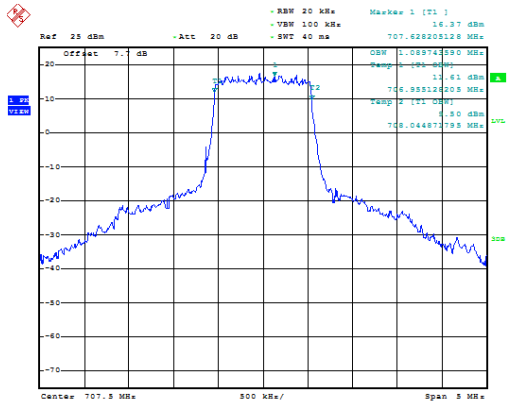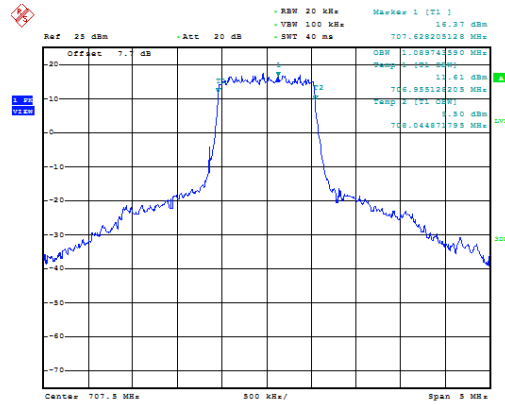Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2535.0	QPSK	16QAM
	17.98	17.98
LTE band 7, 20MHz Bandwidth, QPSK (99% BW)	LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, SWT: 5 ms, Masker 1 [T1], Temp 1 [T1 n dB], Temp 2 [T1 n dB], Center: 2.535 GHz, Span: 60 MHz, Date: 10.FEB.2020 15:57:41	 Ref: 25 dBm, Att: 20 dB, SWT: 5 ms, Masker 1 [T1], Temp 1 [T1 n dB], Temp 2 [T1 n dB], Center: 2.535 GHz, Span: 60 MHz, Date: 10.FEB.2020 15:58:45	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
707.5	QPSK	16QAM
	1.09	1.10
LTE band 12, 1.4MHz Bandwidth, QPSK (99% BW)	LTE band 12, 1.4MHz Bandwidth, 16QAM (99% BW)	
 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Masker 1 [T1], Temp 1 [T1 n dB], Temp 2 [T1 n dB], Center: 707.5 MHz, Span: 5 MHz, Date: 11.FEB.2020 13:16:37	 Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, Masker 1 [T1], Temp 1 [T1 n dB], Temp 2 [T1 n dB], Center: 707.5 MHz, Span: 5 MHz, Date: 11.FEB.2020 13:16:37	

Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
707.5	QPSK	16QAM
	2.69	2.69
LTE band 12, 3MHz Bandwidth, QPSK (99% BW)	LTE band 12, 3MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, BW: 3.00 MHz, Center: 707.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:22:11	Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, BW: 3.00 MHz, Center: 707.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:22:49	
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
707.5	QPSK	16QAM
	4.47	4.50
LTE band 12, 5MHz Bandwidth, QPSK (99% BW)	LTE band 12, 5MHz Bandwidth, 16QAM (99% BW)	
Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, BW: 5.00 MHz, Center: 707.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:19:57	Ref: 25 dBm, Att: 20 dB, SWT: 40 ms, BW: 5.00 MHz, Center: 707.5 MHz, Span: 10 MHz, Date: 11.FEB.2020 13:19:55	

Page Number: 63 of 97
Report Issued Date: Apr.26.2020

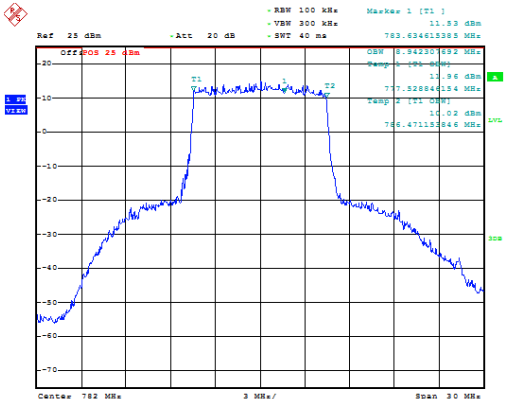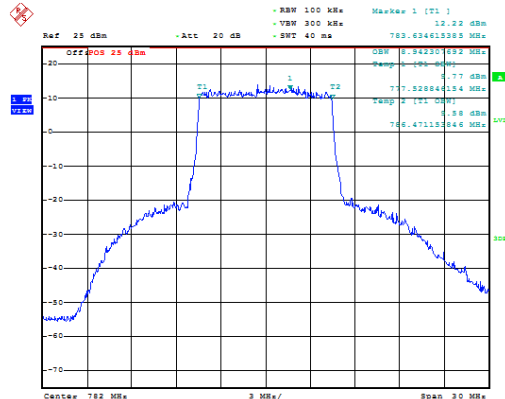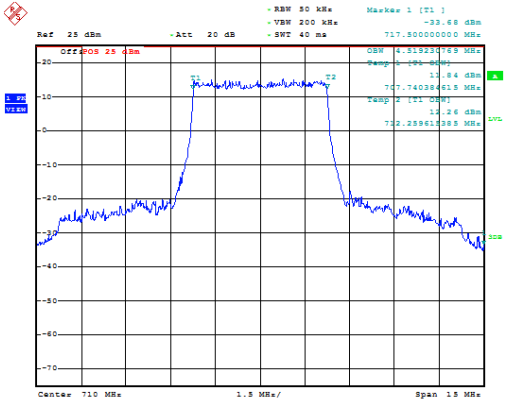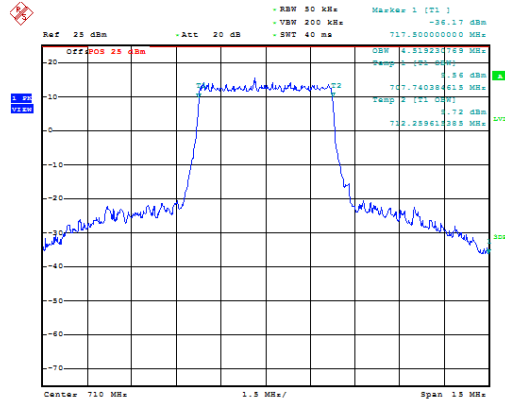Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
782.0	QPSK	16QAM
	8.94	8.94
LTE band 13, 10MHz Bandwidth, QPSK (99% BW)	LTE band 13, 10MHz Bandwidth, 16QAM (99% BW)	
		
Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
710.0	QPSK	16QAM
	4.52	4.52
LTE band 17, 5MHz Bandwidth, QPSK (99% BW)	LTE band 17, 5MHz Bandwidth, 16QAM (99% BW)	
		

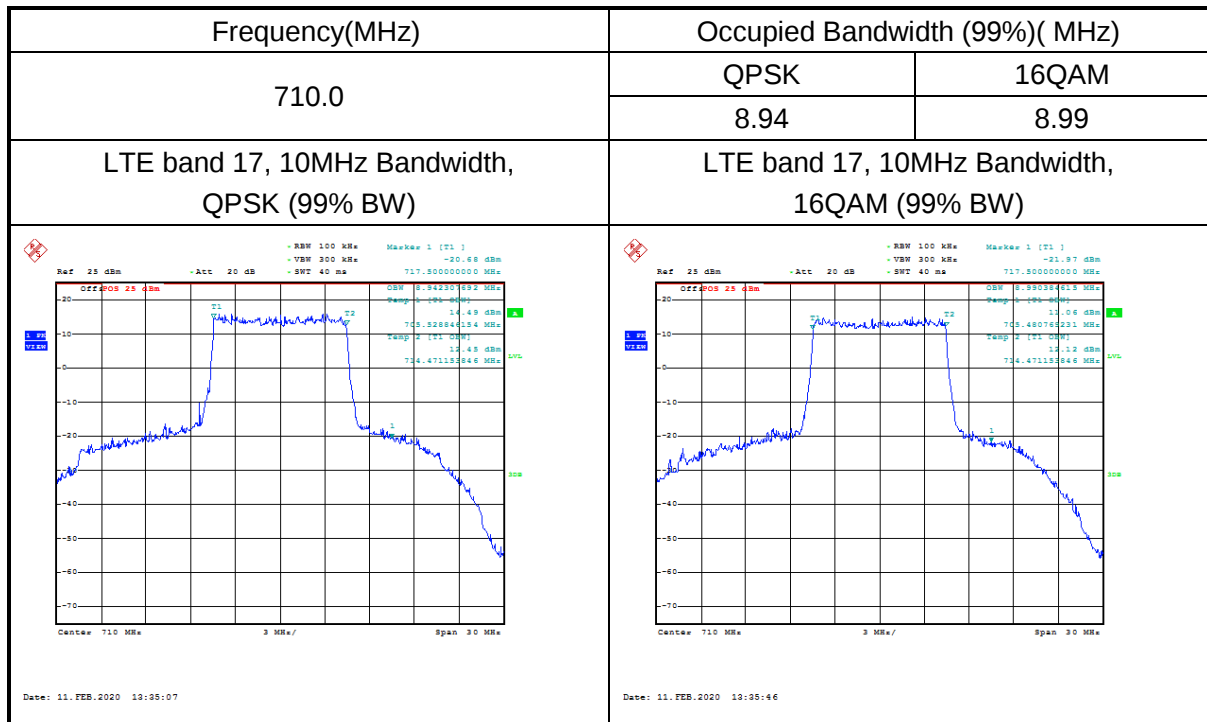

ANNEX A.5. EMISSION BANDWIDTH





Reference

FCC: CFR Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m)

A.5.1 Emission Bandwidth Results





The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW.

Spectrum analyzer plots are included on the following pages.

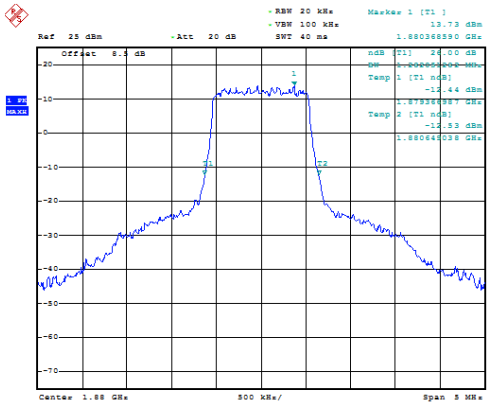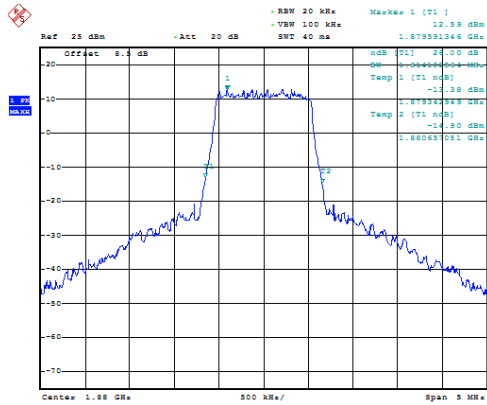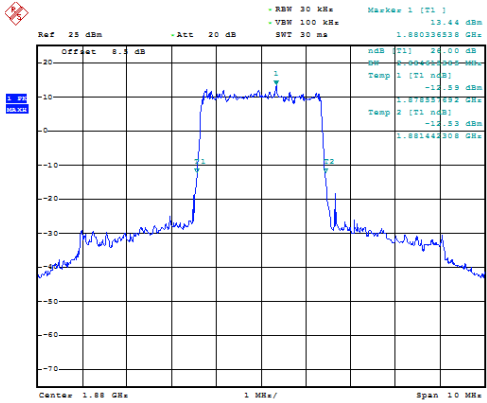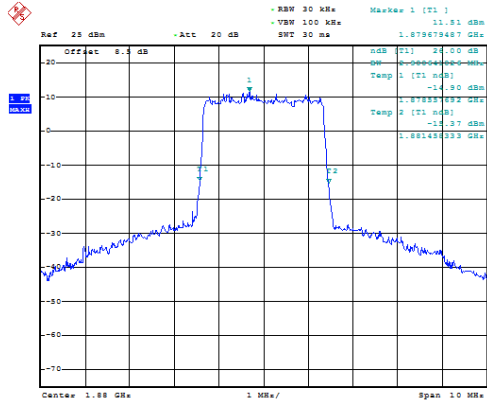Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	1.28	1.31
LTE band 2, 1.4MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 1.4MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 10.FEB.2020 14:02:55		
Date: 10.FEB.2020 14:04:00		
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1880.0	QPSK	16QAM
	2.88	2.91
LTE band 2, 3MHz Bandwidth, QPSK (-26dBc BW)	LTE band 2, 3MHz Bandwidth, 16QAM (-26dBc BW)	
		
Date: 10.FEB.2020 14:05:13		
Date: 10.FEB.2020 14:06:18		





Page Number: 67 of 97
Report Issued Date: Apr.26.2020

Page Number: 68 of 97
Report Issued Date: Apr.26.2020

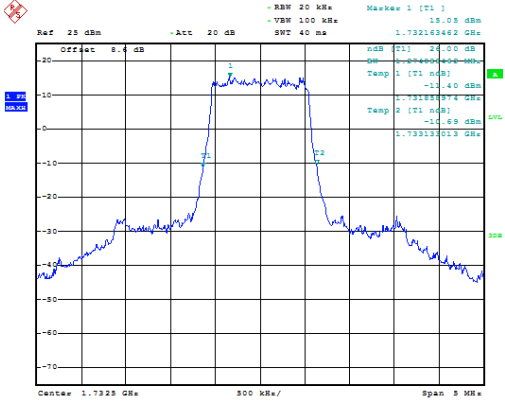
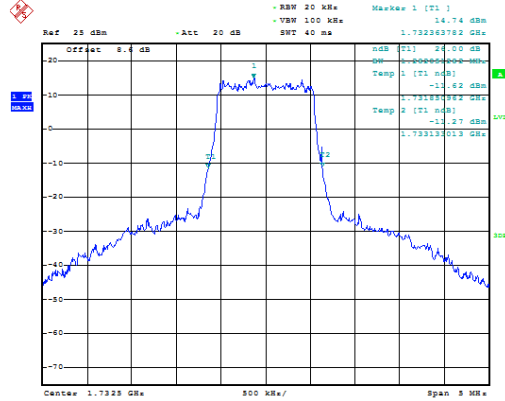
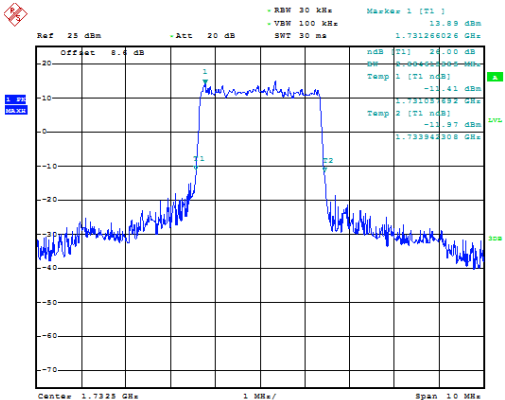
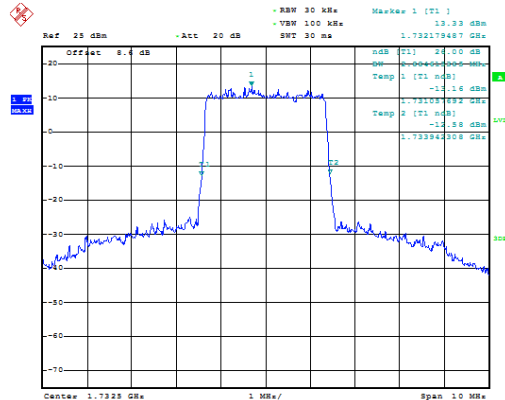
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	1.27	1.28
LTE band 4, 1.4MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 1.4MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 14:13:37	 Date: 10.FEB.2020 14:14:41	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	2.88	2.88
LTE band 4, 3MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 3MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 15:14:16	 Date: 10.FEB.2020 15:15:21	

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	5.07	5.10
LTE band 4, 5MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 5MHz Bandwidth, 16QAM (-26dBc BW)	
Ref: 25 dBm, Att: 20 dB, BW: 50 kHz, VSW: 200 kHz, SW: 10 ms, Marker 1 [T1] 12.79 dBm, nBW [T1] 24.00 dBm, Temp 1 [T1] nBW -12.44 dBm, Temp 2 [T1] nBW -12.51 dBm, 1.73250238 GHz, Date: 10.FEB.2020 15:22:59	Ref: 25 dBm, Att: 20 dB, BW: 50 kHz, VSW: 200 kHz, SW: 10 ms, Marker 1 [T1] 11.93 dBm, nBW [T1] 24.00 dBm, Temp 1 [T1] nBW -12.63 dBm, Temp 2 [T1] nBW -12.78 dBm, 1.73250238 GHz, Date: 10.FEB.2020 15:23:58	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	9.90	9.86
LTE band 4, 10MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 10MHz Bandwidth, 16QAM (-26dBc BW)	
Ref: 25 dBm, Att: 20 dB, BW: 100 kHz, VSW: 300 kHz, SW: 15 ms, Marker 1 [T1] 14.13 dBm, nBW [T1] 24.00 dBm, Temp 1 [T1] nBW -12.81 dBm, Temp 2 [T1] nBW -12.70 dBm, 1.73250544 GHz, Date: 10.FEB.2020 14:17:44	Ref: 25 dBm, Att: 20 dB, BW: 100 kHz, VSW: 300 kHz, SW: 15 ms, Marker 1 [T1] 13.18 dBm, nBW [T1] 24.00 dBm, Temp 1 [T1] nBW -12.32 dBm, Temp 2 [T1] nBW -12.39 dBm, 1.73250544 GHz, Date: 10.FEB.2020 14:18:49	

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	15.00	15.00
LTE band 4, 15MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 15MHz Bandwidth, 16QAM (-26dBc BW)	
Ref: 25 dBm, Att: 20 dB, BW: 200 kHz, Mask: 1 (T1), VSW: 1 MHz, SWT: 5 ms, n dB (T1): 24.00 dB, Temp 1 (T1 n dB): -14.43 dBm, Temp 2 (T1 n dB): -13.02 dBm, 1.728947133 GHz, 1.739921683 GHz Center: 1.7325 GHz, 4.5 MHz, Span: 4.5 MHz Date: 10.FEB.2020 15:17:54	Ref: 25 dBm, Att: 20 dB, BW: 200 kHz, Mask: 1 (T1), VSW: 1 MHz, SWT: 5 ms, n dB (T1): 24.00 dB, Temp 1 (T1 n dB): -14.43 dBm, Temp 2 (T1 n dB): -13.02 dBm, 1.728947133 GHz, 1.739921683 GHz Center: 1.7325 GHz, 4.5 MHz, Span: 4.5 MHz Date: 10.FEB.2020 15:18:58	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
1732.5	QPSK	16QAM
	19.62	19.52
LTE band 4, 20MHz Bandwidth, QPSK (-26dBc BW)	LTE band 4, 20MHz Bandwidth, 16QAM (-26dBc BW)	
Ref: 25 dBm, Att: 20 dB, BW: 200 kHz, Mask: 1 (T1), VSW: 1 MHz, SWT: 5 ms, n dB (T1): 24.00 dB, Temp 1 (T1 n dB): -14.43 dBm, Temp 2 (T1 n dB): -13.02 dBm, 1.728947133 GHz, 1.739921683 GHz Center: 1.7325 GHz, 6 MHz, Span: 6.0 MHz Date: 10.FEB.2020 14:20:59	Ref: 25 dBm, Att: 20 dB, BW: 200 kHz, Mask: 1 (T1), VSW: 1 MHz, SWT: 5 ms, n dB (T1): 24.00 dB, Temp 1 (T1 n dB): -14.43 dBm, Temp 2 (T1 n dB): -13.02 dBm, 1.728403846 GHz, 1.742301692 GHz Center: 1.7325 GHz, 6 MHz, Span: 6.0 MHz Date: 10.FEB.2020 14:22:04	

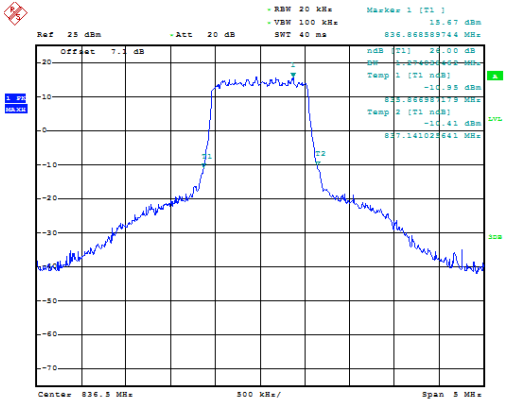
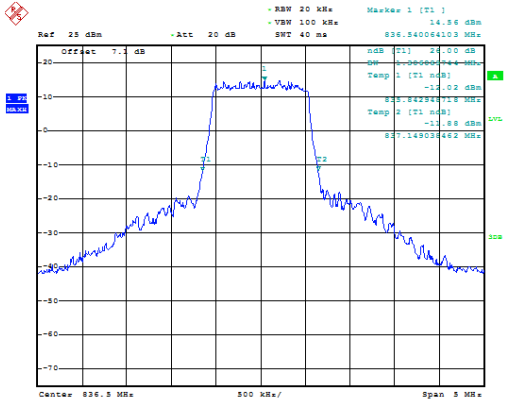
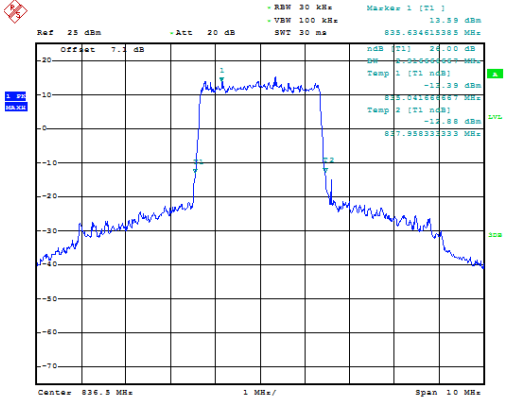
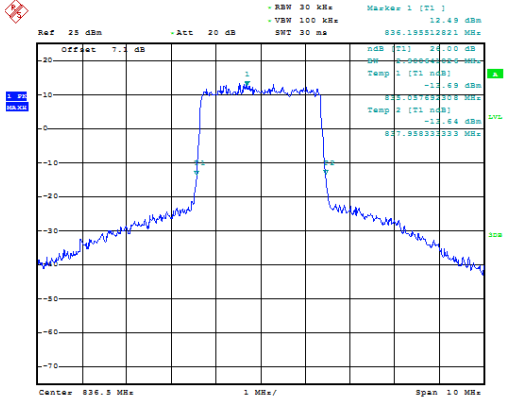
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
836.5		QPSK	16QAM
		1.27	1.31
LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)		LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 15:26:51		 Date: 10.FEB.2020 15:27:56	
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
836.5		QPSK	16QAM
		2.92	2.90
LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)		LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 15:39:10		 Date: 10.FEB.2020 15:40:14	

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
836.5	QPSK	16QAM
	5.02	5.12
LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)	LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)	
Ref 25 dBm -Att 20 dB -RBW 50 KHz -VBW 200 KHz -SWT 10 ms Offset 7.1 dB Center 836.5 MHz 1.5 MHz/ Span 1.5 MHz Date: 10.FEB.2020 15:20:14	Ref 25 dBm -Att 20 dB -RBW 50 KHz -VBW 200 KHz -SWT 10 ms Offset 7.1 dB Center 836.5 MHz 1.5 MHz/ Span 1.5 MHz Date: 10.FEB.2020 15:21:19	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
836.5	QPSK	16QAM
	10.05	9.90
LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)	LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)	
Ref 25 dBm -Att 20 dB -RBW 100 KHz -VBW 300 KHz -SWT 15 ms Offset 7.1 dB Center 836.5 MHz 3 MHz/ Span 3.0 MHz Date: 10.FEB.2020 15:24:14	Ref 25 dBm -Att 20 dB -RBW 100 KHz -VBW 300 KHz -SWT 15 ms Offset 7.1 dB Center 836.5 MHz 3 MHz/ Span 3.0 MHz Date: 10.FEB.2020 15:25:19	

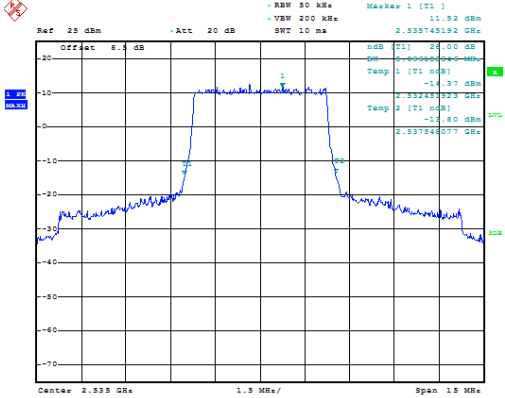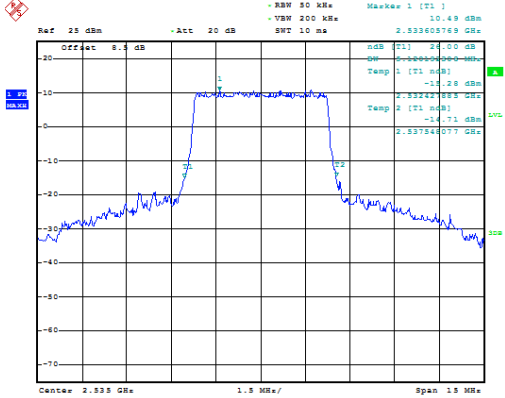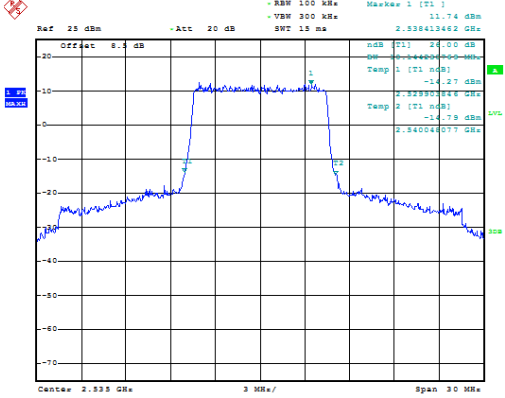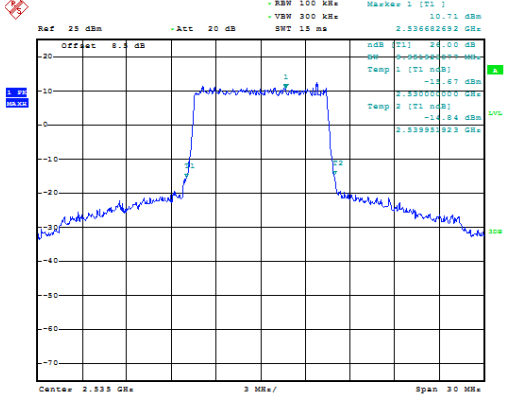Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
2535.0		QPSK	16QAM
		5.10	5.12
LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)		LTE band 7, 5MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 15:44:19		 Date: 10.FEB.2020 15:45:24	
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
2535.0		QPSK	16QAM
		10.14	9.95
LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)		LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 15:58:21		 Date: 10.FEB.2020 15:54:25	

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
2535.0	QPSK	16QAM
	15.14	15.07
LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)	LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)	
-RBW 200 kHz -VSW 1 MHz -SWT 5 ms Marker 1 [T1] 13.81 dBm 2.532848077 GHz Offset 0.5 dB Att 20 dB ndB [T1] 24.00 dB Temp 1 [T1 ndB] -12.18 dBm Temp 2 [T1 ndB] -12.89 dBm 2.542572115 GHz Center 2.535 GHz 4.5 MHz Span 4.5 MHz Date: 10.FEB.2020 15:47:49	-RBW 200 kHz -VSW 1 MHz -SWT 5 ms Marker 1 [T1] 12.81 dBm 2.539375000 GHz Offset 0.5 dB Att 20 dB ndB [T1] 24.00 dB Temp 1 [T1 ndB] -14.18 dBm Temp 2 [T1 ndB] -13.84 dBm 2.542572115 GHz Center 2.535 GHz 4.5 MHz Span 4.5 MHz Date: 10.FEB.2020 15:48:54	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
2535.0	QPSK	16QAM
	19.62	19.71
LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)	LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)	
-RBW 200 kHz -VSW 1 MHz -SWT 5 ms Marker 1 [T1] 13.01 dBm 2.535423077 GHz Offset 0.5 dB Att 20 dB ndB [T1] 24.00 dB Temp 1 [T1 ndB] -12.82 dBm Temp 2 [T1 ndB] -12.89 dBm 2.544801892 GHz Center 2.535 GHz 6 MHz Span 6.0 MHz Date: 10.FEB.2020 15:57:41	-RBW 200 kHz -VSW 1 MHz -SWT 5 ms Marker 1 [T1] 12.01 dBm 2.539000000 GHz Offset 0.5 dB Att 20 dB ndB [T1] 24.00 dB Temp 1 [T1 ndB] -14.39 dBm Temp 2 [T1 ndB] -14.39 dBm 2.545000000 GHz Center 2.535 GHz 6 MHz Span 6.0 MHz Date: 10.FEB.2020 15:58:45	

Page Number: 76 of 97
Report Issued Date: Apr.26.2020

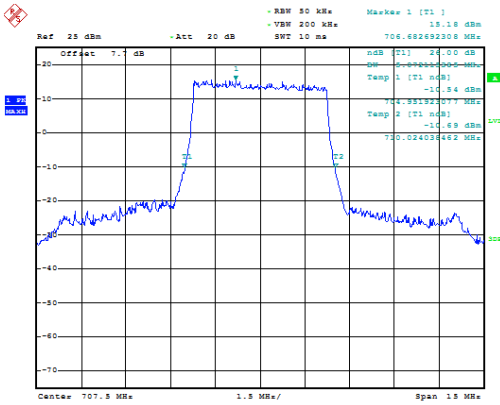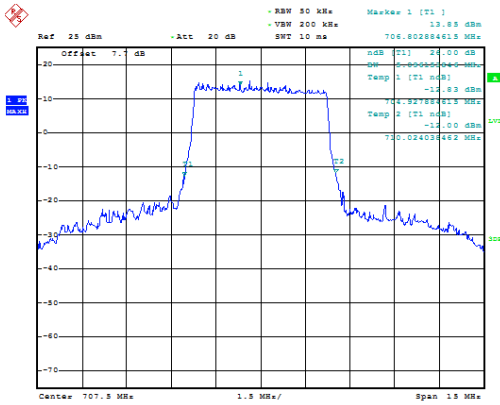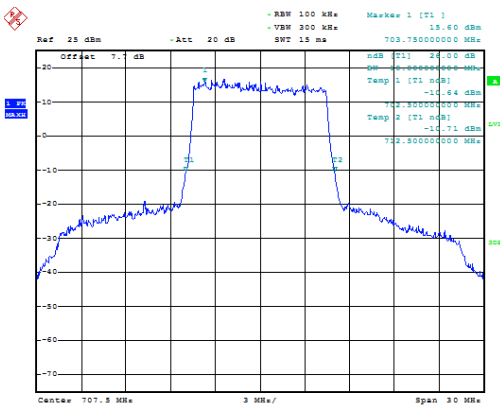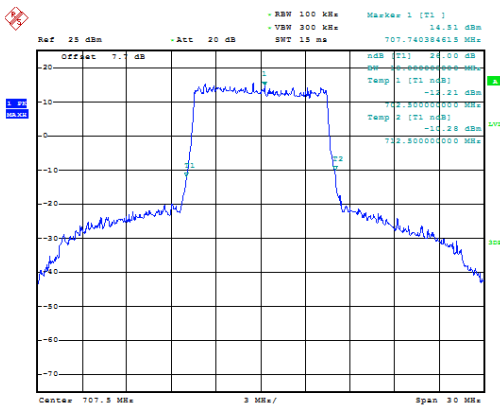Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
707.5		QPSK	16QAM
		5.07	5.10
LTE band 12, 5MHz Bandwidth, QPSK (-26dBc BW)		LTE band 12, 5MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 16:18:59		 Date: 10.FEB.2020 16:20:03	
Frequency(MHz)		Occupied Bandwidth (-26dBc)(MHz)	
707.5		QPSK	16QAM
		10.00	10.00
LTE band 12, 10MHz Bandwidth, QPSK (-26dBc BW)		LTE band 12, 10MHz Bandwidth, 16QAM (-26dBc BW)	
 Date: 10.FEB.2020 16:18:19		 Date: 10.FEB.2020 16:16:24	

Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
710.0	QPSK	16QAM
	5.10	5.10
LTE band 17, 5MHz Bandwidth, QPSK (-26dBc BW)	LTE band 17, 5MHz Bandwidth, 16QAM (-26dBc BW)	
Frequency(MHz)	Occupied Bandwidth (-26dBc)(MHz)	
710.0	QPSK	16QAM
	10.19	9.95
LTE band 17, 10MHz Bandwidth, QPSK (-26dBc BW)	LTE band 17, 10MHz Bandwidth, 16QAM (-26dBc BW)	

ANNEX A.6. BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m)

A.6.1 Measurement limit


Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


A.6.2 Measurement result

Only worst case result is given below

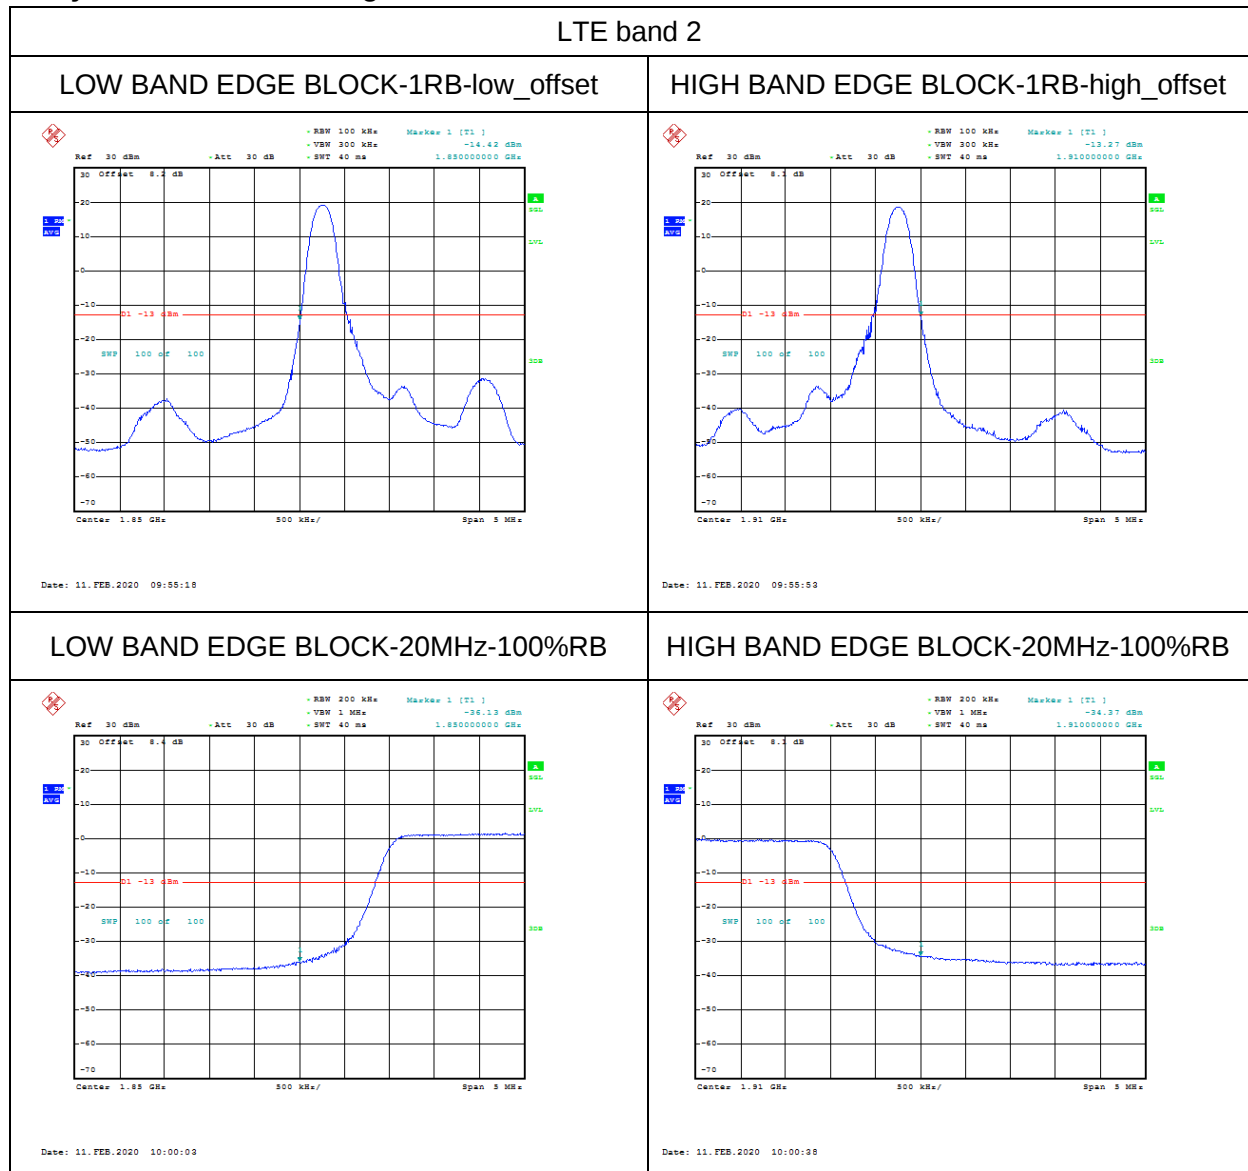


LTE band 4

LOW BAND EDGE BLOCK-1RB-low_offset

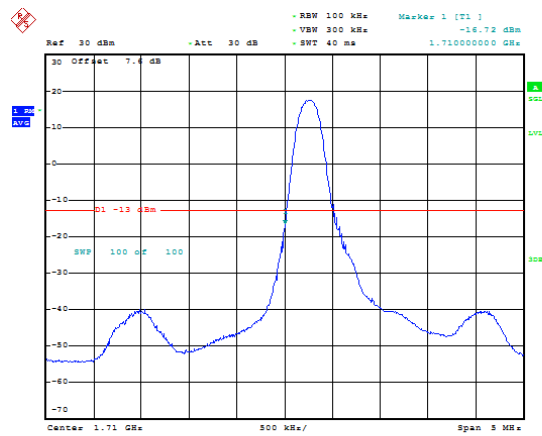


Date: 11.FEB.2020 10:10:43

HIGH BAND EDGE BLOCK-1RB-high_offset

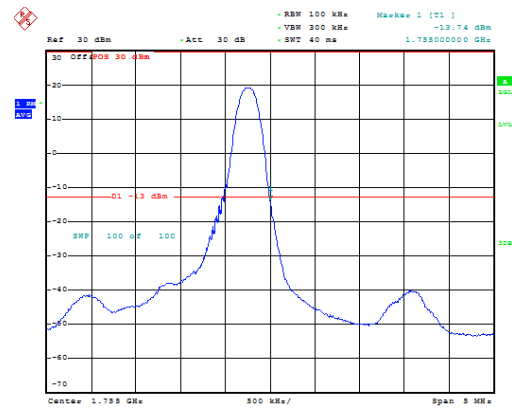


Date: 11.FEB.2020 10:11:18

LOW BAND EDGE BLOCK-20MHz-100%RB

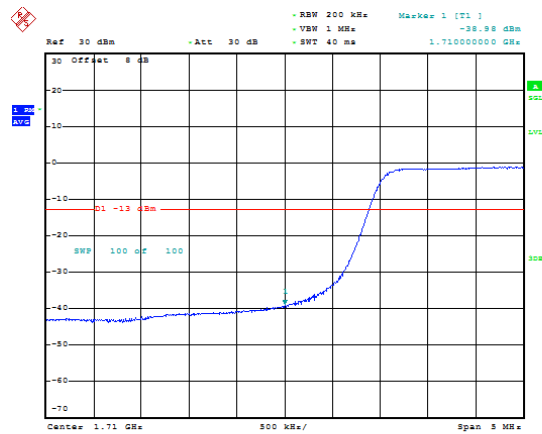

Date: 11.FEB.2020 10:07:00


HIGH BAND EDGE BLOCK-20MHz-100%RB

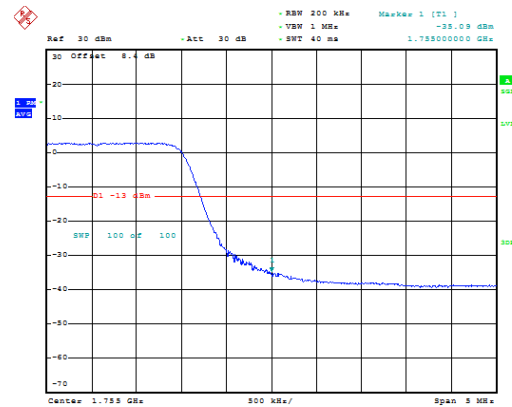

Date: 19.FEB.2020 10:51:05


LTE band 5

LOW BAND EDGE BLOCK-1RB-low_offset

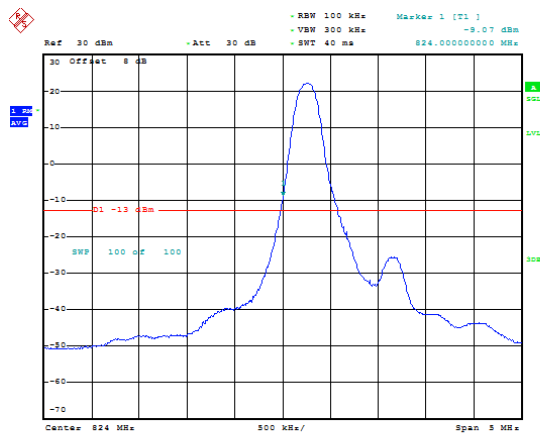


Date: 11.FEB.2020 10:14:05

HIGH BAND EDGE BLOCK-1RB-high_offset

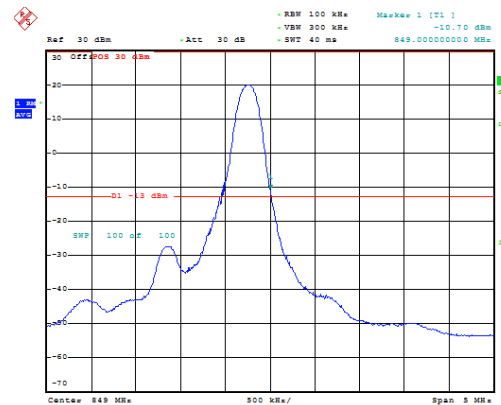


Date: 11.FEB.2020 10:14:41

LOW BAND EDGE BLOCK-10MHz-100%RB

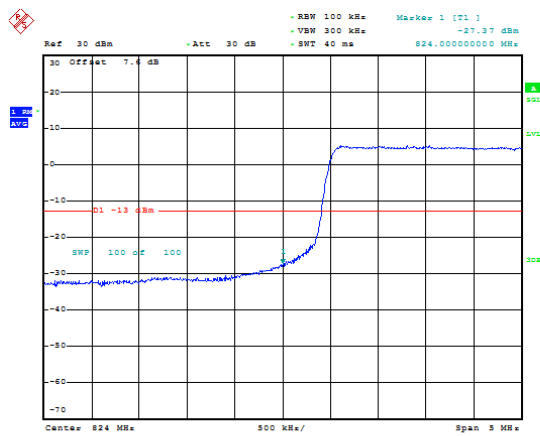

Date: 11.FEB.2020 10:16:56


HIGH BAND EDGE BLOCK-10MHz-100%RB

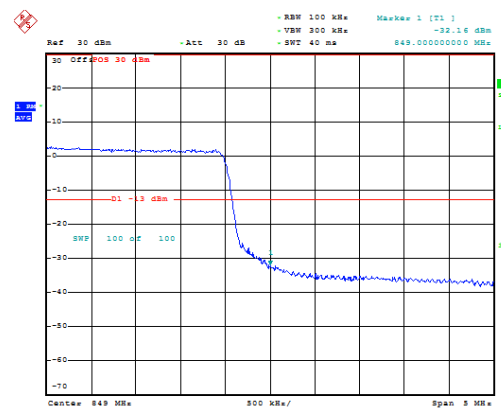

Date: 11.FEB.2020 10:17:31


LTE band 7

LOW BAND EDGE BLOCK-1RB- high_offset

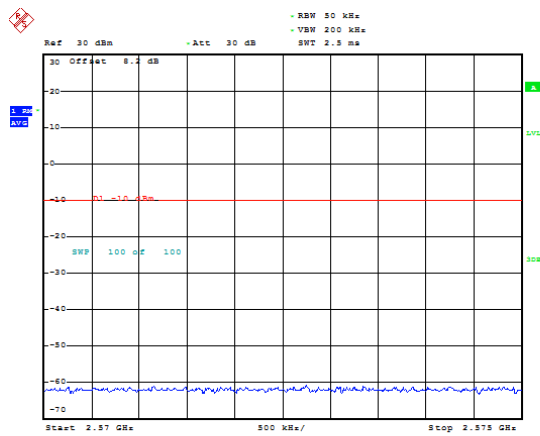


Date: 11.FEB.2020 10:26:52

HIGH BAND EDGE BLOCK-1RB-high_offset

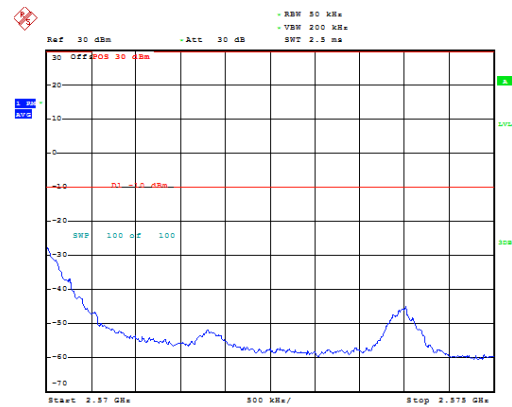


Date: 11.FEB.2020 10:29:45

LOW BAND EDGE BLOCK-1RB- high_offset

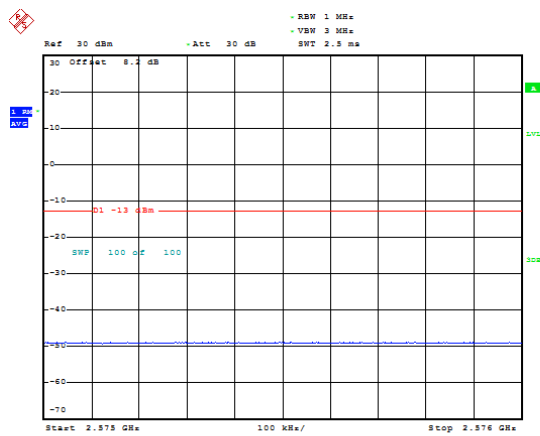


Date: 11.FEB.2020 10:26:57

HIGH BAND EDGE BLOCK-1RB-high_offset

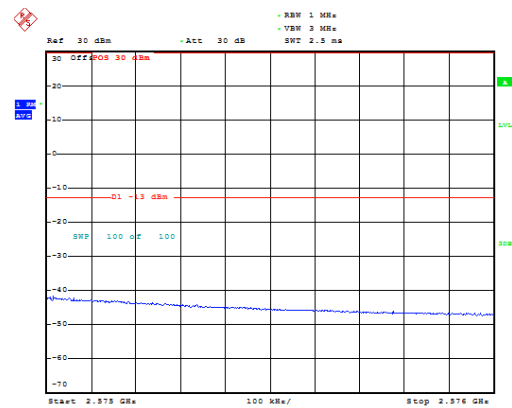


Date: 11.FEB.2020 10:30:09

LOW BAND EDGE BLOCK-1RB- high_offset

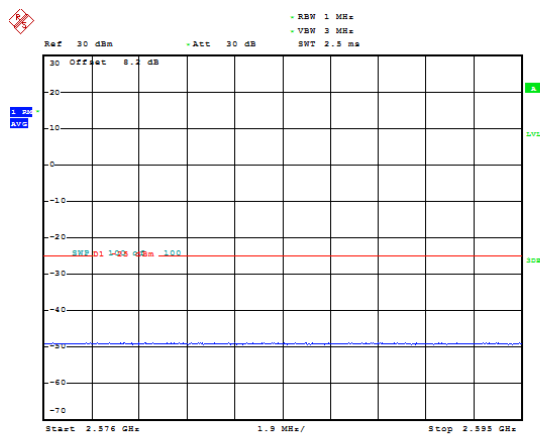


Date: 11.FEB.2020 10:27:21


HIGH BAND EDGE BLOCK-1RB-high_offset

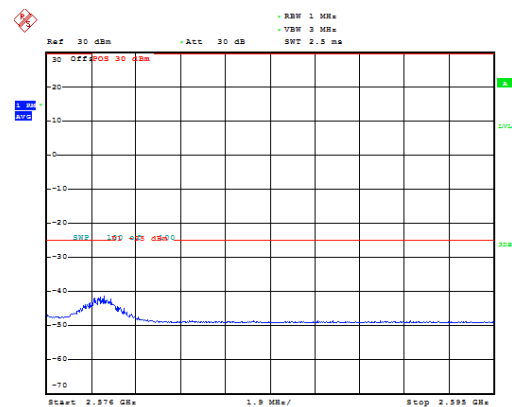

Date: 11.FEB.2020 10:30:33

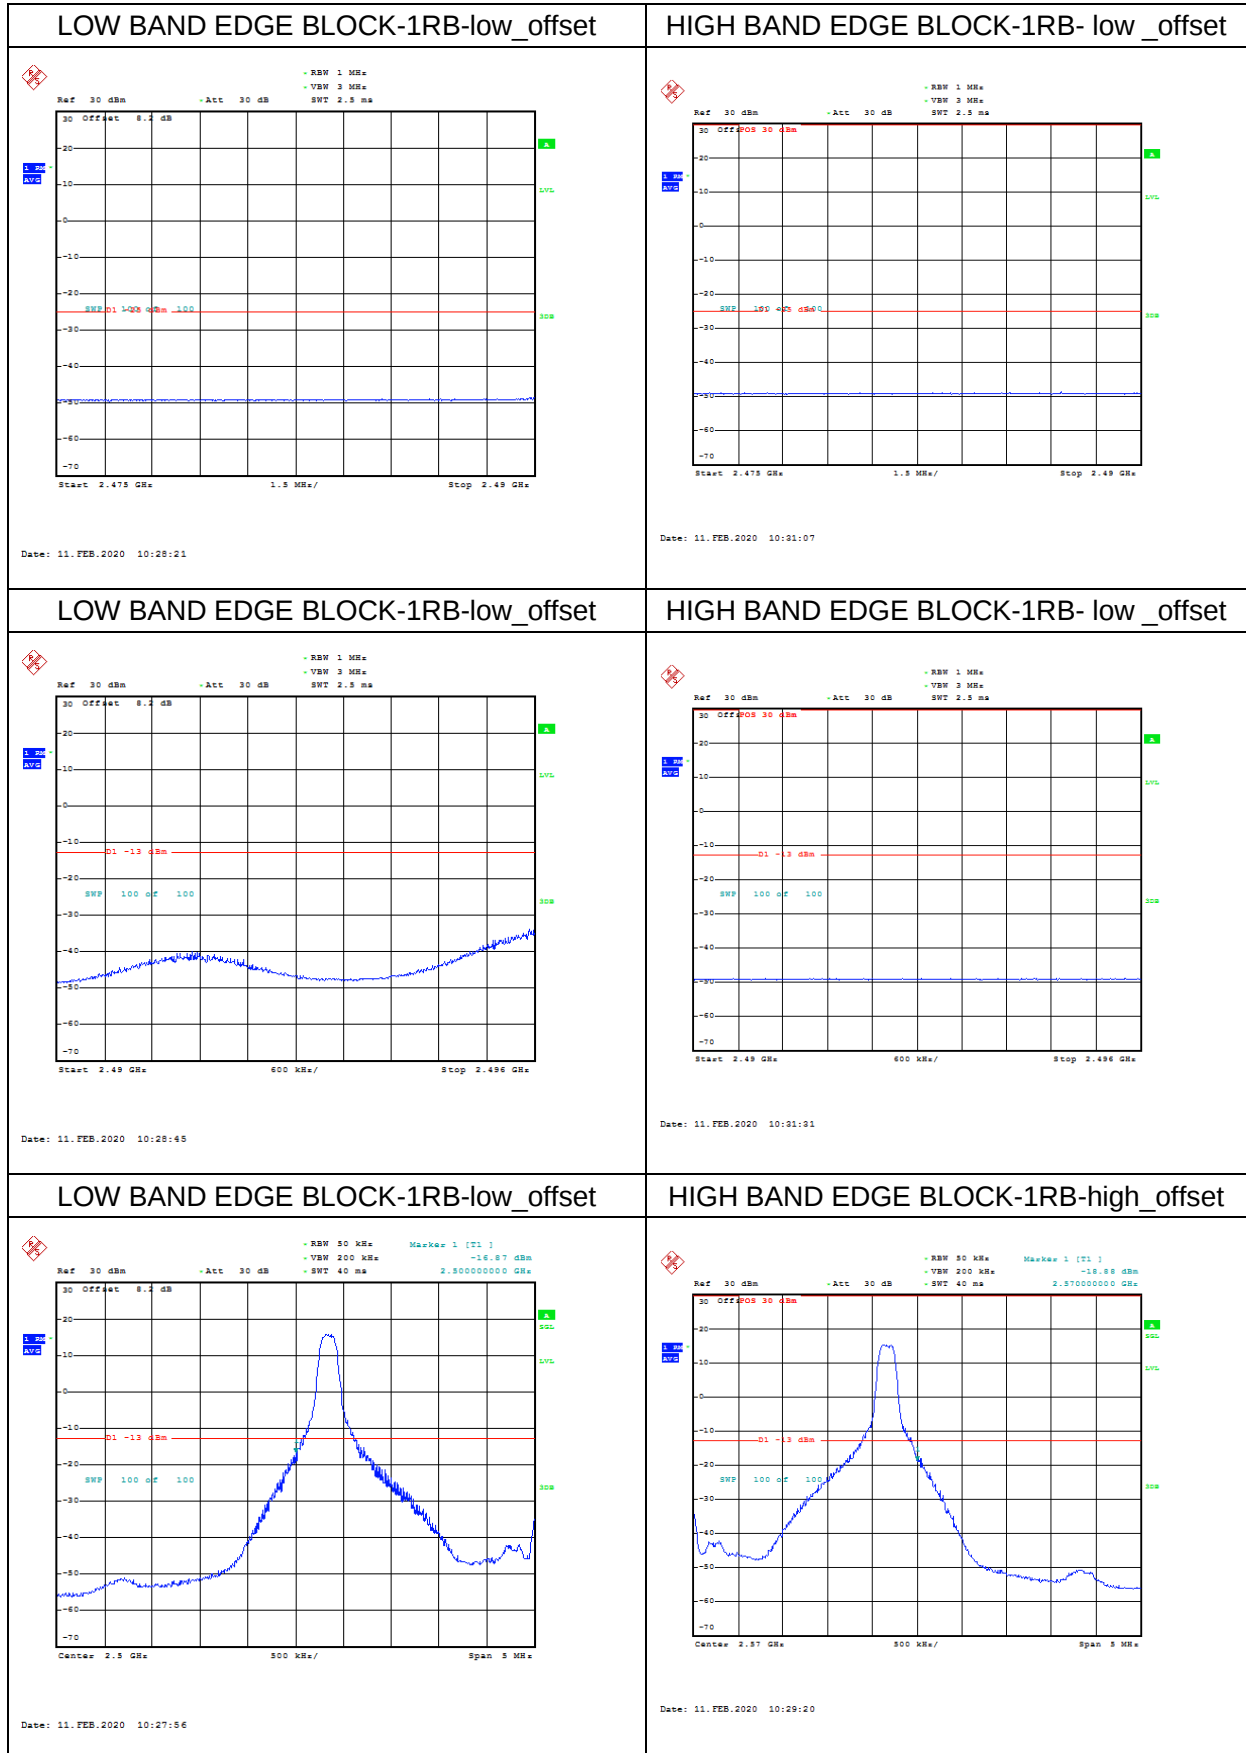


LOW BAND EDGE BLOCK-20MHz-100%RB

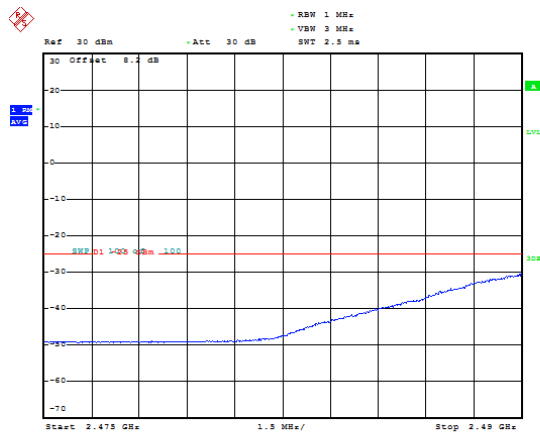


Date: 11.FEB.2020 10:34:15

HIGH BAND EDGE BLOCK-20MHz-100%RB

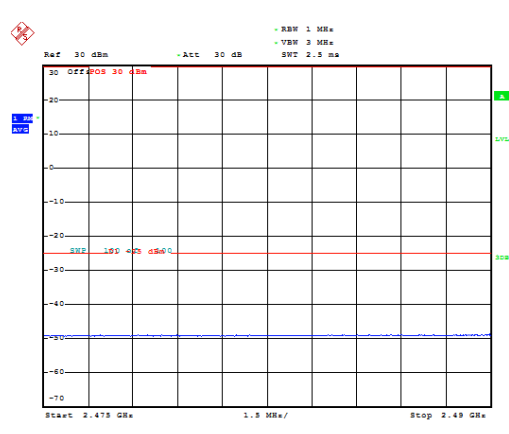


Date: 11.FEB.2020 10:36:52

LOW BAND EDGE BLOCK-20MHz-100%RB

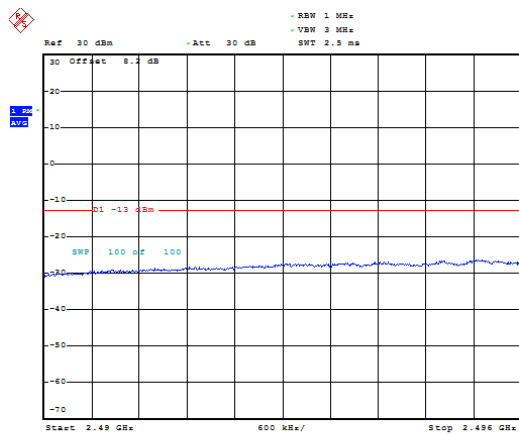


Date: 11.FEB.2020 10:34:39

HIGH BAND EDGE BLOCK-20MHz-100%RB

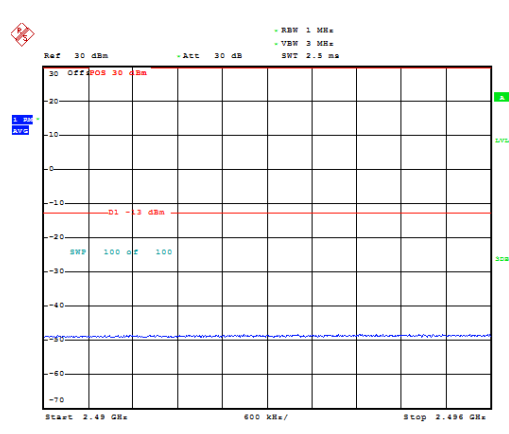


Date: 11.FEB.2020 10:37:17

LOW BAND EDGE BLOCK-20MHz-100%RB

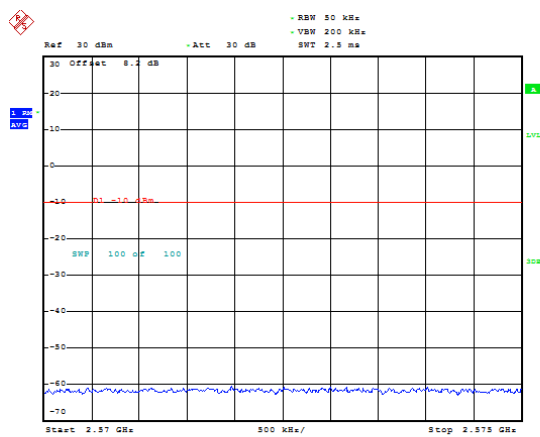


Date: 11.FEB.2020 10:35:04

HIGH BAND EDGE BLOCK-20MHz-100%RB

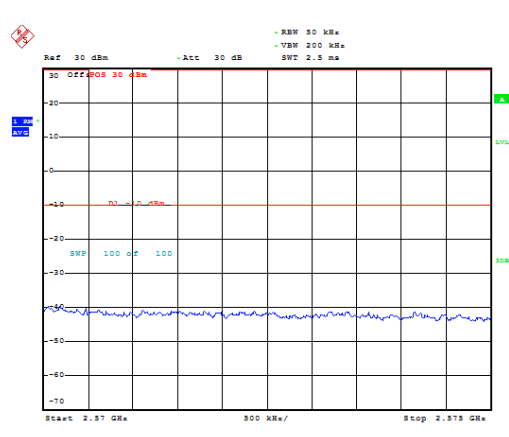


Date: 11.FEB.2020 10:37:42

LOW BAND EDGE BLOCK-20MHz-100%RB

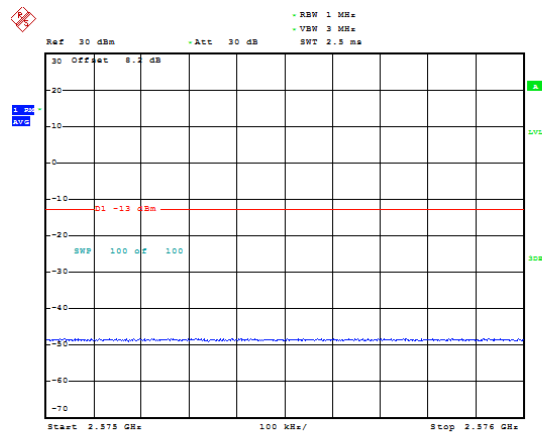


Date: 11.FEB.2020 10:35:29

HIGH BAND EDGE BLOCK-20MHz-100%RB

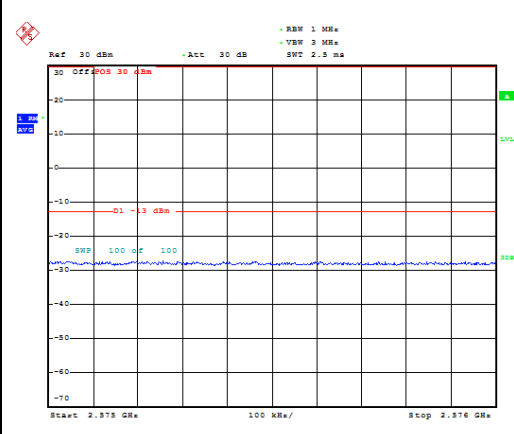


Date: 11.FEB.2020 10:38:06

LOW BAND EDGE BLOCK-20MHz-100%RB

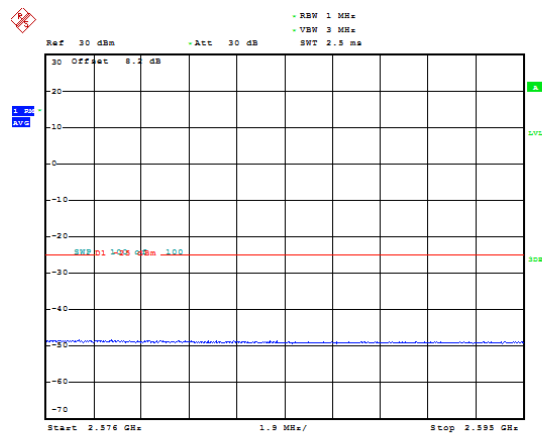


Date: 11.FEB.2020 10:35:59

HIGH BAND EDGE BLOCK-20MHz-100%RB

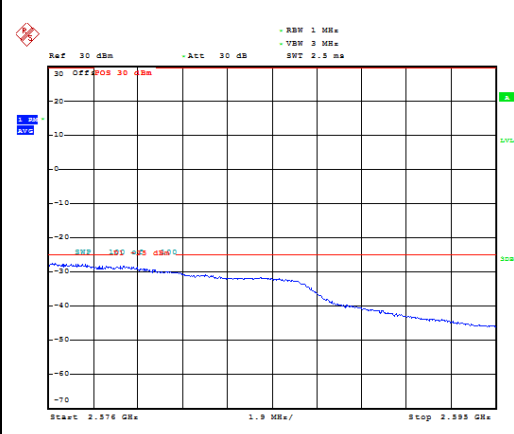


Date: 11.FEB.2020 10:38:31

LOW BAND EDGE BLOCK-20MHz-100%RB

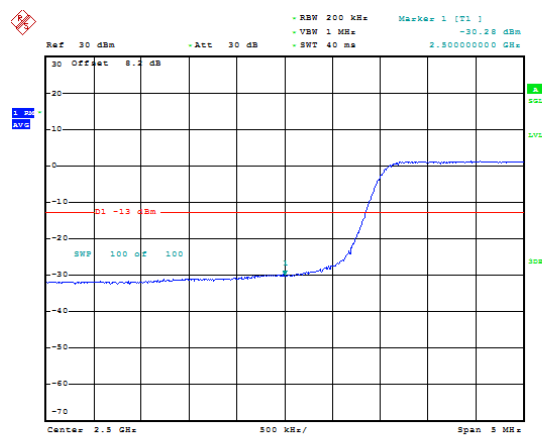

Date: 11.FEB.2020 10:39:51


HIGH BAND EDGE BLOCK-20MHz-100%RB

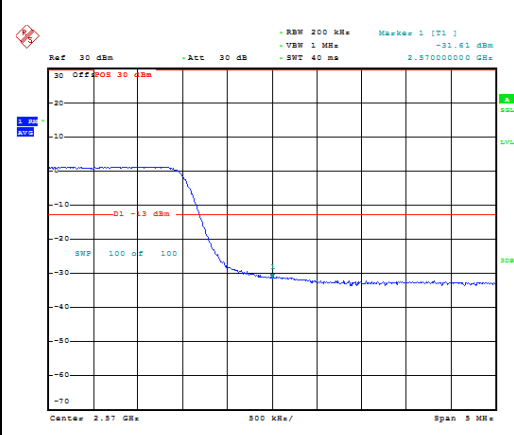

Date: 11.FEB.2020 10:39:28


LTE band 12

LOW BAND EDGE BLOCK-1RB-low_offset

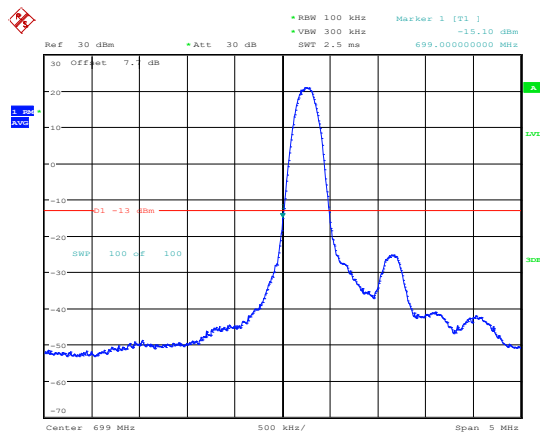


Date: 19.FEB.2020 13:38:25

HIGH BAND EDGE BLOCK-1RB-high_offset

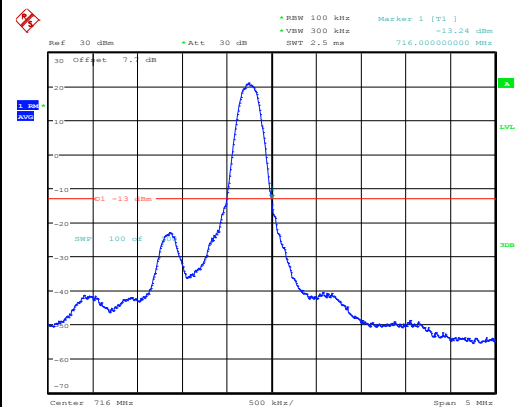


Date: 19.FEB.2020 13:35:33

LOW BAND EDGE BLOCK-10MHz-100%RB

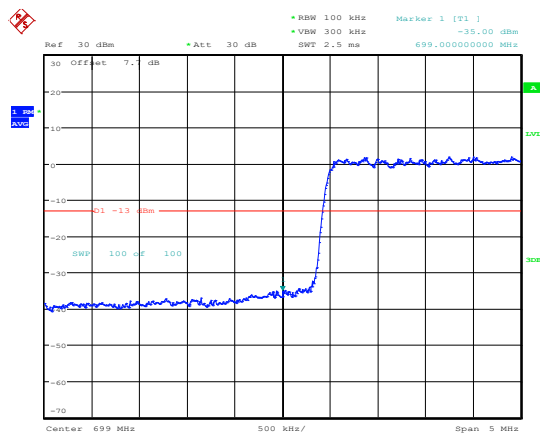

Date: 19.FEB.2020 13:42:13


HIGH BAND EDGE BLOCK-10MHz-100%RB

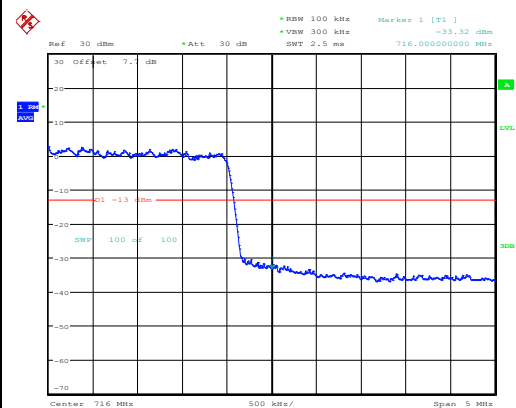

Date: 19.FEB.2020 13:42:53


LTE band 13

LOW BAND EDGE BLOCK-1RB-low_offset

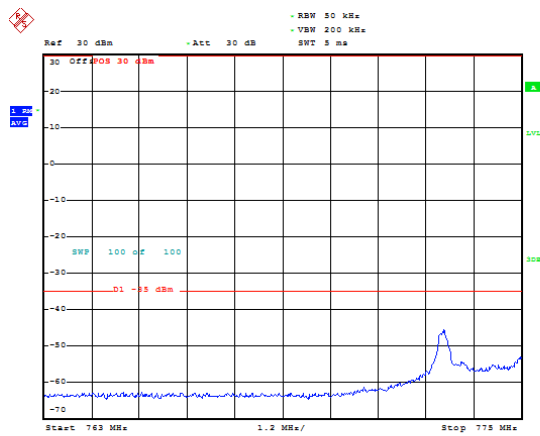


Date: 11.FEB.2020 10:52:24

HIGH BAND EDGE BLOCK-1RB- low_offset

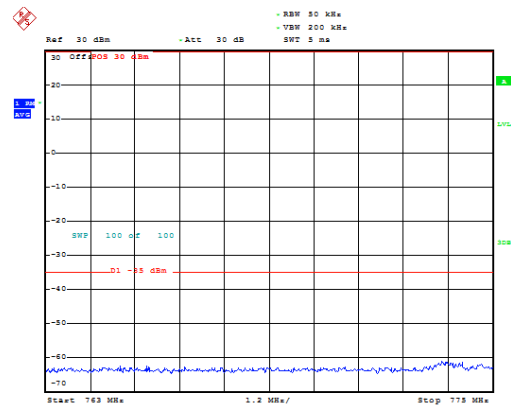


Date: 11.FEB.2020 10:53:57

LOW BAND EDGE BLOCK-1RB- high_offset

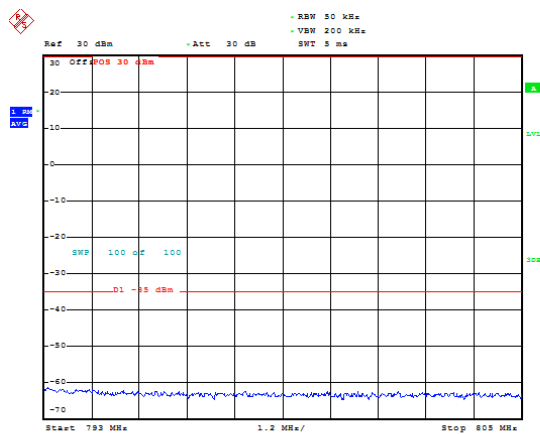


Date: 11.FEB.2020 10:51:25

HIGH BAND EDGE BLOCK-1RB-high_offset

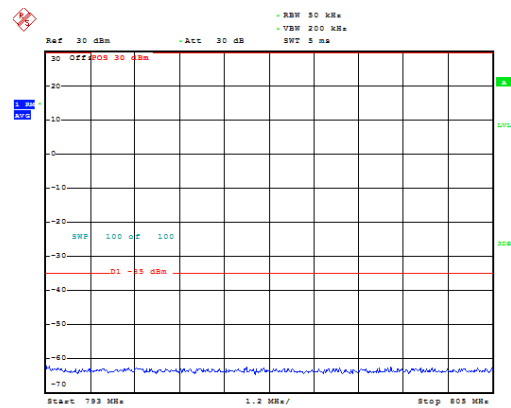


Date: 11.FEB.2020 10:53:24

LOW BAND EDGE BLOCK-1RB-low_offset

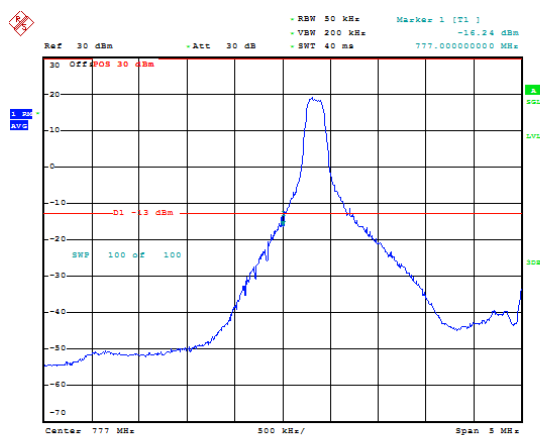


Date: 11.FEB.2020 10:52:00

HIGH BAND EDGE BLOCK-1RB-high_offset

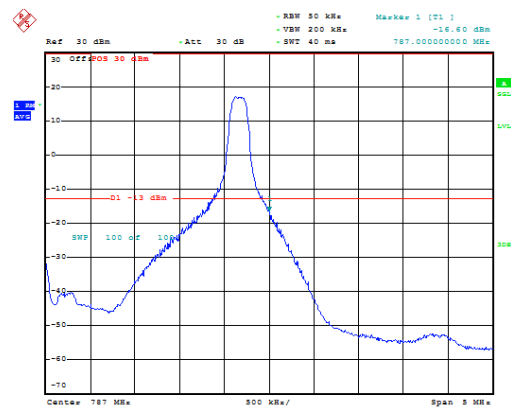


Date: 11.FEB.2020 10:52:59

LOW BAND EDGE BLOCK-10MHz-100%RB

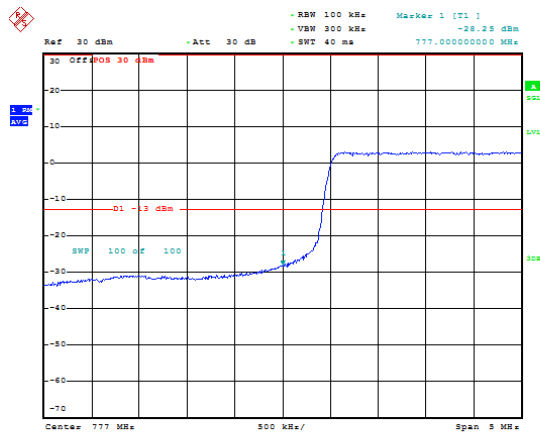

Date: 11.FEB.2020 10:48:00


HIGH BAND EDGE BLOCK-10MHz-100%RB

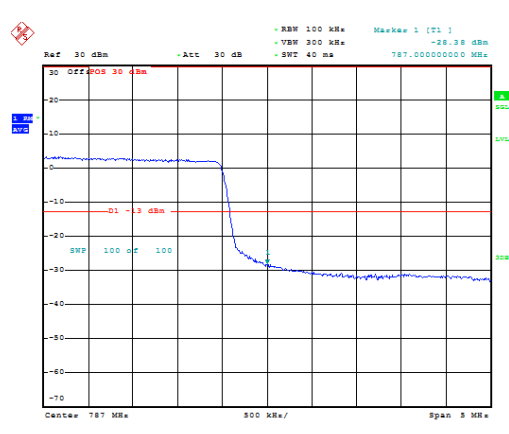

Date: 11.FEB.2020 10:48:35


LTE band 17

LOW BAND EDGE BLOCK-1RB-low_offset

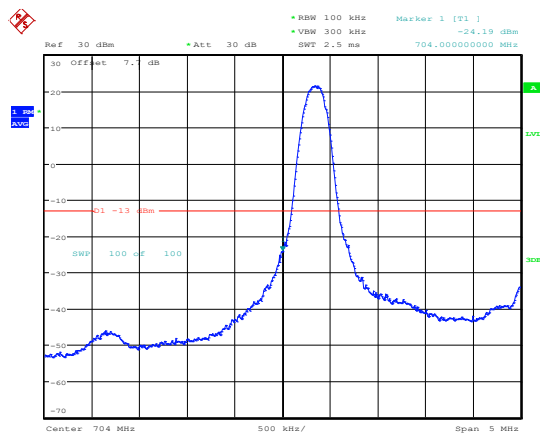


Date: 19.FEB.2020 14:19:39

HIGH BAND EDGE BLOCK-1RB-high_offset

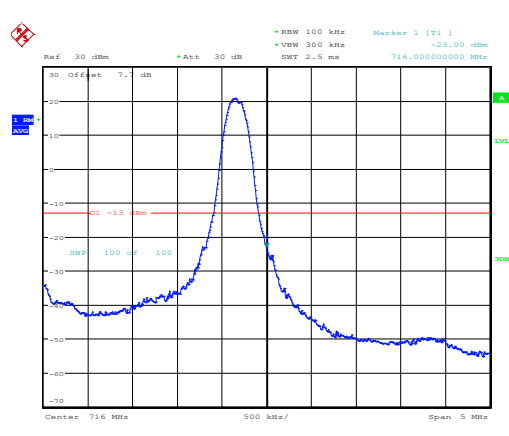


Date: 19.FEB.2020 14:21:18

LOW BAND EDGE BLOCK-10MHz-100%RB

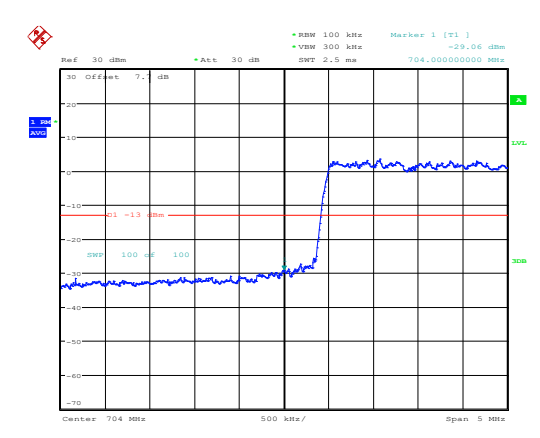

Date: 19.FEB.2020 14:25:01

HIGH BAND EDGE BLOCK-10MHz-100%RB

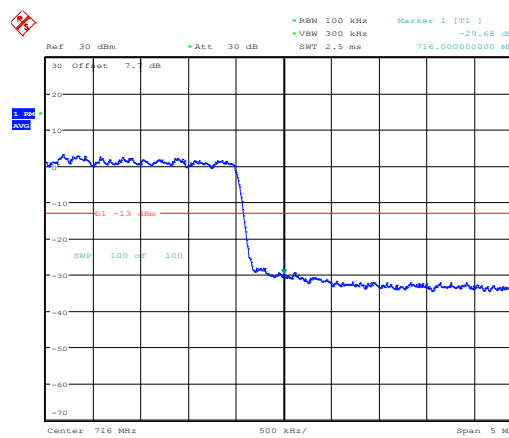

Date: 19.FEB.2020 14:24:19

ANNEX A.7. CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m)

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit


Part 22.917(b),24.238(a), 27.53(g),27.53(h), 27.53(m) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A. 7.3 Measurement result

Only worst case result is given below

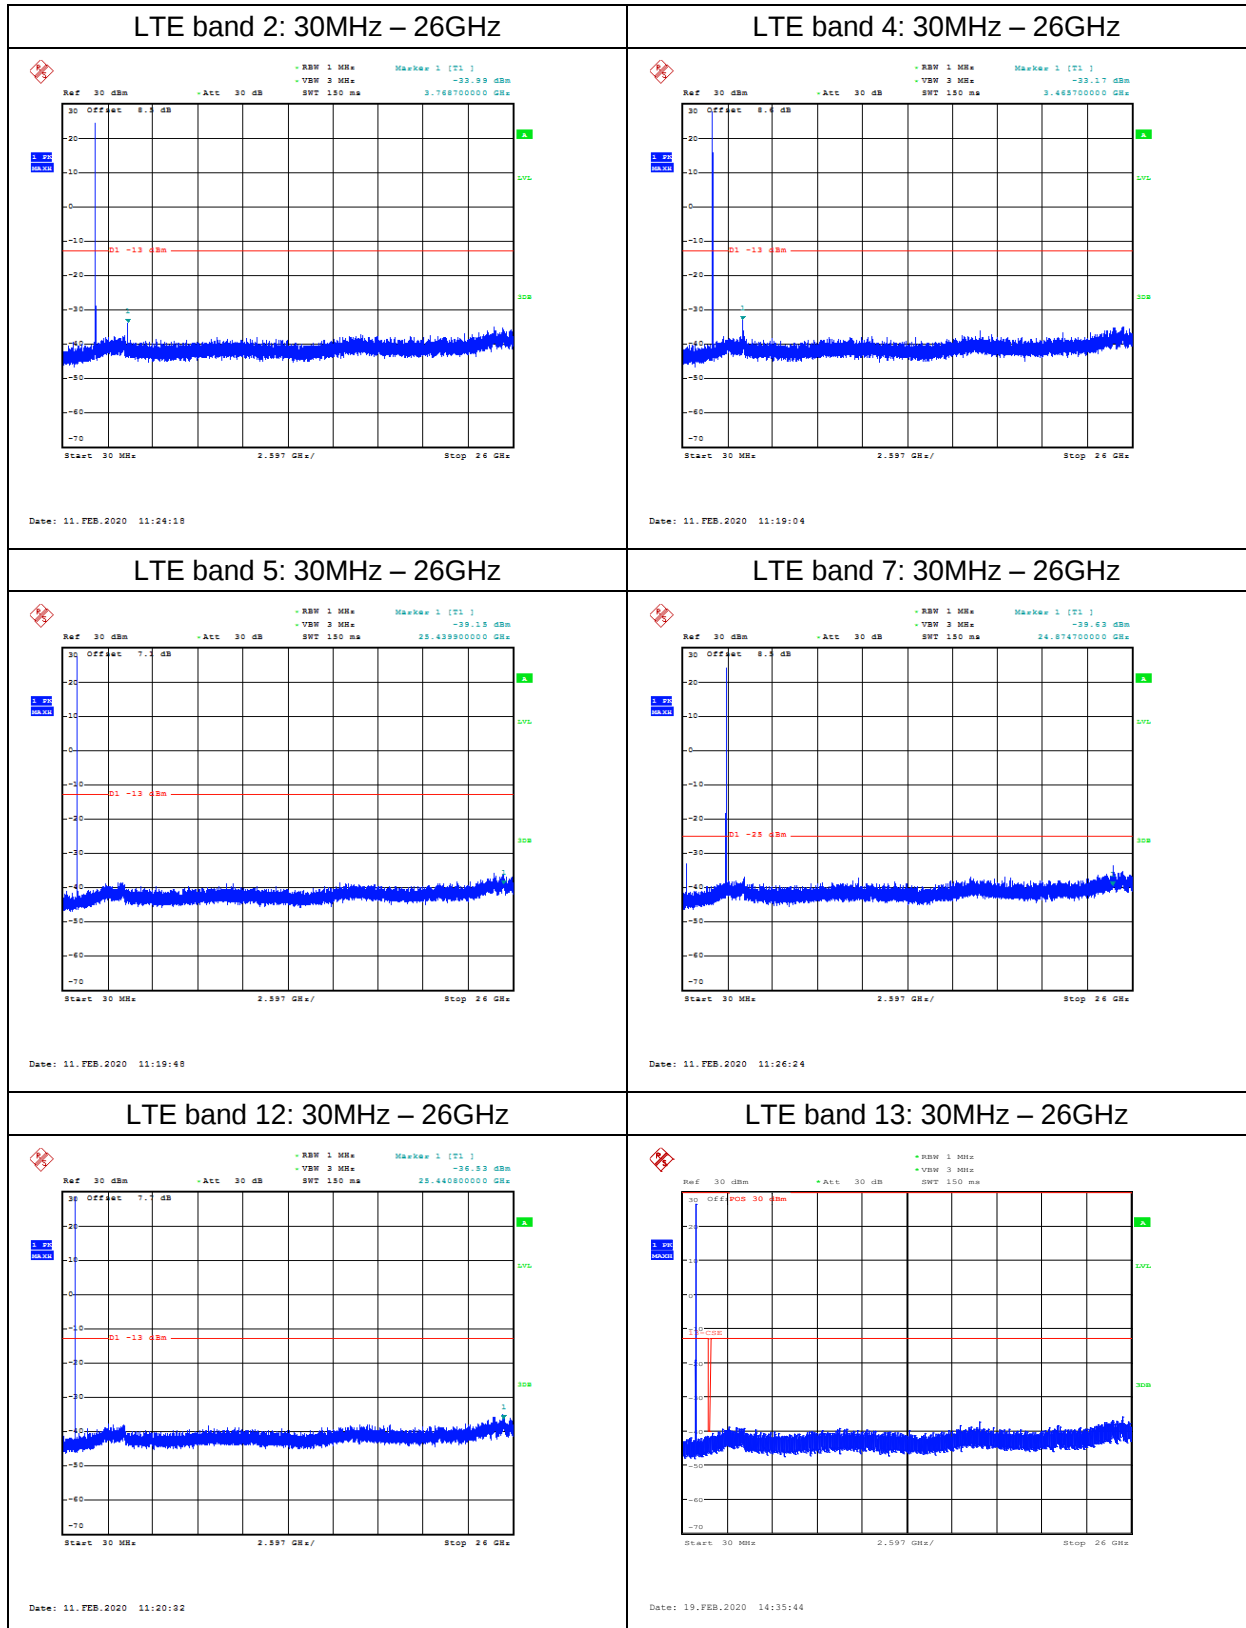

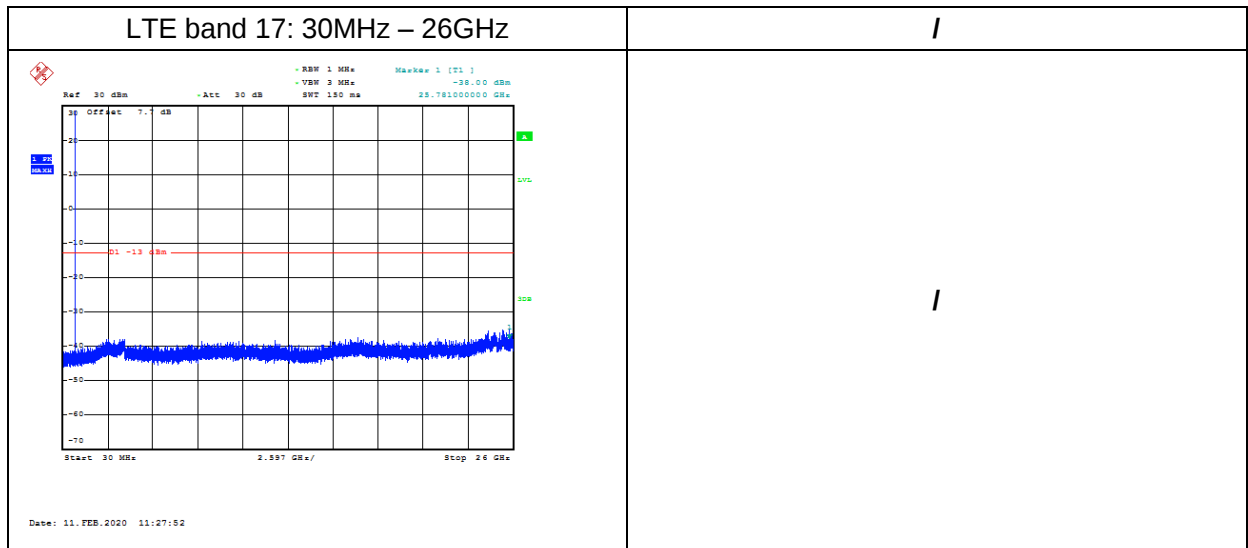

ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 24.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7:

- Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Set the measurement interval to 1 ms
- Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

Not exceed 13 dB

A.8.2 Measurement results

LTE band 2, 20MHz

Frequency(MHz)	PAPR(dB)	
1880.0	QPSK	16QAM
	5.00	6.25

LTE band 4, 20MHz

Frequency(MHz)	PAPR(dB)	
1732.5	QPSK	16QAM
	4.97	6.28

LTE band 5, 10MHz

Frequency(MHz)	PAPR(dB)	
836.5	QPSK	16QAM
	5.19	5.99

LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
2535.0	QPSK	16QAM
	5.03	6.25

LTE band 12, 10MHz

Frequency(MHz)	PAPR(dB)	
707.5	QPSK	16QAM
	5.22	6.09

LTE band 13, 10MHz

Frequency(MHz)	PAPR(dB)	
782.0	QPSK	16QAM
	4.84	5.58

LTE band 17,10MHz

Frequency(MHz)	PAPR(dB)	
710.0	QPSK	16QAM
	4.90	5.77

ANNEX B. Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

ANNEX C. Detailed Test Results**ANNEX C.1. Main Terms**

Verdict	Verdict of each test cases.
Test cases	Test cases identification number and description in ETSI EN 300 328 test specification and ETSI specification.

ANNEX C.2. Terms used in Condition column

Tnom	Normal temperature
Tmin	Low temperature
Tmax	High temperature
Vnom	Normal voltage

ANNEX C.3. Terms used in Verdict column

P	Pass,the EUT complies with the essential requirements in the standard.
NM	Not measure, the test was not measured by ECIT.
NA	Not applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

ANNEX C.4. Terms used in Note column

EUT ID	EUT ID (e.g N01, N02.....) is used to identify the EUT tested used for each test cases as specified in section 3 of this test report.
Lab Code	Lab code is used to identify the subcontracted lab if this test cases is performed in the subcontracted lab.

Subcontracted test lab code: N/A

ANNEX D. Accreditation Certificate



*****END OF REPORT*****